DESIGN DATA							
Traffic	Average Daily						Max Hour
Current 2013	Pass:	N/A	Trucks:	N/A	Total:	<100	N/A
Forecast 2033	Pass:	N/A	Trucks:	N/A	Total:	<100	N/A
Clear Zone Distance: 12'			Design Speed: 55 MPH				
Minimum Sight Distance (Non Passing): 495'			Bridges: HL-93				
Minimum Sight Distance (Safe Passing): N/A							
Sight Distance for No Passing Zone: N/A							
Pavement Design Life: N/A							

LENGTH OF PROJECT		
PROJECT	MILES-GROSS	MILES-NET
BRO-0025(010)	0.076	0.076
TOTALS	0.076	0.076

End Project BRO-0025(010)
STA. 7+00 = A Point 1120' South and 5.96' East of the NE Corner of S. 15, T. 159 N., R. 80 W.

Begin Project BRO-0025(010)
STA. 3+00 = A Point 1520' South and 7.42' East of the NE Corner of S. 15, T. 159 N., R. 80 W.

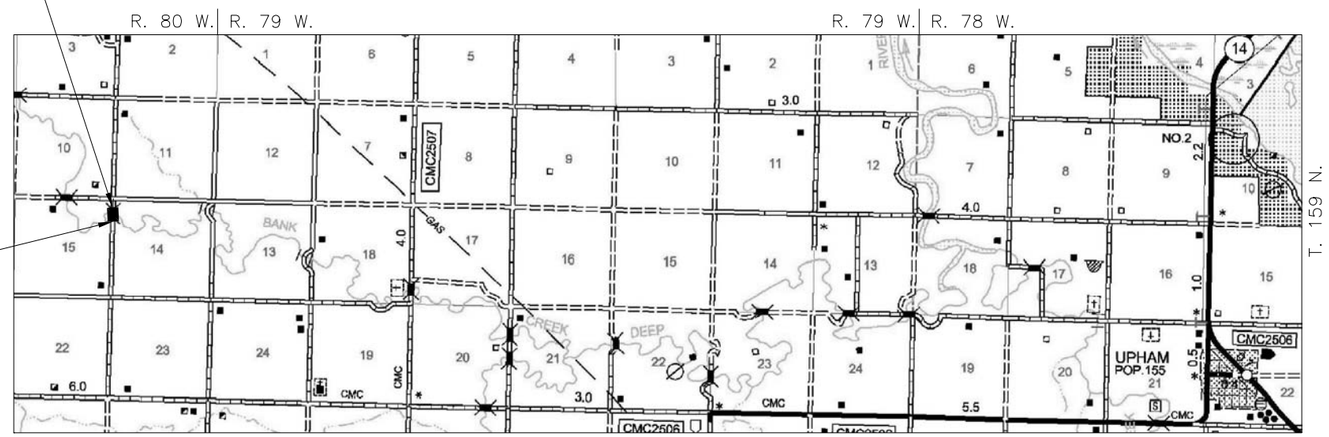

LOCATION MAP

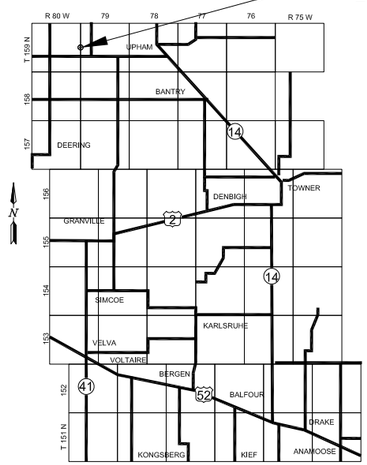

SKETCH MAP OF McHENRY COUNTY

McHENRY COUNTY

NORTH DAKOTA

FEDERAL AID PROJECT BRO-0025(010)

STRUCTURE

STRUCTURE #25-104-03.0

THE PROJECT CONSISTS OF REMOVING THE EXISTING BRIDGE AND REPLACING IT WITH A QUAD 12 FT SPAN BY 12 FT HIGH PRECAST REINFORCED CONCRETE BOX CULVERT
THE PROJECT IS LOCATED 11.0 MILES WEST AND 1.0 MILES NORTH OF UPHAM, ND

Job #9

PCN 20372	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	BRO-0025(010)	1	1

GOVERNING SPECIFICATIONS

Standard Specifications for Road and Bridge Construction, adopted by the North Dakota Department of Transportation, October 2014, standard drawings currently in effect, and other contract provisions submitted herein.

SURVEYED & DESIGNED *08/01/2014*

PS & E REVISIONS MADE *08/29/2014*

Wold Engineering, P.C.
Consulting Engineers & Land Surveyors
915 East 11th Street ~ PO Box 237 ~ Bottineau, ND 58318
316 Eastdale Drive ~ PO Box 1277 ~ Bismarck, ND 58502
110 8th Avenue Southwest ~ Minot, ND 58701

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at Wold Engineering, Bismarck

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	2	1

TABLE OF CONTENTS

LIST OF STANDARD DRAWINGS

Standard No.	Description
D101-1,2,3	NDDOT Abbreviations
D101-10	NDDOT Utility Company Abbreviations
D101-20,21	Linestyles
D101-30,31,32	Symbols
D-261-1	Erosion Control – Fiber Roll Placement Details
D-704-7, 8	Breakaway Systems for Construction Zone Signs
D-704-9-11	Construction Sign Details
D-704-13	Barricade Details and Channelizing Devices
D-704-14	Construction Sign and Barricade Assembly Details

LIST OF SPECIAL PROVISIONS (SP)

SP #	Description
SP 3(14)	Temporary Erosion and Sediment Best Management Practices
SP 4(14)	Federal Migratory Bird Treaty Act to these plans
SP 5015(14)	Permits and Environmental Considerations

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	6	1

NOTES

104-P01 SCOPE OF WORK: The project consists of removing the existing bridge and installing a quad 12 feet span by 12 feet high by 92 feet long precast concrete box culvert and approximately 400 feet of approach road regrading. The new precast reinforced concrete box culvert will be installed at Sta. 5+17 with a 15° right ahead skew.

105-P01 UTILITIES: Notice shall be given to the utility companies a minimum of 2 weeks prior to work on the project. Utilities that the engineer has been made aware of are shown on the plans. Other utilities may exist that are not shown. Power lines, telephone cables, rural water lines, and other utilities may be encountered on this project. The contractor shall be responsible to verify the locations and to notify all utility and pipeline companies to have the locations flagged and marked prior to beginning construction. Any charges by the utility companies for locates shall be paid by the contractor. The contractor will be liable for any costs resulting from damage to utilities or pipelines.

Utility companies will move or adjust conflicting facilities in conjunction with or prior to the highway construction. The contractor will not be responsible for costs associated with the moving or adjustment of utilities on the project right of way.

One-Call Service: 1-800-795-0555

107-P01 HAUL ROADS: All paved roads off the state system shall not be designated as haul roads. The gross vehicle weight on all county and township roads shall not exceed 80,000 pounds unless approved by the local agency. The contractor shall contact the appropriate State, County, Township, or City officials to determine if there are any No Haul Routes prior to preparing a bid for this project.

107-P02 RESPONSIBILITY TO PUBLIC: The Contractor shall provide access to and from all adjacent, private, and field drives during construction.

202-P01 REMOVAL OF STRUCTURE: The existing structure shall be removed. The existing structure, built in 1924 and reconstructed in 1968, is a 58.07 foot single span bridge with prestressed concrete adjacent box beams with a timber substructure. The bridge has a clear roadway width of 23 feet.

The structure shall be removed by the contractor in accordance with Section 202 of the standard specifications. The bid item “REMOVAL OF STRUCTURE” shall include:

1. All materials removed shall become property of the contractor and shall be disposed of properly off the right-of-way.
2. Existing piling shall be cut-off a minimum of one foot below the proposed foundation fill limits and backfilled with foundation fill. All materials removed shall become property of the contractor and shall be disposed of properly off the right-of-way.

203-P02 BORROW-EXCAVATION: The Contractor shall be responsible for obtaining areas to provide suitable “Borrow” material, and shall bear all costs of obtaining, opening and restoring the site. The final “Borrow” quantity is to be determined by cross sectioning before and after removal or by measured load count. Compaction of embankment material shall be in accordance with Standard Specifications, Section 203.04 E.3. Water may be required to compact the borrow-excavation and shall be incidental to “Borrow-Excavation”. All necessary clearing and grubbing cost shall be included in price bid for “Borrow-Excavation”.

The contractor shall remove and replace approximately 6" of topsoil over the excavation and embankment areas except the 28' roadbed.

All work as described above shall be included in the price bid for “Borrow-Excavation”.

210-P01 CLASS 2 EXCAVATION-BOX CULVERT: All box culvert excavation, foundation fill excavation, channel excavation, riprap excavation, placement of ordinary backfill, compaction, water, and shaping of roadway inslopes and channel slopes shall be included in the unit price bid for “CLASS 2 EXCAVATION_BOX CULVERT” (Approximately 555 C.Y.). Class 2 Excavation-Box Culvert shall be performed according to Section 210 of the standard specifications.

The suitability of material from on-site excavations for use as ordinary backfill will be determined by the engineer. The contractor shall remove and replace approximately 6" of topsoil over the excavation and embankment areas, except the 28' roadbed. Backfill shall be placed and compacted in accordance with Section 203.04 E.3 of the Standard Specifications. Water may be required to compact the backfill and shall be incidental. Embankment constructed from excavated material will not be measured for separate payment, but will be included in the price bid for “CLASS 2 EXCAVATION-BOX CULVERT”. If the excavated material is deemed not suitable for ordinary backfill, it shall become property of the contractor and disposed of outside of the road right-of-way, not adjacent to the construction site, and at a site approved by the engineer. All costs associated with excavation, hauling, depositing and leveling the waste material shall be included in the unit price bid for “CLASS 2 EXCAVATION-BOX CULVERT”.

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 09/26/14 and the original document is stored at Wold Engineering, Bismarck

NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	6	2

NOTES

210-P02 FOUNDATION FILL: The quantity for foundation fill was computed to a depth of 1.5' below the box culvert; however, this may vary depending on the soil conditions. If, in the opinion of the engineer, a suitable foundation exists under the culvert site, the foundation fill may be eliminated. If larger rock is required to stabilize the foundation it will be paid for as "FOUNDATION FILL." The larger rock shall be wrapped completely with Geosynthetic Material Type S1. The bed for the pre-cast sections shall consist of fine graded material (sand) approximately 4" in depth below the culvert. Grade rails shall be used to establish a uniform bed for the pre-cast sections. All material described above shall be included in the price bid for "FOUNDATION FILL." Material will be accepted by Engineers Statement. No aggregate testing shall be required unless deemed necessary by the Engineer.

210-P03 FOUNDATION PREPARATION-BOX CULVERT: The bidders shall be aware of the possible inundated conditions at this site before the bid opening. The cost of any cofferdams and dewatering the excavation shall be included in the bid for "Foundation Preparation-Box Culvert."

216-P01 WATER: The application of water for compaction and for use as a dust palliative, as required, shall be included in the cost for other bid items.

251-P01 SEEDING CLASS II: Seeding will be measured by the acre for Seeding Class II. Seeding shall cover the entire disturbed area (excluding the 28' roadbed).

253-P01 STRAW MULCH: All seeded areas shall be stabilized with straw mulch after the completion of the seeding operation.

256-P01 RIPRAP GRADE II: Final pay quantity for "RIPRAP GRADE II" shall be determined by field measurements in accordance with plan length, width, and depth, or by measured load count.

261-P01 TEMPORARY EROSION CONTROL: Temporary erosion and siltation control has been provided for placement prior to disturbing the topsoil. Locations of sediment control and ditch checks are typically at pipe outlets, where drainage leaves the R/W, and other areas approved by the engineer. The temporary erosion and siltation control shall be installed according to Standard D-261-1, or as directed by the engineer.

302-P01 AGGREGATE SURFACE COURSE CLASS 13: Compaction of aggregate surface course shall be in accordance with Section 302.04. The dimensions shown for the aggregate surface course are approximate. Plan quantities shall be placed throughout except where the engineer authorizes a change. Water may be required to compact the aggregate surface course and shall be incidental to "AGGREGATE SURFACE COURSE Cl 13". Material will be accepted by Engineers Statement. No aggregate testing shall be required unless deemed necessary by the Engineer.

709-P01 GEOSYNTHETIC MATERIAL TYPE RR: Geosynthetic Material Type RR shall be placed below all riprap.

752-P01 FENCE TEMPORARY INSTALL & REMOVE: Temporary fencing, if needed, will be provided by the contractor after determining the presence of livestock during construction and in consultation with the landowner. The Contractor shall coordinate with the adjacent landowners to determine if livestock will be present during construction. If a temporary fence is needed, the Contractor shall install and maintain an electric fence to contain the livestock. The temporary electric fence shall remain in place until the permanent fence is installed. If no livestock is present during construction this bid item will be removed. Installation, maintenance and removal of the temporary electric fence shall be included in the price bid for "Fence Temporary Install & Remove".

CONTACT PERSON:

Michael Rivinius, P.E.
Wold Engineering, P.C.
316 Eastdale Drive
Bismarck, ND 58502
Phone: (701)258-9227

NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	6	3

ENVIRONMENTAL COMMITMENTS

ENVIRONMENTAL COMMITMENTS: McHenry County, the North Dakota Department of Transportation, and the Federal Highway Administration have made several environmental commitments to various agencies and the public to secure approval of this project. The environmental commitments are as follows:

Commitment No. 1: Construction shall not affect the fish spawning and migration period between April 15th and June 1st.

Action taken/required: The contractor is not allowed to work in the channel between April 15 and June 1 for this project.

Commitment No. 2: Wetland impacts will be mitigated either on-site or at an appropriate mitigation site. Approximately 0.09 jurisdictional acres of potential other waters will be impacted permanently and 0.03 jurisdictional acres of potential other waters will be temporarily impacted.

Action taken/required: The permanent impacts to potential other waters do not require mitigation. To minimize the overall impact to the channel, the proposed inverts of the box culvert and riprap are set 1 foot below the streambed elevation to allow for sedimentation of the box culvert floor and to allow passage of fish and other organisms.

Wetland Number	Location	Long/Lat (Dec. Deg.)	Cowardin Class.	Wetland Type	Wetland Size (Acres)	Wetland Feature	USACE Jurisdictional Wetlands*	Wetland Impacts (acres)		Deep Water Impacts		USFWS Easement Impacts	
								Temp.	Perm.	Acres	CY	Temp.	Perm.
1	Sec. 14, T159N, R80W	-100.972664W 48.599965N	R4USF	Riverine	2.79	Natural	X	0.02	0.06				
				Totals	**2.79**			**0.02**	**0.06**	**0.00**	**0.00**	**0.00**	**0.00**

POTENTIAL OTHER WATERS										
				Size				Impacts to Potential Other Waters		
								Acres		
Number	Location	Long/Lat (Dec. Deg.)	Type	Acres	Linear Feet	Feature	USACE Jurisdictional*	Temp	Perm	Linear Feet
POW - 1	Sec. 15, T159N, R80W	-100.972937W 48.599969N	Dry Channel	>1.00	>500	Natural	X	0.01	0.03	73
			Totals	**>1.00**	**>500**			**0.01**	**0.03**	**73**

* A wetland Jurisdictional Determination was issued by the USACE on 7/19/2013; NWO-2013-1274-BIS.

Commitment No. 3: The contractor shall provide the ND Game & Fish Department a reasonable opportunity to inspect all vessels, motors, trailers, and construction equipment prior to these items being launched or placed into the waters of the state.

Action taken/required: A minimum of 72 hours notice must be provided for scheduling an inspection. The department's Nuisance Species Biologist, Mr. Fred Ryckman, can be contacted at 701-770-0920 for equipment inspections or any additional information regarding Aquatic Nuisance Species prevention protocols.

Commitment No. 4: Active migratory bird nests with eggs or chicks are protected by the Federal Migratory Bird Treaty Act. Demolition on bridges or box culverts with active nesting cannot start until nesting season is over unless measures are taken to prevent nesting.

Action taken/required: The contractor will not remove any existing bridge or box culvert if active nests are present. The contractor can legally remove inactive nests prior to the nesting season. After inactive nests are removed the contractor can use nets or tarps secured to the structure to discourage nesting.

Commitment No. 5: Any disruption or displacement of the streambed and banks other than the planned alterations must be restored to pre-project conditions.

Action taken/required: The contractor shall restore all disruptions and displacements of the streambed and banks to pre-project conditions. This does not include planned alterations.

Commitment No. 6: The reinforced concrete box culvert (RCB) and riprap shall be sunk one foot below the stream grade line.

Action taken/required: The RCB invert elevations shown in the plans are one foot below the stream grade line. The riprap shall also be placed one foot below the stream grade line.

Commitment No. 7: A concrete structure or bridge will be demolished as a part of this project. SFN 17987 Asbestos Notification of Demolition and Renovation is required.

Action taken/required: The contractor will complete and submit SFN 17987 to the North Dakota Department of Health 10 days prior to beginning the activity.

Required Permits

North Dakota Department of Health — *NDPDES Permit*
Status: To be obtained by the contractor prior to construction
Owner of permit will be McHenry County

United States Army Corps of Engineers — 404 Permit
Status: Has been obtained for the project

North Dakota Department of Health — Asbestos Notification of Demolition and Renovation SFN 17987
Status: To be submitted by the contractor 10 days prior to bridge removal

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	8	1

ESTIMATED QUANTITIES

SPEC.	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
103	0100	CONTRACT BOND	L SUM	1
202	0104	REMOVAL OF STRUCTURE	EA	1
202	0312	REMOVE EXISTING FENCE	LF	336
203	0140	BORROW-EXCAVATION	CY	2088
210	0109	CLASS 2 EXCAVATION-BOX CULVERT	EA	1
210	0210	FOUNDATION FILL	CY	508
210	0405	FOUNDATION PREPARATION-BOX CULVERT	EA	1
251	0200	SEEDING CLASS II	ACRE	0.8
253	0101	STRAW MULCH	ACRE	0.8
256	0200	RIPRAP GRADE II	CY	208
261	0112	FIBER ROLLS 12IN	LF	689
261	0113	REMOVE FIBER ROLLS 12IN	LF	200
302	0356	AGGREGATE SURFACE COURSE CL 13	TON	259
606	3212	DBL 12FT X 12FT PRECAST RCB CULVERT	LF	184
606	7212	DBL 12FT X 12FT PRECAST RCB END SECTION	EA	4
702	0100	MOBILIZATION	L SUM	1
704	1000	TRAFFIC CONTROL SIGNS	UNIT	390
704	1052	TYPE III BARRICADE	EA	10
709	0155	GEOSYNTHETIC MATERIAL TYPE RR	SY	313
752	0500	FENCE BARBED WIRE RESET	LF	287
752	0905	TEMPORARY FENCE	LF	475

BASIS OF ESTIMATE

QUANTITY PER MILE	WIDTH	UNIT	DESCRIPTION
3,179	28'	TON	AGGR. SURF COURSE, CL. 13 (1.875 TON/C.Y.) ~ Mainline
			CL. 13 AGGR. ~ 42 TON PER SECTION LINE (0)
			CL. 13 AGGR. ~ 18 TON PER PRIVATE DRIVE (1)

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at Wold Engineering, Bismarck

Quantities and Basis of Estimate

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	30	1

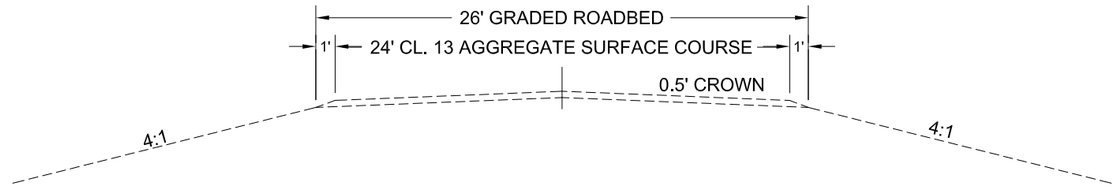

EXISTING TYPICAL SECTION

CUT

PROPOSED TYPICAL SECTION

FILL

Note: A 50 foot transition from the existing typical section to the proposed typical section is required.

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

Typical Section

REVISED: 00/00/0000

Wold Engineering, P.C.
Consulting Engineers & Land Surveyors
BOTTINEAU ~ BISMARCK ~ MINOT

DRAWN BY: MRR	CHECKED BY: MRR	DATE: 08/29/2014

z:\mchenry\2014 ~ bro-0025(010) - pcn 20372 ~ 25-104-030\plans\030\tp_001_tp_typical.dwg

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	060	1

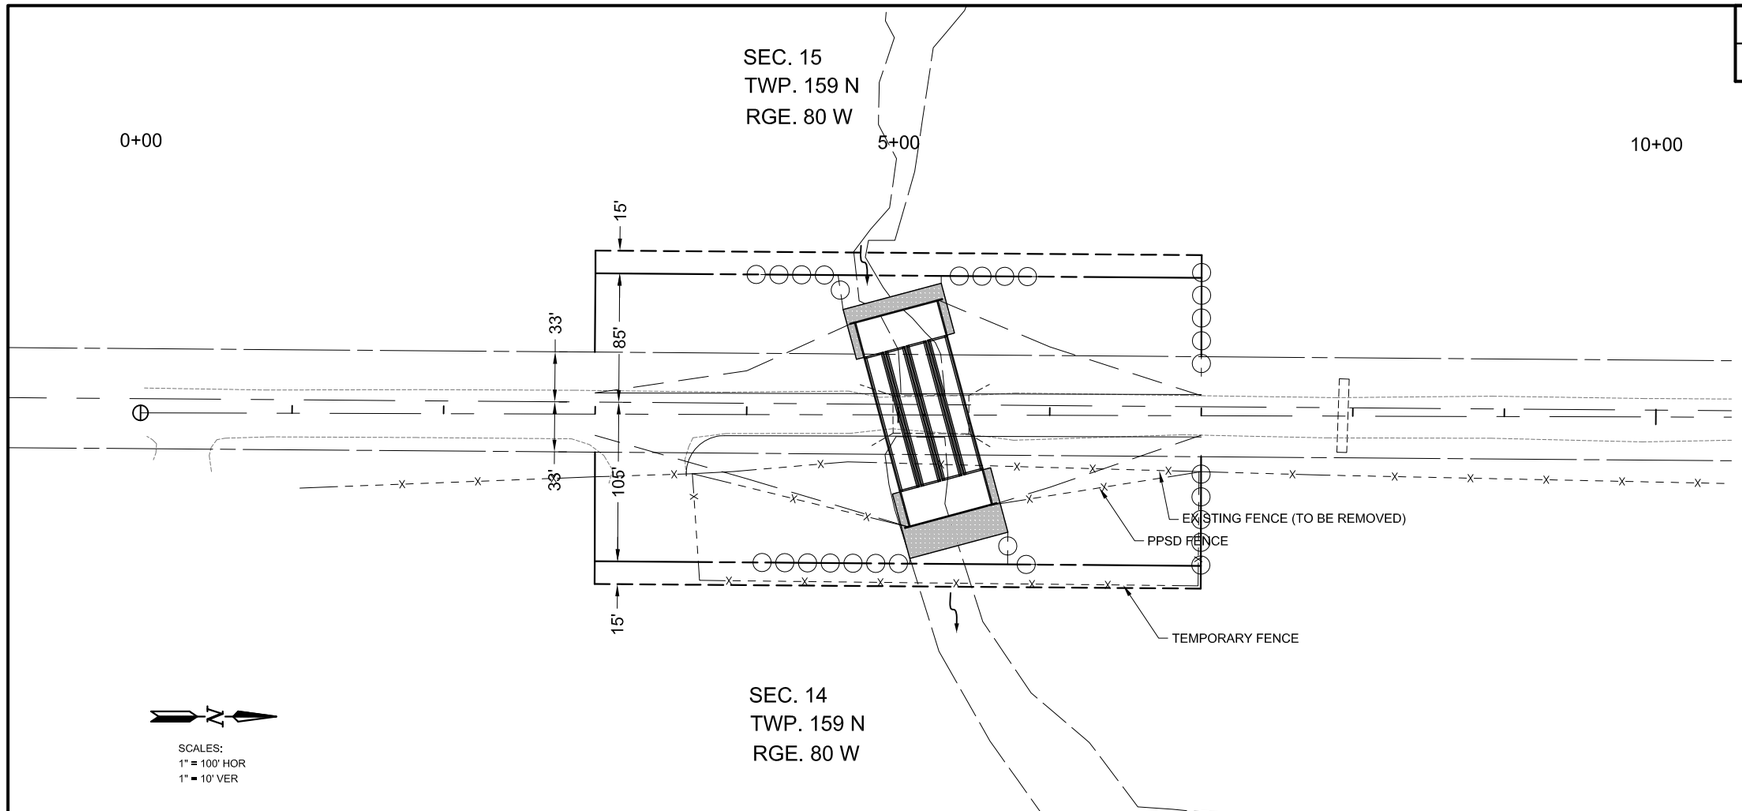

REMOVE EXISTING FENCE

STA. 3+64 to 7+00 RT	336 LF

RIPRAP GRADE II

STA. 4+63 TO 5+37 LT	69 CY
STA. 4+96 TO 5+73 RT	139 CY

DOUBLE 12FTX12FT PRECAST RCB CULVERT

STA. 5+17 ℄	184 LF

DOUBLE 12FTX12FT PRECAST RCB END SECTION

STA. 5+17 ℄	4 EA

FENCE BARBED WIRE RESET

STA. 3+36 TO 5+08 RT	148 LF
STA. 5+63 TO 7+00 RT	139 LF

TEMPORARY FENCE

STA. 3+64 to 7+00 RT	475 LF

GEOSYNTHETIC MATERIAL TYPE RR

STA. 4+63 TO 5+37 LT	104 SY
STA. 4+96 TO 5+73 RT	209 SY

REMOVAL OF STRUCTURE

Sta. 5+22℄
Structure No. 25-104-03.0
Deck/Beams: Adjacent Box Beams
Curb: Precast Concrete
Rail: None
Abutments: Timber
Overall Length: 47.5'
Deck Width: 23'

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

PLAN & PROFILE

STA. 3+00 to 7+00

FILE: 060pp_001.dwg

SCALE IN FEET 0 50 100 150

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	075	1

N

SEC. 15
TWP. 159 N
RGE. 80 W

5+00

10+00

15'

33'

85'

105'

15'

Potential Other Waters #1
0.01 Acres

0.03 Acres

R4USF
0.06 Acres

EXISTING FENCE (TO BE REMOVED)

0.02 Acres

SEC. 14
TWP. 159 N
RGE. 80 W

Temporary Wetland Impact

Permanent Wetland Impact

Permanent Deep Water Impact

Temporary Other Waters Impact

Permanent Other Waters Impact

SCALES:
1" = 100' HOR
1" = 10' VER

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

Wetlands

STA. 3+00 to 7+00

FILE: 075wl_001.dwg

0 50 100 150
SCALE IN FEET

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	075	2

FIBER ROLLS 12IN

STA. 4+00 TO STA. 6+00 ~ 120' RT	200 LF
STA. 7+00 LT	80 LF
STA. 7+00 RT	88 LF

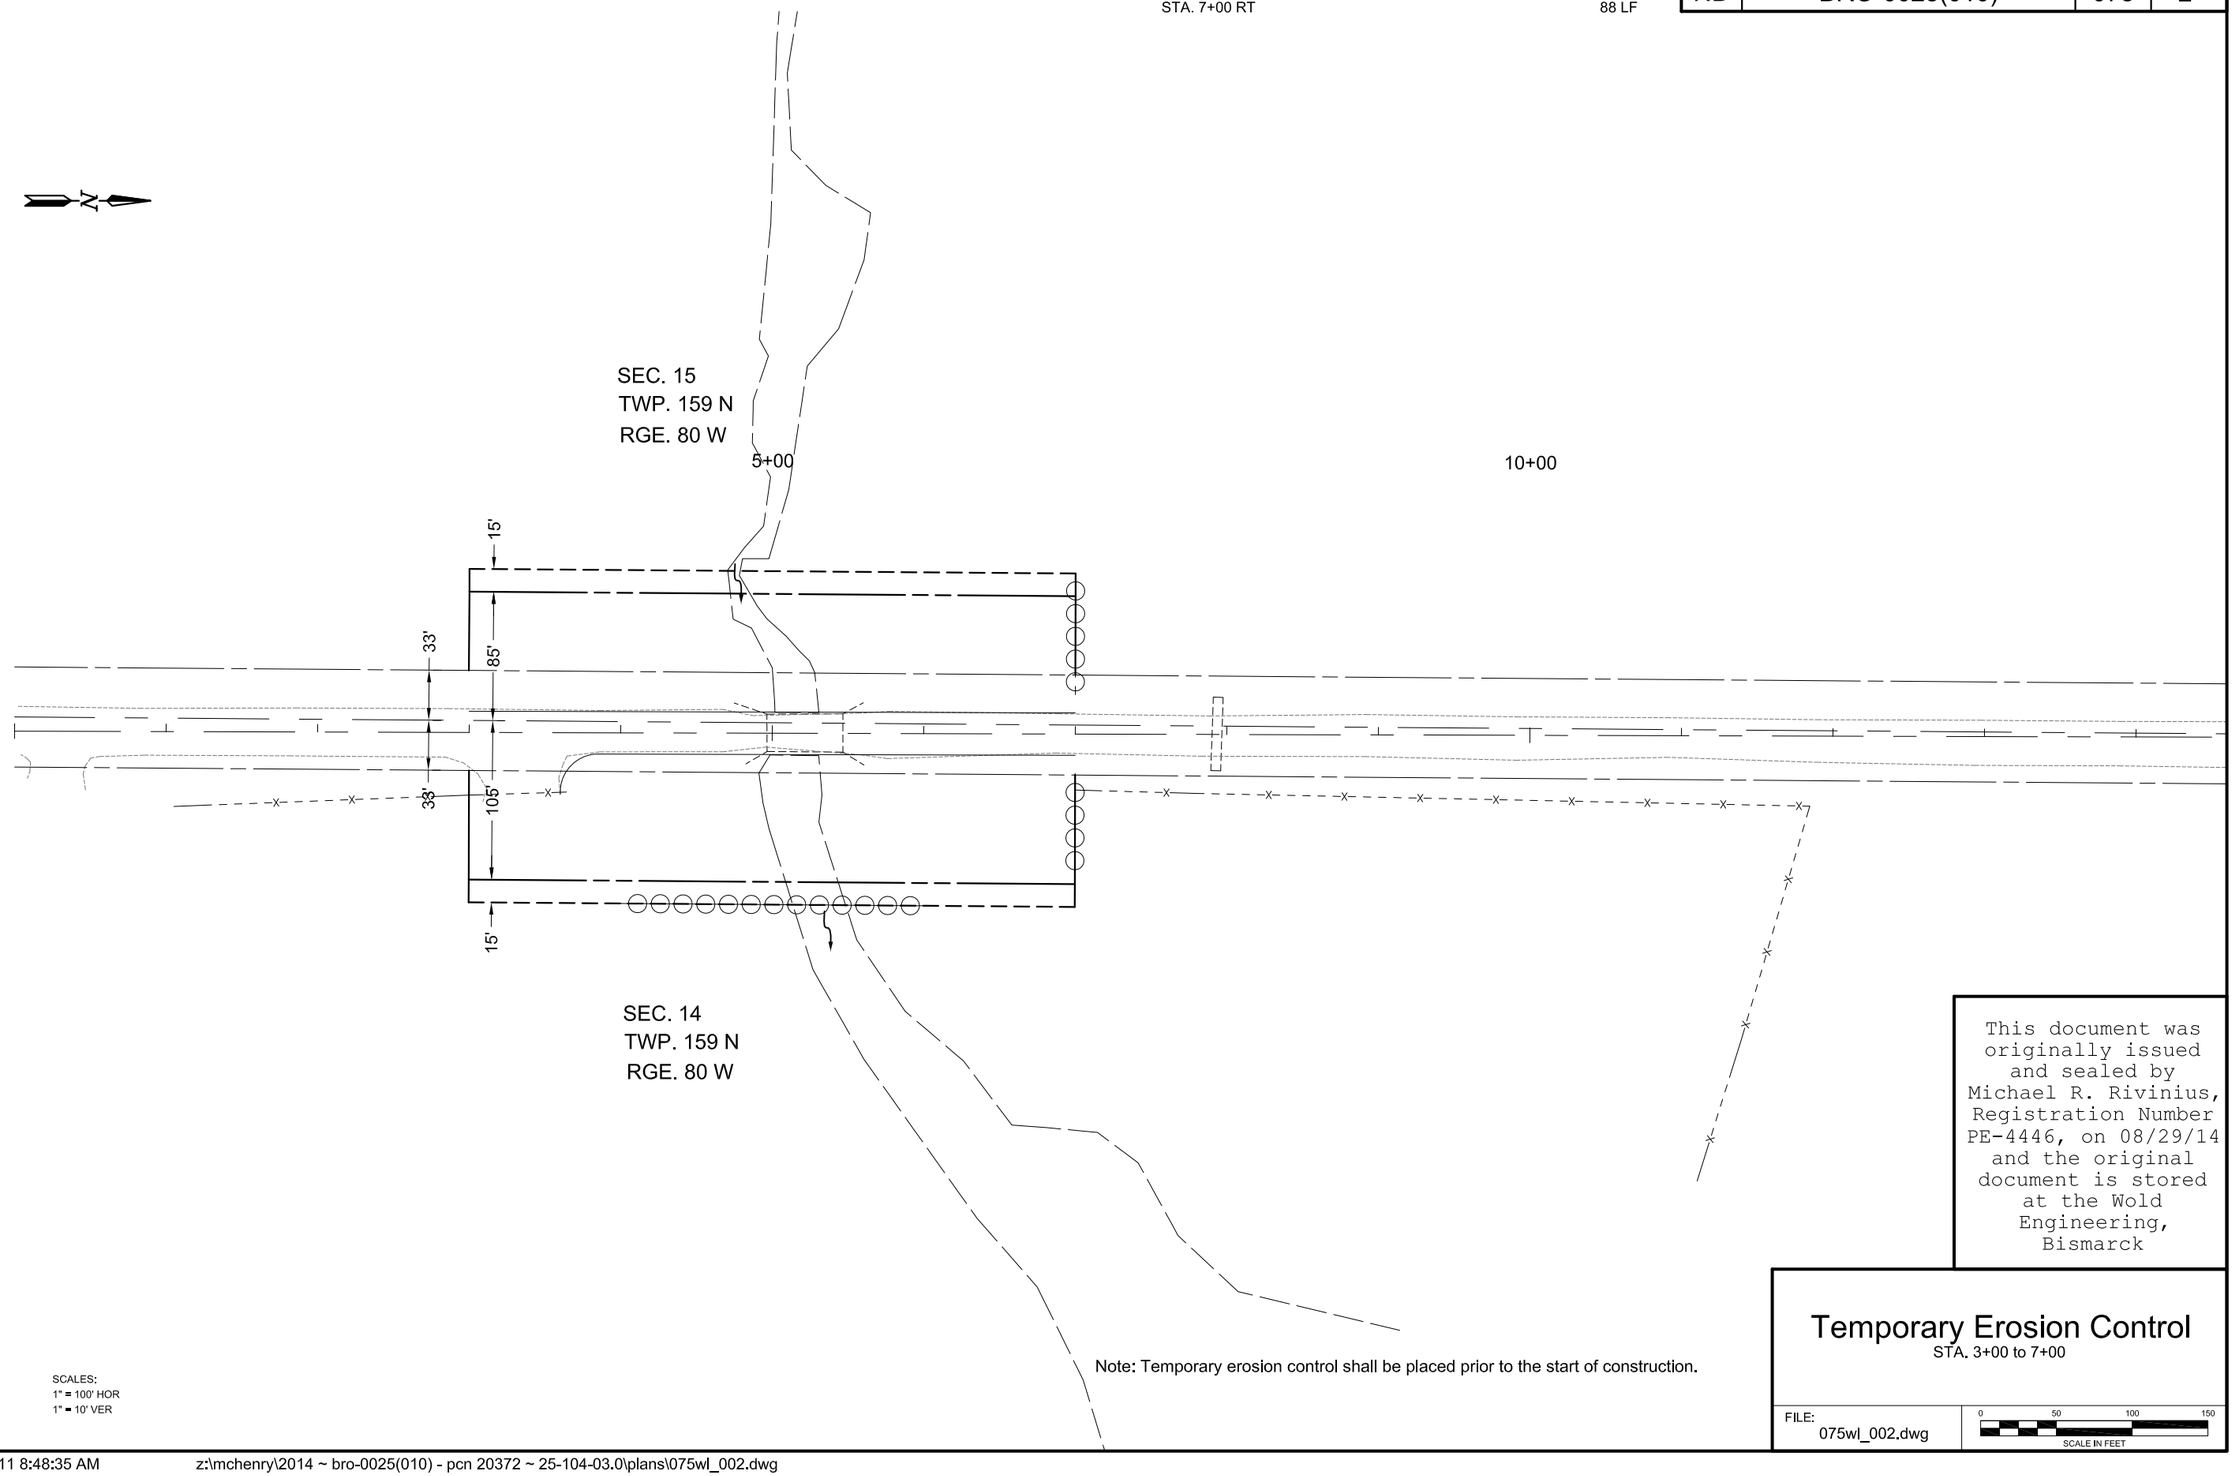

Note: Temporary erosion control shall be placed prior to the start of construction.

SCALES:
1" = 100' HOR
1" = 10' VER

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

Temporary Erosion Control

STA. 3+00 to 7+00

FILE: 075wl_002.dwg

0 50 100 150
SCALE IN FEET

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	075	3

N

SEC. 15
TWP. 159 N
RGE. 80 W

5+00

10+00

15'
33'
85'
33'
105'
15'

PPSD FENCE

SEC. 14
TWP. 159 N
RGE. 80 W

FIBER ROLLS 12IN

STA. 4+00 TO STA. 4+63 LT	83 LF
STA. 4+00 TO STA. 5+08 RT	112 LF
STA. 5+28 TO STA. 6+00 LT	77 LF
STA. 5+73 TO STA. 6+00 RT	49 LF

REMOVE FIBER ROLLS 12IN

STA. 4+00 TO STA. 6+00 RT	200LF

SEEDING-TYPE B-CL II

STA. 3+00 TO STA. 7+00 LT	0.4 Acres
STA. 3+00 TO STA. 7+00 RT	0.4 Acres

MULCHING

STA. 3+00 TO STA. 7+00 LT	0.4 Acres
STA. 3+00 TO STA. 7+00 RT	0.4 Acres

SCALES:
1" = 100' HOR
1" = 10' VER

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

Permanent Erosion Control

STA. 3+00 to 7+00

FILE: 075wl_003.dwg

0 50 100 150
SCALE IN FEET

6/3/2011 8:48:35 AM z:\mchenry\2014 ~ bro-0025(010) - pcn 20372 ~ 25-104-03.0\plans\075wl_003.dwg

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	80	1

HORIZONTAL ALIGNMENT

PNT	STATION	NORTHING	EASTING
BOP	3+00	583733.43	1854315.05
EOP	7+00	584133.43	1854316.14

RCB CULVERT OFFSETS

DESC.	STATION	OFFSET	NORTHING	EASTING
0' OFFSET INLET CL	4+99.14	66.65 LT	583932.75	1854248.95
0' OFFSET OUTLET CL	5+34.34	64.72 RT	583967.60	1854380.41

US PUBLIC LAND SURVEY DATA

DESC.	SEC-TWP-RGE	NORTHING	EASTING
NE SEC COR	15-159-80	585353.43	1854319.47
E QTR COR	15-159-80	582709.30	1854299.35
SE SEC COR	15-159-80	580065.19	1854279.42

SURVEY CONTROL POINTS

PNT	NORTHING	EASTING	ELEV	STATION	OFFSET
CP1	584621.54	1854363.88	1468.39	11+88.23	46.40 RT
CP2	583766.17	1854335.54	1472.95	3+32.79	20.39 RT

NOTES: ALL GPS CONTROL ARE #7 REBAR
ALL CP CONTROL POINTS ARE #5 REBAR

Date Survey Completed 1/14/13

☐ Assumed Coordinates

☒ All coordinates on this sheet are ground coordinates. They are derived from the "North Dakota Coordinate System of 1983", NAD83(CORS), NORTH Zone Use Combination factor (cf) = 0.9999160 to convert Ground Distances to State Plane Distances. NGS OPUS Solution was used to establish state plane coordinates.

All coordinates and measurements on this document derived from the International Foot definition.

INITIALIZING BENCH MARK CORS SYSTEM

☒ NAVD-88
☐ NGVD-29

☒ ENGLISH UNITS
☐ METRIC UNITS

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

Survey Coordinate and Curve Data

REVISED: 00/00/0000

Wold Engineering, P.C.
Consulting Engineers & Land Surveyors
BOTTINEAU ~ BISMARCK ~ MINOT

DRAWN BY: JWM | CHECKED BY: MRR | DATE: 03/20/2013

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	100	1

SIGN NUMBER	SIGN SIZE	DESCRIPTION	AMOUNT REQUIRED	UNITS PER AMOUNT	UNITS SUB TOTAL
D3-36	36"x6"	STREET NAME SIGN (Sign and installation only)		6	
G20-1-60	60"x24"	ROAD WORK NEXT __ MILES		34	
G20-1b-60	60"x24"	WORK IN PROGRESS/ NO WORK IN PROGRESS (Sign and installation only)		26	
G20-2-48	48"x24"	END ROAD WORK		19	
G20-4-36	36"x18"	PILOT CAR FOLLOW ME (Mounted to back of pilot car)		18	
G20-10-108	108"x48"	CONTRACTOR SIGN		64	
G20-50a-72	72"x36"	ROAD WORK NEXT __ MILES RT & LT ARROWS		37	
G20-52a-72	72"x24"	ROAD WORK NEXT __ MILES RT or LT ARROW		30	
G20-55-96	96"x48"	SPEED LIMIT ENFORCED - MINIMUM FEE $80 WHEN WORKERS PRESENT		59	
M1-1-36	36"x36"	INTERSTATE ROUTE MARKER (Post and installation only)		10	
M1-4-24	24"x24"	U.S. ROUTE MARKER (Post and installation only)		10	
M1-5-24	24"x24"	STATE ROUTE MARKER (Post and installation only)		10	
M3-1-24	24"x12"	NORTH (Mounted on route marker post)		7	
M3-2-24	24"x12"	EAST (Mounted on route marker post)		7	
M3-3-24	24"x12"	SOUTH (Mounted on route marker post)		7	
M3-4-24	24"x12"	WEST (Mounted on route marker post)		7	
M4-8-24	24"x12"	DETOUR (Mounted on route marker post)		7	
M4-9-30	30"x24"	DETOUR ARROW RIGHT or LEFT/AHD AND RT or LT		15	
M4-10-48	48"x18"	DETOUR ARROW RIGHT or LEFT		23	
M5-1-21	21"x15"	ARROW AHD AND RT or LT(Mounted on route marker post)		7	
M5-2-21	21"x15"	ARROW AHD UP & RT or LT (Mounted on route marker post)		7	
M6-1-21	21"x15"	ARROW RT or LT (Mounted on route marker post)		7	
M6-2-21	21"x15"	ARROW UP & RT or LT (Mounted on route marker post)		7	
M6-3-21	21"x15"	ARROW AHD (Mounted on route marker post)		7	
R1-1-48	48"x48"	STOP		32	
R1-1a-18	18"x18"	STOP and SLOW PADDLE Back to Back		5	
R1-2-60	60"x60"	YIELD		29	
R2-1-48	48"x60"	SPEED LIMIT __		39	
R2-1a-24	24"x18"	MINIMUM FEE $80 (Mounted on Speed Limit post)		10	
R3-7-48	48"x48"	LEFT or RIGHT LANE MUST TURN LEFT or RIGHT		35	
R4-1-48	48"x60"	DO NOT PASS		39	
R4-7-48	48"x60"	KEEP RIGHT SYMBOL		39	
R5-1-48	48"x48"	DO NOT ENTER		35	
R6-1-36	36"x12"	ONE WAY RIGHT or LEFT		13	
R7-1-12	12"x18"	NO PARKING		11	
R10-6-24	24"x36"	STOP HERE ON RED		16	
R11-2-48	**48"x30"**	**ROAD CLOSED**	**2**	**28**	**56**
R11-2a-48	48"x30"	STREET CLOSED		28	
R11-3a-60	**60"x30"**	**ROAD CLOSED __ MILES AHEAD LOCAL TRAFFIC ONLY**	**4**	**31**	**124**
R11-3c-60	60"x30"	STREET CLOSED __ MILES AHEAD LOCAL TRAFFIC ONLY		31	
R11-4a-60	60"x30"	STREET CLOSED TO THRU TRAFFIC		31	
W1-3-48	48"x48"	RIGHT or LEFT SHARP REVERSE CURVE ARROW		35	
W1-4-48	48"x48"	RIGHT or LEFT REVERSE CURVE ARROW		35	
W1-4b-48	48"x48"	DOUBLE RIGHT or LEFT REVERSE CURVE ARROW		35	
W1-6-48	48"x24"	LARGE ARROW		26	
W3-1-48	48"x48"	STOP AHEAD SYMBOL		35	
W3-3-48	48"x48"	SIGNAL AHEAD SYMBOL		35	
W3-4-48	48"x48"	BE PREPARED TO STOP		35	
W3-5-48	48"x48"	SPEED REDUCTION AHEAD		35	
W4-2-48	48"x48"	RIGHT or LEFT LANE TRANSITION SYMBOL		35	
W5-1-48	48"x48"	ROAD NARROWS		35	
W5-8-48	48"x48"	THRU TRAFFIC RIGHT LANE		35	
W5-9-48	48"x48"	ROAD WORK TRAFFIC ONLY DOWN & LT or RT ARROW		35	
W6-3-48	48"x48"	TWO WAY TRAFFIC SYMBOL		35	
W8-1-48	48"x48"	BUMP		35	
W8-3-48	48"x48"	PAVEMENT ENDS		35	
W8-7-48	48"x48"	LOOSE GRAVEL		35	
W8-9a-48	48"x48"	SHOULDER DROP-OFF		35	
W8-11-48	48"x48"	UNEVEN LANES		35	
W8-12-48	48"x48"	NO CENTER STRIPE		35	
W8-53-48	48"x48"	TRUCKS ENTERING HIGHWAY		35	
W8-54-48	48"x48"	TRUCKS ENTERING AHEAD or __ FT.		35	
W8-55-48	48"x48"	TRUCKS CROSSING AHEAD or __ FT.		35	
W8-56-48	48"x48"	TRUCKS EXITING HIGHWAY		35	
W9-3a-48	48"x48"	CENTER LANE CLOSED SYMBOL		35	
W12-2-48	48"x48"	LOW CLEARANCE SYMBOL		35	
W13-1-24	24"x24"	__ MPH ADVISORY SPEED PLATE (Mounted on warning sign post)		11	
W13-4-48	48"x60"	RAMP ARROW		39	
W14-3-48	48"x36"	NO PASSING ZONE		23	
W20-1-48	48"x48"	ROAD WORK AHEAD or _FT or _ MILE		35	
W20-2-48	48"x48"	DETOUR AHEAD or __ FT		35	
W20-3-48	**48"x48"**	**ROAD or STREET CLOSED AHEAD or __ FT.**	**6**	**35**	**210**
W20-4-48	48"x48"	ONE LANE ROAD AHEAD or __ FT.		35	
W20-5-48	48"x48"	RIGHT or LEFT LANE CLOSED AHEAD or __ FT.		35	
W20-7a-48	48"x48"	FLAGGING SYMBOL		35	
W20-7k-24	24"x18"	__ FEET (Mounted on warning sign post)		10	
W20-8-48	48"x48"	STREET CLOSED		35	
W20-51-48	48"x48"	EQUIPMENT WORKING		35	
W20-52-54	54"x12"	NEXT __ MILES (Mounted on warning sign post)		12	
W21-1a-48	48"x48"	WORKERS SYMBOL		35	
W21-2-48	48"x48"	FRESH OIL		35	
W21-3-48	48"x48"	ROAD MACHINERY AHEAD or __ FT		35	

SIGN NUMBER	SIGN SIZE	DESCRIPTION	AMOUNT REQUIRED	UNITS PER AMOUNT	UNITS SUB TOTAL
W21-5-48	48"x48"	SHOULDER WORK		35	
W21-5a-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED		35	
W21-5b-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED AHEAD or __ FT.		35	
W21-6a-48	48"x48"	SURVEY CREW AHEAD		35	
W21-50-48	48"x48"	BRIDGE PAINTING AHEAD or __ FT.		35	
W21-51-48	48"x48"	MATERIAL ON ROADWAY		35	
W22-8-48	48"x48"	FRESH OIL LOOSE ROCK		35	
	24"x24"	TAKE TURNS (6" D letters) (Mounted on stop sign post)		11	

SPECIAL SIGNS

SPEC & CODE

704-1000	**TRAFFIC CONTROL SIGNS**	**TOTAL UNITS**	**390**

SPEC & CODE	DESCRIPTION	UNIT	QUANTITY
704-0100	FLAGGING	MHR	
704-1041	ATTENUATION DEVICE-TYPE B-55	EACH	
704-1043	ATTENUATION DEVICE-TYPE B-65	EACH	
704-1044	ATTENUATION DEVICE-TYPE B-70	EACH	
704-1050	TYPE I BARRICADES	EACH	
704-1051	TYPE II BARRICADES	EACH	
704-1052	**TYPE III BARRICADES**	**EACH**	**10**
704-1060	DELINEATOR DRUMS	EACH	
704-1065	TRAFFIC CONES	EACH	
704-1067	TUBULAR MARKERS	EACH	
704-1070	DELINEATOR	EACH	
704-1072	FLEXIBLE DELINEATORS	EACH	
704-1081	VERTICAL PANELS - BACK TO BACK	EACH	
704-1085	SEQUENCING ARROW PANEL - TYPE A	EACH	
704-1086	SEQUENCING ARROW PANEL - TYPE B	EACH	
704-1087	SEQUENCING ARROW PANEL - TYPE C	EACH	
704-1088	SEQUENCING ARROW PANEL - TYPE C - CROSSOVER	EACH	
704-1095	TYPE B FLASHERS	EACH	
704-3501	PORTABLE PRECAST CONCRETE MED BARRIER	LF	
704-3510	PRECAST CONCRETE MED BARRIER - STATE FURNISHED	EACH	
762-0200	RAISED PAVEMENT MARKERS	EACH	
762-0420	SHORT TERM 4IN LINE - TYPE R	LF	
762-0430	SHORT TERM 4IN LINE - TYPE NR	LF	
762-1500	OBLITERATION OF PVMT MK	SF	
772-2110	FLASHING BEACON - POST MOUNTED	EACH	

NOTE:
If additional signs are required, units will be calculated using the formula from Section III-19.06 of the Design Manual.
http://www.dot.nd.gov/

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 8/29/14 and the original document is stored at the Wold Engineering, Bismarck.

Traffic Control Devices List

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BR0-0025(010)	100	2

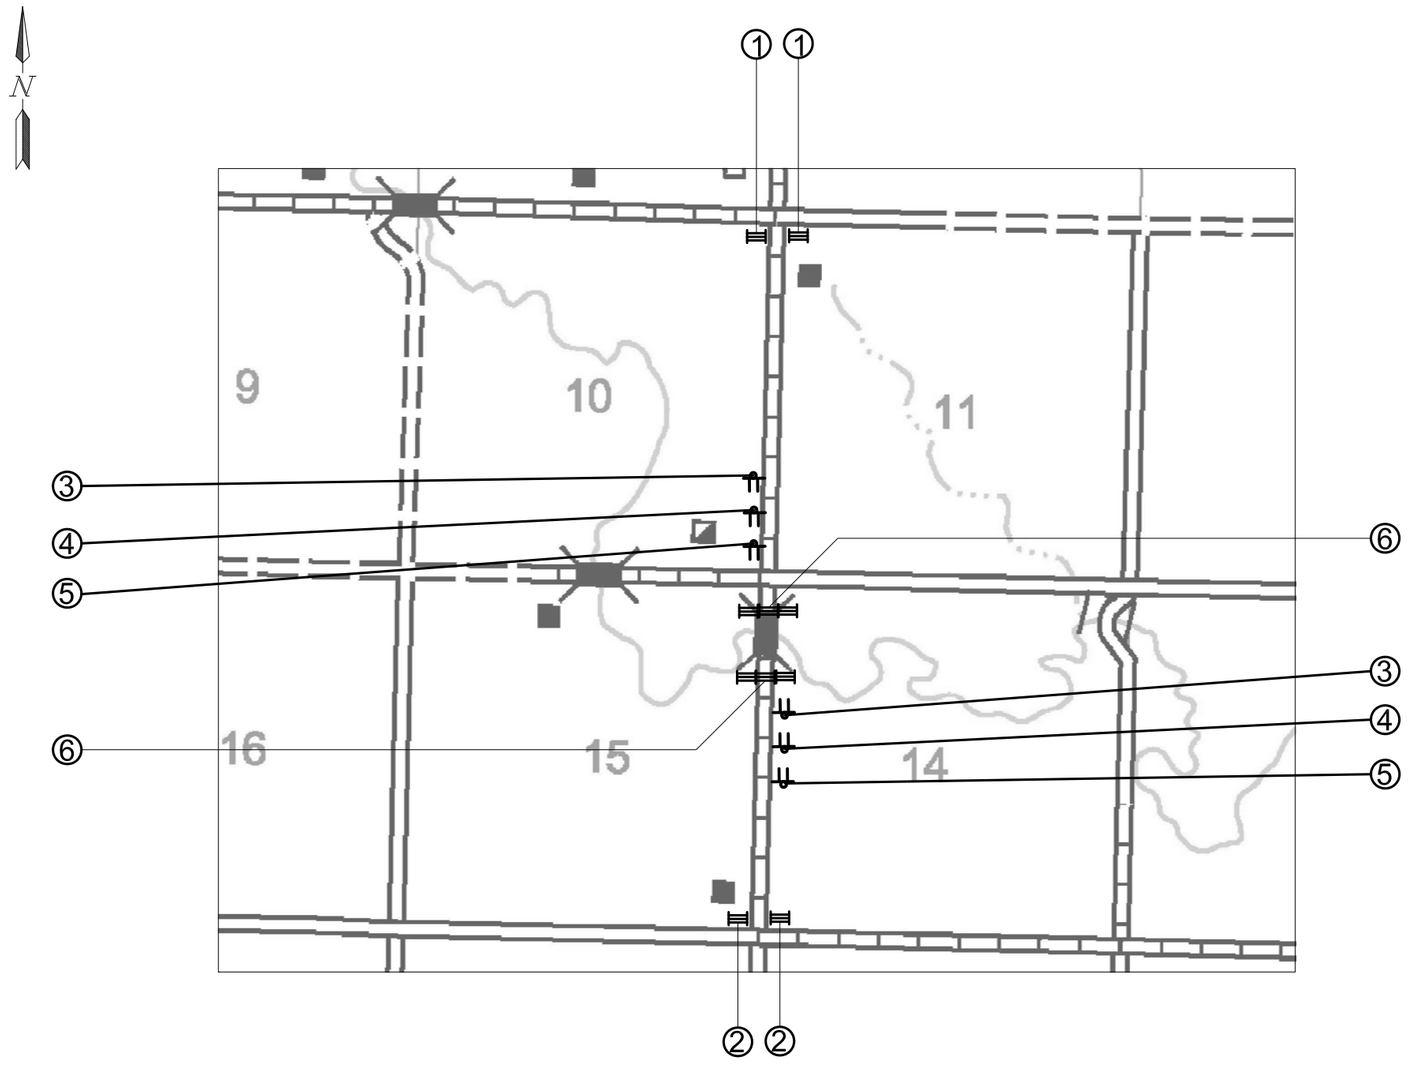

Traffic Control Layout

LEGEND:

① ROAD CLOSED 1.2 MILES AHEAD LOCAL TRAFFIC ONLY
R11-3a-60
BARRICADE POST MOUNTING

② ROAD CLOSED 0.8 MILES AHEAD LOCAL TRAFFIC ONLY
R11-3a-60
BARRICADE POST MOUNTING

③ ROAD CLOSED AHEAD — W20-3-48 POST MOUNTING

500'

④ ROAD CLOSED 1000 FT — W20-3-48 POST MOUNTING

500'

⑤ ROAD CLOSED 500 FT — W20-3-48 POST MOUNTING

500'

⑥ ROAD CLOSED — R11-2-48 BARRICADE MOUNTING

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

Work Zone Traffic Control

REVISED: 00/00/0000

Wold Engineering, P.C.
Consulting Engineers & Land Surveyors
BOTTINEAU ~ BISMARCK ~ MINOT

DRAWN BY: MRR | CHECKED BY: MRR | DATE: 08/29/2014

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	170	1

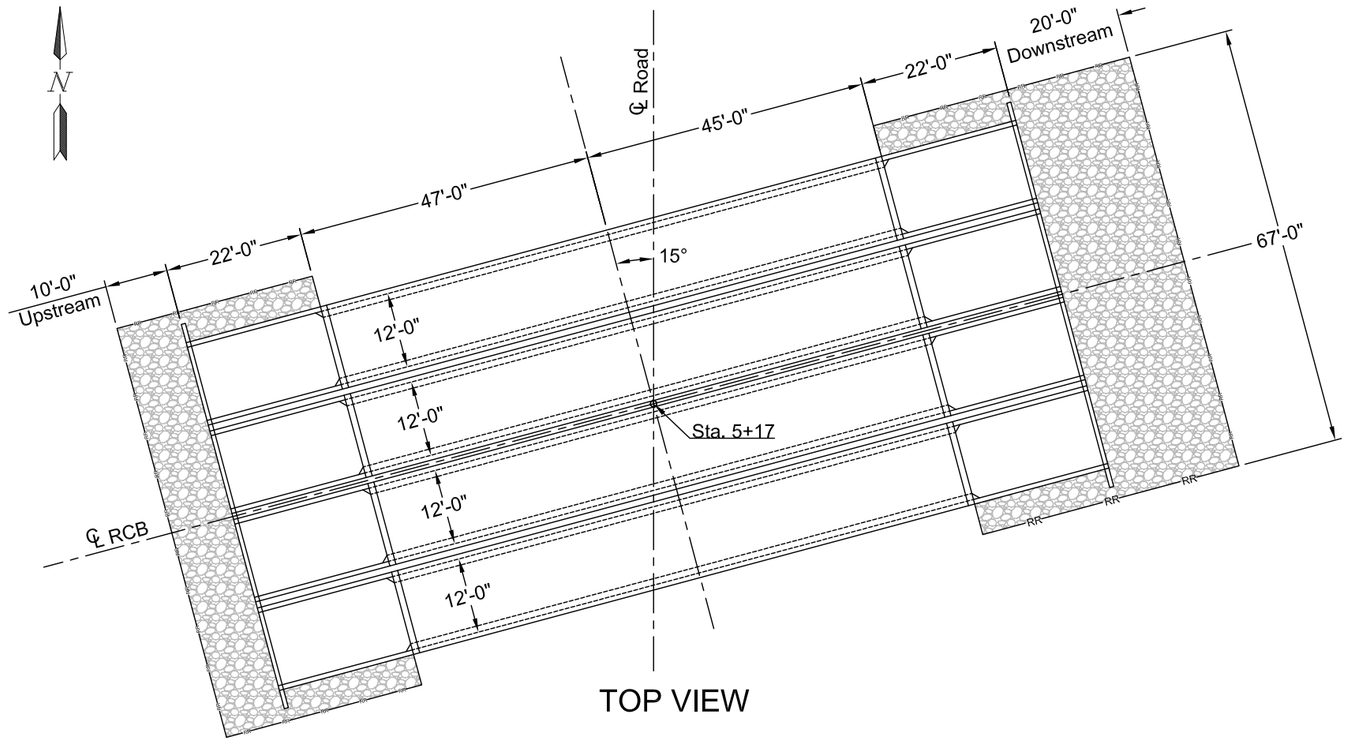

TOP VIEW

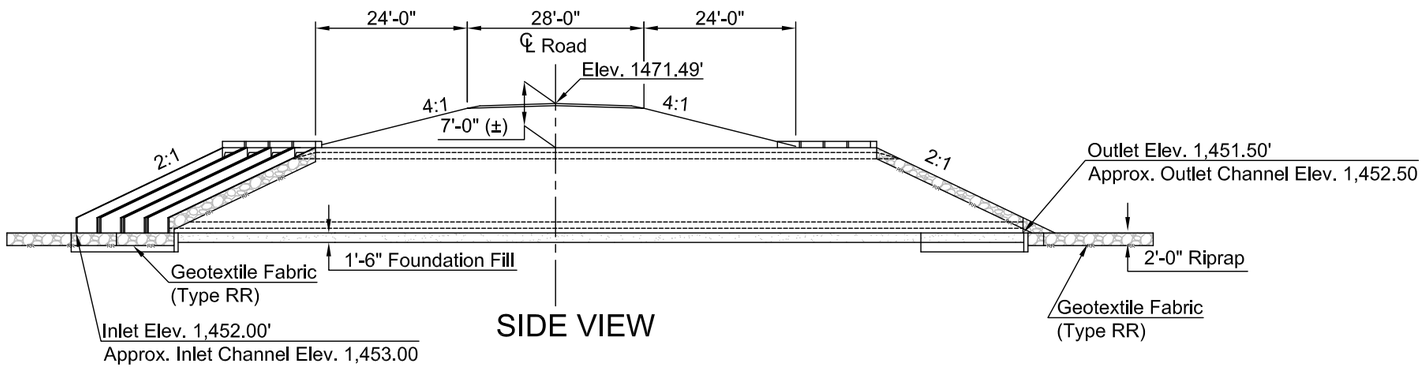

SIDE VIEW

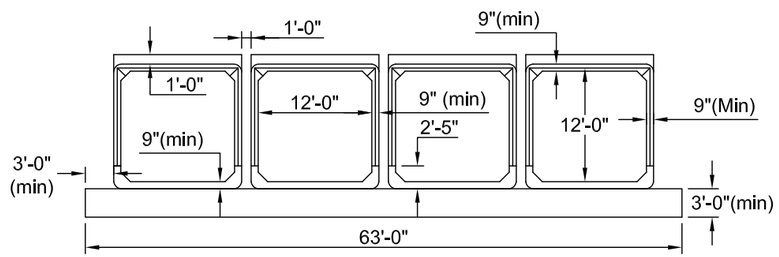

END SECTION VIEW

For a box culvert with 9.0 inch thick roof, 9.0 inch thick floor and 9.0 inch thick walls, the following total factored moments would result from the application of the required loads:

LRFD Factored Design Moments and Minimum Reinforcing
(Double Cell)

	Factored Design Moments	Minimum Reinforcing
Wall Moment	4,288 ft.-lbs.	0.216 in^2/ft
Roof Moments		
Corner	16,962 ft.-lbs.	0.475 in^2/ft
Bottom	19,434 ft.-lbs.	0.548 in^2/ft
Top	35,248 ft.-lbs.	1.038 in^2/ft
Floor Moments		
Corner	20,311 ft.-lbs.	0.574 in^2/ft
Top	19,982 ft.-lbs.	0.564 in^2/ft
Bottom	38,259 ft.-lbs.	1.137 in^2/ft

LRFD Factored Design Moments and Minimum Reinforcing
(Single Cell)

	Factored Design Moments	Minimum Reinforcing
Wall Moment	2,999 ft.-lbs.	0.192 in^2/ft
Roof Moments		
Corner	17,234 ft.-lbs.	0.483 in^2/ft
Bottom	26,871 ft.-lbs.	0.773 in^2/ft
Floor Moments		
Corner	22,126 ft.-lbs.	0.628 in^2/ft
Top	29,225 ft.-lbs.	0.846 in^2/ft

HYDRAULIC DATA	
DRAINAGE AREA	406 sq. miles
STREAM SLOPE	0.0009 ft/ft
DESIGN FREQUENCY	15 year
DESIGN DISCHARGE	2,448 cfs
DESIGN HEADWATER STAGE	1,461.89'
DESIGN TAILWATER STAGE	1,461.36'
DESIGN VELOCITY	5.47 fps
100-YEAR FREQUENCY DISCHARGE	6,021 cfs
100-YEAR FREQUENCY HEADWATER	1,466.85'
OVERTOPPING STAGE	1,468.07'
OVERTOPPING DISCHARGE	6,824 cfs

This document was originally issued and sealed by Michael R. Rivinius, Registration Number PE-4446, on 08/29/14 and the original document is stored at the Wold Engineering, Bismarck

PRECAST BOX CULVERT

REVISED: 00/00/0000

Wold Engineering, P.C.
Consulting Engineers & Land Surveyors
BOTTINEAU ~ BISMARCK ~ MINOT

DRAWN BY: JAB	CHECKED BY: MRR	DATE: 08/29/2014

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	BRO-0025(010)	170	2

NOTES

606-P01 PRECAST RCB CULVERT

Dimensions: Quad 12ft. span x 12ft. rise section

Fill: 8ft.

Design Load: HL-93

Total Length: 88ft./line + sloped ends = 92 ft. total barrel length

Weight: Double = 54,000 lbs/5ft. Single = 34,275/6 ft.

Tie Bolts: All sections shall be tied together with a minimum of 2 tie bolts per outside wall. The tie bolts shall be placed at third points of the outside walls. Cost of ties shall be included in price bid for "DBL 12FT X 12FT PRECAST RCB CULVERT". An alternate tie system using pre-cast tubes and an internal cable tie will be allowed but subject to review of shop detail drawings.

Threaded Inserts for Eye Bolts: Three (3) 5/8" Dia. galvanized threaded inserts and 5/8" Dia. threaded and eyebolts shall be provided per wall on each end section to provided anchor points for fencing. The concrete inserts shall be of such design that when installed in concrete, will be capable of developing the full strength of the 5/8" Dia. threaded eye bolt. The Insets shall start 15" from the ground and be spaced at 15" intervals.

End Sections: The sloped end sections shall be attached to the last barrel section. The sloped end sections shall be connected to the last barrel sections by the use of tie bolts, steel-bolted plates or another approved method so the inside corner surface is smooth. Holes shall be cast at 3' centers through the floor of the last sloped end section and into the cutoff wall to receive ¾" diameter reinforcing bars.

The "DBL 12FT X 12FT PRECAST RCB END SECTION" shall consist of the threaded inserts, eye bolts, cutoff wall, sloped ends sections and parapet.

All bolts, plates, angles, and studs shall meet ASTM A 36. Nuts shall be ASTM A 563 and washers shall be ASTM F 436, Type 1. Welded pipe sleeves shall conform to ASTM A 53, Grade B. All hardware shall be galvanized according to AASHTO M 232. Structural steel shall be galvanized after fabrication according to AASHTO M 111. Welders shall be properly certified for all shop and field welds. Field welds shall be coated with galvanizing paint.

Joints: All joints shall have one (1) inch joint mastic installed in the center of the tongue and groove. This shall be installed on the bottom and up each side, 12" above the haunch on each side. The joints shall be wrapped with 24" wide filter fabric on all sides, including the top, bottom, and sides. This filter fabric shall be centered on the joint maintaining 12" overlap on either side of the joint.

Single or Multiple Span Substitution

The Contractor may substitute two single span precast box culverts sections for the double span precast box culvert sections shown in the plans. The contractor shall install the four single span precast box culverts sections or two double span precast box culverts sections with a space between barrel lines of 1'-0". This space shall be filled with grout with the following mix design:

MIX DESIGN

3/4" minus Rock	800 lbs
Sand	2,300 lbs
Fly Ash	100 lbs
Cement	560 lbs
Air	5%
Slump	5" to 6"

The grout shall be fluid on placement to flow around and fill voids in the backfill area. The grout shall be included in price bid for precast units.

Payment shall be limited to the price bid for the Double Precast Box Sections and End Sections.

NOTES

NDDOT ABBREVIATIONS

D-101-1

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.
Abn	abandoned
Abut	abutment
Ac	acres
Adj	adjusted
Aggr	aggregate
Ahd	ahead
ARV	air release valve
Align	alignment
Al	alley
Alt	alternate
Alum	aluminum
ADA	Americans with Disabilities Act
A	ampere
&	and
Appr	approach
Approx	approximate
ACP	asbestos cement pipe
Asph	asphalt
AC	asphalt cement
Assmd	assumed
@	at
Atten	attenuation
ATR	automatic traffic recorder
Ave	Avenue
Avg	average
ADT	average daily traffic
Az	azimuth
Bk	back
BF	back face
Bs	backsight
Balc	balcony
B Wire	barbed wire
Barr	barricade
Btry	battery
Brg	bearing
BI	beehive inlet
Beg	begin
BM	bench mark
Bkwy	bikeway
Bit	bituminous
Blk	block
Bd Ft	board feet
BH	bore hole
BS	both sides
Bot	bottom
Blvd	Boulevard
Bndry	boundary
BC	brass cap
Brkwy	breakaway
Br	bridge
Bldg	building
BV	butterfly valve
Byp	bypass
C Gdrl	cable guardrail
Calc	calculate
Cd	candela
CIP	cast iron pipe
CB	catch basin
CRS	cationic rapid setting
C Gd	cattle guard
C To C	center to center
Cl or ℄	centerline
Cm	centimeter
Ch	chain
Chnlk	chain-link
Ch Blk	channel block
Ch Ch	channel change
Chk	check
Chsld	chiseled
Cir	circle
Cl	class
Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Clnt	clean-out
Clr	clear
Cl&gr	clearing & grubbing
Co S	coal slack
Comb.	combination
Coml	commercial
Compr	compression
CADD	computer aided drafting & design
Conc	concrete
Cond	conductor
Const	construction
Cont	continuous
CSB	continuous split barrel sample
Contr	contraction
Contr	contractor
CP	control point
Coord	coordinate
Cor	corner
Corr	corrected
CAES	corrugated aluminum end section
CAP	corrugated aluminum pipe
CMES	corrugated metal end section
CMP	corrugated metal pipe
CPVCP	corrugated poly-vinyl chloride pipe
CSES	corrugated steel end section
CSP	corrugated steel pipe
C	coulomb
Co	County
Crse	course
C Gr	course gravel
CS	course sand
Ct	Court
Xarm	cross arm
Xbuck	cross buck
Xsec	cross sections
Xing	crossing
Xrd	Crossroad
Crn	crown
CF	cubic feet
M3	cubic meter
M3/s	cubic meters per second
CY	cubic yard
Cy/mi	cubic yards per mile
Culv	culvert
C&G	curb & gutter
CI	curb inlet
CR	curb ramp
CS	curve to spiral
C	cut
Dd Ld	dead load
Defl	deflection
Defm	deformed
Deg or D	degree
Dlnt	delineate
Dlntr	delineator
Depr	depression
Desc	description
Det	detail
DWP	detectable warning panel
Dtr	detour
Dia	diameter
Dir	direction
Dist	distance
DM	disturbed material
DB	ditch block
DG	ditch grade
Dbl	double
Dn	down
Dwg	drawing
Dr	drive
Drwy	driveway
DI	drop inlet
D	dry density
Ea	each
Esmt	easement
E	East
EB	Eastbound
Elast	elastomeric
EL	electric locker
E Mtr	electric meter
Elec	electric/al
EDM	electronic distance meter
Elev or El	elevation
Ellipt	elliptical
Emb	embankment
Emuls	emulsion/emulsified
ES	end section
Engr	engineer
ESS	environmental sensor station
Eq	equal
Eq	equation
Evgr	evergreen
Exc	excavation
Exst	existing
Exp	expansion
Expy	Expressway
E	external of curve
Extru	extruded
FOS	factor of safety
F	Fahrenheit
FS	far side
F	farad
Fed	Federal
FP	feed point
Ft	feet/foot
Fn	fence
Fn P	fence post
FO	fiber optic
FB	field book
FD	field drive
F	fill
FAA	fine aggregate angularity
FS	fine sand
FH	fire hydrant
Fl	flange
Flrd	flared
FES	flared end section
F Bcn	flashing beacon
FA	flight auger sample
FL	flow line
Ftg	footing
FM	force main
Fs	foresight
Fnd	found
Fdn	foundation
Frac	fractional
Frwy	freeway
Frt	front
FF	front face
F Disp	fuel dispenser

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-2

FFP	fuel filler pipes
FLS	fuel leak sensor
Furn	furnish/ed
Gal	gallon
Galv	galvanized
Gar	garage
Gs L	gas line
G Reg	gas line regulator
GMV	gas main valve
G Mtr	gas meter
GSV	gas service valve
GVP	gas vent pipe
GV	gate valve
Ga	gauge
Geod	geodetic
GIS	Geographical Information System
G	giga
GPS	Global Positioning System
Gov	government
Grd	graded/grade
Gr	gravel
Grnd	ground
GWM	ground water monitor
Gdrl	guardrail
Gtr	gutter
H Plg	H piling
Hdwl	headwall
Ha	hectare
Ht	height
HI	height of instrument
Hel	helical
H	henry
Hz	hertz
HDPE	high density polyethylene
HM	high mast
HP	high pressure
HPS	high pressure sodium
Hwy	highway
Hor	horizontal
HBP	hot bituminous pavement
Hr	hour(s)
Hyd	hydrant
Ph	hydrogen ion content
Id	identification
In or "	inch
Incl	inclinometer tube
IMH	inlet manhole
ID	inside diameter
Inst	instrument
Intchg	interchange
Intmdt	intermediate
Intscn	intersection
Inv	invert
IM	iron monument
I Pn	Iron Pin
IP	iron Pipe
Jt	joint
J	joule
Jct	junction
K	kelvin
Kn	kilo newton
Kpa	kilo pascal
Kg	kilogram
Kg/m3	kilogram per cubic meter
Km	kilometer
K	Kip(s)
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
Ln	lane
Lg	large
Lat	latitude
Lt	left
L	length of curve
Lens	lenses
Lvl	level
LB	level book
Lvlng	leveling
Lht	light
LP	light pole
Ltg	lighting
Lig Co	lignite coal
Lig Sl	lignite slack
LF	linear foot
Liq	liquid
LL	liquid limit
L	litre
Lm	loam
Loc	location
LC	long chord
Long.	longitude
Lp	loop
LD	loop detector
Lm	lumen
Lum	luminaire
L Sum	lump sum
Lx	lux
ML	main line
M Hr	man hour
MH	manhole
Mkd	marked
Mkr	marker
Mkg	marking
MA	mast arm
Matl	material
Max	maximum
MC	meander corner
Meas	measure
Mdn	median
MD	median drain
MC	medium curing
M	mega
Mer	meridian
M	meter
M/s	meters per second
M	mid ordinate of curve
Mi	mile
MM	mile marker
MP	mile post
Ml	milliliter
Mm	millimeter
Mm/hr	millimeters per hour
Min	minimum
Misc	miscellaneous
Mon	monument
Mnd	mound
Mtbl	mountable
Mtd	mounted
Mtg	mounting
Mk	muck
Mun	municipal
N	nano
NGS	National Geodetic Survey
NS	near side
Neop	neoprene
Ntwk	network
N	newton
N	North
NE	North East
NW	North West
NB	Northbound
No. or #	number
Obsc	obscure(d)
Obsn	observation
Ocpd	occupied
Ocpy	occupy
Off Loc	office location
O/s	offset
OC	on center
C	one dimensional consolidation
OC	organic content
Orig	original
O To O	out to out
OD	outside diameter
OH	overhead
PMT	pad mounted transformer
Pg	pages
Pntd	painted
Pr	pair
Pnl	panel
Pk	park
PK	Parker-Kalon nail
Pa	pascal
PSD	passing sight distance
Pvmt	pavement
Ped	pedestal
Ped	pedestrian
PPP	pedestrian pushbutton post
Pen.	penetration
Perf	perforated
Per.	perimeter
PL	pipeline
Pl	place
P&P	plan & profile
PL	plastic limit
Pl	plate
Pt	point
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
PE	polyethylene
PVC	polyvinyl chloride
PCC	Portland Cement concrete
Lb or #	pounds
PP	power pole
Preempt	preemption
Prefab	prefabricated
Prfmd	preformed
Prep	preperation
Press.	pressure
PRV	pressure relief valve
Prestr	prestressed
Pvt	private
PD	private drive
Prod.	production/produce
Prog	programmed
Prop.	property
Prop Ln	property line
Ppsd	proposed
PB	pull box

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

Qty	quantity
Qtr	quarter
Rad or R	radius
RR	railroad
Rlwy	railway
Rsd	raised
RTP	random traverse point
Rge or R	range
RC	rapid curing
Rec	record
Rcy	recycle
RPCC	recycled Portland cement concrete
Ref	reference
R Mkr	reference marker
RM	reference monument
Refl	reflectorized
RCB	reinforced concrete box
RCES	reinforced concrete end section
RCP	reinforced concrete pipe
RCPS	reinforced concrete pipe sewer
Reinf	reinforcement
Res	reservation
Ret	retaining
Rev	reverse
Rt	right
R/W	right of way
Riv	river
Rd	road
Rdbd	road bed
Rdwy	roadway
RWIS	Roadway Weather Information System
Rk	rock
Rt	route
Salv	salvage(d)
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
San	sanitary sewer line
Sc	scoria
Sec	seconds
Sec	section
SL	section line
Sep	separation
Seq	sequence
Serv	service
Sh	shale
Sht	sheet
Shtng	sheeting
Shldr	shoulder
Sw	sidewalk
S	siemens
SD	sight distance
SN	sign number
Sig	signal
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam
Sgl	single
SC	slow curing
SS	slow setting
Sm	small
S	South
SE	South East
SW	South West
SB	Southbound
Sp	spaces
Spcl	special
SA	special assembly
SP	special provisions
G	specific gravity
Spk	spike
SC	spiral to curve
ST	spiral to tangent
SB	split barrel sample
SH	sprinkler head
SV	sprinkler valve
Sq	square
SF	square feet
Km2	square kilometer
M2	square meter
SY	square yard
Stk	stake
Std	standard
N	standard penetration test
Std Specs	Standard Specifications
Sta	station
Sta Yd	station yards
Stm L	steam line
SEC	steel encased concrete
SSD	stopping sight distance
SD	storm drain
St	street
SPP	structural plate pipe
SPPA	structural plate pipe arch
Str	structure
Subd	subdivision
Sub	subgrade
Sub Prep	subgrade preperation
Ss	subsoil
SE	superelevation
SS	supplement specification
Supp	supplemental
Surf	surfacing
Surv	survey
Sym	symmetrical
SI	Systems International
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Tel	telephone
Tel B	Telephone Booth
Tel P	telephone pole
Tv	television
Temp	temperature
Temp	temporary
TBM	temporary bench mark
T	tesla
T	thinwall tube sample
T/mi	tons per mile
Ts	topsoil
Twp or T	township
Traf	traffic
TSCB	traffic signal control box
Tr	trail
Transf	transformer
TB	transit book
Trans	transition
TT	transmission tower
Trans	transverse
Trav	traverse
TP	traverse point
Trtd	treated
Trmt	treatment
Qc	triaxial compression
TERO	tribal employment rights ordinance
Tpl	triple
TP	turning point
Typ	typical
Qu	unconfined compressive strength
Ugrnd	underground
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
Util	utility
VG	valley gutter
Vap	vapor
Vert	vertical
VC	vertical curve
VCP	vitrified clay pipe
V	volt
Vol	volume
Wkwy	walkway
W	water content
WGV	water gate valve
WL	water line
WM	water main
WMV	water main valve
W Mtr	water meter
WSV	water service valve
WW	water well
W	watt
Wrng	wearing
Wb	weber
WIM	Weigh In Motion
W	West
WB	Westbound
Wrng	wiring
W/	with
W/o	without
WC	witness corner
WGS	World Geodetic System
Z	zenith

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM	702 Communications
ACCENT	Accent Communications
AGASSIZ WU	Agassiz Water Users Incorporated
AGC	Assiociated General Contractors of America
All PI	Alliance Pipeline
ALL SEAS WU	All Seasons Water Users Association
AMOCO PI	Amoco Pipeline Company
AMRDA HESS	Amerada Hess Corporation
AT&T	AT&T Corporation
B PAW	Bear Paw Energy Incorporated
BAKER ELEC	Baker Electric
BASIN ELEC	Basin Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative
BELLE PL	Belle Fourche Pipeline Company
BLM	Bureau of Land Management
BNSF	Burlington Northern Santa Fe Railway
BOEING	Boeing
BRNS RWD	Barnes Rural Water District
BURK-DIV ELEC	Burke-Divide Electric Cooperative
BURL WU	Burleigh Water Users
Cable One	Cable One
CABLE SERV	Cable Services
CAP ELEC	Capital Electric Cooperative Incorporat
CASS CO ELEC	Cass County Electric Cooperative
CASS RWU	Cass Rural Water Users Incorporated
CAV ELEC	Cavalier Rural Electric Cooperative
CBLCOM	Cablecom Of Fargo
CENEX PL	Cenex Pipeline
CENT PL WATER DIST	Central Pipe Line Water District
CENT PWR ELEC	Central Power Electric Cooperative
COE	Corps of Engineers
CONS TEL	Consolidated Telephone
CONT RES	Continental Resource Inc
CPR	Canadian Pacific Railway
D O E	Department Of Energy
DAK CARR	Dakota Carrier Network
DAK CENT TEL	Dakota Central Telephone
DAK RWD	Dakota Rural Water District
DGC	Dakota Gasification Company
DICKEY R NET	Dickey Rural Networks
DICKEY RWU	Dickey Rural Water Users Association
DICKEY TEL	Dickey Telephone
DNRR	Dakota Northern Railroad
DOME PL	Dome Pipeline Company
DVELEC	Dakota Valley Electric Cooperative
DVMW	Dakota, Missouri Valley & Western
ENBRDG	Enbridge Pipelines Incorporated
ENVENTIS	Enventis Telephone
FALK MNG	Falkirk Mining Company
FHWA	Federal Highway Administration
G FKS-TRL WD	Grand Forks-traill Water District
GETTY TRD & TRAN	Getty Trading & Transportation
GLDN W ELEC	Golden West Electric Cooperative
GRGS CO TEL	Griggs County Telephone
GT PLNS NAT GAS	Great Plains Natural Gas Company
HALS TEL	Halstad Telephone Company
IDEA1	Idea1
INT-COMM TEL	Inter-Community Telephone Company
KANEB PL	Kaneb Pipeline Company
KEM ELEC	Kem Electric Cooperative Incorporated
KOCH GATH SYS	Koch Gathering Systems Incorporated
LKHD PL	Lakehead Pipeline Company
LNGDN RWU	Langdon Rural Water Users Incorporated
LWR YELL R ELEC	Lower Yellowstone Rural Electric
MCKNZ CON	McKenzie Consolidated Telcom
MCKNZ ELEC	McKenzie Electric Cooperative
MCKNZ WRD	McKenzie County Water Resource District
MCLEOD	McLeod USA
MCLN ELEC	McLean Electric Cooperative
MCLN-SHRDN R WAT	McLean-Sheridan Rural Water
MDU	Montana-dakota Utilities
MID-CONT CABLE	Mid-Continent Cable
MIDSTATE TEL	Midstate Telephone Company
MINOT CABLE	Minot Cable Television
MINOT TEL	Minot Telephone Company
MISS W W S	Missouri West Water System
MNKOTA PWR	Minnkota Power
MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative
MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative
MRE LBTY TEL	Moore & Liberty Telephone
MUNICIPAL	City Water And Sewer
MUNICIPAL	City Of '.....'
N CENT ELEC	North Central Electric Cooperative
N VALL W DIST	North Valley Water District
ND PKS & REC	North Dakota Parks And Recreation
ND TEL	North Dakota Telephone Company
NDDOT	North Dakota Department of Transportation
NDSU SOIL SCI DEPT	NDSU Soil Science Department
NEMONT TEL	Nemont Telephone
NODAK R ELEC	Nodak Rural Electric Cooperative
NOON FRMS TEL	Noonan Farmers Telephone Company
NPR	Northern Plains Railroad
NSP	Northern States Power
NTH PRAIR RW	Northern Prairie Rural Water Association
NTHN BRDR PL	Northern Border Pipeline
NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated
NTHWSTRN REF	Northwestern Refinery Company
NW COMM	Northwest Communication Cooperation
ONEOK	Oneok gas
OSHA	Occupational Safety and Health Administration
OTTR TL PWR	Otter Tail Power Company
P L E M	Prairielands Energy Marketing
POLAR COM	Polar Communications
PVT ELEC	Private Electric
QWEST	Qwest Communications
R&T W SUPPLY	R & T Water Supply Association
RAMSEY R SEW	Ramsey Rural Sewer Association
RAMSEY RW	Ramsey Rural Water Association
RAMSEY UTIL	Ramsey County Rural Utilities
RED RIV TEL	Red River Rural Telephone
RESVTN TEL	Reservation Telephone
ROBRTS TEL	Roberts Company Telephone
R-RIDER ELEC	Roughrider Electric Coop
RRVW	Red River Valley & Western Railroad
RSR ELEC	R.S.R. Electric Cooperative
S E W U	South East Water Users Incorporated
SCOTT CABLE	Scott Cable Television Dickinson
SHERDN ELEC	Sheridan Electric Cooperative
SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
SKYTECH	Skyland Technologies Incorporated
SLOPE ELEC	Slope Electric Cooperative Incorporated
SOURIS RIV TELCOM	Souris River Telecommunications
ST WAT COMM	State Water Commission
STATE LN WATER	State Line Water Cooperative
STER ENG	Sterling Energy
STUT RWU	Stutsman Rural Water Users
SW PL PRJ	Southwest Pipeline Project
T M C	Turtle Mountain Communications
TCI	TCI of North Dakota
TESORO HGH PLNS PL	Tesoro High Plains Pipeline
TRI-CNTY WU	Tri-County Water Users Incorporated
TRL CO RWU	Traill County Rural Water Users
UNTD TEL	United Telephone
UPPR SOUR WUA	Upper Souris Water Users Association
US SPRINT	U.S. Sprint
USAF MSL CABLE	U.S.A.F. Missile Cable
USFWS	US Fish and Wildlife Service
USW COMM	U.S. West Communications
VRNDRY ELEC	Verendrye Electric Cooperative
W RIV TEL	West River Telephone Incorporated
WEB	W. E. B. Water Development Association
WILLI RWA	Williams Rural Water Association
WILSTN BAS PL	Williston Basin Interstate Pipeline Company
WLSH RWD	Walsh Water Rural Water District
WOLVRTN TEL	Wolverton Telephone
XLENER	Xcel Energy
YSVR	Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

D-101-20

Line Styles

- Limits of Const Transition Line
- Bale Check
- Rock Check
- Sight Distance Triangle Line
- Small Hidden Object
- Dimension Leader
- Existing Ground
- Existing Topsoil (Cross Section View)
- Large Hidden Object
- Edge Drain
- Geotextile Fabric Type D
- Existing Electrical
- Existing Fiber Optic Line
- Existing TV Fiber Optic
- Existing Gas Pipe
- Geogrid
- Existing Overhead Utility Line
- Existing Power
- Existing Fuel Pipeline
- Existing Undefined Above Ground Pipe Line
- Geotextile Fabric Type R
- Geotextile Fabric Type R1
- Remove Line
- Geotextile Fabric Type RR
- Geotextile Fabric Type S
- Floating Silt Curtain
- Existing Telephone Line
- Existing TV Line
- Existing Assumed Ground (Not Surveyed)
- Tentative Ground Line
- Existing Water or Steam Line
- Existing Under Drain
- Under Drain
- Wall
- Existing Slotted Drain
- Existing Cemetary Boundary
- Centerline Pavement Marking
- Barrier with Centerline Pavement Marking
- Barrier Pavement Marking
- Stripe 4 IN Dotted Extension White
- Stripe 8 IN Dotted Extension White
- Stripe 8 IN Lane Drop
- Wetland Mitigation
- Existing Box Culvert Bridge
- Existing Concrete Surface
- Existing Drainage Structure
- Easement
- Existing Concrete
- Existing Easement
- Existing Gravel Surface
- Existing Aggregate (Cross Section View)
- Existing Curb and Gutter (Cross Section View)
- Existing Riprap
- Existing Underground Vault or Lift Station
- Tangent Line
- Hidden Object
- Existing Dirt Surface
- Existing Conduit
- Topsoil Profile
- Existing Conductor
- Conductor
- Fiber Optic
- Existing Loop Detector
- Subgrade, Subcut or Ditch Grade
- Existing Asphalt Surface
- Existing Asphalt (Cross Section View)
- Existing Reinforcement Rebar
- Existing Tie Point Line
- Existing State or International Line
- Existing Quarter Section Line
- Existing County
- Existing Section Line
- Existing Township
- Existing Railroad Centerline
- Centerline
- Existing Centerline
- Supplemental Contour
- Right of Way
- Existing Right of Way
- Existing Right of Way Railroad
- Failure Line
- Existing Conditions
- Existing Ground (Details)
- Existing Sixteenth Section Line
- Existing Right of Way Not State Owned
- Phantom Object
- Centerline Main
- Existing Guardrail Cable
- Existing Guardrail Metal
- Existing Edge of Water
- Excavation Limits
- Existing Government Lot Line
- Existing Adjacent Block Lines
- Existing Adjacent Lot Lines
- Existing Adjacent Property Line
- Existing Adjacent Subdivision Lines

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

D-101-21

Line Styles

- Subgrade Reinforcement
- Existing Down Guy Wire Down Guy
- Existing Fence
- Existing Railroad
- Existing Sanitary Sewer
- Existing Sanitary Force Main
- Existing Storm Drain
- Existing Storm Drain Force Main
- Fence
- Silt Fence
- Existing Field Line
- Exst Flow
- Flow
- Existing Culvert
- Existing Curb
- Existing Valley Gutter
- Existing Driveway Gutter
- Existing Curb and Gutter
- Existing Mountable Curb and Gutter
- Existing Double Micro Loop Detector
- Micro Loop Detector Double
- Existing Overhead Sign Structure
- Existing Micro Loop Detector
- Micro Loop Detector
- Existing Overhead Sign Structure Cantilever
- Existing Railroad Switch
- Overhead Sign Structure Cantilever
- 24 Inch Pipe
- Reinforced Concrete Pipe
- Signal Head with Mast Arm
- Existing Signal Head with Mast Arm
- Tie Bar at Random Spacing
- 3-Cable w Posts
- Existing 3-Cable w Posts
- Site Boundary
- Fiber Rolls
- Doweled Joint
- Tie Bar 30 Inch 4 Foot Center to Center
- Tie Bar 18 Inch 3 Foot Center to Center
- Existing Berm, Dike, Pit, or Earth Dam
- Existing Ditch Block
- Depression Contours
- Existing City Corporate Limits or Reservation Boundary
- Gravel Pit - Borrow Area
- Existing Tree Boundary
- Tree Row
- Existing Brush or Shrub Boundary
- Existing Retaining Wall
- Existing Planter or Wall
- Retaining Wall (Plan View)
- Sheet Piling
- W-Beam w Posts
- Existing W-Beam Guardrail with Posts
- Exst Wet Area-Vegetation Break
- Existing Wetland Delineated

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

D-101-30

North Arrow (Half Scale)

Truck Mounted Attenuator

Type I Barricade

Type II Barricade

Type III Barricade

Catch Basin

Cairn or Stone Circle

Video Detection Camera

Storm Drain Cap or Stub

Corrugated Metal End Section 18 Inch

Corrugated Metal End Section 24 Inch

Corrugated Metal End Section 30 Inch

Corrugated Metal End Section 36 Inch

Corrugated Metal End Section 42 Inch

Corrugated Metal End Section 48 Inch

Concrete Foundation

Ground Connection Conductor

Neutral Connection Conductor

Phase 1 Connection Conductor

Phase 2 Connection Conductor

Traffic Cone

Signal Controller

Pad Mounted Signal Controller

Alignment Data Point

Emergency Vehicle Detector

Attenuation Device

Diamond Grade Delineator Type A

Diamond Grade Delineator Type B

Diamond Grade Delineator Type C

Diamond Grade Delineator Type D

Diamond Grade Delineator Type E

Flexible Delineator

Flexible Delineator Type A

Flexible Delineator Type B

Flexible Delineator Type C

Flexible Delineator Type D

Flexible Delineator Type E

Delineator Type A

Delineator Type A Reset

Delineator Type B

Delineator Type B Reset

Delineator Type C

Delineator Type D

Delineator Type E

Delineator Drums

Spot Elevation

Existing Access Control Arrow

Existing Artifact

Existing Flashing Beacon

Existing Benchmark

Existing Railroad Battery Box

Existing Bush or Shrub

Existing Gas Cap or Stub

Existing Sanitary Cap or Stub

Existing Storm Drain Cap or Stub

Existing Water Cap or Stub

Existing Sanitary Cleanout

Existing Concrete Foundation

Existing Traffic Signal Controller

Existing Pad Mounted Signal Controller

Existing Sixteenth Section Corner

Existing Quarter Section Corner

Existing Section Corner

Existing Railroad Crossbuck

Existing Satellite Dish

Existing Fuel Dispensers

Existing Flexible Delineator Type A

Existing Flexible Delineator Type B

Existing Flexible Delineator Type C

Existing Flexible Delineator Type D

Existing Flexible Delineator Type E

Existing Delineator Type A

Existing Delineator Type B

Existing Delineator Type C

Existing Delineator Type D

Existing Delineator Type E

Existing EFB Misc

Existing Flashing Beacon

Existing Pipe Mounted Flasher

Existing Pad Mounted Feed Point

Existing Pipe Mounted Feed Point with Pad

Existing Pole Mounted Feed Point

Existing Railroad Frog

Existing Snow Gate 18

Existing Snow Gate 28

Existing Snow Gate 40

Existing Headwall

Existing Pedestrian Head with Number

Existing Signal Head

Existing Sprinkler Head

Existing Fire Hydrant

Existing Catch Basin Drop Inlet

Existing Curb Inlet

Existing Manhole Inlet

Existing Junction Box

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

D-101-31

- Existing Light Standard
- Existing High Mast Light Standard 10 Luminaire
- Existing High Mast Light Standard 3 Luminaire
- Existing High Mast Light Standard 4 Luminaire
- Existing High Mast Light Standard 5 Luminaire
- Existing High Mast Light Standard 6 Luminaire
- Existing High Mast Light Standard 7 Luminaire
- Existing High Mast Light Standard 8 Luminaire
- Existing High Mast Light Standard 9 Luminaire
- Existing Overhead Sign Structure Load Center
- Existing Luminaire
- Existing Light Standard Luminaire
- Existing Federal Mailbox
- Existing Private Mailbox
- Existing Meander Section Corner
- Existing Meter
- Existing Electrical Manhole
- Existing Gas Manhole
- Existing Sanitary Manhole
- Existing Sanitary Force Main Manhole
- Existing Sanitary Manhole with Valve
- Existing Storm Drain Manhole
- Existing Force Main Storm Drain Manhole
- Existing Force Main Storm Drain Manhole with Valve
- Existing Telephone Manhole
- Existing Manhole with Valve Water
- Existing Water Manhole
- Existing Mile Post Type A
- Existing Mile Post Type B
- Existing Mile Post Type C
- Existing Reference Marker
- Existing RW Marker
- Existing Utility Marker
- Iron Monument Found
- Iron Pin R/W Monument
- Existing Object Marker Type I
- Existing Object Marker Type II
- Existing Object Marker Type III
- Existing Electrical Pedestal
- Existing Telephone Pedestal
- Existing Fiber Optic Telephone Pedestal
- Existing TV Pedestal
- Existing Fiber Optic TV Pedestal
- Existing Fuel Filler Pipes
- Existing Traverse PI Aerial Panel
- Existing Pole
- Existing Power Pole
- Existing Power Pole with Transformer
- Existing Telephone Pole
- Existing Wood Pole
- Existing Post
- Existing Pedestrian Push Button Post
- Existing Control Point CP
- Existing Control Point GPS-RTK
- Existing Control Point TRI
- Existing Reference Marker Point NGS
- Existing Pull Box
- Existing Intelligent Transportation Pull Box
- Existing Water Pump
- Existing Slotted Reinforced Concrete Pipe
- Existing RR Profile Spot
- Existing Fuel Leak Sensors
- Existing Highway Sign
- Existing Miscellaneous Spot
- Existing Lighting Standard Pole
- Existing Traffic Signal Standard
- Existing Transformer
- Existing Large Evergreen Tree
- Existing Small Evergreen Tree
- Existing Large Tree
- Existing Small Tree
- Existing Tree Trunk
- Existing Pad Mounted Traffic Signal Control Box
- Existing Undefined Manhole
- Existing Undefined Pull Box
- Existing Undefined Pedestal
- Existing Undefined Valve
- Existing Undefined Pipe Vent
- Existing Gas Valve
- Existing Water Valve
- Existing Fuel Pipe Vent
- Existing Gas Pipe Vent
- Existing Sanitary Pipe Vent
- Existing Storm Drain Pipe Vent
- Existing Water Pipe Vent
- Existing Weather Station
- Existing Ground Water Well Bore Hole
- Existing Windmill or Tower
- Existing Witness Corner
- Flashing Beacon
- Flagger
- Pipe Mounted Flasher
- Sanitary Force Main with Valve

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

D-101-32

- Pad Mounted Feed Point
- Pipe Mounted Feed Point with Pad
- Pole Mounted Feed Point
- Headwall
- Double Headwall with Vegitation Barrier
- Single Headwall with Vegitation Barrier
- Pole Mounted Head
- Sprinkler Head
- Fire Hydrant
- Inlet Type 1
- Inlet Type 2
- Double Inlet Type 2
- Inlet Grate Type 2
- Junction Box
- High Mast Light Standard 10 Luminaire
- High Mast Light Standard 3 Luminaire
- High Mast Light Standard 4 Luminaire
- High Mast Light Standard 5 Luminaire
- High Mast Light Standard 6 Luminaire
- High Mast Light Standard 7 Luminaire
- High Mast Light Standard 8 Luminaire
- High Mast Light Standard 9 Luminaire
- Relocate Light Standard
- Overhead Sign Structure Load Center
- Light Standard 100 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 150 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 175 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 200 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 250 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 310 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 35 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 400 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 50 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 70 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 700 Watt High Pressure Sodium Vapor Luminaire
- Manhole
- Manhole 48 Inch
- Sanitary Force Main Manhole
- Sanitary Sewer Manhole
- Storm Drain Manhole
- Storm Drain Manhole with Inlet
- Reset Mile Post
- Mile Post Type A
- Mile Post Type B
- Mile Post Type C
- Right of Way Marker
- Tubular Marker
- Alignment Monument
- Iron Pin Reference Monument
- Object Marker Type I
- Object Marker Type II
- Object Marker Type III
- Caution Mode Arrow Panel
- Back to Back Vertical Panel Sign
- Double Direction Arrow Panel
- Left Directional Arrow Panel
- Right Directional Arrow Panel
- Sequencing Arrow Panel
- Truck Mounted Arrow Panel
- Power Pole
- Wood Pole
- Pedestrian Push Button Post
- Property Corner
- Pull Box
- Intelligent Transportation Pull Box
- Sanitary Pump
- Storm Drain Pump
- Reinforced Pavement
- Reinforced Concrete End Section 15 Inch
- Reinforced Concrete End Section 18 Inch
- Reinforced Concrete End Section 24 Inch
- Reinforced Concrete End Section 30 Inch
- Reinforced Concrete End Section 36 Inch
- Reinforced Concrete End Section 42 Inch
- Reinforced Concrete End Section 48 Inch
- Reinforced Concrete End Section 54 Inch
- Reset Right of Way Marker
- Reset USGS Marker
- Right of Way Markers
- Riser 30 Inch
- Continuous Split Barrel Sample (CSB)
- Flight Auger Sample (FA)
- Split Barrel Sample (SB)
- Thinwall Tube Sample
- Highway Sign
- SNOW GATE 18 FT
- SNOW GATE 28 FT
- SNOW GATE 40 FT
- Standard Penetration Test (N)
- Transformer
- Inclinometer Tube (Incl)
- Underdrain Cleanout
- Excavation Unit
- Water Valve

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

D-261-1

EROSION CONTROL
FIBER ROLL PLACEMENT DETAILS

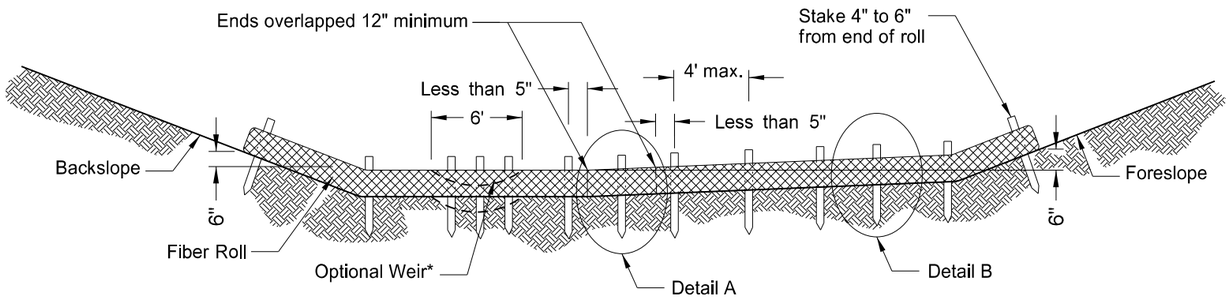

*Optional Weir. Use in flat areas, such as the Red River Valley, where there is potential for water to back up on adjacent property. Lower fiber roll enough to prevent water from backing up on adjacent property. Do not use 20-inch fiber rolls in flat areas where there is potential for water to back up on adjacent property.

12 OR 20 INCH FIBER ROLL - DITCH BOTTOM

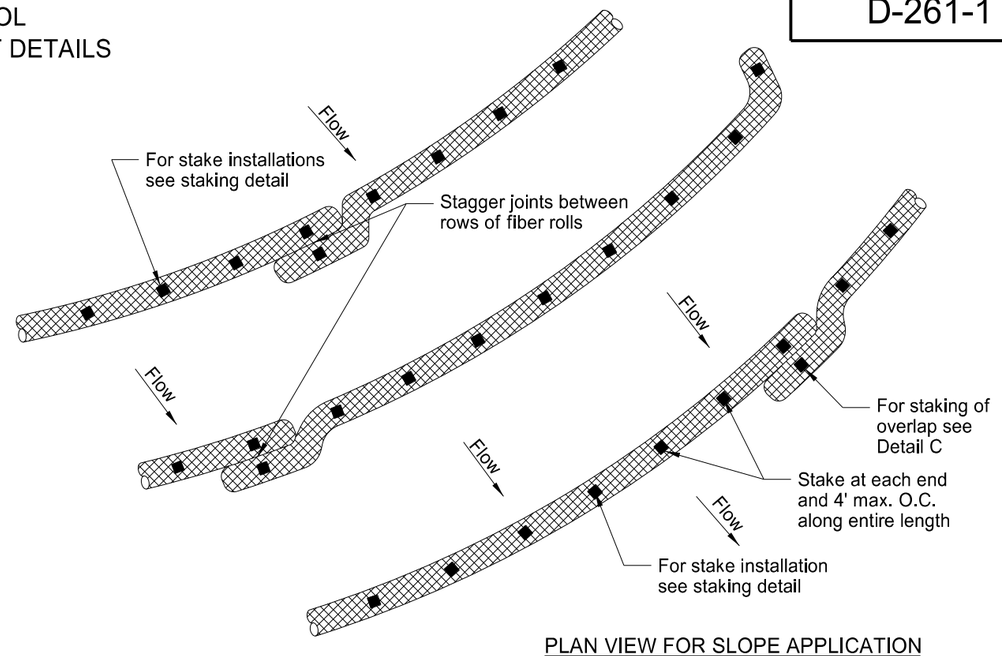

PLAN VIEW FOR SLOPE APPLICATION

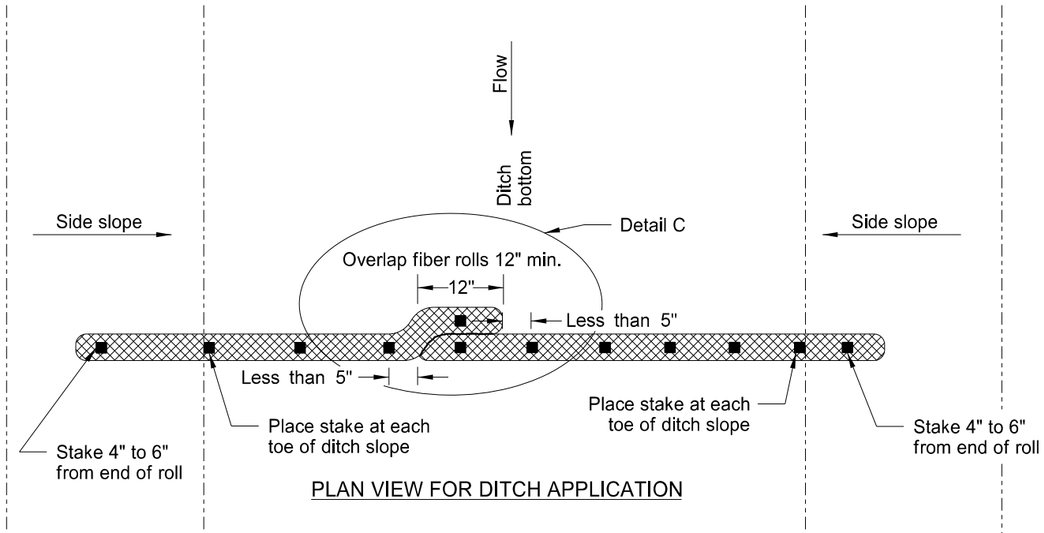

PLAN VIEW FOR DITCH APPLICATION

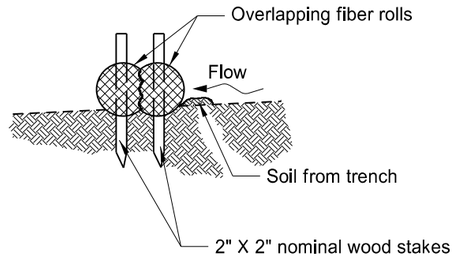

Detail A

Fiber Roll Overlapping Staking Detail

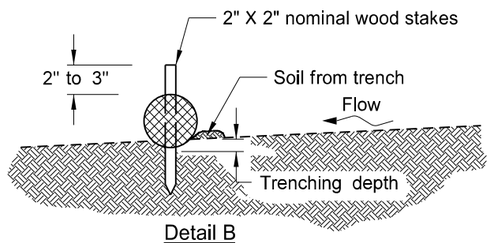

Detail B

Fiber Roll Staking Detail

FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	MINIMUM TRENCH DEPTH	MAXIMUM TRENCH DEPTH
6"	2" x 2"	18"	2"	2"
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"

NOTE: Runoff must not be allowed to run under or around roll.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-18-10	
REVISIONS	
DATE	CHANGE
06-10-13	Added plan view for ditch and slope application. Added table with values for stake and trench dimensions.
10-04-13	Revised fiber roll overlap detail.
06-26-14	Changed standard drawing number from D-708-7 to D-261-1

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 06/26/14 and the original document is stored at the North Dakota Department of Transportation

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-7

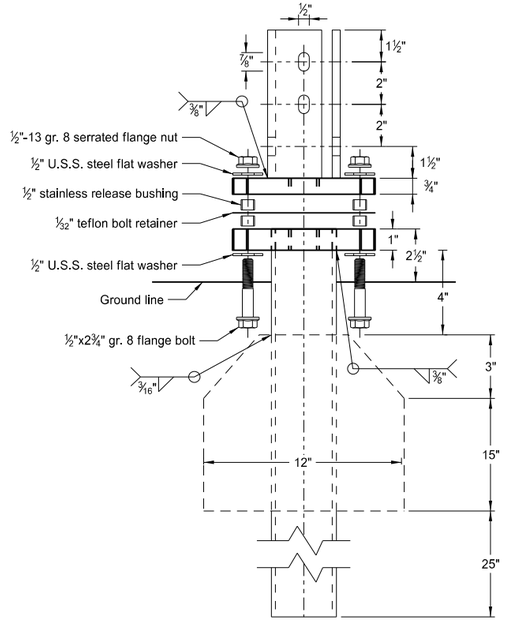

Multi-Directional
Slip Base Assembly

Perforated Tube

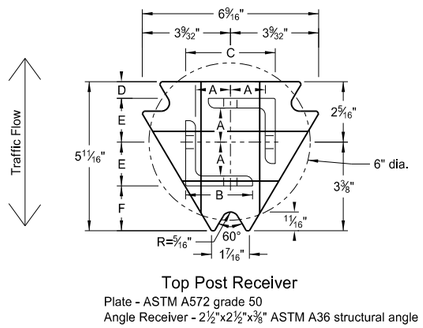

Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2½"x2½"x⅜" ASTM A36 structural angle

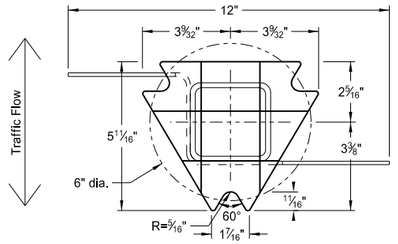

Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50

Notes:

1. Slip base bolts shall be torqued as specified by the manufacturer.
2. Anchor shall have a yield strength of 43.9 KSI and tensile strength of 59.3 KSI.
3. The 4" vertical clearance is required for the anchor or breakaway base. The 4"x60" measurement shall be made above and below post location and also back and ahead of the post.
4. When used in concrete sidewalk, anchor shall be same except without the wings.
5. Four post signs shall have over 7' between the first and the fourth posts.

Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thick-ness Gauge	Sleeve Size in.	Wall Thick-ness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2¼
1	2¼	12			No	2½
1	2½	12			(A)	3
1	2½	10			Yes	
1	2¼	12	2	12	Yes	
1	2½	12	2¼	12	Yes	
2	2	12			No	2¼
2	2¼	12			No	2½
2	2½	12			Yes	
2	2½	12			Yes	
2	2¼	10	2	12	Yes	
2	2½	12	2¼	12	Yes	
3 & 4	2½	12			Yes	
3 & 4	2½	10			Yes	
3 & 4	2½	12	2¼	12	Yes	
3 & 4	2¼	12	2	12	Yes	
3 & 4	2½	10	2³⁄₁₆	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia $in.^4$	Cross Sec. Area $in.^2$	Section Modulus $in.^3$
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
2³⁄₁₆ x 2³⁄₁₆	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2³⁄₁₆"x10 ga.	1⁹⁄₆₄"	2½"	3¹⁄₃₂"	25⁄₃₂"	1³³⁄₆₄"	1⅞"
2½"x10 ga.	1⁹⁄₃₂"	2½"	3⁵⁄₁₆"	⅝"	1²¹⁄₃₂"	1¾"

(A) The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak.

(B) The 2³⁄₁₆"x10 ga. may be inserted into 2½"x10 ga. for additional wind load.

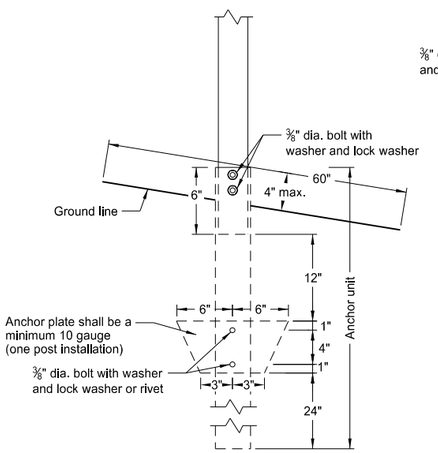

Anchor Unit and Post Assembly

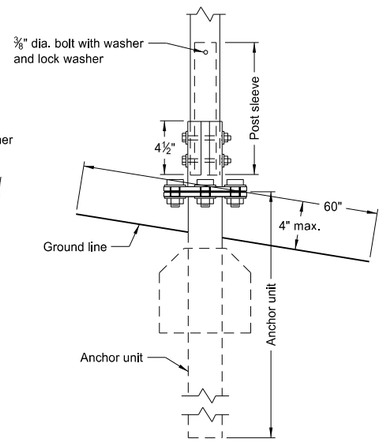

Multi-Directional
Slip Base Anchor Unit
and Post Sleeve Assembly



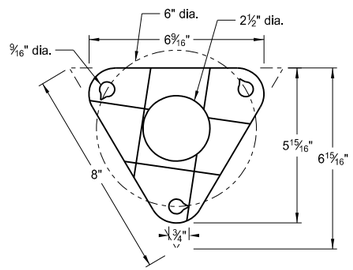

Bolt Retainer for Base Connection
Bolt Retainer- ¹⁄₃₂" Reprocessed Teflon

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

U-Channel Post

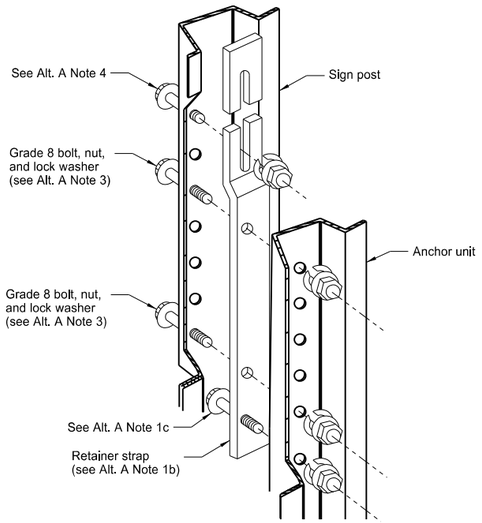

Detail A

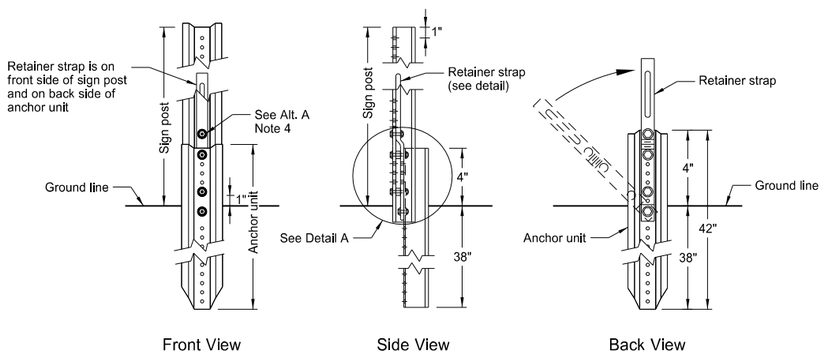

Front View Side View Back View

Breakaway U-Channel Detail
Alternate A

A maximum of 2 posts shall be installed within 7'.

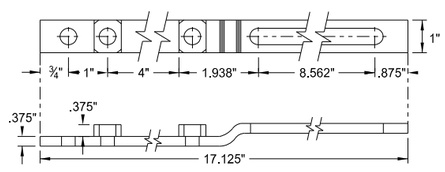

Retainer Strap Detail

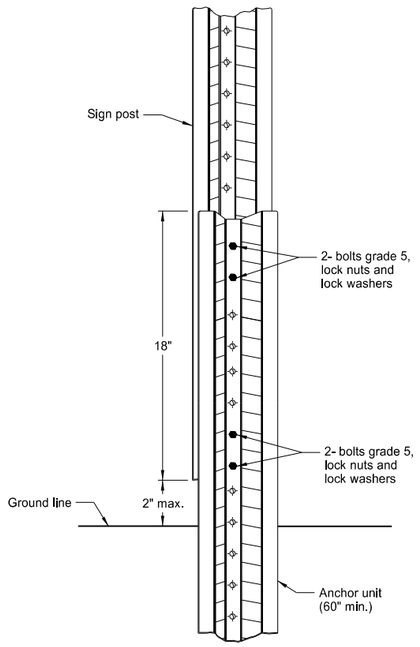

Breakaway U-Channel Splice Detail
Alternate B
(2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

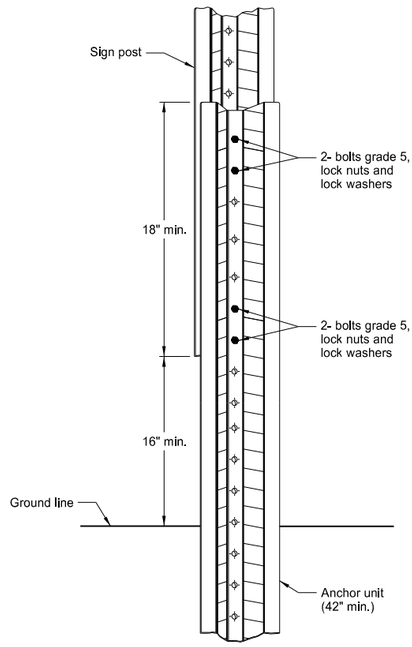

Breakaway U-Channel Splice Detail
Alternate C
(2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

Alternate A Steps of Installation:

1. a) Drive anchor unit to within 12" of ground level.
   b) Proper assembly established by lining up the bottom hole of retainer strap with the 6th hole from the top of the anchor unit.
   c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
   d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
   b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
   b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. The base post, strap and sign post shall be properly nested. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS

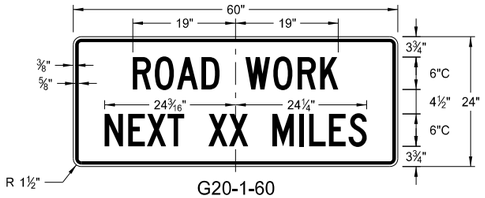

G20-1-60
Legend: black (non-refl)
Background: orange

G20-4b-36
Legend: black (non-refl)
Background; orange

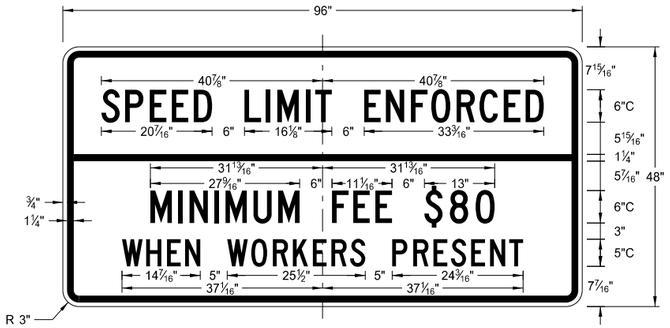

G20-55-96
Legend: black (non-refl)
Background: orange



E5-1-48



G20-50a-72
G20-52a-72



M4-9(L or R)-30
Right or Left



M4-9(L or R)-30
Advanced Right or Left



M4-9-30
Straight

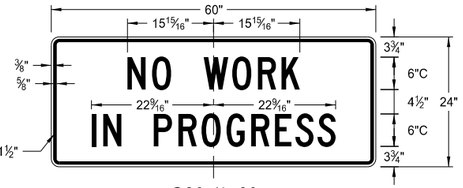

G20-1b-60
Legend: black (non-refl)
Background: orange

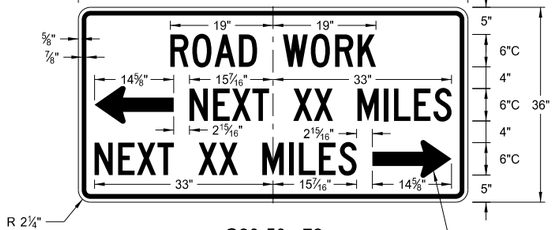

G20-50a-72
Legend: black (non-refl)
Background: orange

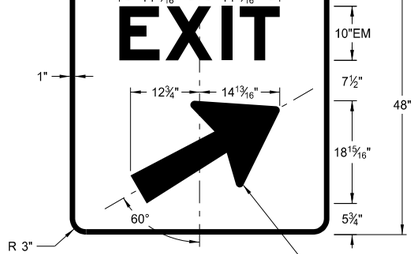

E5-1(L or R)-48
Legend: white
Background: green

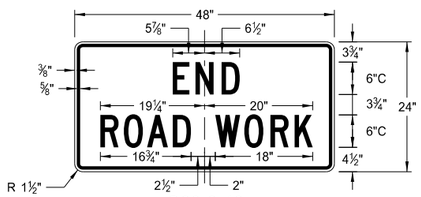

G20-2-48
Legend: black (non-refl)
Background: orange

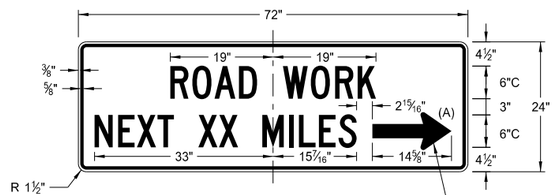

G20-52a-72
Legend: black (non-refl)
Background: orange

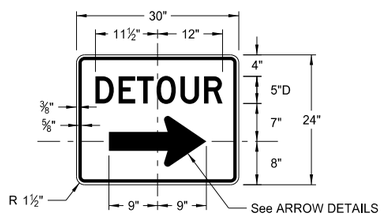

M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange

ARROW DETAILS

NOTES:

(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS



R1-50-24
Legend: black (non-refl)
Background: white

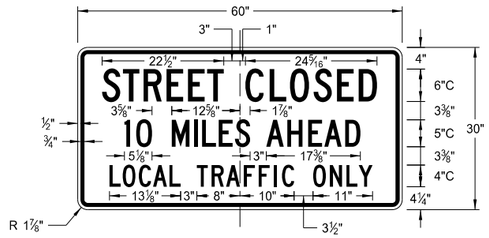

R11-3c-60
Legend: black (non-refl)
Background: white



R2-1a-24
Legend: black (non-refl)
Background: white

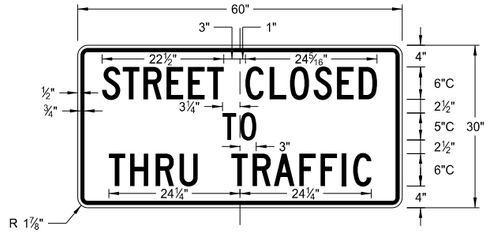

R11-4a-60
Legend: black (non-refl)
Background: white

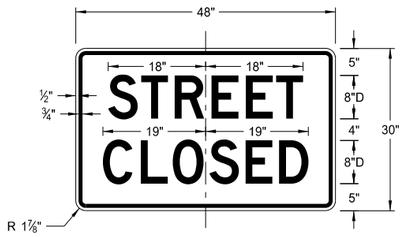

R11-2a-48
Legend: black (non-refl)
Background: white

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
WARNING SIGNS

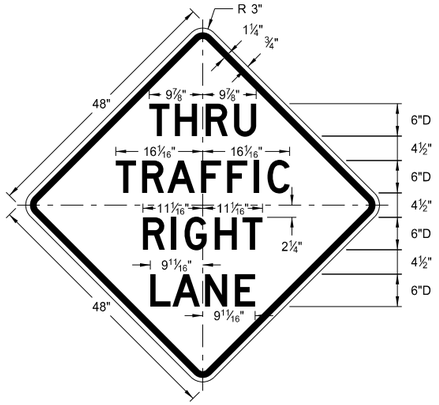

W5-8-48
Legend: black (non-refl)
Background: orange

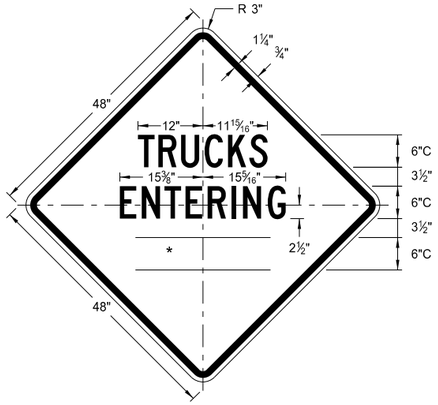

W8-54-48
Legend: black (non-refl)
Background: orange

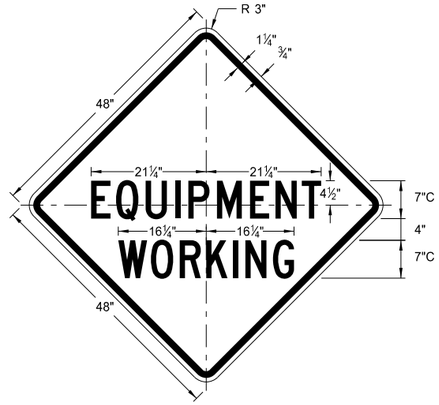

W20-51-48
Legend: black (non-refl)
Background: orange

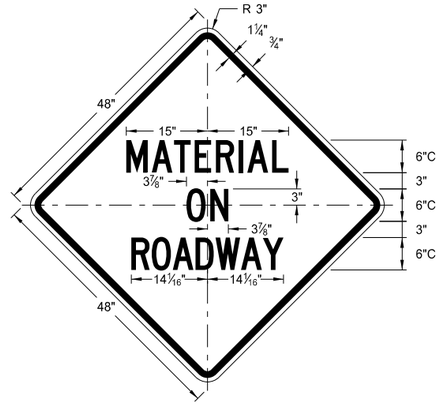

W21-51-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES

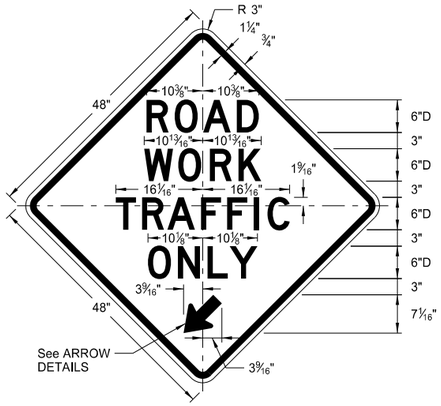

W5-9-48
Legend: black (non-refl)
Background: orange

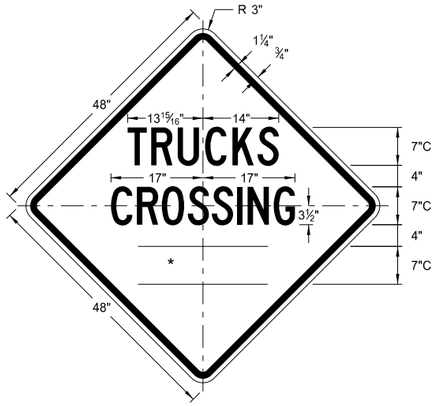

W8-55-48
Legend: black (non-refl)
Background: orange

W20-52-54
Legend: black (non-refl)
Background: orange

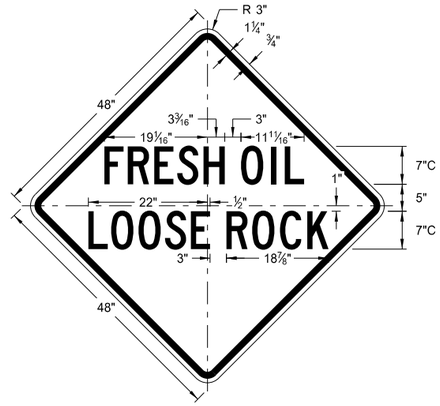

W22-8-48
Legend: black (non-refl)
Background: orange



W5-9-48

ARROW DETAILS

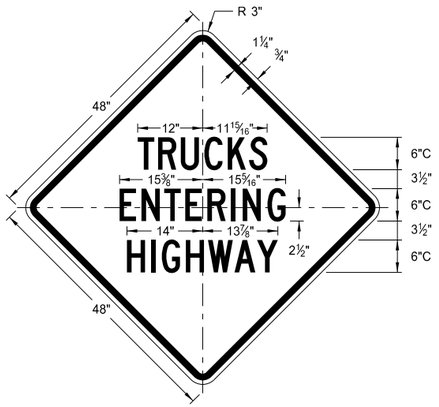

W8-53-48
Legend: black (non-refl)
Background: orange

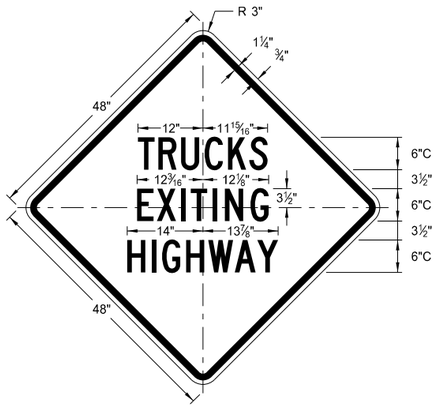

W8-56-48
Legend: black (non-refl)
Background: orange

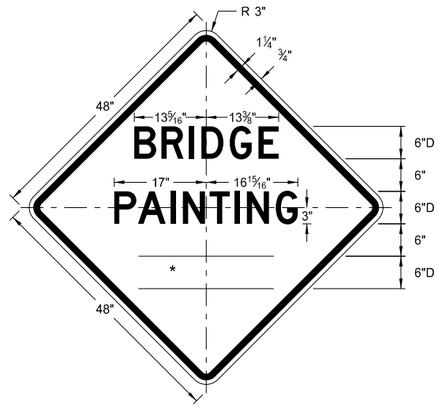

W21-50-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

D-704-13

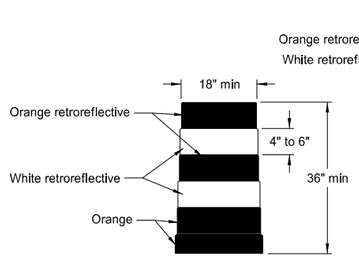

DELINEATOR DRUM

The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectorized spaces between the horizontal orange and white stripes shall not exceed 3" wide. Stripes shall not be placed on ribs or indentations in the drum. Drums shall have closed tops that will not allow collection of construction debris or other debris. Ballast shall not be placed on the top of a drum.

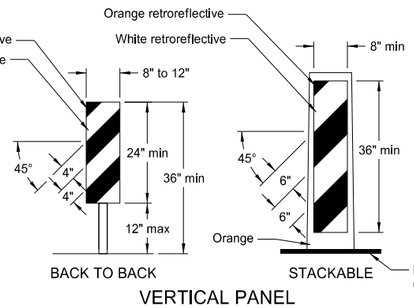

VERTICAL PANEL

Markings for vertical panels shall be alternating orange and white retroreflective stripes, sloping downward in the direction vehicular traffic is to pass. Retroreflective sheeting shall be placed on both sides of panel and shall have a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.

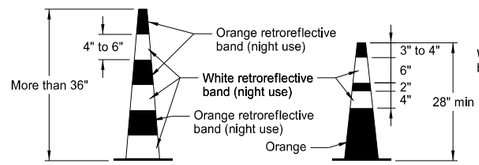

TRAFFIC CONE

Retroreflectorization of cones more than 36" in height shall be provided by alternating orange and white retroreflective stripes. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectorized space between the orange and white stripes shall not exceed 3" wide.



TUBULAR MARKER

Retroreflectorization of tubular markers more than 42" in height shall be provided by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

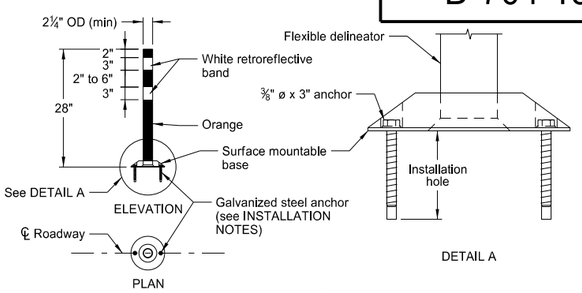

FLEXIBLE DELINEATOR

INSTALLATION NOTES:

1. Drill installation holes to diameter and depth as required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, the contractor may use an 8" x 8" butyl pad or hot melt butyl. Butyl shall be removed as close as possible to pavement surface.

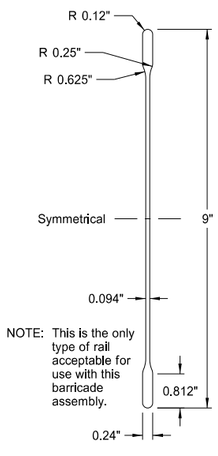

BARRICADE BLADE DETAIL

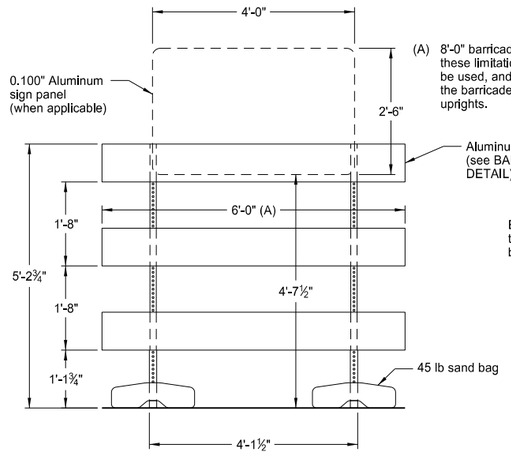

ELEVATION VIEW

(A) 8'-0" barricade rails may be used with these limitations: 1) no sign panel can be used, and 2) no more than 1'-0" of the barricade rail can extend past the uprights.

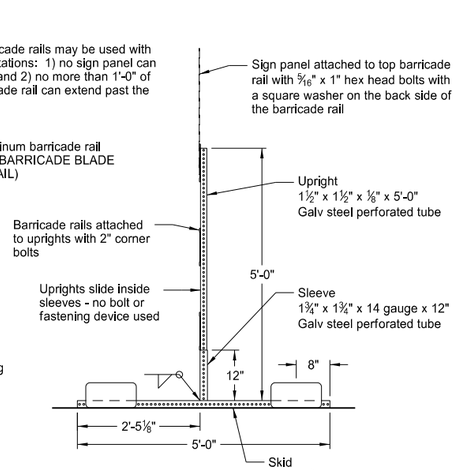

SIDE VIEW

BARRICADE ASSEMBLY DETAIL
(Aluminum Barricade Rails)

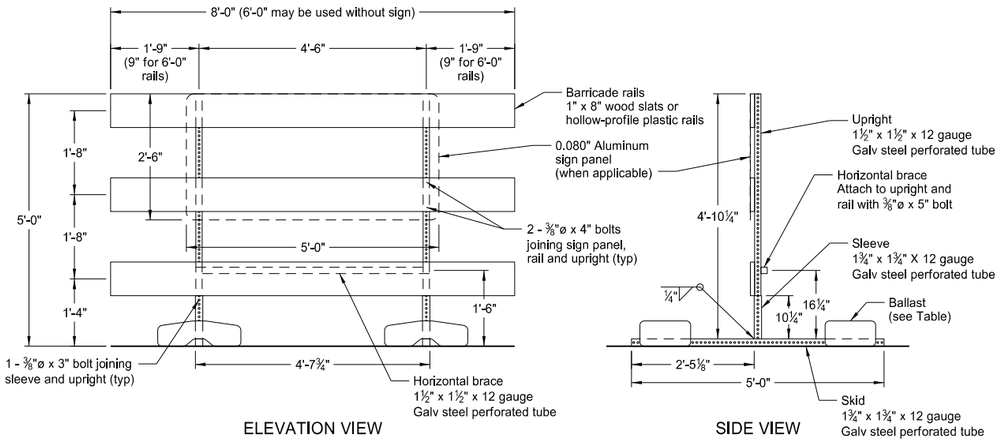

ELEVATION VIEW

SIDE VIEW

BARRICADE ASSEMBLY DETAIL
(Wood or Plastic Rails)

NOTE: Markings for barricades shall be alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Retroreflective sheeting shall be placed on both sides of the rails and shall have a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", the rail stripe width shall be 4".

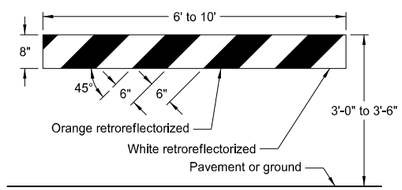

TYPE I BARRICADE



TYPE II BARRICADE

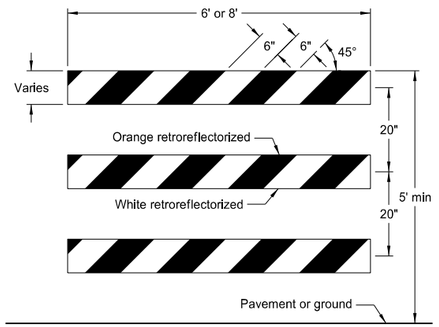

TYPE III BARRICADE

BARRICADE RAIL DETAILS





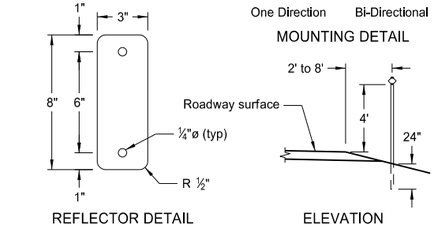

DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags

Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

D-704-14

Note: Signs placed in sections with curb shall have a minimum horizontal clearance of 2' from the face of the curb to the near edge of the sign.

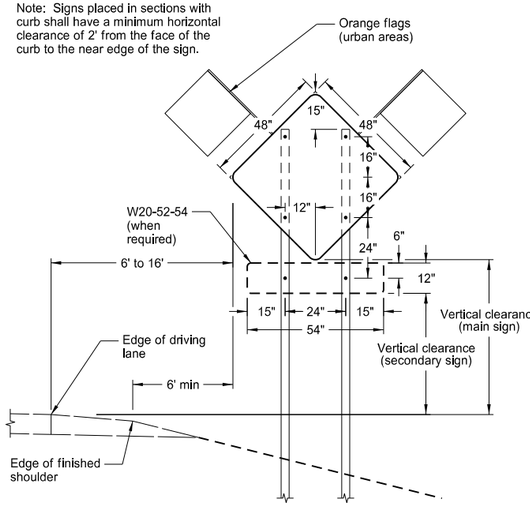

TYPICAL SECTION
(48" x 48" diamond warning sign shown)



48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)



R1-2-60 - YIELD SIGN



R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)



48" x 48" SIGN
(with R6-1-54 sign as required)



24" x 36" SIGN



24" x 24"
ROUTE MARKER
ASSEMBLY



18" x 18"
DIAMOND SIGN



48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)



W14-3-64 - PENNANT SIGN



R1-1-48 - STOP SIGN
(with R1-50-24 sign as required)



48" x 48" SIGN
(with R2-1a-24 sign as required)



30" x 24" SIGN



108" x 48" SIGN



96" x 48" SIGN



72" x 36" SIGN



72" x 24" SIGN



60" x 24" SIGN



48" x 24" SIGN

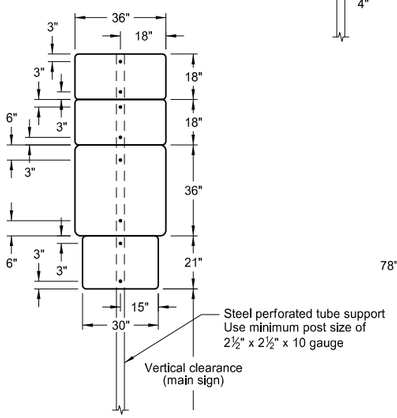

36" x 36"
ROUTE MARKER
ASSEMBLY

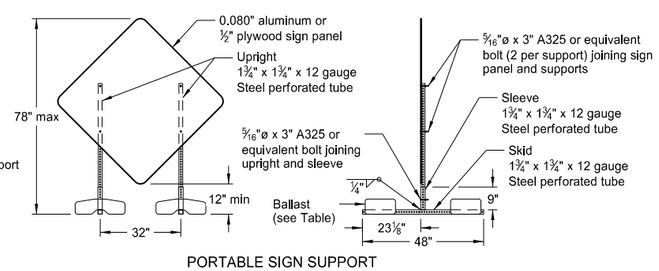

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

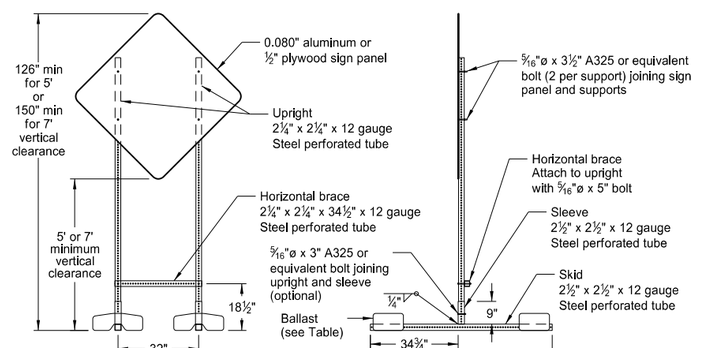

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Supports shall be galvanized or painted. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, the minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes are based on a wind speed of 55 MPH.

   Signs over 50 square feet should be installed on 2½" x 2½" perforated tube supports as a minimum.

   Guy wires shall not be attached to sign supports. Wind beams may be attached to u-posts behind the sign panels.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. All holes to be punched round for ⅜" bolts.

3. Alternate Messages: The signs that have alternate messages may have these alternate messages placed on a reflectorized plate (without a border) and installed and removed as required. (i.e. "Left" and "Right" message on a lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

   Interstate - white legend on blue background
   Interstate Business Loop - white legend on green background
   US and State - black legend on white background
   County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

   The vertical clearance to secondary signs is 1'-0" less than the vertical clearance as stated above.

   Large signs having an area exceeding 50 square feet shall have a minimum clearance of 7'-0" from the ground at the post.

6. Portable Signs: Provide portable signs that meet the vertical clearance as stated above. Use portable signs when it is necessary to place signs within the pavement surface.

   When portable signs are used for 5 days or less, low-mounting height (minimum 12" vertical clearance) sign supports may be used as long as the view of the sign is not obstructed. Time delays caused by unforseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. The R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 may be used for longer than 5 days.

   Signs mounted to the portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT Details shall have a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6.

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/14/13 and the original document is stored at the North Dakota Department of Transportation