

JOB# 45
NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION



STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
ND	H-8-999(029)	20690	1	1

H-8-999(029)
 Cass
 Fargo Slide Areas

Backslope Failure Repair, Reinforced Vegetative System, Guardrail, Seeding

GOVERNING SPECIFICATIONS:
 2014 Standard Specifications adopted by the North Dakota
 Department of Transportation and the Supplemental Specifications
 effective on the date the project is advertised.

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
Fargo Slide Areas	--	--

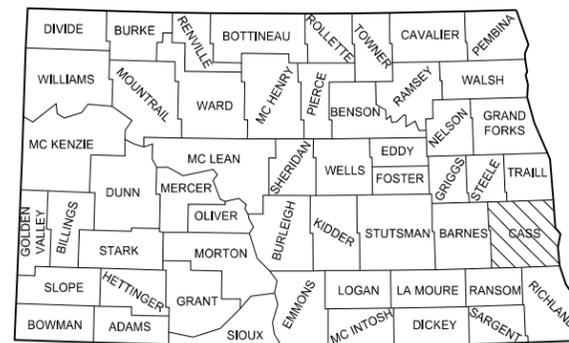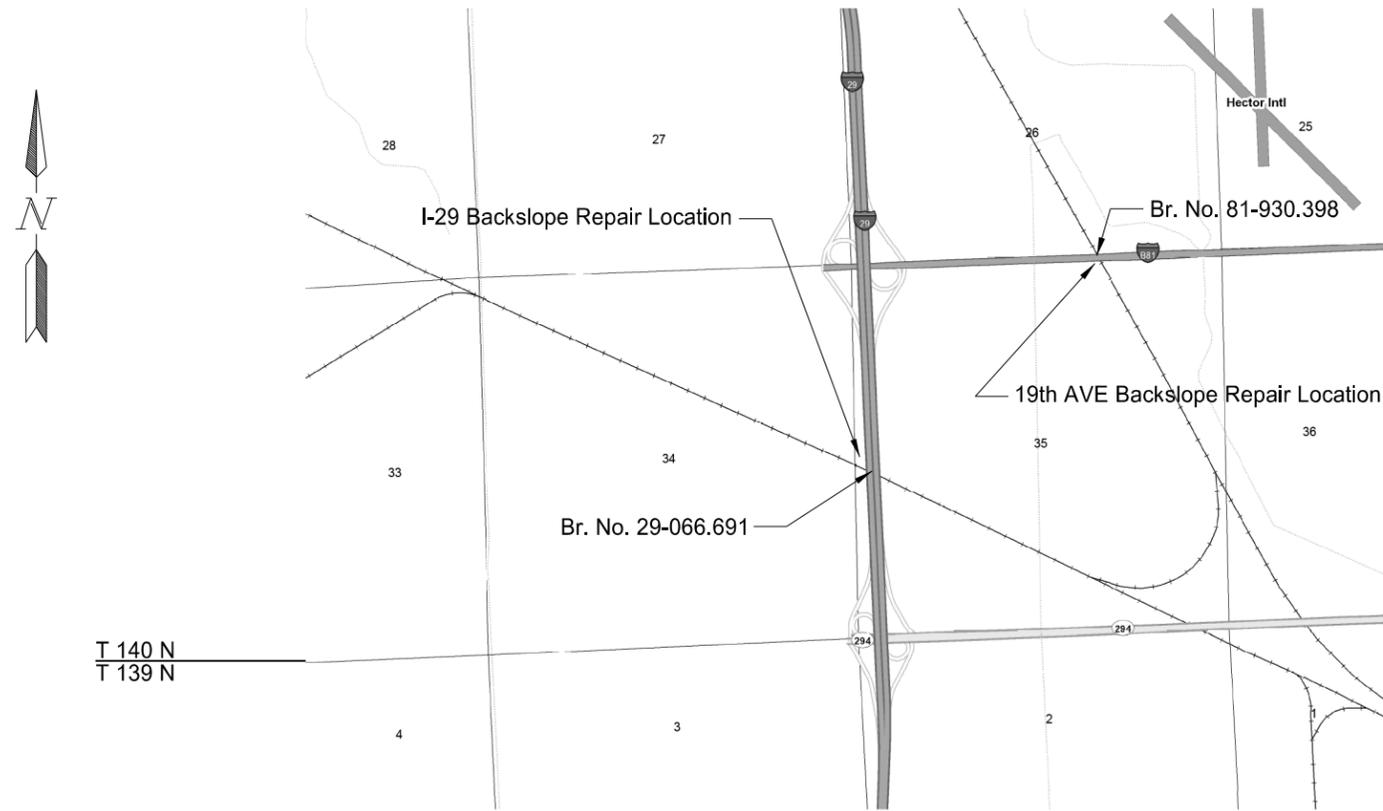

STATE COUNTY MAP

DESIGNERS
Colter Schwagler
Jeff Jirava

APPROVED DATE 9/9/2014

Roger Weigel /s/
 OFFICE OF PROJECT DEVELOPMENT
 ND DEPARTMENT OF TRANSPORTATION

I hereby certify that the attached plans were prepared by me or under my direct supervision and that I am a duly registered professional engineer under the laws of the state of ND.

APPROVED DATE 8-25-2014

Ron Horner
 NDDOT MATERIALS AND RESEARCH DIVISION

This document was originally issued and sealed by
 Ron Horner
 Registration Number
 PE- 2087 ,
 on 8/25/14 and the original document is stored at the
 North Dakota Department
 of Transportation

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	2	1


TABLE OF CONTENTS

<u>Section No.</u>	<u>Sheet No.</u>	<u>Description</u>
1	1	Title Sheet
2	1	Table of Contents
4	1	Scope of Work
6	1-2	Notes
6	3	Environmental Commitments
8	1	Quantities
20	1-2	General Details
75	1-2	Wetlands, Erosion Control and Seeding
100	1	Work Zone Traffic Control
130	1-2	Guardrail

LIST OF STANDARD DRAWINGS

<u>Standard No.</u>	<u>Description</u>
D-101-01, 02, 03	NDDOT Abbreviations
D-101-10	NDDOT Utility Company and Organization Abbreviations
D-101-20, 21	Line Styles
D-101-30, 31, 32	Symbols
D-261-01	Erosion Control – Fiber Roll Placement Details
D-704-07	Breakaway Systems For Construction Zone Signs – Perforated Tube
D-704-08	Breakaway Systems For Construction Zone Signs – U-Channel Post
D-704-09	Construction Sign Details – Terminal and Guide Signs
D-704-10	Construction Sign Details – Regulatory Signs
D-704-11	Construction Sign Details – Warning Signs
D-704-13	Barricade and Channelizing Device Details
D-704-24	Shoulder Closures and Bridge Painting Layouts
D-704-34	Sign Layout for One Lane Closure
D-708-06	Erosion and Siltation Controls – Median or Ditch Inlet Protection
D-764-1	W – Beam Guardrail – General Details
D-764-4	ET - PLUS
D-764-14	Special W – Beam Guardrail Anchor
D-764-21	Short Term End treatment For Bridges (Guardrail Method)
D-764-23	Typical Grading at Obstructions with W – Beam Guardrail

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	4	1

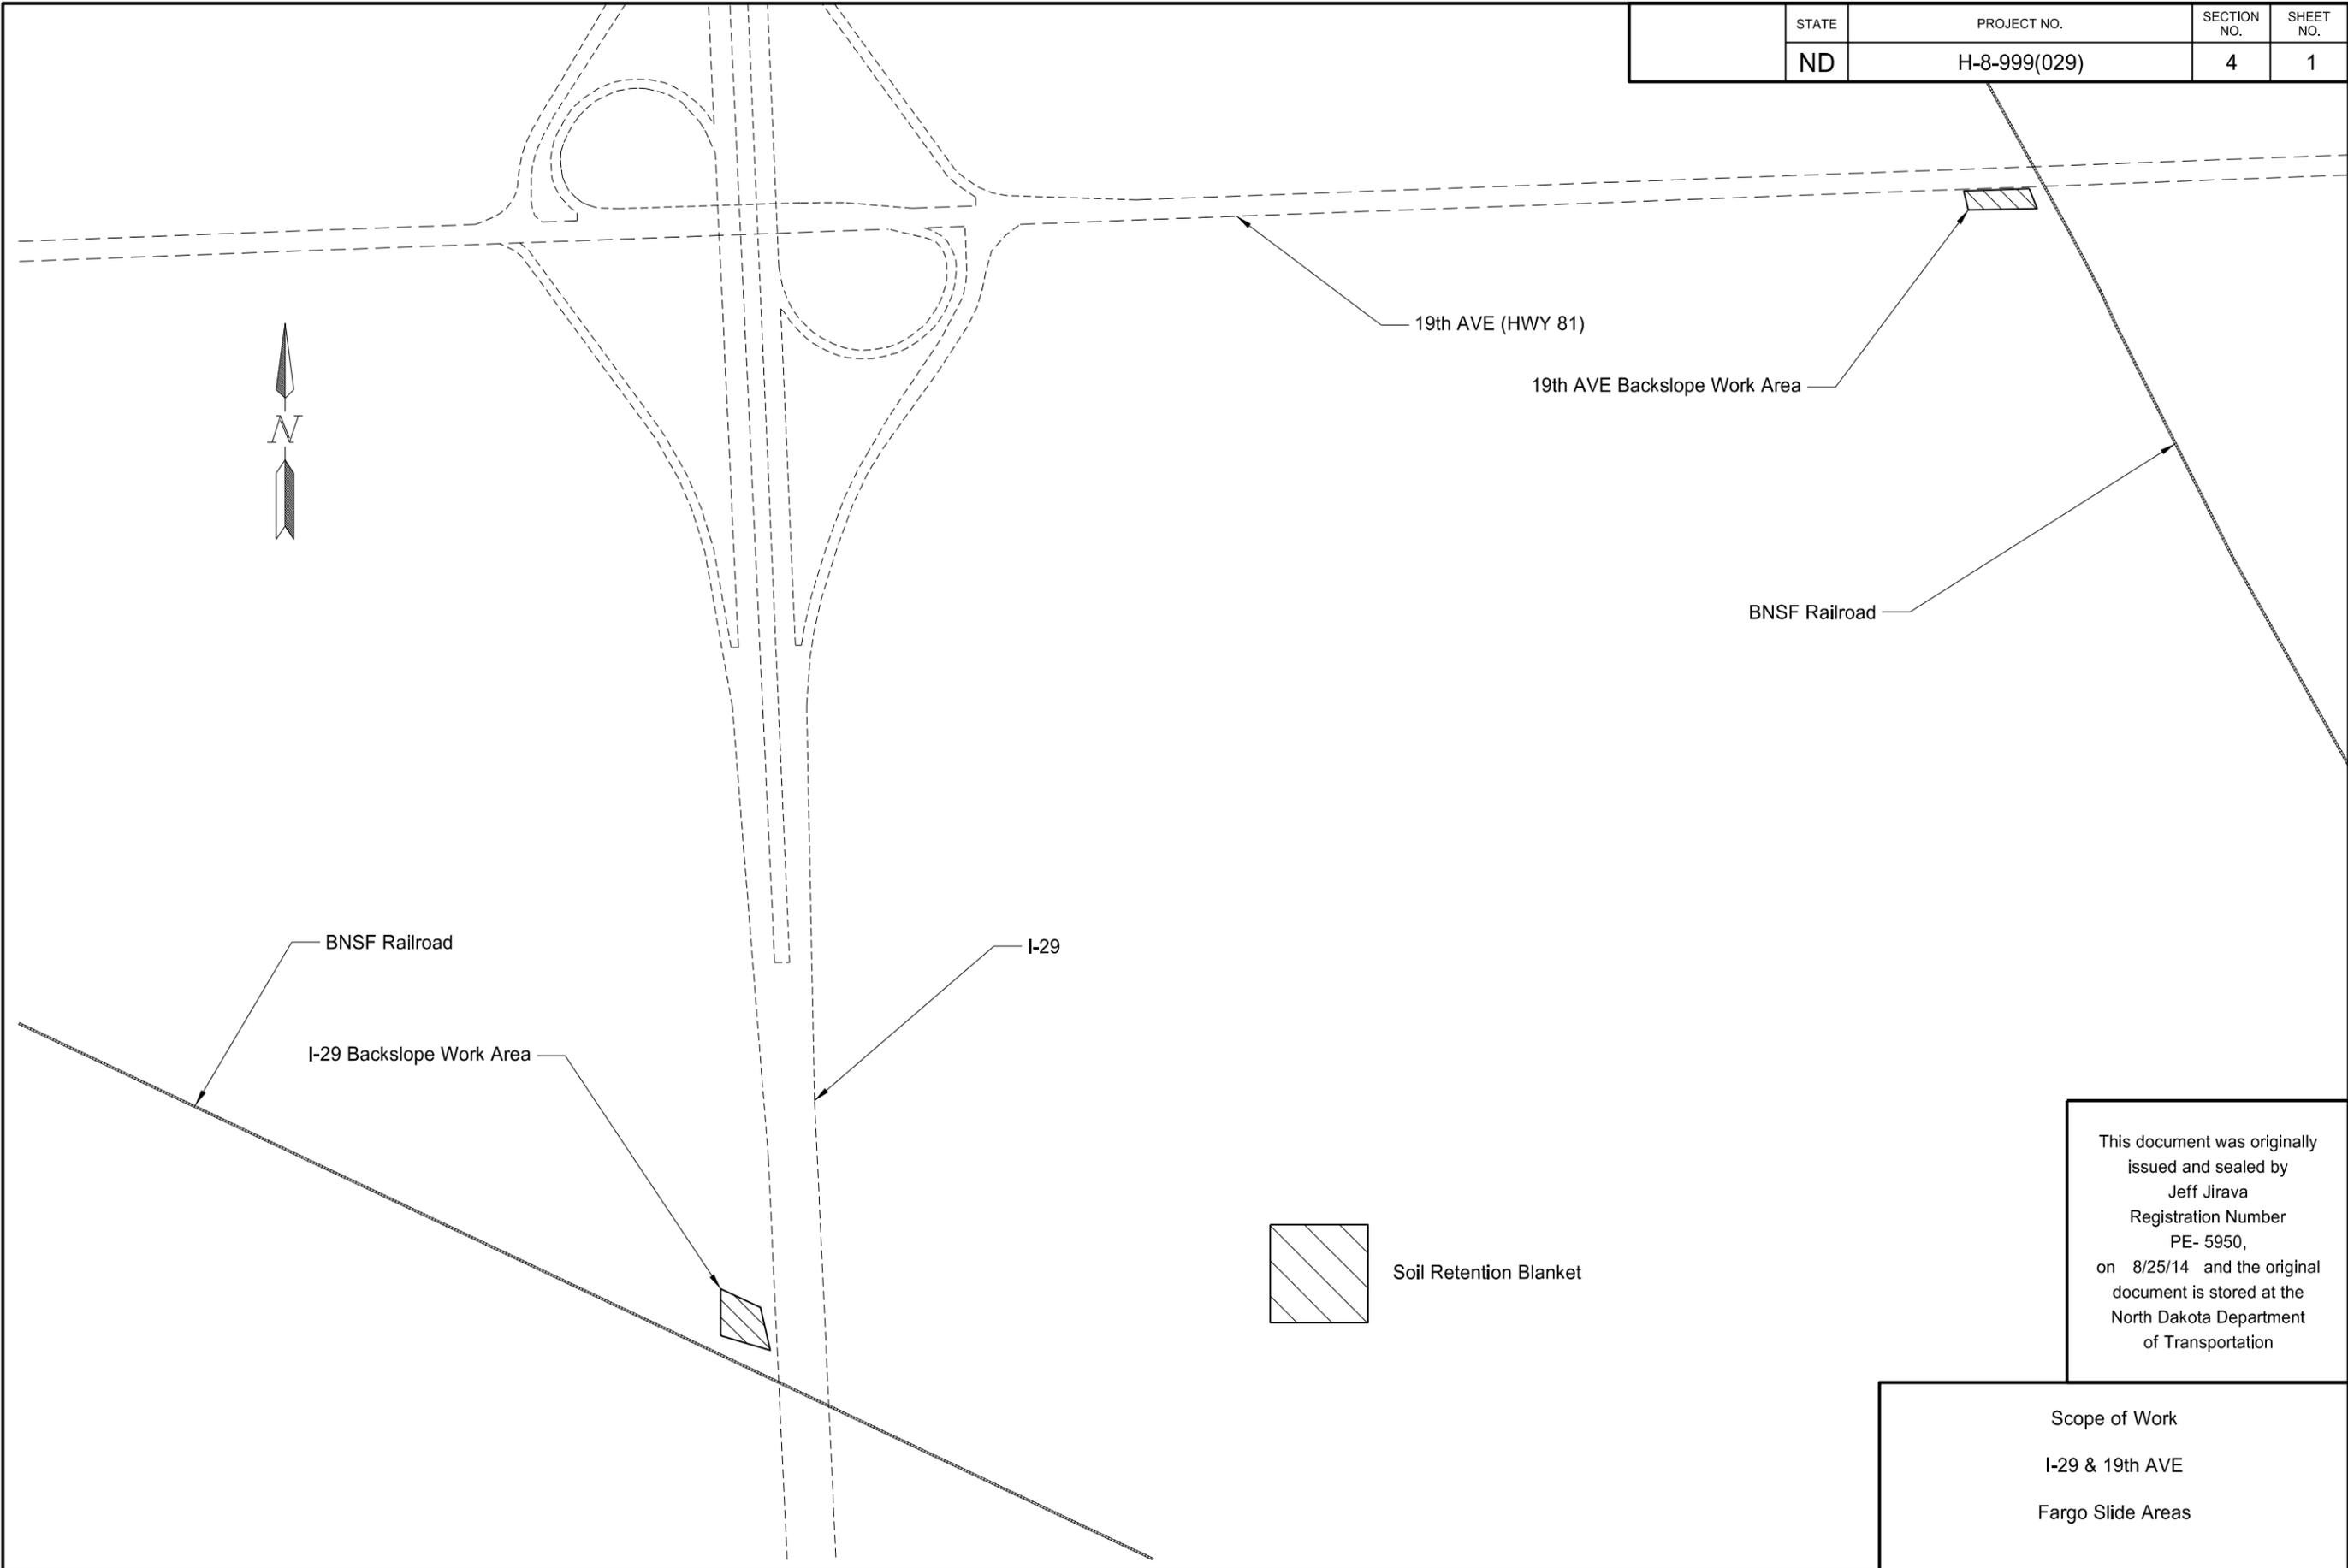

This document was originally issued and sealed by
 Jeff Jirava
 Registration Number
 PE- 5950,
 on 8/25/14 and the original document is stored at the
 North Dakota Department
 of Transportation

Scope of Work
 I-29 & 19th AVE
 Fargo Slide Areas

 Soil Retention Blanket

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	6	1

NOTES

GENERAL NOTES

107-115 RAILROAD PROTECTIVE LIABILITY INSURANCE: This project crosses the BNSF Railway Company at RP 64.70 (I-29) & RP 930.40 (US 81). The type of work that will be performed within the railroad right of way is regrading of the backslope and installation of Soil Retention Blanket. Inquiries for protective liability insurance should be directed to:

Rosa Martinez
Marsh Co.
Texas
214-303-8519

Information on crossing number DOT 070867J & DOT 081377X may be obtained from the Federal Railroad Administration website:

<http://safetydata.fra.dot.gov/Officeofsafety/>

704-P01 TRAFFIC CONTROL DEVICES: The traffic control devices list has been developed using the following Standard Drawings.

D-704-34 Sign Layout for One Lane Closure

D-704-24 SHOULDER CLOSURES AND BRIDGE PAINTING LAYOUTS (TYPE S)

708-P01 SOIL RETENTION BLANKET: Armormax®, an anchored reinforced vegetation system manufactured by Propex, will be used to stabilize the slopes delineated in Section 75 Sheet 1 and 2 of the plans. The contractor must ensure that the manufacturer's representatives are on site during the preparation of the slopes and the installation of the Armormax® system.

The system shall be designed and installed as per the manufacturer's recommendations. The installation of the system consists of stripping and stockpiling of topsoil, regrading of the slope, spreading of the topsoil, high performance turf reinforcement mat (HPTRM) and percussion driven earth anchors (PDEAs), seed, topsoil to fill the voids of the HPTRM, and temporary erosion control. The slopes shall be reshaped to the contours prior to the slide activity prior to the installation of the Armormax® system. The finished grades will be determined by the engineer in the field to ensure positive drainage of the roadway. The HPTRM and PDEAs shall be provided and installed as per the manufacturer's recommendations.

The quality control for the installation of the Armormax® system shall be according to the manufacturer's recommendations.

Materials and Research Geotechnical Division shall be notified by the Field Engineer five working days prior to the installation of the system.

All labor, equipment, and materials to perform the described work shall be included in the unit price bid for "SOIL RETENTION BLANKET" by the square yard. The

reinforcement fabric shall be measured by the actual surface area covered to the nearest square yard. No allowance will be made for overlaps.

708-P02 INLET PROTECTION: Inlet protection shall be placed per the details. The unit price bid for "Inlet Protection-Special" shall be considered full compensation for installing, cleaning, removing sediment, maintaining, replacing damaged devices and removing the devices from the project. All devices that are installed shall remain in place until the turf has been established.

If the turf has not been established by November 1st all devices that are installed in a street section and are determined to have the potential to cause damage to snow removal equipment shall be removed and reinstalled as directed by the Engineer in the spring. This work is considered normal maintenance and the contractor shall not be entitled to additional compensation.

This document was originally issued and sealed by Jeff Jirava, Registration Number PE-5950, on 8/25/14 and the original document is stored at the North Dakota Department of Transportation.

NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	6	2

SECTION 130

764-P01 RESET W-BEAM GUARDRAIL END TERMINAL: At the BNRR Overhead, RP 930.370, the existing W-Beam guardrail end terminal shall be removed and reset, as shown in the plans.

The existing end terminal is a ET-2000 manufactured by Trinity Highway Products of Dallas, Texas. This device was originally installed in the year 2002.

The existing end terminal was installed with timber breakaway posts set in steel foundation tubes at the first two post locations. These timber breakaway posts shall not be reset. The reset end terminal shall be modified to have steel breakaway posts at the first two post locations, in accordance with the manufacturers' recommendations. All costs for the steel breakaway posts, associated steel foundation posts, and any other hardware necessary to modify the end terminal as described above shall be included in the price bid for the item "Reset W-Beam Guardrail End Terminal."

764-P02 REMOVE W-BEAM GUARDRAIL & POSTS: The removed W-beam guardrail materials which are not reset shall be delivered by the contractor to the NDDOT Maintenance Storage Yard in Fargo, and neatly stacked at a location designated by the engineer.

The cost for delivery and stacking of the removed W-beam guardrail materials which are not to be reset shall not be paid for separately, but shall be included in the price bid for the item "Remove W-Beam Guardrail & Posts."

This document was originally issued and sealed by Douglas A Schumaker, Registration Number PE-5047, on 4/14/14 and the original document is stored at the North Dakota Department of Transportation.

ENVIRONMENTAL COMMITMENTS

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	6	3

ENVIRONMENTAL COMMITMENTS (EC): The North Dakota Department of Transportation has made environmental commitments to secure approval of this project. The environmental commitments are as follows:

EC-1:

Based on the NEPA documentation, no additional permits or environmental commitments have been identified beyond what is covered by the NDDOT's Standard Specification of Road and Bridge Construction.

Wetland Number	Cowardin Classification	Wetland Type	Wetland Size (acres)	Wetland Feature	USACE Jurisdictional Wetlands	Impacts to Wetlands	
						Temp.	Perm.
NO WETLANDS PRESENT							
TOTALS:			0.00			0.00	0.00

NOTIFICATIONS TO BE FILED BY CONTRACTOR:


- Federal Aviation Administration Notice of Proposed Construction or Alteration Form 7460-1 (online at <http://oeaaa.faa.gov>)

ESTIMATE OF QUANTITIES


STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	8	1

SPEC CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
-----	-----	-----	-----	-----
103	0100 CONTRACT BOND	L SUM	1	1
107	0101 RAILWAY PROTECTION INSURANCE-2 LOCATIONS	L SUM	1	1
251	0200 SEEDING CLASS II	ACRE	0.6	0.6
251	2000 TEMPORARY COVER CROP	ACRE	0.6	0.6
261	0112 FIBER ROLLS 12IN	LF	30	30
261	0113 REMOVE FIBER ROLLS 12IN	LF	30	30
702	0100 MOBILIZATION	L SUM	1	1
704	0100 FLAGGING	MHR	84	84
704	1000 TRAFFIC CONTROL SIGNS	UNIT	764	764
704	1052 TYPE III BARRICADE	EA	1	1
704	1060 DELINEATOR DRUMS	EA	25	25
704	1067 TUBULAR MARKERS	EA	12	12
704	1087 SEQUENCING ARROW PANEL-TYPE C	EA	1	1
708	1540 INLET PROTECTION-SPECIAL	EA	3	3
708	5600 SOIL RETENTION BLANKET	SY	2,800	2,800
764	0131 W-BEAM GUARDRAIL	LF	50	50
764	0151 REMOVE W-BEAM GUARDRAIL & POSTS	LF	252	252
764	1050 RESET W-BEAM GUARDRAIL	LF	202	202
764	1059 RESET W-BEAM GUARDRAIL END TERMINAL	EA	1	1
764	2081 REMOVE END TREATMENT & TRANSITION	EA	1	1


STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	20	1

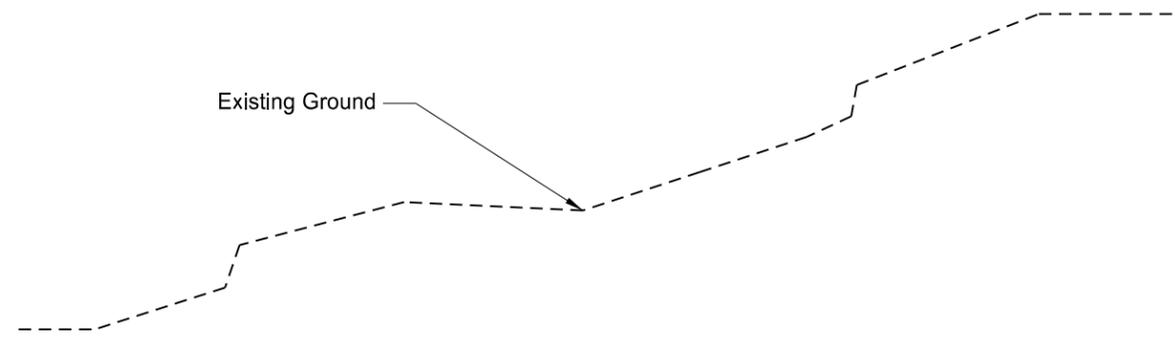

Stage 1 (Backslope Failure)

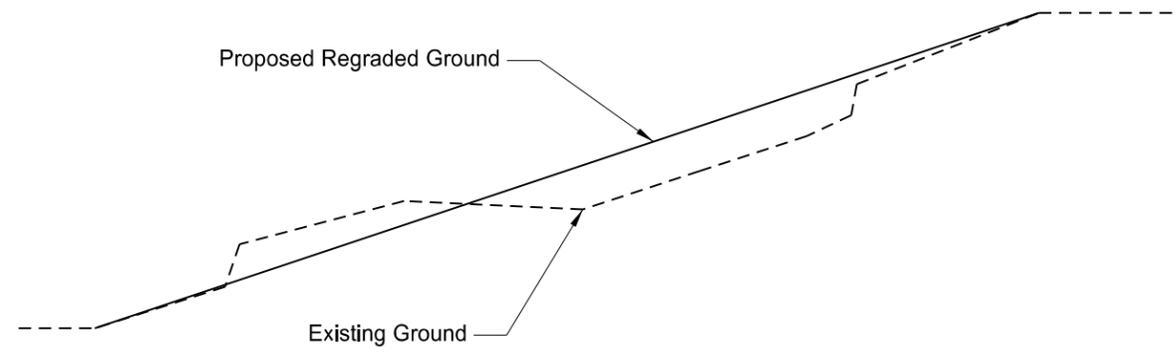

Stage 2 (Regraded Backslope)

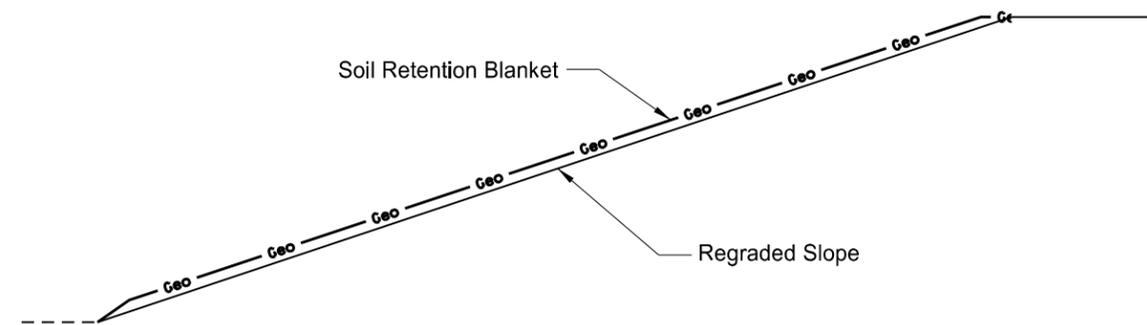



Stage 3 (Regraded Backslope with Soil Retention Blanket)

*Soil Retention Blanket will be Installed as to Manufacturer's Specifications
Slope will be free of vegetation before installation of Soil Retention Blanket

This document was originally issued and sealed by
Jeff Jirava
Registration Number
PE- 5950,
on 8/25/14 and the original document is stored at the
North Dakota Department
of Transportation

Soil Retention Blanket Installation Staging

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	H-8-999(029)	20	2

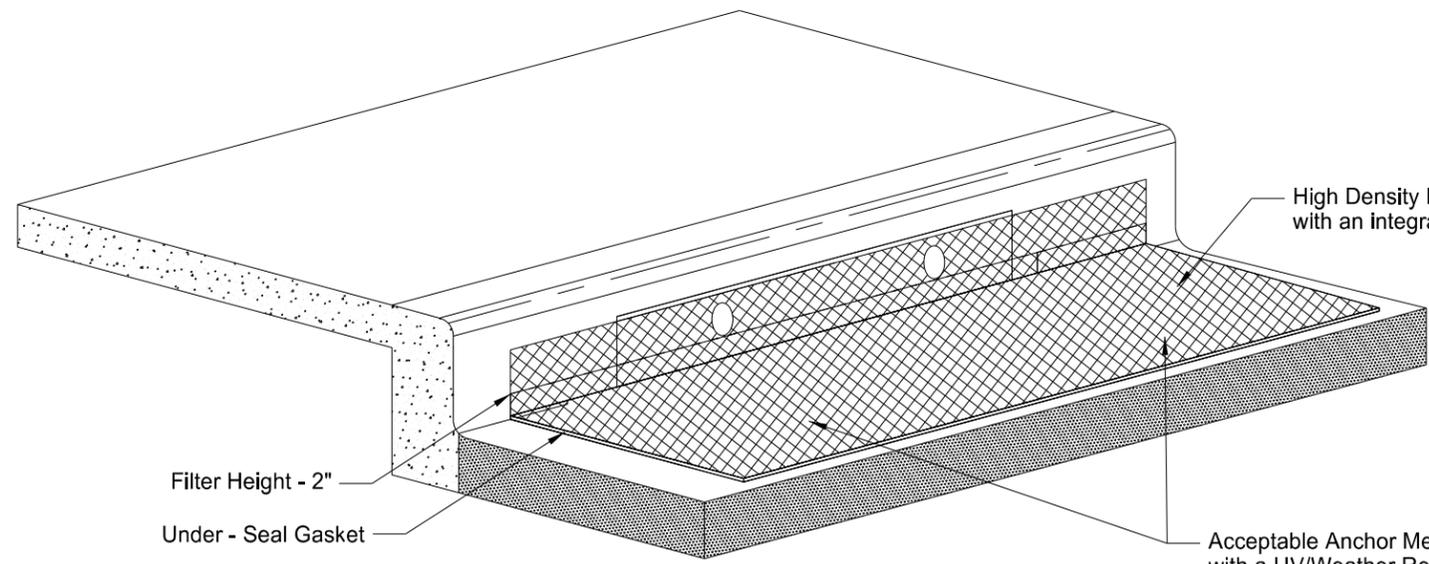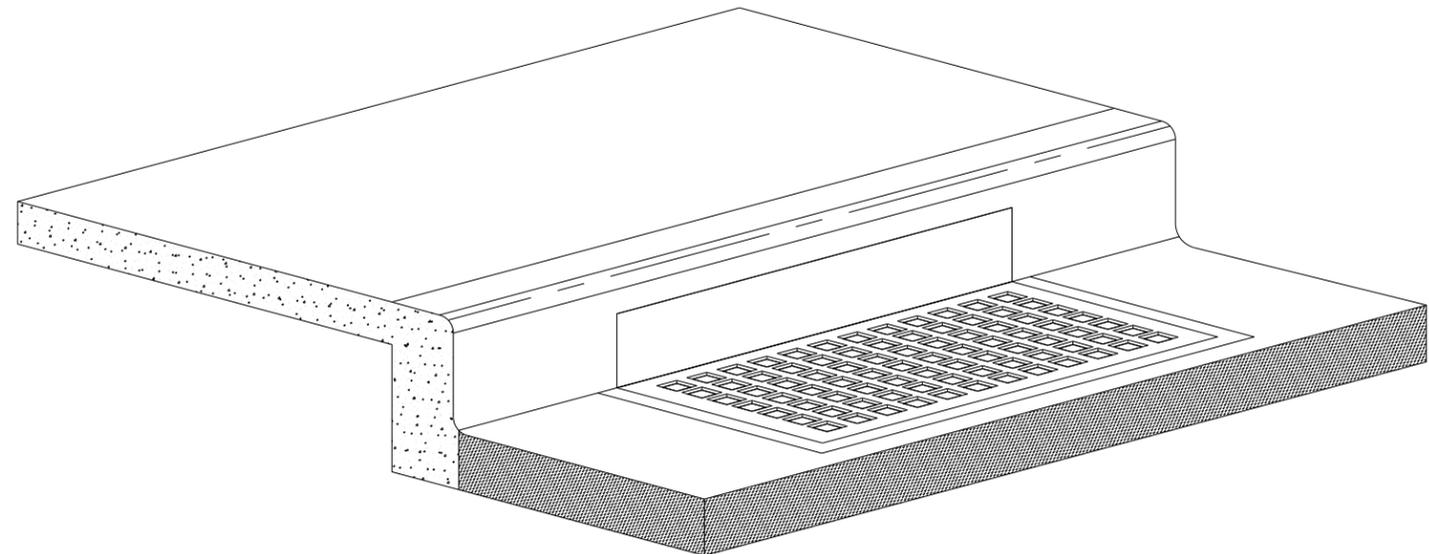

High Density Polyethylene (HDPE) high flow jacket filter (8,000 opening per SY) with an integrated 425 um (micron meter) fine filter particle mesh

Filter Height - 2"
Under - Seal Gasket

Acceptable Anchor Method: Fasten to inlet casting grate with a UV/Weather Resistant Plastic Cable Zip Ties - 16 to 24 in. Install zip ties at each corner of the inlet near the perimeter and two additional zip ties near the middle of the casting. Punch hole through filter and run cable tie downward around grate and back up to fasten.

Inlet Protection Device

Installation Notes:

1. Place device tightly against drain opening and cover entire grate. The device should extend at least 2 inches past grate toward street.
2. Overlap the segments at longer openings.
3. Anchor the device so that water cannot flow behind it.

General Notes:


1. Inlet Protection shall be maintained or replaced at the direction of the engineer.
2. Manufactured alternatives may be substituted at the direction of the engineer.
3. When removing or maintaining inlet protection, care shall be taken so that fabric does not fall into the inlet. Any material falling into the inlet shall be removed immediately.
4. Inlet protection is to be used (and reused) as needed to prevent material from entering inlets as the work progresses through the project.

This document was originally issued and sealed by
Jeff Jirava
Registration Number
PE- 5950,
on 8/25/14 and the original document is stored at the
North Dakota Department
of Transportation

Inlet Protection Device

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	75	1

* The exact limits of the installation will be determined in the field

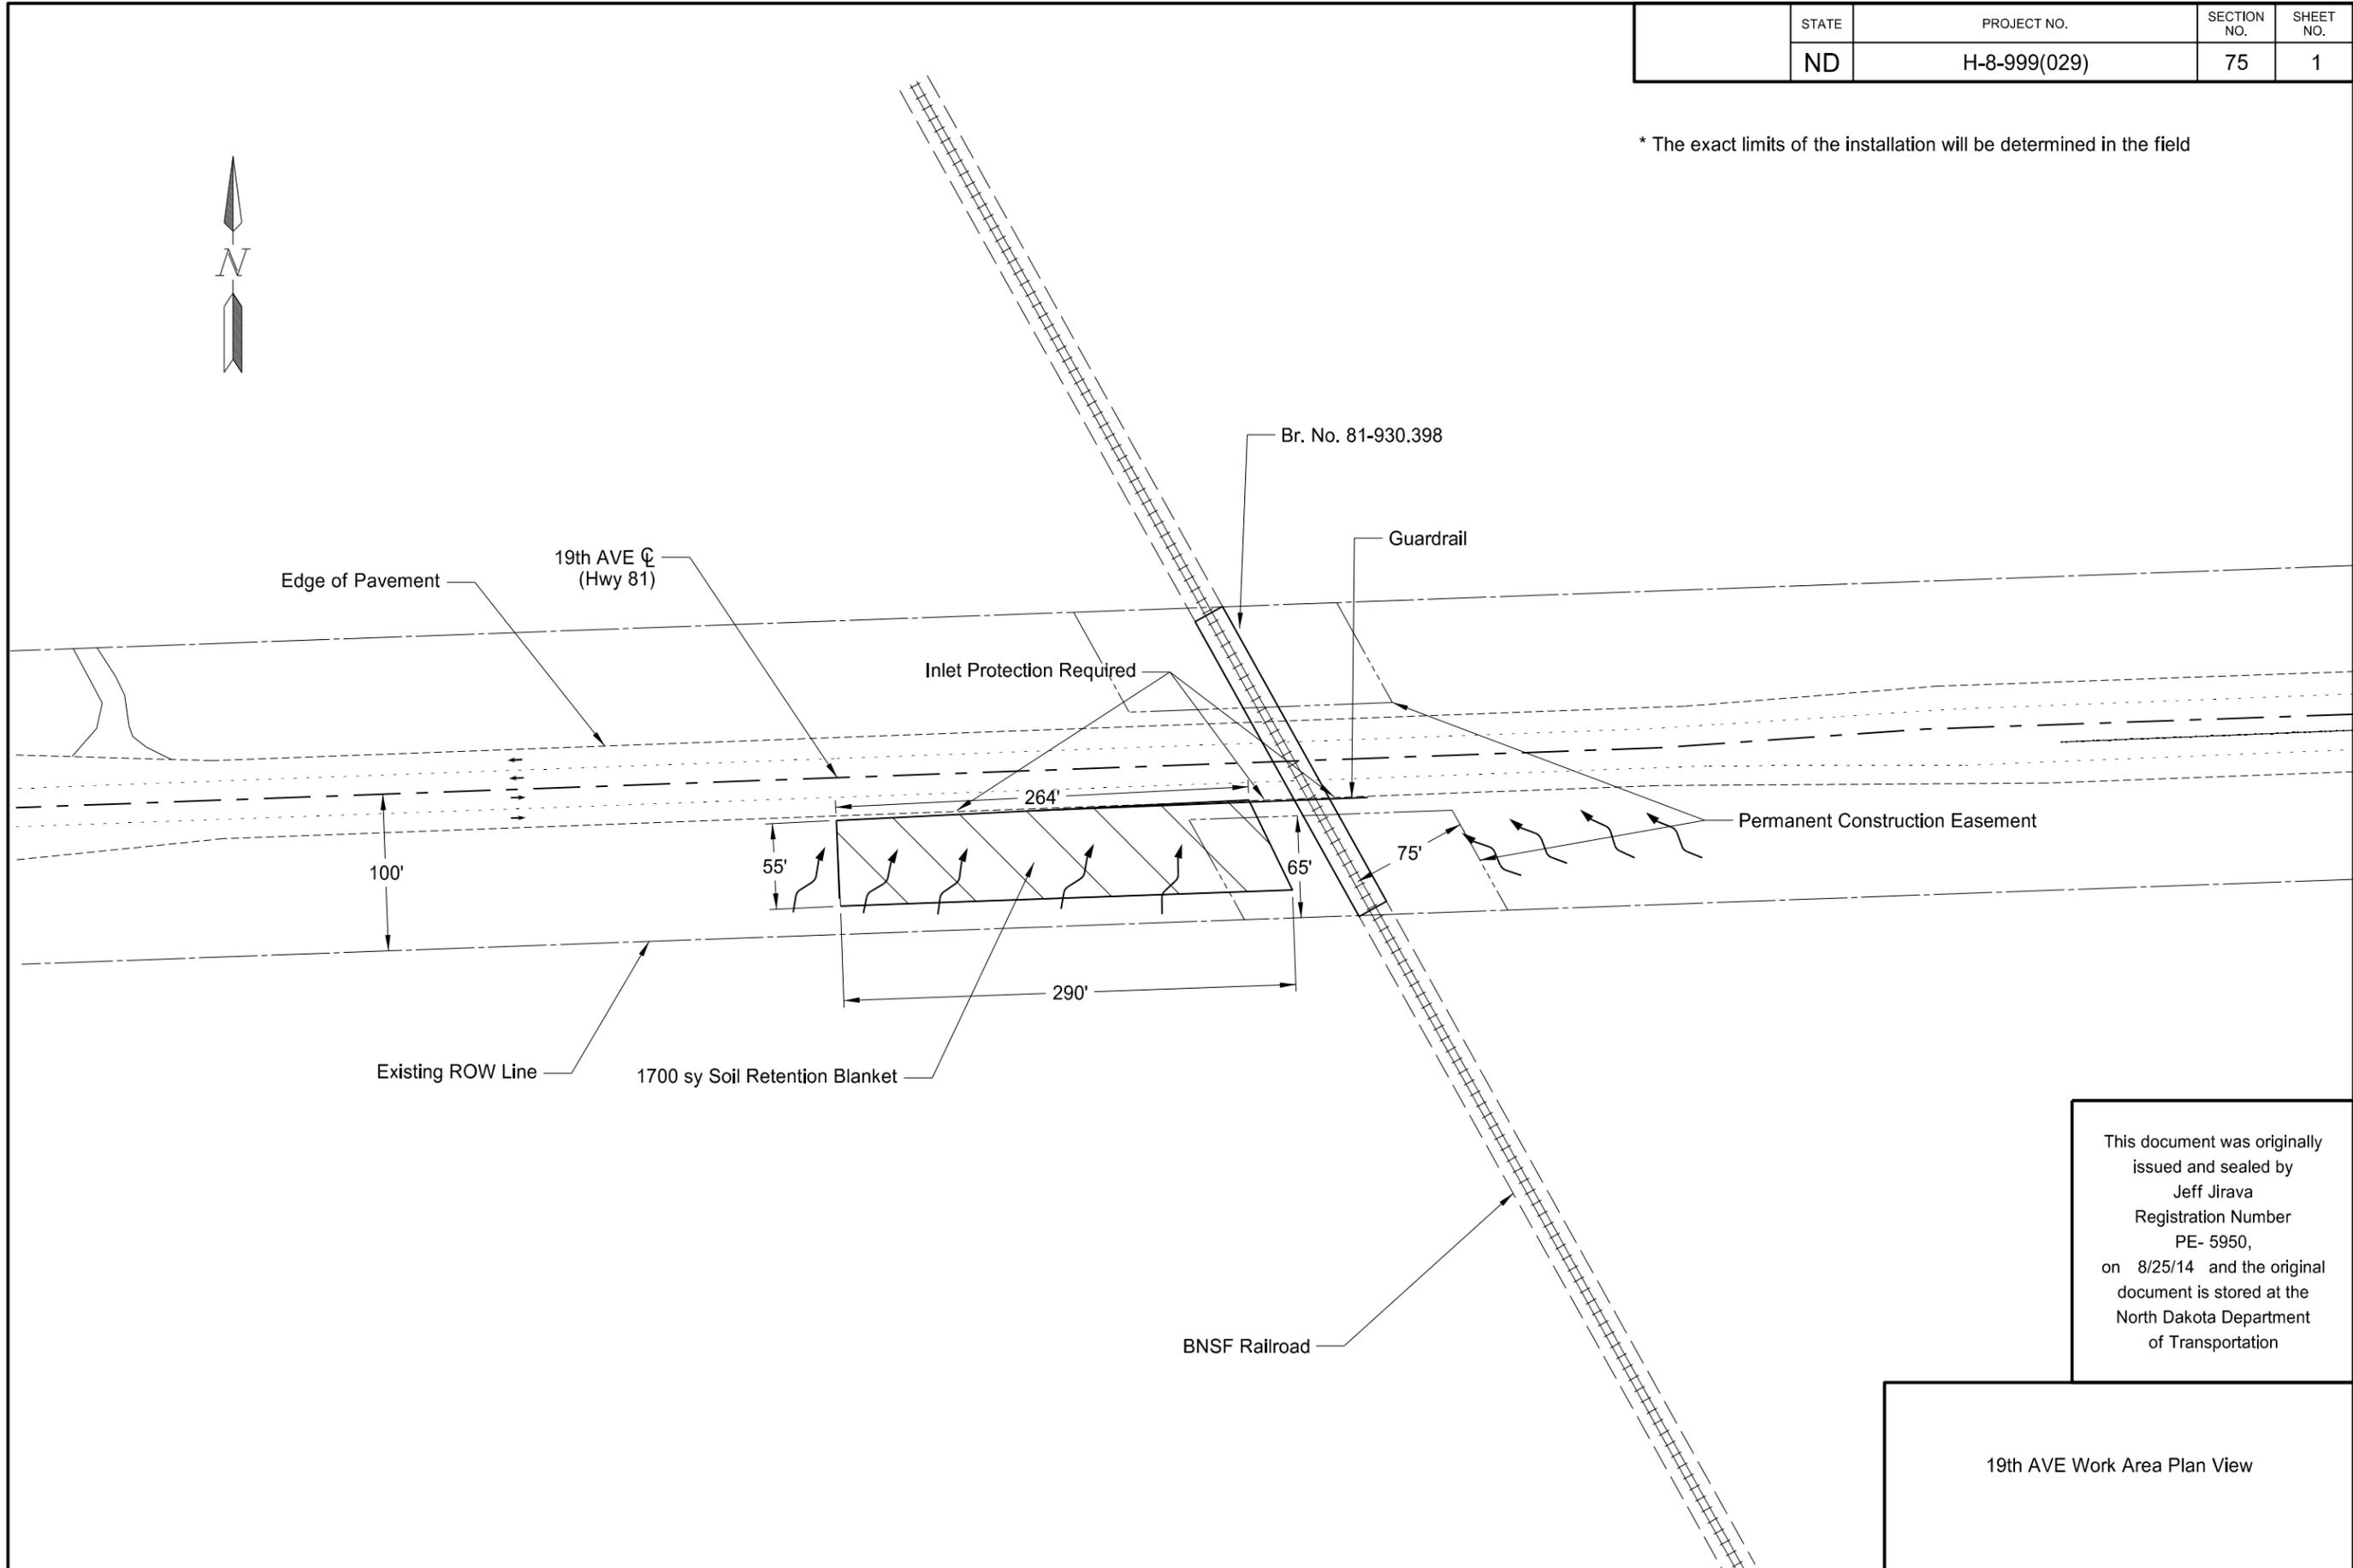


This document was originally issued and sealed by
 Jeff Jirava
 Registration Number
 PE- 5950,
 on 8/25/14 and the original document is stored at the
 North Dakota Department
 of Transportation

19th AVE Work Area Plan View

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	75	2

* The exact limits of the installation will be determined in the field

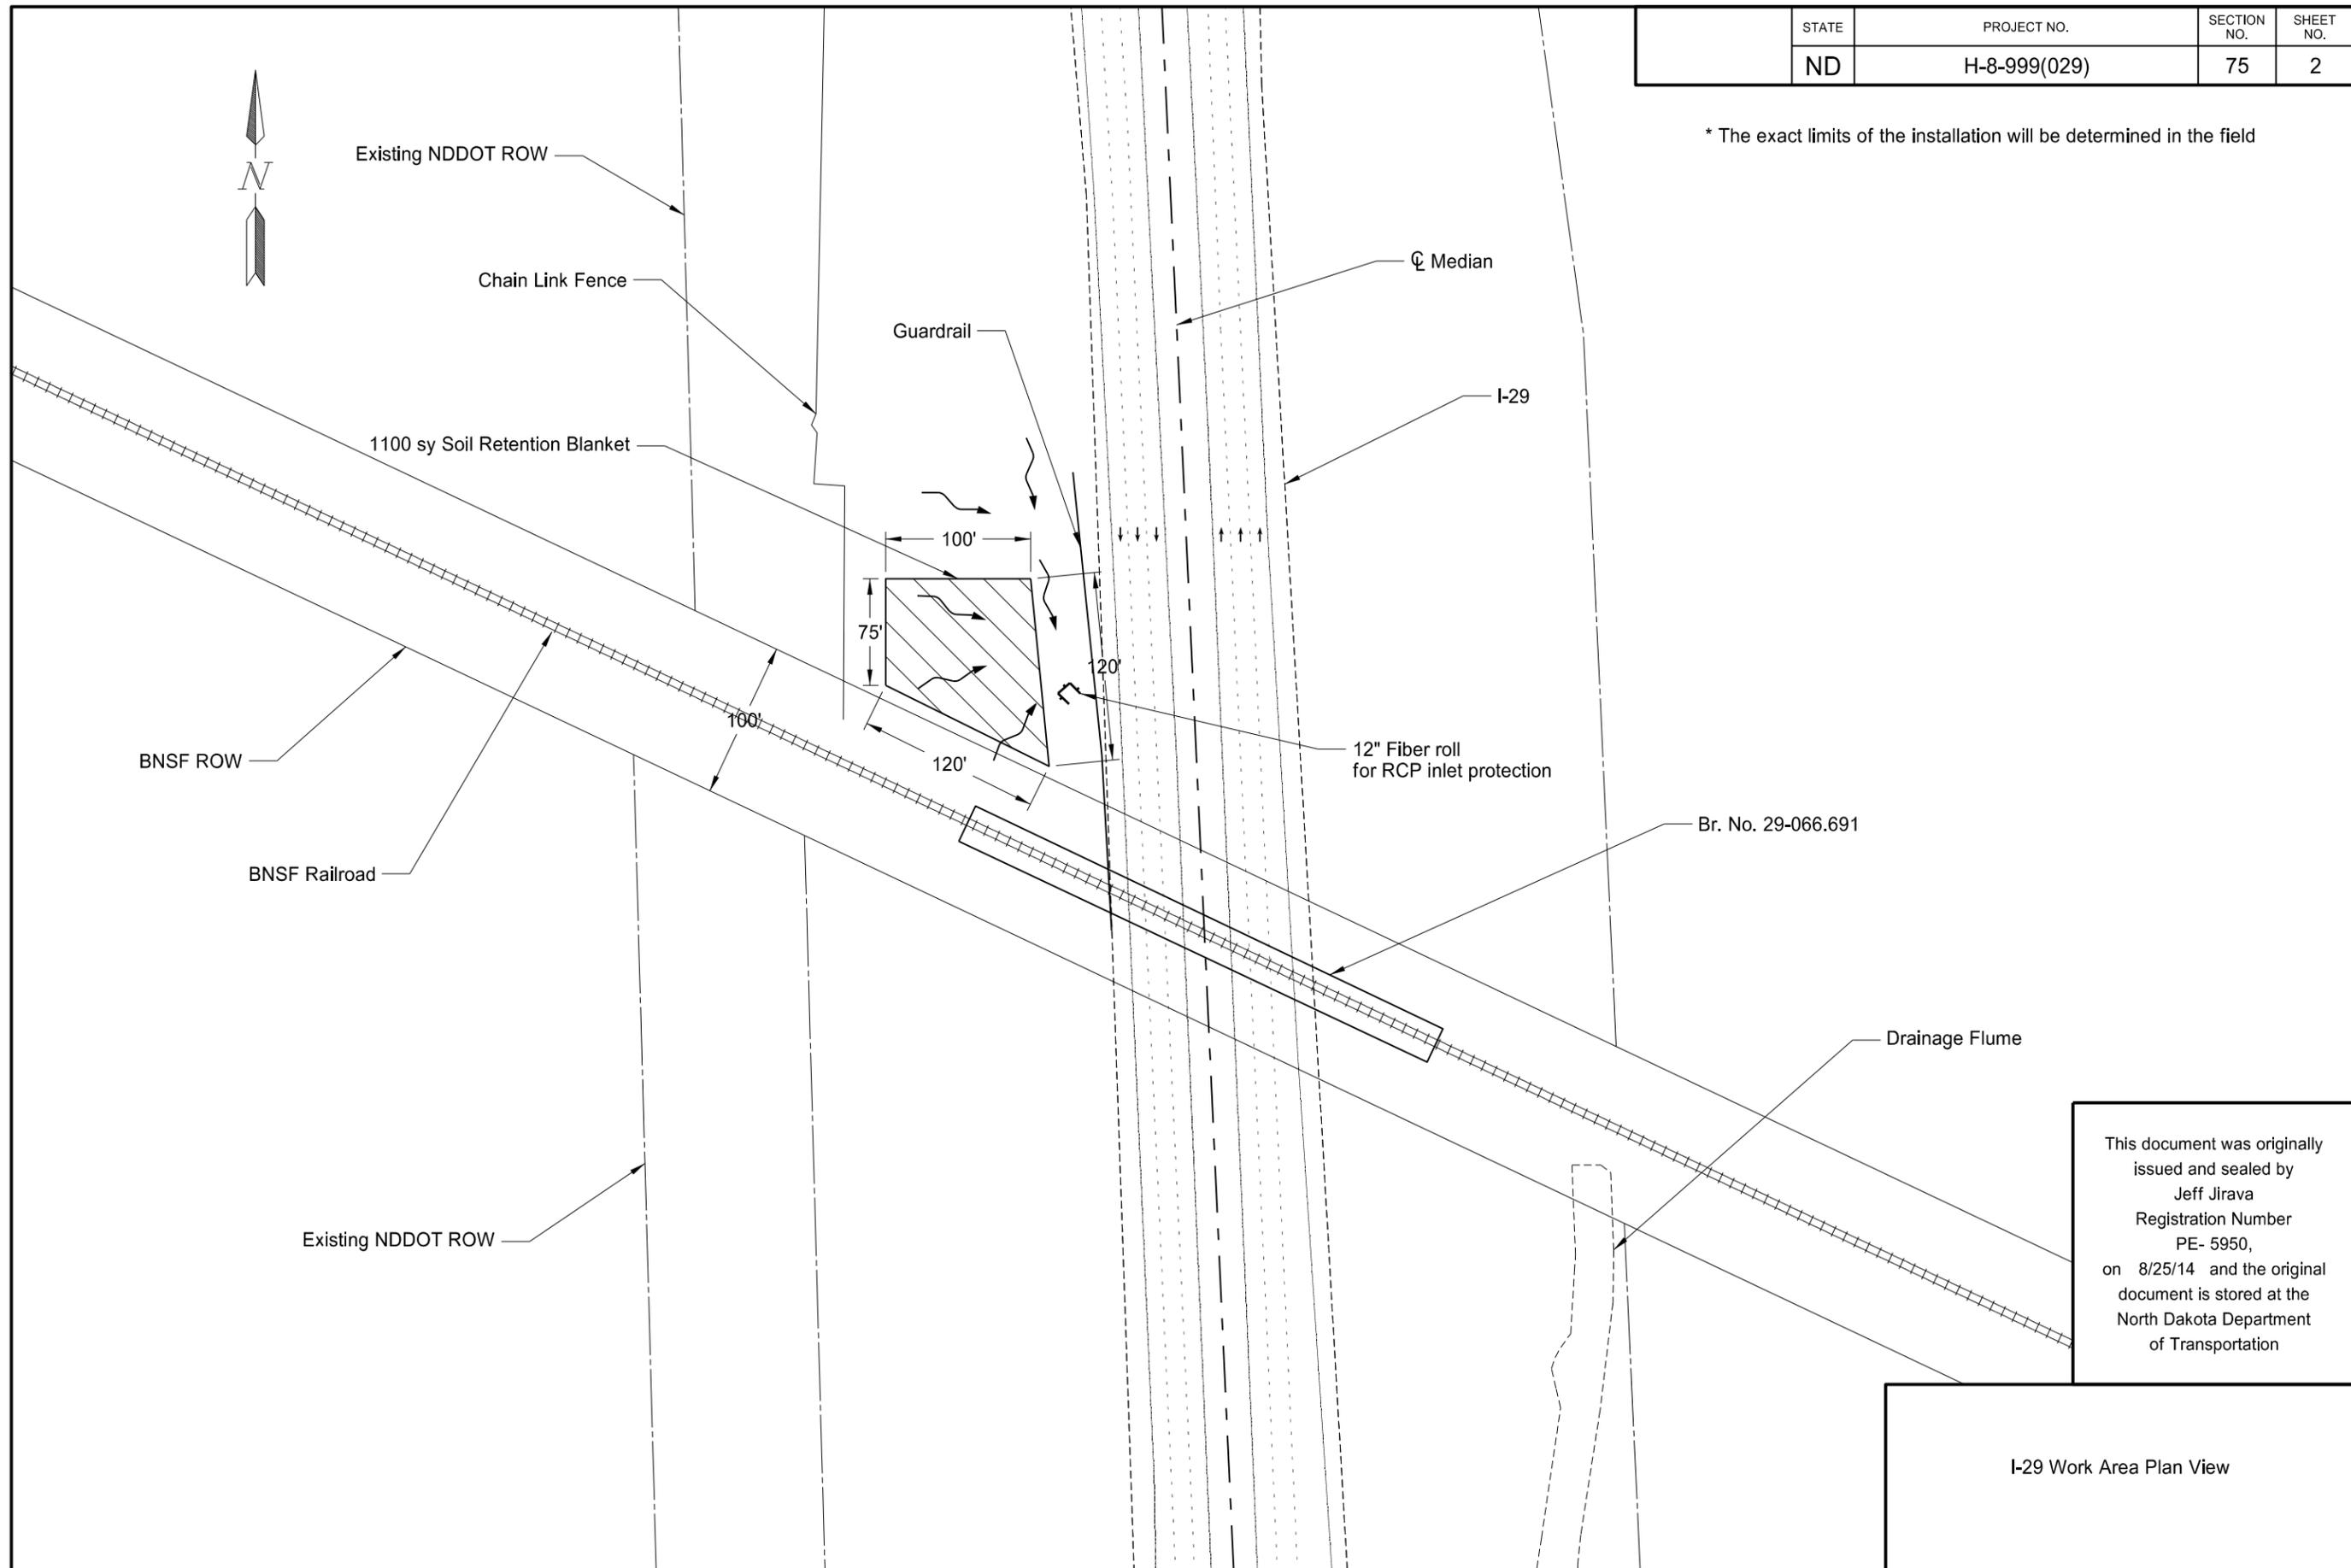


This document was originally issued and sealed by
 Jeff Jirava
 Registration Number
 PE- 5950,
 on 8/25/14 and the original document is stored at the
 North Dakota Department
 of Transportation

I-29 Work Area Plan View

23 USC § 409 Documents
 NDDOT Reserves All Objections

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	130	1

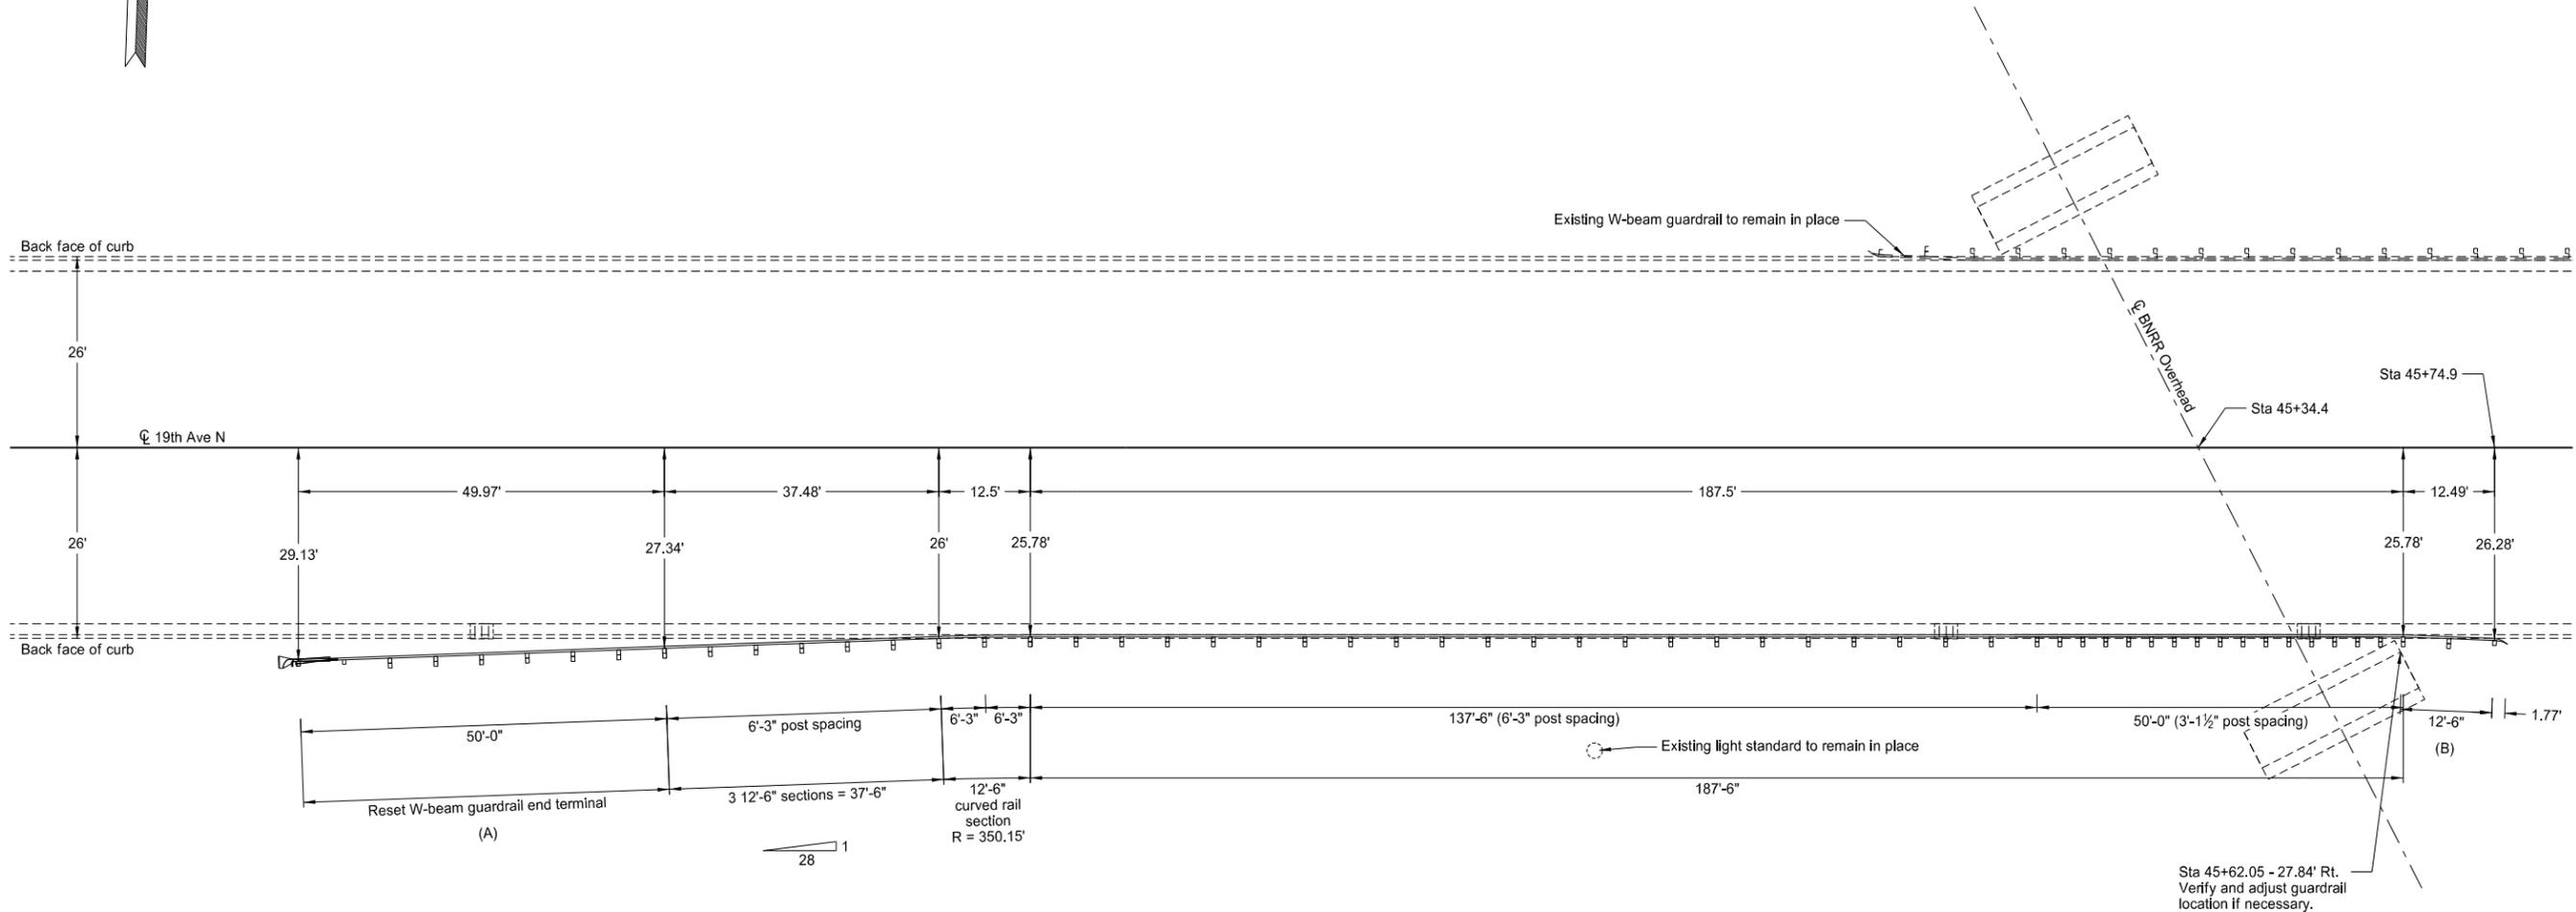

This document was originally issued and sealed by Douglas A. Schumaker, Registration Number PE- 5047, on 04/14/14 and the original document is stored at the North Dakota Department of Transportation

- (A) An ET-2000 end terminal shall be reset at this location.
 The first two posts of the end terminals shall be replaced with steel breakaway posts.
- (B) Special anchor to be reset. See Standard Drawing D-764-14.
 All costs to reset the Special anchor shall be included in the price bid for the item "Reset W-beam guardrail."

W-Beam Guardrail Layout
 Outside Pier Protection
 BNRR Overhead
 RP 930.370
 19th Ave N
 Fargo, ND

23 USC § 409 Documents
 NDDOT Reserves All Objections

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-8-999(029)	130	2

W-BEAM GUARDRAIL SUMMARY OF QUANTITIES													
W-BEAM GUARDRAIL AT OBSTRUCTIONS													
LOCATION	(A) 5/8" Ø x 18" LONG BUTTON HEAD BOLT	(A) 5/8" Ø x 1 1/4" LONG BUTTON HEAD BOLT	(A) 5/8" Ø x 10" LONG GUARD- RAIL BOLT	(A) 6" x 8" x 14" TIMBER BLOCK	(A) 6" x 8" x 6'-0" TIMBER POST	(A) 12'-6" STRAIGHT RAIL SECTION	(A) 12'-6" CURVED RAIL SECTION	(A) REFLECTOR- IZED PLATES	(A) W-BEAM END SECTION (FLARED)	(A) BCT CABLE ASSEM- BLY AND BEARING PLATE	(A) BCT ANCHOR PLATE	(A) BCT TERMINAL POST	(A) 5/8" Ø x 1 1/2" LONG HEX HEAD BOLT
	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH	EACH
Sta 43+24.93 to 43+74.91 Rt	9	40		9	9	3	1	8					
TOTAL	9	40		9	9	3	1	8	1	1	1	1	8

W-beam guardrail
 Sta 43+24.93 to 43+74.91 Rt 50 LF

Reset W-beam guardrail end terminal
 Sta 42+74.96 to 43+24.93 Rt 1 ea

Remove W-beam guardrail & posts
 Sta 43+24.63 to 45+76.39 Rt 251.8 LF

Reset W-beam guardrail
 Sta 43+74.91 to 45+76.67 Rt 201.8 LF

Remove end treatment & transition
 Sta 42+74.67 to 43+24.63 Rt 1 ea

(A) These items are not to be bid separately, but shall be included in the price bid for the item "W-Beam Guardrail."

This document was originally issued and sealed by Douglas A. Schumaker, Registration Number PE-5047, on 4/14/14 and the original document is stored at the North Dakota Department of Transportation

W-Beam Guardrail Quantities
 Outside Pier Protection

BNRR Overhead
 RP 930.370

19th Ave N
 Fargo, ND

NDDOT ABBREVIATIONS

? This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.

Abn abandoned
 Abut abutment
 Ac acres
 Adj adjusted
 Aggr aggregate
 Ahd ahead
 ARV air release valve
 Align alignment
 Al alley
 Alt alternate
 Alum aluminum
 ADA Americans with Disabilities Act
 A ampere
 & and
 Appr approach
 Approx approximate
 ACP asbestos cement pipe
 Asph asphalt
 AC asphalt cement
 Assmd assumed
 @ at
 Atten attenuation
 ATR automatic traffic recorder
 Ave Avenue
 Avg average
 ADT average daily traffic
 Az azimuth
 Bk back
 BF back face
 Bs backsight
 Balc balcony
 B Wire barbed wire
 Barr barricade
 Btry battery
 Brg bearing
 BI beehive inlet
 Beg begin
 BM bench mark
 Bkwy bikeway
 Bit bituminous
 Blk block
 Bd Ft board feet
 BH bore hole
 BS both sides
 Bot bottom
 Blvd Boulevard
 Bndry boundary
 BC brass cap
 Brkwy breakaway
 Br bridge
 Bldg building

BV butterfly valve
 Byp bypass
 C Gdrl cable guardrail
 Calc calculate
 Cd candela
 CIP cast iron pipe
 CB catch basin
 CRS cationic rapid setting
 C Gd cattle guard
 C To C center to center
 Cl or C centerline
 Cm centimeter
 Ch chain
 Chnlk chain-link
 Ch Blk channel block
 Ch Ch channel change
 Chk check
 Chsld chiseled
 Cir circle
 Cl class
 Cl clay
 Cl F clay fill
 Cl Hvy clay heavy
 Cl Lm clay loam
 Clnt clean-out
 Clr clear
 Cl&gr clearing & grubbing
 Co S coal slack
 Comb. combination
 Coml commercial
 Compr compression
 CADD computer aided drafting & design
 Conc concrete
 Cond conductor
 Const construction
 Cont continuous
 CSB continuous split barrel sample
 Contr contraction
 Contr contractor
 CP control point
 Coord coordinate
 Cor corner
 Corr corrected
 CAES corrugated aluminum end section
 CAP corrugated aluminum pipe
 CMES corrugated metal end section
 CMP corrugated metal pipe
 CPVCP corrugated poly-vinyl chloride pipe
 CSES corrugated steel end section
 CSP corrugated steel pipe
 C coulomb
 Co County
 Crse course
 C Gr course gravel
 CS course sand

Ct Court
 Xarm cross arm
 Xbuck cross buck
 Xsec cross sections
 Xing crossing
 Xrd Crossroad
 Crn crown
 CF cubic feet
 M3 cubic meter
 M3/s cubic meters per second
 CY cubic yard
 Cy/mi cubic yards per mile
 Culv culvert
 C&G curb & gutter
 CI curb inlet
 CR curb ramp
 CS curve to spiral
 C cut
 Dd Ld dead load
 Defl deflection
 Defm deformed
 Deg or D degree
 DInt delineate
 DIntr delineator
 Depr depression
 Desc description
 Det detail
 DWP detectable warning panel
 Dtr detour
 Dia diameter
 Dir direction
 Dist distance
 DM disturbed material
 DB ditch block
 DG ditch grade
 Dbl double
 Dn down
 Dwg drawing
 Dr drive
 Drwy driveway
 DI drop inlet
 D dry density
 Ea each
 Esmt easement
 E East
 EB Eastbound
 Elast elastomeric
 EL electric locker
 E Mtr electric meter
 Elec electric/al
 EDM electronic distance meter
 Elev or El elevation
 Ellipt elliptical
 Emb embankment
 Emuls emulsion/emulsified

ES end section
 Engr engineer
 ESS environmental sensor station
 Eq equal
 Eq equation
 Evgr evergreen
 Exc excavation
 Exst existing
 Exp expansion
 Expy Expressway
 E external of curve
 Extru extruded
 FOS factor of safety
 F Fahrenheit
 FS far side
 F farad
 Fed Federal
 FP feed point
 Ft feet/foot
 Fn fence
 Fn P fence post
 FO fiber optic
 FB field book
 FD field drive
 F fill
 FAA fine aggregate angularity
 FS fine sand
 FH fire hydrant
 Fl flange
 Flrd flared
 FES flared end section
 F Bcn flashing beacon
 FA flight auger sample
 FL flow line
 Ftg footing
 FM force main
 Fs foresight
 Fnd found
 Fdn foundation
 Frac fractional
 Frwy freeway
 Frt front
 FF front face
 F Disp fuel dispenser

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-2

FFP	fuel filler pipes	IP	iron Pipe	M	mega	Ped	pedestrian
FLS	fuel leak sensor	Jt	joint	Mer	meridian	PPP	pedestrian pushbutton post
Furn	furnish/ed	J	joule	M	meter	Pen.	penetration
Gal	gallon	Jct	junction	M/s	meters per second	Perf	perforated
Galv	galvanized	K	kelvin	M	mid ordinate of curve	Per.	perimeter
Gar	garage	Kn	kilo newton	Mi	mile	PL	pipeline
Gs L	gas line	Kpa	kilo pascal	MM	mile marker	PI	place
G Reg	gas line regulator	Kg	kilogram	MP	mile post	P&P	plan & profile
GMV	gas main valve	Kg/m3	kilogram per cubic meter	MI	milliliter	PL	plastic limit
G Mtr	gas meter	Km	kilometer	Mm	millimeter	PI	plate
GSV	gas service valve	K	Kip(s)	Mm/hr	millimeters per hour	Pt	point
GVP	gas vent pipe	LS	Land Surveyor (licensed)	Min	minimum	PCC	point of compound curve
GV	gate valve	LSIT	Land Surveyor In Training	Misc	miscellaneous	PC	point of curve
Ga	gauge	Ln	lane	Mon	monument	PI	point of intersection
Geod	geodetic	Lg	large	Mnd	mound	PRC	point of reverse curvature
GIS	Geographical Information System	Lat	latitude	Mtbl	mountable	PT	point of tangent
G	giga	Lt	left	Mtd	mounted	POC	point on curve
GPS	Global Positioning System	L	length of curve	Mtg	mounting	POT	point on tangent
Gov	government	Lens	lenses	Mk	muck	PE	polyethylene
Grd	graded/grade	Lvl	level	Mun	municipal	PVC	polyvinyl chloride
Gr	gravel	LB	level book	N	nano	PCC	Portland Cement concrete
Grnd	ground	LvIng	leveling	NGS	National Geodetic Survey	Lb or #	pounds
GWM	ground water monitor	Lht	light	NS	near side	PP	power pole
Gdrl	guardrail	LP	light pole	Neop	neoprene	Preempt	preemption
Gtr	gutter	Ltg	lighting	Ntwk	network	Prefab	prefabricated
H Plg	H piling	Lig Co	lignite coal	N	newton	Prfmd	performed
Hdwl	headwall	Lig Sl	lignite slack	N	North	Prep	preparation
Ha	hectare	LF	linear foot	NE	North East	Press.	pressure
Ht	height	Liq	liquid	NW	North West	PRV	pressure relief valve
HI	height of instrument	LL	liquid limit	NB	Northbound	Prestr	prestressed
Hel	helical	L	litre	No. or #	number	Pvt	private
H	henry	Lm	loam	Obsc	obscure(d)	PD	private drive
HZ	hertz	Loc	location	Obsn	observation	Prod.	production/produce
HDPE	high density polyethylene	LC	long chord	Ocpd	occupied	Prog	programmed
HM	high mast	Long.	longitude	Ocpy	occupy	Prop.	property
HP	high pressure	Lp	loop	Off Loc	office location	Prop Ln	property line
HPS	high pressure sodium	LD	loop detector	O/s	offset	Ppsd	proposed
Hwy	highway	Lm	lumen	OC	on center	PB	pull box
Hor	horizontal	Lum	luminaire	C	one dimensional consolidation		
HBP	hot bituminous pavement	L Sum	lump sum	OC	organic content		
Hr	hour(s)	Lx	lux	Orig	original		
Hyd	hydrant	ML	main line	O To O	out to out		
Ph	hydrogen ion content	M Hr	man hour	OD	outside diameter		
Id	identification	MH	manhole	OH	overhead		
In or "	inch	Mkd	marked	PMT	pad mounted transformer		
Incl	inclinometer tube	Mkr	marker	Pg	pages		
IMH	inlet manhole	Mkg	marking	Pntd	painted		
ID	inside diameter	MA	mast arm	Pr	pair		
Inst	instrument	Matl	material	Pnl	panel		
Intchg	interchange	Max	maximum	Pk	park		
Intmdt	intermediate	MC	meander corner	PK	Parker-Kalon nail		
Intscn	intersection	Meas	measure	Pa	pascal		
Inv	invert	Mdn	median	PSD	passing sight distance		
IM	iron monument	MD	median drain	Pvmt	pavement		
IPn	Iron Pin	MC	medium curing	Ped	pedestal		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

Qty	quantity	Sig	signal	TS	tangent to spiral	WB	Westbound
Qtr	quarter	Si Cl	silt clay	Tel	telephone	Wrng	wiring
Rad or R	radius	Si Cl Lm	silty clay loam	Tel B	Telephone Booth	W/	with
RR	railroad	Si Lm	silty loam	Tel P	telephone pole	W/o	without
Rlwy	railway	Sgl	single	Tv	television	WC	witness corner
Rsd	raised	SC	slow curing	Temp	temperature	WGS	World Geodetic System
RTP	random traverse point	SS	slow setting	Temp	temporary	Z	zenith
Rge or R	range	Sm	small	TBM	temporary bench mark		
RC	rapid curing	S	South	T	tesla		
Rec	record	SE	South East	T	thinwall tube sample		
Rcy	recycle	SW	South West	T/mi	tons per mile		
RPCC	recycled Portland cement concrete	SB	Southbound	Ts	topsoil		
Ref	reference	Sp	spaces	Twp or T	township		
R Mkr	reference marker	Spcl	special	Traf	traffic		
RM	reference monument	SA	special assembly	TSCB	traffic signal control box		
Refl	reflectorized	SP	special provisions	Tr	trail		
RCB	reinforced concrete box	G	specific gravity	Transf	transformer		
RCES	reinforced concrete end section	Spk	spike	TB	transit book		
RCP	reinforced concrete pipe	SC	spiral to curve	Trans	transition		
RCPS	reinforced concrete pipe sewer	ST	spiral to tangent	TT	transmission tower		
Reinf	reinforcement	SB	split barrel sample	Trans	transverse		
Res	reservation	SH	sprinkler head	Trav	traverse		
Ret	retaining	SV	sprinkler valve	TP	traverse point		
Rev	reverse	Sq	square	Trtd	treated		
Rt	right	SF	square feet	Trmt	treatment		
R/W	right of way	Km2	square kilometer	Qc	triaxial compression		
Riv	river	M2	square meter	TERO	tribal employment rights ordinance		
Rd	road	SY	square yard	Tpl	triple		
Rdbd	road bed	Stk	stake	TP	turning point		
Rdwy	roadway	Std	standard	Typ	typical		
RWIS	Roadway Weather Information System	N	standard penetration test	Qu	unconfined compressive strength		
Rk	rock	Std Specs	Standard Specifications	Ugrnd	underground		
Rt	route	Sta	station	USC&G	US Coast & Geodetic Survey		
Salv	salvage(d)	Sta Yd	station yards	USGS	US Geologic Survey		
Sd	sand	Stm L	steam line	Util	utility		
Sdy Cl	sandy clay	SEC	steel encased concrete	VG	valley gutter		
Sdy Cl Lm	sandy clay loam	SSD	stopping sight distance	Vap	vapor		
Sdy Fl	sandy fill	SD	storm drain	Vert	vertical		
Sdy Lm	sandy loam	St	street	VC	vertical curve		
San	sanitary sewer line	SPP	structural plate pipe	VCP	vitrified clay pipe		
Sc	scoria	SPPA	structural plate pipe arch	V	volt		
Sec	seconds	Str	structure	Vol	volume		
Sec	section	Subd	subdivision	Wkwy	walkway		
SL	section line	Sub	subgrade	W	water content		
Sep	separation	Sub Prep	subgrade preparation	WGV	water gate valve		
Seq	sequence	Ss	subsoil	WL	water line		
Serv	service	SE	superelevation	WM	water main		
Sh	shale	SS	supplement specification	WMV	water main valve		
Sht	sheet	Supp	supplemental	W Mtr	water meter		
Shtng	sheeting	Surf	surfacing	WSV	water service valve		
Shldr	shoulder	Surv	survey	WW	water well		
Sw	sidewalk	Sym	symmetrical	W	watt		
S	siemens	SI	Systems International	Wrng	wearing		
SD	sight distance	Tan	tangent	Wb	weber		
SN	sign number	T	tangent (semi)	WIM	Weigh In Motion		
				W	West		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM 702 Communications
 ACCENT Accent Communications
 AGASSIZ WU Agassiz Water Users Incorporated
 AGC Associated General Contractors of America
 All PI Alliance Pipeline
 ALL SEAS WU All Seasons Water Users Association
 AMOCO PI Amoco Pipeline Company
 AMRDA HESS Amerada Hess Corporation
 AT&T AT&T Corporation
 B PAW Bear Paw Energy Incorporated
 BAKER ELEC Baker Electric
 BASIN ELEC Basin Electric Cooperative Incorporated
 BEK TEL Bek Communications Cooperative
 BELLE PL Belle Fourche Pipeline Company
 BLM Bureau of Land Management
 BNSF Burlington Northern Santa Fe Railway
 BOEING Boeing
 BRNS RWD Barnes Rural Water District
 BURK-DIV ELEC Burke-Divide Electric Cooperative
 BURL WU Burleigh Water Users
 Cable One Cable One
 CABLE SERV Cable Services
 CAP ELEC Capital Electric Cooperative Incorporat
 CASS CO ELEC Cass County Electric Cooperative
 CASS RWU Cass Rural Water Users Incorporated
 CAV ELEC Cavalier Rural Electric Cooperative
 CBLCOM Cablecom Of Fargo
 CENEX PL Cenex Pipeline
 CENT PL WATER DIST Central Pipe Line Water District
 CENT PWR ELEC Central Power Electric Cooperative
 COE Corps of Engineers
 CONS TEL Consolidated Telephone
 CONT RES Continental Resource Inc
 CPR Canadian Pacific Railway
 D O E Department Of Energy
 DAK CARR Dakota Carrier Network
 DAK CENT TEL Dakota Central Telephone
 DAK RWD Dakota Rural Water District
 DGC Dakota Gasification Company
 DICKEY R NET Dickey Rural Networks
 DICKEY RWU Dickey Rural Water Users Association
 DICKEY TEL Dickey Telephone
 DNRR Dakota Northern Railroad
 DOME PL Dome Pipeline Company
 DVELEC Dakota Valley Electric Cooperative
 DVMW Dakota, Missouri Valley & Western
 ENBRDG Enbridge Pipelines Incorporated
 ENVENTIS Enventis Telephone
 FALK MNG Falkirk Mining Company
 FHWA Federal Highway Administration
 G FKS-TRL WD Grand Forks-traill Water District
 GETTY TRD & TRAN Getty Trading & Transportation
 GLDN W ELEC Golden West Electric Cooperative
 GRGS CO TEL Griggs County Telephone

GT PLNS NAT GAS Great Plains Natural Gas Company
 HALS TEL Halstad Telephone Company
 IDEA1 Idea1
 INT-COMM TEL Inter-Community Telephone Company
 KANEB PL Kaneb Pipeline Company
 KEM ELEC Kem Electric Cooperative Incorporated
 KOCH GATH SYS Koch Gathering Systems Incorporated
 LKHD PL Lakehead Pipeline Company
 LNGDN RWU Langdon Rural Water Users Incorporated
 LWR YELL R ELEC Lower Yellowstone Rural Electric
 MCKNZ CON McKenzie Consolidated Telcom
 MCKENZIE ELEC McKenzie Electric Cooperative
 MCKNZ WRD McKenzie County Water Resource District
 MCLEOD McLeod USA
 MCLN ELEC McLean Electric Cooperative
 MCLN-SHRDN R WAT McLean-Sheridan Rural Water
 MDU Montana-dakota Utilities
 MID-CONT CABLE Mid-Continent Cable
 MIDSTATE TEL Midstate Telephone Company
 MINOT CABLE Minot Cable Television
 MINOT TEL Minot Telephone Company
 MISS W W S Missouri West Water System
 MNKOTA PWR Minnkota Power
 MOR-GRAN-SOU ELEC Mor-gran-sou Electric Cooperative
 MOUNT-WILLI ELEC Mountrail-williams Electric Cooperative
 MRE LBTY TEL Moore & Liberty Telephone
 MUNICIPAL City Water And Sewer
 MUNICIPAL City Of '.....'
 N CENT ELEC North Central Electric Cooperative
 N VALL W DIST North Valley Water District
 ND PKS & REC North Dakota Parks And Recreation
 ND TEL North Dakota Telephone Company
 NDDOT North Dakota Department of Transportation
 NDSU SOIL SCI DEPT NDSU Soil Science Department
 NEMONT TEL Nemont Telephone
 NODAK R ELEC Nodak Rural Electric Cooperative
 NOON FRMS TEL Noonan Farmers Telephone Company
 NPR Northern Plains Railroad
 NSP Northern States Power
 NTH PRAIR RW Northern Prairie Rural Water Association
 NTHN BRDR PL Northern Border Pipeline
 NTHN PLNS ELEC Northern Plains Electric Cooperative Incorporated
 NTHWSTRN REF Northwestern Refinery Company
 NW COMM Northwest Communication Cooperation
 ONEOK Oneok gas
 OSHA Occupational Safety and Health Administration
 OTTR TL PWR Otter Tail Power Company
 P L E M Prairielands Energy Marketing
 POLAR COM Polar Communications
 PVT ELEC Private Electric
 QWEST Qwest Communications
 R & T W SUPPLY R & T Water Supply Association
 RAMSEY R SEW Ramsey Rural Sewer Association
 RAMSEY RW Ramsey Rural Water Association
 RAMSEY UTIL Ramsey County Rural Utilities

RED RIV TEL Red River Rural Telephone
 RESVTN TEL Reservation Telephone
 ROBRTS TEL Roberts Company Telephone
 R-RIDER ELEC Roughrider Electric Coop
 RRVW Red River Valley & Western Railroad
 RSR ELEC R.S.R. Electric Cooperative
 S E W U South East Water Users Incorporated
 SCOTT CABLE Scott Cable Television Dickinson
 SHERDN ELEC Sheridan Electric Cooperative
 SHEYN VLY ELEC Sheyenne Valley Electric Cooperative
 SKYTECH Skyland Technologies Incorporated
 SLOPE ELEC Slope Electric Cooperative Incorporated
 SOURIS RIV TELCOM Souris River Telecommunications
 ST WAT COMM State Water Commission
 STATE LN WATER State Line Water Cooperative
 STER ENG Sterling Energy
 STUT RWU Stutsman Rural Water Users
 SW PL PRJ Southwest Pipeline Project
 T M C Turtle Mountain Communications
 TCI TCI of North Dakota
 TESORO GHG PLNS PL Tesoro High Plains Pipeline
 TRI-CNTY WU Tri-County Water Users Incorporated
 TRL CO RWU Traill County Rural Water Users
 UNTD TEL United Telephone
 UPPR SOUR WUA Upper Souris Water Users Association
 US SPRINT U.S. Sprint
 USAF MSL CABLE U.S.A.F. Missile Cable
 USFWS US Fish and Wildlife Service
 USW COMM U.S. West Communications
 VRNDRY ELEC Verendrye Electric Cooperative
 W RIV TEL West River Telephone Incorporated
 WEB W. E. B. Water Development Association
 WILLI RWA Williams Rural Water Association
 WILSTN BAS PL Williston Basin Interstate Pipeline Company
 WLSH RWD Walsh Water Rural Water District
 WOLVRTN TEL Wolverton Telephone
 XLENER Xcel Energy
 YSVR Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation





Line Styles

.....	Limits of Const Transition Line	—— s —— s ——	Floating Silt Curtain	—— ——— ———	Existing Aggregate (Cross Section View)	- - - - -	Existing Centerline
.....	Bale Check	—— ——— T ——	Existing Telephone Line	—— ——— ———	Existing Curb and Gutter (Cross Section View)	- - - - -	Supplemental Contour
.....	Rock Check	—— ——— TV ——	Existing TV Line	—— ——— ———	Existing Riprap	—— - - - - -	Right of Way
.....	Sight Distance Triangle Line	Void — void — void — v	Existing Assumed Ground (Not Surveyed)	—— ——— ———	Existing Underground Vault or Lift Station	—— - - - - -	Existing Right of Way
- - - - -	Small Hidden Object	Void — void — void — v	Tentative Ground Line	—— ——— ———	Tangent Line	—— - - - - -	Existing Right of Way Railroad
- - - - -	Dimension Leader	—— ——— w ——	Existing Water or Steam Line	- - - - -	Hidden Object	- - - - -	Failure Line
- - - - -	Existing Ground	=====	Existing Under Drain	—— ——— ———	Existing Dirt Surface	- - - - -	Existing Conditions
- - - - -	Existing Topsoil (Cross Section View)	=====	Under Drain	—— ——— ———	Existing Conduit	- - - - -	Existing Ground (Details)
—— ——— ———	Large Hidden Object	=====	Wall	—— ——— ———	Topsoil Profile	—— - - - - -	Existing Sixteenth Section Line
—— ——— ———	Edge Drain	=====	Existing Slotted Drain	- - - - -	Existing Conductor	- - - - -	Existing Right of Way Not State Owned
—— D —— D ——	Geotextile Fabric Type D	—— + —— + ——	Existing Cemetary Boundary	- - - - -	Conductor	- - - - -	Phantom Object
—— ——— E ——	Existing Electrical	—— ——— ———	Centerline Pavement Marking	- - - - -	Fiber Optic	- - - - -	Centerline Main
—— ——— FO ——	Existing Fiber Optic Line	=====	Barrier with Centerline Pavement Marking	- - - - -	Existing Loop Detector	-	Existing Guardrail Cable
—— ——— FO ——	Existing TV Fiber Optic	=====	Barrier Pavement Marking	- - - - -	Subgrade, Subcut or Ditch Grade	— • — • — • — •	Existing Guardrail Metal
—— ——— G ——	Existing Gas Pipe	- - - - -	Stripe 4 IN Dotted Extension White	—— ——— ———	Existing Asphalt Surface	—— . ——— . ——— . ——— .	Existing Edge of Water
—— ——— Geo —— Geo ——	Geogrid	- - - - -	Stripe 8 IN Dotted Extension White	—— ——— ———	Existing Asphalt (Cross Section View)	- - - - -	Excavation Limits
—— ——— OH ——	Existing Overhead Utility Line	- - - - -	Stripe 8 IN Lane Drop	—— ——— ———	Existing Reinforcement Rebar	——	Existing Government Lot Line
—— ——— P ——	Existing Power	—— ——— ———	Wetland Mitigation	—— ——— ———	Existing Tie Point Line	Existing Adjacent Block Lines
—— ——— PL ——	Existing Fuel Pipeline	- - - - -	Existing Box Culvert Bridge	—— ——— ———	Existing State or International Line	Existing Adjacent Lot Lines
—— ——— PL ——	Existing Undefined Above Ground Pipe Line	- - - - -	Existing Concrete Surface	—— ——— ———	Existing Quarter Section Line	Existing Adjacent Property Line
—— ——— R —— R ——	Geotextile Fabric Type R	- - - - -	Existing Drainage Structure	—— ——— ———	Existing County	Existing Adjacent Subdivision Lines
—— ——— R —— R ——	Geotextile Fabric Type R1	- - - - -	Easement	—— ——— ———	Existing Section Line		
—— REMOVE —— REMOVE ——	Remove Line	- - - - -	Existing Concrete	—— ——— ———	Existing Township		
—— ——— RR —— RR ——	Geotextile Fabric Type RR	- - - - -	Existing Easement	—— ——— ———	Existing Railroad Centerline		
—— ——— S —— S ——	Geotextile Fabric Type S	—— ——— ———	Existing Gravel Surface	—— ——— ———	Centerline		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Line Styles

	Subgrade Reinforcement		Existing Railroad Switch		Sheet Piling
	Existing Down Guy Wire Down Guy		Overhead Sign Structure Cantilever		W-Beam w Posts
	Existing Fence		24 Inch Pipe		Existing W-Beam Guardrail with Posts
	Existing Railroad		Reinforced Concrete Pipe		Exst Wet Area-Vegetation Break
	Existing Sanitary Sewer		Signal Head with Mast Arm		Existing Wetland Delineated
	Existing Sanitary Force Main		Existing Signal Head with Mast Arm		
	Existing Storm Drain		Tie Bar at Random Spacing		
	Existing Storm Drain Force Main		3-Cable w Posts		
	Fence		Existing 3-Cable w Posts		
	Silt Fence		Site Boundary		
	Existing Field Line		Fiber Rolls		
	Exst Flow		Doweled Joint		
	Flow		Tie Bar 30 Inch 4 Foot Center to Center		
	Existing Culvert		Tie Bar 18 Inch 3 Foot Center to Center		
	Existing Curb		Existing Berm, Dike, Pit, or Earth Dam		
	Existing Valley Gutter		Existing Ditch Block		
	Existing Driveway Gutter		Depression Contours		
	Existing Curb and Gutter		Existing City Corporate Limits or Reservation Boundary		
	Existing Mountable Curb and Gutter		Gravel Pit - Borrow Area		
	Existing Double Micro Loop Detector		Existing Tree Boundary		
	Micro Loop Detector Double		Tree Row		
	Existing Overhead Sign Structure		Existing Brush or Shrub Boundary		
	Existing Micro Loop Detector		Existing Retaining Wall		
	Micro Loop Detector		Existing Planter or Wall		
	Existing Overhead Sign Structure Cantilever		Retaining Wall (Plan View)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	North Arrow (Half Scale)		Attenuation Device		Existing Railroad Battery Box		Existing Delineator Type E
	Truck Mounted Attenuator		Diamond Grade Delineator Type A		Existing Bush or Shrub		Existing EFB Misc
	Type I Barricade		Diamond Grade Delineator Type B		Existing Gas Cap or Stub		Existing Flashing Beacon
	Type II Barricade		Diamond Grade Delineator Type C		Existing Sanitary Cap or Stub		Existing Pipe Mounted Flasher
	Type III Barricade		Diamond Grade Delineator Type D		Existing Storm Drain Cap or Stub		Existing Pad Mounted Feed Point
	Catch Basin		Diamond Grade Delineator Type E		Existing Water Cap or Stub		Existing Pipe Mounted Feed Point with Pad
	Cairn or Stone Circle		Flexible Delineator		Existing Sanitary Cleanout		Existing Pole Mounted Feed Point
	Video Detection Camera		Flexible Delineator Type A		Existing Concrete Foundation		Existing Railroad Frog
	Storm Drain Cap or Stub		Flexible Delineator Type B		Existing Traffic Signal Controller		Existing Snow Gate 18
	Corrugated Metal End Section 18 Inch		Flexible Delineator Type C		Existing Pad Mounted Signal Controller		Existing Snow Gate 28
	Corrugated Metal End Section 24 Inch		Flexible Delineator Type D		Existing Sixteenth Section Corner		Existing Snow Gate 40
	Corrugated Metal End Section 30 Inch		Flexible Delineator Type E		Existing Quarter Section Corner		Existing Headwall
	Corrugated Metal End Section 36 Inch		Delineator Type A		Existing Section Corner		Existing Pedestrian Head with Number
	Corrugated Metal End Section 42 Inch		Delineator Type A Reset		Existing Railroad Crossbuck		Existing Signal Head
	Corrugated Metal End Section 48 Inch		Delineator Type B		Existing Satellite Dish		Existing Sprinkler Head
	Concrete Foundation		Delineator Type B Reset		Existing Fuel Dispensers		Existing Fire Hydrant
	Ground Connection Conductor		Delineator Type C		Existing Flexible Delineator Type A		Existing Catch Basin Drop Inlet
	Neutral Connection Conductor		Delineator Type D		Existing Flexible Delineator Type B		Existing Curb Inlet
	Phase 1 Connection Conductor		Delineator Type E		Existing Flexible Delineator Type C		Existing Manhole Inlet
	Phase 2 Connection Conductor		Delineator Drums		Existing Flexible Delineator Type D		Existing Junction Box
	Traffic Cone		Spot Elevation		Existing Flexible Delineator Type E		
	Signal Controller		Existing Access Control Arrow		Existing Delineator Type A		
	Pad Mounted Signal Controller		Existing Artifact		Existing Delineator Type B		
	Alignment Data Point		Existing Flashing Beacon		Existing Delineator Type C		
	Emergency Vehicle Detector		Existing Benchmark		Existing Delineator Type D		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	Existing Light Standard		Existing Manhole with Valve Water		Existing Telephone Pole		Existing Undefined Manhole
	Existing High Mast Light Standard 10 Luminaire		Existing Water Manhole		Existing Wood Pole		Existing Undefined Pull Box
	Existing High Mast Light Standard 3 Luminaire		Existing Mile Post Type A		Existing Post		Existing Undefined Pedestal
	Existing High Mast Light Standard 4 Luminaire		Existing Mile Post Type B		Existing Pedestrian Push Button Post		Existing Undefined Valve
	Existing High Mast Light Standard 5 Luminaire		Existing Mile Post Type C		Existing Control Point CP		Existing Undefined Pipe Vent
	Existing High Mast Light Standard 6 Luminaire		Existing Reference Marker		Existing Control Point GPS-RTK		Existing Gas Valve
	Existing High Mast Light Standard 7 Luminaire		Existing RW Marker		Existing Control Point TRI		Existing Water Valve
	Existing High Mast Light Standard 8 Luminaire		Existing Utility Marker		Existing Reference Marker Point NGS		Existing Fuel Pipe Vent
	Existing High Mast Light Standard 9 Luminaire		Iron Monument Found		Existing Pull Box		Existing Gas Pipe Vent
	Existing Overhead Sign Structure Load Center		Iron Pin R/W Monument		Existing Intelligent Transportation Pull Box		Existing Sanitary Pipe Vent
	Existing Luminaire		Existing Object Marker Type I		Existing Water Pump		Existing Storm Drain Pipe Vent
	Existing Light Standard Luminaire		Existing Object Marker Type II		Existing Slotted Reinforced Concrete Pipe		Existing Water Pipe Vent
	Existing Federal Mailbox		Existing Object Marker Type III		Existing RR Profile Spot		Existing Weather Station
	Existing Private Mailbox		Existing Electrical Pedestal		Existing Fuel Leak Sensors		Existing Ground Water Well Bore Hole
	Existing Meander Section Corner		Existing Telephone Pedestal		Existing Highway Sign		Existing Windmill or Tower
	Existing Meter		Existing Fiber Optic Telephone Pedestal		Existing Miscellaneous Spot		Existing Witness Corner
	Existing Electrical Manhole		Existing TV Pedestal		Existing Lighting Standard Pole		Flashing Beacon
	Existing Gas Manhole		Existing Fiber Optic TV Pedestal		Existing Traffic Signal Standard		Flagger
	Existing Sanitary Manhole		Existing Fuel Filler Pipes		Existing Transformer		Pipe Mounted Flasher
	Existing Sanitary Force Main Manhole		Existing Traverse PI Aerial Panel		Existing Large Evergreen Tree		Sanitary Force Main with Valve
	Existing Sanitary Manhole with Valve		Existing Pole		Existing Small Evergreen Tree		
	Existing Storm Drain Manhole		Existing Power Pole		Existing Large Tree		
	Existing Force Main Storm Drain Manhole		Existing Power Pole with Transformer		Existing Small Tree		
	Existing Force Main Storm Drain Manhole with Valve				Existing Tree Trunk		
	Existing Telephone Manhole				Existing Pad Mounted Traffic Signal Control Box		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols


D-101-32

 Pad Mounted Feed Point  Pipe Mounted Feed Point with Pad  Pole Mounted Feed Point  Headwall  Double Headwall with Vegetation Barrier  Single Headwall with Vegetation Barrier  Pole Mounted Head  Sprinkler Head  Fire Hydrant  Inlet Type 1  Inlet Type 2  Double Inlet Type 2  Inlet Gate Type 2  Junction Box  High Mast Light Standard 10 Luminaire  High Mast Light Standard 3 Luminaire  High Mast Light Standard 4 Luminaire  High Mast Light Standard 5 Luminaire  High Mast Light Standard 6 Luminaire  High Mast Light Standard 7 Luminaire  High Mast Light Standard 8 Luminaire  High Mast Light Standard 9 Luminaire  Relocate Light Standard  Overhead Sign Structure Load Center  Light Standard 100 Watt High Pressure Sodium Vapor Luminaire	 Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire  Light Standard 150 Watt High Pressure Sodium Vapor Luminaire  Light Standard 175 Watt High Pressure Sodium Vapor Luminaire  Light Standard 200 Watt High Pressure Sodium Vapor Luminaire  Light Standard 250 Watt High Pressure Sodium Vapor Luminaire  Light Standard 310 Watt High Pressure Sodium Vapor Luminaire  Light Standard 35 Watt High Pressure Sodium Vapor Luminaire  Light Standard 400 Watt High Pressure Sodium Vapor Luminaire  Light Standard 50 Watt High Pressure Sodium Vapor Luminaire  Light Standard 70 Watt High Pressure Sodium Vapor Luminaire  Light Standard 700 Watt High Pressure Sodium Vapor Luminaire  Manhole  Manhole 48 Inch  Sanitary Force Main Manhole  Sanitary Sewer Manhole  Storm Drain Manhole  Storm Drain Manhole with Inlet  Reset Mile Post  Mile Post Type A  Mile Post Type B  Mile Post Type C  Right of Way Marker  Tubular Marker  Alignment Monument  Iron Pin Reference Monument	 Object Marker Type I  Object Marker Type II  Object Marker Type III  Caution Mode Arrow Panel  Back to Back Vertical Panel Sign  Double Direction Arrow Panel  Left Directional Arrow Panel  Right Directional Arrow Panel  Sequencing Arrow Panel  Truck Mounted Arrow Panel  Power Pole  Wood Pole  Pedestrian Push Button Post  Property Corner  Pull Box  Intelligent Transportation Pull Box  Sanitary Pump  Storm Drain Pump  Reinforced Pavement  Reinforced Concrete End Section 15 Inch  Reinforced Concrete End Section 18 Inch  Reinforced Concrete End Section 24 Inch  Reinforced Concrete End Section 30 Inch  Reinforced Concrete End Section 36 Inch  Reinforced Concrete End Section 42 Inch	 Reinforced Concrete End Section 48 Inch  Reinforced Concrete End Section 54 Inch  Reset Right of Way Marker  Reset USGS Marker  Right of Way Markers  Riser 30 Inch  Continuous Split Barrel Sample  Flight Auger Sample  Split Barrel Sample  Thinwall Tube Sample  Highway Sign  SNOW GATE 18 FT  SNOW GATE 28 FT  SNOW GATE 40 FT  Standard Penetration Test  Transformer  Inclinometer Tube  Underdrain Cleanout  Excavation Unit  Water Valve
---	--	---	--

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
Roger Weigel,
 Registration Number
PE-2930,
 on 07/01/14 and the original document is stored at the
 North Dakota Department
 of Transportation

EROSION CONTROL
FIBER ROLL PLACEMENT DETAILS

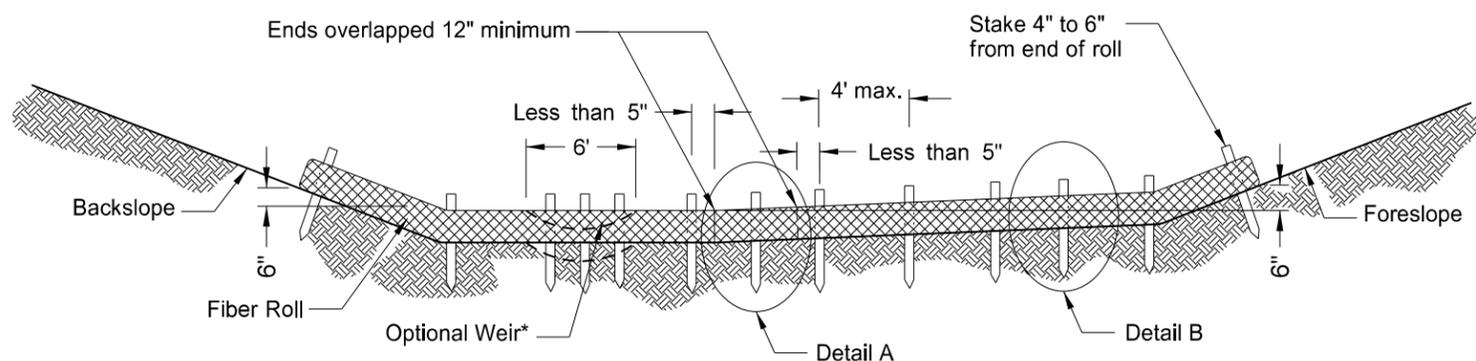


*Optional Weir. Use in flat areas, such as the Red River Valley, where there is potential for water to back up on adjacent property. Lower fiber roll enough to prevent water from backing up on adjacent property. Do not use 20-inch fiber rolls in flat areas where there is potential for water to back up on adjacent property.


12 OR 20 INCH FIBER ROLL - DITCH BOTTOM

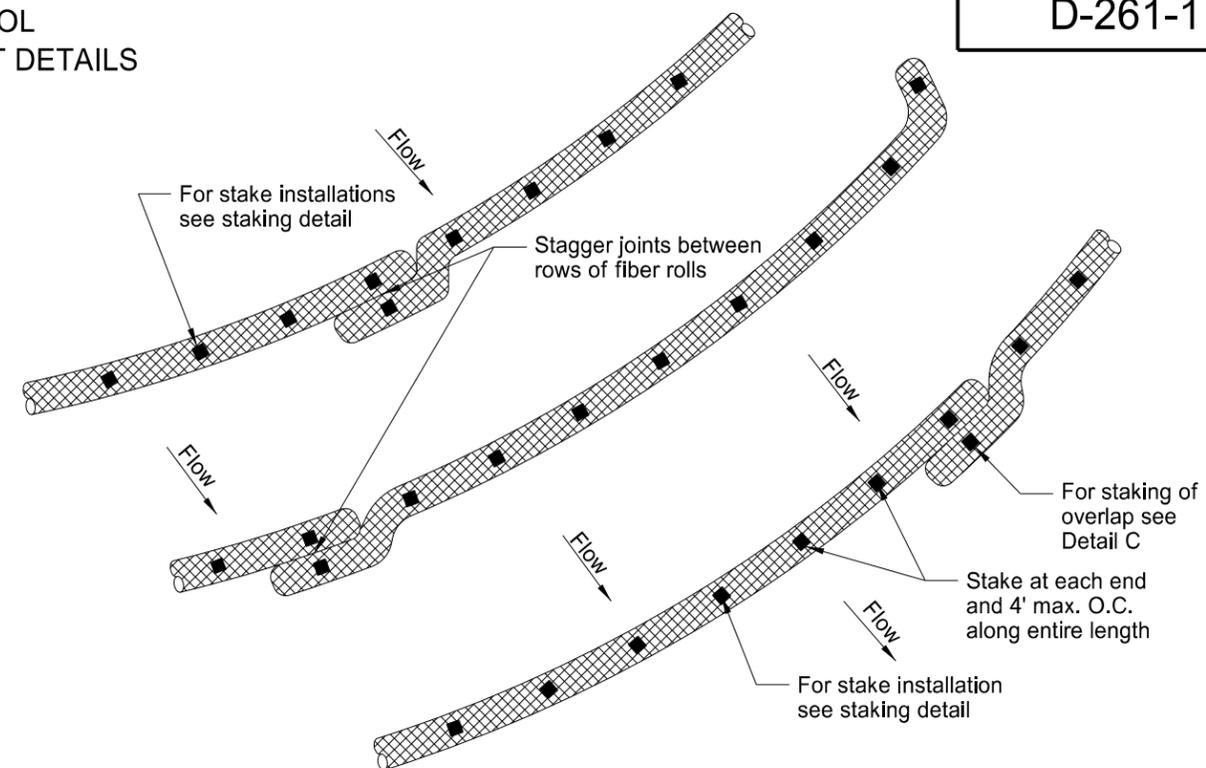


PLAN VIEW FOR SLOPE APPLICATION

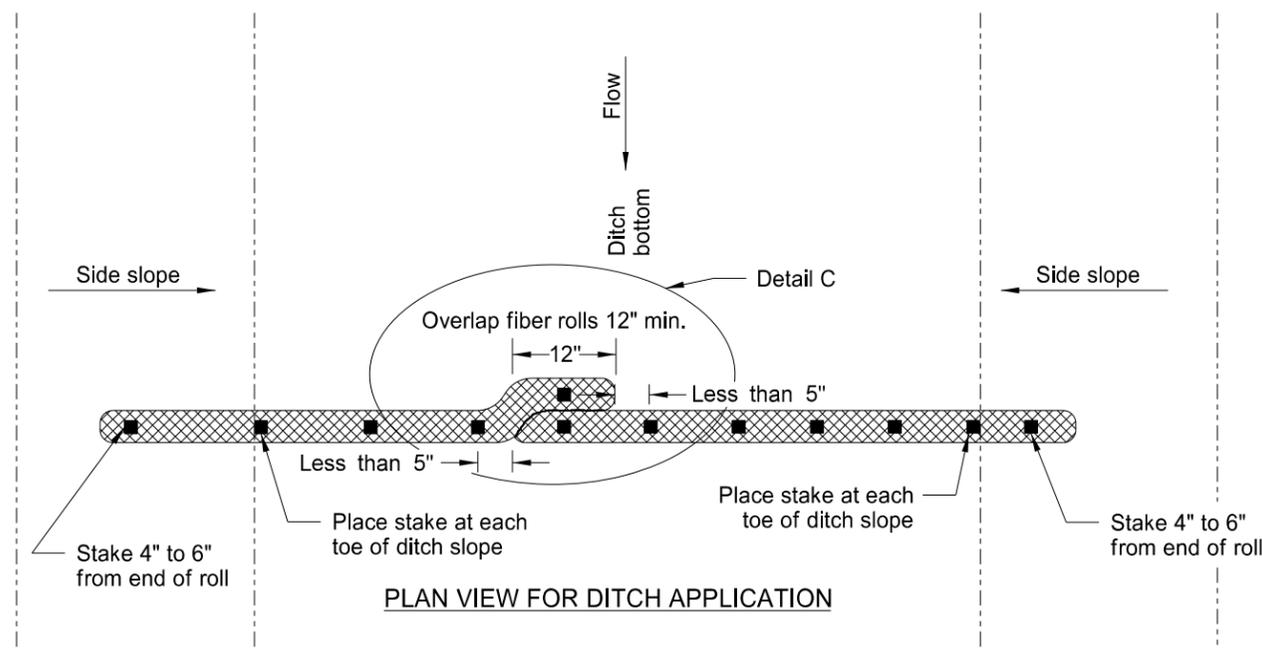

PLAN VIEW FOR DITCH APPLICATION

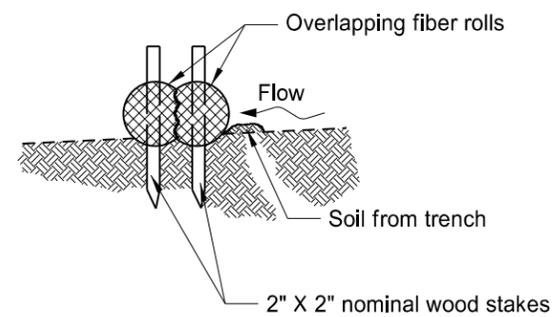

Detail A
Fiber Roll Overlapping Staking Detail

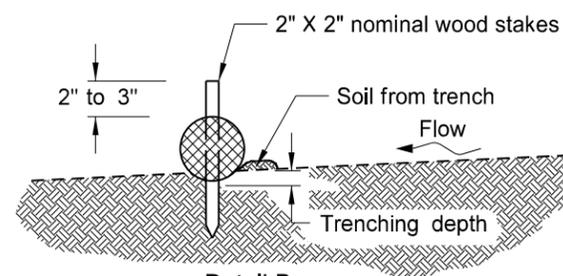


Detail B
Fiber Roll Staking Detail

FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	MINIMUM TRENCH DEPTH	MAXIMUM TRENCH DEPTH
6"	2" x 2"	18"	2"	2"
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"

NOTE: Runoff must not be allowed to run under or around roll.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-18-10	
REVISIONS	
DATE	CHANGE
06-10-13	Added plan view for ditch and slope application, Added table with values for stake and trench dimensions.
10-04-13	Revised fiber roll overlap detail.
06-26-14	Changed standard drawing number from D-708-7 to D-261-1

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 06/26/14 and the original document is stored at the North Dakota Department of Transportation

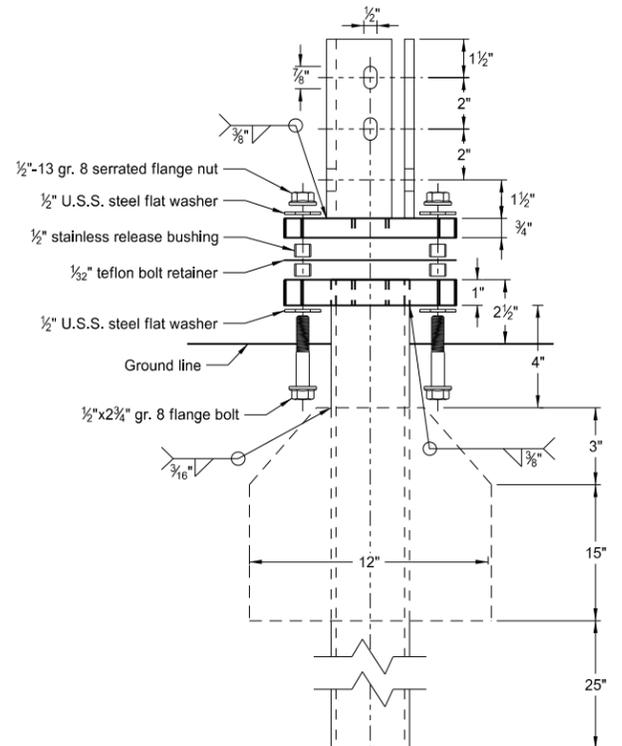


Multi-Directional Slip Base Assembly

Perforated Tube

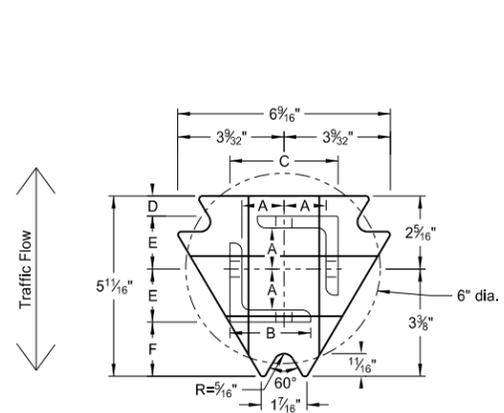

Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2 1/2" x 2 1/2" x 3/8" ASTM A36 structural angle

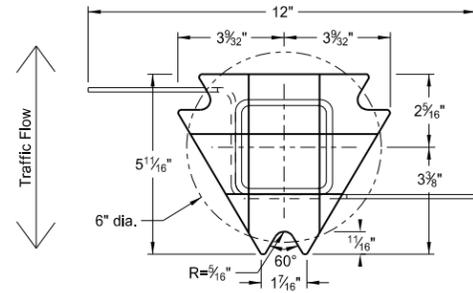

Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50


Notes:

1. Slip base bolts shall be torqued as specified by the manufacturer.
2. Anchor shall have a yield strength of 43.9 KSI and tensile strength of 59.3 KSI.
3. The 4" vertical clearance is required for the anchor or breakaway base. The 4"x60" measurement shall be made above and below post location and also back and ahead of the post.
4. When used in concrete sidewalk, anchor shall be same except without the wings.
5. Four post signs shall have over 7' between the first and the fourth posts.


Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785


Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16" x 10 ga.	1 9/64"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 1/8"
2 1/2" x 10 ga.	1 9/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

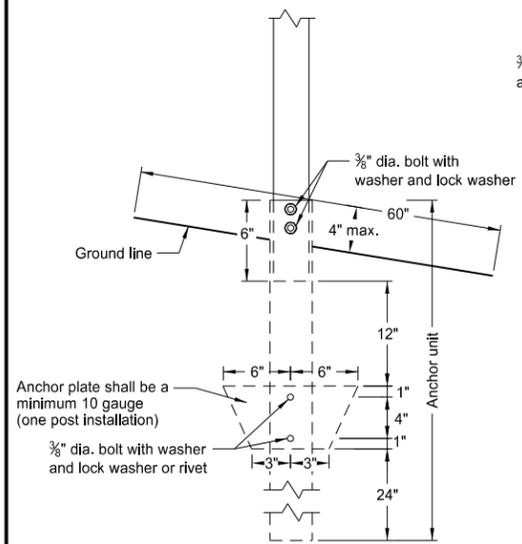


Anchor Unit and Post Assembly

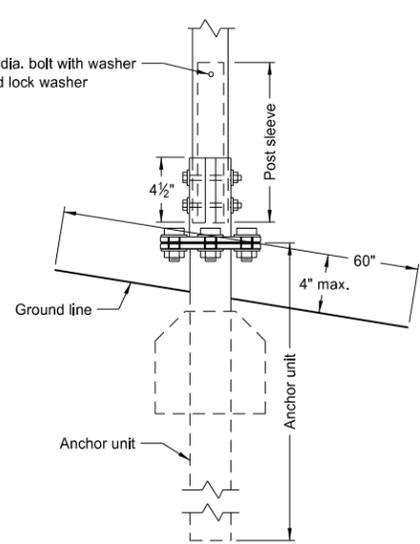

Multi-Directional Slip Base Anchor Unit and Post Sleeve Assembly

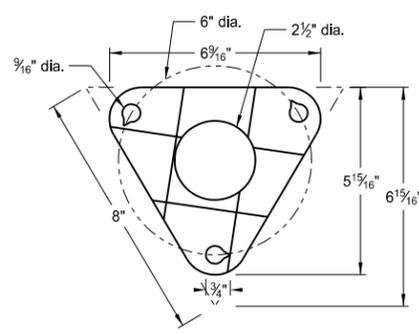

Bolt Retainer for Base Connection
Bolt Retainer - 1/32" Reprocessed Teflon





Anchor plate shall be a minimum 10 gauge (two post installation)

- (A) The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak.
 (B) The 2 3/16" x 10 ga. may be inserted into 2 1/2" x 10 ga. for additional wind load.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION 2-28-14		This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation
REVISIONS		
DATE	CHANGE	

U-Channel Post

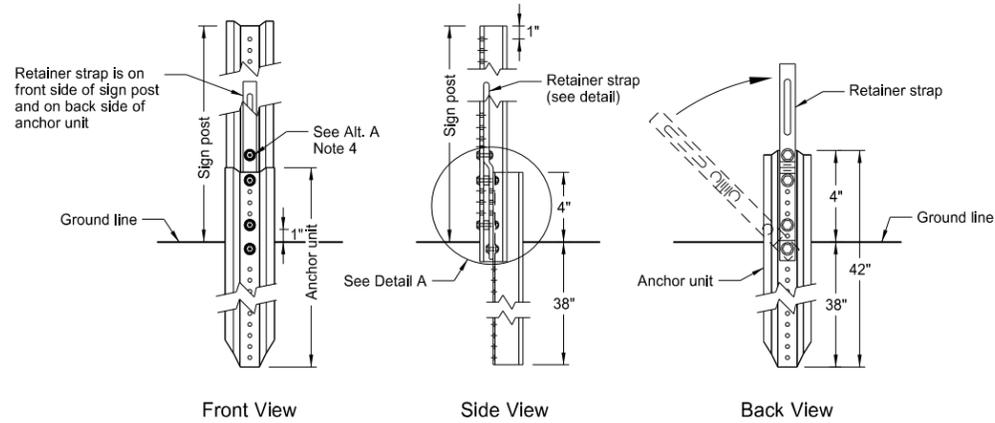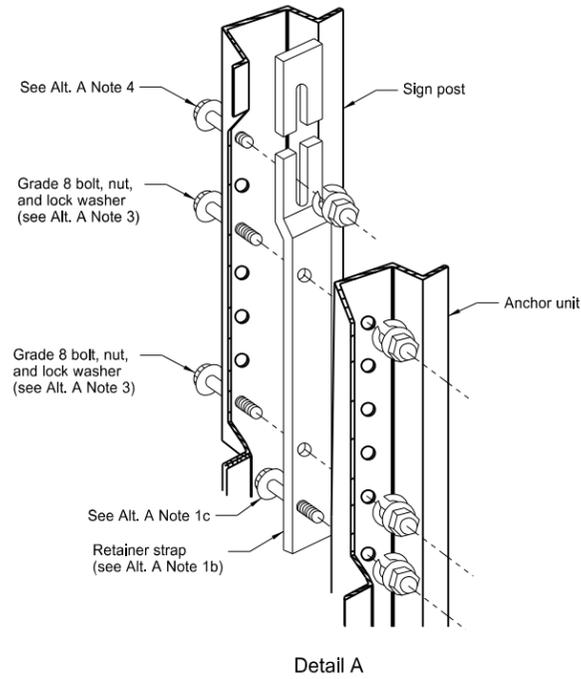


Breakaway U-Channel Detail Alternate A

A maximum of 2 posts shall be installed within 7'.

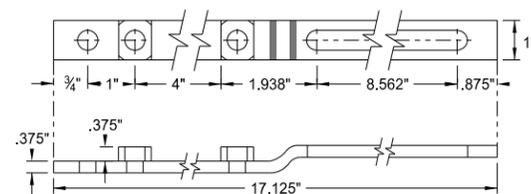


Retainer Strap Detail

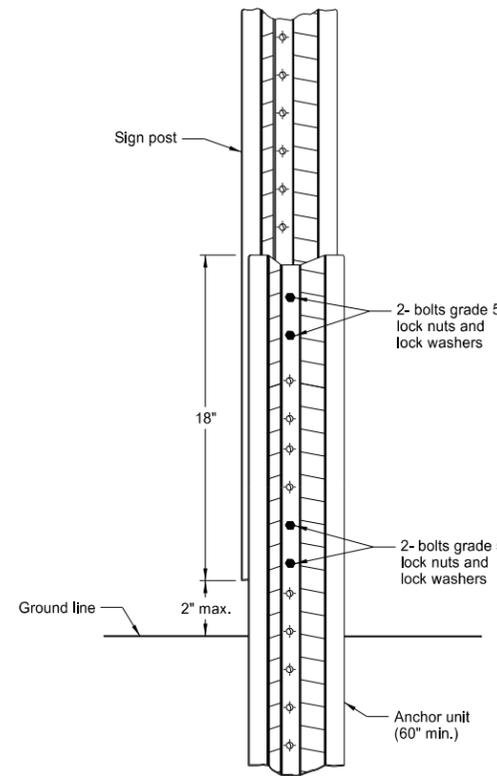

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

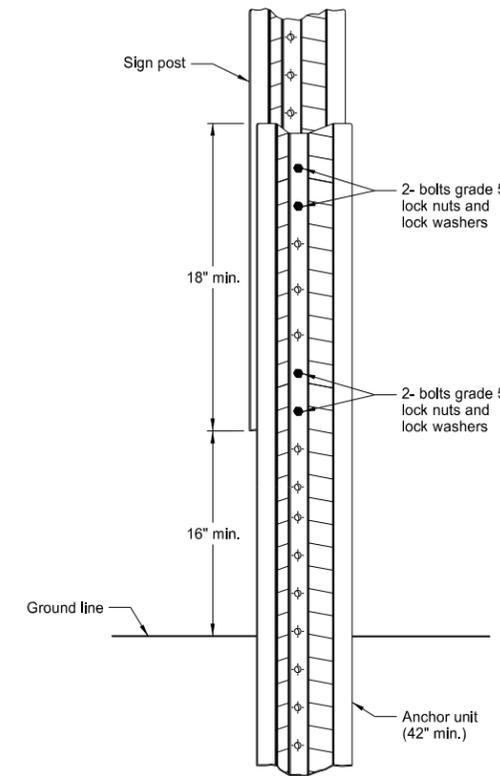

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

Alternate A Steps of Installation:












1. a) Drive anchor unit to within 12" of ground level.
b) Proper assembly established by lining up the bottom hole of retainer strap with the 6th hole from the top of the anchor unit.
c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. The base post, strap and sign post shall be properly nested. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS

D-704-9

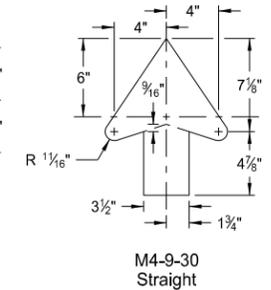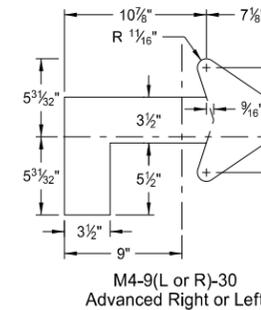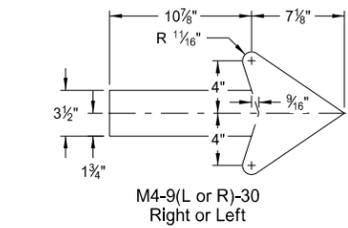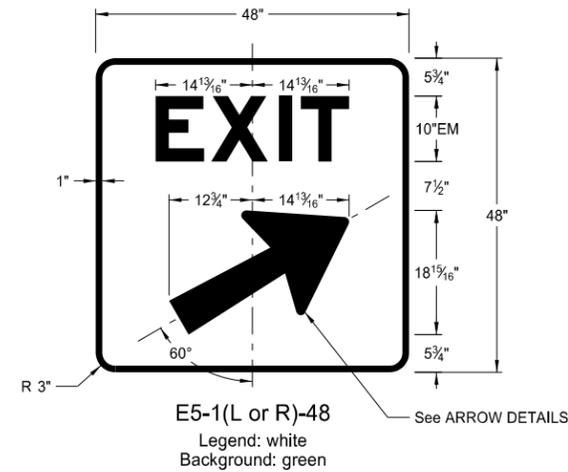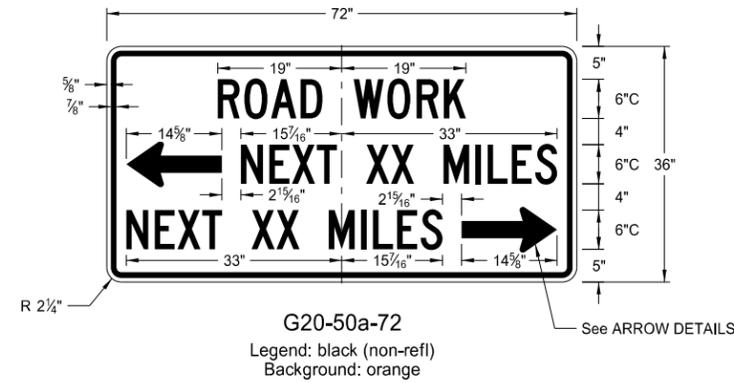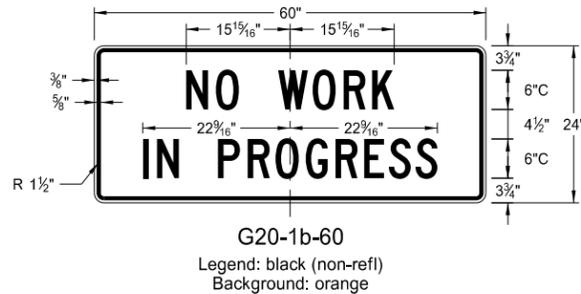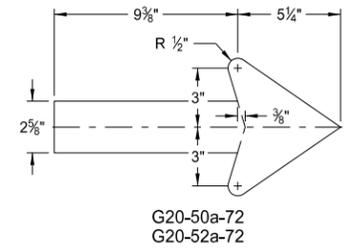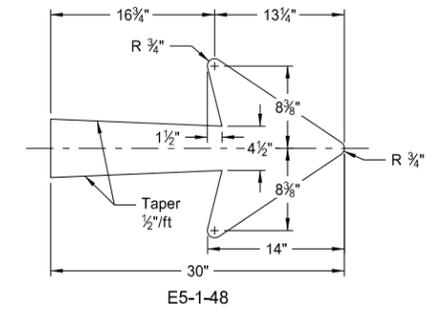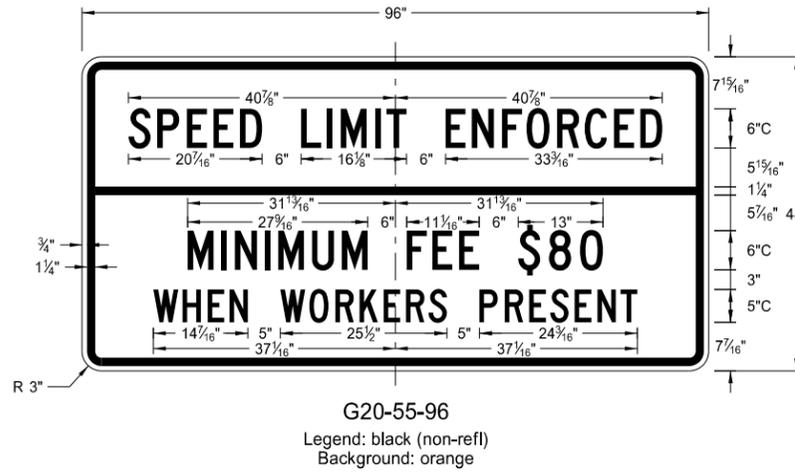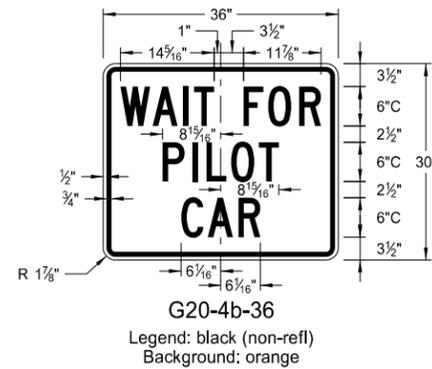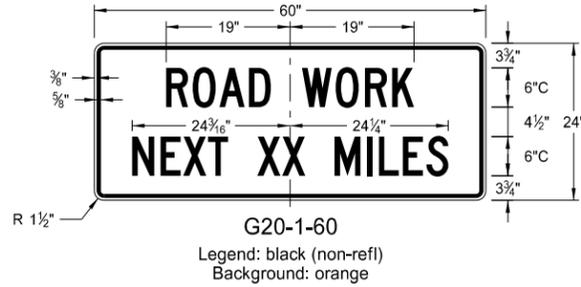



ARROW DETAILS

NOTES:

(A) Arrow may be right or left of the legend to indicate construction to the right or left.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

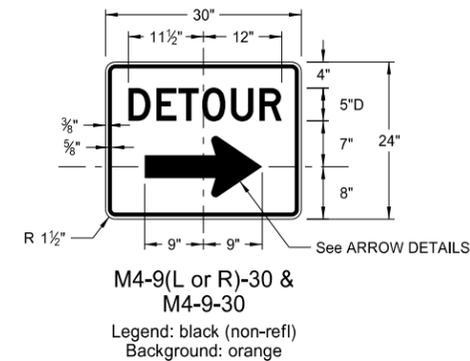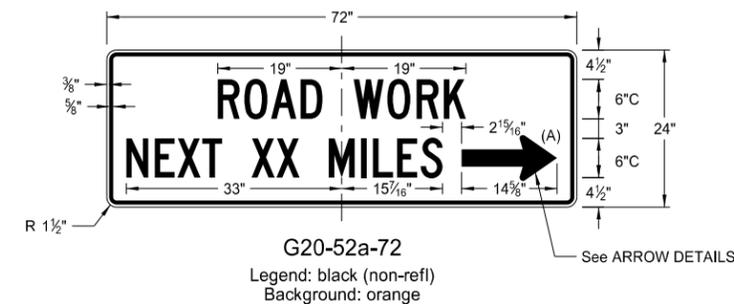


CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS


D-704-10

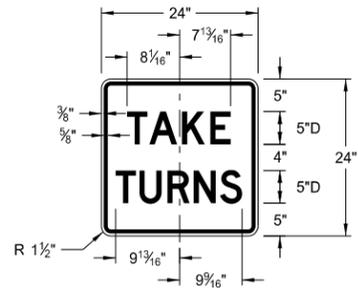


R1-50-24
Legend: black (non-refl)
Background: white

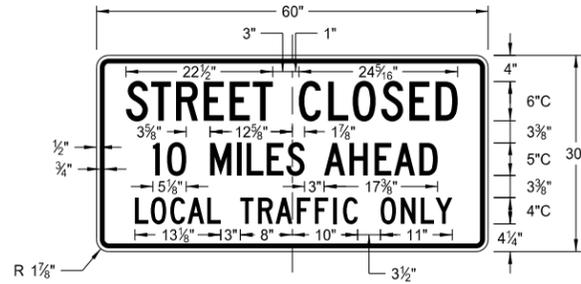

R11-3c-60
Legend: black (non-refl)
Background: white

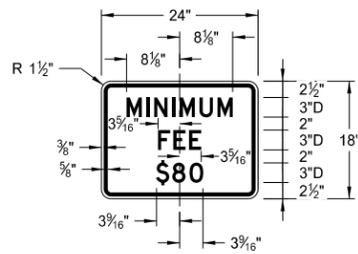

R2-1a-24
Legend: black (non-refl)
Background: white

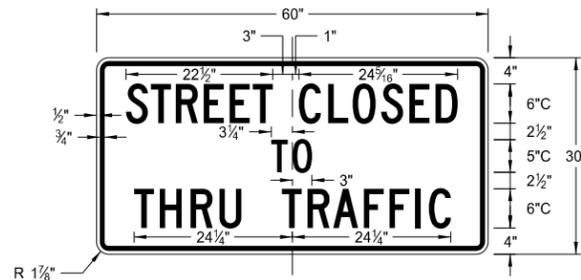

R11-4a-60
Legend: black (non-refl)
Background: white




R11-2a-48
Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

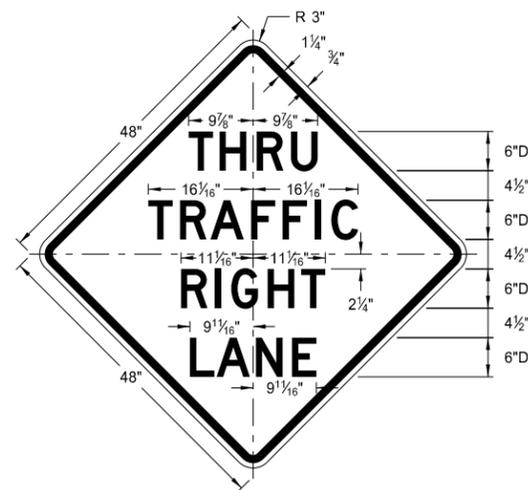


W5-8-48
Legend: black (non-refl)
Background: orange

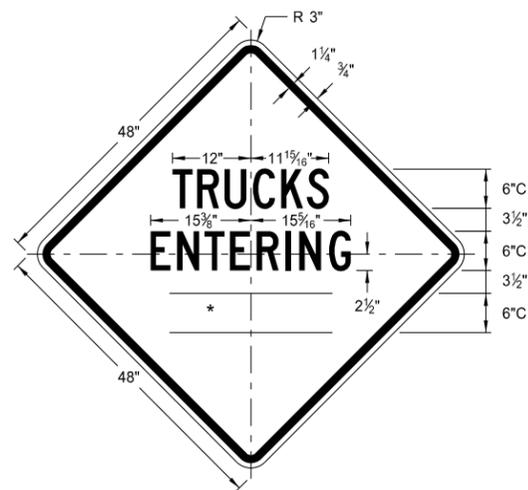

W8-54-48
Legend: black (non-refl)
Background: orange

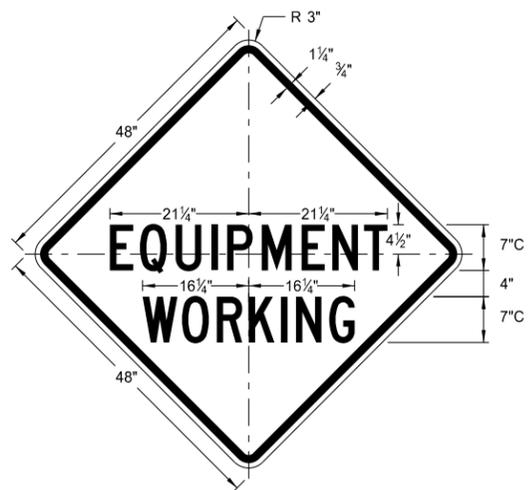


W20-51-48
Legend: black (non-refl)
Background: orange

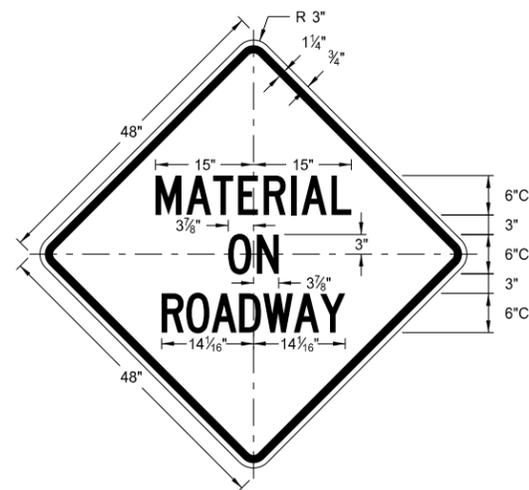


W21-51-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

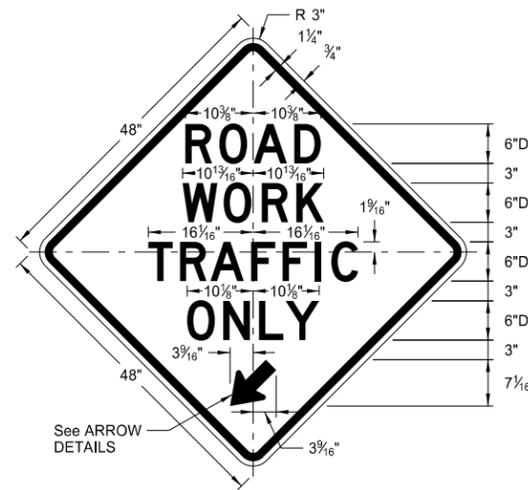


W5-9-48
Legend: black (non-refl)
Background: orange

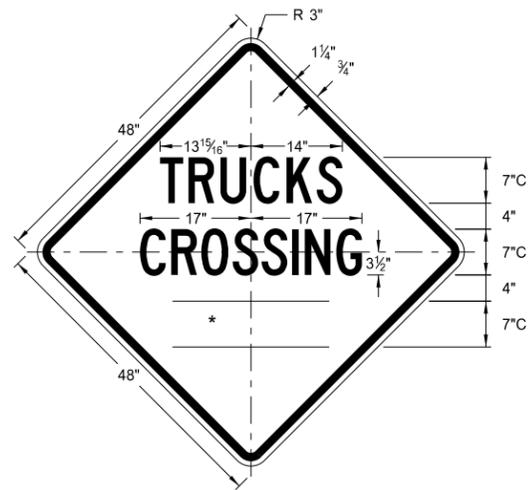


W8-55-48
Legend: black (non-refl)
Background: orange

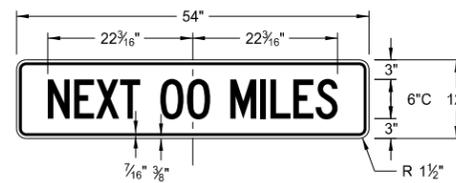


W20-52-54
Legend: black (non-refl)
Background: orange

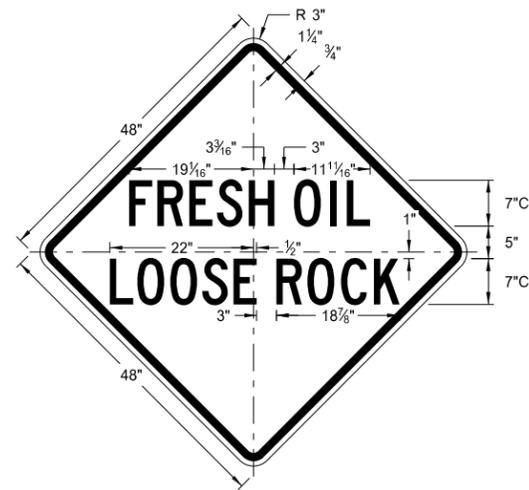


W22-8-48
Legend: black (non-refl)
Background: orange




W5-9-48
ARROW DETAILS

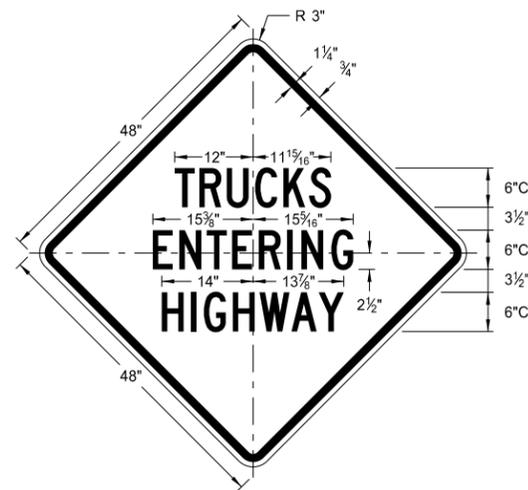

W8-53-48
Legend: black (non-refl)
Background: orange

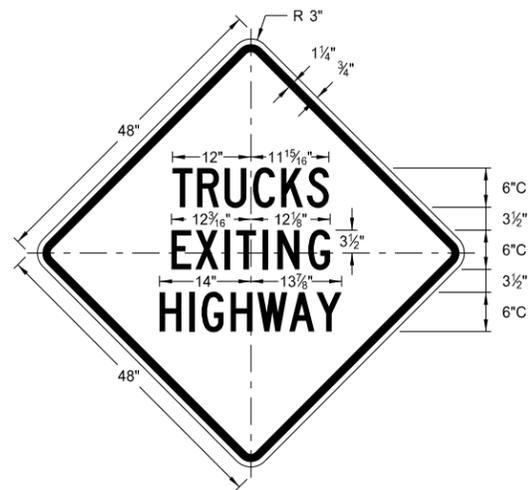

W8-56-48
Legend: black (non-refl)
Background: orange

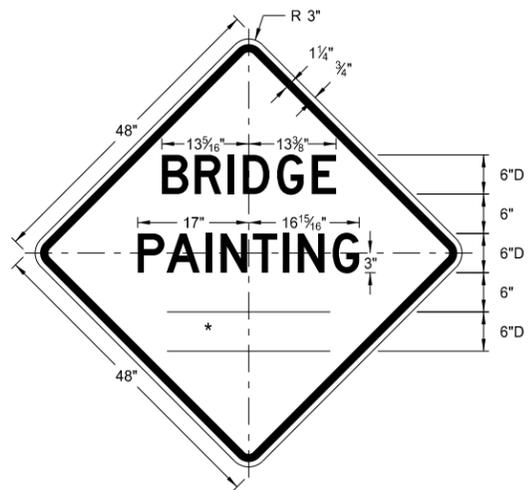


W21-50-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

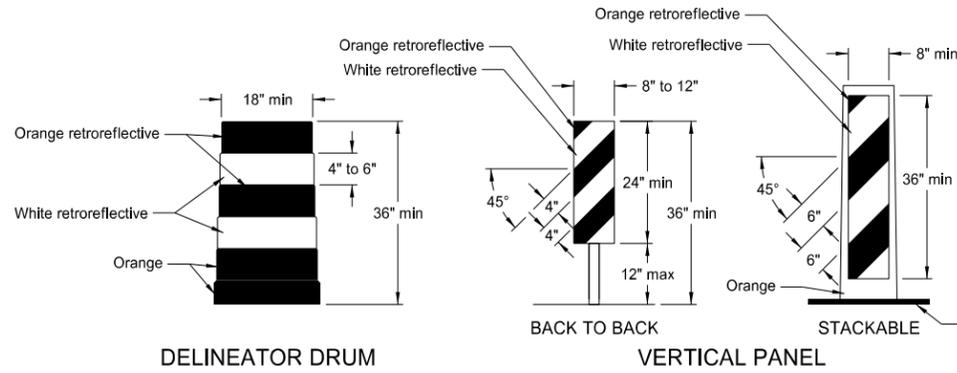


The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED spaces between the horizontal orange and white stripes shall not exceed 3" wide. Stripes shall not be placed on ribs or indentations in the drum. Drums shall have closed tops that will not allow collection of construction debris or other debris. Ballast shall not be placed on the top of a drum.

Markings for vertical panels shall be alternating orange and white retroreflective stripes, sloping downward in the direction vehicular traffic is to pass. Retroreflective sheeting shall be placed on both sides of panel and shall have a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.

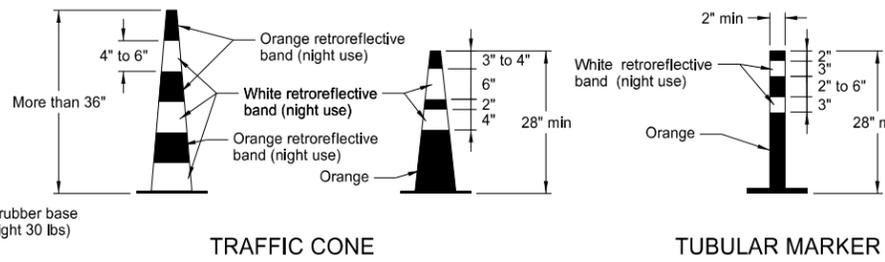


RetroreflectORIZATION of cones more than 36" in height shall be provided by alternating orange and white retroreflective stripes. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED space between the orange and white stripes shall not exceed 3" wide.

RetroreflectORIZATION of tubular markers more than 42" in height shall be provided by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

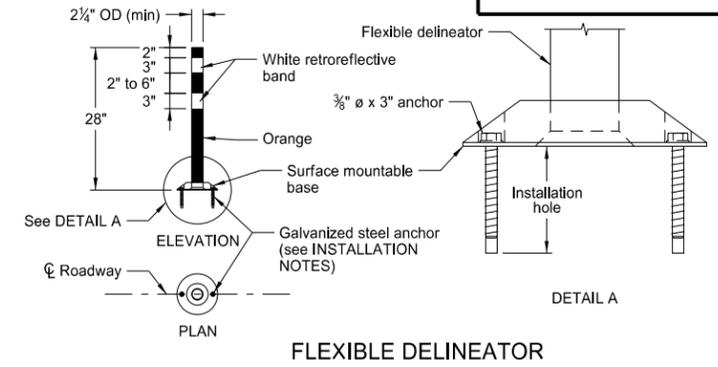

INSTALLATION NOTES:


1. Drill installation holes to diameter and depth as required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, the contractor may use an 8" x 8" butyl pad or hot melt butyl. Butyl shall be removed as close as possible to pavement surface.

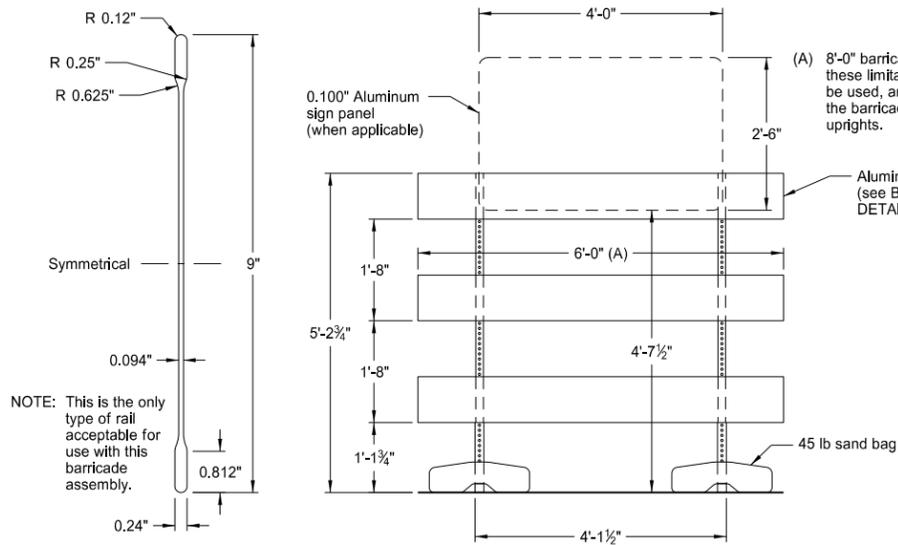

BARRICADE BLADE DETAIL


ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

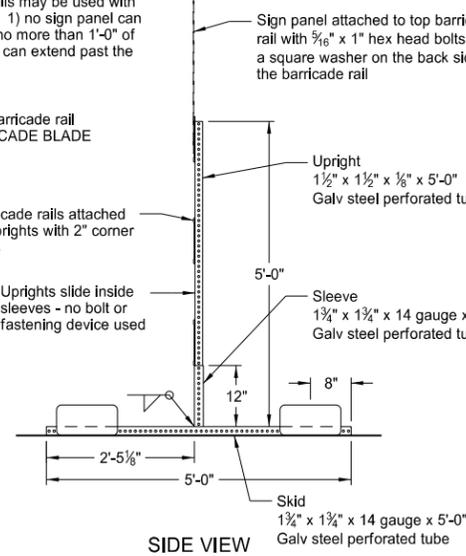

SIDE VIEW

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

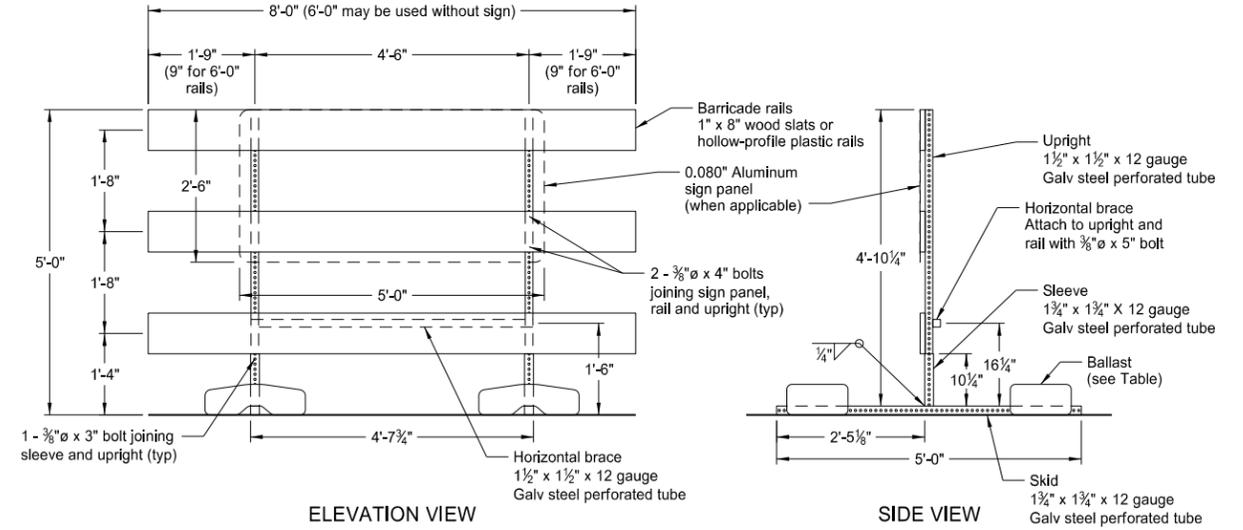

ELEVATION VIEW

SIDE VIEW


BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

MINIMUM BALLAST (For each side of barricade support)


Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags

Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NOTE: Markings for barricades shall be alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Retroreflective sheeting shall be placed on both sides of the rails and shall have a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", the rail stripe width shall be 4".

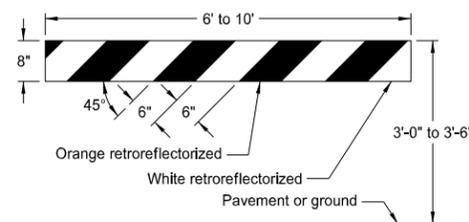


TYPE I BARRICADE

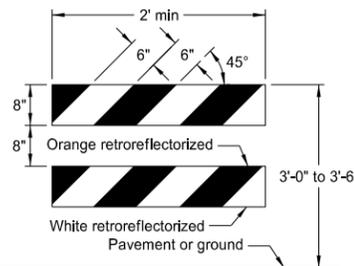


TYPE II BARRICADE

BARRICADE RAIL DETAILS

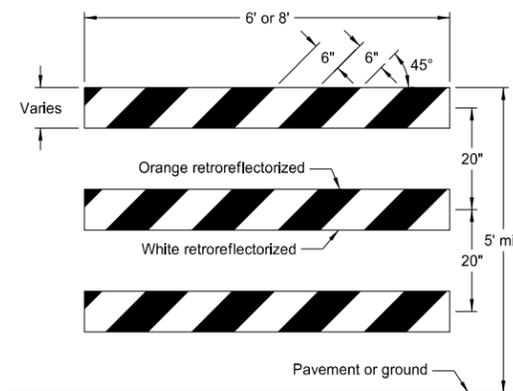

TYPE III BARRICADE

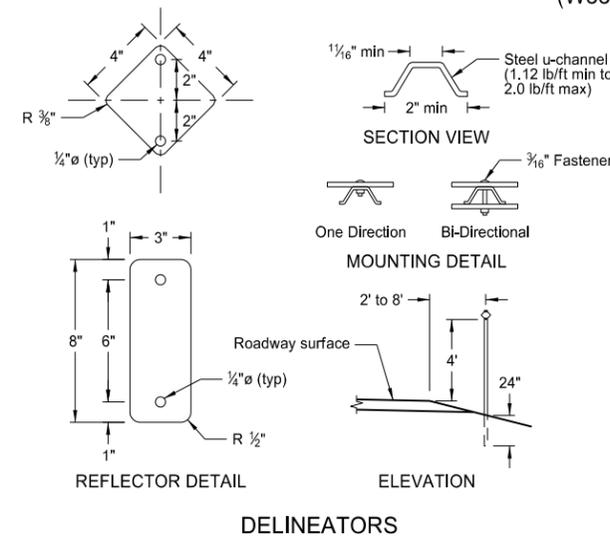

REFLECTOR DETAIL

ELEVATION


DELINEATORS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

SHOULDER CLOSURES AND BRIDGE PAINTING LAYOUTS


D-704-24

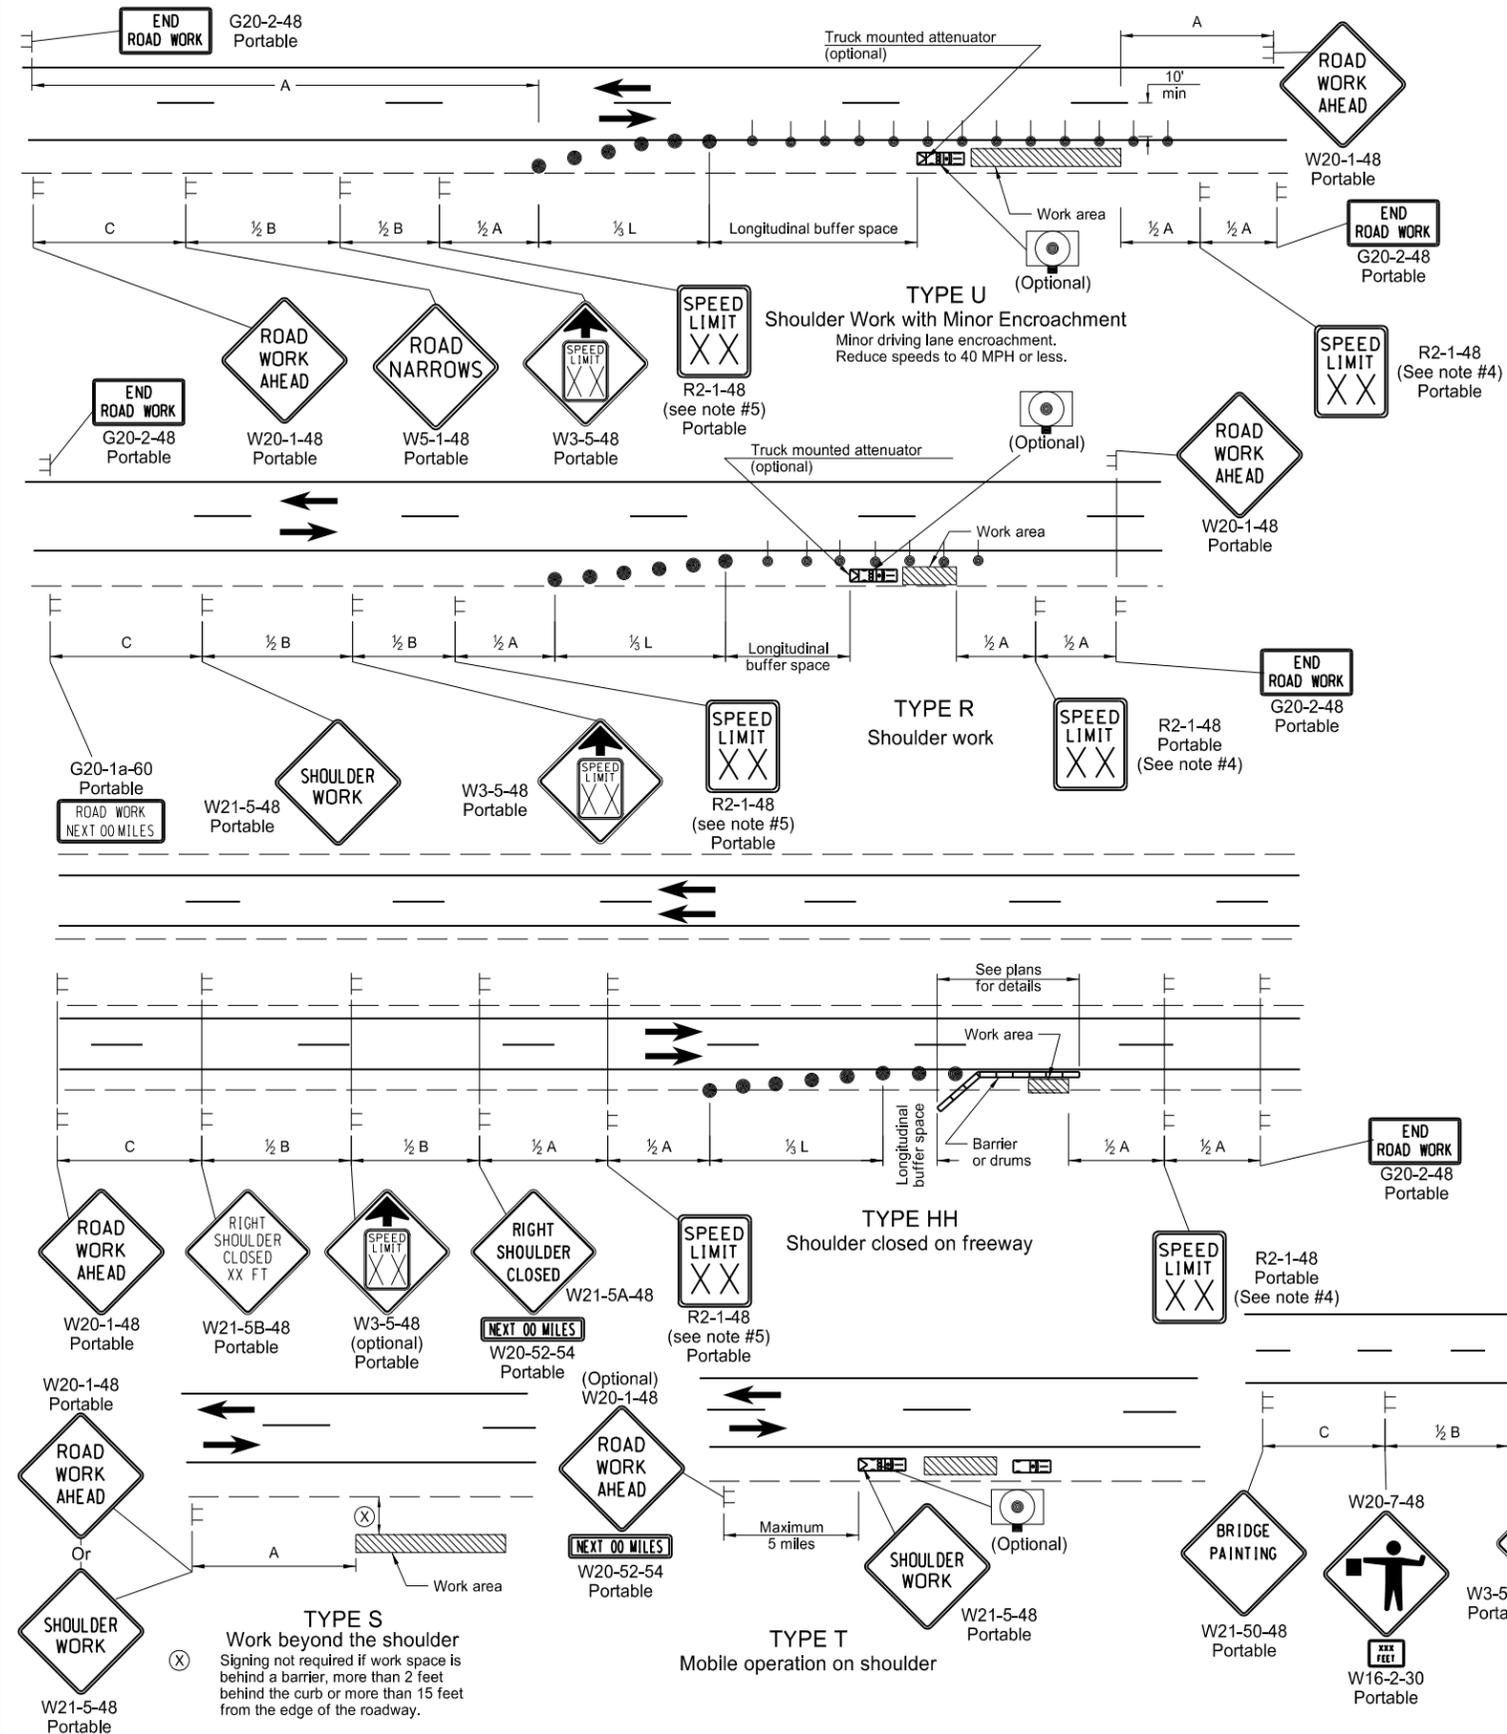

- Notes
- Variables
S = Numerical value of speed limit or 85th percentile.
W = The width of the taper.
L = Minimum length of taper, or $S \times W$ for freeways, expressways, and all other roads with speeds of 45 mph or greater, or $W \times S^2 / 60$ for urban, residential, and other streets with speeds of 40 mph or less.
 - Delineator drums used for tapering traffic shall be spaced at dimension "S".
Delineator drums or tubular markers used for tangents shall be spaced at 2 times "S".
 - Sequencing Arrow Panels
Type A shall be used on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
Type B shall be used on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
Type C shall be used on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
 - The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
 - The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at $\frac{1}{2}B$.
 - When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 - Existing speed limit signs within a reduced speed zone shall be covered.
 - The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.

Longitudinal Buffer Space	
Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

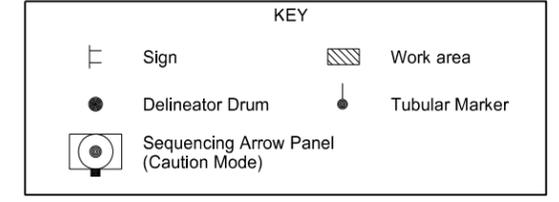


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by
 Roger Weigel
 Registration Number
 PE-2930,
 on 09/27/13 and the original document is stored at the
 North Dakota Department
 of Transportation

SIGN LAYOUT FOR ONE LANE CLOSURE

D-704-34

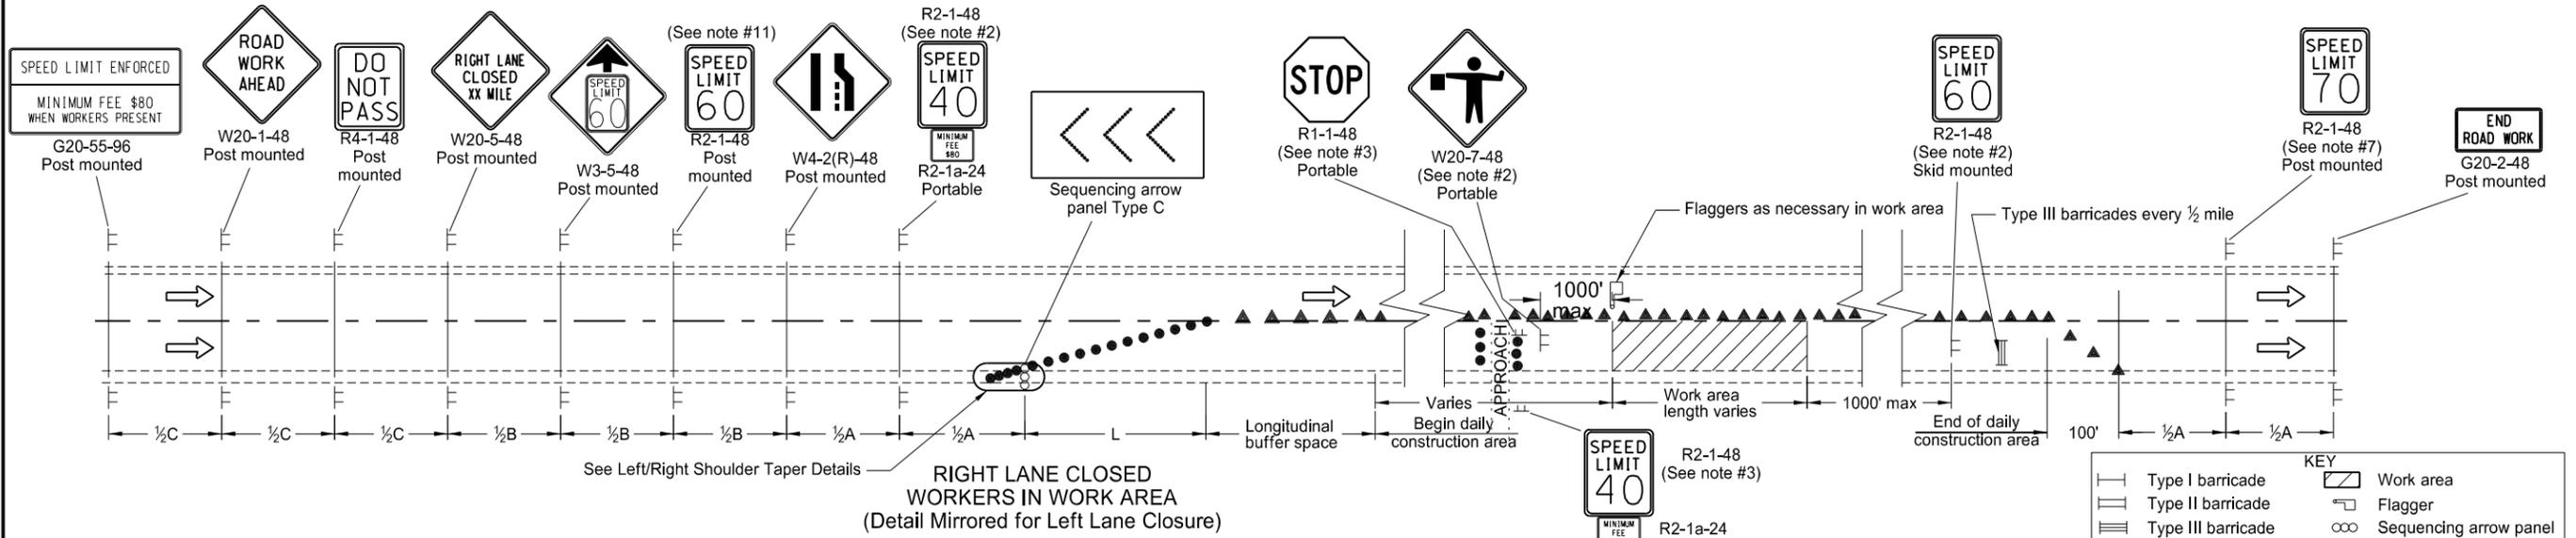

- Notes:
- Advance signs for flagging should be installed when flaggers are present.
 - The advanced flagger sign and the speed limit signs shall be moved as the work area moves through the construction zone. When the work area is not visible from the flagger, the flagger station shall be placed so the work area is visible. The 40 mph speed limit sign shall be spaced at 1/2A in advance of the flagger sign. The 60 mph speed limit sign shall also be moved. Upon completion of the work day or when workers are not present, the 40 mph speed limit and the Minimum Fee \$80 signs shall be covered or removed. The exact speed limit shall be determined in the field, dependent on location and conditions.
 - Approaches: When the work area encompasses an approach, the approach shall be controlled by installing a 40 mph speed limit sign. If this approach is on the side of the lane closure, the existing stop sign shall be covered and a new portable stop sign shall be installed. When the main line 40 mph speed zone is moved past the approach, the approach speed limit sign shall be removed.
 - Variables:
 S=Numerical value of speed limit or 85th percentile
 W=The width of taper.
 L=Minimum length of taper, or SxW for freeways, expressways, and all other roads with speeds of 45 mph or greater, or (WxSxS)/60 for urban, residential, and other streets with speeds of 40 mph or less.
 - Delineator drums, used for tapering traffic shall be spaced at the dimension "S". Tubular markers used for tangents shall be spaced at 2 times dimension "S".
 - Sequencing arrow panels should normally be placed at the beginning of the taper. Where shoulder width does not provide sufficient room, the panel should be moved closer to the work area so that it can be placed on the roadway surface.
 Type A shall be used on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
 Type B shall be used on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
 Type C shall be used on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
 - The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
 - Existing speed limit signs within a reduced speed zone shall be covered.
 - When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 - The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 mph. Where speed limits are to be reduced more than 30 mph, a second speed limit sign shall be installed with the desired speed reduction, but shall not exceed 30 mph. The second speed limit sign shall be placed at 1/2B.
 - The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Specifications.
 - Sign G20-55-96 is not required if this standard is part of other traffic control layouts or the work is less than 15 days.

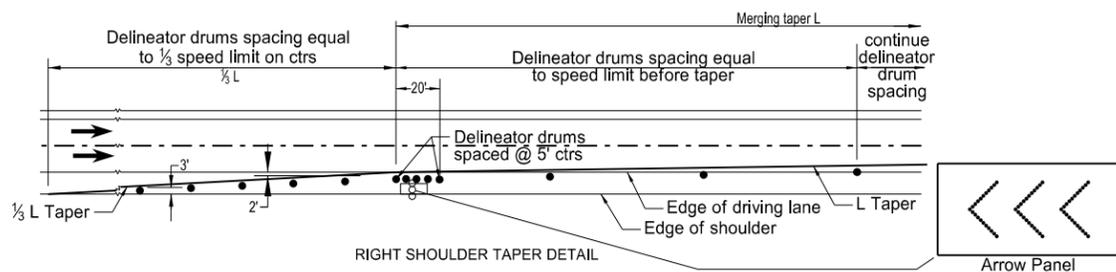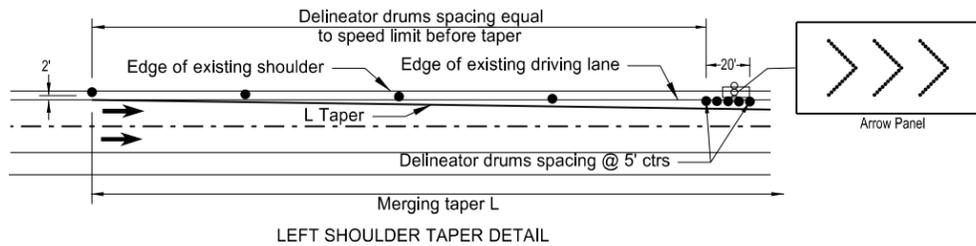

Speed (mph)*	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820


*Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

Road Type	Distance Between Signs Min (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-26-2012	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 9/26/2012 and the original document is stored at the North Dakota Department of Transportation


EROSION AND SILTATION CONTROLS
MEDIAN OR DITCH INLET PROTECTION

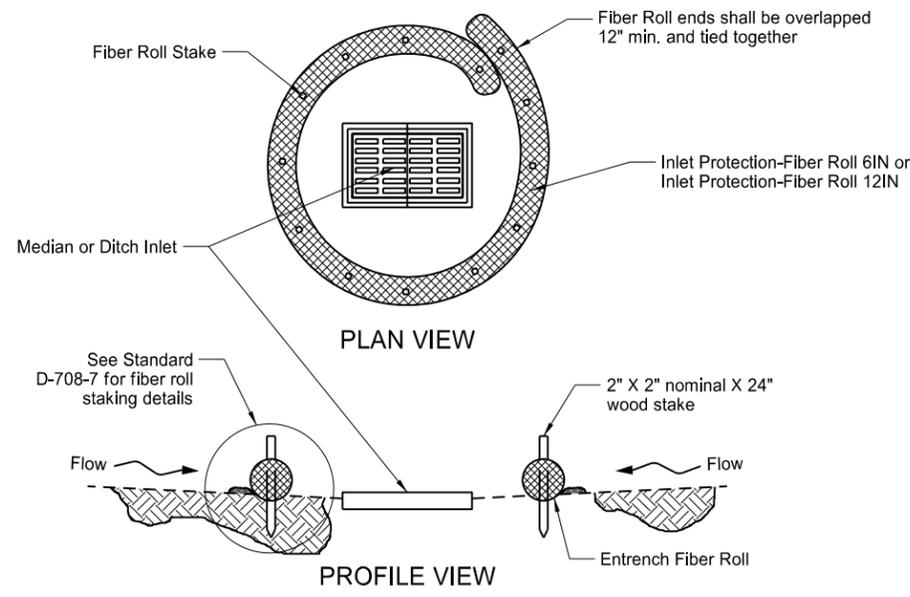


FIBER ROLL PROTECTION (MEDIAN OR DITCH INLET)

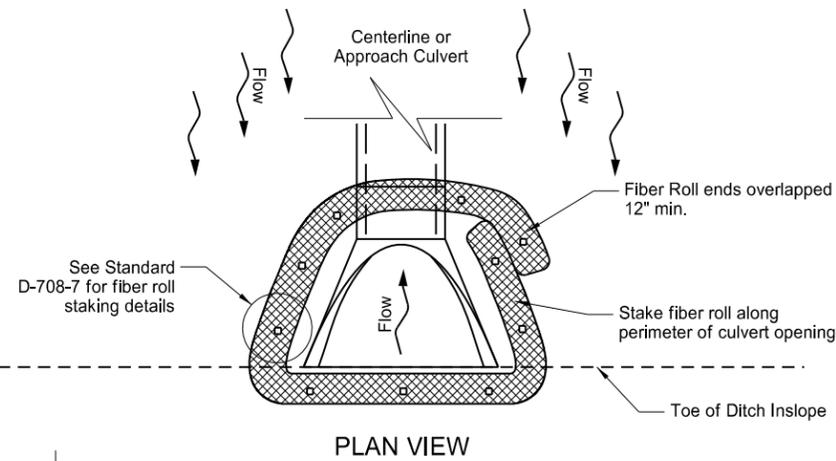


FIBER ROLL PROTECTION (INLET OF CULVERT)

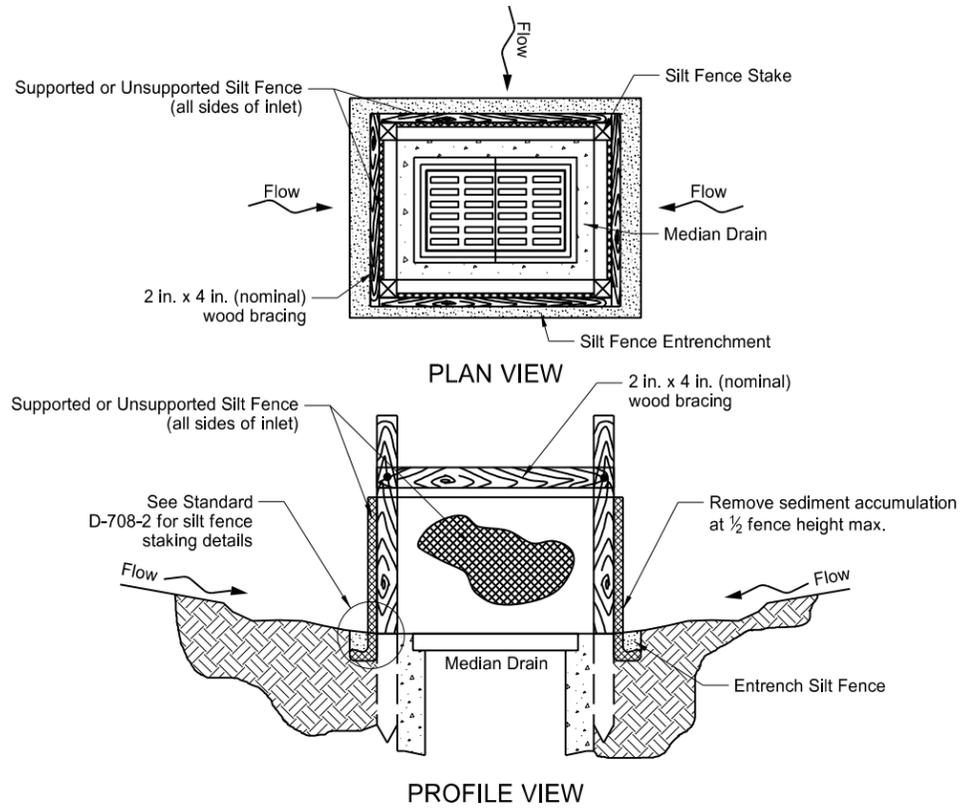


SILT FENCE PROTECTION (MEDIAN OR DITCH INLET)

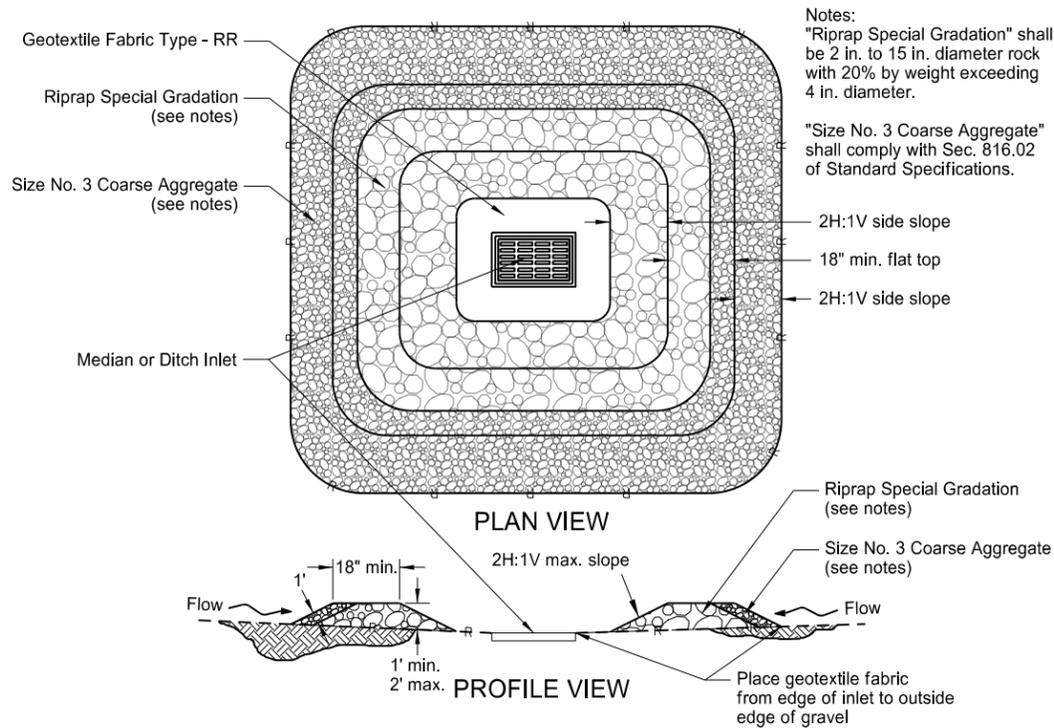

GRAVEL INLET PROTECTION (MEDIAN OR DITCH INLET)

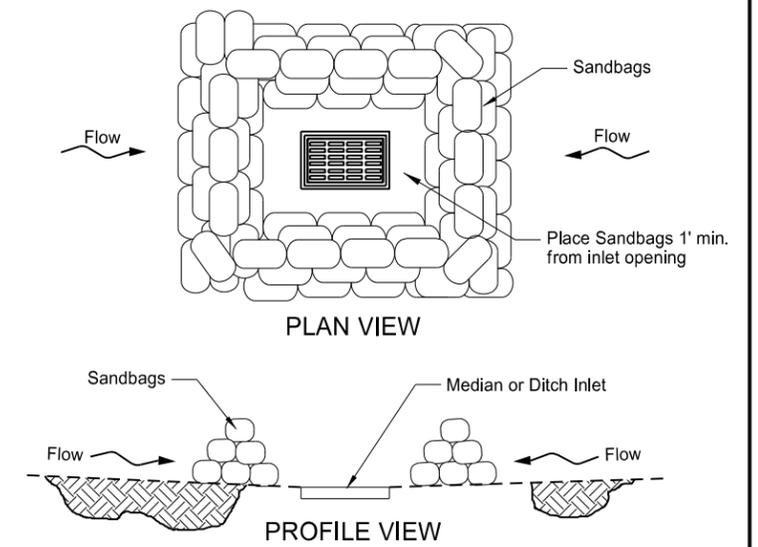

SANDBAG PROTECTION (LOW POINT)

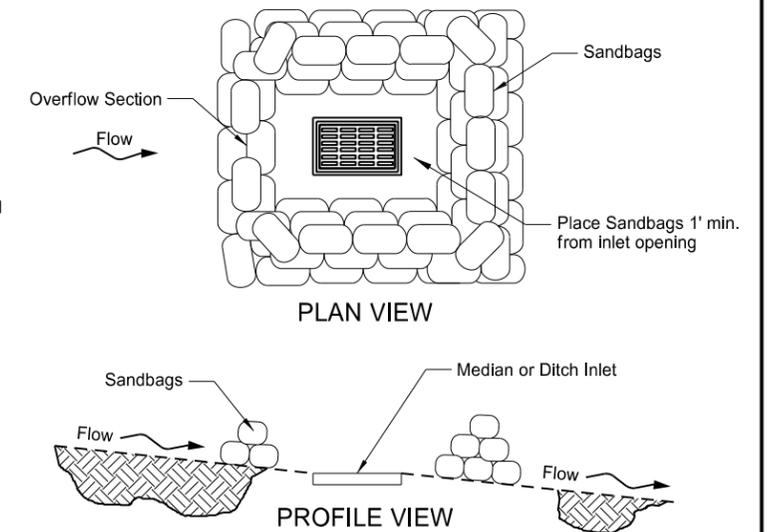

SANDBAG PROTECTION (ON SLOPE)

Notes:
"Riprap Special Gradation" shall be 2 in. to 15 in. diameter rock with 20% by weight exceeding 4 in. diameter.
"Size No. 3 Coarse Aggregate" shall comply with Sec. 816.02 of Standard Specifications.




NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE-4888,
on 10/03/13 and the original document is stored at the North Dakota Department of Transportation

W-BEAM GUARDRAIL GENERAL DETAILS


NOTES:

1. ReflectORIZED plates: Reflector plates shall begin at the first post and be spaced at 25' centers on guardrail less than 250' in length and at 50' centers for guardrail over 250' in length. The reflector shall be the same color as the pavement marking adjacent to that reflector unless noted otherwise on the plans.
2. Manner of replacing bituminous material at guardrail post: All excess earth from excavations for guard posts shall be disposed of as directed by the engineer. Replace bituminous material wherever guardrail is installed after mat has been laid. Cost of excavation and replacing of bituminous material to be included in the price bid for other items.
3. The Object Marker shall fit within the vertical edges of the Impact Plate. The retroreflective sheeting shall be type XI sheeting meeting the requirements of Section 894.02.B of the standard specifications. The sheeting shall be applied to 0.100 Aluminum sheeting meeting the requirements Section 894.01.A. The Object Marker shall attach to the Impact Head Plate with rivets or some other attachment device. The rivets or attachment device shall be non-rust. The stripes shall slope downward toward the roadway side.
4. Guardrail installation height tolerance = $-\frac{1}{4}"$, $+1"$.

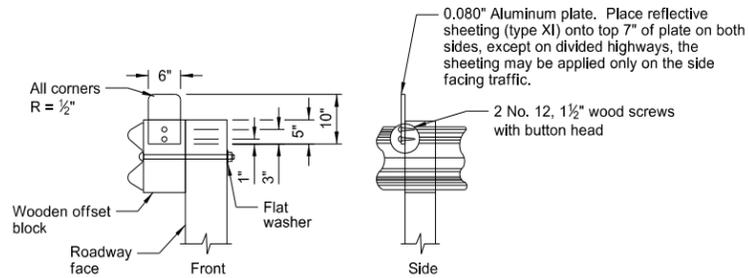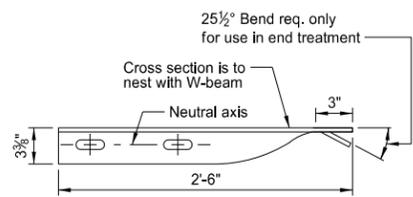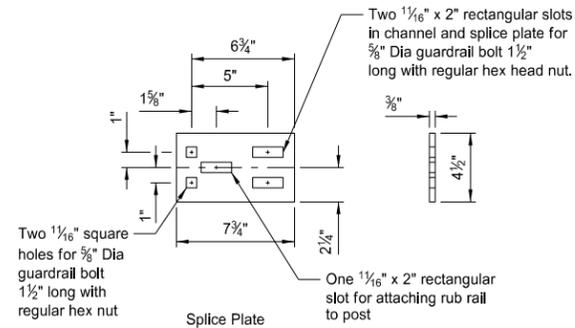


REFLECTORIZED PLATE DETAIL


Additional reflectors are added to the W-beam guardrail quantities for placement on end treatment.

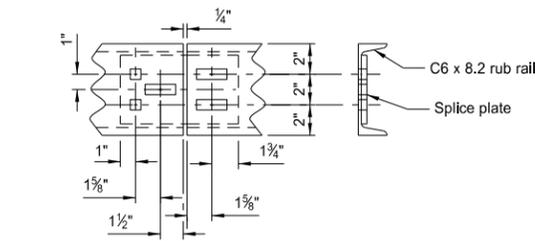


Splice Detail

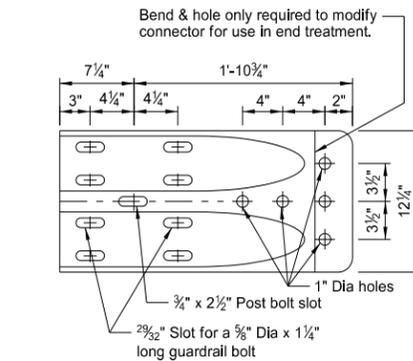


W BEAM TERMINAL CONNECTOR

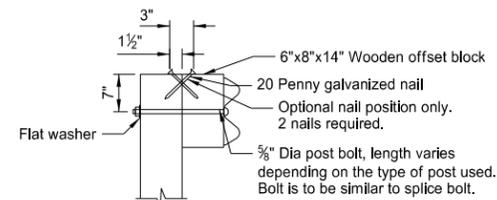


TYPICAL POST ATTACHMENT DETAIL

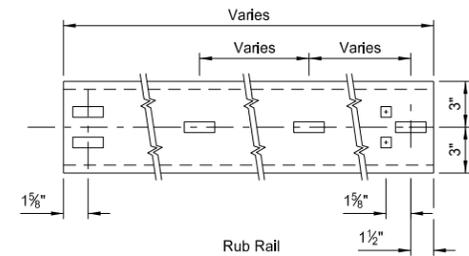


C6x8 RUB RAIL AND SPLICE PLATE

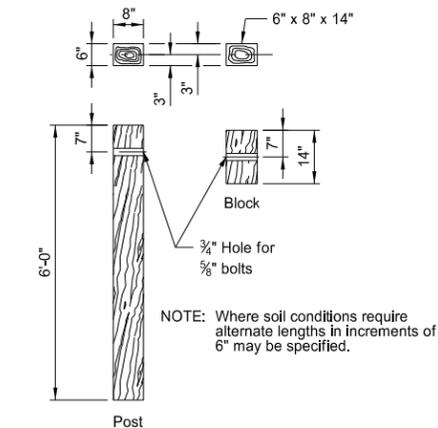


6"x8" TIMBER POST & BLOCK

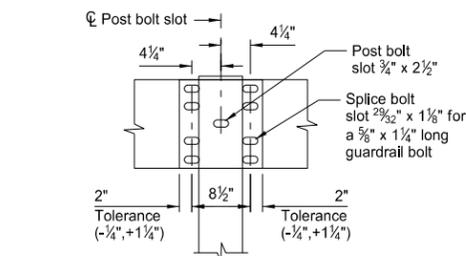

SPLICE DETAIL

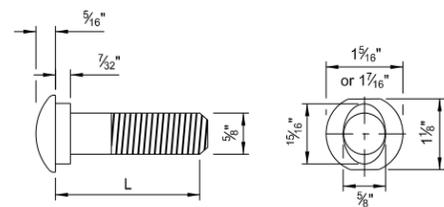


5/8" Diameter Guardrail Bolt	
L	Thread Length
1 1/4"	Full length thread
2"	1 3/4" Min thread length
9 1/2"	4" Min thread length
18"	4" Min thread length
20"	4" Min thread length
22"	4" Min thread length
25"	4" Min thread length




5/8" Diameter Carriage Bolt	
L	Thread Length
1 1/2"	Full length thread
3"	1 1/2" Min thread length
11"	1 3/4" Min thread length
13"	1 3/4" Min thread length



5/8" CARRIAGE BOLT & NUT

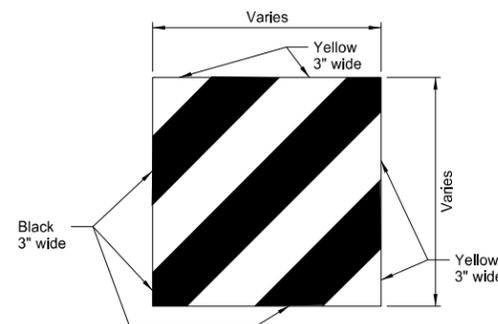

IMPACT HEAD OBJECT MARKER

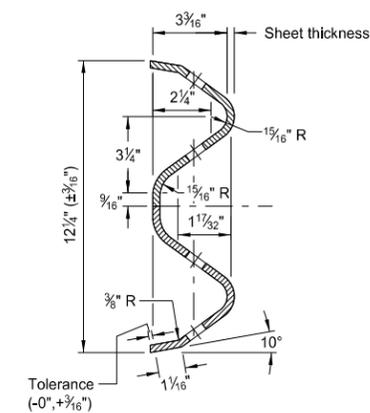


W-BEAM CROSS SECTION

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-11-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/11/13 and the original document is stored at the North Dakota Department of Transportation


ET-PLUS

D-764-4

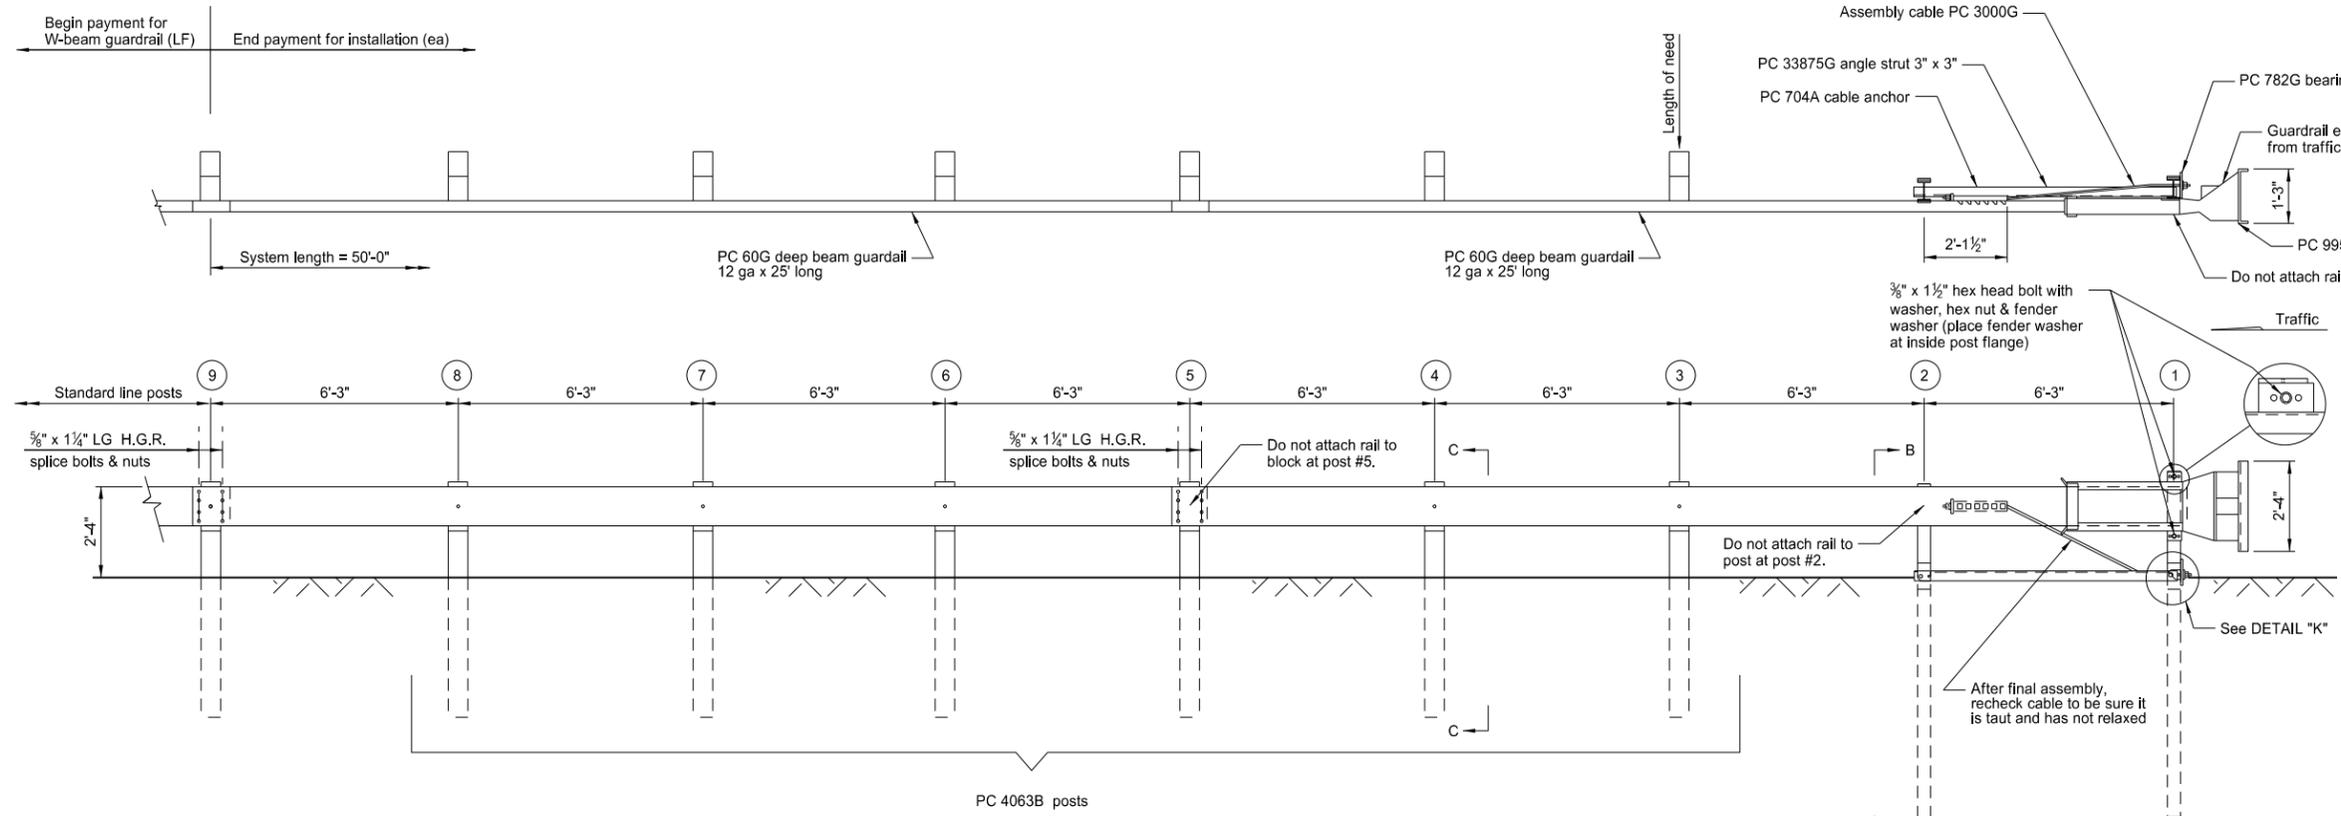


BILL OF MATERIAL		
PC	QTY	DESCRIPTION
60G	1	12/25/6'3"/S (guardrail)
62G	1	12/25/6'3"/S ANC (guardrail)
704A	1	Cable anchor bracket
782G	1	5/8" x 8" x 8" bearing plate
995A	1	ET-plus extruder
3000G	1	Cable 3/4 x 6'-6"
3300G	6	5/8" washer
3340G	22	5/8" hex nut
3360G	16	5/8" x 1 1/4" splice bolt
3580G	6	5/8" x 18" post bolt
3701G	7	3/4" washer
3704G	4	3/4" hex nut
3717G	3	3/4" x 2 1/2" hex head bolt
3718G	1	3/4" x 3" hex head bolt
3900G	2	1" washer
3910G	2	1" hex nut
4063B	6	WD 6'-0" post 6" x 8"
4075B	6	WD block 1'-2" x 6" x 8" DR
4254G	6	3/8" washer
4255G	2	3/8" fender washer (1 1/2 OD)
4258G	4	3/8" lockwasher
4261G	2	3/8" x 1 1/2" hex head bolt
4699G	4	3/4" lockwasher
6321G	4	3/8" x 2" hex head bolt
6405G	6	3/8" hex nut
33871A	1	HBA post #1 top
33872A	1	HBA post #2 top
33873A	2	HBA post #1-#2 bottom
33875G	1	6'-6" angle strut ET HBA

- NOTES:
- Wood posts are required from post #3 to post #9.
 - All bolts, nuts, cable assembly, cable anchors, and bearing plates shall be galvanized.
 - This end terminal shall only be installed at locations where the flare rate is 25:1 or flatter, relative to the traveled way. The end terminal can be flared at a rate of 50:1 for the first 50' of the system to prevent the impact head from encroaching on the shoulder. The 25:1 flare rate is recommended with curb installations. See plans for when taper is used or not.
 - Do not attach guardrail to post #1 or post #2.
 - Do not attach guardrail to post block at post #5.
 - The 5/8" flat washer is used under the nut, behind the post only, no washer is used at the rail.
 - An impact head object marker shall be placed.
 - The wood blockouts shall be "toe nailed" to the rectangular wood posts to prevent them from turning when wood shrinks. The nails shall be 20 penny and galvanized.

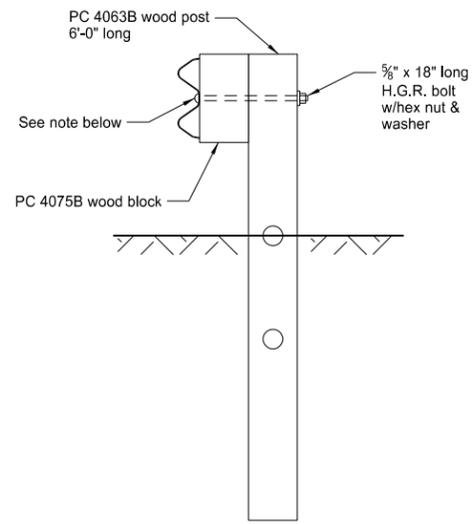


Note:
Section "C-C" is similar at post #5, but the rail is not attached.


SECTION "C-C"
(TYP @ POSTS #3, 4, 6, 7 & 8)

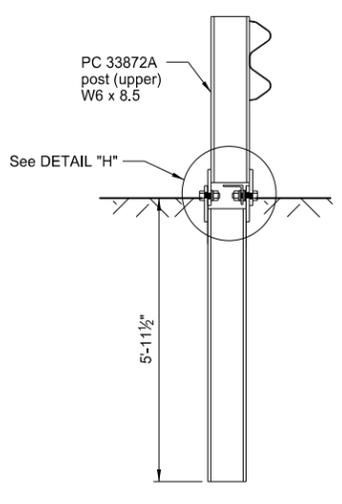


SECTION "B-B"
(POST #2)

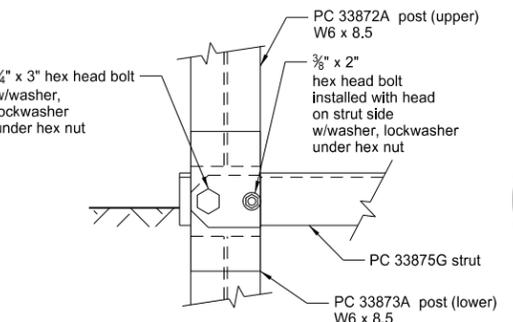


VIEW "H-H"

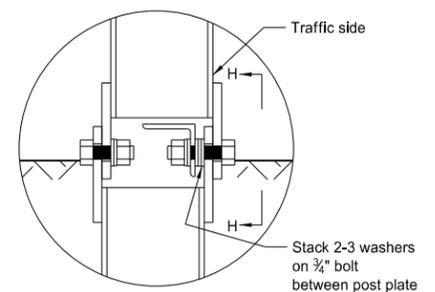

DETAIL "H"
(POST #2)

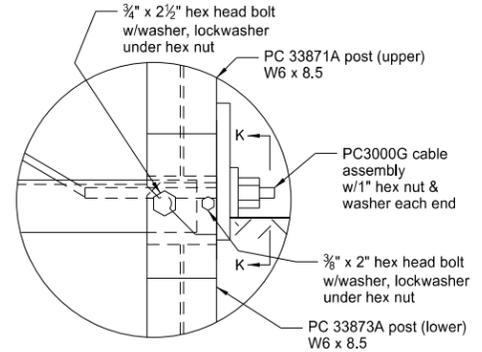

DETAIL "K"
(POST #1)




VIEW "K-K"

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-11-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 10/11/13 and the original document is stored at the
North Dakota Department
of Transportation

SPECIAL W-BEAM GUARDRAIL ANCHOR


D-764-14





BCT ANCHOR PLATE




SECTION B-B

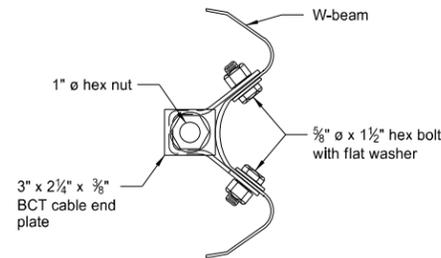


BCT CABLE END PLATE




BEARING PLATE




POST SLEEVE

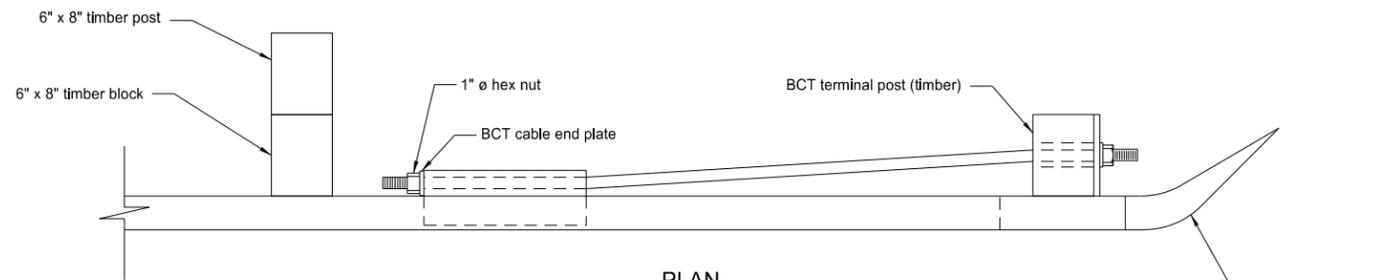


PLAN

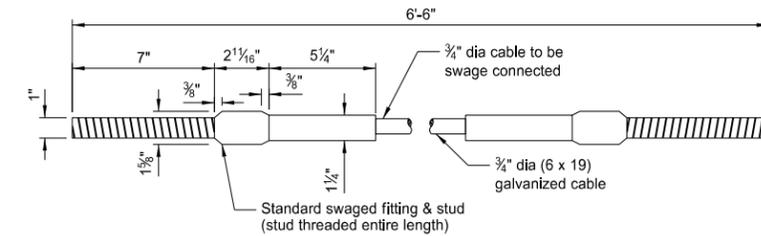


BCT CABLE ASSEMBLY

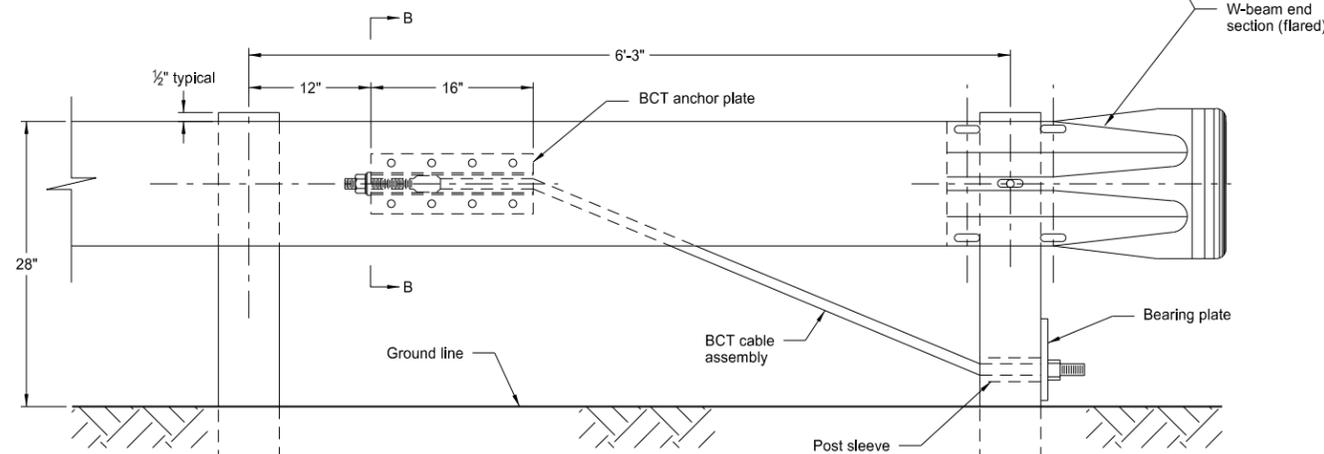

ELEVATION

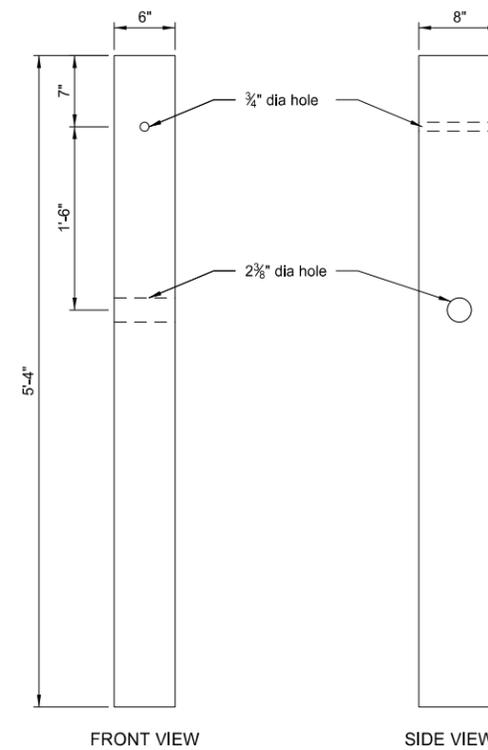

BCT TERMINAL POST DETAILS

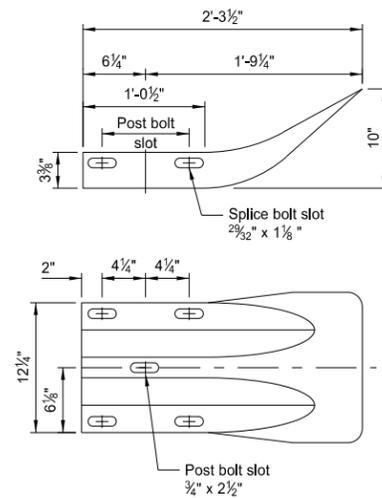


W BEAM END SECTION (FLARED)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-11-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/11/13 and the original document is stored at the North Dakota Department of Transportation


SHORT TERM END TREATMENT FOR BRIDGES
(GUARDRAIL METHOD)

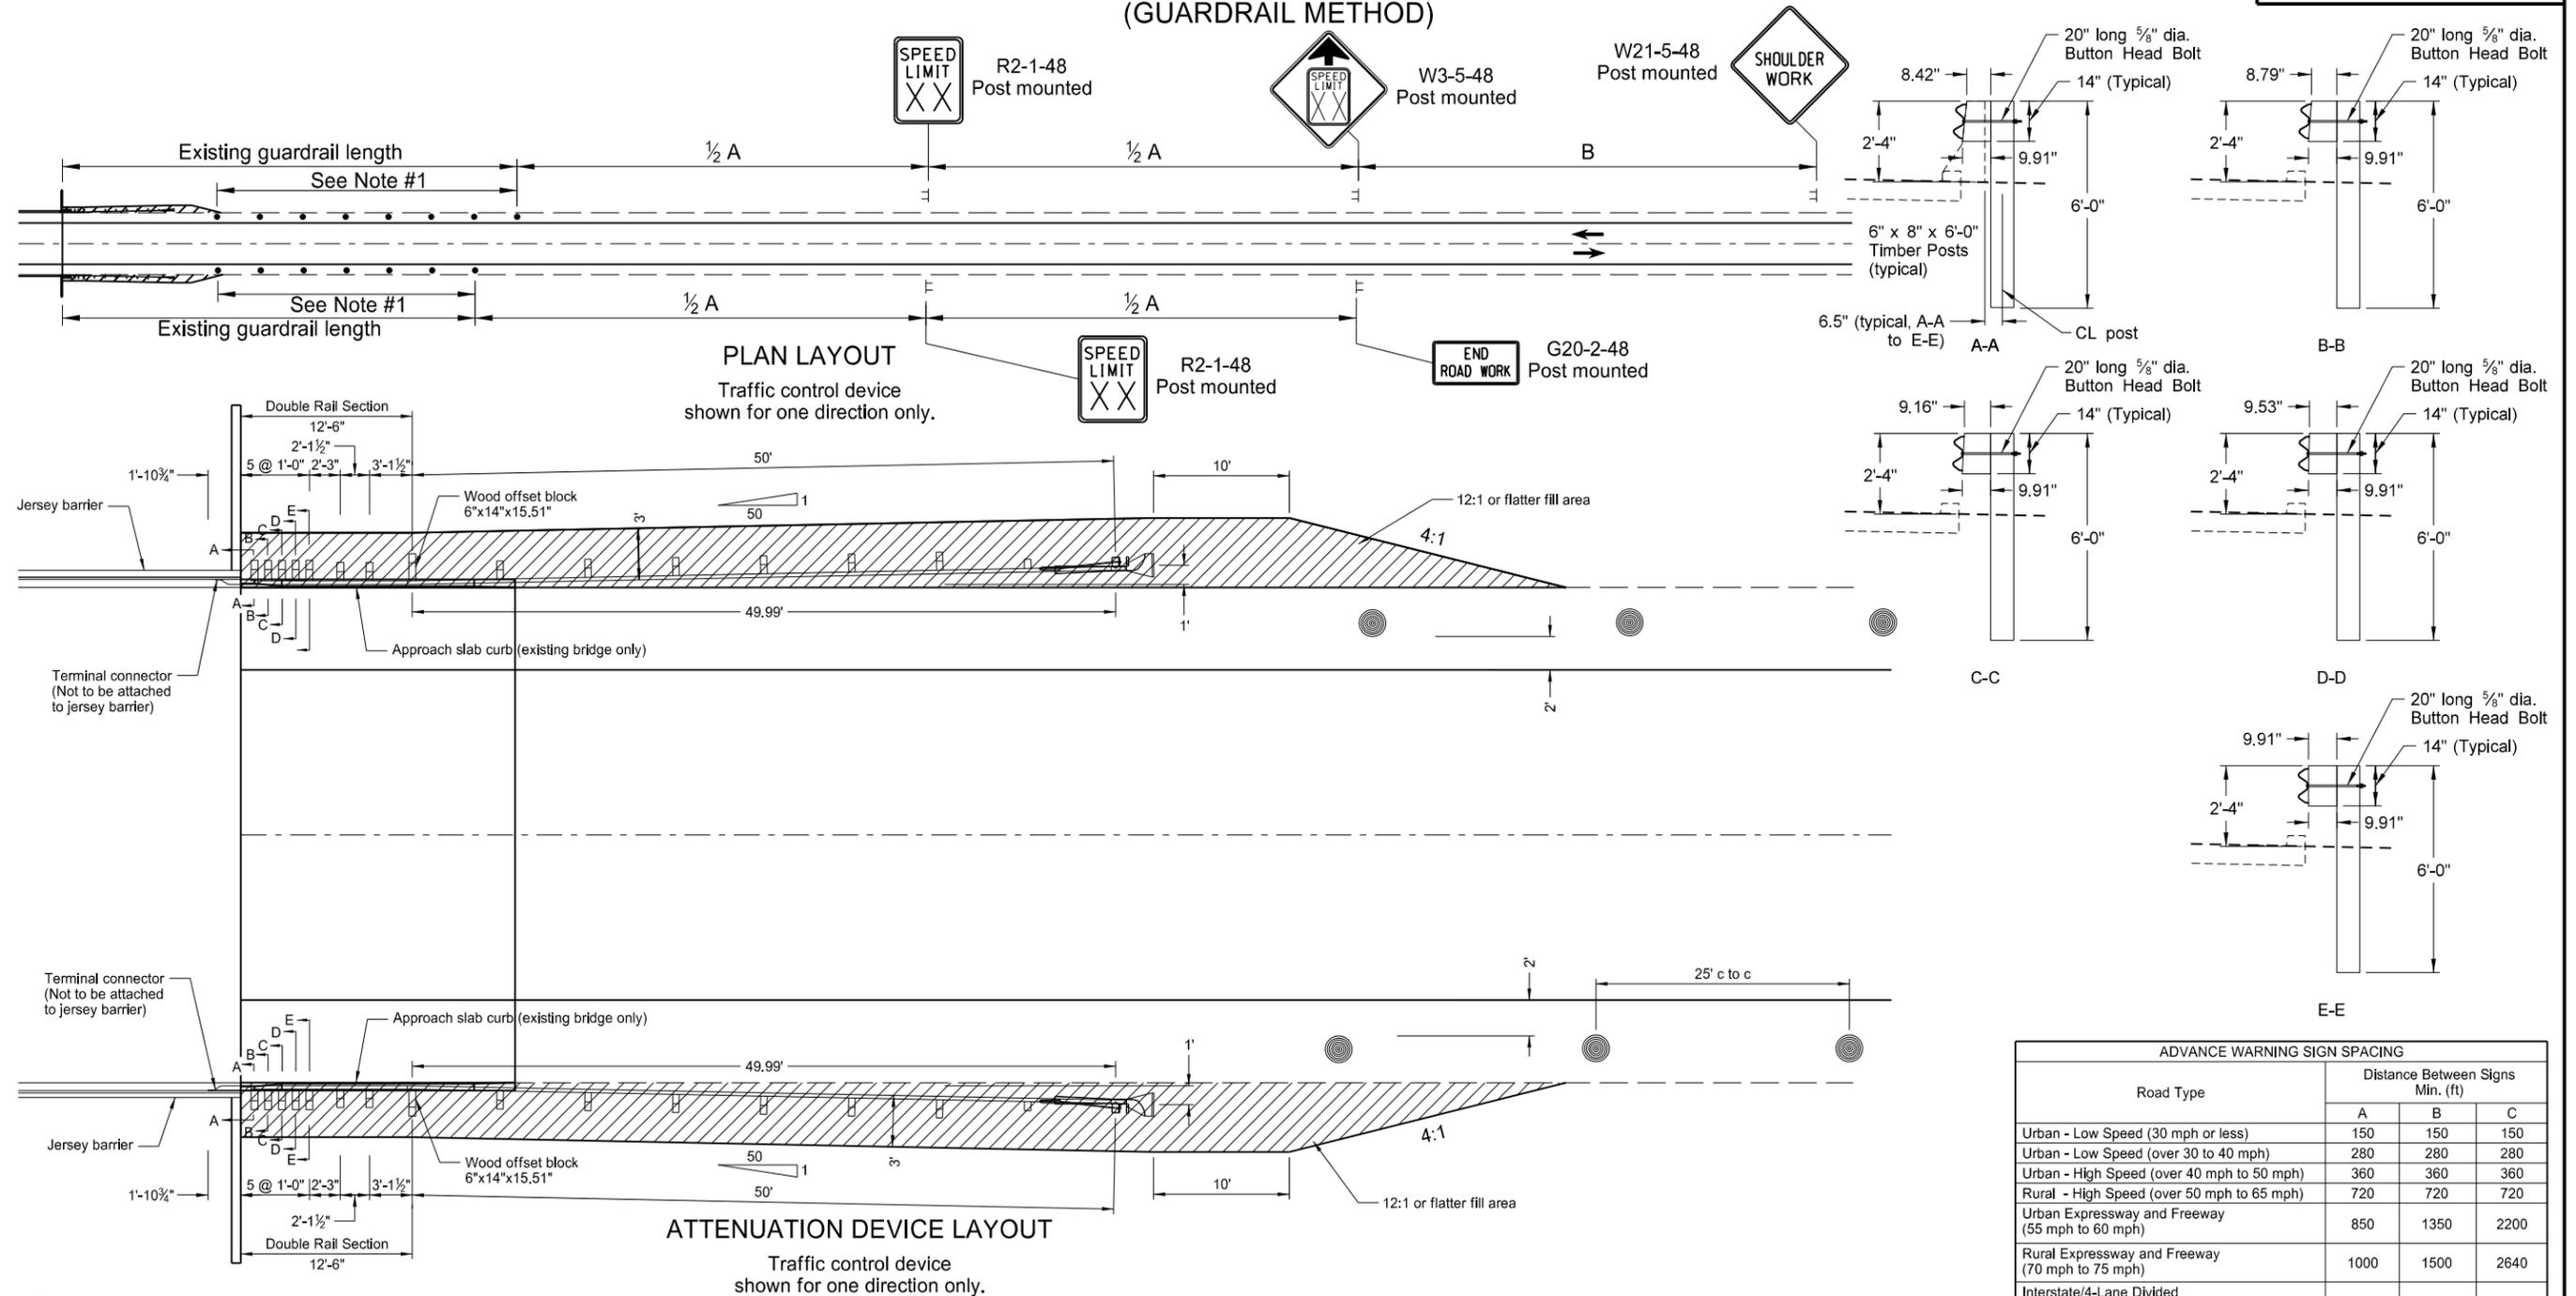

Notes

1. If the shoulder width is less than 3', vertical panels shall be used in place of delineator drums and placed as far from the driving lane as possible and still be on the finished shoulder. When there is no shoulder, the vertical panels shall be placed as near as possible to the driving lane on the foreslope of the shoulder.
2. If the bridge is within construction zone signing, the reduced speed ahead sign can be eliminated.
3. The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 mph. Where speed limits are to be reduced more than 30 mph, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 mph. The second speed limit shall be placed at $\frac{1}{2} B$.

4. The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
5. Existing speed limit signs within a reduced speed zone shall be covered.




Road Type	ADVANCE WARNING SIGN SPACING		
	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
 Roger Weigel
 Registration Number
 PE-2930,
 on 09/27/13 and the original document is stored at the
 North Dakota Department
 of Transportation

TYPICAL GRADING AT OBSTRUCTIONS
WITH W-BEAM GUARDRAIL


D-764-23

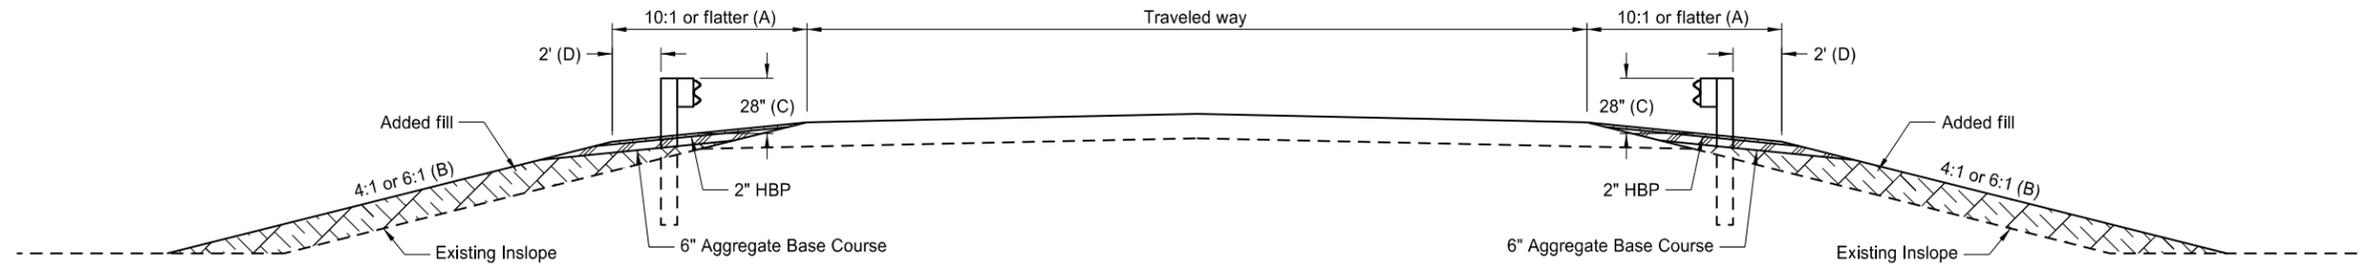


TYPICAL SECTION

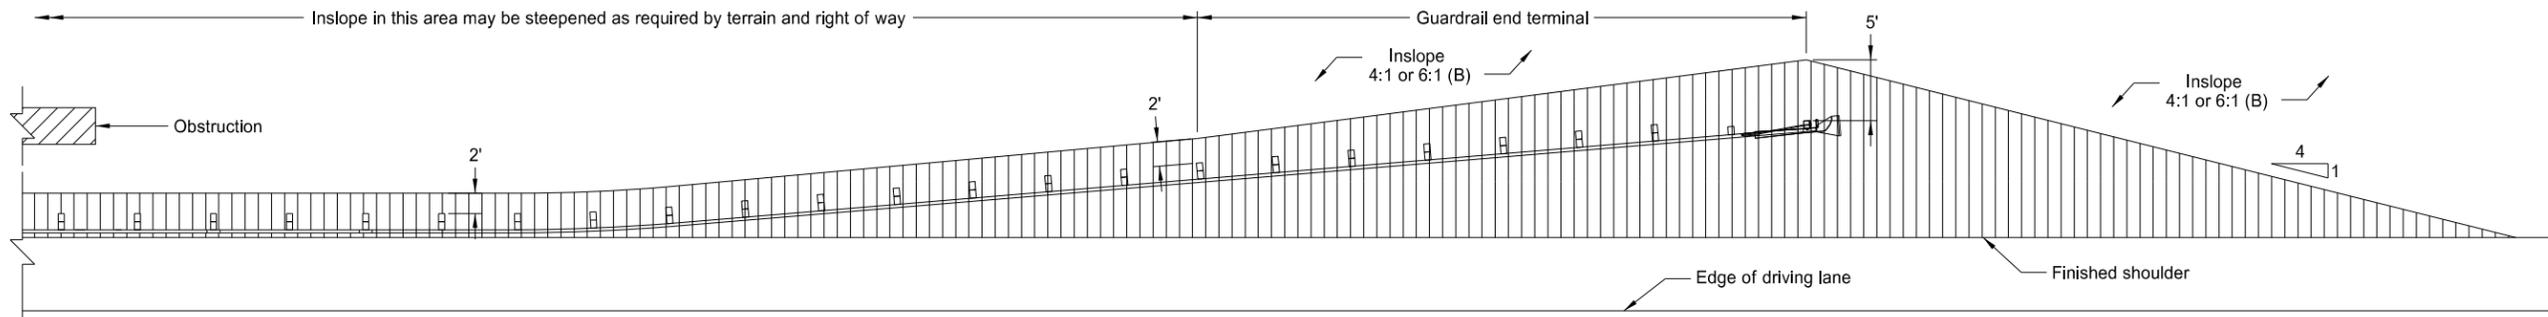

PLAN LAYOUT
FLARED GUARDRAIL WITH END TERMINAL

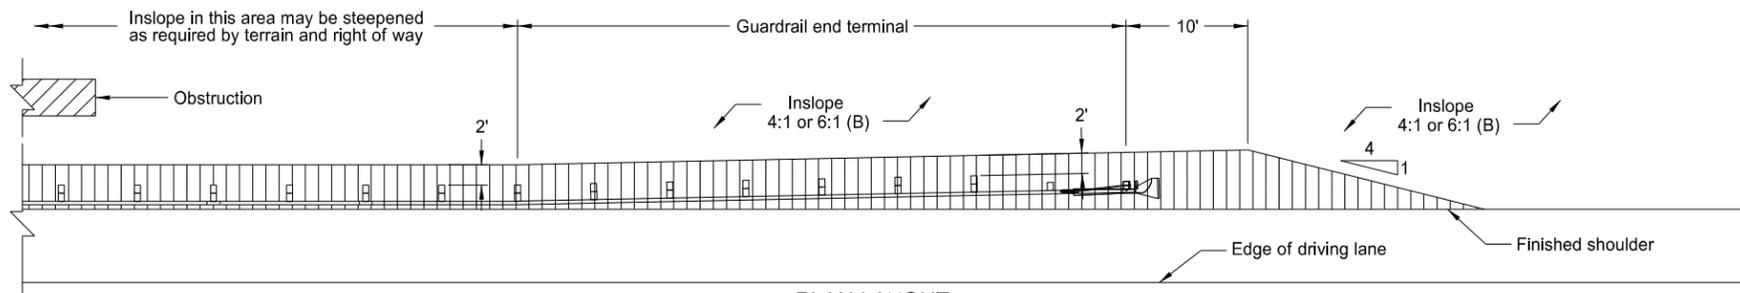

PLAN LAYOUT
NON-FLARED GUARDRAIL TANGENT END TERMINAL

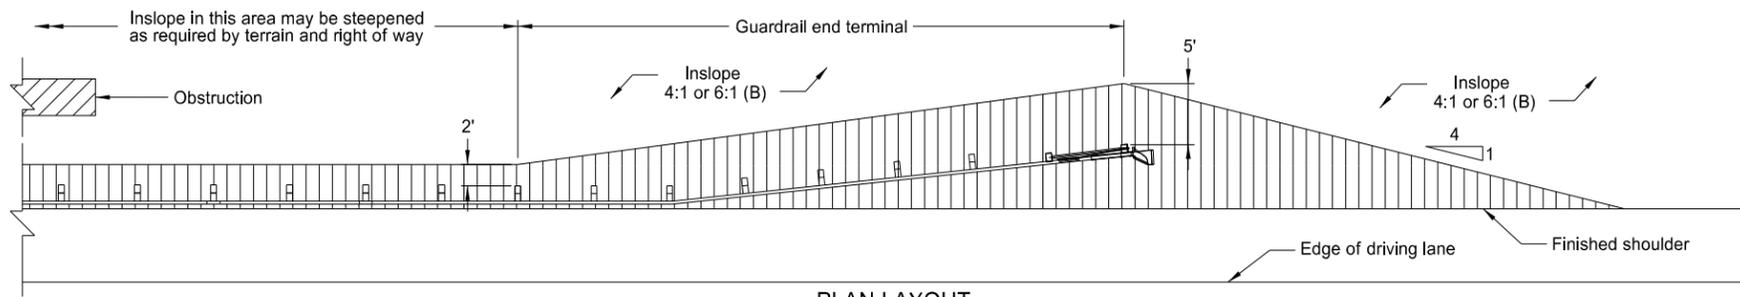

PLAN LAYOUT
NON-FLARED GUARDRAIL WITH FLARED END TERMINAL

NOTES:

- (A) Slope flatter than 10:1 may be required to provide proper guardrail height.
- (B) Where normal inslope is 4:1 the added fill shall be 4:1. Where normal inslope is 6:1 the added fill shall be 6:1.
- (C) Measured from top of guardrail to top of surfacing at front face of guardrail.
- (D) Dimension at end terminals may vary per Plan Layouts shown on this sheet.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10-3-13 and the original document is stored at the North Dakota Department of Transportation