



JOB # 19
NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	21120	1	1

ITS-9-999(351)
 Burleigh, Ward, and Grand Forks Counties
 US 2: RP 354.59 EB
 US 83: RP 91.748 SB & RP 203.994 NB
 ITS - Dynamic Message Signs

GOVERNING SPECIFICATIONS:
 2014 Standard Specifications adopted by the North Dakota
 Department of Transportation and the Supplemental Specifications
 effective on the date the project is advertised.

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
ITS-9-999(351)	N/A	N/A

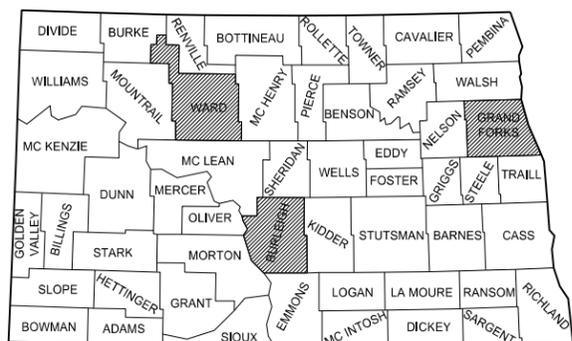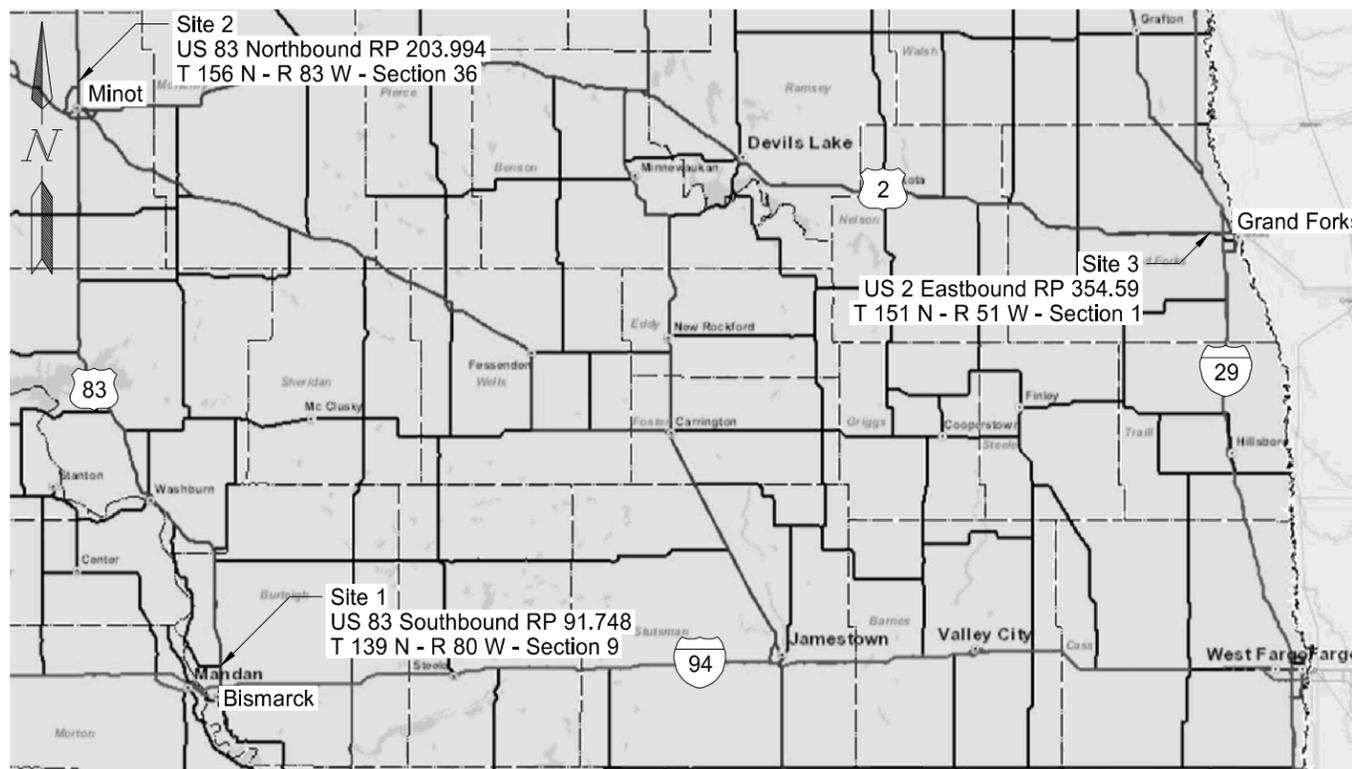

STATE COUNTY MAP

DESIGNERS

Aaron Murra /s/

Joe Wagner /s/

I hereby certify that the attached plans were prepared by me or under my direct supervision and that I am a duly registered professional engineer under the laws of the state of ND.

APPROVED DATE 11/24/15

James Rath /s/
 NDDOT Design Division

This document was originally issued and sealed by
 James Rath
 Registration Number
 PE- 4288,
 on 11/24/15 and the original document is stored at the
 North Dakota Department
 of Transportation

APPROVED DATE 11/24/15

Roger Weigel /s/
 OFFICE OF PROJECT DEVELOPMENT
 ND DEPARTMENT OF TRANSPORTATION

TABLE OF CONTENTS

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	ITS-9-999(351)	2	1

PLAN SECTIONS

LIST OF STANDARD DRAWINGS


SECTION	SHEET	DESCRIPTION
1	1	Title Sheet
2	1	Table of Contents
4	1	Scope of Work
6	1 - 2	Notes
6	3	Environmental Commitments
8	1	Quantities
75	1	Wetland Impacts
76	1	Temporary Erosion Control
100	1	Work Zone Traffic Control
110	1 - 3	Signing
160	1 - 8	ITS

STANDARD NO.	DESCRIPTION
D-101-1, 2, 3	NDDOT Abbreviations
D-101-10	NDDOT Utility Company and Organization Abbreviations
D-101-20, 21	Line Styles
D-101-30, 31, 32	Symbols
D-261-1	Erosion Control - Fiber Roll Placement Details
D-704-7	Breakaway Systems For Construction Zone Signs - Perforated Tube
D-704-8	Breakaway Systems For Construction Zone Signs - U-Channel Post
D-704-9	Construction Sign Details - Terminal And Guide Signs
D-704-10	Construction Sign Details - Regulatory Signs
D-704-11	Construction Sign Details - Warning Signs
D-704-13	Barricade And Channelizing Device Details
D-704-14	Construction Sign Punching And Mounting Details
D-704-24	Shoulder Closures And Bridge Painting Layouts
D-704-50	Portable Sign Support Assembly
D-754-9	Letter And Arrow Details For Variable Length Signs
D-754-13	Breakaway System Structural Details For W-Shape Supports
D-754-23	Perforated Tube Assembly Details
D-754-24	Mounting Details Perforated Tube
D-754-24A	Breakaway Coupler System For Perforated Tubes
D-754-27	Sign Punching, Stringer And Support Location Details Regulatory, Warning, And Guide Signs
D-754-49	Sign Punching, Stringer And Support Location Details For Variable Length Signs
D-770-1	Concrete Foundations (Traffic Signals & Highway Lighting)
D-770-2	Feed Points (Roadway Lighting)
D-770-4	Lighting And Signal Details
D-770-5	Light Standard Details

SPECIAL PROVISIONS

SP NO.	DESCRIPTION
SP 247(14)	Full Matrix LED Based Dynamic Message Sign Front Access
SP 250(14)	Surveillance Camera

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	4	1

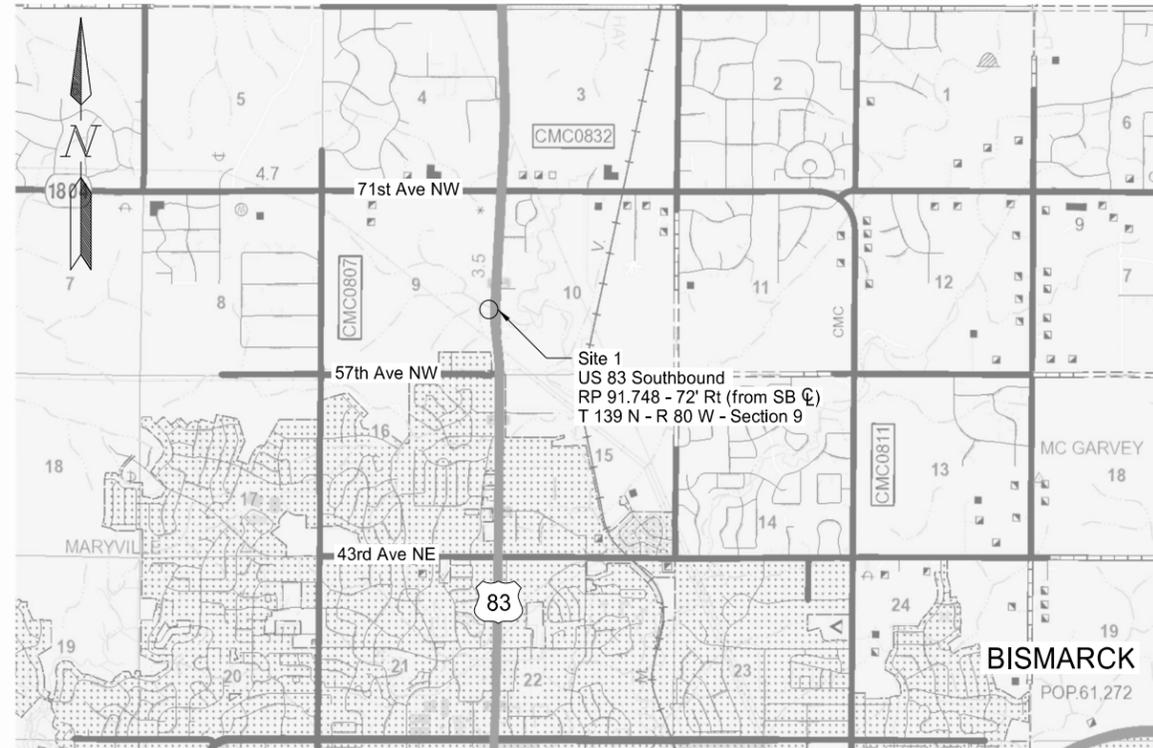

This document was originally issued and sealed by
 Aaron Murra
 Registration Number
 PE- 6536,
 on 11/24/15 and the original document is stored at the
 North Dakota Department
 of Transportation

Scope of Work
 ITS - Dynamic Message Signs

NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	6	1

200-P01 TOPSOIL, SEEDING, & MULCHING: Evenly spread the existing topsoil and provide seed and mulch for the entire area disturbed by trenching and other operations. Use Class II seeding and Straw Mulch. Include all costs associated with topsoil, seeding, and mulching in the unit price bid for “Dynamic message Sign – Post Mounted.”

704-P01 TEMPORARY TRAFFIC CONTROL: Traffic control consists of a temporary shoulder closure at each site. Provide traffic control devices that comply with the following Standard Drawing:

D-704-24 Layout Type HH or Layout Type S

Quantities in the plans reflect setup of three locations for traffic control devices.

Vehicles and equipment are not allowed within 15 feet from the edge of the roadway if Layout Type S is used.

754-P01 DYNAMIC MESSAGE SIGN STRUCTURE: Vertical and horizontal dimensions of the supporting structure to the roadway are shown in the plans. Conform to the requirements of Section 894.05 A and B for the supporting structure. The supports will require post mounting on breakaway bases. Determine actual sign support lengths by field measurement. Standard drawing D-754-13 shows the standard size for the W-shape support. Furnish all necessary calculations and drawings used to manufacture the supporting structure and foundation with the shop drawings.

Design the sign supports to a soil pressure of 500 psi.

Do not inhibit access to the sign with vertical and horizontal supports.

Include all costs to manufacture, submit calculations and drawings, and install the Dynamic Message Signs in the price bid for “Dynamic message Sign – Post Mounted.”

754-P02 DYNAMIC MESSAGE SIGN STRUCTURE: The DMS structures will not require a walkway or handrail.

754-P03 DYNAMIC MESSAGE SIGN COMMUNICATIONS: Wireless Code Division Multiple Access (CDMA) communication will be the communications link between the DMS Sign Controller and the state network. Provide a CDMA 1X EV-DO LTE Digital Cellular modem that conforms to NTCIP 2202 Internet Transport Profile and NTCIP 2104 Ethernet Profile over a 10/100 Ethernet connection. Provide a 10/100 Ethernet communications port with RJ45 connector that will support data rates of 10 mb and 100 mb. Provide a CDMA 1X EV-DO LTE Digital Cellular modem that can provide an “Always On” connection with a wireless cell phone carrier and be capable of being remotely managed through the CDMA Network.

Contact the NDDOT Telecomm/Radio Shop at 1-701-328-6973 for assistance with CDMA modem and connection to state network. Include all costs to furnish and install the CDMA 1X EV-DO LTE Digital Cellular modem in the unit price bid for “Dynamic message Sign – Post Mounted.”

754-P04 DYNAMIC MESSAGE SIGN TYPES: Provide color walk-in DMS boards and include all costs associated with them in the unit price bid for “Dynamic message Sign – Post Mounted.”

754-P05 DYNAMIC MESSAGE SIGN RODENT PROTECTION: Follow provisions for rodent protection as found in Section 772.04 G.5 of the Standard Specifications.

754-P06 STEEL CONDUIT - DYNAMIC MESSAGE SIGN: Provide steel conduit for all conduit above ground at the dynamic message sign. Include all costs associated with Steel Conduit in the unit price bid for “Dynamic message Sign – Post Mounted.”

754-P07 CONTROLLER FOUNDATION & WORKING SLABS: Construct the controller cabinet foundations according to standard drawing D-770-1 using the “Controller Cabinet Foundation Pad Mount” detail.

Provide two working slabs at each controller cabinet. Construct so there is a working slab on the front and back side of each controller cabinet. Construct the working slabs according to standard drawing D-770-1 using the “Working Area Slab” detail.

Include all work necessary to construct concrete foundations and working slabs in the unit price bid for “Dynamic message Sign – Post Mounted.”

754-P08 DYNAMIC MESSAGE SIGN FEED POINTS: Provide and bear all costs for the electrical service necessary to operate and maintain the DMS system until the site is accepted by the Engineer. Include all work necessary to construct the feed point cabinets, including concrete foundations in the unit price bid for “Dynamic message Sign – Post Mounted.”

754-P09 MULTIPLE UNDERGROUND CABLE: The plans call for using Multiple Underground Cable in various locations. In lieu of the Multiple Underground Cable, the contractor may furnish and install rigid conduit and single RHW conductors of the same size as shown in the plans for the Multiple Underground Cable.

Provide conduit size as specified in the National Electric Code. Include all materials, equipment, and labor required to install conduit and conductors in the unit price bid for “Dynamic message Sign – Post Mounted.”

770-100 CONCRETE FOUNDATIONS: Install and tighten anchor bolts as specified in Section 754.04 D.5, “Overhead Sign Structures.”

770-P01 LIGHT STANDARD: Design the light standard base to have a minimum of 4 anchor bolts.

This document was originally issued and sealed by Aaron Murra, Registration Number PE-6536, on 11/25/15 and the original document is stored at the North Dakota Department of Transportation.

NOTES

770-P02 LED LUMINIARE: Meet the following specifications for the luminaire.

Light Source	LED
Minimum Lumen output	6,000 Lumens
Color Temperature	4000K to 4500K
Ballast Driver	350mA to 750mA
Operating Temperature Range	-40 deg C to +40 deg C
Minimum L70 life of LED's at 25 deg C	50,000 hours
Light Distribution	Type III medium semi cutoff
Maximum luminaire load per light standard	3.0 sq. ft.
Minimum Warranty for LED array & power supply	5 years
Luminaire Housing	die-cast aluminum
Photo Control on each luminaire	Yes
Tool-less access	Yes
Surge Suppressor	Category C

Provide equipment with a 5 year warranty from the lighting manufacturer. Cover the following items under the warranty: luminaire housing and paint finish, power supply, and LED array.

The following are approved luminaires. Obtain approval and acceptance for luminaires not listed below.

Company	Catalog Number
American Electric Autobahn	ATBS H MVOLT R3 ATBSREF
Phillips RoadView	RVS 48 530 LE3 GY3

Submit work drawings for the luminaires according to Section 105.08 "Work Drawings."

Include LED luminaires, internal wiring, and fuse kits in the unit price bid for "Lighting System."

This document was originally issued and sealed by Aaron Murra, Registration Number PE-6536, on 11/25/15 and the original document is stored at the North Dakota Department of Transportation.

ENVIRONMENTAL COMMITMENTS

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	6	3

ENVIRONMENTAL COMMITMENTS (EC): The North Dakota Department of Transportation and the Federal Highway Administration have made environmental commitments to secure approval of this project. The environmental commitments are as follows:

EC-1: Unavoidable permanent impacts will be mitigated onsite, adjacent to the project, or at a NDDOT approved mitigation site or bank in accordance with the mitigation guidance^{2,3}.

ACTION REQUIRED /TAKEN:0.00 acres of permanent impacts to jurisdictional waters and 0.00 acres of permanent impacts to natural/jurisdictional wetlands will require mitigation.

Wetland Impact Table																			
Wetland Number	Location	Cowardin Class.	Wetland Type	Wetland Size (acres)	Wetland Feature	USACE Jurisdictional Wetlands	Wetland Impacts (acres)		USFWS Easement Impacts (acres)		Wetland Mitigation								
							Temp.	Perm.	Temp.	Perm.	Mitigation Required			Bank		Onsite			
											EO 11990	USACE	USFWS	Location	acres	Mitigation Location; Ratio	acres	Constructed Site #	Constructed size (acres)
#2	Sec.1, T151N, R51W	PEMCx	Ditch	0.96	Artificial	Yes	0.02	<0.001			N	N	N						
				Totals	0.96		0.02	<0.01	0	0				0			0		0

¹ Wetlands are assumed to be jurisdictional and a 404 permit is being submitted for temporary and permanent impacts.

² All impacts to natural wetlands (natural/jurisdictional and natural/non-jurisdictional), regardless of size, as well as impacts greater than 0.10 acre to artificial/jurisdictional wetlands require mitigation.

³ All artificial/non-jurisdictional, deep water (impacts greater than 6.6 feet), Other Waters less than 300 linear feet (determined by the USACE on a case by case), and temporary impacts do not require mitigation.

Summary Impact Table			
Total Permanent Impact Summary		Temporary Impacts and additional information	
Wetland Type	Total (Acres)	Wetland Type	Total (Acres/Lf)
Natural/JD	0.00	Temporary JD	0.02
Natural/Non-JD	0.00	Non-JD Temporary	0.00
Artificial/JD	<0.01	Permanent JD > 0.10	0.00
Artificial /Non-JD	0.00	Permanent OW	0.00
Total	0.00	Temporary OW	0.00


ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	8	1

SPEC CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
-----	-----	-----	-----	-----
103	0100 CONTRACT BOND	L SUM	0.69	0.69
261	0112 FIBER ROLLS 12IN	LF	110	110
702	0100 MOBILIZATION	L SUM	0.69	0.69
704	1000 TRAFFIC CONTROL SIGNS	UNIT	1,485	1,485
704	1060 DELINEATOR DRUMS	EA	42	42
754	0110 FLAT SHEET FOR SIGNS-TYPE XI REFL SHEETING	SF	4	4
754	0112 FLAT SHEET FOR SIGNS-TYPE IV REFL SHEETING	SF	19	19
754	0206 STEEL GALV POSTS-TELESCOPING PERFORATED TUBE	LF	68	68
754	8021 DYNAMIC MESSAGE SIGN-POST MOUNTED	EA	3	3
770	0001 LIGHTING SYSTEM	EA	1	1
772	9300 SURVEILLANCE CAMERA SYSTEM	EA	3	3
980	0811 VERTICAL ROAD CLOSURE GATE-28FT	EA	1	1
980	0820 REMOVE ROAD CLOSURE GATE	EA	1	1

T 151 N - R 51 W - Section 1

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	75	1



US 2 WB ☉



969

970

971

972

973

974

US 2 ☉

US 2 EB ☉



Edge of Driving Lane

Edge of Shoulder

12'

11.5'


<0.001 Ac Perm Wetland impact

Dynamic Message Sign with Support and Foundation Sta 970+99 72' Rt (EB ☉)

0.024 Ac Temp Wetland Impact

Wetland 2

This document was originally issued and sealed by
 Aaron Murra
 Registration Number
 PE- 6536,
 on 11/24/15 and the original document is stored at the
 North Dakota Department
 of Transportation

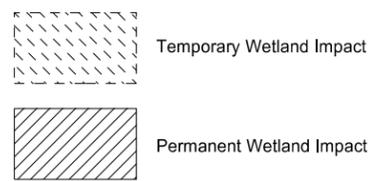

Feed Point - Type I - Pole Mounted Sta 970+87 126' Rt (US 2 EB ☉)


Controller Cabinet door faces West Sta 970+98 126' Rt (US 2 EB ☉)

Wetland Impacts
 Site 3 - Grand Forks County
 US 2 - RP 354.59
 ITS - Dynamic Message Signs

T 151 N - R 51 W - Section 1

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	76	1

Spec	Code	Description	Quantity
261	112	Fiber Rolls 12IN	110 LF



US 2 WB ☺



969

970

971

972

973

974

US 2 ☺

US 2 EB ☺



Edge of Driving Lane

Edge of Shoulder

12'

11.5'

Fiber Rolls 12" (55')

Dynamic Message Sign support, and footings
Sta 970+99
72' Rt (EB ☺)

Fiber Rolls 12" (55')

Feed Point - Type I - Pole Mounted
Sta 970+87
126' Rt (US 2 EB ☺)

Controller Cabinet door faces West
Sta 970+98
126' Rt (US 2 EB ☺)

This document was originally issued and sealed by
Aaron Murra
Registration Number
PE- 6536,
on 11/24/15 and the original document is stored at the
North Dakota Department
of Transportation

Temporary Erosion Control
Site 3 - Grand Forks County
US 2 - RP 354.59
ITS - Dynamic Message Signs

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
N.D.	ITS-9-999(351)	110	1

Sta/RP	Sign No.	Assembly No.	Flat Sheet For Signs		Sign Support Length				Support Size	Max Post Len LF	Sleeve Length				Sleeve Size	Anchor EA	Anchor LF	Anchor Size	Reset Sign Panel EA	Reset Sign Support EA	Break-Away EA	Comments
			IV SF	XI SF	1st LF	2nd LF	3rd LF	4th LF			1st LF	2nd LF	3rd LF	4th LF								
204.092 Rt	SN 1		18.8		12.5	13.0	13.6		2.5 x 2.5 12 ga	14.2					3	4	3 x 3 7 ga				3	
204.220 Rt	S.A.A			5.0	12.3				2.25 x 2.25 12 ga	14.7					1	4	2.5 x 2.5 12 ga					
Sub Total			18.8	5.0	Total 51.4										Total 16				0	0	3	
Grand Total			18.8	5.0	Total 51.4										Total 16				0	0	3	


Basis of Estimate
Sign Support Lengths

The sign support lengths have been calculated using the following vertical clearances:

Urban/rural expressway and freeway - 84" (Offset - 60")

<p>This document was originally issued and sealed by Douglas A. Schumaker, Registration Number PE-5047, on 11/23/2015 and the original document is stored at the North Dakota Department of Transportation</p>	<p>Sign Summary Perforated Tube</p> <p>US 83 North Minot</p>
--	--


STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	110	2

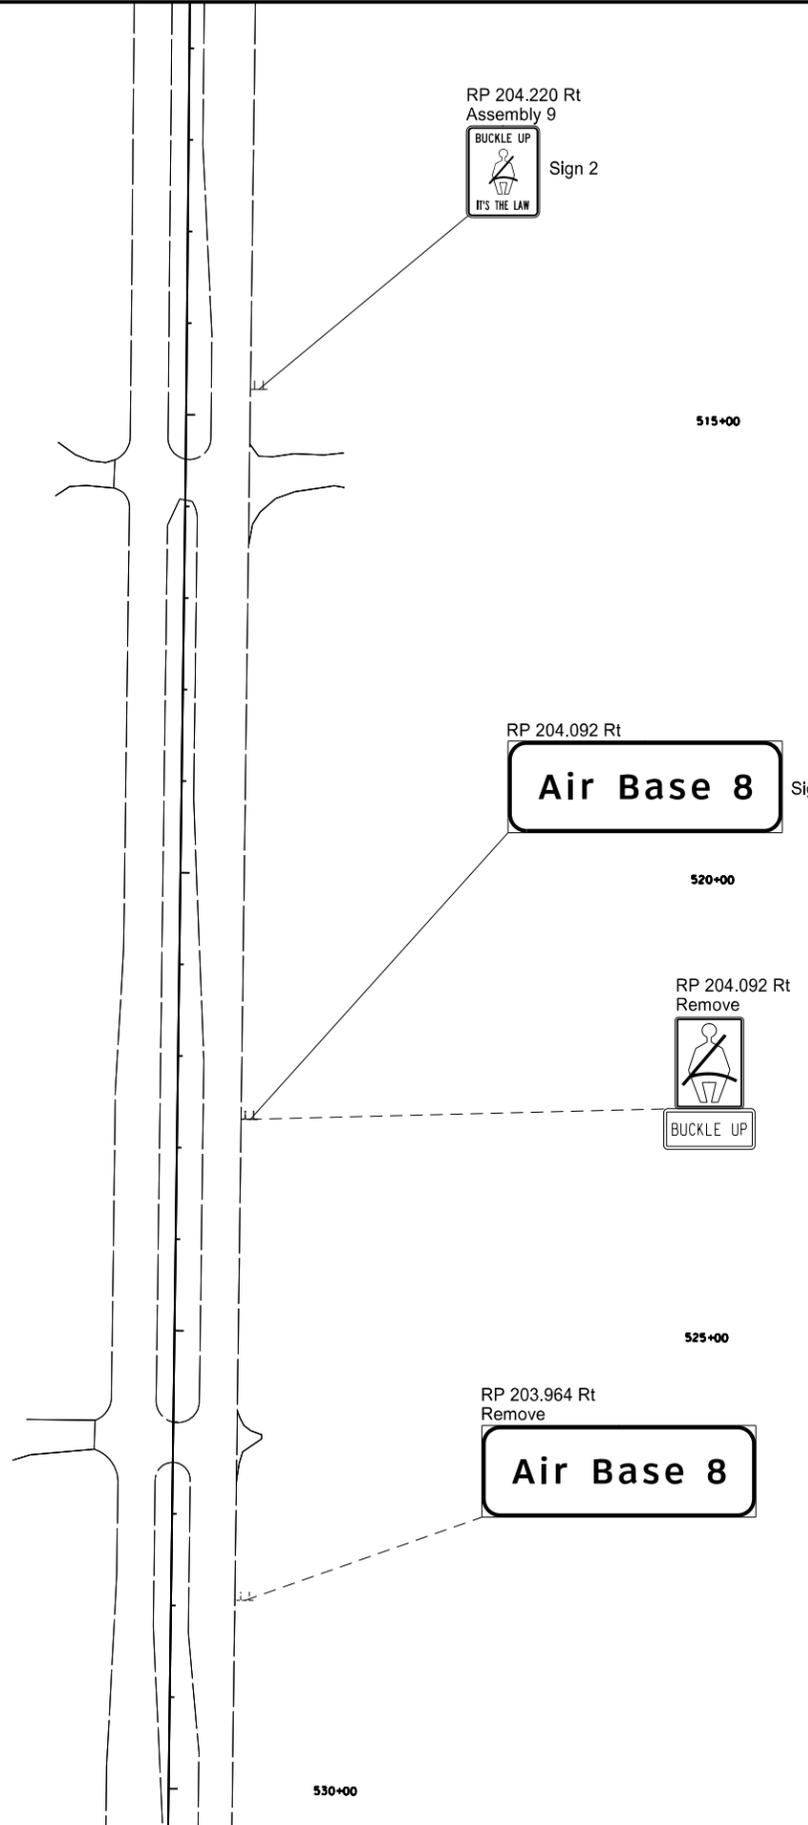


This document was originally issued and sealed by Douglas A. Schumaker, Registration Number PE- 5047, on 11/23/15 and the original document is stored at the North Dakota Department of Transportation

Sign Layout
 US 83 North Minot
 US Hwy 83


STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	160	1

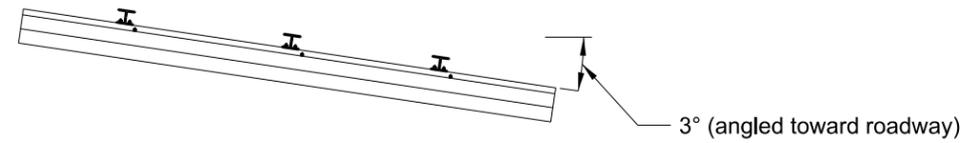

Top View

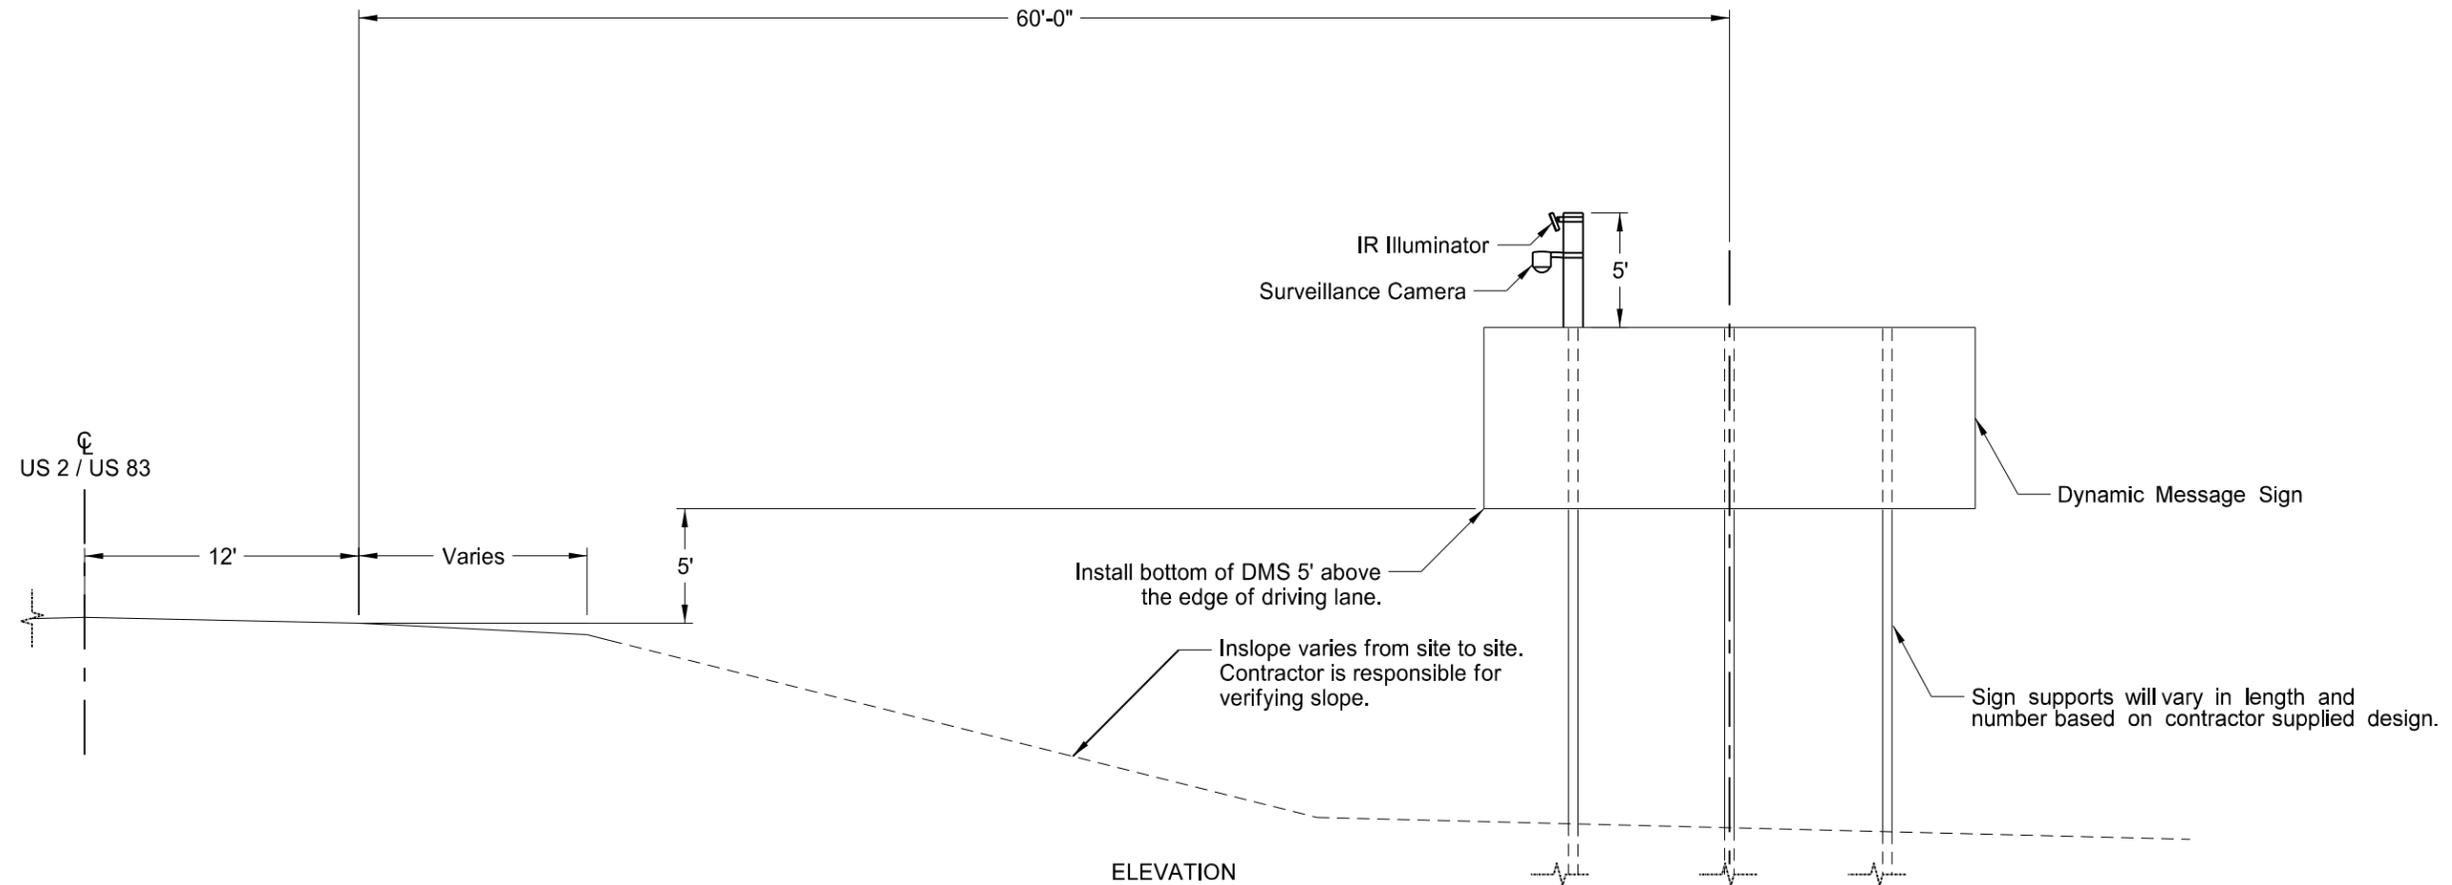


Note: Sign will be angled 3° toward roadway.



Detail A

Note: Z-brackets are bolted to the rear of the display. Each Z-bracket is attached to the cabinet using 1/2" A325 mechanically galvanized structural grade hardware.




Right Side View

This document was originally issued and sealed by
 Aaron Murra
 Registration Number
 PE- 6536,
 on 11/24/15 and the original document is stored at the
 North Dakota Department
 of Transportation

Proposed ITS Details
 All Sites
 ITS - Dynamic Message Signs


	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	ITS-9-999(351)	160	2

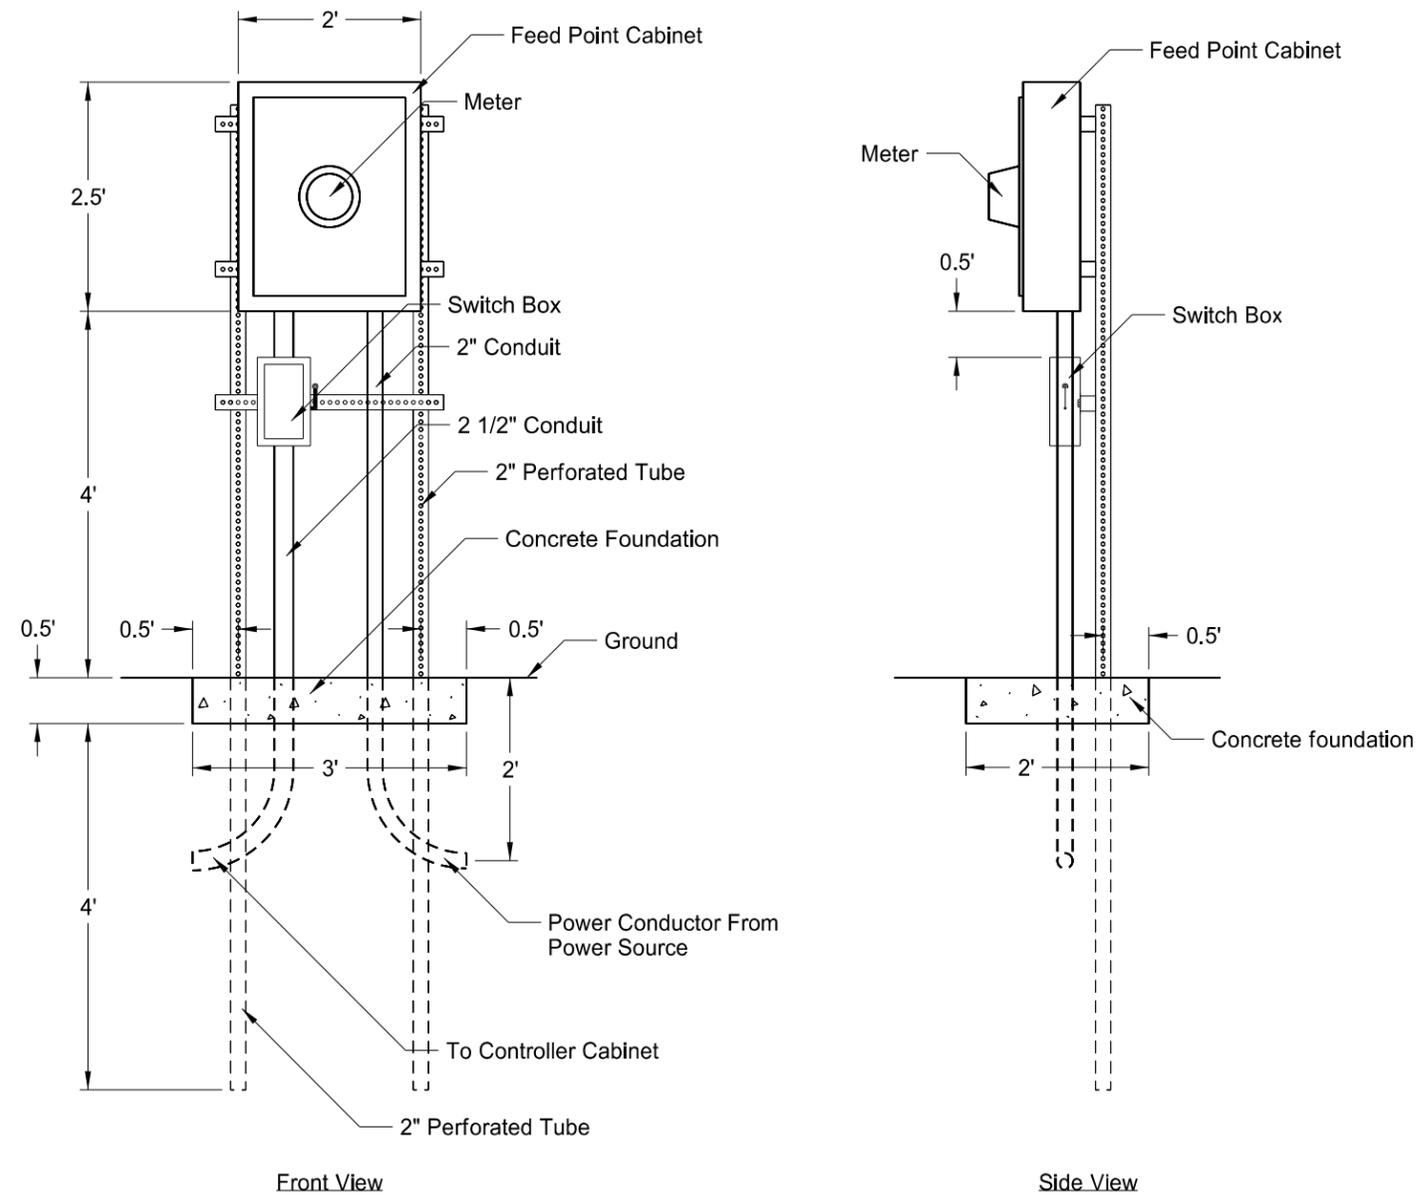

Feed Point - Type I - Pole Mounted


This document was originally issued and sealed by
 Aaron Murra
 Registration Number
 PE- 6536,
 on 11/24/15 and the original document is stored at the
 North Dakota Department
 of Transportation

Proposed ITS Details
 Feed Point - Type I - Pole Mounted
 ITS - Dynamic Message Signs




T 139 N - R 80 W - Section 9

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	160	3

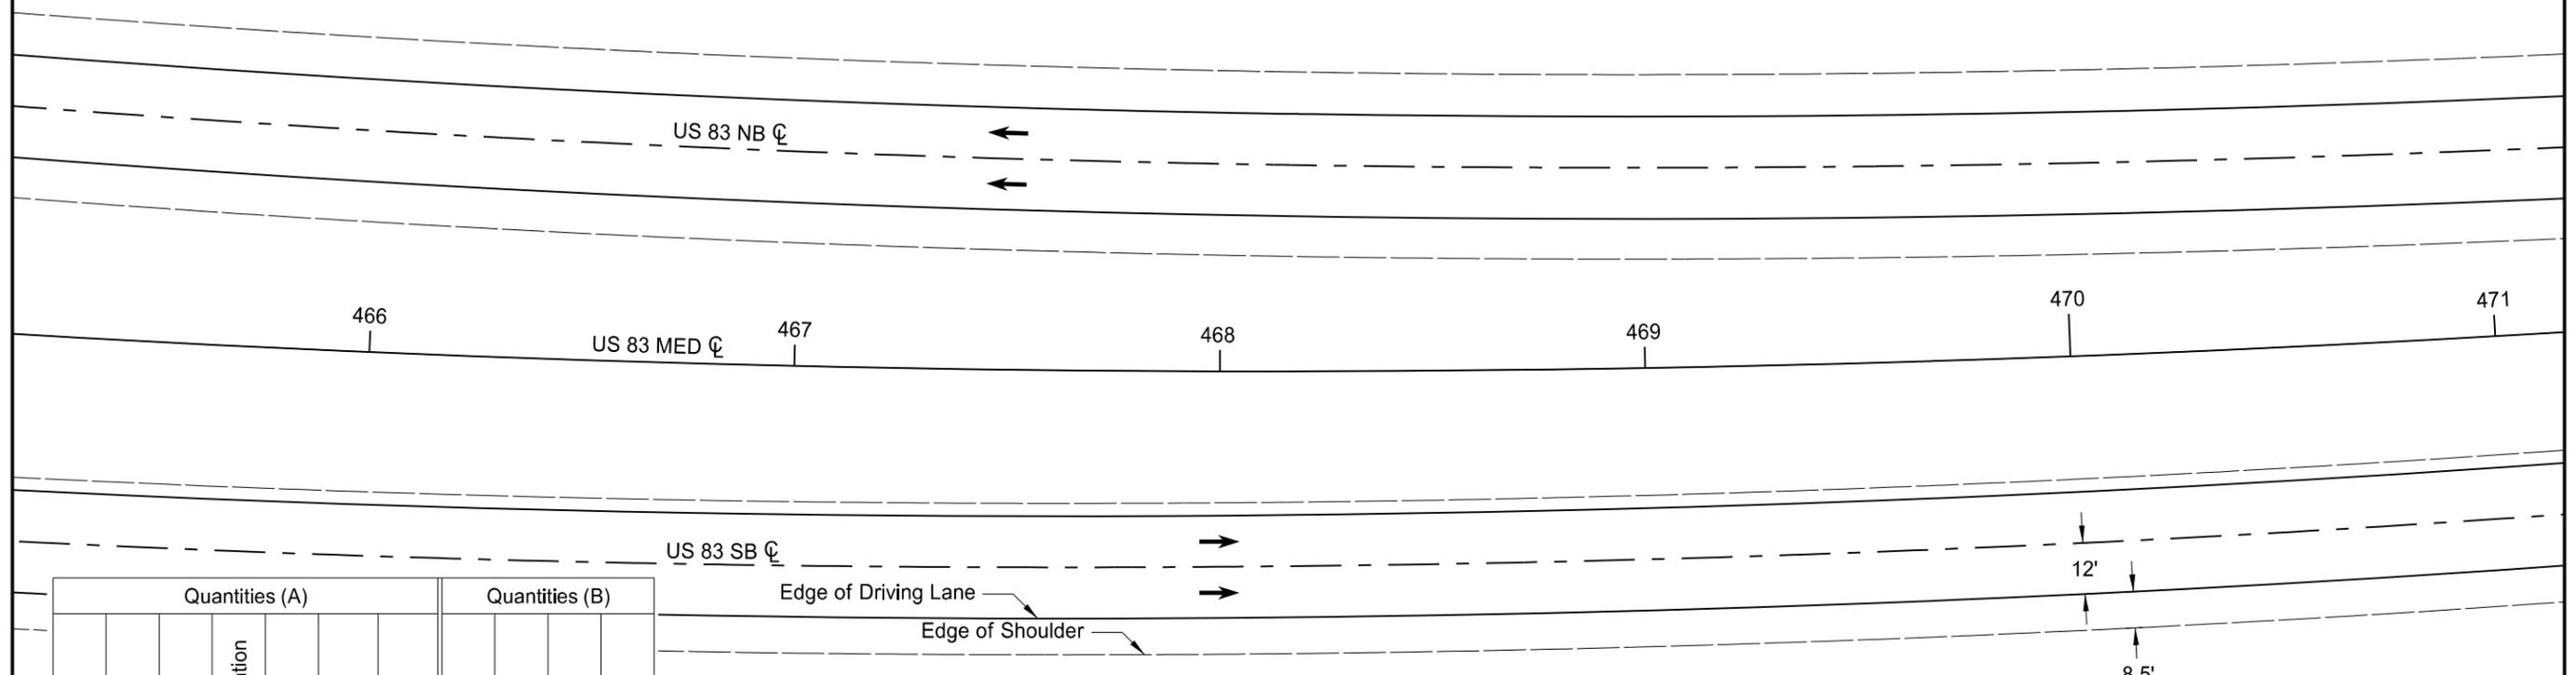

Quantities (A)								Quantities (B)			
Cable 3NO2 Style USE	Cable 3NO4-1NO6 Style USE	Cable Trench - Type II	Dynamic Message Sign with Support and Foundation	Feed Point - Type 1 - Pole Mounted (As Shown in Section 160 Sheet 2)	Straw Mulch	Seeding Class II	Ethernet Switch	Infrared Illuminator	OSP Cat 5e Cable	PTZ Camera	
LF	LF	LF	EA	EA	ACRE	ACRE	EA	EA	LF	EA	
39	72	57	1	1	0.01	0.01	1	1	97	1	


Sta & Offset	Cable Trench		Cable Runs	
	LF	LF	LF	Type
Sta 468+64 - 115' Rt to Sta 468+82 - 116' Rt	20	39	39	3NO2 Style USE
Sta 468+52 - 117' Rt to Sta 468+64 - 115' Rt	37	72	72	3NO4 - 1NO6 Style USE

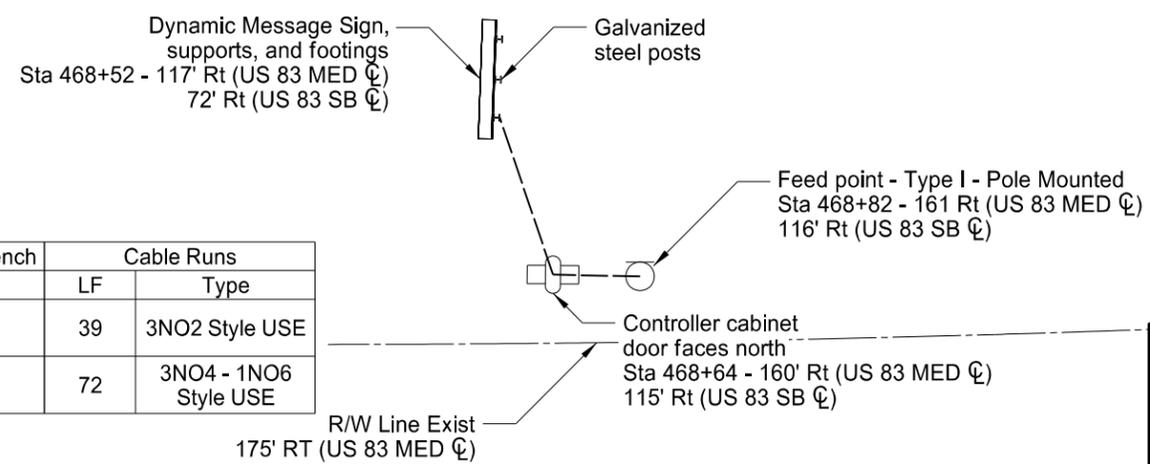

This document was originally issued and sealed by
 Aaron Murra
 Registration Number
 PE- 6536,
 on 11/24/15 and the original document is stored at the
 North Dakota Department
 of Transportation

Proposed ITS Layout
 Site 1 - Burleigh County
 US 83 - RP 91.748
 ITS - Dynamic Message Signs

(A) Include the cost for all items listed in the price for "Dynamic Message Sign-Post Mounted"
 (B) Include the cost for all items listed in the price for "Surveillance Camera System"



T 156 N - R 83 W - Section 36

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	160	4

890'

Flasher Cabinet Pipe Mounted
Sta 514+66 - 172' Lt (US 83 MED C)

Pull box
Sta 514+80 - 172' Lt (US 83 MED C)

Bore under
Service Road

Light Std with vertical
lift snow gate. Mount switch box on light Std.
Sta 514+80 - 74' Lt (US 83 MED C)

Contoller Cabinet
Door faces South
Sta 525+94 - 148' Lt (US 83 MED C)

Dynamic Message Sign,
supports, and footings
Sta 525+97 - 117' Lt (US 83 MED C)

Existing Feed point - Type I - Pole Mounted
Sta 528+96 - 108' Lt (US 83 MED C)

Existing Gate Location
Sta 525+59
72' Lt (US 83 MED C)

US 83 NB C

515

516

526

527

528

529

US 83 SB C

This document was originally
issued and sealed by
Aaron Murra
Registration Number
PE- 6536,
on 11/25/15 and the original
document is stored at the
North Dakota Department
of Transportation

Proposed ITS Layout

Site 2 - Ward County
US 83 - RP 203.994

ITS - Dynamic Message Signs

Quantities (A)							Quantities (B)				
Cable 3NO2 Style USE	Cable 3NO4-1NO6 Style USE	Cable Trench - Type II	Dynamic Message Sign with Support and Foundation	Feed Point - Type 1 - Pole Mounted (As Shown in Section 160 Sheet 2)	Straw Mulch	Seeding Class II	Ethernet Switch	Infrared Illuminator	OSP Cat 5e Cable	PTZ Camera	
LF	LF	LF	EA	EA	ACRE	ACRE	EA	EA	LF	EA	
324	58	328	1	1	0.01	0.01	1	1	83	1	

- (A) Include the cost for all items listed in the price for "Dynamic Message Sign-Post Mounted"
- (B) Include the cost for all items listed in the price for "Surveillance Camera System"

Dynamic Message Sign

Sta & Offset	Cable Trench		Cable & Conduit Runs	
	LF	DIA	LF	Type
Sta 528+96 - 108' Lt to Sta 525+94 - 148' Lt	305	2"	324	3NO2 Style USE
Sta 525+94 - 148' Lt to Sta 525+97 - 117' Lt	23	2"	58	3NO4 - 1NO6 Style USE

Quantities (C)									
Cable Trench - Type II	No. 14 AWG 5 Conductor Cable	Multiple underground Cable 3 No 6 Style USE	Vertical lift Road Closure Gate - 28 FT Arm	Flasher Cabinet - Pipe Stand Mounted	Pipe Stand	Switch Box	Remove Road Closure Gate	Vertical Road Closure Gate - 28 FT	
LF	LF	LF	EA	EA	EA	EA	EA	EA	
1545	170	1527	1	1	1	1	1	1	

(C) Include the cost for all items listed in the price for "Vertical Road Closure Gate -28FT"

Quantities (D)								
Concrete Foundation - Highway Lighting	2" Dia Rigid Conduit	Underground Conductor No 6 - Type RHW	Underground Conductor No 6 - Type THW	American Electric ATBS Luminaire	Pull Box	Light Std 6FT MA 42' Pole Breakaway	Lighting System	
EA	LF	LF	LF	EA	EA	LF	EA	
1	1578	3304	1652	1	1	1	1	

(D) Include the cost for all items listed in the price for "Lighting System"

Lighting System

Station	Conduit Runs		Cable Runs	
	LF	DIA	LF	Type
Sta 528+96 - 108' Lt to Sta 514+80 - 172' Lt	1480	2"	2992	(2) No.6 RHW (1) No. 6 THW
Sta 514+80 - 172' Lt to Sta 514+80 - 74' Lt	98	2"	312 156	(2) No.6 RHW (1) No. 6 THW

Vertical Lift road Closure Gate - 28 FT Arm

Station	Conduit Runs		Cable Trench	Cable Runs	
	LF	DIA	LF	LF	Type
528+96 - 108' Lt to 514+80 - 172' Lt	N/A	N/A	1417	1496	3 No. 6 USE
514+80 - 172' Lt to 514+66 - 172' Lt	15	2"	15	30	3 No. 6 USE
514+66 - 172' Lt to 514+80 - 172' Lt	15	2"	15	30	No. 14 AWG 5
514+80 - 172' Lt to 514+80 - 74' Lt	N/A	N/A	98	140	No. 14 AWG 5

This document was originally issued and sealed by
 Aaron Murra
 Registration Number
 PE- 6536,
 on 11/25/15 and the original document is stored at the
 North Dakota Department
 of Transportation

DMS and Road Closure Gate Quantities



Site 2 - Ward County
 US 83 - RP 203.994

ITS - Dynamic Message Signs




T 151 N - R 51 W - Section 1


STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	ITS-9-999(351)	160	6

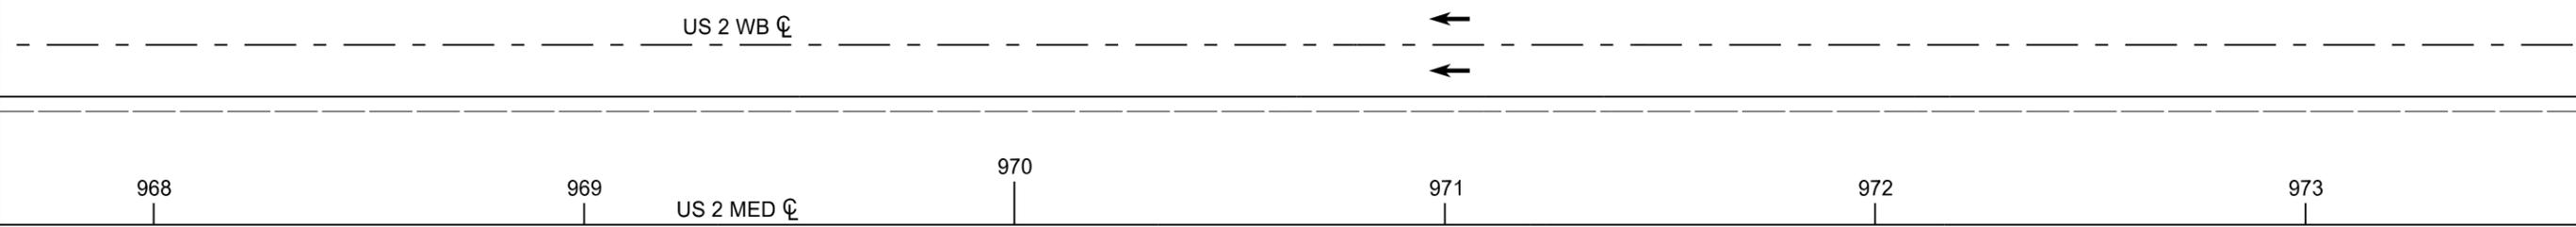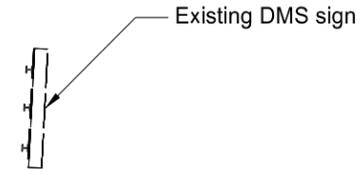

Quantities (A)								Quantities (B)			
Cable 3NO2 Style USE	Cable 3NO4-1NO6 Style USE	Cable Trench - Type II	Dynamic Message Sign with Support and Foundation	Feed Point - Type 1 - Pole Mounted (As Shown in Section 160 Sheet 2)	Straw Mulch	Seeding Class II		Ethernet Switch	Infrared Illuminator	OSP Cat 5e Cable	PTZ Camera
LF	LF	LF	EA	EA	ACRE	ACRE		EA	EA	LF	EA
31	80	57	1	1	0.02	0.02		1	1	105	1

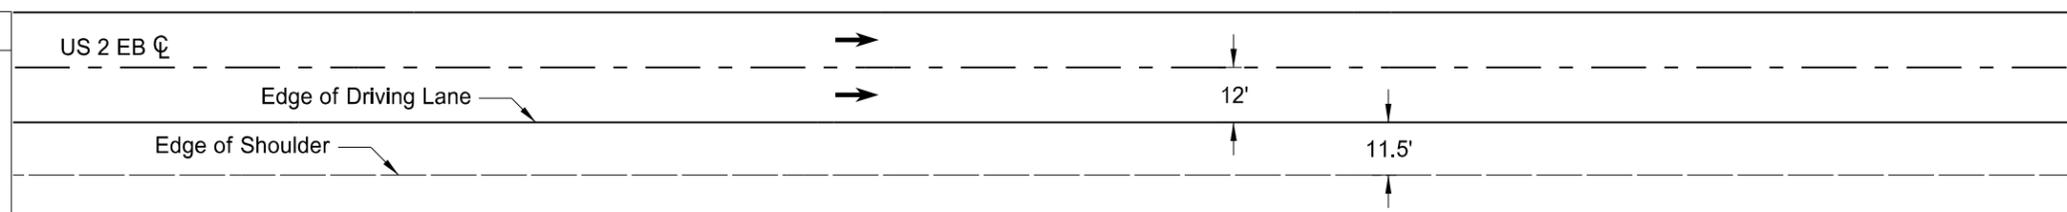

Sta	Cable Trench		Cable Runs	
	LF	LF	LF	Type
Sta 970+87 - 168 Rt to Sta 970+98 - 168' Rt	12	31		3NO2 Style USE
Sta 970+98 - 168' Rt to Sta 970+99 - 114' Rt	45	80		3NO4 - 1NO6 Style USE

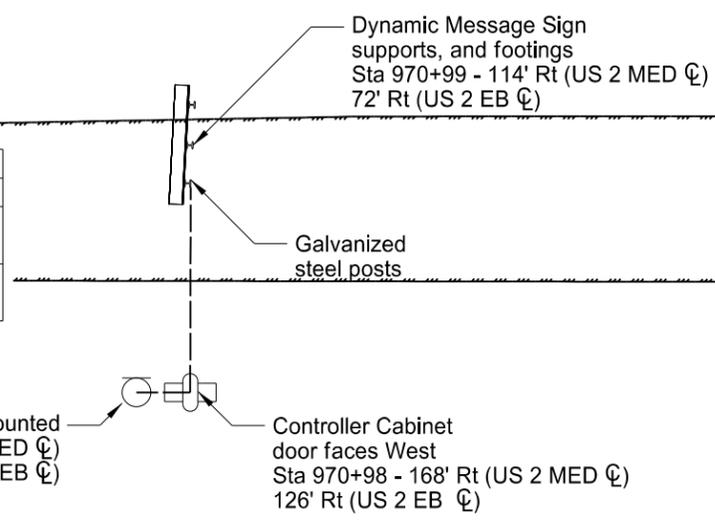

This document was originally issued and sealed by
Aaron Murra
Registration Number
PE- 6536,
on 11/24/15 and the original document is stored at the
North Dakota Department
of Transportation

Proposed ITS Layout
Site 3 - Grand Forks County
US 2 - RP 354.59
ITS - Dynamic Message Signs

(A) Include the cost for all items listed in the price for "Dynamic Message Sign-Post Mounted"
(B) Include the cost for all items listed in the price for "Surveillance Camera System"

NOTES:
 1) Provide and install light standard in accordance with section 770 of the NDDOT Standard Specifications.

*See standard D-770-1 for additional Light & Signal Standard Foundations details.

**Supply fiberglass/aluminum gate arm and cast adapter from Safetran, or equivalent.










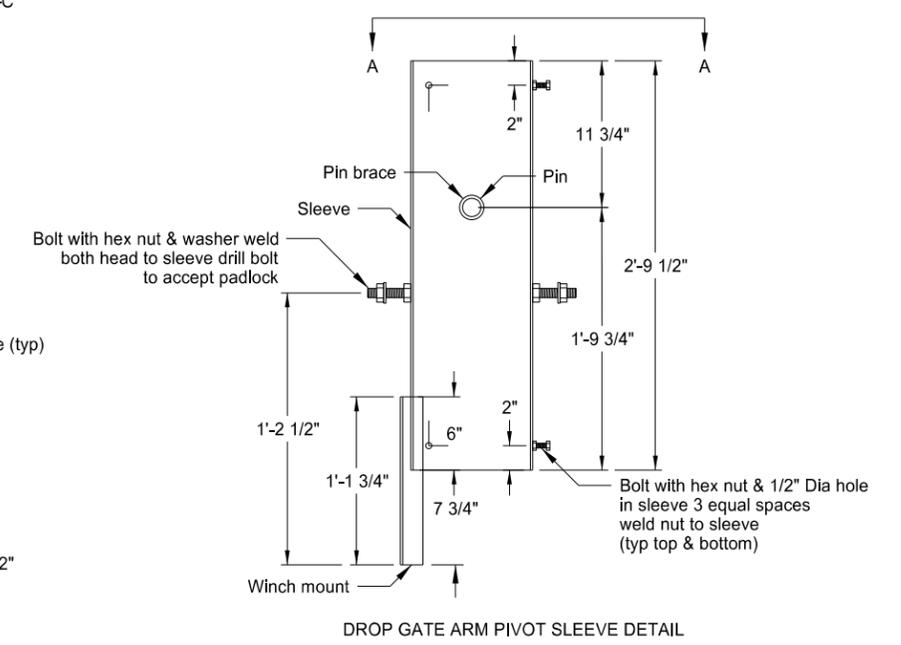


TABLE 1
Concrete Foundation*

Depth	Diameter
6'	24" or 30"
5'	36" or 42"

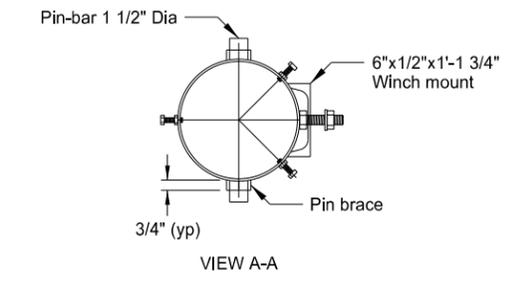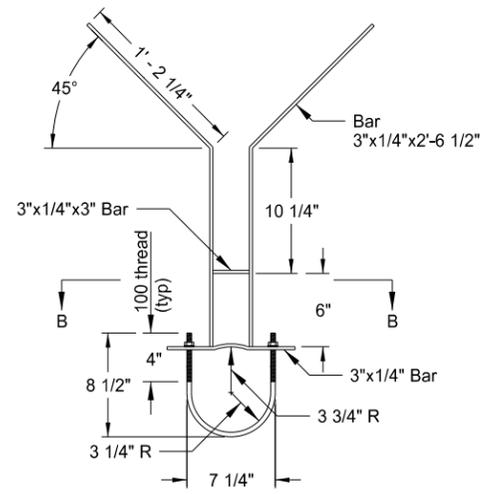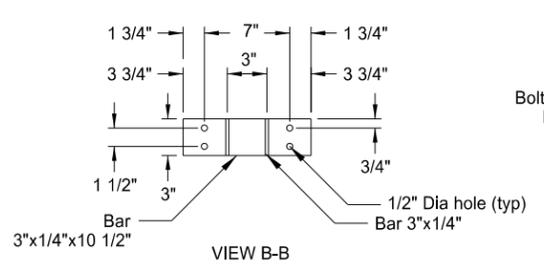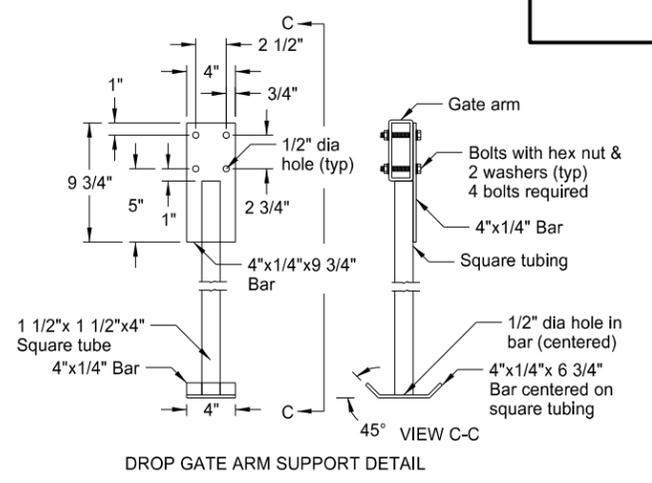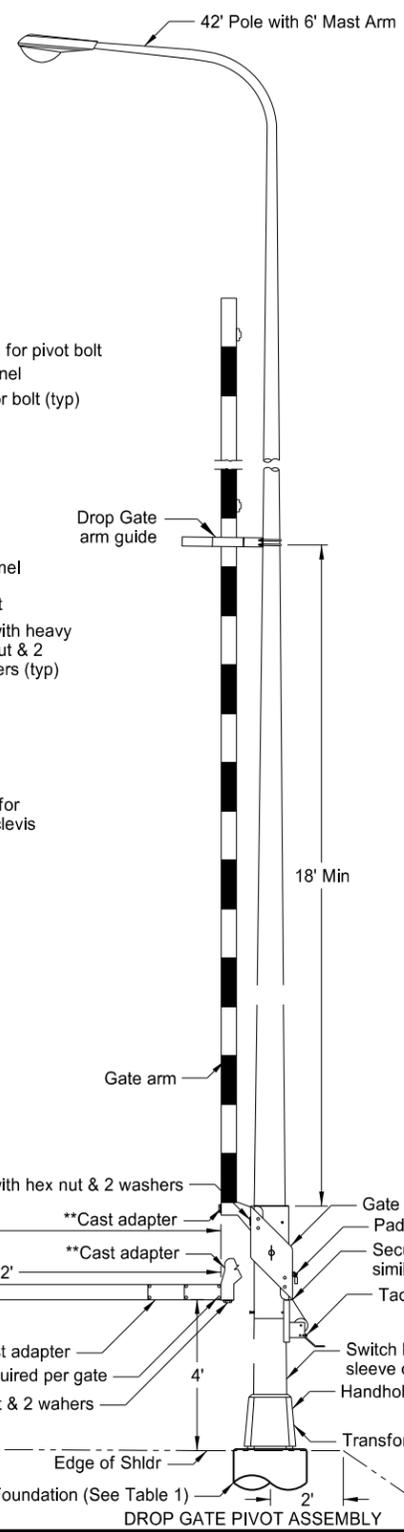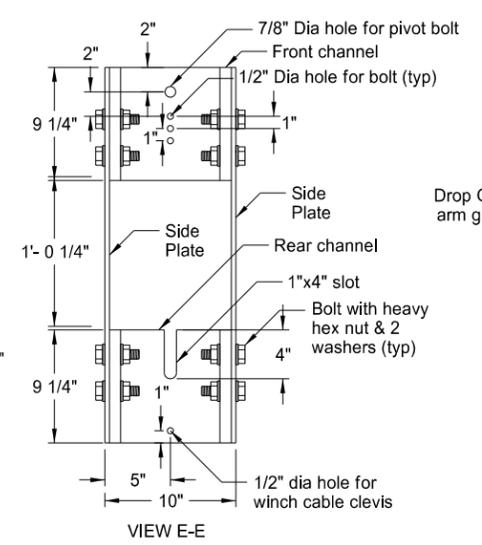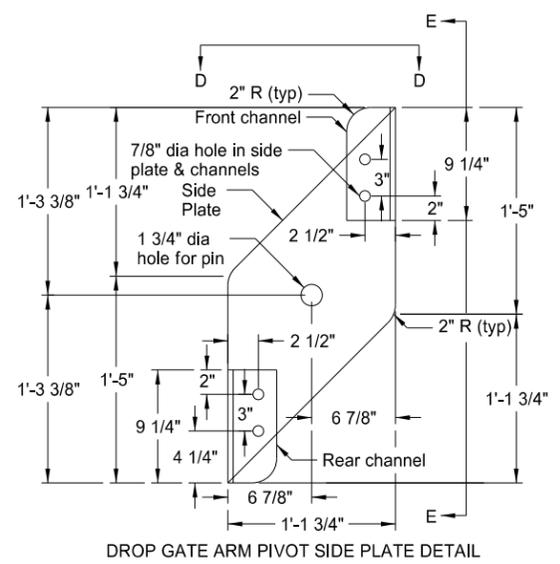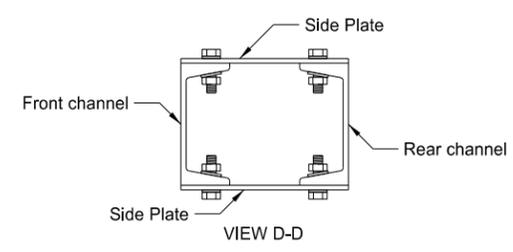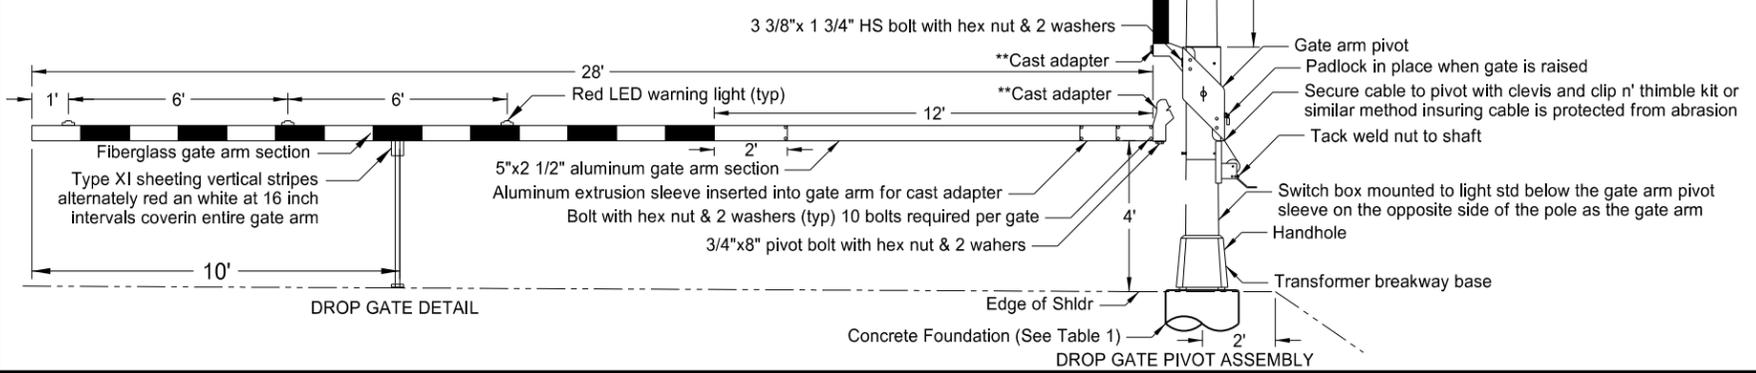


This document was originally issued and sealed by
 Aaron Murra
 Registration Number
 PE- 6536,
 on 11/24/15 and the original document is stored at the
 North Dakota Department
 of Transportation

Vertical Lift Road Closure Gate Details


Site 2 - Ward County
 US 83 - RP 203.994

ITS - Dynamic Message Signs

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	ITS-9-999(351)	160	8

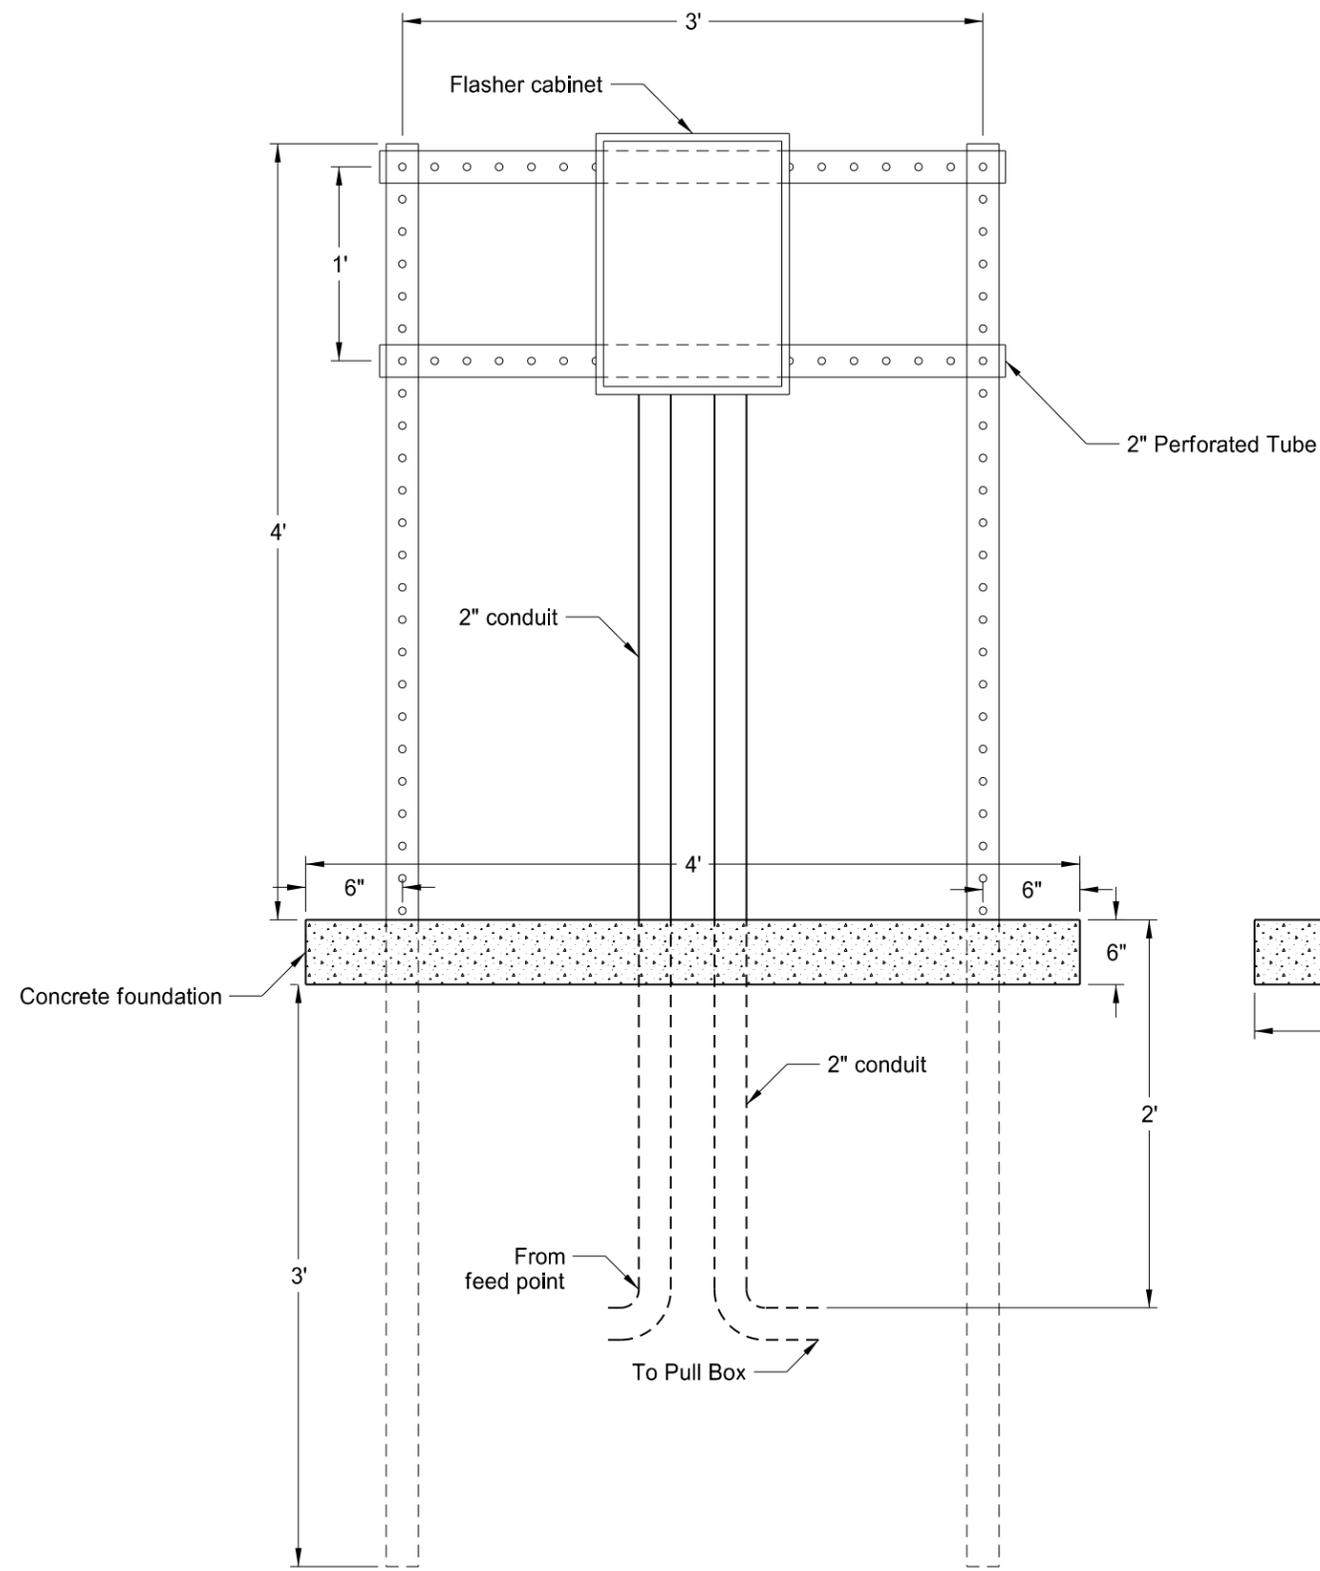

Front View

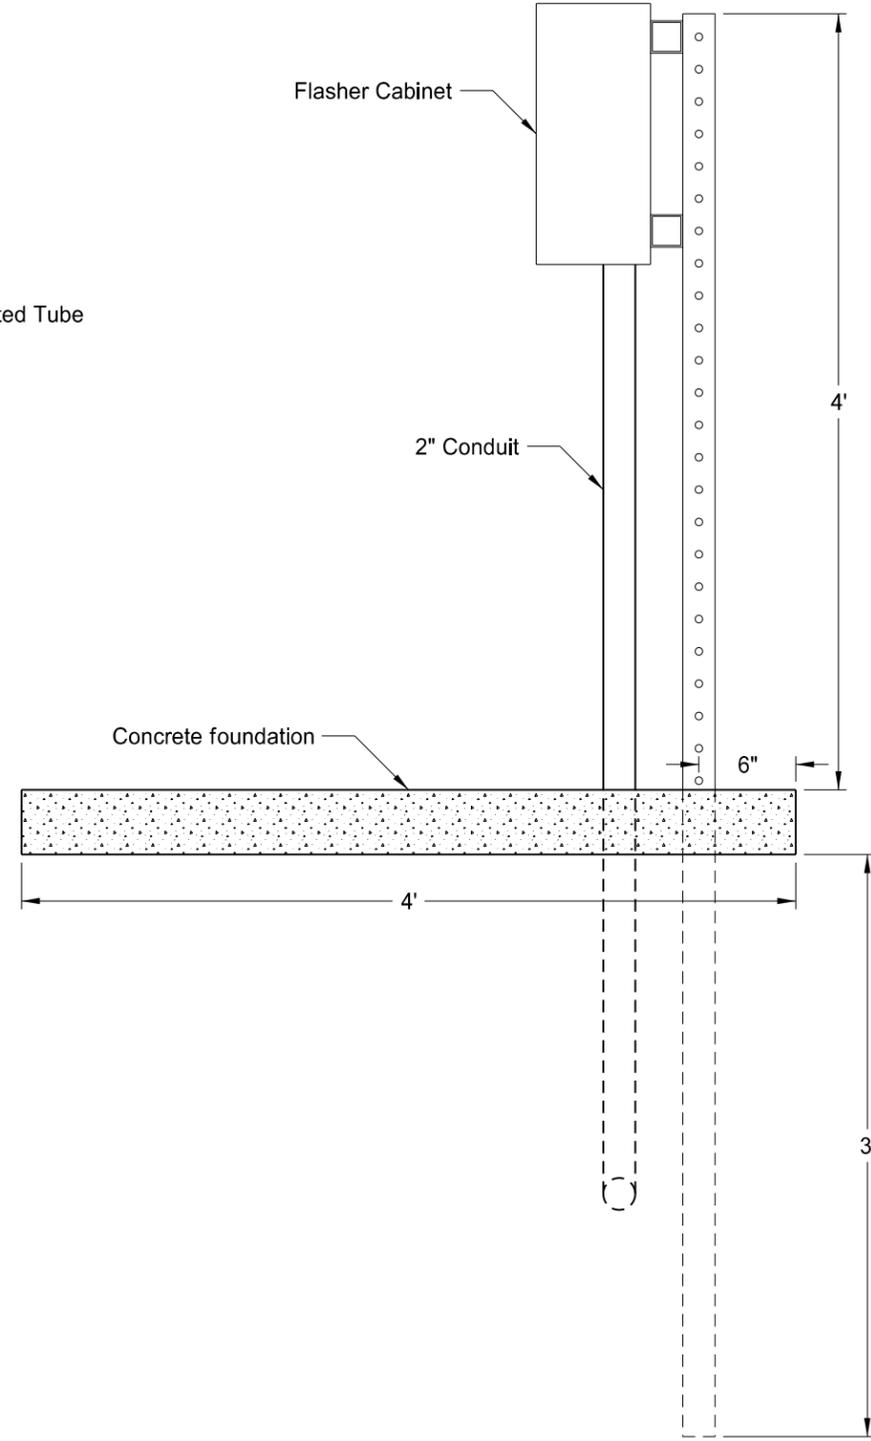

Side View

Flasher Cabinet Pipe Mounted
Sta 515+10 - 74 Lt

This document was originally issued and sealed by
Aaron Murra
Registration Number
PE- 6536,
on 11/24/15 and the original document is stored at the
North Dakota Department
of Transportation

Flasher Cabinet Pipe Mounted
Site 2 - Ward County
US 83 - RP 203.994
ITS - Dynamic Message Signs

NDDOT ABBREVIATIONS

? This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.

Abn abandoned
 Abut abutment
 Ac acres
 Adj adjusted
 Aggr aggregate
 Ahd ahead
 ARV air release valve
 Align alignment
 Al alley
 Alt alternate
 Alum aluminum
 ADA Americans with Disabilities Act
 A ampere
 & and
 Appr approach
 Approx approximate
 ACP asbestos cement pipe
 Asph asphalt
 AC asphalt cement
 Assmd assumed
 @ at
 Atten attenuation
 ATR automatic traffic recorder
 Ave Avenue
 Avg average
 ADT average daily traffic
 Az azimuth
 Bk back
 BF back face
 Bs backsight
 Balc balcony
 B Wire barbed wire
 Barr barricade
 Btry battery
 Brg bearing
 BI beehive inlet
 Beg begin
 BM bench mark
 Bkwy bikeway
 Bit bituminous
 Blk block
 Bd Ft board feet
 BH bore hole
 BS both sides
 Bot bottom
 Blvd Boulevard
 Bndry boundary
 BC brass cap
 Brkwy breakaway
 Br bridge
 Bldg building

BV butterfly valve
 Byp bypass
 C Gdrl cable guardrail
 Calc calculate
 Cd candela
 CIP cast iron pipe
 CB catch basin
 CRS cationic rapid setting
 C Gd cattle guard
 C To C center to center
 Cl or C centerline
 Cm centimeter
 Ch chain
 Chnlk chain-link
 Ch Blk channel block
 Ch Ch channel change
 Chk check
 Chsld chiseled
 Cir circle
 Cl class
 Cl clay
 Cl F clay fill
 Cl Hvy clay heavy
 Cl Lm clay loam
 Clnt clean-out
 Clr clear
 Cl&gr clearing & grubbing
 Co S coal slack
 Comb. combination
 Coml commercial
 Compr compression
 CADD computer aided drafting & design
 Conc concrete
 Cond conductor
 Const construction
 Cont continuous
 CSB continuous split barrel sample
 Contr contraction
 Contr contractor
 CP control point
 Coord coordinate
 Cor corner
 Corr corrected
 CAES corrugated aluminum end section
 CAP corrugated aluminum pipe
 CMES corrugated metal end section
 CMP corrugated metal pipe
 CPVCP corrugated poly-vinyl chloride pipe
 CSES corrugated steel end section
 CSP corrugated steel pipe
 C coulomb
 Co County
 Crse course
 C Gr course gravel
 CS course sand

Ct Court
 Xarm cross arm
 Xbuck cross buck
 Xsec cross sections
 Xing crossing
 Xrd Crossroad
 Crn crown
 CF cubic feet
 M3 cubic meter
 M3/s cubic meters per second
 CY cubic yard
 Cy/mi cubic yards per mile
 Culv culvert
 C&G curb & gutter
 CI curb inlet
 CR curb ramp
 CS curve to spiral
 C cut
 Dd Ld dead load
 Defl deflection
 Defm deformed
 Deg or D degree
 DInt delineate
 DIntr delineator
 Depr depression
 Desc description
 Det detail
 DWP detectable warning panel
 Dtr detour
 Dia diameter
 Dir direction
 Dist distance
 DM disturbed material
 DB ditch block
 DG ditch grade
 Dbl double
 Dn down
 Dwg drawing
 Dr drive
 Drwy driveway
 DI drop inlet
 D dry density
 Ea each
 Esmt easement
 E East
 EB Eastbound
 Elast elastomeric
 EL electric locker
 E Mtr electric meter
 Elec electric/al
 EDM electronic distance meter
 Elev or El elevation
 Ellipt elliptical
 Emb embankment
 Emuls emulsion/emulsified

ES end section
 Engr engineer
 ESS environmental sensor station
 Eq equal
 Eq equation
 Evgr evergreen
 Exc excavation
 Exst existing
 Exp expansion
 Expy Expressway
 E external of curve
 Extru extruded
 FOS factor of safety
 F Fahrenheit
 FS far side
 F farad
 Fed Federal
 FP feed point
 Ft feet/foot
 Fn fence
 Fn P fence post
 FO fiber optic
 FB field book
 FD field drive
 F fill
 FAA fine aggregate angularity
 FS fine sand
 FH fire hydrant
 Fl flange
 Flrd flared
 FES flared end section
 F Bcn flashing beacon
 FA flight auger sample
 FL flow line
 Ftg footing
 FM force main
 Fs foresight
 Fnd found
 Fdn foundation
 Frac fractional
 Frwy freeway
 Frt front
 FF front face
 F Disp fuel dispenser

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-2

FFP	fuel filler pipes	IPn	Iron Pin	MC	medium curing	Ped	pedestal
FLS	fuel leak sensor	IP	iron Pipe	M	mega	Ped	pedestrian
Furn	furnish/ed	Jt	joint	Mer	meridian	PPP	pedestrian pushbutton post
Gal	gallon	J	joule	M	meter	Pen.	penetration
Galv	galvanized	Jct	junction	M/s	meters per second	Perf	perforated
Gar	garage	K	kelvin	M	mid ordinate of curve	Per.	perimeter
Gs L	gas line	Kn	kilo newton	Mi	mile	PL	pipeline
G Reg	gas line regulator	Kpa	kilo pascal	MM	mile marker	PI	place
GMV	gas main valve	Kg	kilogram	MP	mile post	P&P	plan & profile
G Mtr	gas meter	Kg/m3	kilogram per cubic meter	MI	milliliter	PL	plastic limit
GSV	gas service valve	Km	kilometer	Mm	millimeter	PI	plate
GVP	gas vent pipe	K	Kip(s)	Mm/hr	millimeters per hour	Pt	point
GV	gate valve	LS	Land Surveyor (licensed)	Min	minimum	PCC	point of compound curve
Ga	gauge	LSIT	Land Surveyor In Training	Misc	miscellaneous	PC	point of curve
Geod	geodetic	Ln	lane	Mon	monument	PI	point of intersection
GIS	Geographical Information System	Lg	large	Mnd	mound	PRC	point of reverse curvature
G	giga	Lat	latitude	Mtbl	mountable	PT	point of tangent
GPS	Global Positioning System	Lt	left	Mtd	mounted	POC	point on curve
Gov	government	L	length of curve	Mtg	mounting	POT	point on tangent
Grd	graded/grade	Lens	lenses	Mk	muck	PE	polyethylene
Gr	gravel	Lvl	level	Mun	municipal	PVC	polyvinyl chloride
Grnd	ground	LB	level book	N	nano	PCC	Portland Cement concrete
GWM	ground water monitor	Lvng	leveling	NGS	National Geodetic Survey	Lb or #	pounds
Gdrl	guardrail	Lht	light	NS	near side	PP	power pole
Gtr	gutter	LP	light pole	Neop	neoprene	Preempt	preemption
H Plg	H piling	Ltg	lighting	Ntwk	network	Prefab	prefabricated
Hdwl	headwall	Lig Co	lignite coal	N	newton	Prfmd	performed
Ha	hectare	Lig Sl	lignite slack	N	North	Prep	preparation
Ht	height	LF	linear foot	NE	North East	Press.	pressure
HI	height of instrument	Liq	liquid	NW	North West	PRV	pressure relief valve
Hel	helical	LL	liquid limit	NB	Northbound	Prestr	prestressed
H	henry	L	litre	No. or #	number	Pvt	private
HZ	hertz	Lm	loam	Obsc	obscure(d)	PD	private drive
HDPE	high density polyethylene	Loc	location	Obsn	observation	Prod.	production/produce
HM	high mast	LC	long chord	Ocpd	occupied	Prog	programmed
HP	high pressure	Long.	longitude	Ocpy	occupy	Prop.	property
HPS	high pressure sodium	Lp	loop	Off Loc	office location	Prop Ln	property line
Hwy	highway	LD	loop detector	O/s	offset	Ppsd	proposed
Hor	horizontal	Lm	lumen	OC	on center	PB	pull box
HBP	hot bituminous pavement	Lum	luminaire	C	one dimensional consolidation		
HMA	hot mix asphalt	L Sum	lump sum	OC	organic content		
Hr	hour(s)	Lx	lux	Orig	original		
Hyd	hydrant	ML	main line	O To O	out to out		
Ph	hydrogen ion content	M Hr	man hour	OD	outside diameter		
Id	identification	MH	manhole	OH	overhead		
In or "	inch	Mkd	marked	PMT	pad mounted transformer		
Incl	inclinometer tube	Mkr	marker	Pg	pages		
IMH	inlet manhole	Mkg	marking	Pntd	painted		
ID	inside diameter	MA	mast arm	Pr	pair		
Inst	instrument	Matl	material	Pnl	panel		
Intchg	interchange	Max	maximum	Pk	park		
Intmdt	intermediate	MC	meander corner	PK	Parker-Kalon nail		
Intscn	intersection	Meas	measure	Pa	pascal		
Inv	invert	Mdn	median	PSD	passing sight distance		
IM	iron monument	MD	median drain	Pvmt	pavement		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

Qty	quantity	SN	sign number	Tan	tangent	Wb	weber
Qtr	quarter	Sig	signal	T	tangent (semi)	WIM	weigh in motion
Rad or R	radius	Si Cl	silt clay	TS	tangent to spiral	W	west
RR	railroad	Si Cl Lm	silty clay loam	Tel	telephone	WB	westbound
Rlwy	railway	Si Lm	silty loam	Tel B	Telephone Booth	Wrng	wiring
Rsd	raised	Sgl	single	Tel P	telephone pole	W/	with
RTP	random traverse point	SC	slow curing	Tv	television	W/o	without
Rge or R	range	SS	slow setting	Temp	temperature	WC	witness corner
RC	rapid curing	Sm	small	Temp	temporary	WGS	world geodetic system
Rec	record	S	South	TBM	temporary bench mark	Z	zenith
Rcy	recycle	SE	South East	T	tesla		
RAP	recycled asphalt pavement	SW	South West	T	thinwall tube sample		
RPCC	recycled portland cement concrete	SB	Southbound	T/mi	tons per mile		
Ref	reference	Sp	spaces	Ts	topsoil		
R Mkr	reference marker	Spcl	special	Twp or T	township		
RM	reference monument	SA	special assembly	Traf	traffic		
Refl	reflectorized	SP	special provisions	TSCB	traffic signal control box		
RCB	reinforced concrete box	G	specific gravity	Tr	trail		
RCES	reinforced concrete end section	Spk	spike	Transf	transformer		
RCP	reinforced concrete pipe	SC	spiral to curve	TB	transit book		
RCPS	reinforced concrete pipe sewer	ST	spiral to tangent	Trans	transition		
Reinf	reinforcement	SB	split barrel sample	TT	transmission tower		
Res	reservation	SH	sprinkler head	Trans	transverse		
Ret	retaining	SV	sprinkler valve	Trav	traverse		
Rev	reverse	Sq	square	TP	traverse point		
Rt	right	SF	square feet	Trtd	treated		
R/W	right of way	Km2	square kilometer	Trmt	treatment		
Riv	river	M2	square meter	Qc	triaxial compression		
Rd	road	SY	square yard	TERO	tribal employment rights ordinance		
Rdbd	road bed	Stk	stake	Tpl	triple		
Rdwy	roadway	Std	standard	TP	turning point		
RWIS	roadway weather information system	N	standard penetration test	Typ	typical		
Rk	rock	Std Specs	standard specifications	Qu	unconfined compressive strength		
Rt	route	Sta	station	Ugrnd	underground		
Salv	salvage(d)	Sta Yd	station yards	USC&G	US Coast & Geodetic Survey		
Sd	sand	Stm L	steam line	USGS	US Geologic Survey		
Sdy Cl	sandy clay	SEC	steel encased concrete	Util	utility		
Sdy Cl Lm	sandy clay loam	SMA	stone matrix asphalt	VG	valley gutter		
Sdy Fl	sandy fill	SSD	stopping sight distance	Vap	vapor		
Sdy Lm	sandy loam	SD	storm drain	Vert	vertical		
San	sanitary sewer line	St	street	VC	vertical curve		
Sc	scoria	SPP	structural plate pipe	VCP	vitrified clay pipe		
Sec	seconds	SPPA	structural plate pipe arch	V	volt		
Sec	section	Str	structure	Vol	volume		
SL	section line	Subd	subdivision	Wkwy	walkway		
Sep	separation	Sub	subgrade	W	water content		
Seq	sequence	Sub Prep	subgrade preperation	WGV	water gate valve		
Serv	service	Ss	subsoil	WL	water line		
Sh	shale	SE	superelevation	WM	water main		
Sht	sheet	SS	supplement specification	WMV	water main valve		
Shtng	sheeting	Supp	supplemental	W Mtr	water meter		
Shldr	shoulder	Surf	surfacing	WSV	water service valve		
Sw	sidewalk	Surv	survey	WW	water well		
S	siemens	Sym	symmetrical	W	watt		
SD	sight distance	SI	systems international	Wrng	wearing		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS






D-101-10

702COM	702 Communications	GT PLNS NAT GAS	Great Plains Natural Gas Company	RED RIV TEL	Red River Rural Telephone
ACCENT	Accent Communications	HALS TEL	Halstad Telephone Company	RESVTN TEL	Reservation Telephone
AGASSIZ WU	Agassiz Water Users Incorporated	IDEA1	Idea1	ROBRTS TEL	Roberts Company Telephone
AGC	Associated General Contractors of America	INT-COMM TEL	Inter-Community Telephone Company	R-RIDER ELEC	Roughrider Electric Coop
All PI	Alliance Pipeline	KANEB PL	Kaneb Pipeline Company	RRVW	Red River Valley & Western Railroad
ALL SEAS WU	All Seasons Water Users Association	KEM ELEC	Kem Electric Cooperative Incorporated	RSR ELEC	R.S.R. Electric Cooperative
AMOCO PI	Amoco Pipeline Company	KOCH GATH SYS	Koch Gathering Systems Incorporated	S E W U	South East Water Users Incorporated
AMRDA HESS	Amerada Hess Corporation	LKHD PL	Lakehead Pipeline Company	SCOTT CABLE	Scott Cable Television Dickinson
AT&T	AT&T Corporation	LNGDN RWU	Langdon Rural Water Users Incorporated	SHERDN ELEC	Sheridan Electric Cooperative
B PAW	Bear Paw Energy Incorporated	LWR YELL R ELEC	Lower Yellowstone Rural Electric	SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
BAKER ELEC	Baker Electric	MCKNZ CON	McKenzie Consolidated Telcom	SKYTECH	Skyland Technologies Incorporated
BASIN ELEC	Basin Electric Cooperative Incorporated	MCKNZ ELEC	McKenzie Electric Cooperative	SLOPE ELEC	Slope Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative	MCKNZ WRD	McKenzie County Water Resource District	SOURIS RIV TELCOM	Souris River Telecommunications
BELLE PL	Belle Fourche Pipeline Company	MCLEOD	McLeod USA	ST WAT COMM	State Water Commission
BLM	Bureau of Land Management	MCLN ELEC	McLean Electric Cooperative	STATE LN WATER	State Line Water Cooperative
BNSF	Burlington Northern Santa Fe Railway	MCLN-SHRDN R WAT	McLean-Sheridan Rural Water	STER ENG	Sterling Energy
BOEING	Boeing	MDU	Montana-dakota Utilities	STUT RWU	Stutsman Rural Water Users
BRNS RWD	Barnes Rural Water District	MID-CONT CABLE	Mid-Continent Cable	SW PL PRJ	Southwest Pipeline Project
BURK-DIV ELEC	Burke-Divide Electric Cooperative	MIDSTATE TEL	Midstate Telephone Company	T M C	Turtle Mountain Communications
BURL WU	Burleigh Water Users	MINOT CABLE	Minot Cable Television	TCI	TCI of North Dakota
Cable One	Cable One	MINOT TEL	Minot Telephone Company	TESORO GHG PLNS PL	Tesoro High Plains Pipeline
CABLE SERV	Cable Services	MISS W W S	Missouri West Water System	TRI-CNTY WU	Tri-County Water Users Incorporated
CAP ELEC	Capital Electric Cooperative Incorporat	MNKOTA PWR	Minnkota Power	TRL CO RWU	Traill County Rural Water Users
CASS CO ELEC	Cass County Electric Cooperative	MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative	UNTD TEL	United Telephone
CASS RWU	Cass Rural Water Users Incorporated	MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative	UPPR SOUR WUA	Upper Souris Water Users Association
CAV ELEC	Cavalier Rural Electric Cooperative	MRE LBTY TEL	Moore & Liberty Telephone	US SPRINT	U.S. Sprint
CBLCOM	Cablecom Of Fargo	MUNICIPAL	City Water And Sewer	USAF MSL CABLE	U.S.A.F. Missile Cable
CENEX PL	Cenex Pipeline	MUNICIPAL	City Of '.....'	USFWS	US Fish and Wildlife Service
CENT PL WATER DIST	Central Pipe Line Water District	N CENT ELEC	North Central Electric Cooperative	USW COMM	U.S. West Communications
CENT PWR ELEC	Central Power Electric Cooperative	N VALL W DIST	North Valley Water District	VRNDRY ELEC	Verendrye Electric Cooperative
COE	Corps of Engineers	ND PKS & REC	North Dakota Parks And Recreation	W RIV TEL	West River Telephone Incorporated
CONS TEL	Consolidated Telephone	ND TEL	North Dakota Telephone Company	WEB	W. E. B. Water Development Association
CONT RES	Continental Resource Inc	NDDOT	North Dakota Department of Transportation	WILLI RWA	Williams Rural Water Association
CPR	Canadian Pacific Railway	NDSU SOIL SCI DEPT	NDSU Soil Science Department	WILSTN BAS PL	Williston Basin Interstate Pipeline Company
D O E	Department Of Energy	NEMONT TEL	Nemont Telephone	WLSH RWD	Walsh Water Rural Water District
DAK CARR	Dakota Carrier Network	NODAK R ELEC	Nodak Rural Electric Cooperative	WOLVRTN TEL	Wolverton Telephone
DAK CENT TEL	Dakota Central Telephone	NOON FRMS TEL	Noonan Farmers Telephone Company	XLENER	Xcel Energy
DAK RWD	Dakota Rural Water District	NPR	Northern Plains Railroad	YSVR	Yellowstone Valley Railroad
DGC	Dakota Gasification Company	NSP	Northern States Power		
DICKEY R NET	Dickey Rural Networks	NTH PRAIR RW	Northern Prairie Rural Water Association		
DICKEY RWU	Dickey Rural Water Users Association	NTHN BRDR PL	Northern Border Pipeline		
DICKEY TEL	Dickey Telephone	NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated		
DNRR	Dakota Northern Railroad	NTHWSTRN REF	Northwestern Refinery Company		
DO ME PL	Dome Pipeline Company	NW COMM	Northwest Communication Cooperation		
DVELEC	Dakota Valley Electric Cooperative	ONEOK	Oneok gas		
DVMW	Dakota, Missouri Valley & Western	OSHA	Occupational Safety and Health Administration		
ENBRDG	Enbridge Pipelines Incorporated	OTTR TL PWR	Otter Tail Power Company		
ENVENTIS	Enventis Telephone	P L E M	Prairielands Energy Marketing		
FALK MNG	Falkirk Mining Company	POLAR COM	Polar Communications		
FHWA	Federal Highway Administration	PVT ELEC	Private Electric		
G FKS-TRL WD	Grand Forks-traill Water District	QWEST	Qwest Communications		
GETTY TRD & TRAN	Getty Trading & Transportation	R&T W SUPPLY	R & T Water Supply Association		
GLDN W ELEC	Golden West Electric Cooperative	RAMSEY R SEW	Ramsey Rural Sewer Association		
GRGS CO TEL	Griggs County Telephone	RAMSEY RW	Ramsey Rural Water Association		
		RAMSEY UTIL	Ramsey County Rural Utilities		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Line Styles

	Subgrade Reinforcement		Existing Railroad Switch		Sheet Piling
	Existing Down Guy Wire Down Guy		Overhead Sign Structure Cantilever		W-Beam w Posts
	Existing Fence		24 Inch Pipe		Existing W-Beam Guardrail with Posts
	Existing Railroad		Reinforced Concrete Pipe		Exst Wet Area-Vegetation Break
	Existing Sanitary Sewer		Signal Head with Mast Arm		Existing Wetland Delineated
	Existing Sanitary Force Main		Existing Signal Head with Mast Arm		
	Existing Storm Drain		Tie Bar at Random Spacing		
	Existing Storm Drain Force Main		3-Cable w Posts		
	Fence		Existing 3-Cable w Posts		
	Silt Fence		Site Boundary		
	Existing Field Line		Fiber Rolls		
	Exst Flow		Doweled Joint		
	Flow		Tie Bar 30 Inch 4 Foot Center to Center		
	Existing Culvert		Tie Bar 18 Inch 3 Foot Center to Center		
	Existing Curb		Existing Berm, Dike, Pit, or Earth Dam		
	Existing Valley Gutter		Existing Ditch Block		
	Existing Driveway Gutter		Depression Contours		
	Existing Curb and Gutter		Existing City Corporate Limits or Reservation Boundary		
	Existing Mountable Curb and Gutter		Gravel Pit - Borrow Area		
	Existing Double Micro Loop Detector		Existing Tree Boundary		
	Micro Loop Detector Double		Tree Row		
	Existing Overhead Sign Structure		Existing Brush or Shrub Boundary		
	Existing Micro Loop Detector		Existing Retaining Wall		
	Micro Loop Detector		Existing Planter or Wall		
	Existing Overhead Sign Structure Cantilever		Retaining Wall (Plan View)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	North Arrow (Half Scale)		Attenuation Device		Existing Railroad Battery Box		Existing Delineator Type E
	Truck Mounted Attenuator		Diamond Grade Delineator Type A		Existing Bush or Shrub		Existing EFB Misc
	Type I Barricade		Diamond Grade Delineator Type B		Existing Gas Cap or Stub		Existing Flashing Beacon
	Type II Barricade		Diamond Grade Delineator Type C		Existing Sanitary Cap or Stub		Existing Pipe Mounted Flasher
	Type III Barricade		Diamond Grade Delineator Type D		Existing Storm Drain Cap or Stub		Existing Pad Mounted Feed Point
	Catch Basin		Diamond Grade Delineator Type E		Existing Water Cap or Stub		Existing Pipe Mounted Feed Point with Pad
	Cairn or Stone Circle		Flexible Delineator		Existing Sanitary Cleanout		Existing Pole Mounted Feed Point
	Video Detection Camera		Flexible Delineator Type A		Existing Concrete Foundation		Existing Railroad Frog
	Storm Drain Cap or Stub		Flexible Delineator Type B		Existing Traffic Signal Controller		Existing Snow Gate 18
	Corrugated Metal End Section 18 Inch		Flexible Delineator Type C		Existing Pad Mounted Signal Controller		Existing Snow Gate 28
	Corrugated Metal End Section 24 Inch		Flexible Delineator Type D		Existing Sixteenth Section Corner		Existing Snow Gate 40
	Corrugated Metal End Section 30 Inch		Flexible Delineator Type E		Existing Quarter Section Corner		Existing Headwall
	Corrugated Metal End Section 36 Inch		Delineator Type A		Existing Section Corner		Existing Pedestrian Head with Number
	Corrugated Metal End Section 42 Inch		Delineator Type A Reset		Existing Railroad Crossbuck		Existing Signal Head
	Corrugated Metal End Section 48 Inch		Delineator Type B		Existing Satellite Dish		Existing Sprinkler Head
	Concrete Foundation		Delineator Type B Reset		Existing Fuel Dispensers		Existing Fire Hydrant
	Ground Connection Conductor		Delineator Type C		Existing Flexible Delineator Type A		Existing Catch Basin Drop Inlet
	Neutral Connection Conductor		Delineator Type D		Existing Flexible Delineator Type B		Existing Curb Inlet
	Phase 1 Connection Conductor		Delineator Type E		Existing Flexible Delineator Type C		Existing Manhole Inlet
	Phase 2 Connection Conductor		Delineator Drums		Existing Flexible Delineator Type D		Existing Junction Box
	Traffic Cone		Spot Elevation		Existing Flexible Delineator Type E		
	Signal Controller		Existing Access Control Arrow		Existing Delineator Type A		
	Pad Mounted Signal Controller		Existing Artifact		Existing Delineator Type B		
	Alignment Data Point		Existing Flashing Beacon		Existing Delineator Type C		
	Emergency Vehicle Detector		Existing Benchmark		Existing Delineator Type D		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	Existing Light Standard		Existing Manhole with Valve Water		Existing Telephone Pole		Existing Undefined Manhole
	Existing High Mast Light Standard 10 Luminaire		Existing Water Manhole		Existing Wood Pole		Existing Undefined Pull Box
	Existing High Mast Light Standard 3 Luminaire		Existing Mile Post Type A		Existing Post		Existing Undefined Pedestal
	Existing High Mast Light Standard 4 Luminaire		Existing Mile Post Type B		Existing Pedestrian Push Button Post		Existing Undefined Valve
	Existing High Mast Light Standard 5 Luminaire		Existing Mile Post Type C		Existing Control Point CP		Existing Undefined Pipe Vent
	Existing High Mast Light Standard 6 Luminaire		Existing Reference Marker		Existing Control Point GPS-RTK		Existing Gas Valve
	Existing High Mast Light Standard 7 Luminaire		Existing RW Marker		Existing Control Point TRI		Existing Water Valve
	Existing High Mast Light Standard 8 Luminaire		Existing Utility Marker		Existing Reference Marker Point NGS		Existing Fuel Pipe Vent
	Existing High Mast Light Standard 9 Luminaire		Iron Monument Found		Existing Pull Box		Existing Gas Pipe Vent
	Existing Overhead Sign Structure Load Center		Iron Pin R/W Monument		Existing Intelligent Transportation Pull Box		Existing Sanitary Pipe Vent
	Existing Luminaire		Existing Object Marker Type I		Existing Water Pump		Existing Storm Drain Pipe Vent
	Existing Light Standard Luminaire		Existing Object Marker Type II		Existing Slotted Reinforced Concrete Pipe		Existing Water Pipe Vent
	Existing Federal Mailbox		Existing Object Marker Type III		Existing RR Profile Spot		Existing Weather Station
	Existing Private Mailbox		Existing Electrical Pedestal		Existing Fuel Leak Sensors		Existing Ground Water Well Bore Hole
	Existing Meander Section Corner		Existing Telephone Pedestal		Existing Highway Sign		Existing Windmill or Tower
	Existing Meter		Existing Fiber Optic Telephone Pedestal		Existing Miscellaneous Spot		Existing Witness Corner
	Existing Electrical Manhole		Existing TV Pedestal		Existing Lighting Standard Pole		Flashing Beacon
	Existing Gas Manhole		Existing Fiber Optic TV Pedestal		Existing Traffic Signal Standard		Flagger
	Existing Sanitary Manhole		Existing Fuel Filler Pipes		Existing Transformer		Pipe Mounted Flasher
	Existing Sanitary Force Main Manhole		Existing Traverse PI Aerial Panel		Existing Large Evergreen Tree		Sanitary Force Main with Valve
	Existing Sanitary Manhole with Valve		Existing Pole		Existing Small Evergreen Tree		
	Existing Storm Drain Manhole		Existing Power Pole		Existing Large Tree		
	Existing Force Main Storm Drain Manhole		Existing Power Pole with Transformer		Existing Small Tree		
	Existing Force Main Storm Drain Manhole with Valve				Existing Tree Trunk		
	Existing Telephone Manhole				Existing Pad Mounted Traffic Signal Control Box		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols


D-101-32

 Pad Mounted Feed Point  Pipe Mounted Feed Point with Pad  Pole Mounted Feed Point  Headwall  Double Headwall with Vegetation Barrier  Single Headwall with Vegetation Barrier  Pole Mounted Head  Sprinkler Head  Fire Hydrant  Inlet Type 1  Inlet Type 2  Double Inlet Type 2  Inlet Gate Type 2  Junction Box  High Mast Light Standard 10 Luminaire  High Mast Light Standard 3 Luminaire  High Mast Light Standard 4 Luminaire  High Mast Light Standard 5 Luminaire  High Mast Light Standard 6 Luminaire  High Mast Light Standard 7 Luminaire  High Mast Light Standard 8 Luminaire  High Mast Light Standard 9 Luminaire  Relocate Light Standard  Overhead Sign Structure Load Center  Light Standard 100 Watt High Pressure Sodium Vapor Luminaire	 Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire  Light Standard 150 Watt High Pressure Sodium Vapor Luminaire  Light Standard 175 Watt High Pressure Sodium Vapor Luminaire  Light Standard 200 Watt High Pressure Sodium Vapor Luminaire  Light Standard 250 Watt High Pressure Sodium Vapor Luminaire  Light Standard 310 Watt High Pressure Sodium Vapor Luminaire  Light Standard 35 Watt High Pressure Sodium Vapor Luminaire  Light Standard 400 Watt High Pressure Sodium Vapor Luminaire  Light Standard 50 Watt High Pressure Sodium Vapor Luminaire  Light Standard 70 Watt High Pressure Sodium Vapor Luminaire  Light Standard 700 Watt High Pressure Sodium Vapor Luminaire  Manhole  Manhole 48 Inch  Sanitary Force Main Manhole  Sanitary Sewer Manhole  Storm Drain Manhole  Storm Drain Manhole with Inlet  Reset Mile Post  Mile Post Type A  Mile Post Type B  Mile Post Type C  Right of Way Marker  Tubular Marker  Alignment Monument  Iron Pin Reference Monument	 Object Marker Type I  Object Marker Type II  Object Marker Type III  Caution Mode Arrow Panel  Back to Back Vertical Panel Sign  Double Direction Arrow Panel  Left Directional Arrow Panel  Right Directional Arrow Panel  Sequencing Arrow Panel  Truck Mounted Arrow Panel  Power Pole  Wood Pole  Pedestrian Push Button Post  Property Corner  Pull Box  Intelligent Transportation Pull Box  Sanitary Pump  Storm Drain Pump  Reinforced Pavement  Reinforced Concrete End Section 15 Inch  Reinforced Concrete End Section 18 Inch  Reinforced Concrete End Section 24 Inch  Reinforced Concrete End Section 30 Inch  Reinforced Concrete End Section 36 Inch  Reinforced Concrete End Section 42 Inch	 Reinforced Concrete End Section 48 Inch  Reinforced Concrete End Section 54 Inch  Reset Right of Way Marker  Reset USGS Marker  Right of Way Markers  Riser 30 Inch  Continuous Split Barrel Sample  Flight Auger Sample  Split Barrel Sample  Thinwall Tube Sample  Highway Sign  SNOW GATE 18 FT  SNOW GATE 28 FT  SNOW GATE 40 FT  Standard Penetration Test  Transformer  Inclinometer Tube  Underdrain Cleanout  Excavation Unit  Water Valve
---	--	---	--

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
Roger Weigel,
 Registration Number
 PE-2930,
 on 07/01/14 and the original document is stored at the
 North Dakota Department
 of Transportation

EROSION CONTROL
FIBER ROLL PLACEMENT DETAILS

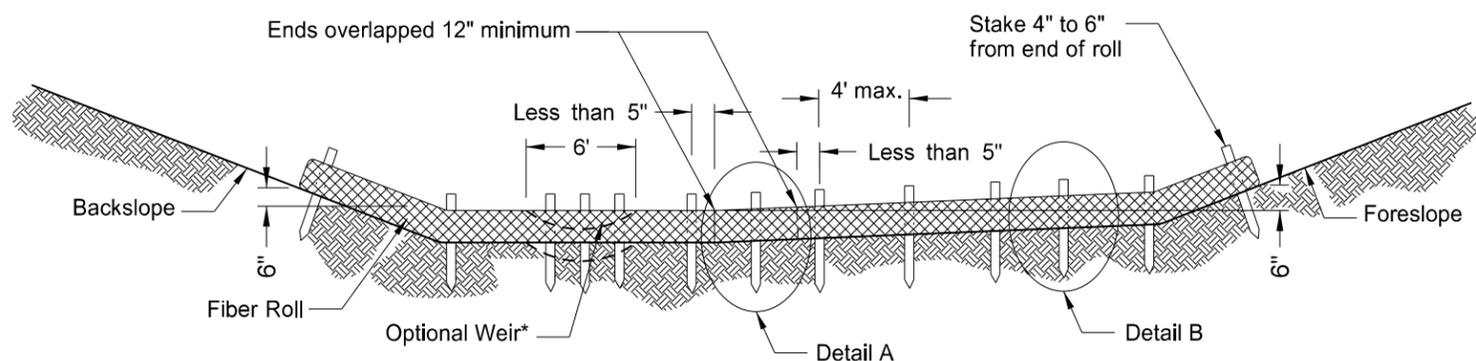


*Optional Weir. Use in flat areas, such as the Red River Valley, where there is potential for water to back up on adjacent property. Lower fiber roll enough to prevent water from backing up on adjacent property. Do not use 20-inch fiber rolls in flat areas where there is potential for water to back up on adjacent property.


12 OR 20 INCH FIBER ROLL - DITCH BOTTOM

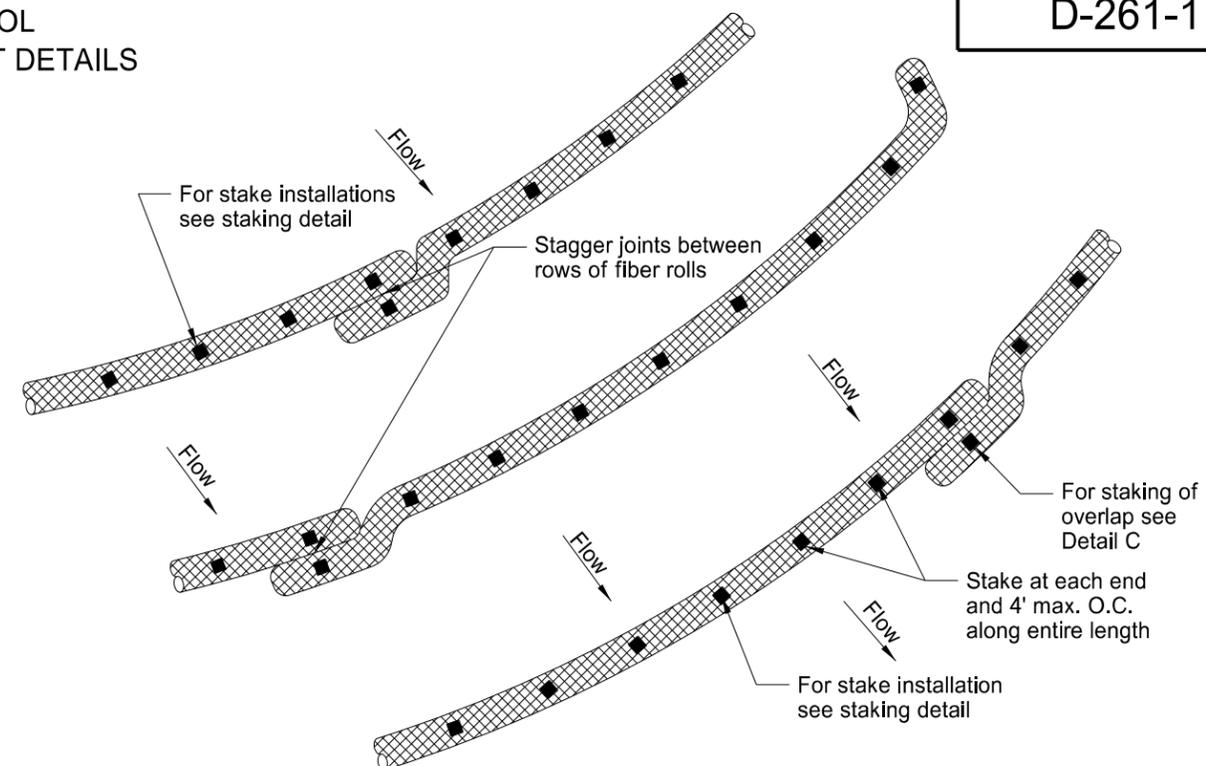


PLAN VIEW FOR SLOPE APPLICATION

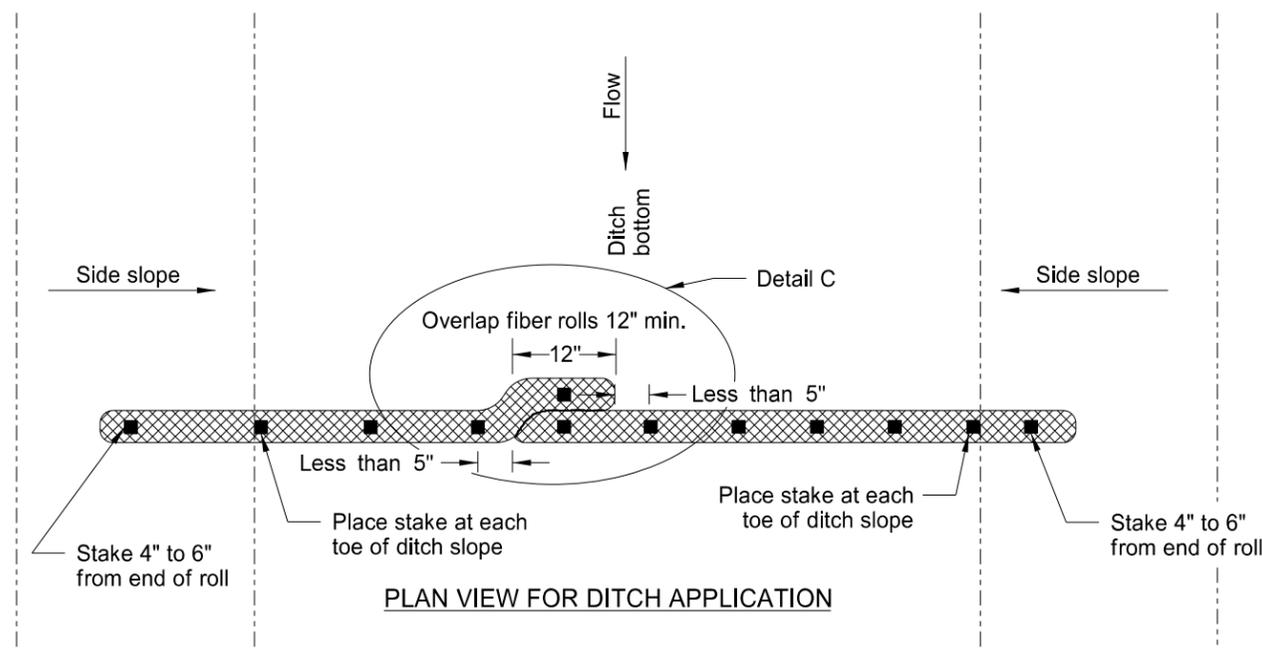

PLAN VIEW FOR DITCH APPLICATION

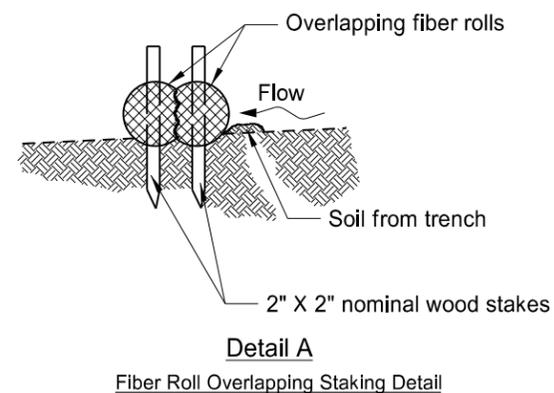

Detail A
Fiber Roll Overlapping Staking Detail

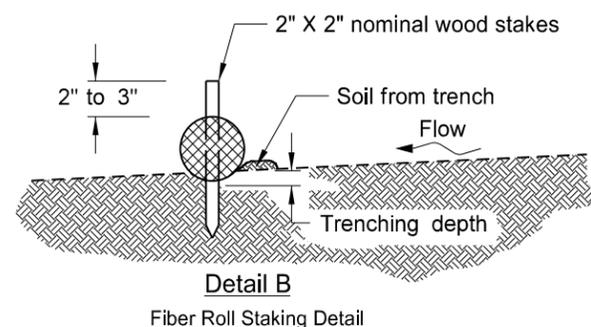


Detail B
Fiber Roll Staking Detail

FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	MINIMUM TRENCH DEPTH	MAXIMUM TRENCH DEPTH
6"	2" x 2"	18"	2"	2"
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"

NOTE: Runoff must not be allowed to run under or around roll.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-18-10	
REVISIONS	
DATE	CHANGE
06-10-13	Added plan view for ditch and slope application, Added table with values for stake and trench dimensions.
10-04-13	Revised fiber roll overlap detail.
06-26-14	Changed standard drawing number from D-708-7 to D-261-1

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 06/26/14 and the original document is stored at the North Dakota Department of Transportation

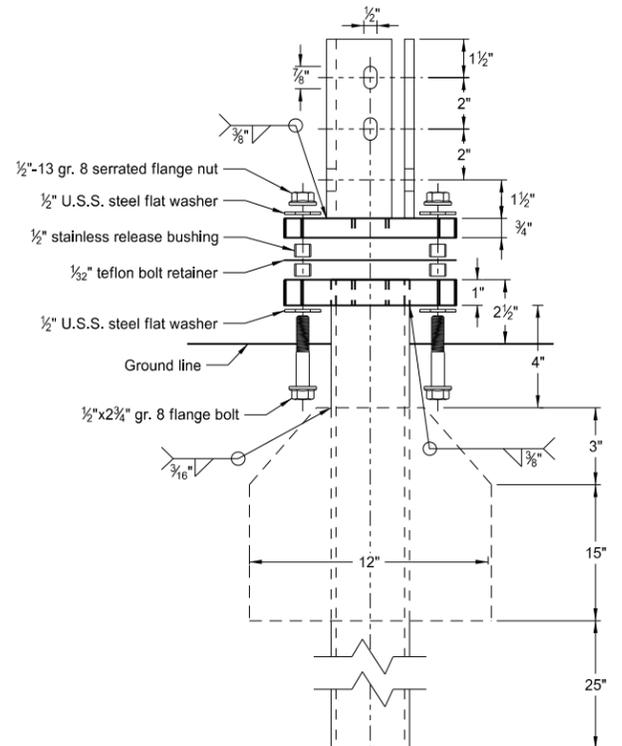


Multi-Directional Slip Base Assembly

Perforated Tube

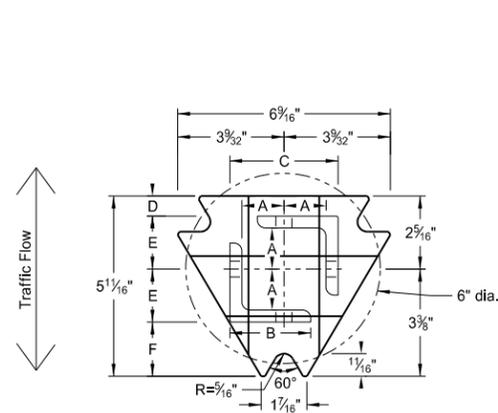

Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2 1/2" x 2 1/2" x 3/8" ASTM A36 structural angle

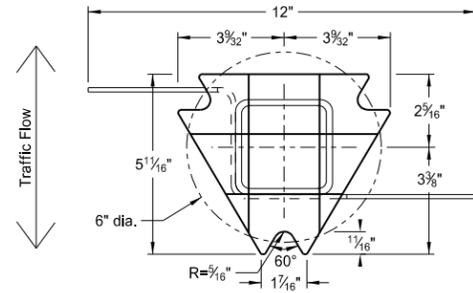

Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50


Notes:

1. Slip base bolts shall be torqued as specified by the manufacturer.
2. Anchor shall have a yield strength of 43.9 KSI and tensile strength of 59.3 KSI.
3. The 4" vertical clearance is required for the anchor or breakaway base. The 4"x60" measurement shall be made above and below post location and also back and ahead of the post.
4. When used in concrete sidewalk, anchor shall be same except without the wings.
5. Four post signs shall have over 7' between the first and the fourth posts.


Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785


Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16" x 10 ga.	1 9/64"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 1/8"
2 1/2" x 10 ga.	1 9/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

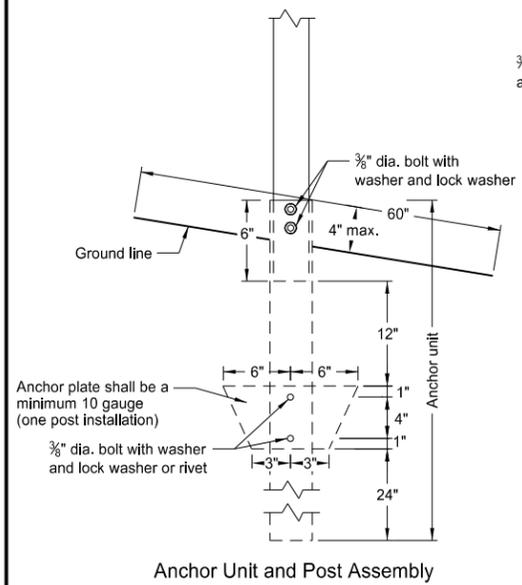

Anchor Unit and Post Assembly

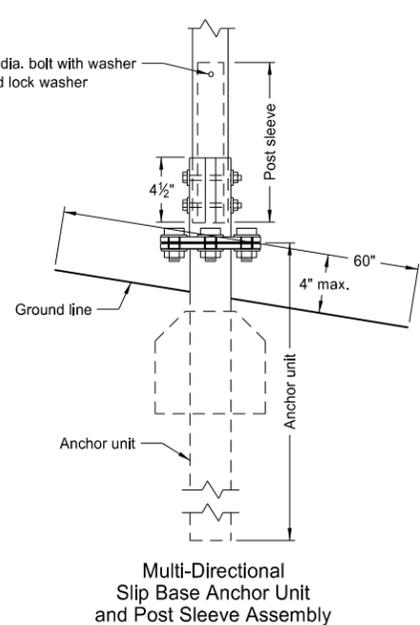

Multi-Directional Slip Base Anchor Unit and Post Sleeve Assembly

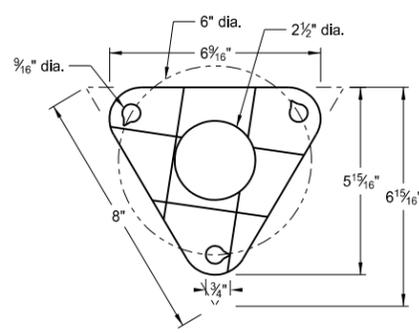



Bolt Retainer for Base Connection
Bolt Retainer - 1/32" Reprocessed Teflon

- (A) The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak.
- (B) The 2 3/16" x 10 ga. may be inserted into 2 1/2" x 10 ga. for additional wind load.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

U-Channel Post

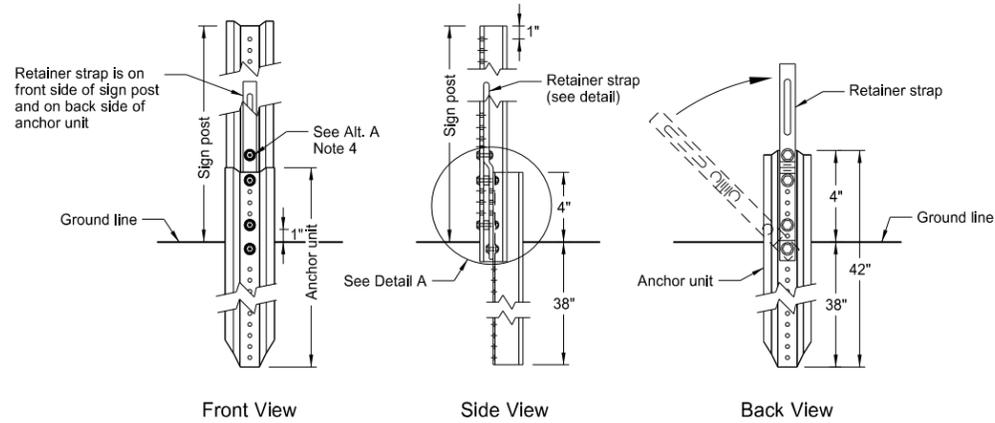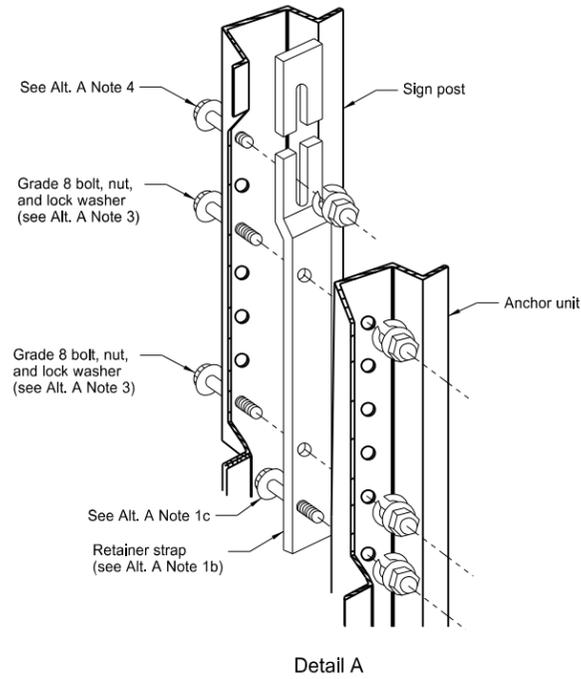


Breakaway U-Channel Detail Alternate A

A maximum of 2 posts shall be installed within 7'.

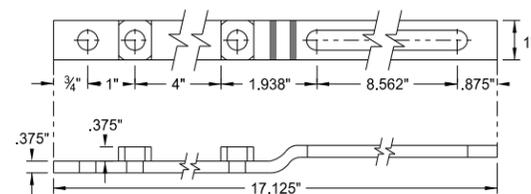


Retainer Strap Detail

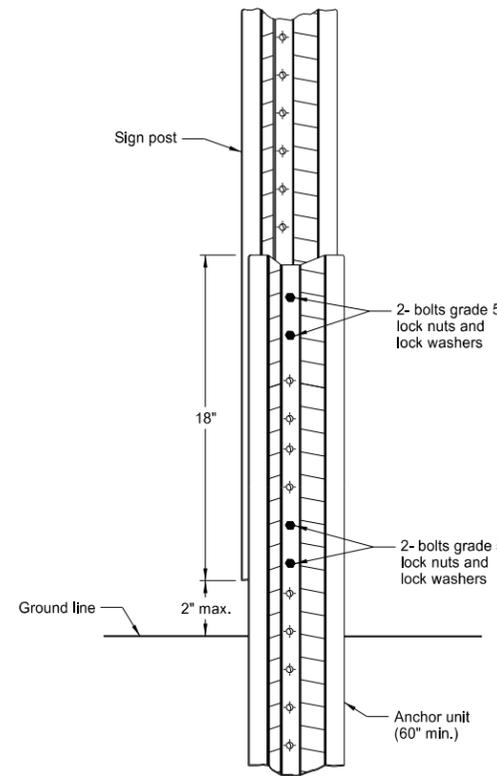

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

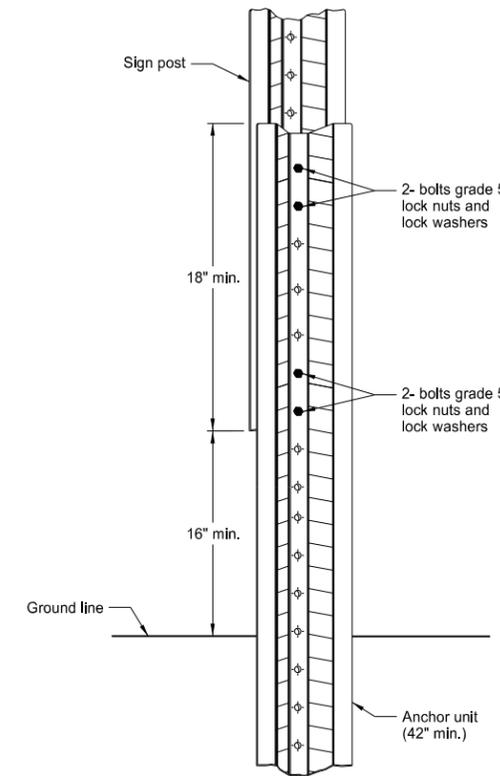

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

Alternate A Steps of Installation:












1. a) Drive anchor unit to within 12" of ground level.
b) Proper assembly established by lining up the bottom hole of retainer strap with the 6th hole from the top of the anchor unit.
c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. The base post, strap and sign post shall be properly nested. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
 TERMINAL AND GUIDE SIGNS

D-704-9

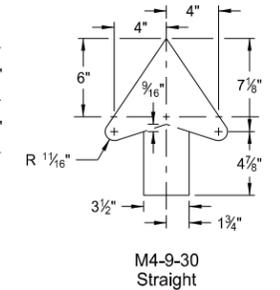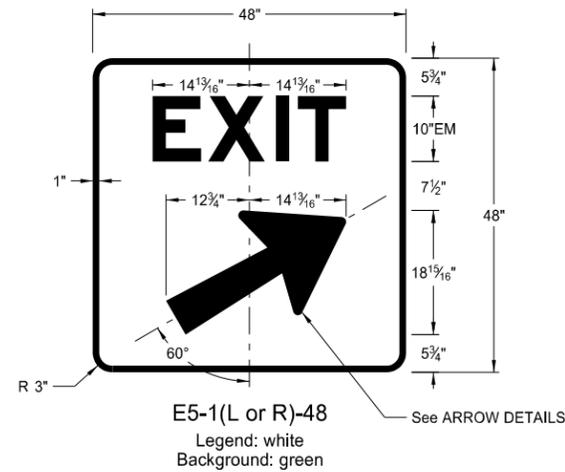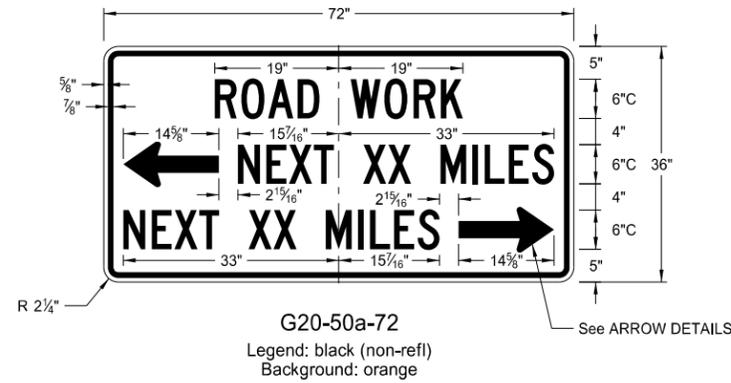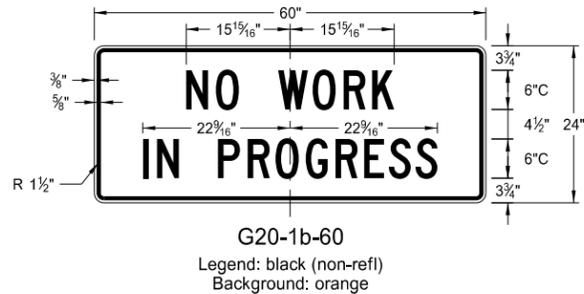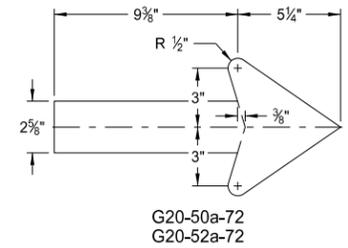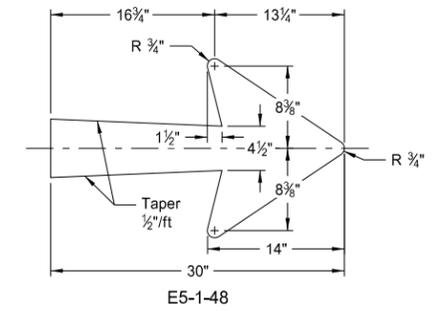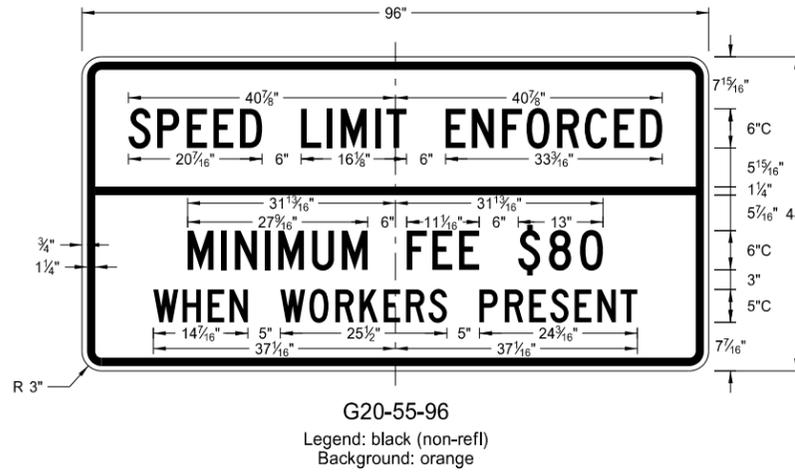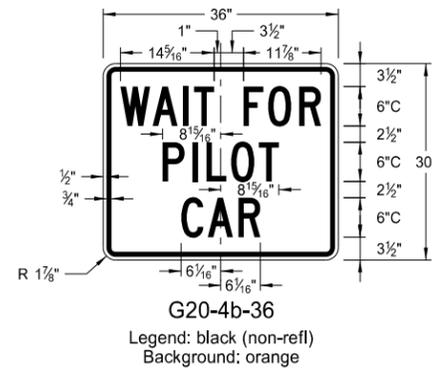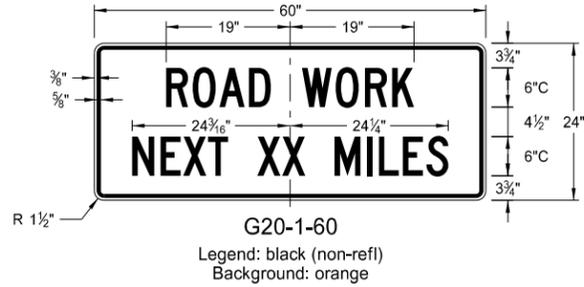

ARROW DETAILS

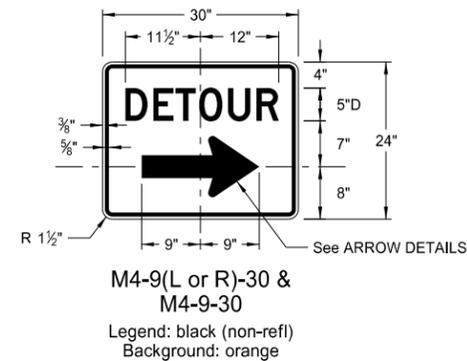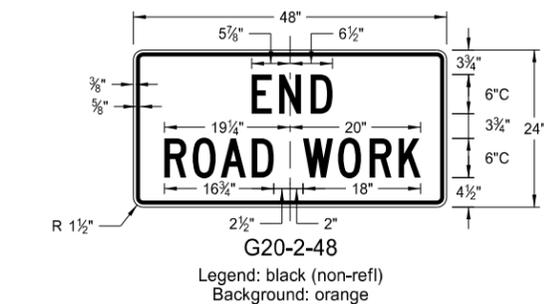

NOTES:


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS

D-704-10

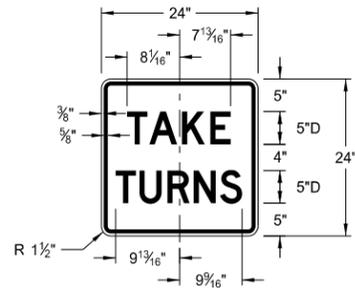


R1-50-24

Legend: black (non-refl)
Background: white

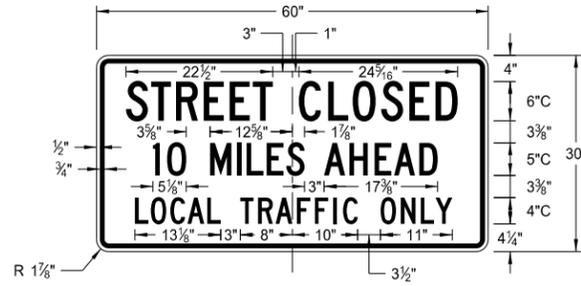


R11-3c-60

Legend: black (non-refl)
Background: white

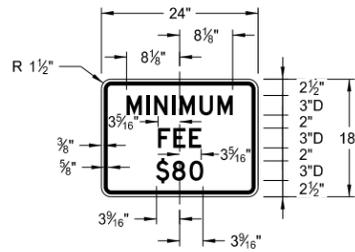

R2-1a-24

Legend: black (non-refl)
Background: white

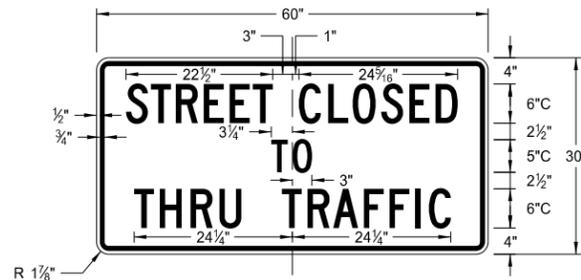

R11-4a-60

Legend: black (non-refl)
Background: white



R11-2a-48

Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

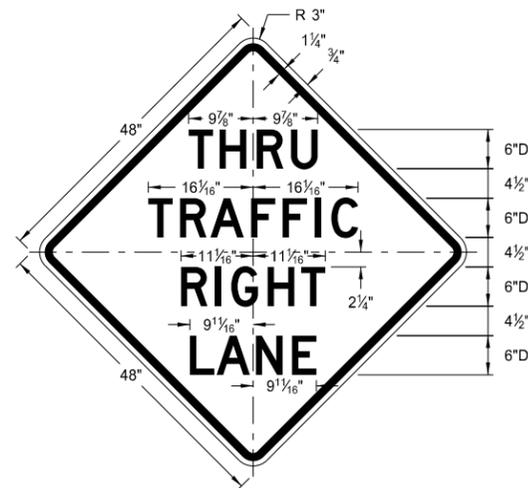


W5-8-48
Legend: black (non-refl)
Background: orange

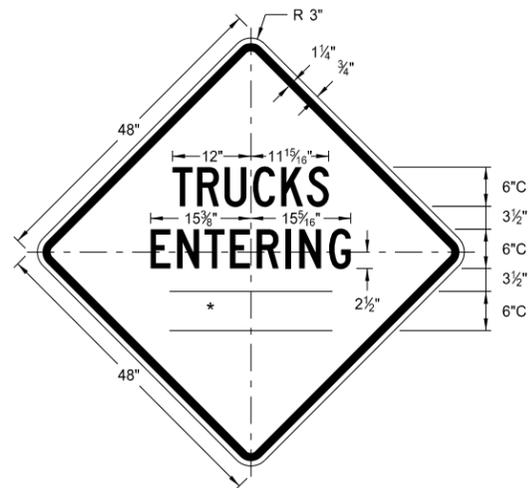


W8-54-48
Legend: black (non-refl)
Background: orange

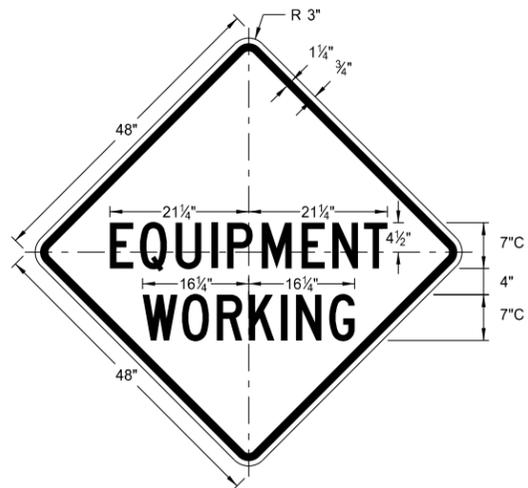


W20-51-48
Legend: black (non-refl)
Background: orange

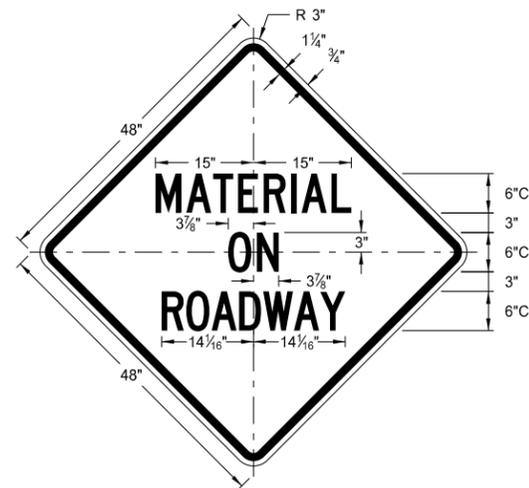


W21-51-48
Legend: black (non-refl)
Background: orange

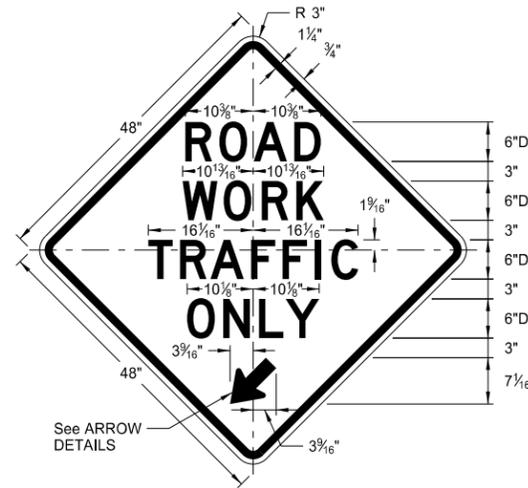


W5-9-48
Legend: black (non-refl)
Background: orange

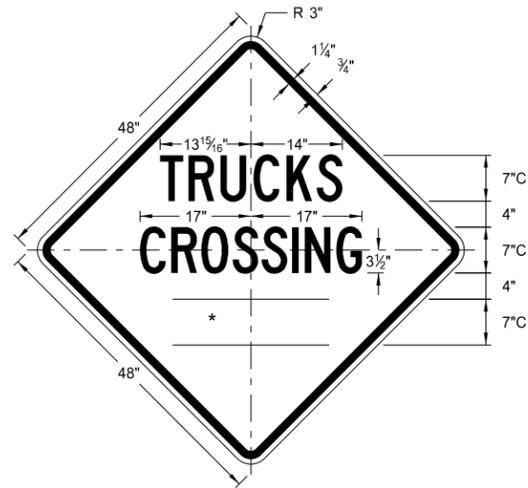


W8-55-48
Legend: black (non-refl)
Background: orange

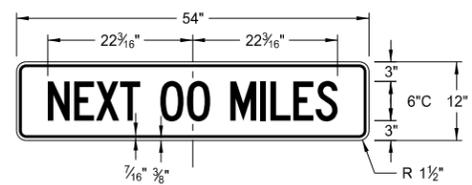


W20-52-54
Legend: black (non-refl)
Background: orange

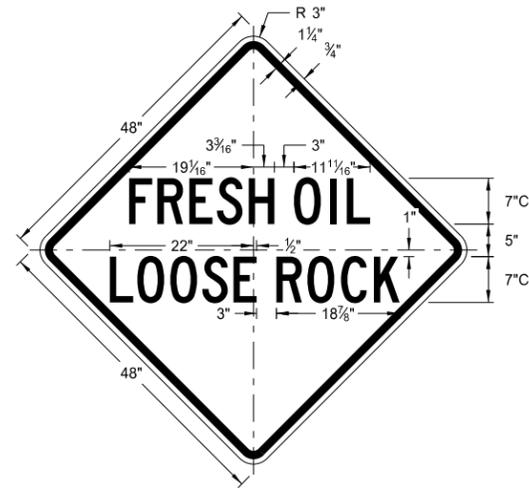


W22-8-48
Legend: black (non-refl)
Background: orange




W5-9-48
ARROW DETAILS

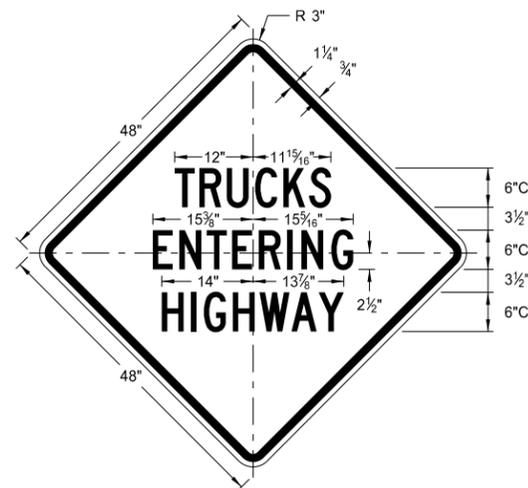

W8-53-48
Legend: black (non-refl)
Background: orange

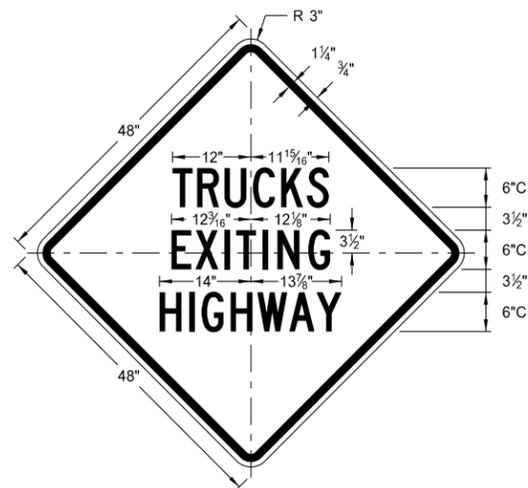

W8-56-48
Legend: black (non-refl)
Background: orange

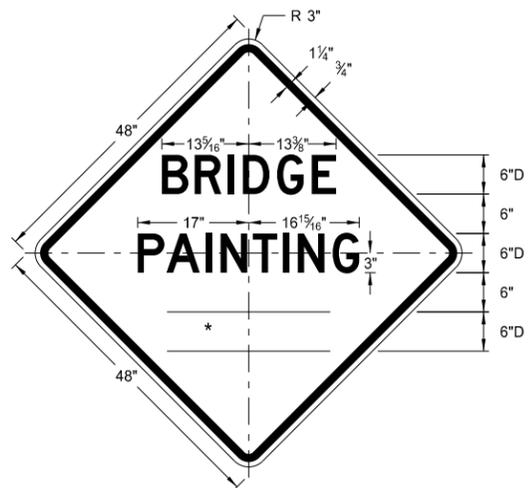


W21-50-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

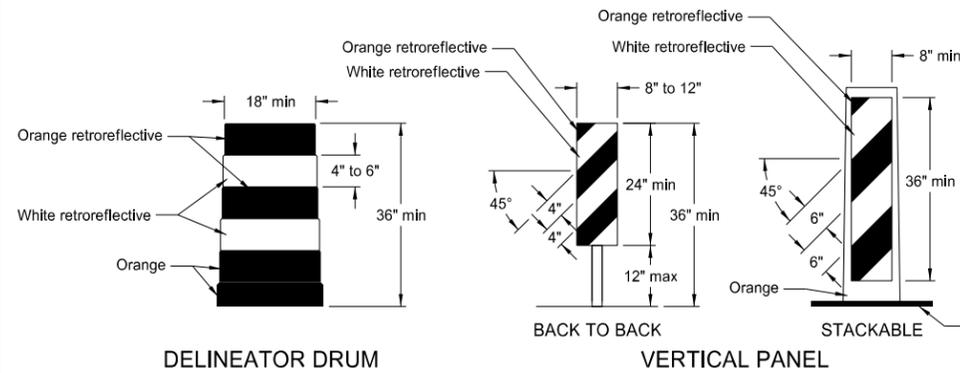


The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED spaces between the horizontal orange and white stripes shall not exceed 3" wide. Stripes shall not be placed on ribs or indentations in the drum. Drums shall have closed tops that will not allow collection of construction debris or other debris. Ballast shall not be placed on the top of a drum.

Markings for vertical panels shall be alternating orange and white retroreflective stripes, sloping downward in the direction vehicular traffic is to pass. Retroreflective sheeting shall be placed on both sides of panel and shall have a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.

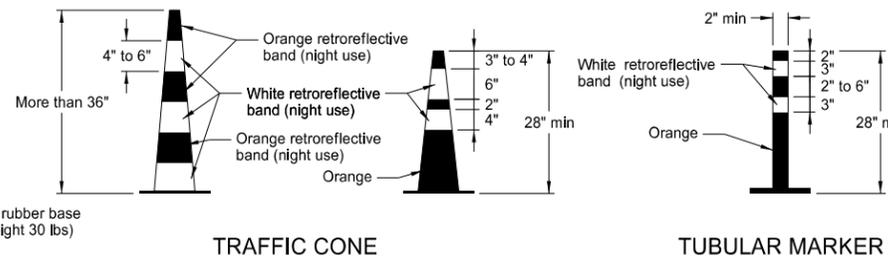


RetroreflectORIZATION of cones more than 36" in height shall be provided by alternating orange and white retroreflective stripes. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED space between the orange and white stripes shall not exceed 3" wide.

RetroreflectORIZATION of tubular markers more than 42" in height shall be provided by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

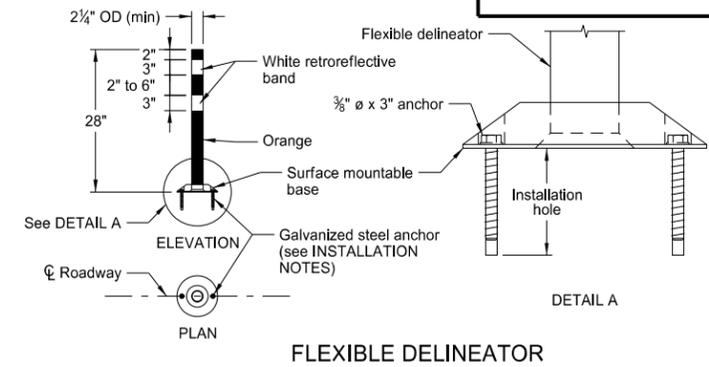

INSTALLATION NOTES:


1. Drill installation holes to diameter and depth as required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, the contractor may use an 8" x 8" butyl pad or hot melt butyl. Butyl shall be removed as close as possible to pavement surface.

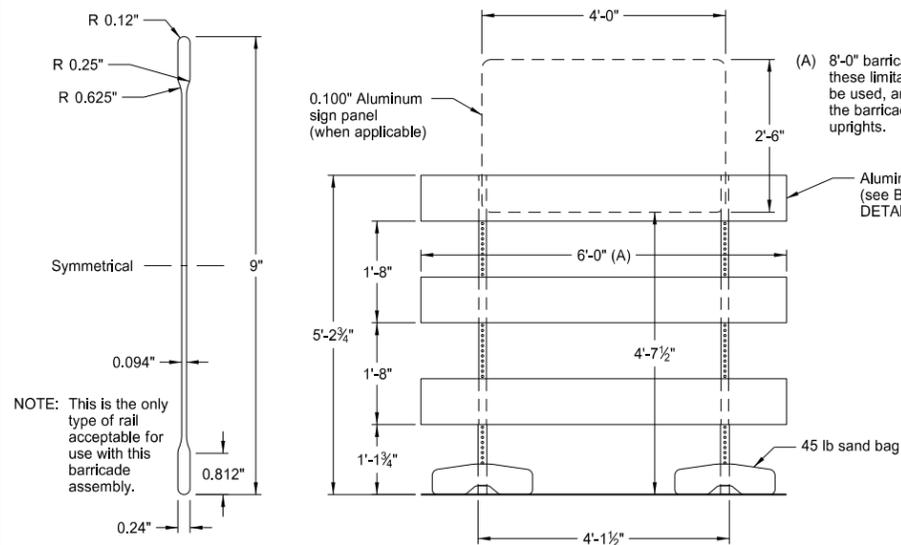

BARRICADE BLADE DETAIL

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

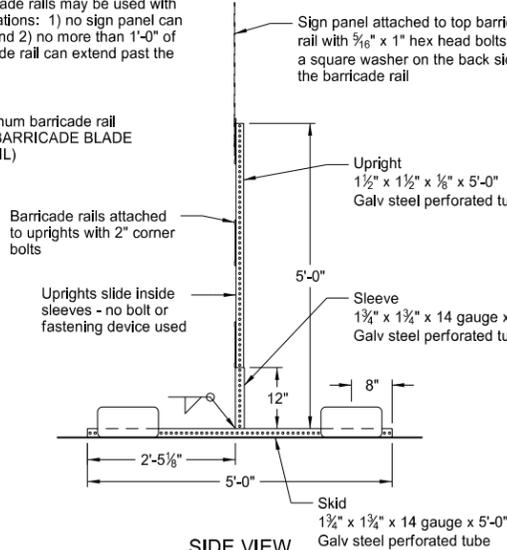


ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

SIDE VIEW

NOTE: Markings for barricades shall be alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Retroreflective sheeting shall be placed on both sides of the rails and shall have a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", the rail stripe width shall be 4".

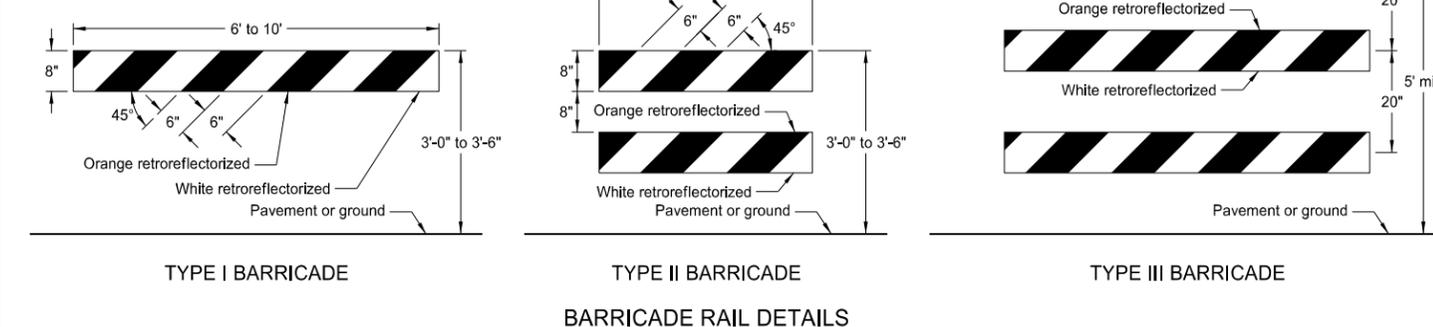


TYPE I BARRICADE

TYPE II BARRICADE

TYPE III BARRICADE

BARRICADE RAIL DETAILS

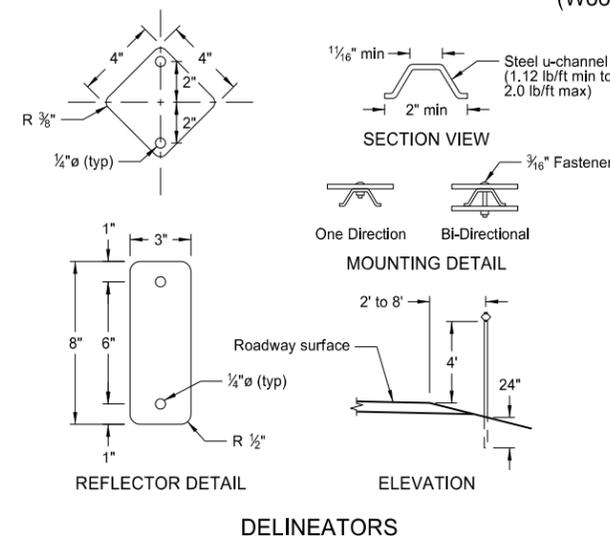

MINIMUM BALLAST (For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: Signs placed in sections with curb shall have a minimum horizontal clearance of 2' from the face of the curb to the near edge of the sign.

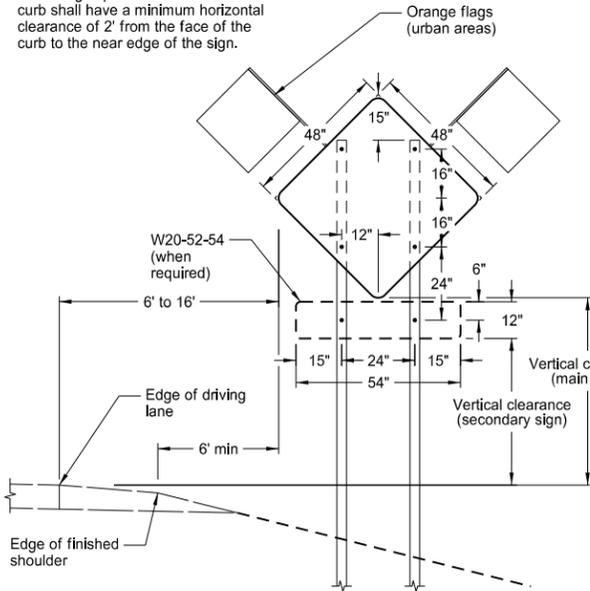


TYPICAL SECTION (48" x 48" diamond warning sign shown)

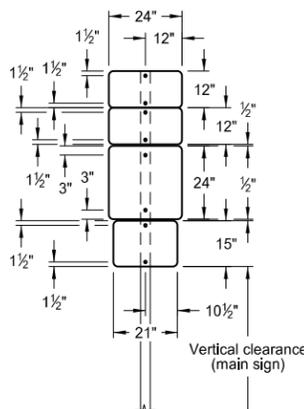


24" x 24" ROUTE MARKER ASSEMBLY

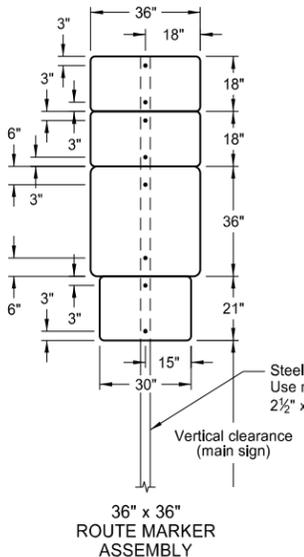


36" x 36" ROUTE MARKER ASSEMBLY

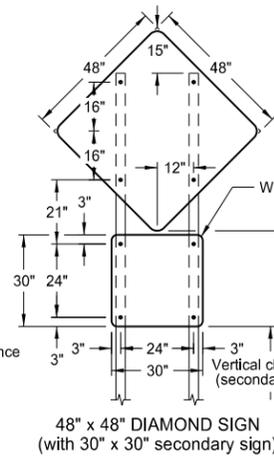



48" x 48" DIAMOND SIGN (with 30" x 30" secondary sign)





18" x 18" DIAMOND SIGN





108" x 48" SIGN

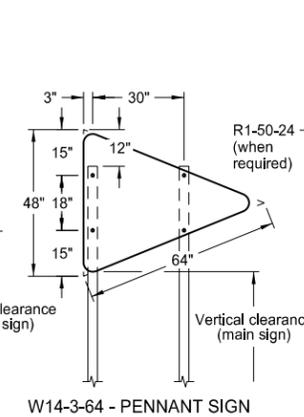


W14-3-64 - PENNANT SIGN

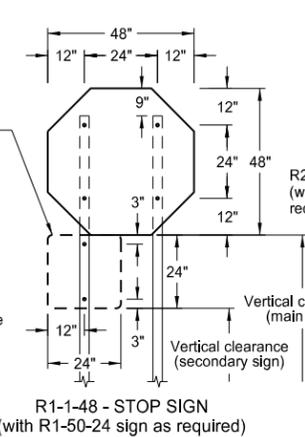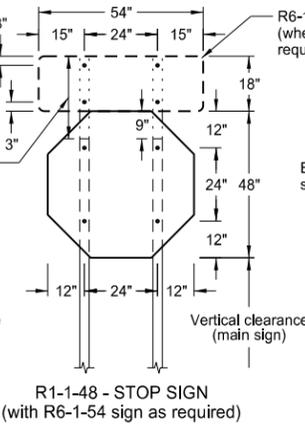


R1-1-48 - STOP SIGN (with R1-50-24 sign as required)

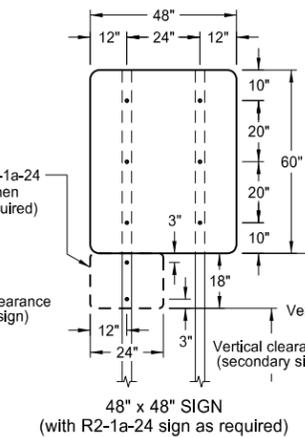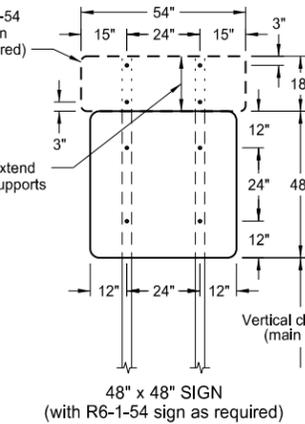


48" x 48" SIGN (with R2-1a-24 sign as required)




24" x 36" SIGN

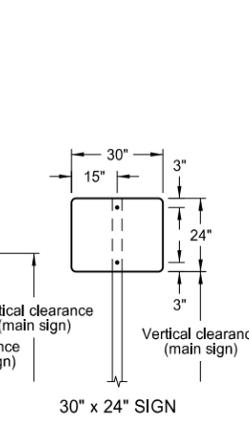


30" x 24" SIGN

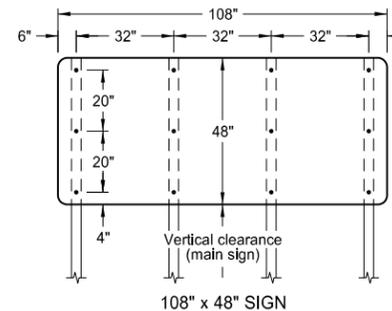


96" x 48" SIGN




72" x 36" SIGN




72" x 24" SIGN




60" x 24" SIGN



48" x 24" SIGN

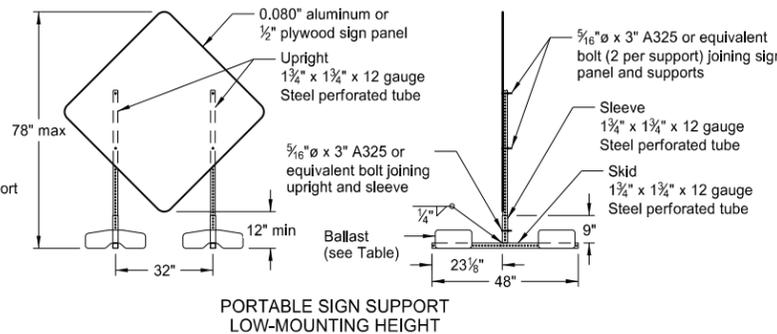

PORTABLE SIGN SUPPORT LOW-MOUNTING HEIGHT

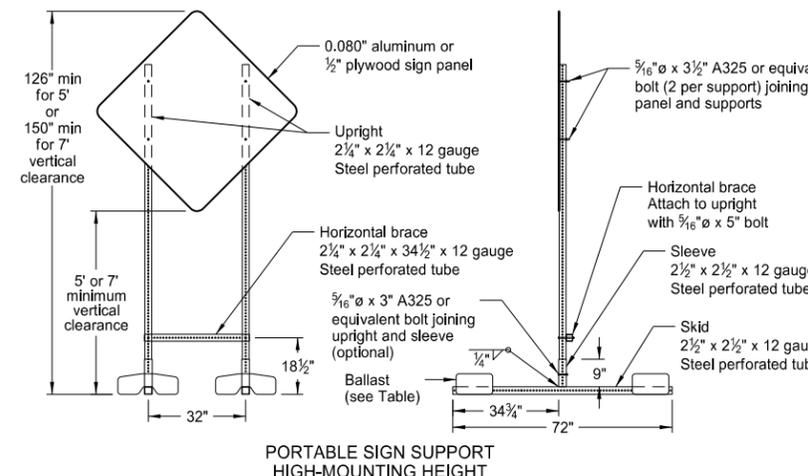

PORTABLE SIGN SUPPORT HIGH-MOUNTING HEIGHT

- NOTES:
- Sign Supports: Supports shall be galvanized or painted. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, the minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes are based on a wind speed of 55 MPH.
Signs over 50 square feet should be installed on 2 1/2" x 2 1/2" perforated tube supports as a minimum.
Guy wires shall not be attached to sign supports. Wind beams may be attached to u-posts behind the sign panels.
 - Sign Panels: Provide sign panels made of 0.100" aluminum, 1/2" plywood, or other approved material, except where noted. All holes to be punched round for 3/8" bolts.
 - Alternate Messages: The signs that have alternate messages may have these alternate messages placed on a reflectorized plate (without a border) and installed and removed as required. (i.e. "Left" and "Right" message on a lane closure sign)
 - Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:
Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background
 - Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.
The vertical clearance to secondary signs is 1'-0" less than the vertical clearance as stated above.
Large signs having an area exceeding 50 square feet shall have a minimum clearance of 7'-0" from the ground at the post.
 - Portable Signs: Provide portable signs that meet the vertical clearance as stated above. Use portable signs when it is necessary to place signs within the pavement surface.
When portable signs are used for 5 days or less, low-mounting height (minimum 12" vertical clearance) sign supports may be used as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. The R9-8 through R9-11a series, W1-5 through W1-8 series, M4-10, and E5-1 may be used for longer than 5 days.
Signs mounted to the portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT Details shall have a maximum surface area of 16 square feet.

MINIMUM BALLAST (For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10


Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6.

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/14/13 and the original document is stored at the North Dakota Department of Transportation

SHOULDER CLOSURES AND BRIDGE PAINTING LAYOUTS


D-704-24

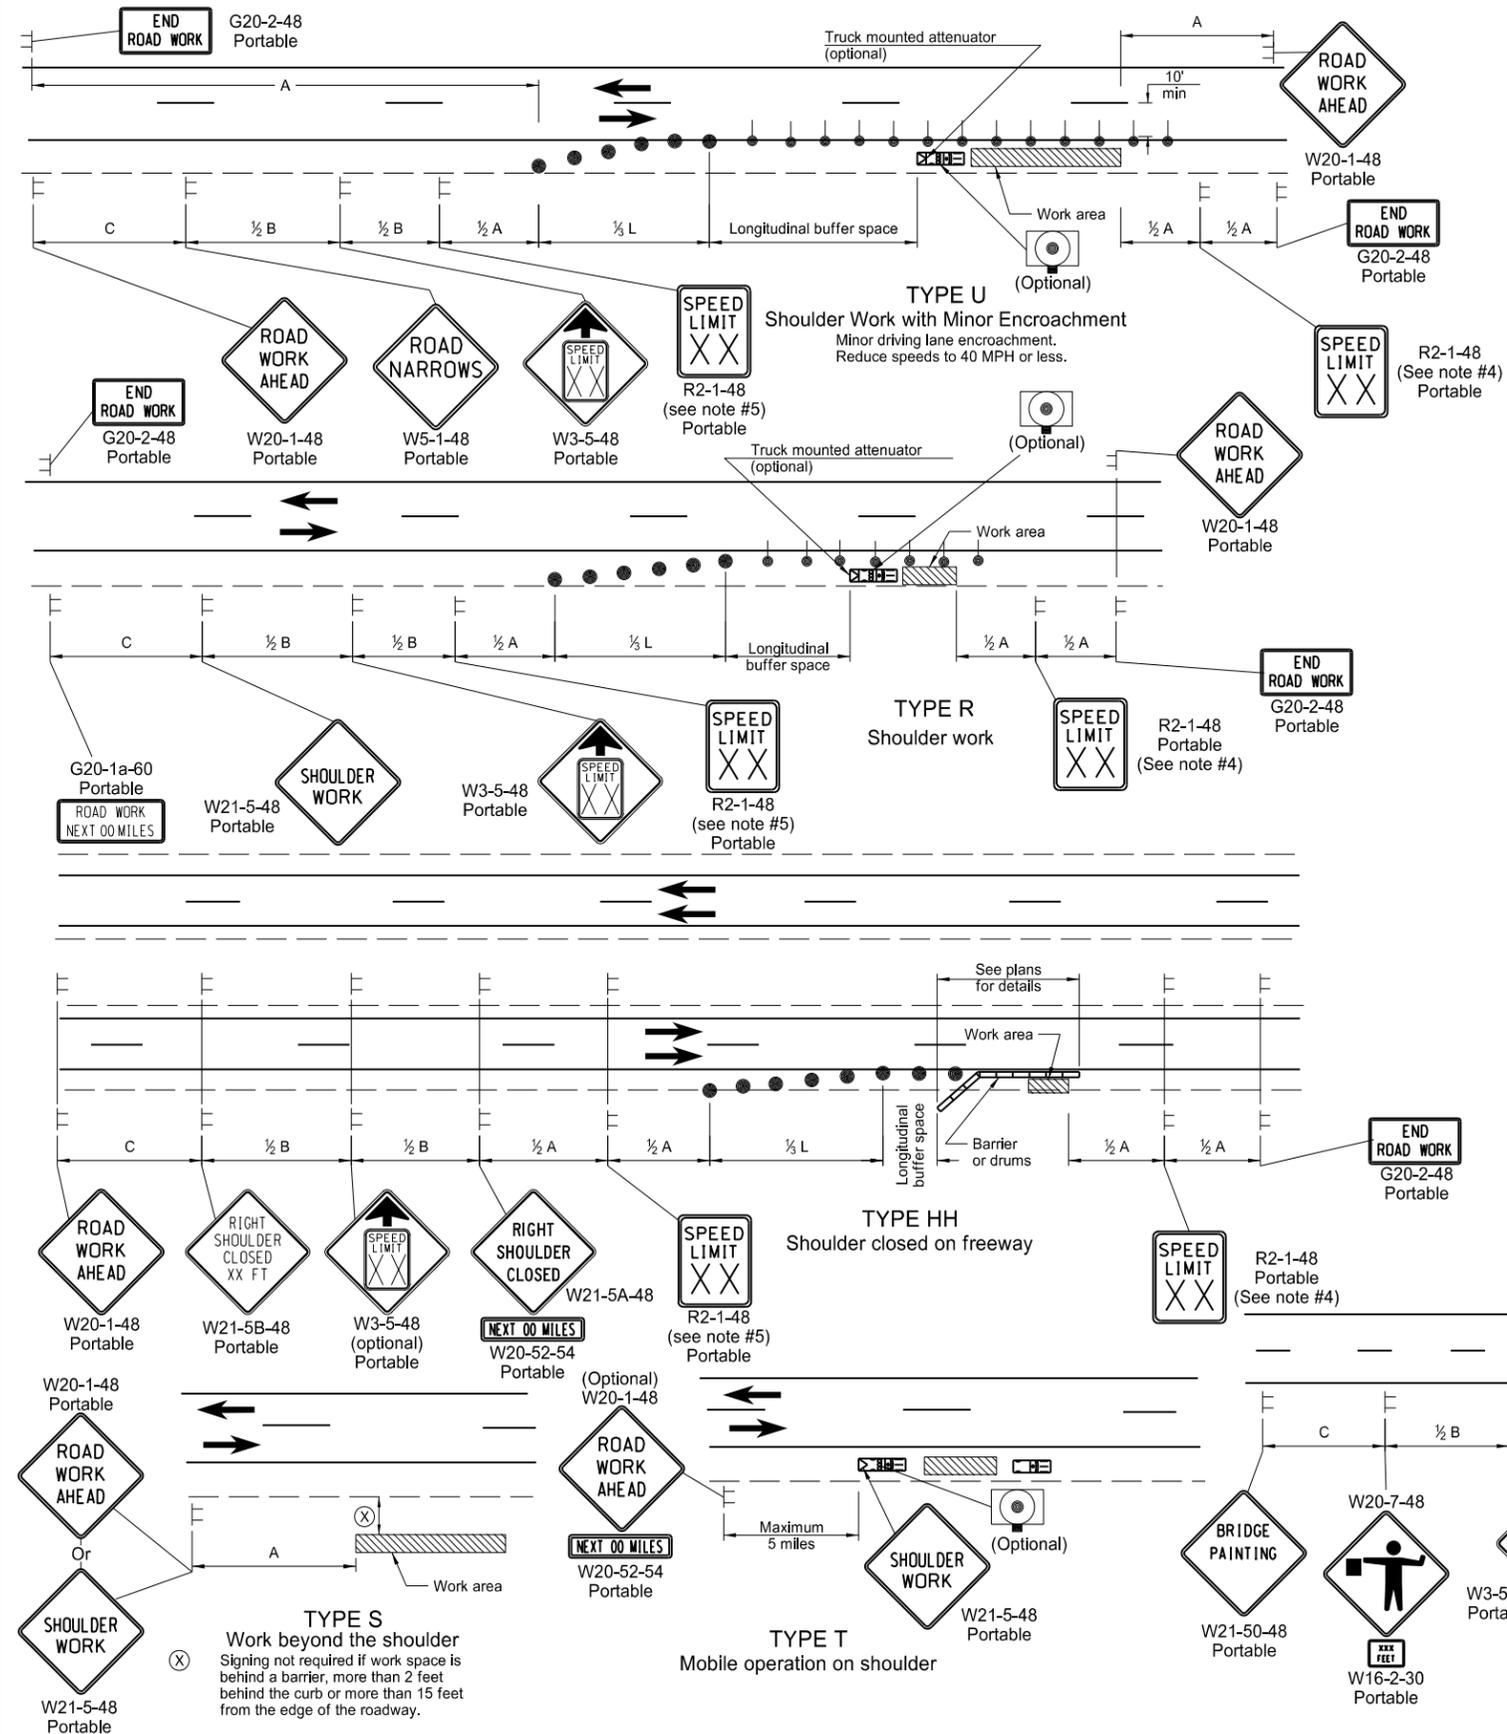

- Notes
- Variables
S = Numerical value of speed limit or 85th percentile.
W = The width of the taper.
L = Minimum length of taper, or $S \times W$ for freeways, expressways, and all other roads with speeds of 45 mph or greater, or $W \times S^2 / 60$ for urban, residential, and other streets with speeds of 40 mph or less.
 - Delineator drums used for tapering traffic shall be spaced at dimension "S".
Delineator drums or tubular markers used for tangents shall be spaced at 2 times "S".
 - Sequencing Arrow Panels
Type A shall be used on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
Type B shall be used on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
Type C shall be used on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
 - The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
 - The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at $\frac{1}{2}B$.
 - When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 - Existing speed limit signs within a reduced speed zone shall be covered.
 - The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.

Longitudinal Buffer Space	
Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

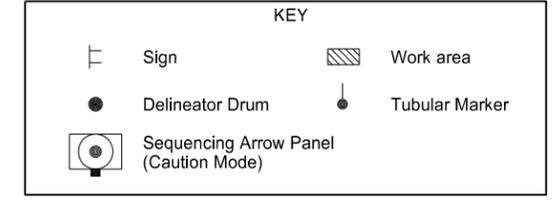


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
 Roger Weigel
 Registration Number
 PE-2930,
 on 09/27/13 and the original document is stored at the
 North Dakota Department
 of Transportation

PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

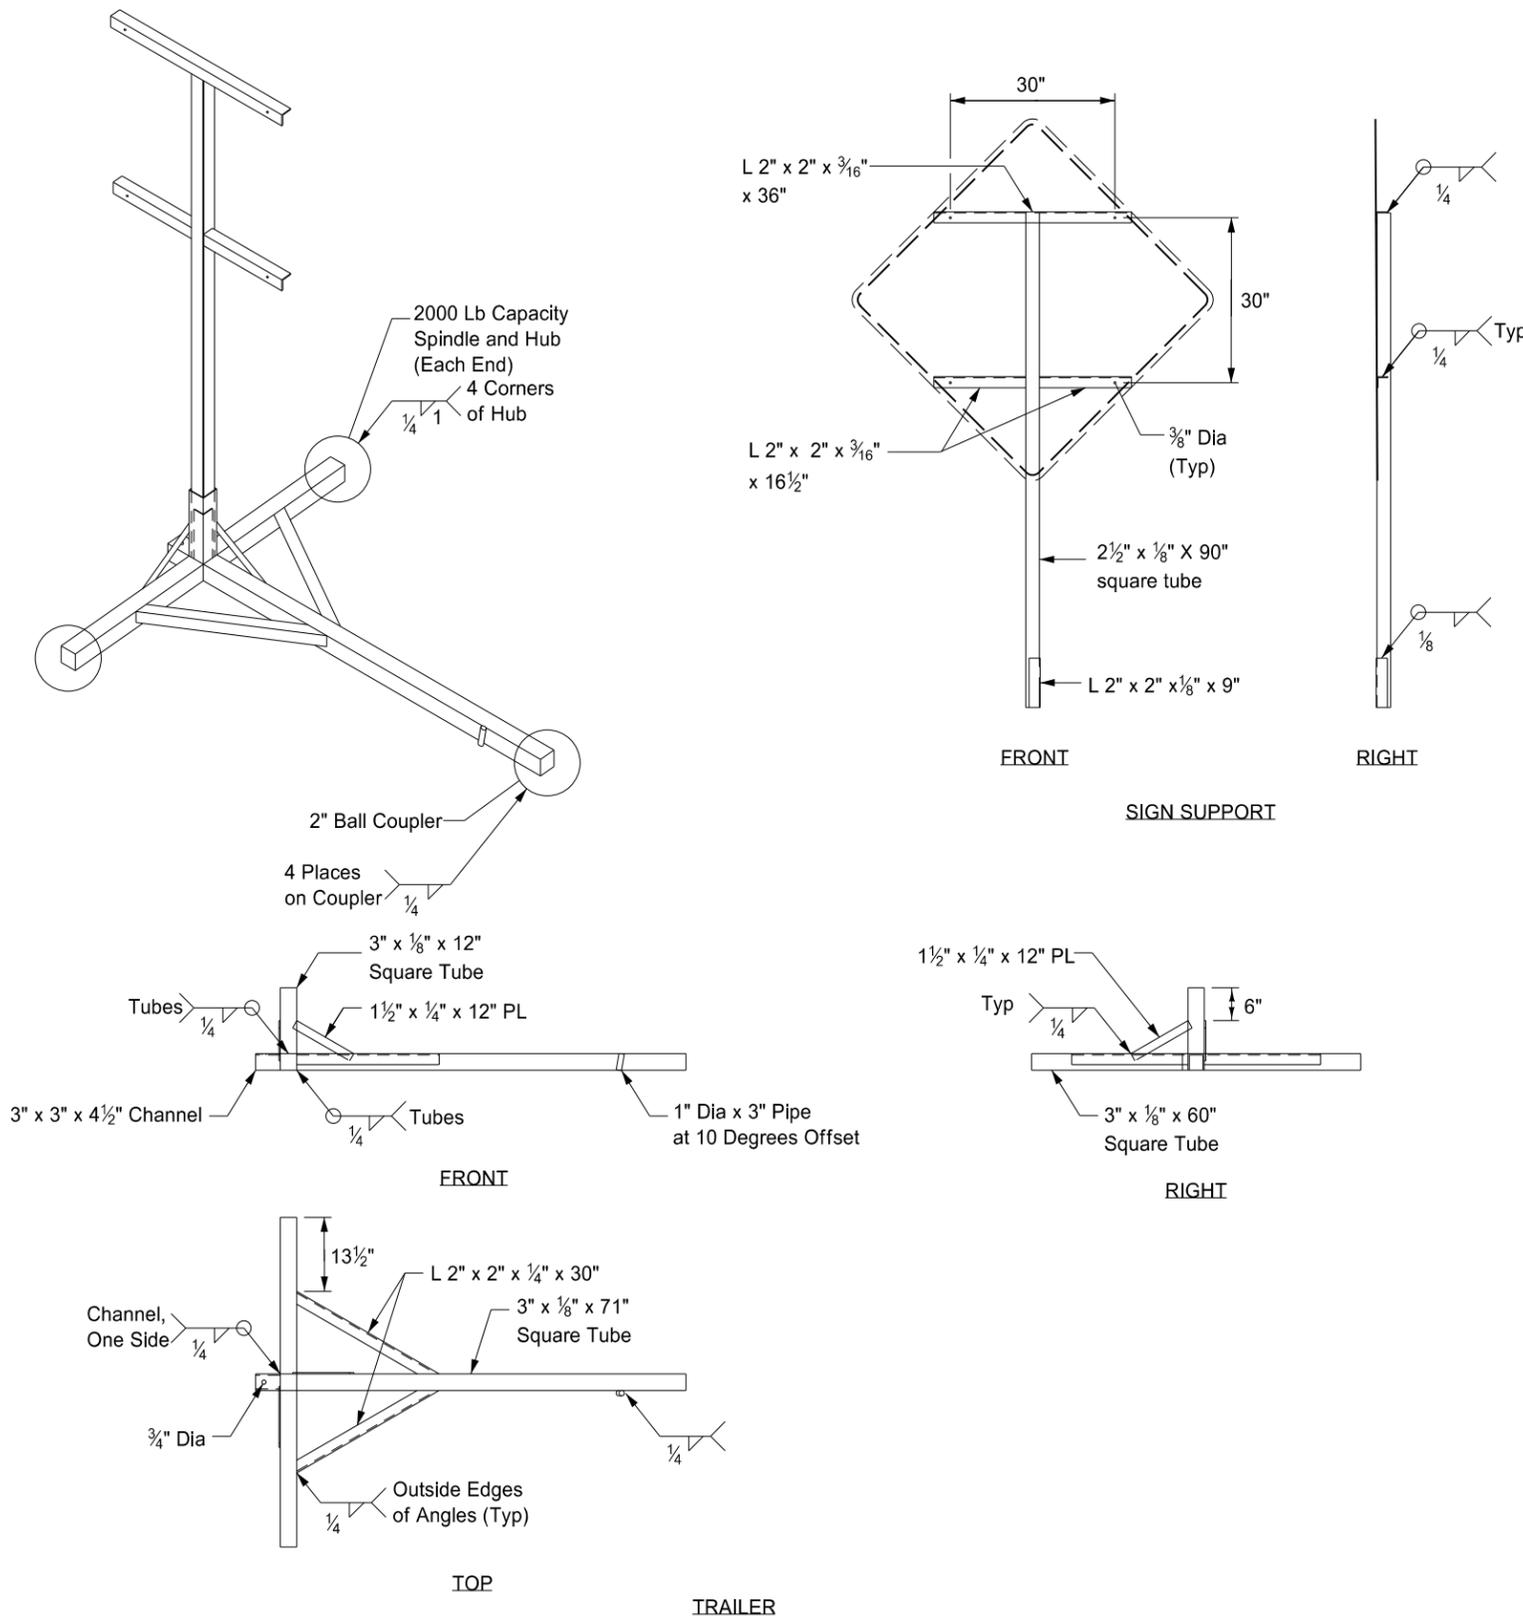


Notes:

- ① The maximum weight of the assembly is 250 pounds.
- ② Use a 14" wheel and tire.
- ③ Automotive and equipment axle assemblies may not be used for trailer-mounted sign supports.
- ④ Other NCHRP 350 crash tested assemblies are acceptable.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/23/10 and the original document is stored at the North Dakota Department of Transportation.


LETTER AND ARROW DETAILS FOR VARIABLE LENGTH SIGNS

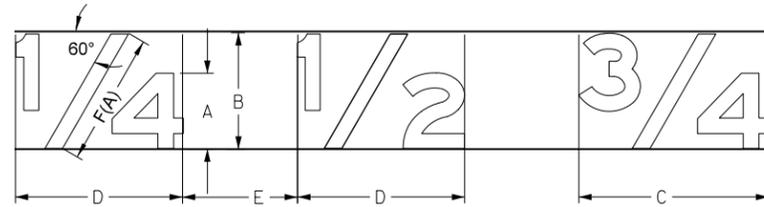


SIZE OF THE FRACTION IS DETERMINED AS FOLLOWS:

SYMBOL	TITLE	RATIO TO HEIGHT OF CAPITAL OR UPPER CASE
A	Letter height	1.0 of capital or upper case
B	Fraction height	1.5 X A
C	Fraction width	2.5 X A
D	Fraction width	2 X A
E	Space to next character	1 to 1.5 X A
F(A)	Length of diagonal	1.75 X A

(A) Diagonal stroke of fraction is to be centered optically.

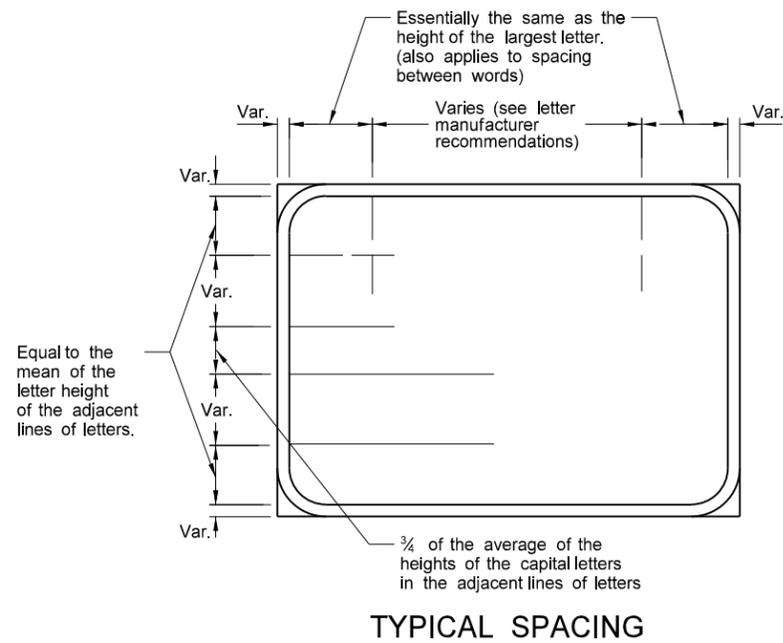


TYPICAL SPACING

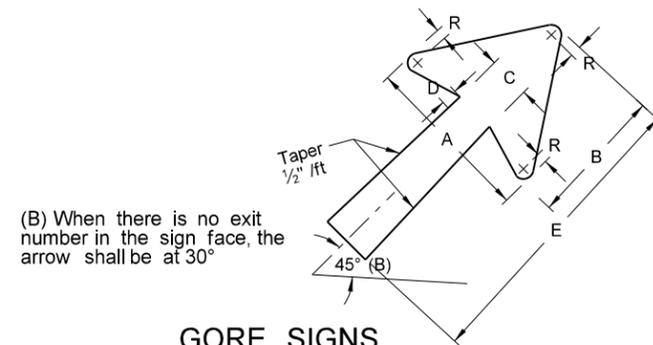


GORE SIGNS

"EXIT" LETTER SIZE (Upper Case)	A	B	C	D	E	R
8"	15 1/8"	11 1/16"	3 3/4"	1 5/16"	25"	13 1/16"
10" - 13 1/3"	18 1/4"	14"	4 1/2"	1 1/2"	30"	3 1/4"

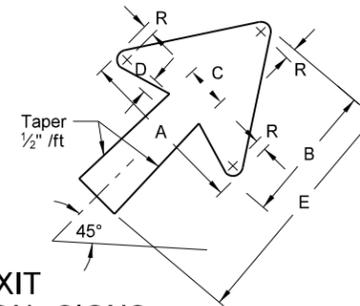


EXIT DIRECTION SIGNS

LETTER SIZE (Upper Case)	A	B	C	D	E	R
8"	15 1/8"	11 1/16"	3 3/4"	1 5/16"	17"	13 1/16"
10" - 13 1/3"	18 1/4"	14"	4 1/2"	1 1/2"	20"	3 1/4"
16" - 20"	22 1/4"	17"	5 3/8"	1 3/4"	25"	1"

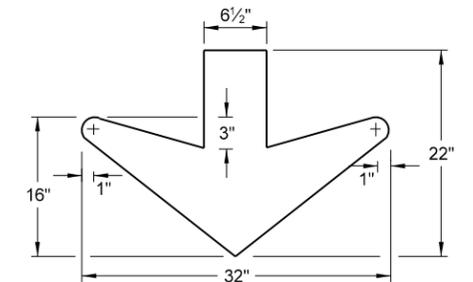

DOWN ARROW



DISTANCE AND DESTINATION SIGNS

LETTER SIZE (Upper Case)	A	B	C	D	E	F
4"	1 3/4"	2"	3 9/16"	5/16"	3/8"	6"
6"	2 3/4"	3"	5 9/16"	7/16"	9/16"	9"
8"	3 1/2"	4"	7 1/8"	9/16"	1 1/16"	12"
12"	5 1/4"	6"	10 5/8"	1 3/16"	1 1/16"	18"

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-3-11	
REVISIONS	
DATE	CHANGE
7-8-14	Revised gore sign and added 4" D & D arrow


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 7/8/14 and the original document is stored at the North Dakota Department of Transportation

PERFORATED TUBE ASSEMBLY DETAILS

D-754-23


Notes:

1. Curbed Roadways: The clearance from the face of the curb should be 3' except where right of way or sidewalk width is limited, a minimum clearance of 2' shall be provided. The horizontal clearance may need to be increased to maintain a minimum sidewalk clear width of 4' from the sign support, not including any attached curb.
2. Minimum vertical clearance: Signs installed at the side of the road in rural districts shall be at least 5' measured from the bottom of the sign to the edge of the driving lane or auxiliary lane. Where parking or pedestrian movements occur, the clearance to the bottom of the sign shall be at least 7'.
- Signs on expressways shall be installed with a minimum height of 7'.
- Adopt-a-highway signs installed on Freeways shall be at least 7' above the edge of the driving lane.
- The vertical clearance shall have a maximum height of 6" above the vertical clearance specified above.
3. Offset signs: Where signs are placed at least 30 feet or more from the edge of the traveled way, the height to the bottom of such sign shall be 5' above the edge of the driving lane.
4. The clearance from edge of shared use path to edge of sign should be 3' except where width is limited, a minimum clearance of 2' shall be provided.

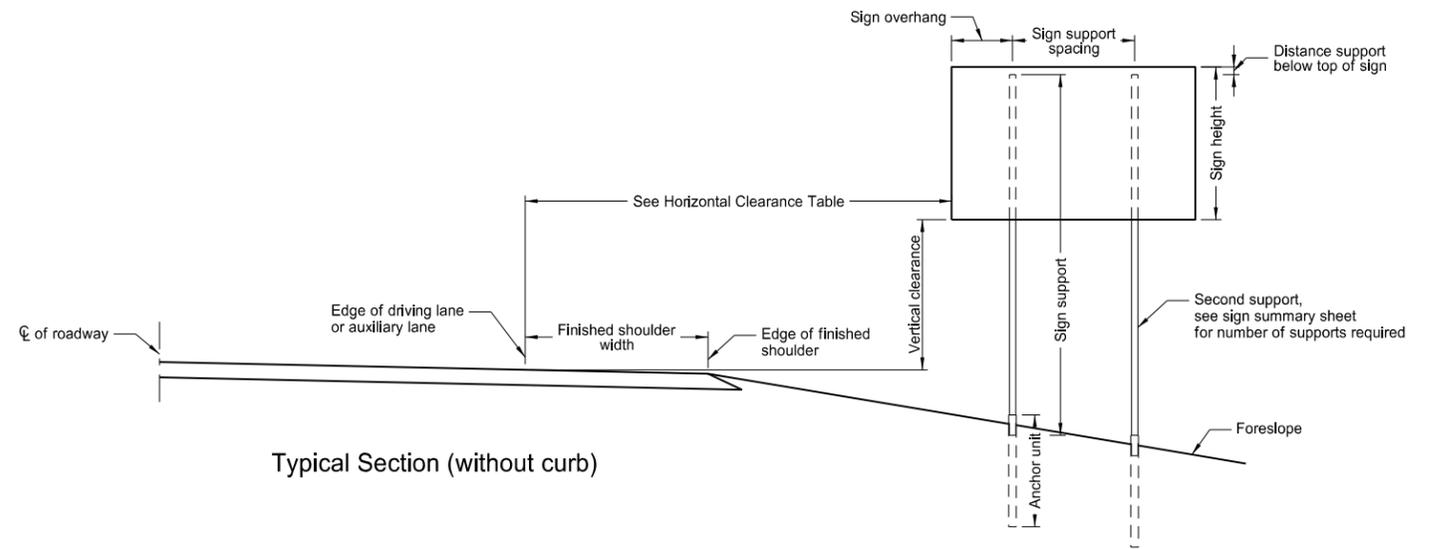


Typical Section (without curb)

Horizontal Clearance Table	
Shoulder Width ft	Offset ft
0 to 2	16
>2 to 4	18
>4 to 6	20
>6 to 8	22
>8 to 10	24

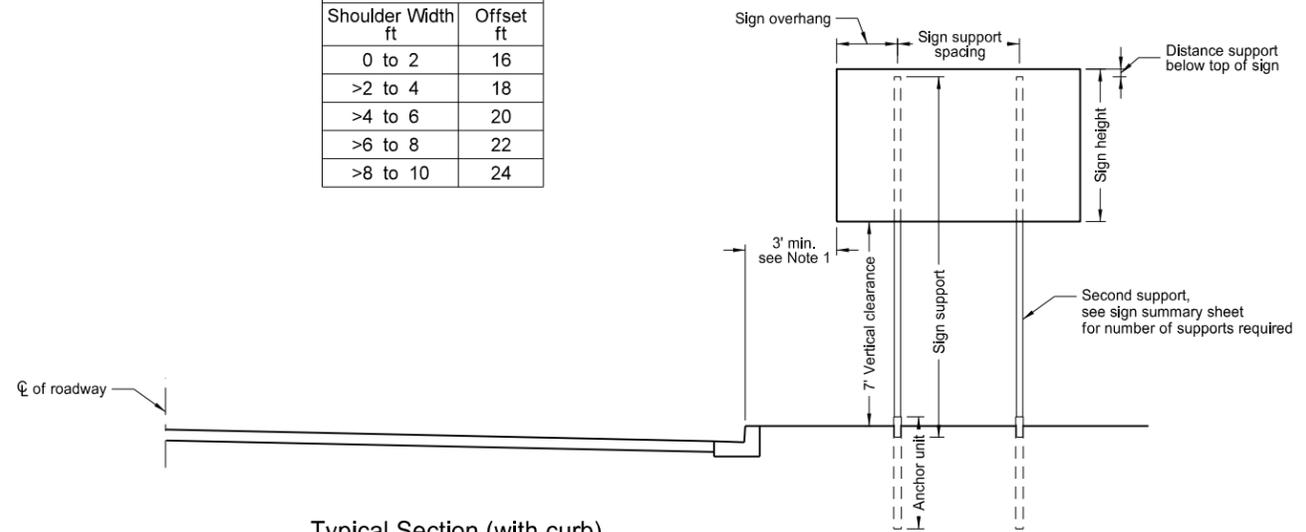


Typical Section (with curb)
Residential or Business District

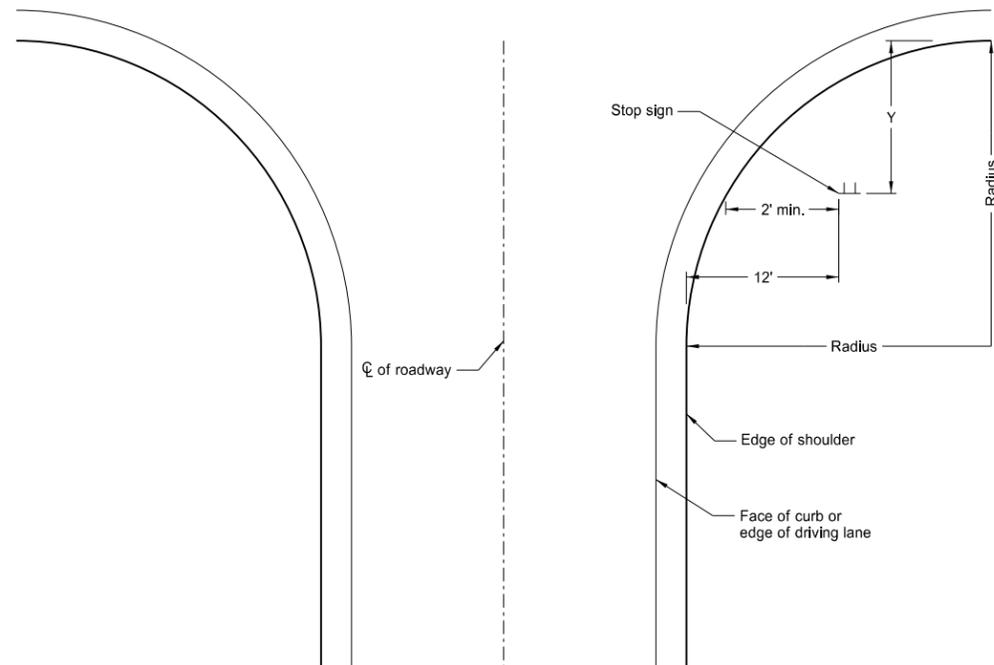

Stop Sign Location
Wide Throat Intersection

This layout is to be used for the placement of "Stop" signs.

Radius ft.	Y-max. ft.	Y-min. ft.
40	50	15
45	50	18
50	50	21
55	50	25
60	50	28
65	50	32
70	50	35
75	50	39
80	50	43

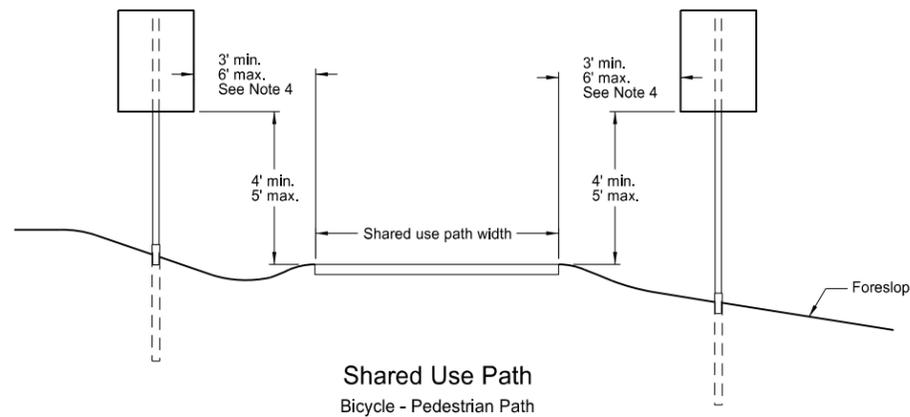



Shared Use Path
Bicycle - Pedestrian Path

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
7-8-14	Revised note 2, added note 4.

This document was originally issued and sealed by
Roger Weigel
 Registration Number
 PE-2930,
 on 7/8/14 and the original document is stored at the
 North Dakota Department
 of Transportation


Number of Posts	Telescoping Perforated Tube						
	Post Size In.	Wall Thickness Gauge	Sleeve Size In.	Wall Thickness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thickness Gauge
1	2	12			No	2 1/2	12
1	2 1/2	12			No	2 1/2	12
1	2 1/2	12			(B)	3(C)	7
1	2 1/2	10			Yes		7
1	2 1/2	12	2 1/2(D)	12	Yes		7
1	2 1/2	12	2 1/2	12	Yes		7
2	2 1/2	10			Yes		7
2	2 1/2	12	2 1/2(D)	12	Yes		7
2	2 1/2	12	2 1/2	12	Yes		7
3 & 4	2 1/2	12			Yes		7
3 & 4	2 1/2	10			Yes		7
3 & 4	2 1/2	12	2 1/2	12	Yes		7
3 & 4	2 1/2	12	2 1/2(D)	12	Yes		7
3 & 4	2 1/2	10	2 1/2	10	Yes		7

(B) - The 2 1/2", 12 gauge posts do not need breakaway bases when placed in standard soils, but require a shim as specified by the manufacturer. The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.
 (C) - 3" anchor unit
 (D) - 2 1/2" x 12 ga. x 18" minimum length external sleeve required.

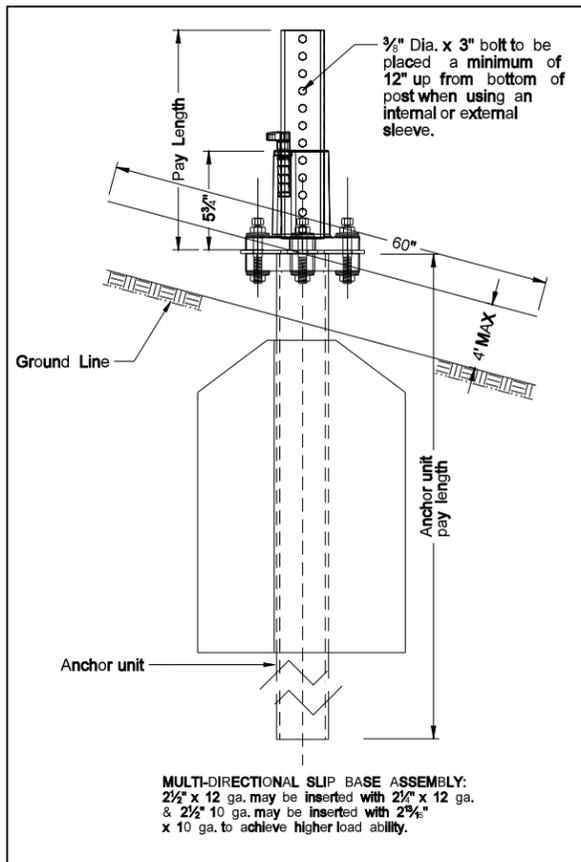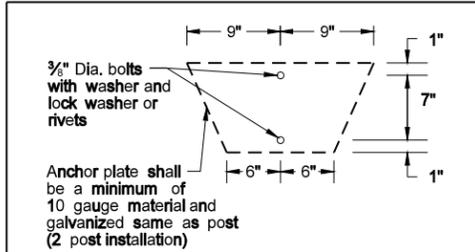


MULTI-DIRECTIONAL SLIP BASE ASSEMBLY:
 2 1/2" x 12 ga. may be inserted with 2 1/2" x 12 ga. & 2 1/2" 10 ga. may be inserted with 2 3/8" x 10 ga. to achieve higher load ability.

Mounting Details Perforated Tube

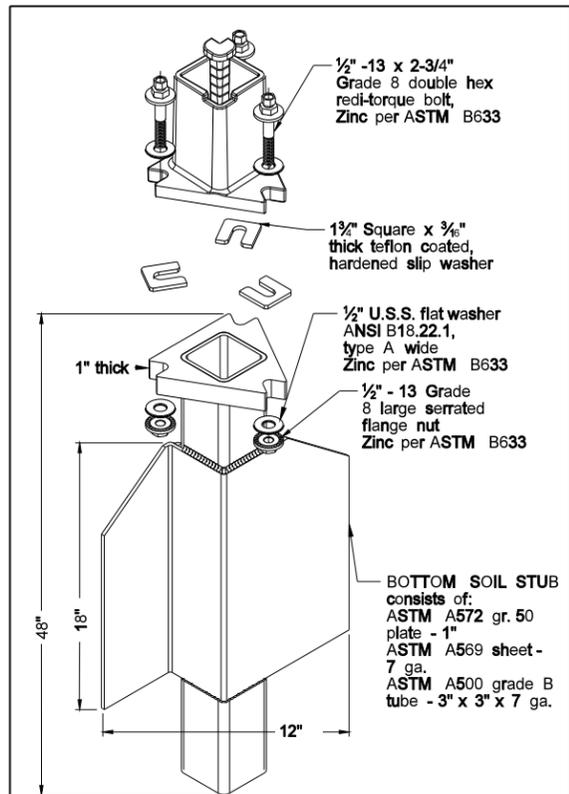


SLIP BASE FOR 2 1/2" POST

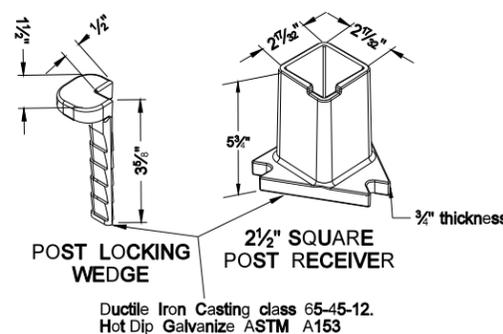

2 1/2" SQUARE POST RECEIVER

Ductile Iron Casting class 65-45-12. Hot Dip Galvanize ASTM A153

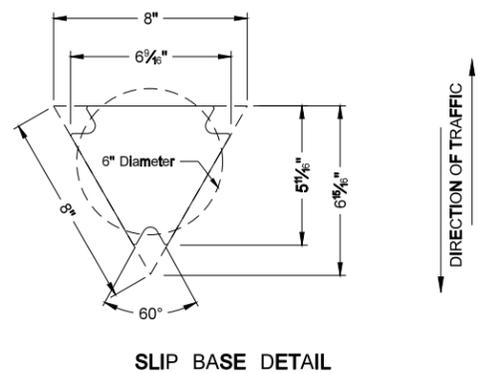


SLIP BASE DETAIL

Properties of Telescoping Perforated Tubes							
Tube Size In.	Wall Thickness in.	U.S. Standard Gauge	Weight Per Foot Lbs.	Moment of Inertia In. ⁴	Cross Sect. Area In. ²	Section Modulus In. ³	
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172	
2 x 2	0.105	12	2.416	0.372	0.590	0.372	
2 1/2 x 2 1/2	0.105	12	2.773	0.561	0.695	0.499	
2 3/8 x 2 3/8	0.135	10	3.432	0.605	0.841	0.590	
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643	
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.783	

The 2 3/8" size 10 gauge is shown as 2.19" size on the plans; The 2 1/2" size is shown as 2.51" size on the plans.

NOTE:

- 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and below post location and also back and ahead of post.
- Anchor material shall be 7 gauge H.R.P.O. Commercial quality ASTM A569 and 3" x 3" x 7" gauge ASTM A500 grade B. Anchor shall have a yield strength 43.9 KSI and tensile strength of 59.3 KSI. Anchor shall be hot dipped galvanized per ASTM A123/153. All tolerances on anchor unit and slip base bottom assembly are +/- 0.005" unless otherwise noted.
- When used in concrete sidewalk, anchor shall be the same concept without the wings.
- Four post signs shall have over 8" between the first and fourth posts.
- Installation procedures as per manufacturers recommendation.
- Concrete fasteners for surface mount breakaway base shall be a minimum 1/2" diameter x 4" grade 8.

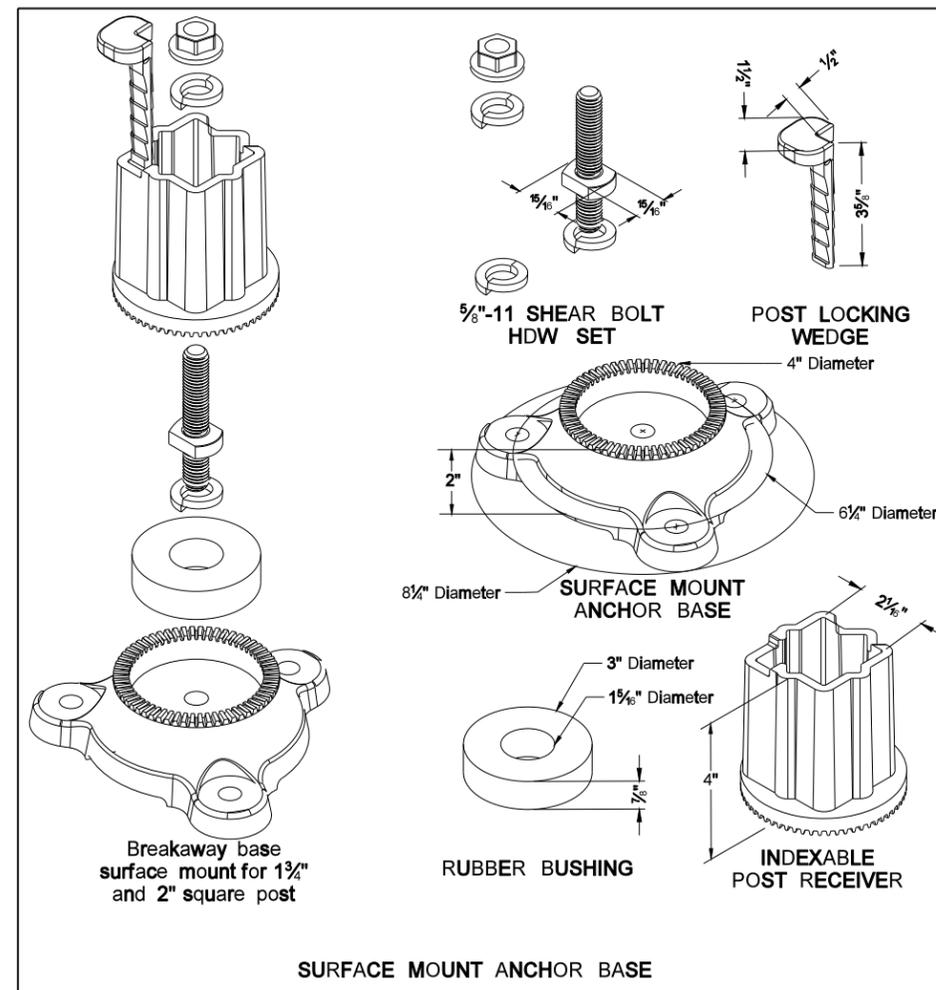


SURFACE MOUNT ANCHOR BASE

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-6-09	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 08/06/09 and the original document is stored at the North Dakota Department of Transportation

SHOULDER BOLT

Shimming agent to reduce tolerance between 3" anchor unit and 2 1/2" post. (standard 3/8" diameter grade 8 bolt may be used with proper shim)

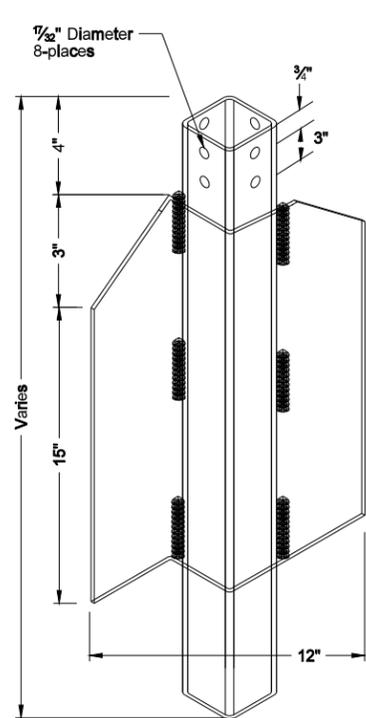

3" ANCHOR UNIT


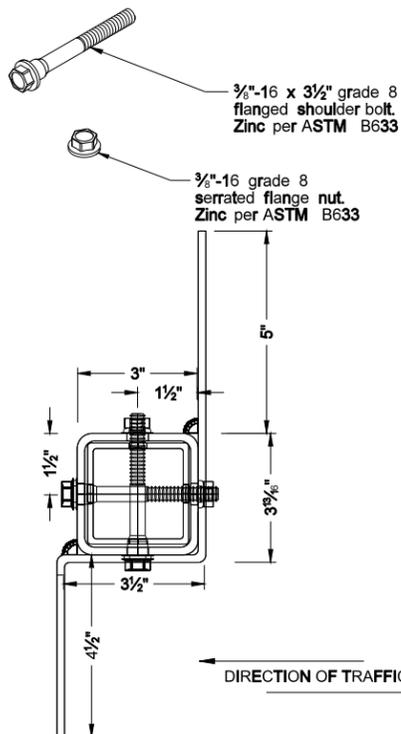


DIRECTION OF TRAFFIC

Breakaway Coupler System for Perforated Tubes

Notes:


- 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and below post location and also back and ahead of post.
- Anchor unit shall be the same size as the post and shall have the same specification as the post.
- Four post signs shall have over 8' between the first and fourth post.
- In lieu of the breakaway base system on standard D-754-24 the breakaway coupling system may be used. The breakaway coupler system shall be manufactured from material meeting the requirements of ASTM A325 fasteners with the special requirements as specified by DENT BREAKAWAY IND., INC. which meets the test requirements of NCHRP Report 350.

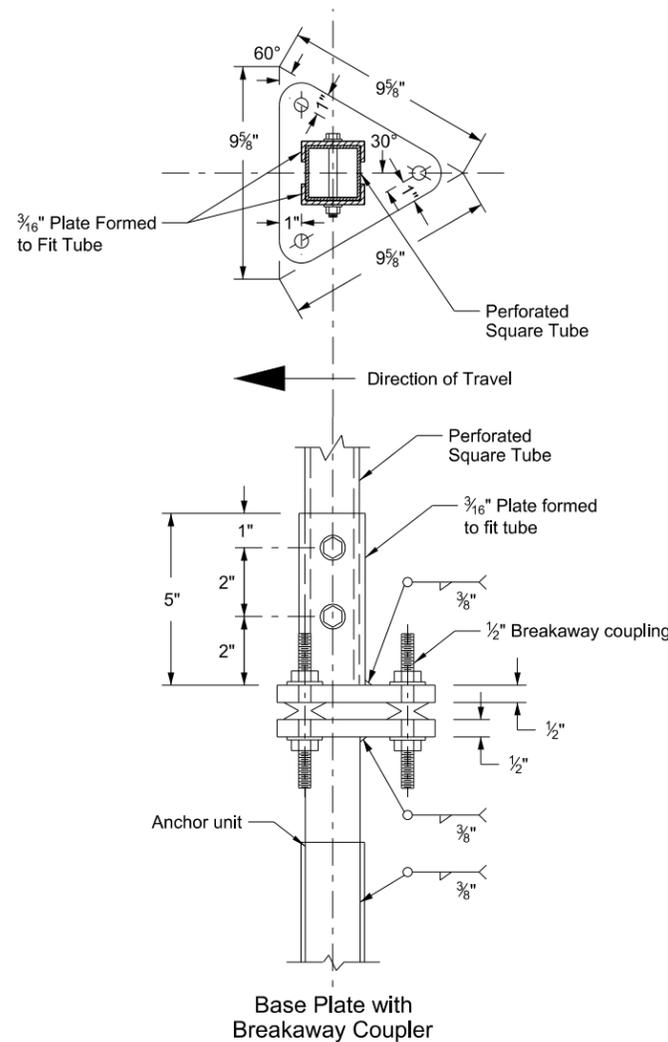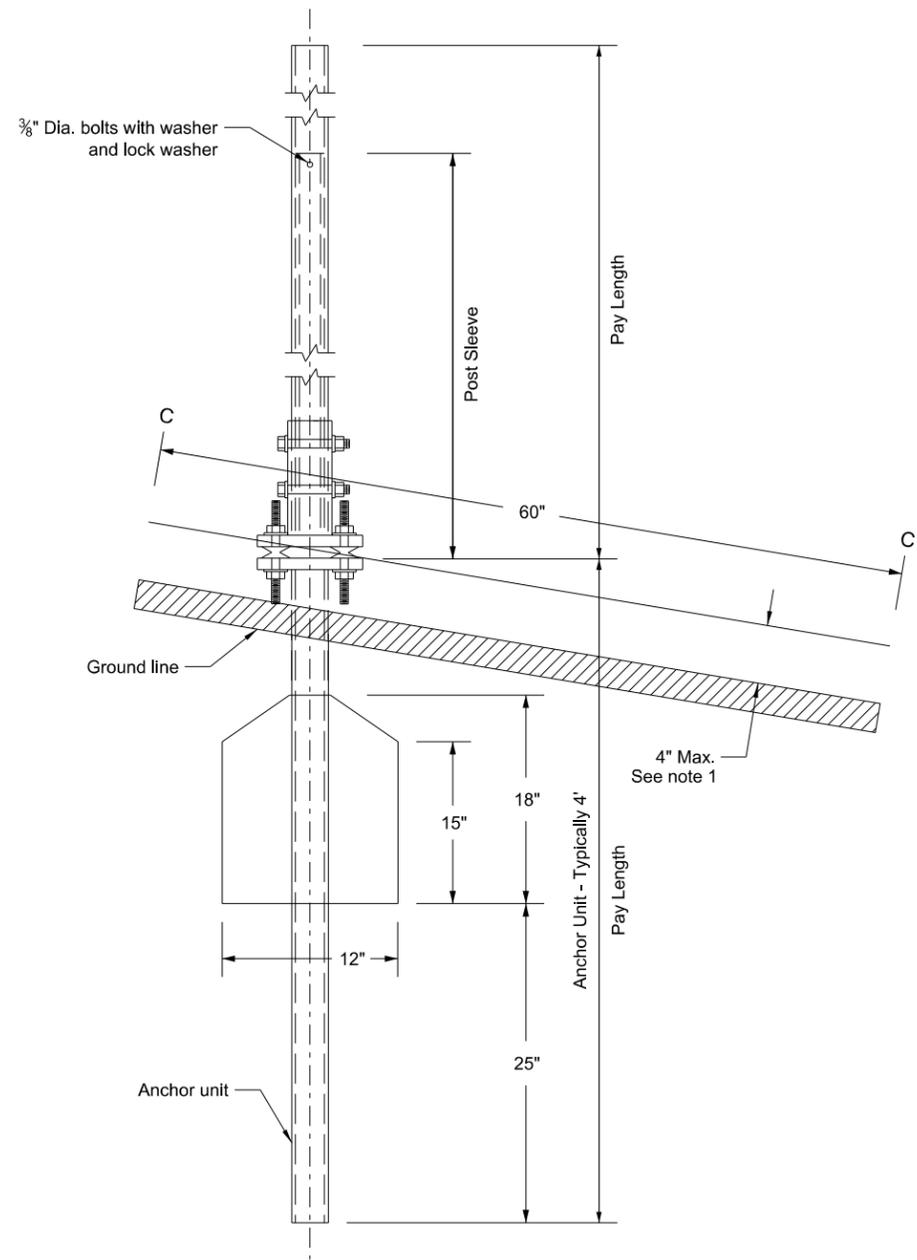


Number of Posts	Telescoping Perforated Tube						
	Post Size In.	Wall Thickness Gauge	Sleeve Size In.	Wall Thickness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thickness Gauge
1	2	12			No	2 1/4	12
1	2 1/4	12			No	2 1/2	12
1	2 1/2	12			(B)	3(C)	7
1	2 1/2	10			Yes		7
1	2 1/4	12	2	12	Yes		7
1	2 1/2	12	2 1/4	12	Yes		7
2	2 1/2	10			Yes		7
2	2 1/4	12	2	12	Yes		7
2	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/2	12			Yes		7
3 & 4	2 1/2	10			Yes		7
3 & 4	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/4	12	2	12	Yes		7
3 & 4	2 1/2	10	2 3/16	10	Yes		7

(B) - The 2 1/2" 12 gauge posts do not need breakaway bases when placed in standard soils. The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.

(C) - 3" anchor unit

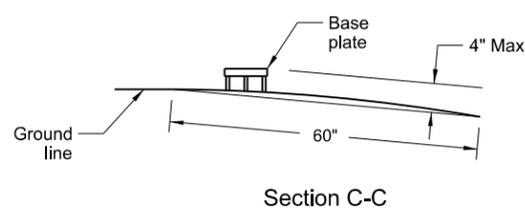


Max. protection of the stub post is 4" above a 60" chord aligned radially to the center line of the highway and connecting any point, within the length of the chord, on the ground surface on one side of the support to a point in the ground surface on the other side.

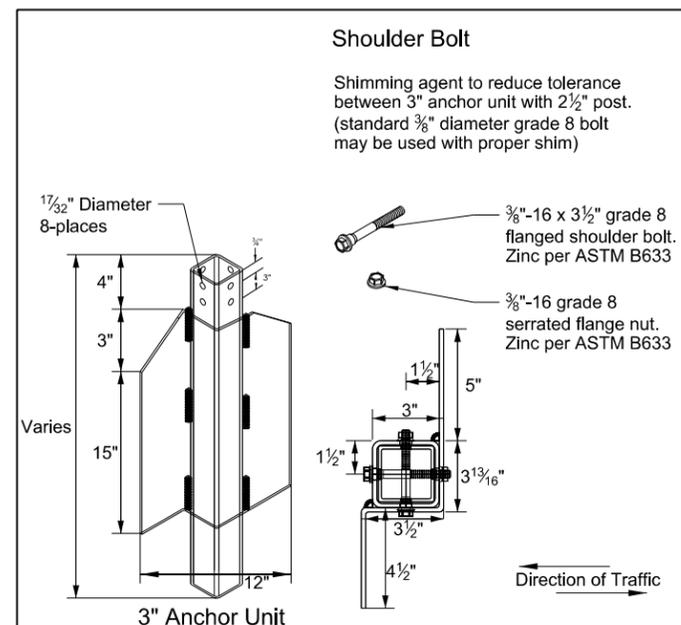


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-2013	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation


SIGN PUNCHING, STRINGER AND SUPPORT LOCATION
DETAILS REGULATORY, WARNING AND GUIDE SIGNS

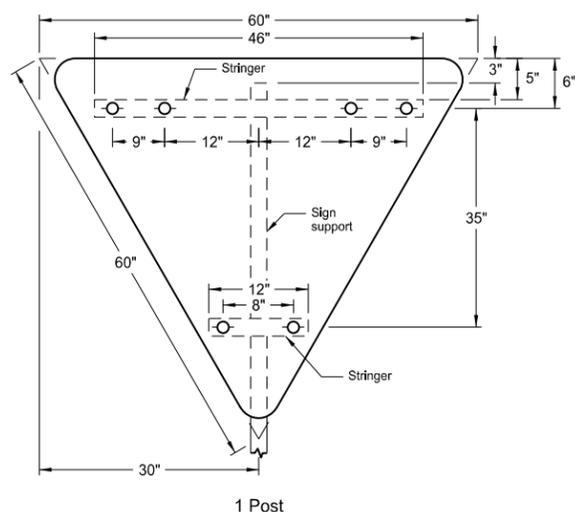

1 Post

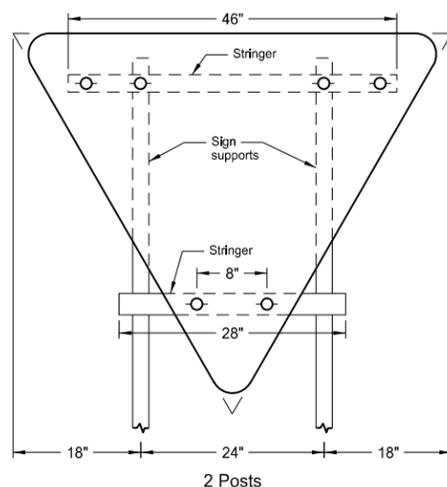

2 Posts

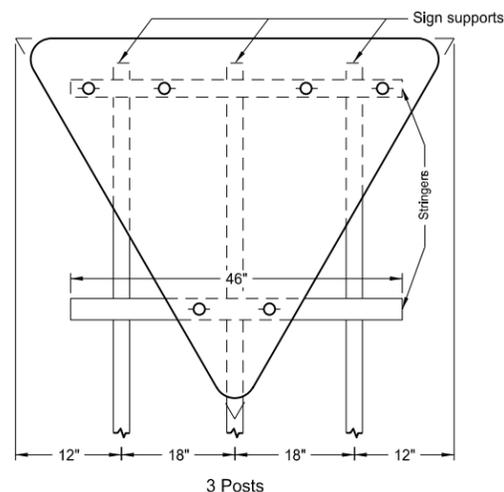


3 Posts

Assembly No. 6


Notes:

1. See Standard D-754-25 for mounting details.
2. The minimum sign backing material thickness shall be 0.100 inch.
3. Perforated square tube stringer shall be 1½" x 1½".
4. All holes shall be punched round for ⅜" bolt.




1 Post

Assembly No. 7

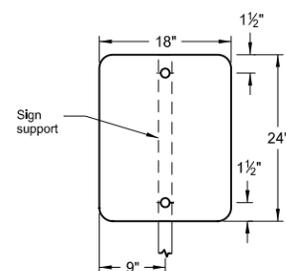


1 Post

Assembly No. 8




1 Post


Assembly No. 9




2 Posts

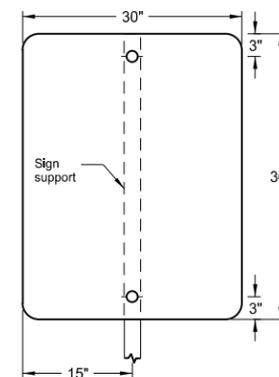

1 Post

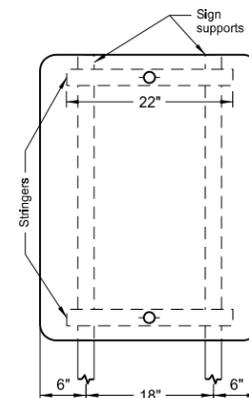


2 Posts

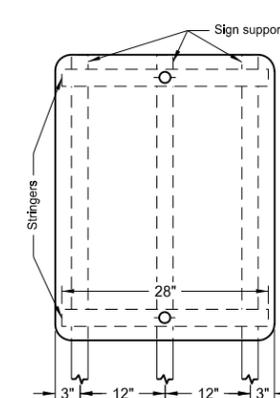


3 Posts


Assembly No. 10

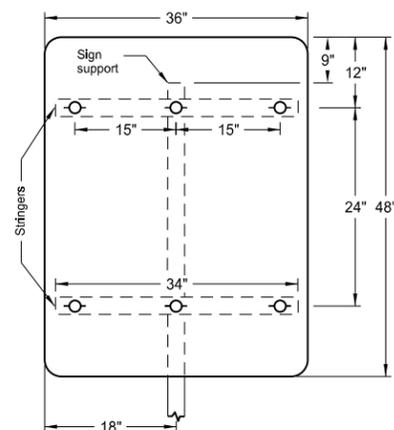

1 Post

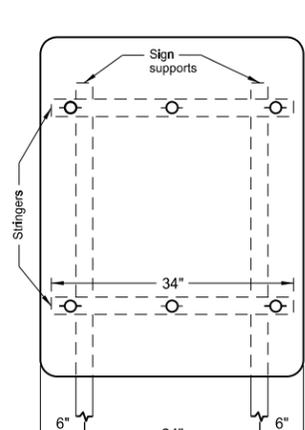

2 Posts

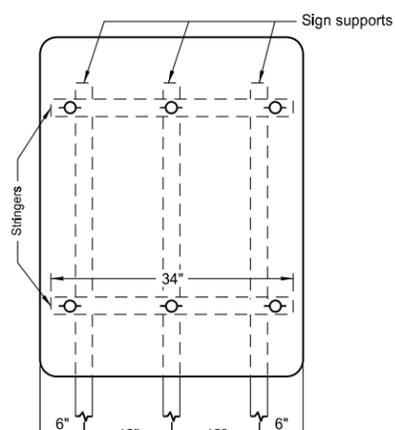

3 Posts










Assembly No. 11

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 12-1-10 and the original document is stored at the North Dakota Department of Transportation

SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS FOR VARIABLE LENGTH SIGNS

D-754-49

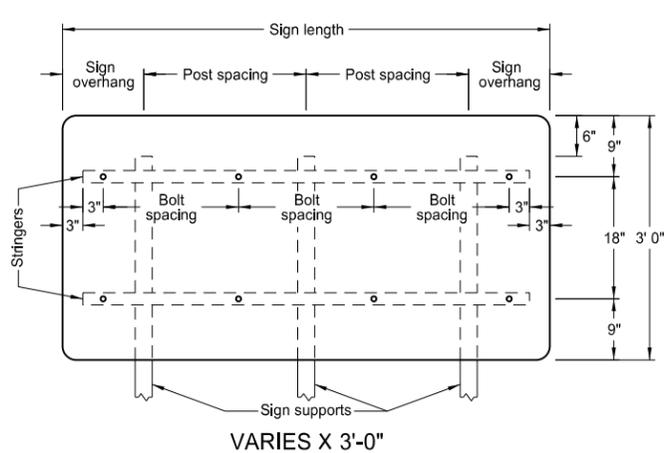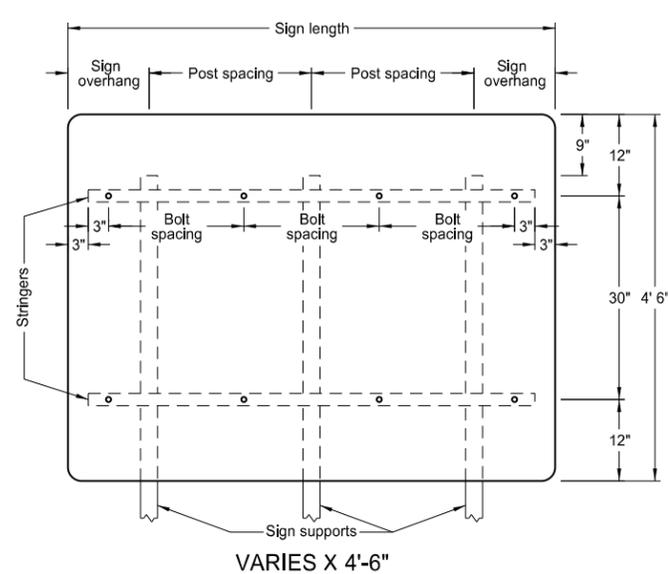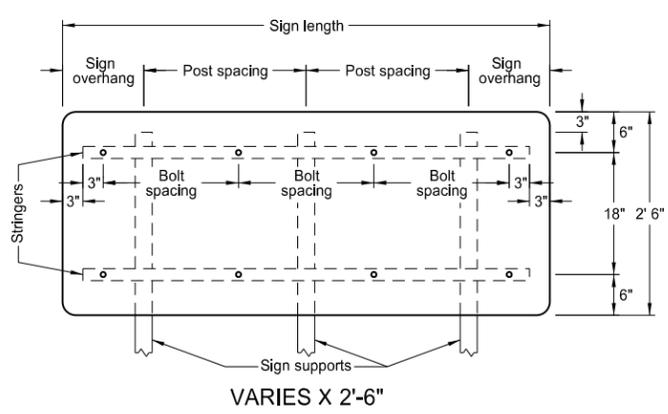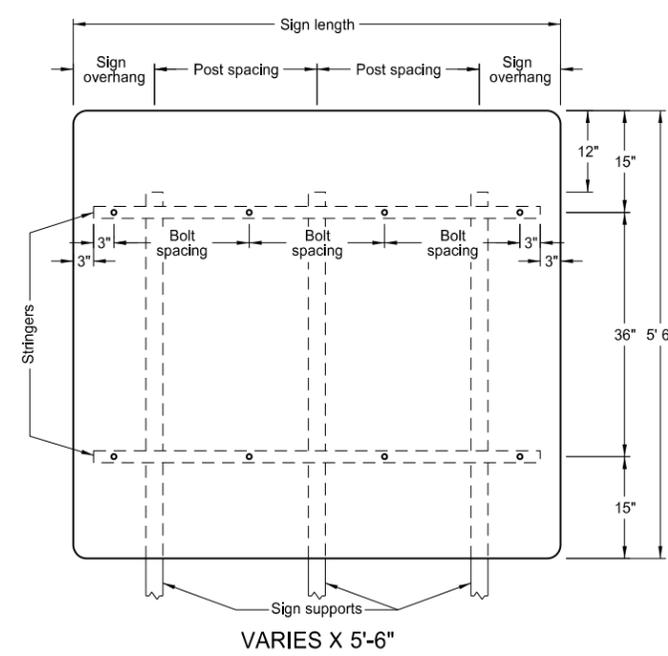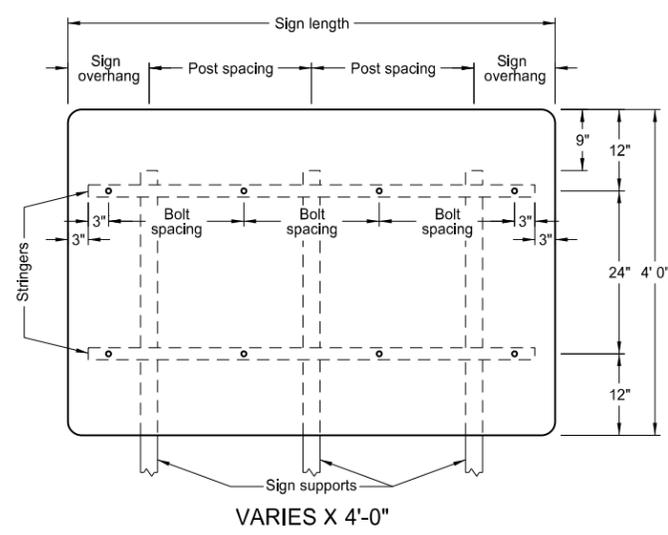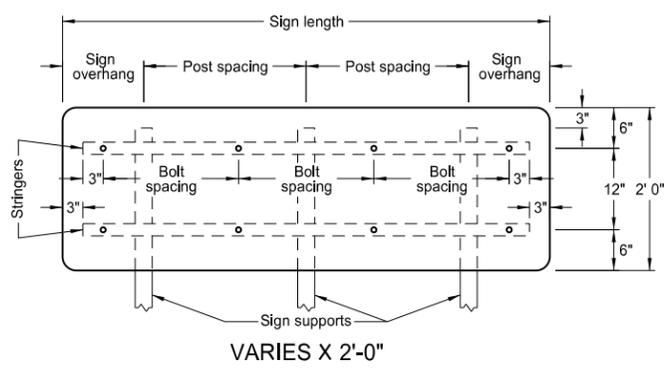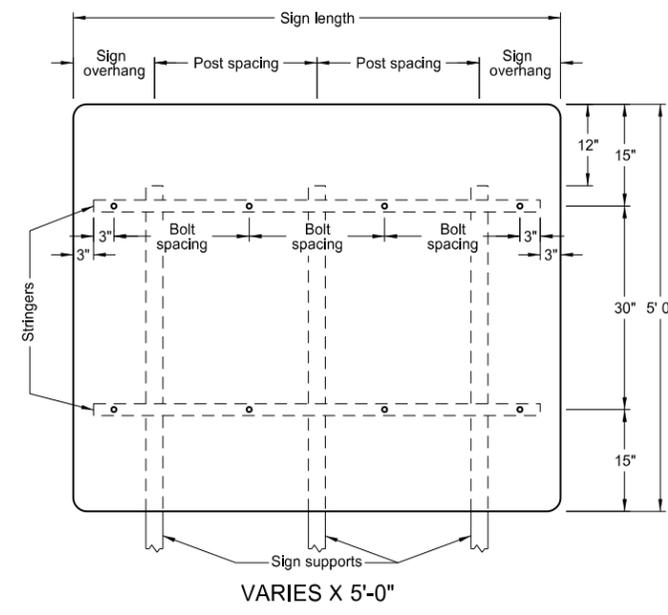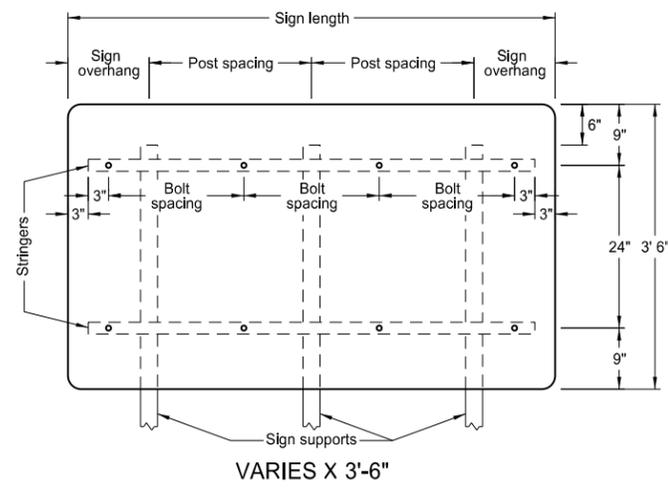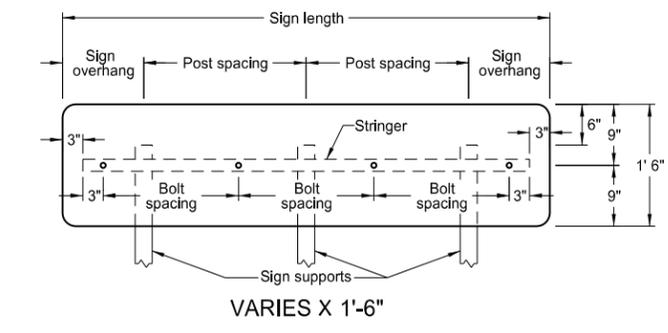


3 POSTS			
Sign Length	Sign Overhang	Post Spacing	Bolt Spacing
4'-0"	0'-6"	1'-6"	18"
4'-6"	0'-6"	1'-9"	21"
5'-0"	0'-6"	2'-0"	24"
5'-6"	1'-3"	1'-6"	18"
6'-0"	1'-0"	2'-0"	20"
6'-6"	1'-3"	2'-0"	22"
7'-0"	1'-6"	2'-0"	24"
7'-6"	1'-6"	2'-3"	2-20" & 2-19"
8'-0"	1'-9"	2'-3"	21"
8'-6"	2'-0"	2'-3"	2-22" & 2-23"
9'-0"	1'-6"	3'-0"	24"
9'-6"	1'-9"	3'-0"	4-20" & 1-22"
10'-0"	1'-9"	3'-3"	2-21" & 3-22"
10'-6"	1'-9"	3'-6"	4-23" & 1-22"
11'-0"	2'-0"	3'-6"	24"
11'-6"	2'-3"	3'-6"	21"
12'-0"	2'-4"	3'-8"	22"
12'-6"	2'-5"	3'-10"	23"
13'-0"	2'-6"	4'-0"	24"
13'-6"	2'-9"	4'-0"	3-22" & 4-21"
14'-0"	3'-0"	4'-0"	2-23" & 5-22"
14'-6"	3'-3"	4'-0"	6-23" & 1-24"
15'-0"	3'-6"	4'-0"	24"
15'-6"	2'-4"	5'-5"	6-22" & 2-21"
16'-0"	2'-5"	5'-7"	4-23" & 4-22"
16'-6"	2'-5"	5'-10"	6-23" & 2-24"
17'-0"	2'-6"	6'-0"	24"
17'-6"	3'-3"	5'-6"	22"
18'-0"	3'-6"	5'-6"	6-23" & 3-22"
18'-6"	3'-9"	5'-6"	6-23" & 3-24"
19'-0"	3'-6"	6'-0"	24"
19'-6"	4'-3"	5'-6"	8-22" & 2-23"
20'-0"	4'-4"	5'-8"	8-23" & 2-22"

- Notes:
- The minimum sign backing material thickness shall be 0.100 inch.
 - Perforated square tube stringer shall be 1½" x 1½".
 - All holes shall be punched round for ⅜" bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 9/25/2012 and the original document is stored at the North Dakota Department of Transportation

**CONCRETE FOUNDATIONS
(TRAFFIC SIGNALS & HIGHWAY LIGHTING)**

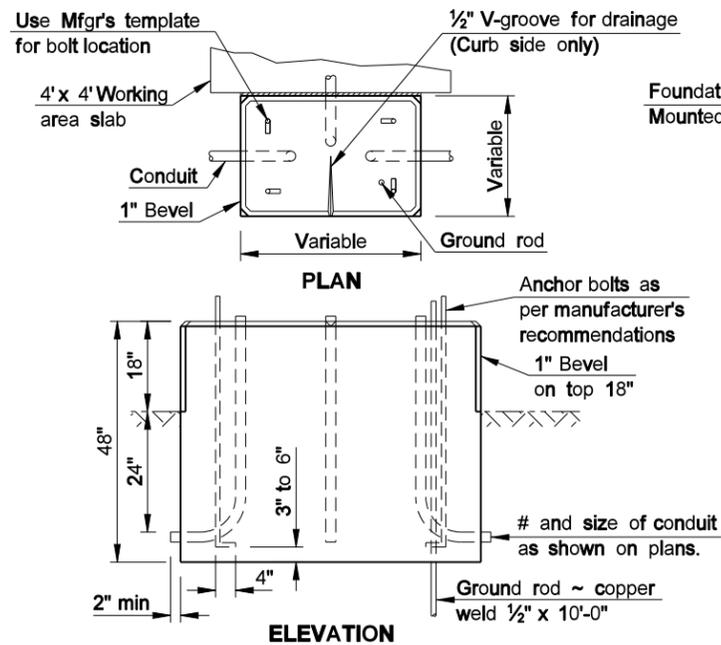


CONTROLLER CABINET FOUNDATION PAD MOUNT


The Controller Cabinet Foundation shall be bid as Concrete Foundation - Traffic Signals.

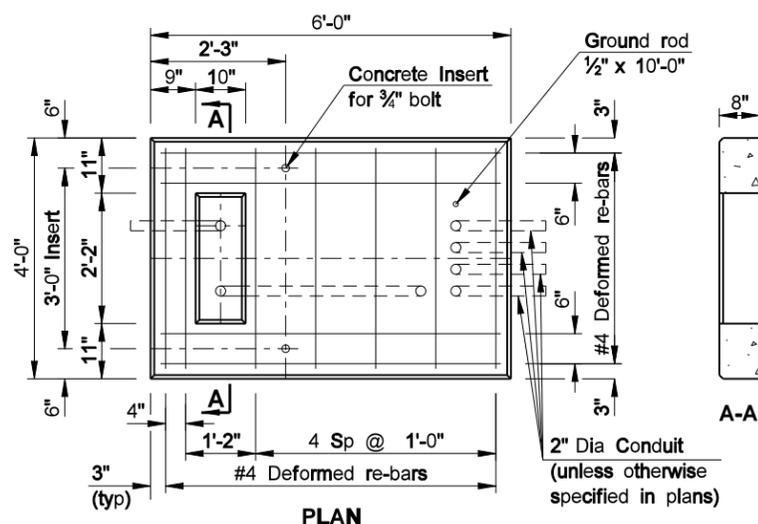


TRANSFORMER & FEED POINT CABINET FOUNDATION PAD MOUNT

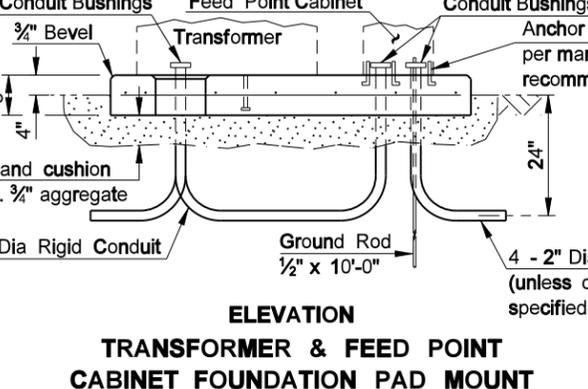


The Transformer & Feed Point Cabinet Foundation Pad Mount shall be bid as Concrete Foundation ~ Feed Point ~ Type A.

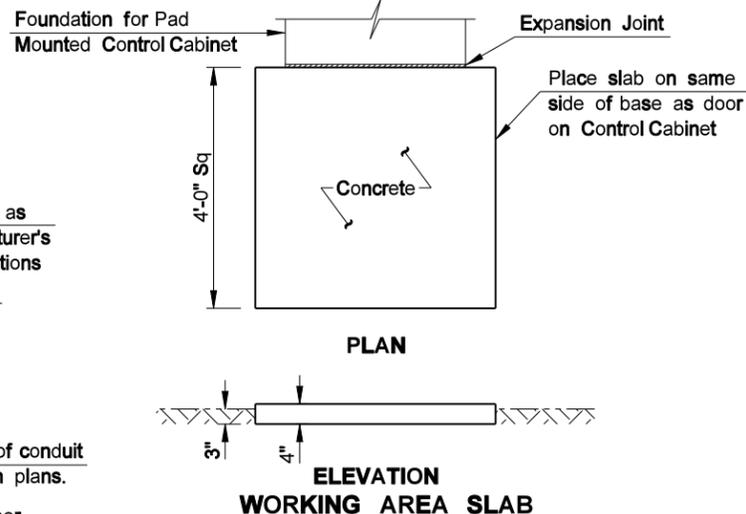


The Working Area Slab shall be installed where shown on the plans and shall not be bid separately but shall be included in the price bid for Concrete Foundation - Traffic Signals.

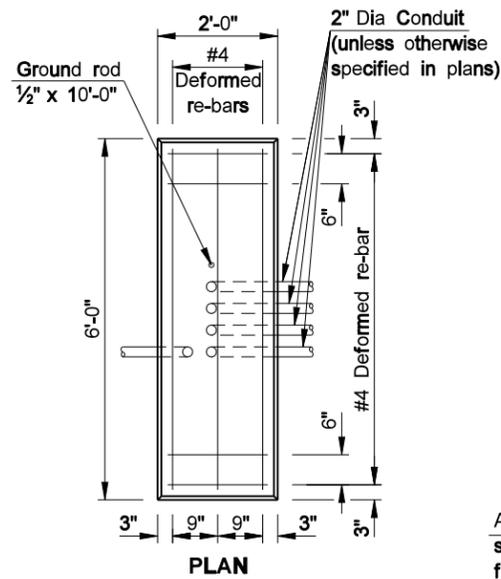



FEED POINT CABINET FOUNDATION PAD MOUNT

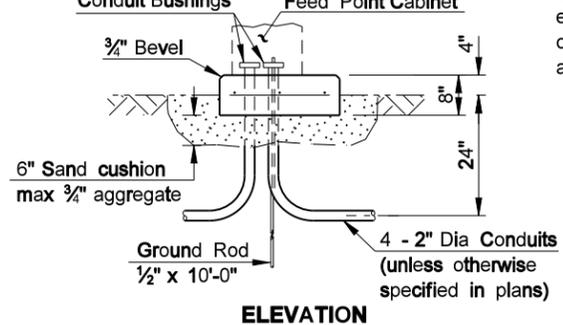

The Feed Point Cabinet Foundation Pad Mount shall be bid as Concrete Foundation ~ Feed Point ~ Type B.

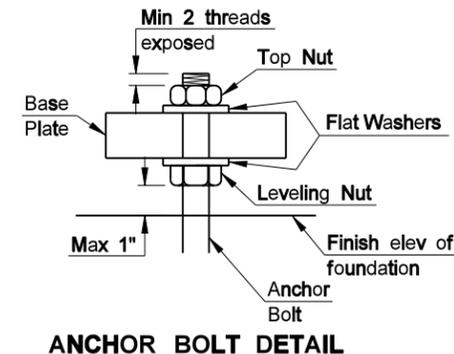

ANCHOR BOLT DETAIL

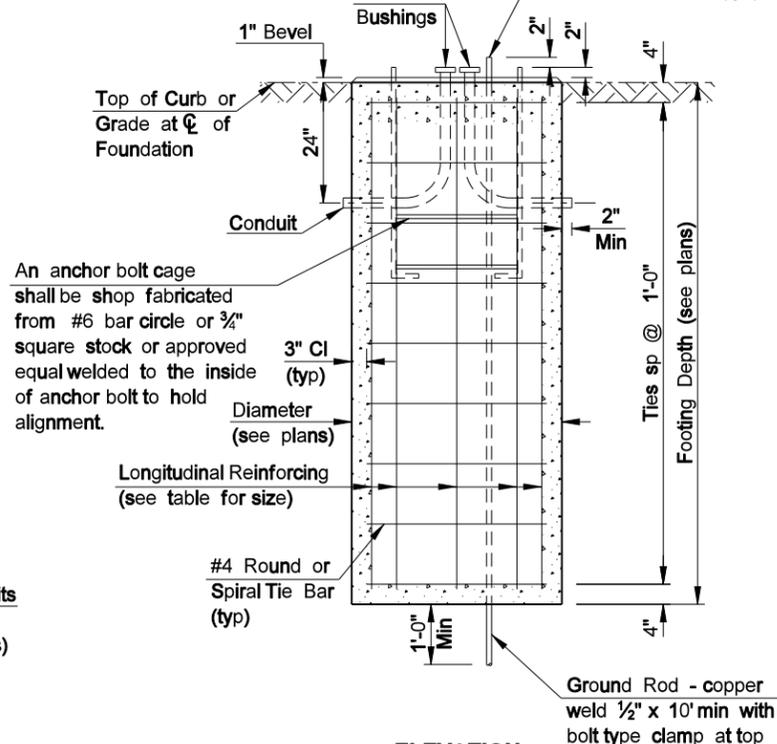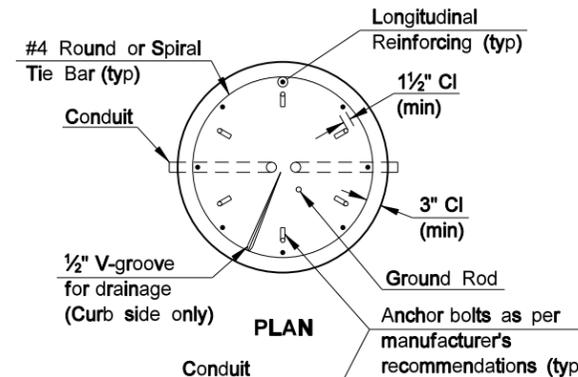

LIGHT & SIGNAL STANDARD FOUNDATION

NOTES:
LIGHT & SIGNAL STANDARD FOUNDATIONS: See plans for conduit size, number of bends and correct position for each foundation. When conduit does not continue beyond the foundation, conduit with a 105° bend and bushings on both ends may be substituted for the 90° bends shown. See plans for correct size & location of foundations. The grade and exact location shall be established by the Engineer in the field. All reinforcing shall be Grade 60. Tie bars shall have a minimum of a 12" lap. Reinforcing may be omitted for Type I, II, V, VI & VII signal standard foundations if the anchor bolts extend to within 3" to 6" above the bottom of the foundation. A minimum of 6 anchor bolts shall be used for cantilevered structures.

CONTROLLER CABINET FOUNDATION PAD MOUNT FOUNDATION: See plans for the number of 90° bends per foundation and correct positioning. The foundation for Pad Mounted Controller Cabinet shall be of sufficient size so that there is a minimum of 3" of clearance from the outside edge of cabinet to the outside edge of the foundation on any side. The contractor shall ensure a water-tight seal between the controller cabinet and the foundation by caulking, except for V-groove.

WORKING AREA SLAB: The materials and preparation of this slab shall be as approved by the Engineer in the field.

TRANSFORMER & FEED POINT CABINET FOUNDATION PAD MOUNTED: The foundation shall have a wood float finish. All conduits shown shall be installed. Conduit that is not used at this time shall be plugged with an expandable plug.



FEED POINT CABINET FOUNDATION PAD MOUNTED: The foundation shall have a wood float finish. All conduits shown shall be installed. Conduit that is not used at this time shall be plugged with an expandable plug.

LIGHT & SIGNAL FOUNDATION TABLE	
FOOTING DEPTH (ft)	LONGITUDINAL REINFORCING
≤ 12	8 - #5
13 - 14	8 - #6
15 - 16	8 - #7
17 - 19	8 - #8



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
6-15-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Terrence R. Udland Registration Number PE- 2674 , on 6/15/10 and the original document is stored at the North Dakota Department of Transportation

FEED POINTS
(ROADWAY LIGHTING)

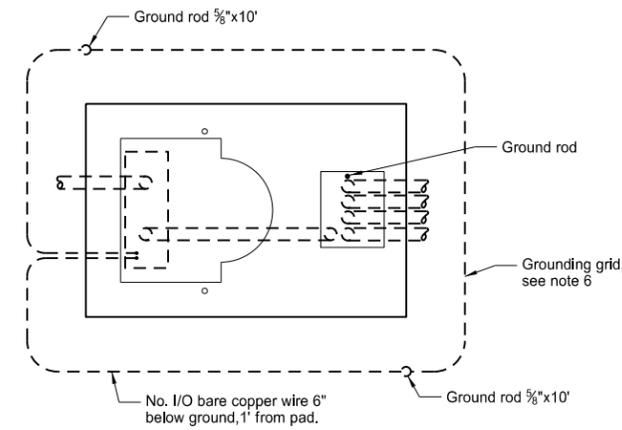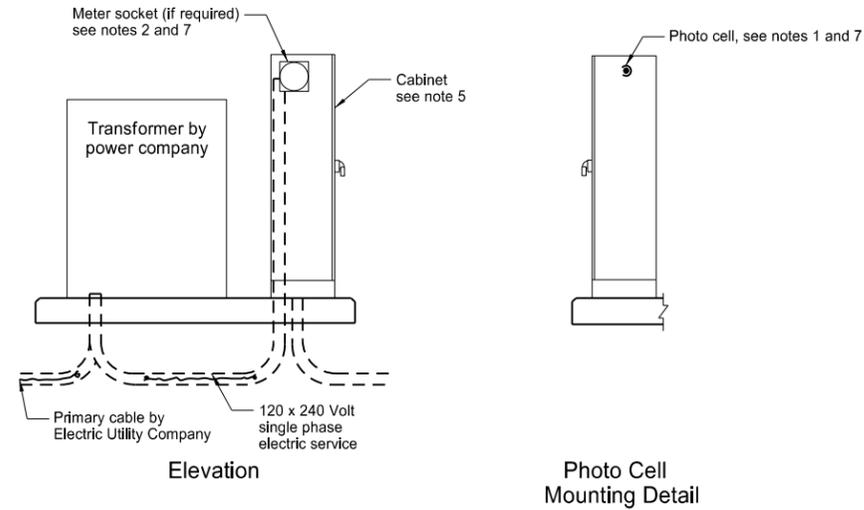

Plan
Transformer and Feed Point Cabinet Pad Mounted

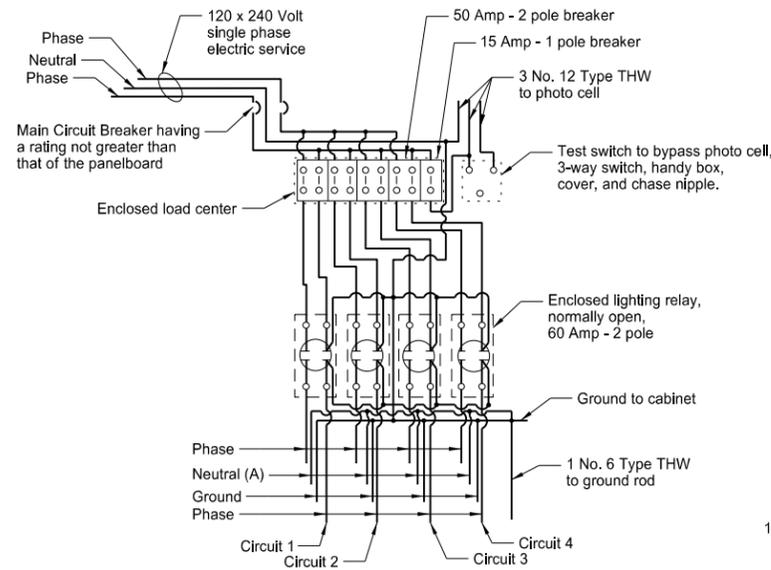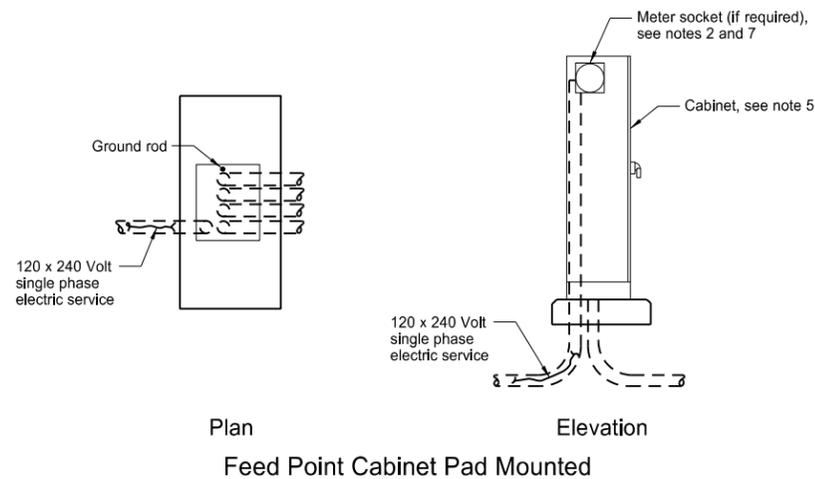


Feed Point Type IV

Type I feed point is similar to Type IV except only one electrical circuit, one 50 Amp - 2 pole breakers and one lighting relay, normally open, shall be installed.

Type II feed point is similar to Type IV except only two electrical circuit, two 50 Amp - 2 pole breakers and two lighting relays, normally open, shall be installed.

Type III feed point is similar to Type IV except only three electrical circuits, three 50 Amp - 2 pole breakers and three lighting relays, normally open, shall be installed.



(A) Install when festoon circuit is required.

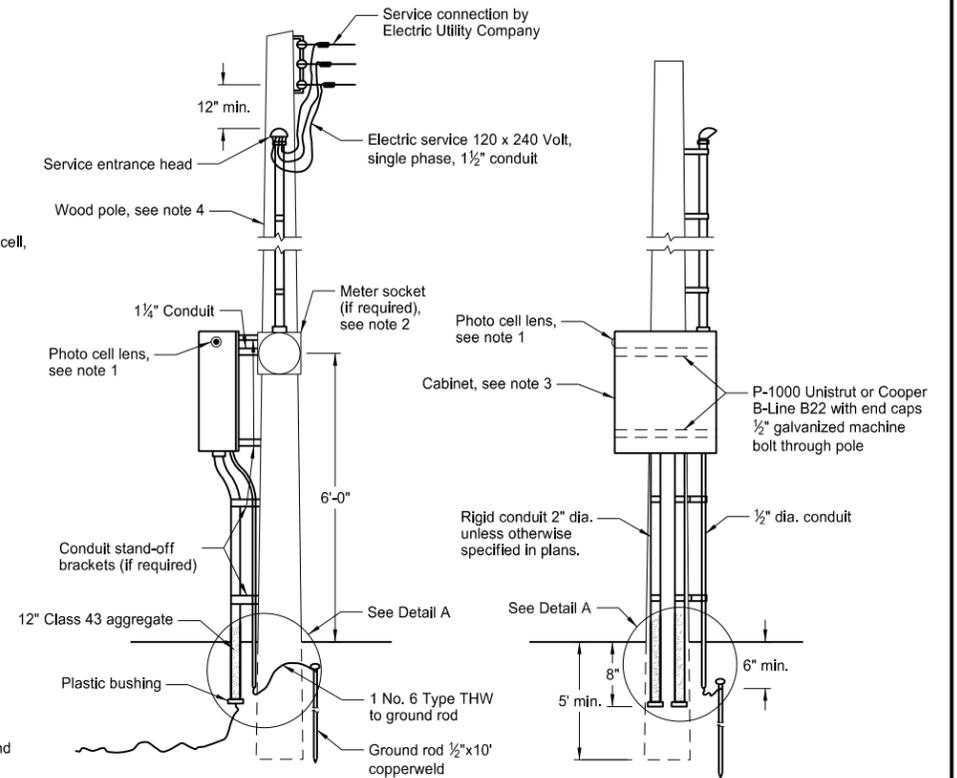

Feed Point Pole Mounted


Notes:

1. Photo Cell: The electrical contractor shall furnish and install the photoelectric cell. The photo lens shall face north.
2. Meter Socket: The contractor shall install the meter socket and trim if the meter is required by local Utility Company. Meter to be furnished and installed by Utility Company.
3. Pole Mounted Cabinet: Cabinet shall have lock drip shield, factory installed steel backing, stainless steel hardware, and side hinge door. Cabinet shall be shop coated with one coat of primer and have two coats of exterior gray enamel.
Type I and II feed point shall be 30" high x 24" wide x 8" deep, Type III and IV feed point shall be 30" high x 42" wide x 10" deep or 36" high x 36" wide x 10" deep.
4. Wood Pole: Minimum 20' Class VII full length penta pressure treated wood pole. (if required, see layout sheets)
5. Pad Mounted Cabinet: Cabinet shall be 56" high x 26" wide x 14" deep. Minimum 12 gauge steel or aluminum with provisions for padlock. Cabinet shall be weatherproof. A steel cabinet shall have one coat of primer and two coats of exterior dark green enamel.
6. Grounding Grid: The grounding grid shall have a ground resistance not to exceed 25 ohms. This shall be obtained by one or more 5/8" x 10' copperweld ground rods in parallel or series at two corners. Minimum distance between ground unit assemblies shall be 6'0".
7. Meter Location: The meter (if required) shall not be mounted on the same side of the cabinet as the photo cell.

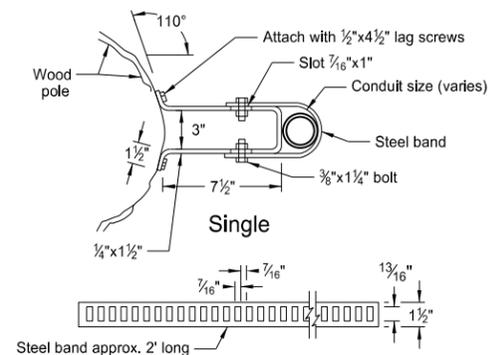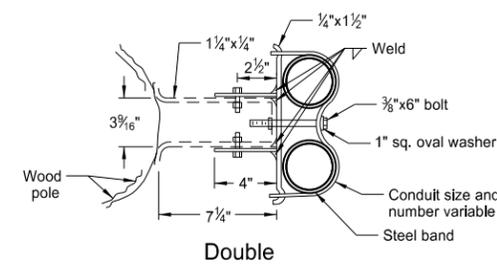

Conduit Standoff Bracket

The conduit standoff brackets may be omitted if not required by the local utility company.

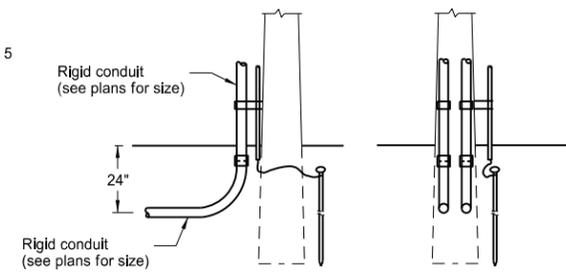


Use this detail if there is a continuous run of conduit from the feed point to the first light standard.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-8-13	
REVISIONS	
DATE	CHANGE
7-8-14	Revised note 3


This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 07/08/14 and the original document is stored at the
North Dakota Department
of Transportation

LIGHTING AND SIGNAL DETAILS

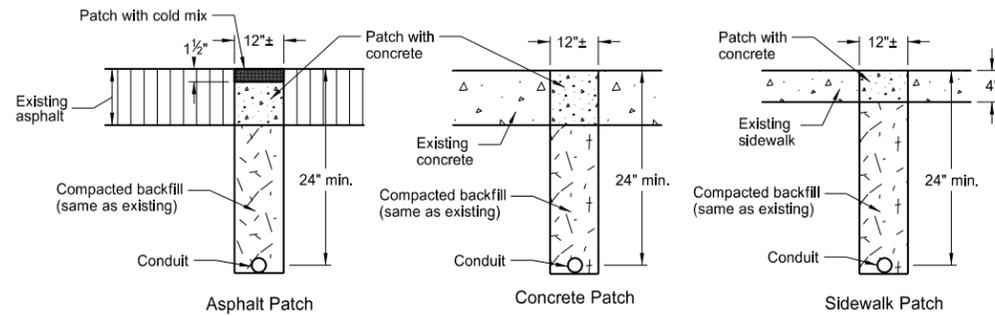


Surface Patch Details

Note: All trenches shall be saw cut. The replacement concrete shall be P.C.C. pavement and the coarse aggregate gradation, maximum size and method of curing shall be as approved by the Engineer. Immediately prior to pouring replacement concrete, all surfaces shall be painted with an approved epoxy compound.

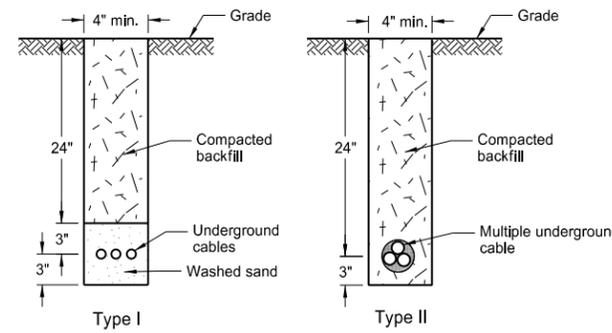


Cable Trench


Note: The entire area which is disturbed by the trenching shall be sodded or as directed by the Engineer.

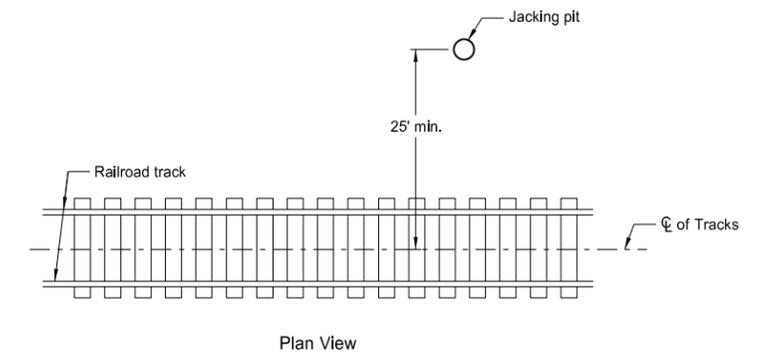

Plan View

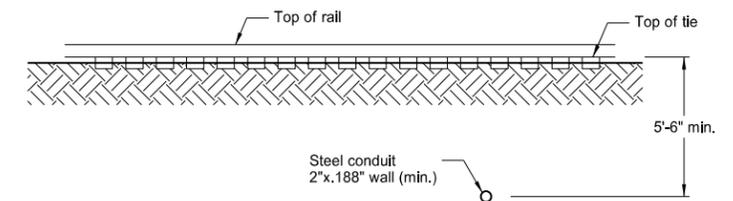


Elevation View
Conduit Placement under Railroad Tracks

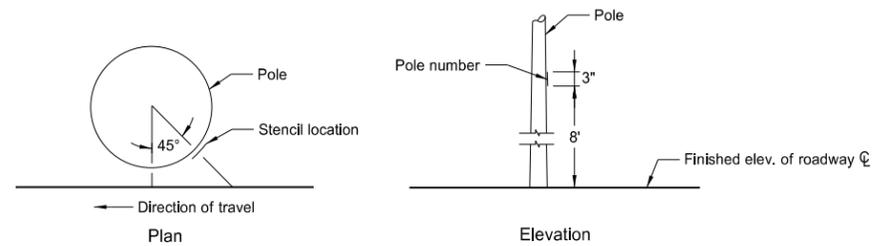


Light Standard Numbering


Note: On the roadway side of each light standard, the Contractor shall stencil on the pole number using black paint or an adhesive coated plastic such as Scotchcal by 3M or as approved by the Engineer. See layout sheets for pole numbers.



Side View Front View
Terminal Block Detail

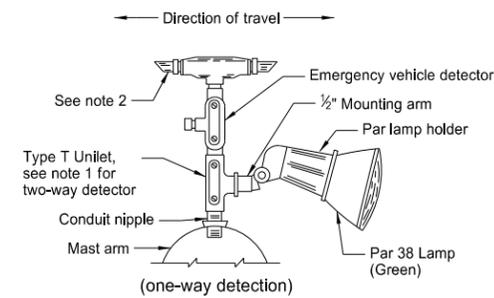


Emergency Vehicle Detector Detail

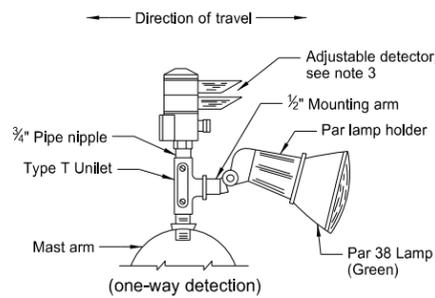


Alternate Emergency Vehicle Detector Detail (adjustable)


Notes:
1. Two-way Detector shall have Type X Unilet with two Par lamp holders and lamps. (one in each direction).
2. One-way Detector shall have the unused end plugged with metal pipe plug.
3. Two-way Detector shall have the detector lens rotated to face the direction of travel, and shall have Type X Unilet with two Par lamp holders and lamps (one in each direction).

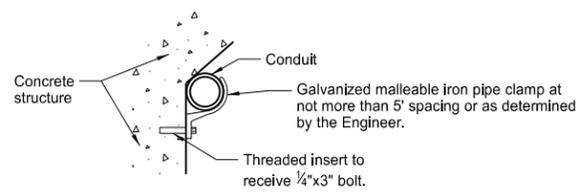


Bridge Mounted Conduit Hanger

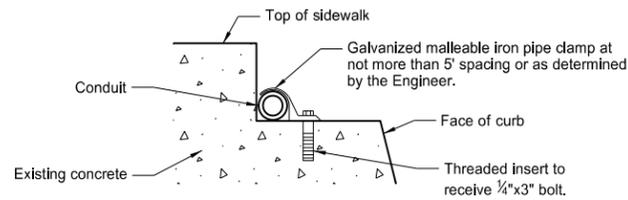

Curb Mounted Conduit

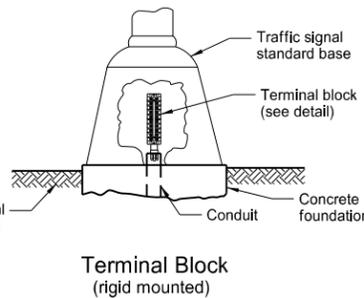

Terminal Block (rigid mounted)

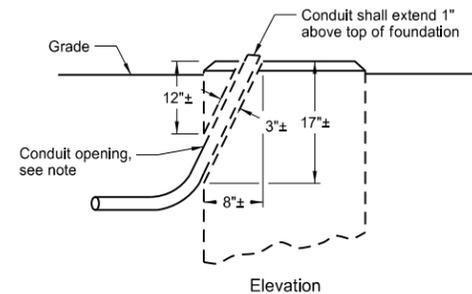


Revise Concrete Foundation

Note: Jackhammer or drill to remove material and provide a location for conduit. Make opening no larger than necessary. Place conduit, fill with concrete and finish foundation to original appearance.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-8-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/08/13 and the original document is stored at the North Dakota Department of Transportation

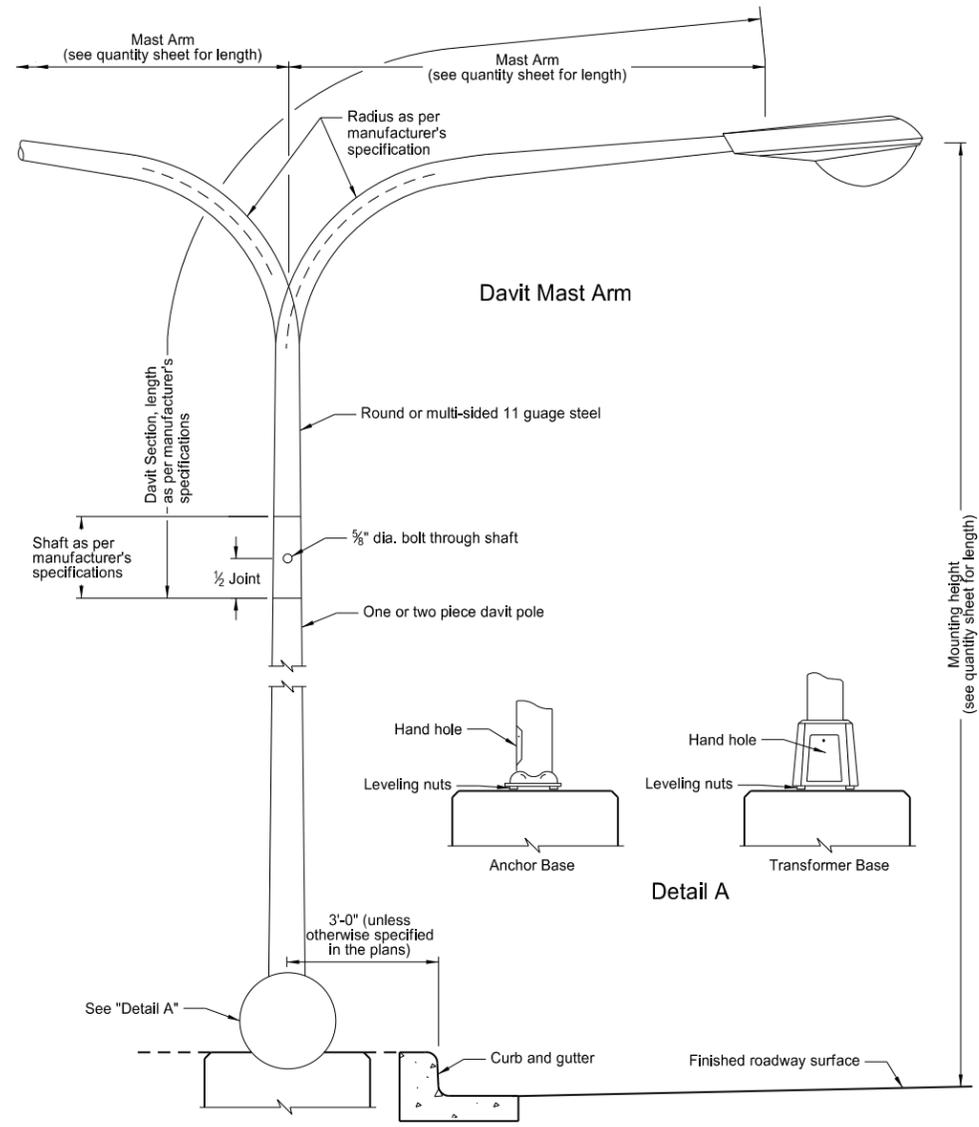

Davitt Mast Arm


Mounting height (see quantity sheet for length)

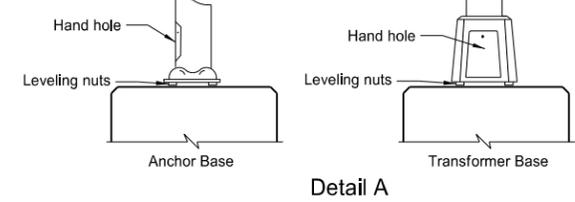


Detail A

Light Standard Details


LIGHT STANDARD DETAILS

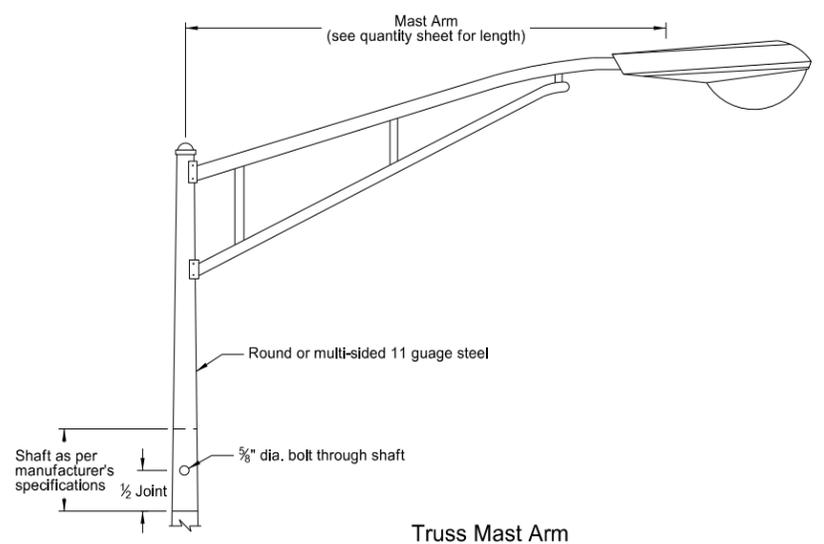

Truss Mast Arm

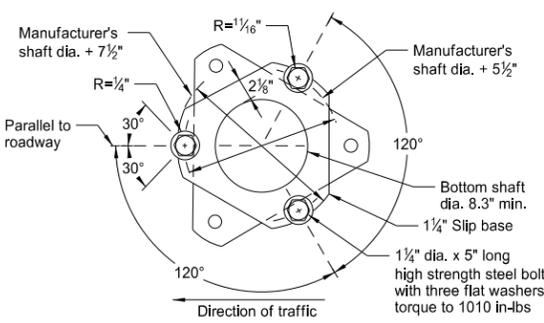


Top View

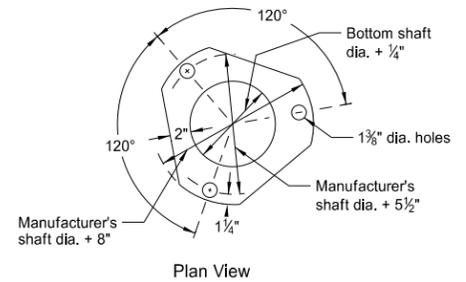


Plan View


(A) ASTM A446 Grade "A" 28 gauge keeper plate on top of middle flat washer. The Keeper plate shall be galvanized after fabrication.

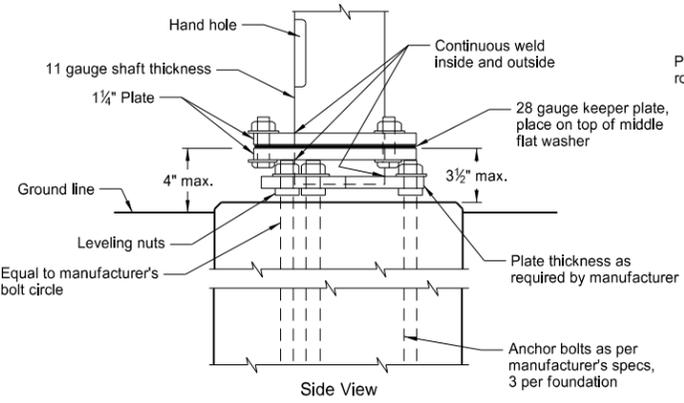

Steel Base Detail




Slip Base Placement Detail

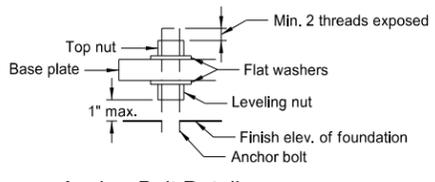


Anchor Bolt Detail

Multi-Directional Slip Base

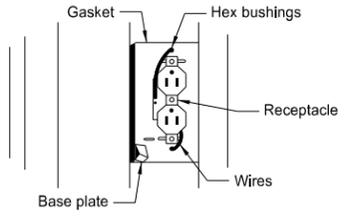

Optional: Festoon receptacle mounted on multi-sided pole.

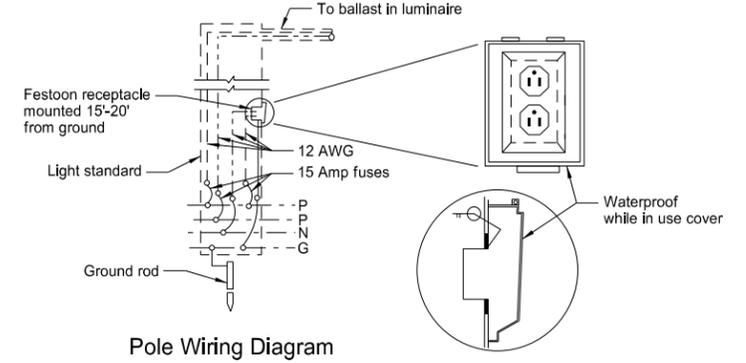

Pole Wiring Diagram

Receptacle Mounting Detail (B)

(B) Receptacle shall be mounted on the side of the pole that faces the street side. Festoon Receptacle shall be installed only when specified in the plans.

Notes:

Light Standard Locations: The offset distance shall have a minimum offset from the curb face of 3 feet. Light standards that are placed in urban areas and where speeds are less than 30 mph, may be placed at 3 feet. Where speeds are 30 mph or more, light standards shall be placed at least 16 feet from the driving lane.


Steel Standards: Marred or scratched areas shall be touched up after erection.

Luminaire: Shall be internal ballast-constant wattage 120x240 voltage. See layout sheets for type of luminaire, wattage, I.E.S. distribution, and operating system.


Fusing: Fusing in base, see specifications.

Slip Base Bolt Torque Procedure:

1. Tighten all bolts the maximum possible with 12" to 15" wrench to bed washers and to clean bolt threads, then loosen.
2. Retighten bolts with a systematic order to prescribed torque.
3. Loosen each bolt and retighten to prescribed torque in the same order as initial retightening.
4. Burr threads of junction with nut using center punch to prevent nut loosening.

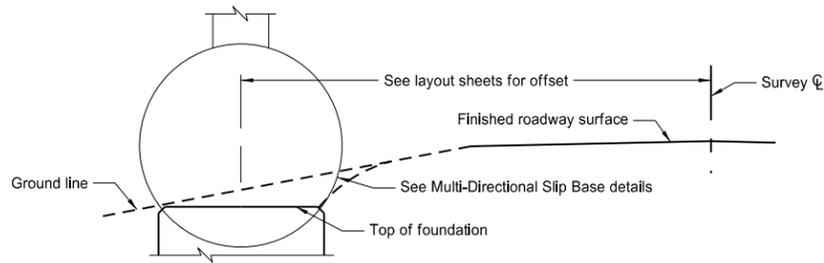

Concrete Foundation Location



Breakaway Support Stub Clearance Diagram

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-8-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
 Roger Weigel,
 Registration Number
 PE-2930,
 on 10/08/13 and the original document is stored at the
 North Dakota Department
 of Transportation