



# North Dakota Department of Transportation

Grant Levi, P.E.  
*Director*

Jack Dalrymple  
*Governor*

May 3, 2016

## ADDENDUM 2 – JOB 25

TO: All prospective bidders on project SOIB-5-094(088)061, Job No. 25 scheduled for the May 13, 2016 bid opening.

The following plan revisions shall be made:

Plan Revisions:

**Remove and replace sheet 20-7 with the enclosed sheet dated 5/3/16.**

Sheet 20-7:

Added notes requiring a top rail and specifying the height of the fence.


This addendum is to be incorporated into the bidder's proposal for this project.

For


  
CAL J. GENDREAU – CONSTRUCTION SERVICES ENGINEER

80:plm

Enclosure

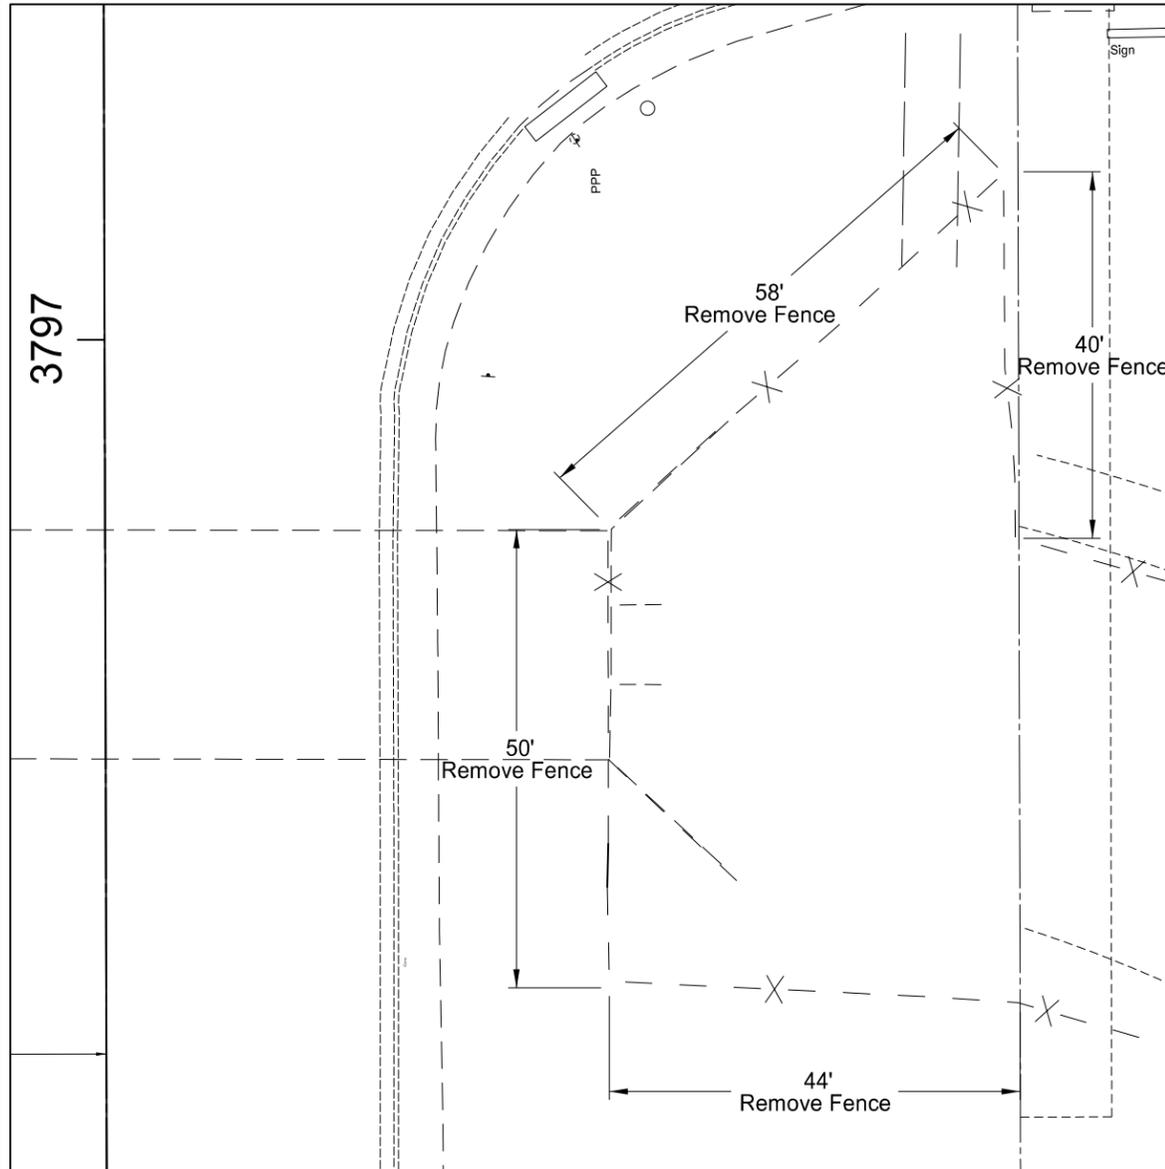

Existing

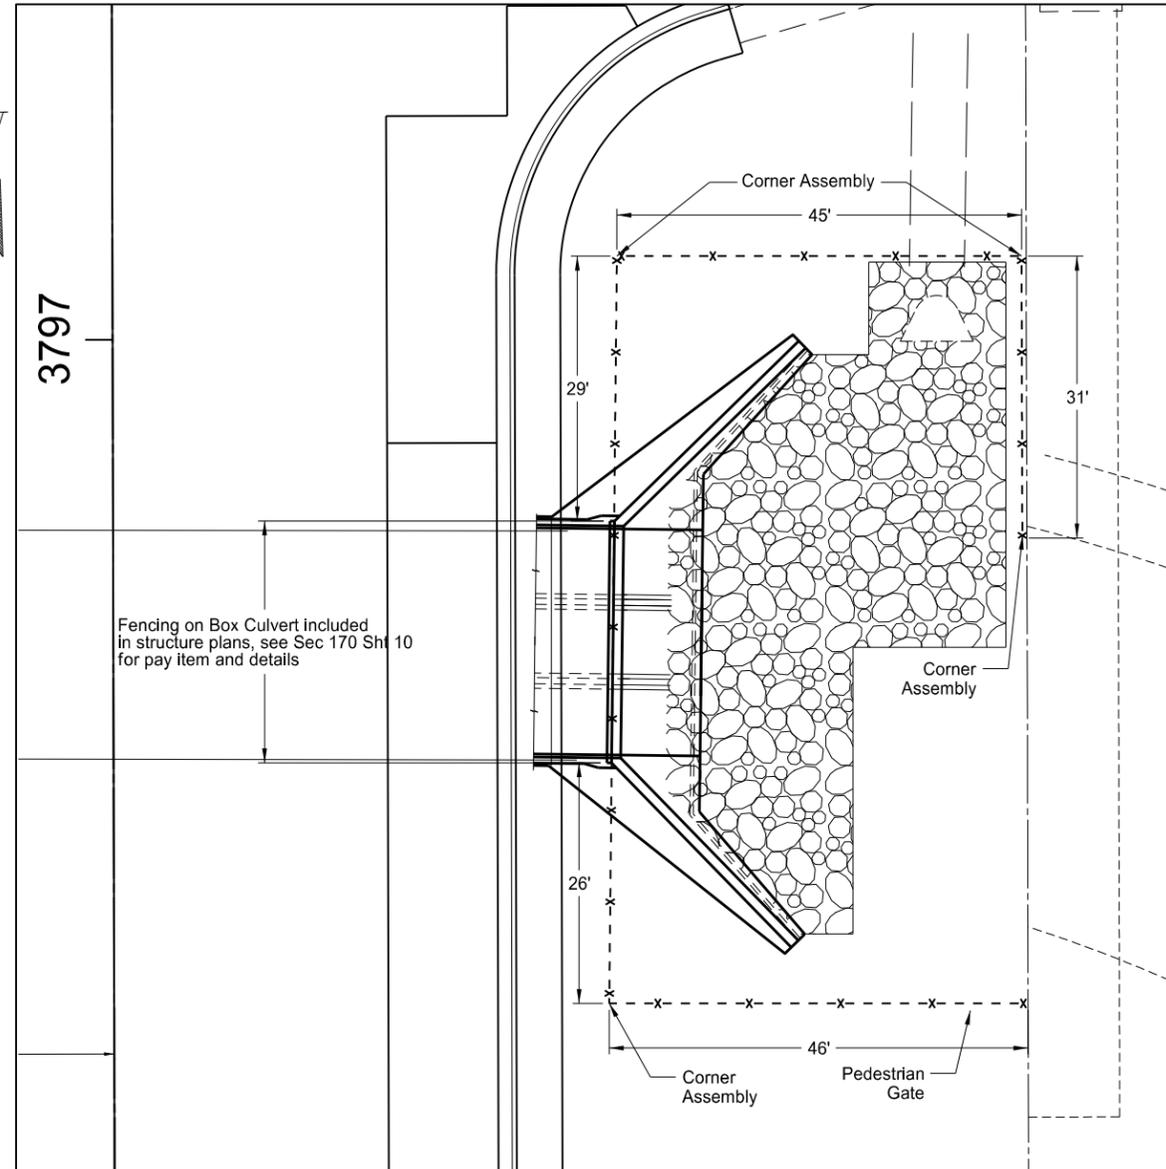

Proposed

This document was originally issued and sealed by Michael Wilz, Registration Number PE- 9150, on 5/3/16 and the original document is stored at the North Dakota Department of Transportation

Item	Description	Quantity	Unit
202-0310	REMOVAL OF CHAIN LINK FENCE Drainage Channel Fencing	192	LF
752-0600	FENCE CHAIN LINK Drainage Channel Fencing	177	LF
752-3100	CORNER ASSEMBLY CHAIN LINK Drainage Channel Fencing	4	EA

**Note:**  
The fencing should be constructed in accordance with Standard Drawing D-752-2 with the following exceptions:  
1. The fencing should include a top rail. All equipment, materials, and labor required to place the top rail should be included in the price bid for " Fence Chain Link".  
2. The height of the fence and fabric will be 5'.

Fencing Details