

NDDOT ABBREVIATIONS

? This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.

Abn abandoned
 Abut abutment
 Ac acres
 Adj adjusted
 Aggr aggregate
 Ahd ahead
 ARV air release valve
 Align alignment
 Al alley
 Alt alternate
 Alum aluminum
 ADA Americans with Disabilities Act
 A ampere
 & and
 Appr approach
 Approx approximate
 ACP asbestos cement pipe
 Asph asphalt
 AC asphalt cement
 Assmd assumed
 @ at
 Atten attenuation
 ATR automatic traffic recorder
 Ave Avenue
 Avg average
 ADT average daily traffic
 Az azimuth
 Bk back
 BF back face
 Bs backsight
 Balc balcony
 B Wire barbed wire
 Barr barricade
 Btry battery
 Brg bearing
 BI beehive inlet
 Beg begin
 BM bench mark
 Bkwy bikeway
 Bit bituminous
 Blk block
 Bd Ft board feet
 BH bore hole
 BS both sides
 Bot bottom
 Blvd Boulevard
 Bndry boundary
 BC brass cap
 Brkwy breakaway
 Br bridge
 Bldg building

BV butterfly valve
 Byp bypass
 C Gdrl cable guardrail
 Calc calculate
 Cd candela
 CIP cast iron pipe
 CB catch basin
 CRS cationic rapid setting
 C Gd cattle guard
 C To C center to center
 Cl or C centerline
 Cm centimeter
 Ch chain
 Chnlk chain-link
 Ch Blk channel block
 Ch Ch channel change
 Chk check
 Chsld chiseled
 Cir circle
 Cl class
 Cl clay
 Cl F clay fill
 Cl Hvy clay heavy
 Cl Lm clay loam
 Clnt clean-out
 Clr clear
 Cl&gr clearing & grubbing
 Co S coal slack
 Comb. combination
 Coml commercial
 Compr compression
 CADD computer aided drafting & design
 Conc concrete
 Cond conductor
 Const construction
 Cont continuous
 CSB continuous split barrel sample
 Contr contraction
 Contr contractor
 CP control point
 Coord coordinate
 Cor corner
 Corr corrected
 CAES corrugated aluminum end section
 CAP corrugated aluminum pipe
 CMES corrugated metal end section
 CMP corrugated metal pipe
 CPVCP corrugated poly-vinyl chloride pipe
 CSES corrugated steel end section
 CSP corrugated steel pipe
 C coulomb
 Co County
 Crse course
 C Gr course gravel
 CS course sand

Ct Court
 Xarm cross arm
 Xbuck cross buck
 Xsec cross sections
 Xing crossing
 Xrd Crossroad
 Crn crown
 CF cubic feet
 M3 cubic meter
 M3/s cubic meters per second
 CY cubic yard
 Cy/mi cubic yards per mile
 Culv culvert
 C&G curb & gutter
 CI curb inlet
 CR curb ramp
 CS curve to spiral
 C cut
 Dd Ld dead load
 Defl deflection
 Defm deformed
 Deg or D degree
 DInt delineate
 DIntr delineator
 Depr depression
 Desc description
 Det detail
 DWP detectable warning panel
 Dtr detour
 Dia diameter
 Dir direction
 Dist distance
 DM disturbed material
 DB ditch block
 DG ditch grade
 Dbl double
 Dn down
 Dwg drawing
 Dr drive
 Drwy driveway
 DI drop inlet
 D dry density
 Ea each
 Esmt easement
 E East
 EB Eastbound
 Elast elastomeric
 EL electric locker
 E Mtr electric meter
 Elec electric/al
 EDM electronic distance meter
 Elev or El elevation
 Ellipt elliptical
 Emb embankment
 Emuls emulsion/emulsified

ES end section
 Engr engineer
 ESS environmental sensor station
 Eq equal
 Eq equation
 Evgr evergreen
 Exc excavation
 Exst existing
 Exp expansion
 Expy Expressway
 E external of curve
 Extru extruded
 FOS factor of safety
 F Fahrenheit
 FS far side
 F farad
 Fed Federal
 FP feed point
 Ft feet/foot
 Fn fence
 Fn P fence post
 FO fiber optic
 FB field book
 FD field drive
 F fill
 FAA fine aggregate angularity
 FS fine sand
 FH fire hydrant
 Fl flange
 Flrd flared
 FES flared end section
 F Bcn flashing beacon
 FA flight auger sample
 FL flow line
 Ftg footing
 FM force main
 Fs foresight
 Fnd found
 Fdn foundation
 Frac fractional
 Frwy freeway
 Frt front
 FF front face
 F Disp fuel dispenser

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-2

FFP	fuel filler pipes	IPn	Iron Pin	MC	medium curing	Ped	pedestal
FLS	fuel leak sensor	IP	iron Pipe	M	mega	Ped	pedestrian
Furn	furnish/ed	Jt	joint	Mer	meridian	PPP	pedestrian pushbutton post
Gal	gallon	J	joule	M	meter	Pen.	penetration
Galv	galvanized	Jct	junction	M/s	meters per second	Perf	perforated
Gar	garage	K	kelvin	M	mid ordinate of curve	Per.	perimeter
Gs L	gas line	Kn	kilo newton	Mi	mile	PL	pipeline
G Reg	gas line regulator	Kpa	kilo pascal	MM	mile marker	PI	place
GMV	gas main valve	Kg	kilogram	MP	mile post	P&P	plan & profile
G Mtr	gas meter	Kg/m3	kilogram per cubic meter	MI	milliliter	PL	plastic limit
GSV	gas service valve	Km	kilometer	Mm	millimeter	PI	plate
GVP	gas vent pipe	K	Kip(s)	Mm/hr	millimeters per hour	Pt	point
GV	gate valve	LS	Land Surveyor (licensed)	Min	minimum	PCC	point of compound curve
Ga	gauge	LSIT	Land Surveyor In Training	Misc	miscellaneous	PC	point of curve
Geod	geodetic	Ln	lane	Mon	monument	PI	point of intersection
GIS	Geographical Information System	Lg	large	Mnd	mound	PRC	point of reverse curvature
G	giga	Lat	latitude	Mtbl	mountable	PT	point of tangent
GPS	Global Positioning System	Lt	left	Mtd	mounted	POC	point on curve
Gov	government	L	length of curve	Mtg	mounting	POT	point on tangent
Grd	graded/grade	Lens	lenses	Mk	muck	PE	polyethylene
Gr	gravel	Lvl	level	Mun	municipal	PVC	polyvinyl chloride
Grnd	ground	LB	level book	N	nano	PCC	Portland Cement concrete
GWM	ground water monitor	Lvng	leveling	NGS	National Geodetic Survey	Lb or #	pounds
Gdrl	guardrail	Lht	light	NS	near side	PP	power pole
Gtr	gutter	LP	light pole	Neop	neoprene	Preempt	preemption
H Plg	H piling	Ltg	lighting	Ntwk	network	Prefab	prefabricated
Hdwl	headwall	Lig Co	lignite coal	N	newton	Prfmd	performed
Ha	hectare	Lig Sl	lignite slack	N	North	Prep	preparation
Ht	height	LF	linear foot	NE	North East	Press.	pressure
HI	height of instrument	Liq	liquid	NW	North West	PRV	pressure relief valve
Hel	helical	LL	liquid limit	NB	Northbound	Prestr	prestressed
H	henry	L	litre	No. or #	number	Pvt	private
HZ	hertz	Lm	loam	Obsc	obscure(d)	PD	private drive
HDPE	high density polyethylene	Loc	location	Obsn	observation	Prod.	production/produce
HM	high mast	LC	long chord	Ocpd	occupied	Prog	programmed
HP	high pressure	Long.	longitude	Ocpy	occupy	Prop.	property
HPS	high pressure sodium	Lp	loop	Off Loc	office location	Prop Ln	property line
Hwy	highway	LD	loop detector	O/s	offset	Ppsd	proposed
Hor	horizontal	Lm	lumen	OC	on center	PB	pull box
HBP	hot bituminous pavement	Lum	luminaire	C	one dimensional consolidation		
HMA	hot mix asphalt	L Sum	lump sum	OC	organic content		
Hr	hour(s)	Lx	lux	Orig	original		
Hyd	hydrant	ML	main line	O To O	out to out		
Ph	hydrogen ion content	M Hr	man hour	OD	outside diameter		
Id	identification	MH	manhole	OH	overhead		
In or "	inch	Mkd	marked	PMT	pad mounted transformer		
Incl	inclinometer tube	Mkr	marker	Pg	pages		
IMH	inlet manhole	Mkg	marking	Pntd	painted		
ID	inside diameter	MA	mast arm	Pr	pair		
Inst	instrument	Matl	material	Pnl	panel		
Intchg	interchange	Max	maximum	Pk	park		
Intmdt	intermediate	MC	meander corner	PK	Parker-Kalon nail		
Intscn	intersection	Meas	measure	Pa	pascal		
Inv	invert	Mdn	median	PSD	passing sight distance		
IM	iron monument	MD	median drain	Pvmt	pavement		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

Qty	quantity	SN	sign number	Tan	tangent	Wb	weber
Qtr	quarter	Sig	signal	T	tangent (semi)	WIM	weigh in motion
Rad or R	radius	Si Cl	silt clay	TS	tangent to spiral	W	west
RR	railroad	Si Cl Lm	silty clay loam	Tel	telephone	WB	westbound
Rlwy	railway	Si Lm	silty loam	Tel B	Telephone Booth	Wrng	wiring
Rsd	raised	Sgl	single	Tel P	telephone pole	W/	with
RTP	random traverse point	SC	slow curing	Tv	television	W/o	without
Rge or R	range	SS	slow setting	Temp	temperature	WC	witness corner
RC	rapid curing	Sm	small	Temp	temporary	WGS	world geodetic system
Rec	record	S	South	TBM	temporary bench mark	Z	zenith
Rcy	recycle	SE	South East	T	tesla		
RAP	recycled asphalt pavement	SW	South West	T	thinwall tube sample		
RPCC	recycled portland cement concrete	SB	Southbound	T/mi	tons per mile		
Ref	reference	Sp	spaces	Ts	topsoil		
R Mkr	reference marker	Spcl	special	Twp or T	township		
RM	reference monument	SA	special assembly	Traf	traffic		
Refl	reflectorized	SP	special provisions	TSCB	traffic signal control box		
RCB	reinforced concrete box	G	specific gravity	Tr	trail		
RCES	reinforced concrete end section	Spk	spike	Transf	transformer		
RCP	reinforced concrete pipe	SC	spiral to curve	TB	transit book		
RCPS	reinforced concrete pipe sewer	ST	spiral to tangent	Trans	transition		
Reinf	reinforcement	SB	split barrel sample	TT	transmission tower		
Res	reservation	SH	sprinkler head	Trans	transverse		
Ret	retaining	SV	sprinkler valve	Trav	traverse		
Rev	reverse	Sq	square	TP	traverse point		
Rt	right	SF	square feet	Trtd	treated		
R/W	right of way	Km2	square kilometer	Trmt	treatment		
Riv	river	M2	square meter	Qc	triaxial compression		
Rd	road	SY	square yard	TERO	tribal employment rights ordinance		
Rdbd	road bed	Stk	stake	Tpl	triple		
Rdwy	roadway	Std	standard	TP	turning point		
RWIS	roadway weather information system	N	standard penetration test	Typ	typical		
Rk	rock	Std Specs	standard specifications	Qu	unconfined compressive strength		
Rt	route	Sta	station	Ugrnd	underground		
Salv	salvage(d)	Sta Yd	station yards	USC&G	US Coast & Geodetic Survey		
Sd	sand	Stm L	steam line	USGS	US Geologic Survey		
Sdy Cl	sandy clay	SEC	steel encased concrete	Util	utility		
Sdy Cl Lm	sandy clay loam	SMA	stone matrix asphalt	VG	valley gutter		
Sdy Fl	sandy fill	SSD	stopping sight distance	Vap	vapor		
Sdy Lm	sandy loam	SD	storm drain	Vert	vertical		
San	sanitary sewer line	St	street	VC	vertical curve		
Sc	scoria	SPP	structural plate pipe	VCP	vitrified clay pipe		
Sec	seconds	SPPA	structural plate pipe arch	V	volt		
Sec	section	Str	structure	Vol	volume		
SL	section line	Subd	subdivision	Wkwy	walkway		
Sep	separation	Sub	subgrade	W	water content		
Seq	sequence	Sub Prep	subgrade preperation	WGV	water gate valve		
Serv	service	Ss	subsoil	WL	water line		
Sh	shale	SE	superelevation	WM	water main		
Sht	sheet	SS	supplement specification	WMV	water main valve		
Shtng	sheeting	Supp	supplemental	W Mtr	water meter		
Shldr	shoulder	Surf	surfacing	WSV	water service valve		
Sw	sidewalk	Surv	survey	WW	water well		
S	siemens	Sym	symmetrical	W	watt		
SD	sight distance	SI	systems international	Wrng	wearing		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM 702 Communications
 ACCENT Accent Communications
 AGASSIZ WU Agassiz Water Users Incorporated
 AGC Associated General Contractors of America
 All PI Alliance Pipeline
 ALL SEAS WU All Seasons Water Users Association
 AMOCO PI Amoco Pipeline Company
 AMRDA HESS Amerada Hess Corporation
 AT&T AT&T Corporation
 B PAW Bear Paw Energy Incorporated
 BAKER ELEC Baker Electric
 BASIN ELEC Basin Electric Cooperative Incorporated
 BEK TEL Bek Communications Cooperative
 BELLE PL Belle Fourche Pipeline Company
 BLM Bureau of Land Management
 BNSF Burlington Northern Santa Fe Railway
 BOEING Boeing
 BRNS RWD Barnes Rural Water District
 BURK-DIV ELEC Burke-Divide Electric Cooperative
 BURL WU Burleigh Water Users
 Cable One Cable One
 CABLE SERV Cable Services
 CAP ELEC Capital Electric Cooperative Incorporat
 CASS CO ELEC Cass County Electric Cooperative
 CASS RWU Cass Rural Water Users Incorporated
 CAV ELEC Cavalier Rural Electric Cooperative
 CBLCOM Cablecom Of Fargo
 CENEX PL Cenex Pipeline
 CENT PL WATER DIST Central Pipe Line Water District
 CENT PWR ELEC Central Power Electric Cooperative
 COE Corps of Engineers
 CONS TEL Consolidated Telephone
 CONT RES Continental Resource Inc
 CPR Canadian Pacific Railway
 D O E Department Of Energy
 DAK CARR Dakota Carrier Network
 DAK CENT TEL Dakota Central Telephone
 DAK RWD Dakota Rural Water District
 DGC Dakota Gasification Company
 DICKEY R NET Dickey Rural Networks
 DICKEY RWU Dickey Rural Water Users Association
 DICKEY TEL Dickey Telephone
 DNRR Dakota Northern Railroad
 DOME PL Dome Pipeline Company
 DVELEC Dakota Valley Electric Cooperative
 DVMW Dakota, Missouri Valley & Western
 ENBRDG Enbridge Pipelines Incorporated
 ENVENTIS Enventis Telephone
 FALK MNG Falkirk Mining Company
 FHWA Federal Highway Administration
 G FKS-TRL WD Grand Forks-trail Water District
 GETTY TRD & TRAN Getty Trading & Transportation
 GLDN W ELEC Golden West Electric Cooperative
 GRGS CO TEL Griggs County Telephone

GT PLNS NAT GAS Great Plains Natural Gas Company
 HALS TEL Halstad Telephone Company
 IDEA1 Idea1
 INT-COMM TEL Inter-Community Telephone Company
 KANEB PL Kaneb Pipeline Company
 KEM ELEC Kem Electric Cooperative Incorporated
 KOCH GATH SYS Koch Gathering Systems Incorporated
 LKHD PL Lakehead Pipeline Company
 LNGDN RWU Langdon Rural Water Users Incorporated
 LWR YELL R ELEC Lower Yellowstone Rural Electric
 MCKNZ CON McKenzie Consolidated Telcom
 MCKENZIE ELEC McKenzie Electric Cooperative
 MCKNZ WRD McKenzie County Water Resource District
 MCLEOD McLeod USA
 MCLN ELEC McLean Electric Cooperative
 MCLN-SHRDN R WAT McLean-Sheridan Rural Water
 MDU Montana-dakota Utilities
 MID-CONT CABLE Mid-Continent Cable
 MIDSTATE TEL Midstate Telephone Company
 MINOT CABLE Minot Cable Television
 MINOT TEL Minot Telephone Company
 MISS W W S Missouri West Water System
 MNKOTA PWR Minnkota Power
 MOR-GRAN-SOU ELEC Mor-gran-sou Electric Cooperative
 MOUNT-WILLI ELEC Mountrail-williams Electric Cooperative
 MRE LBTY TEL Moore & Liberty Telephone
 MUNICIPAL City Water And Sewer
 MUNICIPAL City Of '.....'
 N CENT ELEC North Central Electric Cooperative
 N VALL W DIST North Valley Water District
 ND PKS & REC North Dakota Parks And Recreation
 ND TEL North Dakota Telephone Company
 NDDOT North Dakota Department of Transportation
 NDSU SOIL SCI DEPT NDSU Soil Science Department
 NEMONT TEL Nemont Telephone
 NODAK R ELEC Nodak Rural Electric Cooperative
 NOON FRMS TEL Noonan Farmers Telephone Company
 NPR Northern Plains Railroad
 NSP Northern States Power
 NTH PRAIR RW Northern Prairie Rural Water Association
 NTHN BRDR PL Northern Border Pipeline
 NTHN PLNS ELEC Northern Plains Electric Cooperative Incorporated
 NTHWSTRN REF Northwestern Refinery Company
 NW COMM Northwest Communication Cooperation
 ONEOK Oneok gas
 OSHA Occupational Safety and Health Administration
 OTTR TL PWR Otter Tail Power Company
 P L E M Prairielands Energy Marketing
 POLAR COM Polar Communications
 PVT ELEC Private Electric
 QWEST Qwest Communications
 R & T W SUPPLY R & T Water Supply Association
 RAMSEY R SEW Ramsey Rural Sewer Association
 RAMSEY RW Ramsey Rural Water Association
 RAMSEY UTIL Ramsey County Rural Utilities

RED RIV TEL Red River Rural Telephone
 RESVTN TEL Reservation Telephone
 ROBRTS TEL Roberts Company Telephone
 R-RIDER ELEC Roughrider Electric Coop
 RRVW Red River Valley & Western Railroad
 RSR ELEC R.S.R. Electric Cooperative
 S E W U South East Water Users Incorporated
 SCOTT CABLE Scott Cable Television Dickinson
 SHERDN ELEC Sheridan Electric Cooperative
 SHEYN VLY ELEC Sheyenne Valley Electric Cooperative
 SKYTECH Skyland Technologies Incorporated
 SLOPE ELEC Slope Electric Cooperative Incorporated
 SOURIS RIV TELCOM Souris River Telecommunications
 ST WAT COMM State Water Commission
 STATE LN WATER State Line Water Cooperative
 STER ENG Sterling Energy
 STUT RWU Stutsman Rural Water Users
 SW PL PRJ Southwest Pipeline Project
 T M C Turtle Mountain Communications
 TCI TCI of North Dakota
 TESORO GHG PLNS PL Tesoro High Plains Pipeline
 TRI-CNTY WU Tri-County Water Users Incorporated
 TRL CO RWU Traill County Rural Water Users
 UNTD TEL United Telephone
 UPPR SOUR WUA Upper Souris Water Users Association
 US SPRINT U.S. Sprint
 USAF MSL CABLE U.S.A.F. Missile Cable
 USFWS US Fish and Wildlife Service
 USW COMM U.S. West Communications
 VRNDRY ELEC Verendrye Electric Cooperative
 W RIV TEL West River Telephone Incorporated
 WEB W. E. B. Water Development Association
 WILLI RWA Williams Rural Water Association
 WILSTN BAS PL Williston Basin Interstate Pipeline Company
 WLSH RWD Walsh Water Rural Water District
 WOLVRTN TEL Wolverton Telephone
 XLENER Xcel Energy
 YSVR Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation





Line Styles

.....	Limits of Const Transition Line	—— s —— s ——	Floating Silt Curtain	—— ——— ———	Existing Aggregate (Cross Section View)	- - - - -	Existing Centerline
.....	Bale Check	—— ——— T ——	Existing Telephone Line	—— ——— ———	Existing Curb and Gutter (Cross Section View)	- - - - -	Supplemental Contour
.....	Rock Check	—— ——— TV ——	Existing TV Line	—— ——— ———	Existing Riprap	—— - - - - -	Right of Way
.....	Sight Distance Triangle Line	Void — void — void — v	Existing Assumed Ground (Not Surveyed)	—— ——— ———	Existing Underground Vault or Lift Station	—— - - - - -	Existing Right of Way
- - - - -	Small Hidden Object	Void — void — void — v	Tentative Ground Line	—— ——— ———	Tangent Line	—— - - - - -	Existing Right of Way Railroad
- - - - -	Dimension Leader	—— ——— w ——	Existing Water or Steam Line	- - - - -	Hidden Object	- - - - -	Failure Line
- - - - -	Existing Ground	=====	Existing Under Drain	—— ——— ———	Existing Dirt Surface	- - - - -	Existing Conditions
- - - - -	Existing Topsoil (Cross Section View)	=====	Under Drain	—— ——— ———	Existing Conduit	- - - - -	Existing Ground (Details)
—— ——— ———	Large Hidden Object	=====	Wall	—— ——— ———	Topsoil Profile	—— - - - - -	Existing Sixteenth Section Line
—— ——— ———	Edge Drain	=====	Existing Slotted Drain	- - - - -	Existing Conductor	- - - - -	Existing Right of Way Not State Owned
—— D —— D ——	Geotextile Fabric Type D	—— + —— + ——	Existing Cemetary Boundary	- - - - -	Conductor	- - - - -	Phantom Object
—— ——— E ——	Existing Electrical	—— ——— ———	Centerline Pavement Marking	- - - - -	Fiber Optic	- - - - -	Centerline Main
—— ——— FO ——	Existing Fiber Optic Line	=====	Barrier with Centerline Pavement Marking	- - - - -	Existing Loop Detector	-	Existing Guardrail Cable
—— ——— FO ——	Existing TV Fiber Optic	=====	Barrier Pavement Marking	- - - - -	Subgrade, Subcut or Ditch Grade	— • — • — • — •	Existing Guardrail Metal
—— ——— G ——	Existing Gas Pipe	- - - - -	Stripe 4 IN Dotted Extension White	—— ——— ———	Existing Asphalt Surface	—— . ——— . ——— . ——— .	Existing Edge of Water
—— ——— Geo —— Geo ——	Geogrid	- - - - -	Stripe 8 IN Dotted Extension White	—— ——— ———	Existing Asphalt (Cross Section View)	- - - - -	Excavation Limits
—— ——— OH ——	Existing Overhead Utility Line	- - - - -	Stripe 8 IN Lane Drop	—— ——— ———	Existing Reinforcement Rebar	——	Existing Government Lot Line
—— ——— P ——	Existing Power	—— ——— ———	Wetland Mitigation	—— ——— ———	Existing Tie Point Line	Existing Adjacent Block Lines
—— ——— PL ——	Existing Fuel Pipeline	- - - - -	Existing Box Culvert Bridge	—— ——— ———	Existing State or International Line	Existing Adjacent Lot Lines
—— ——— PL ——	Existing Undefined Above Ground Pipe Line	- - - - -	Existing Concrete Surface	—— ——— ———	Existing Quarter Section Line	Existing Adjacent Property Line
—— ——— R —— R ——	Geotextile Fabric Type R	- - - - -	Existing Drainage Structure	—— ——— ———	Existing County	Existing Adjacent Subdivision Lines
—— ——— R —— R ——	Geotextile Fabric Type R1	- - - - -	Easement	—— ——— ———	Existing Section Line	
—— REMOVE —— REMOVE ——	Remove Line	- - - - -	Existing Concrete	—— ——— ———	Existing Township	
—— RR —— RR ——	Geotextile Fabric Type RR	- - - - -	Existing Easement	—— ——— ———	Existing Railroad Centerline	
—— ——— S —— S ——	Geotextile Fabric Type S	—— ——— ———	Existing Gravel Surface	—— ——— ———	Centerline	

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Line Styles

	Subgrade Reinforcement		Existing Railroad Switch		Sheet Piling
	Existing Down Guy Wire Down Guy		Overhead Sign Structure Cantilever		W-Beam w Posts
	Existing Fence		24 Inch Pipe		Existing W-Beam Guardrail with Posts
	Existing Railroad		Reinforced Concrete Pipe		Exst Wet Area-Vegetation Break
	Existing Sanitary Sewer		Signal Head with Mast Arm		Existing Wetland Delineated
	Existing Sanitary Force Main		Existing Signal Head with Mast Arm		
	Existing Storm Drain		Tie Bar at Random Spacing		
	Existing Storm Drain Force Main		3-Cable w Posts		
	Fence		Existing 3-Cable w Posts		
	Silt Fence		Site Boundary		
	Existing Field Line		Fiber Rolls		
	Exst Flow		Doweled Joint		
	Flow		Tie Bar 30 Inch 4 Foot Center to Center		
	Existing Culvert		Tie Bar 18 Inch 3 Foot Center to Center		
	Existing Curb		Existing Berm, Dike, Pit, or Earth Dam		
	Existing Valley Gutter		Existing Ditch Block		
	Existing Driveway Gutter		Depression Contours		
	Existing Curb and Gutter		Existing City Corporate Limits or Reservation Boundary		
	Existing Mountable Curb and Gutter		Gravel Pit - Borrow Area		
	Existing Double Micro Loop Detector		Existing Tree Boundary		
	Micro Loop Detector Double		Tree Row		
	Existing Overhead Sign Structure		Existing Brush or Shrub Boundary		
	Existing Micro Loop Detector		Existing Retaining Wall		
	Micro Loop Detector		Existing Planter or Wall		
	Existing Overhead Sign Structure Cantilever		Retaining Wall (Plan View)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	North Arrow (Half Scale)		Attenuation Device		Existing Railroad Battery Box		Existing Delineator Type E
	Truck Mounted Attenuator		Diamond Grade Delineator Type A		Existing Bush or Shrub		Existing EFB Misc
	Type I Barricade		Diamond Grade Delineator Type B		Existing Gas Cap or Stub		Existing Flashing Beacon
	Type II Barricade		Diamond Grade Delineator Type C		Existing Sanitary Cap or Stub		Existing Pipe Mounted Flasher
	Type III Barricade		Diamond Grade Delineator Type D		Existing Storm Drain Cap or Stub		Existing Pad Mounted Feed Point
	Catch Basin		Diamond Grade Delineator Type E		Existing Water Cap or Stub		Existing Pipe Mounted Feed Point with Pad
	Cairn or Stone Circle		Flexible Delineator		Existing Sanitary Cleanout		Existing Pole Mounted Feed Point
	Video Detection Camera		Flexible Delineator Type A		Existing Concrete Foundation		Existing Railroad Frog
	Storm Drain Cap or Stub		Flexible Delineator Type B		Existing Traffic Signal Controller		Existing Snow Gate 18
	Corrugated Metal End Section 18 Inch		Flexible Delineator Type C		Existing Pad Mounted Signal Controller		Existing Snow Gate 28
	Corrugated Metal End Section 24 Inch		Flexible Delineator Type D		Existing Sixteenth Section Corner		Existing Snow Gate 40
	Corrugated Metal End Section 30 Inch		Flexible Delineator Type E		Existing Quarter Section Corner		Existing Headwall
	Corrugated Metal End Section 36 Inch		Delineator Type A		Existing Section Corner		Existing Pedestrian Head with Number
	Corrugated Metal End Section 42 Inch		Delineator Type A Reset		Existing Railroad Crossbuck		Existing Signal Head
	Corrugated Metal End Section 48 Inch		Delineator Type B		Existing Satellite Dish		Existing Sprinkler Head
	Concrete Foundation		Delineator Type B Reset		Existing Fuel Dispensers		Existing Fire Hydrant
	Ground Connection Conductor		Delineator Type C		Existing Flexible Delineator Type A		Existing Catch Basin Drop Inlet
	Neutral Connection Conductor		Delineator Type D		Existing Flexible Delineator Type B		Existing Curb Inlet
	Phase 1 Connection Conductor		Delineator Type E		Existing Flexible Delineator Type C		Existing Manhole Inlet
	Phase 2 Connection Conductor		Delineator Drums		Existing Flexible Delineator Type D		Existing Junction Box
	Traffic Cone		Spot Elevation		Existing Flexible Delineator Type E		
	Signal Controller		Existing Access Control Arrow		Existing Delineator Type A		
	Pad Mounted Signal Controller		Existing Artifact		Existing Delineator Type B		
	Alignment Data Point		Existing Flashing Beacon		Existing Delineator Type C		
	Emergency Vehicle Detector		Existing Benchmark		Existing Delineator Type D		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	Existing Light Standard		Existing Manhole with Valve Water		Existing Telephone Pole		Existing Undefined Manhole
	Existing High Mast Light Standard 10 Luminaire		Existing Water Manhole		Existing Wood Pole		Existing Undefined Pull Box
	Existing High Mast Light Standard 3 Luminaire		Existing Mile Post Type A		Existing Post		Existing Undefined Pedestal
	Existing High Mast Light Standard 4 Luminaire		Existing Mile Post Type B		Existing Pedestrian Push Button Post		Existing Undefined Valve
	Existing High Mast Light Standard 5 Luminaire		Existing Mile Post Type C		Existing Control Point CP		Existing Undefined Pipe Vent
	Existing High Mast Light Standard 6 Luminaire		Existing Reference Marker		Existing Control Point GPS-RTK		Existing Gas Valve
	Existing High Mast Light Standard 7 Luminaire		Existing RW Marker		Existing Control Point TRI		Existing Water Valve
	Existing High Mast Light Standard 8 Luminaire		Existing Utility Marker		Existing Reference Marker Point NGS		Existing Fuel Pipe Vent
	Existing High Mast Light Standard 9 Luminaire		Iron Monument Found		Existing Pull Box		Existing Gas Pipe Vent
	Existing Overhead Sign Structure Load Center		Iron Pin R/W Monument		Existing Intelligent Transportation Pull Box		Existing Sanitary Pipe Vent
	Existing Luminaire		Existing Object Marker Type I		Existing Water Pump		Existing Storm Drain Pipe Vent
	Existing Light Standard Luminaire		Existing Object Marker Type II		Existing Slotted Reinforced Concrete Pipe		Existing Water Pipe Vent
	Existing Federal Mailbox		Existing Object Marker Type III		Existing RR Profile Spot		Existing Weather Station
	Existing Private Mailbox		Existing Electrical Pedestal		Existing Fuel Leak Sensors		Existing Ground Water Well Bore Hole
	Existing Meander Section Corner		Existing Telephone Pedestal		Existing Highway Sign		Existing Windmill or Tower
	Existing Meter		Existing Fiber Optic Telephone Pedestal		Existing Miscellaneous Spot		Existing Witness Corner
	Existing Electrical Manhole		Existing TV Pedestal		Existing Lighting Standard Pole		Flashing Beacon
	Existing Gas Manhole		Existing Fiber Optic TV Pedestal		Existing Traffic Signal Standard		Flagger
	Existing Sanitary Manhole		Existing Fuel Filler Pipes		Existing Transformer		Pipe Mounted Flasher
	Existing Sanitary Force Main Manhole		Existing Traverse PI Aerial Panel		Existing Large Evergreen Tree		Sanitary Force Main with Valve
	Existing Sanitary Manhole with Valve		Existing Pole		Existing Small Evergreen Tree		
	Existing Storm Drain Manhole		Existing Power Pole		Existing Large Tree		
	Existing Force Main Storm Drain Manhole		Existing Power Pole with Transformer		Existing Small Tree		
	Existing Force Main Storm Drain Manhole with Valve				Existing Tree Trunk		
	Existing Telephone Manhole				Existing Pad Mounted Traffic Signal Control Box		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols


D-101-32

 Pad Mounted Feed Point  Pipe Mounted Feed Point with Pad  Pole Mounted Feed Point  Headwall  Double Headwall with Vegetation Barrier  Single Headwall with Vegetation Barrier  Pole Mounted Head  Sprinkler Head  Fire Hydrant  Inlet Type 1  Inlet Type 2  Double Inlet Type 2  Inlet Gate Type 2  Junction Box  High Mast Light Standard 10 Luminaire  High Mast Light Standard 3 Luminaire  High Mast Light Standard 4 Luminaire  High Mast Light Standard 5 Luminaire  High Mast Light Standard 6 Luminaire  High Mast Light Standard 7 Luminaire  High Mast Light Standard 8 Luminaire  High Mast Light Standard 9 Luminaire  Relocate Light Standard  Overhead Sign Structure Load Center  Light Standard 100 Watt High Pressure Sodium Vapor Luminaire	 Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire  Light Standard 150 Watt High Pressure Sodium Vapor Luminaire  Light Standard 175 Watt High Pressure Sodium Vapor Luminaire  Light Standard 200 Watt High Pressure Sodium Vapor Luminaire  Light Standard 250 Watt High Pressure Sodium Vapor Luminaire  Light Standard 310 Watt High Pressure Sodium Vapor Luminaire  Light Standard 35 Watt High Pressure Sodium Vapor Luminaire  Light Standard 400 Watt High Pressure Sodium Vapor Luminaire  Light Standard 50 Watt High Pressure Sodium Vapor Luminaire  Light Standard 70 Watt High Pressure Sodium Vapor Luminaire  Light Standard 700 Watt High Pressure Sodium Vapor Luminaire  Manhole  Manhole 48 Inch  Sanitary Force Main Manhole  Sanitary Sewer Manhole  Storm Drain Manhole  Storm Drain Manhole with Inlet  Reset Mile Post  Mile Post Type A  Mile Post Type B  Mile Post Type C  Right of Way Marker  Tubular Marker  Alignment Monument  Iron Pin Reference Monument	 Object Marker Type I  Object Marker Type II  Object Marker Type III  Caution Mode Arrow Panel  Back to Back Vertical Panel Sign  Double Direction Arrow Panel  Left Directional Arrow Panel  Right Directional Arrow Panel  Sequencing Arrow Panel  Truck Mounted Arrow Panel  Power Pole  Wood Pole  Pedestrian Push Button Post  Property Corner  Pull Box  Intelligent Transportation Pull Box  Sanitary Pump  Storm Drain Pump  Reinforced Pavement  Reinforced Concrete End Section 15 Inch  Reinforced Concrete End Section 18 Inch  Reinforced Concrete End Section 24 Inch  Reinforced Concrete End Section 30 Inch  Reinforced Concrete End Section 36 Inch  Reinforced Concrete End Section 42 Inch	 Reinforced Concrete End Section 48 Inch  Reinforced Concrete End Section 54 Inch  Reset Right of Way Marker  Reset USGS Marker  Right of Way Markers  Riser 30 Inch  Continuous Split Barrel Sample  Flight Auger Sample  Split Barrel Sample  Thinwall Tube Sample  Highway Sign  SNOW GATE 18 FT  SNOW GATE 28 FT  SNOW GATE 40 FT  Standard Penetration Test  Transformer  Inclinometer Tube  Underdrain Cleanout  Excavation Unit  Water Valve
--	---	--	---




NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel,
 Registration Number
PE-2930,
 on 07/01/14 and the original document is stored at the
 North Dakota Department
 of Transportation




EROSION AND SILTATION CONTROL
EROSION CONTROL BLANKET INSTALLATION

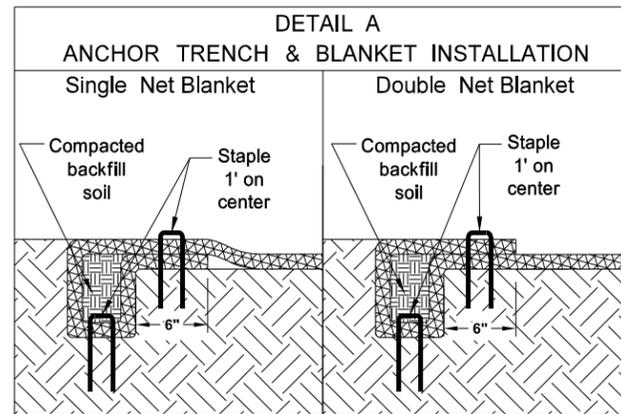


NOTE:
If a Single Net Blanket is used the side with the netting should be on the top once the blanket is installed.

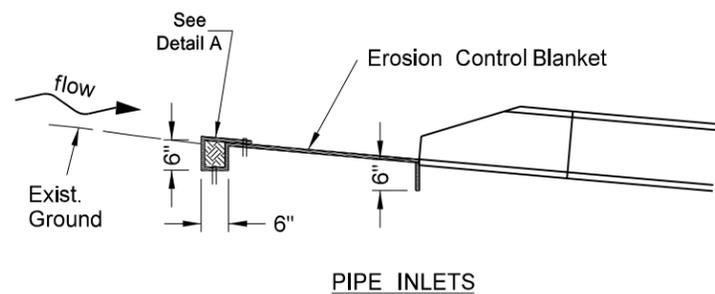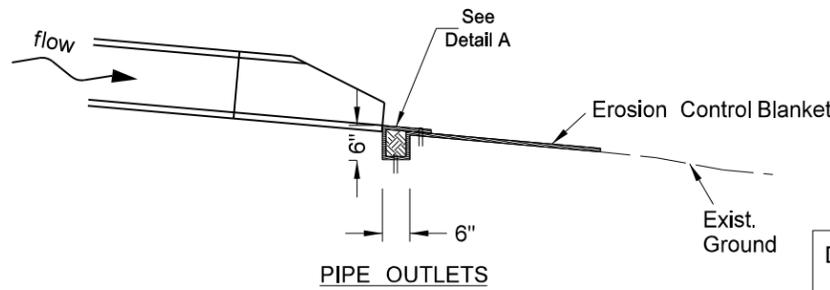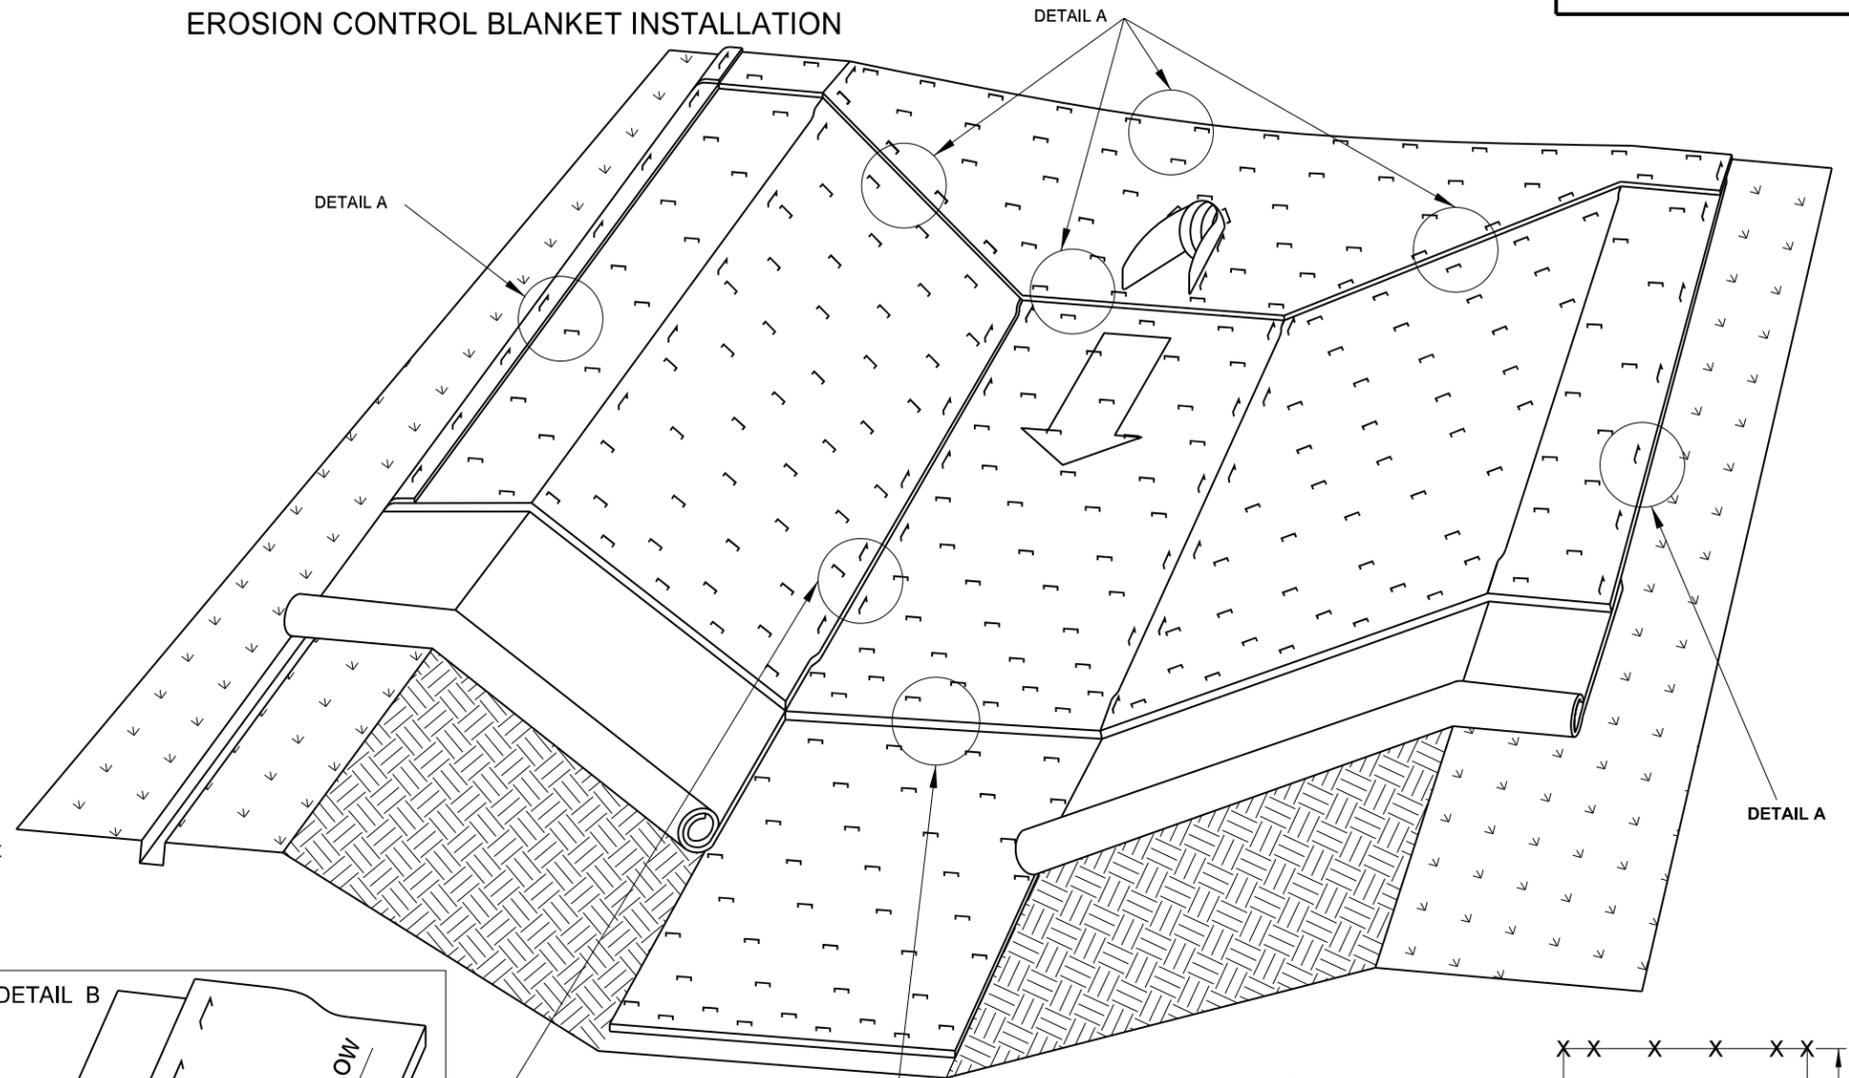

PIPE INLETS
INSTALLATION AT PIPE ENDS

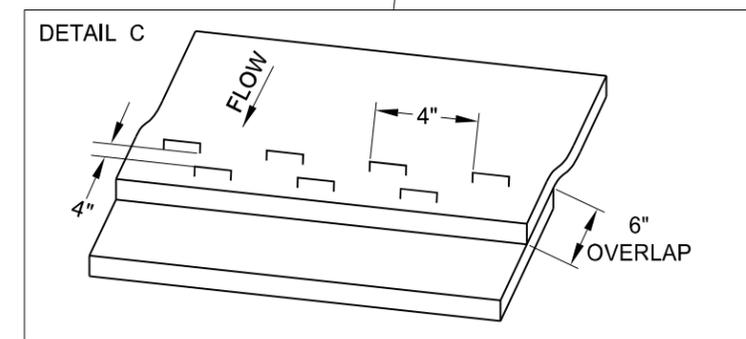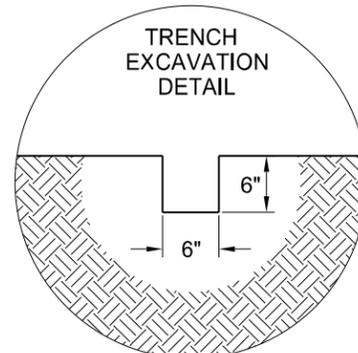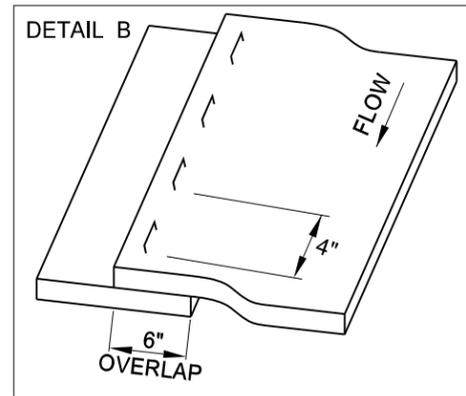


3.8 staples per square yard using 8-inch 11 gauge wire "u" staples.

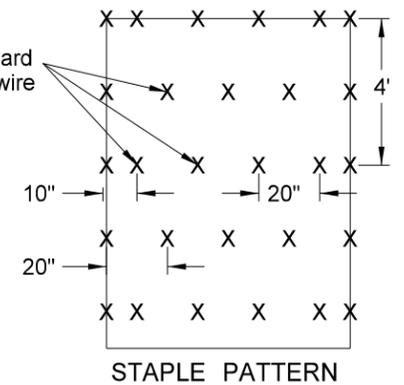


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Changed standard drawing number from D-708-5 to D-255-2.
07-27-15	Changed installation details such as trench depth and overlap dimensions.

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE-2930,
on 07/27/15 and the original document is stored at the North Dakota Department of Transportation

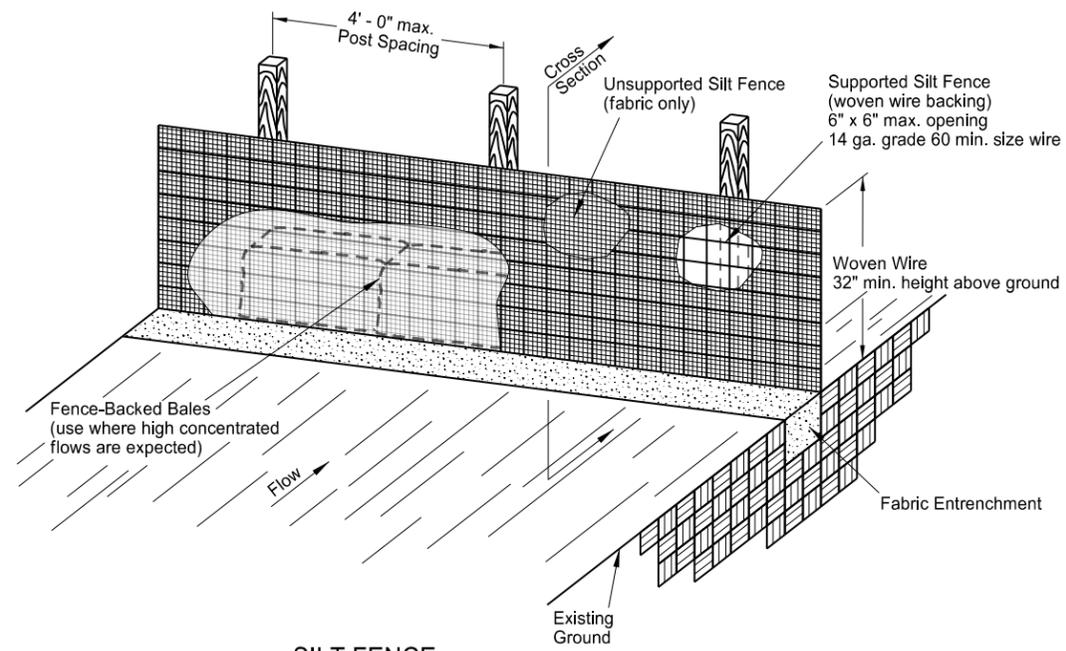

SILT FENCE
SUPPORTED AND UNSUPPORTED

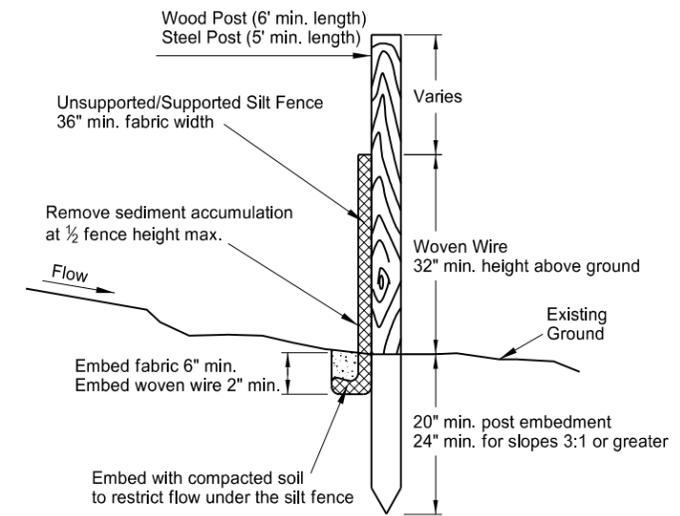


SILT FENCE
CROSS SECTION

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Standard drawing resulted from splitting standard D-708-2.


This document was originally issued and sealed by
 Roger Weigel
 Registration Number
 PE-2930,
 on 06/26/14 and the original document is stored at the North Dakota Department of Transportation

EROSION CONTROL
FIBER ROLL PLACEMENT DETAILS

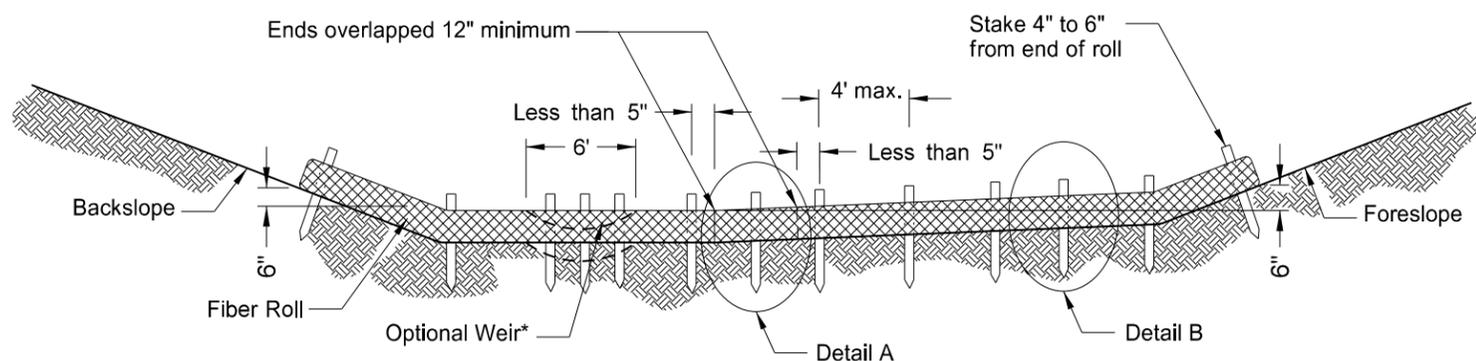


*Optional Weir. Use in flat areas, such as the Red River Valley, where there is potential for water to back up on adjacent property. Lower fiber roll enough to prevent water from backing up on adjacent property. Do not use 20-inch fiber rolls in flat areas where there is potential for water to back up on adjacent property.


12 OR 20 INCH FIBER ROLL - DITCH BOTTOM

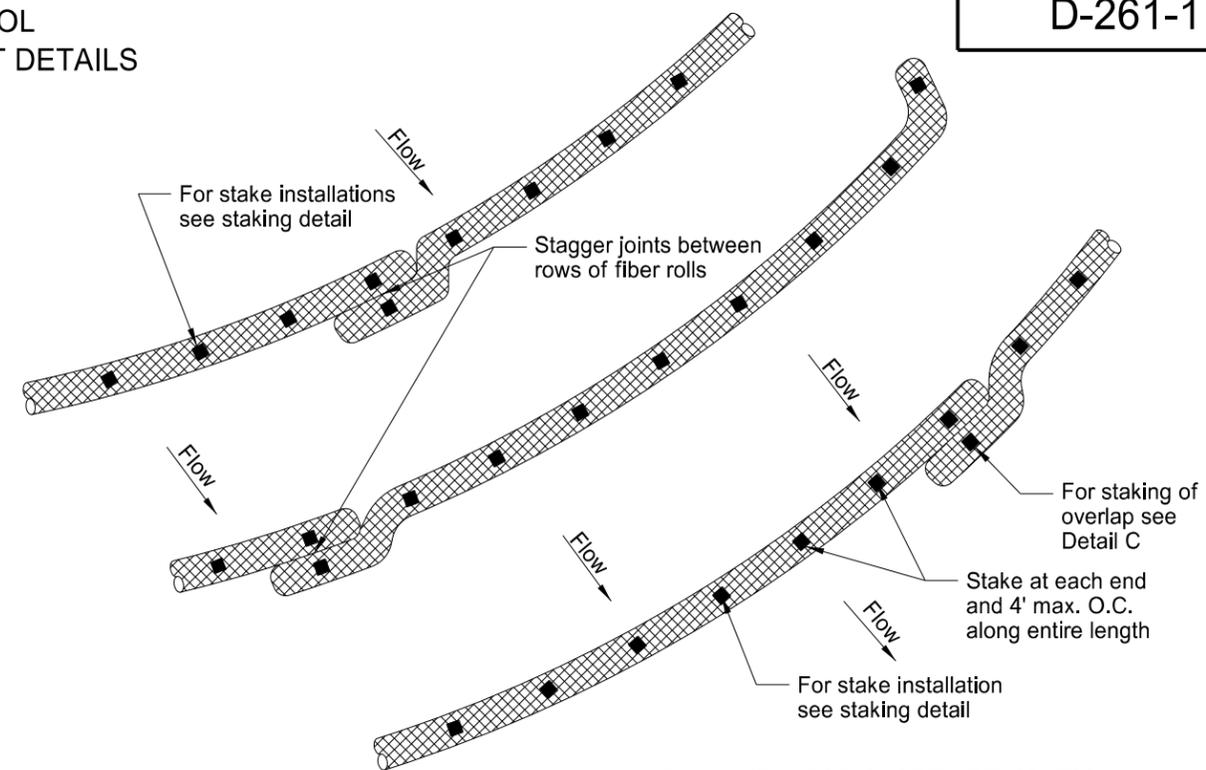


PLAN VIEW FOR SLOPE APPLICATION

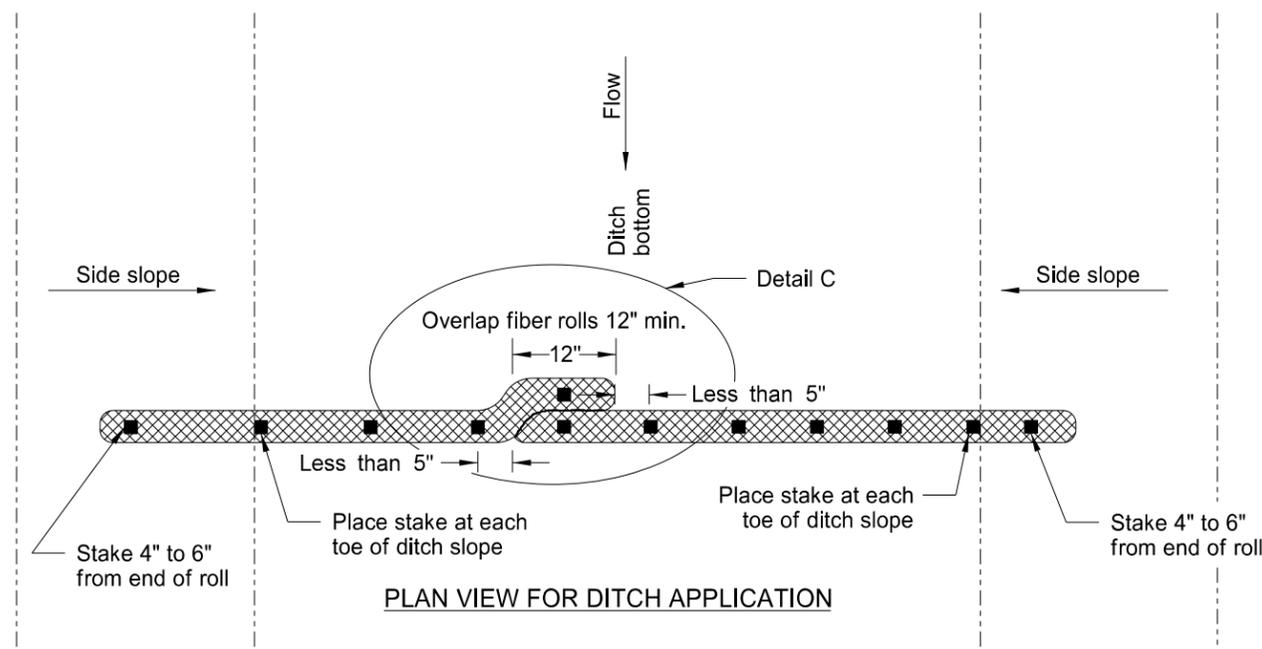

PLAN VIEW FOR DITCH APPLICATION

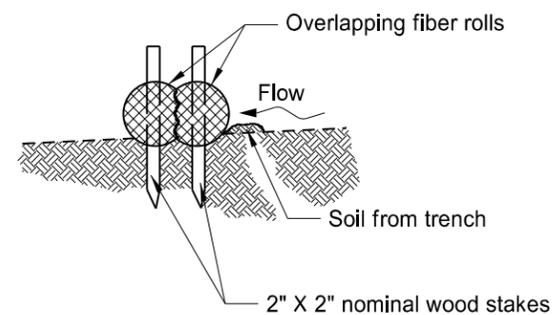

Detail A
Fiber Roll Overlapping Staking Detail

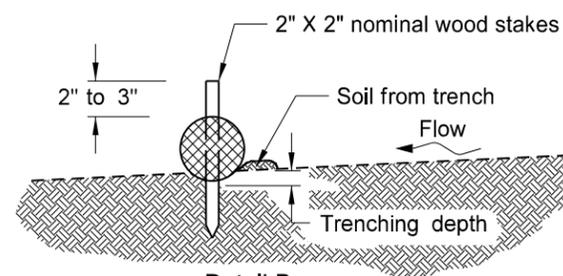

Detail B
Fiber Roll Staking Detail

FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	MINIMUM TRENCH DEPTH	MAXIMUM TRENCH DEPTH
6"	2" x 2"	18"	2"	2"
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"



NOTE: Runoff must not be allowed to run under or around roll.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-18-10	
REVISIONS	
DATE	CHANGE
06-10-13	Added plan view for ditch and slope application, Added table with values for stake and trench dimensions.
10-04-13	Revised fiber roll overlap detail.
06-26-14	Changed standard drawing number from D-708-7 to D-261-1

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 06/26/14 and the original document is stored at the North Dakota Department of Transportation




LONGITUDINAL JOINT DETAILS

D-550-2

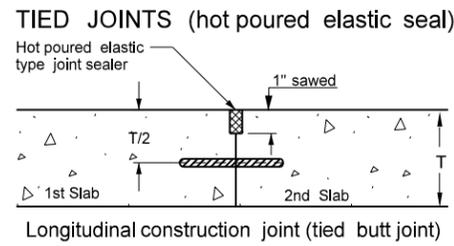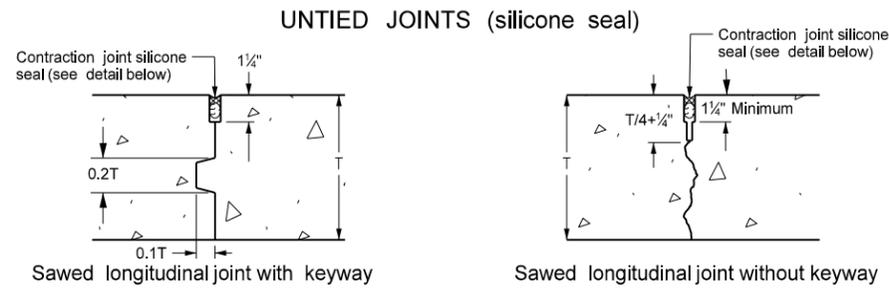


Notes:

1. The hot poured elastic type joint sealer shall be in accordance with Section 826.02A.2 of the Standard Specifications.
2. The longitudinal joint and seal shall be included in the price bid for the P.C.C. pavement.
3. Tie bars shall not be placed within 18 inches of a transverse skewed joint.
4. Where tie bars are installed bent and later straightened, Grade 40 steel shall be used.
5. Tie bar spacing can be increased up to 10% to facilitate construction.
6. Tie Bars shall be at a 48 inch maximum spacing.
7. A "Warp" joint is a sawed joint or a construction joint with a keyway.
8. A "Butt joint" is a construction joint with no keyway.

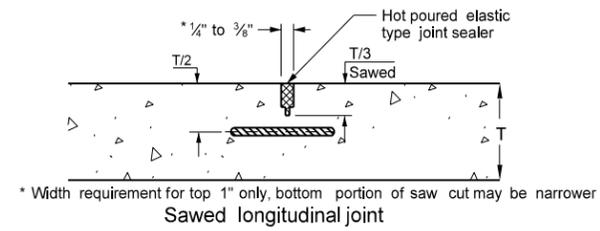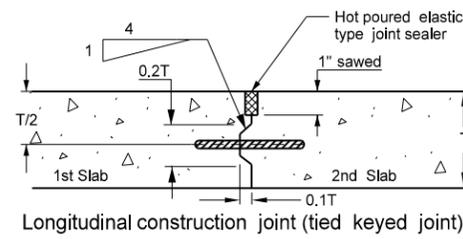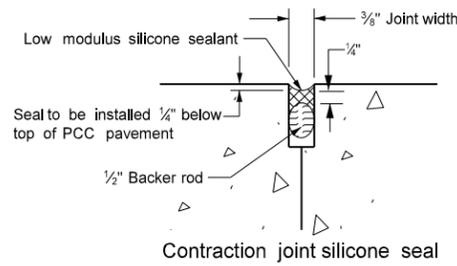


BAR SIZE
 GRADE STEEL
 BAR LENGTH
 DIST TO FREE EDGE (FT)
 JOINT TYPE
 PVMT THICKNESS

		TIEBAR SPACINGS (In)																																																						
		# 3 BAR						# 4 BAR						# 5 BAR						# 6 BAR																																				
		GRADE 40		GRADE 60				GRADE 40		GRADE 60				GRADE 40		GRADE 60				GRADE 40		GRADE 60																																		
		24"		30"				24"		36"				30"		42"				36"		48"																																		
		4	6	8	10	4	6	8	10	12	14	8	10	12	14	16	8	10	12	14	16	22	24	10	12	14	16	22	24	10	12	14	16	22	24	10	12	14	16	19	22	24	10	12	14	16	19	22	24							
6"	WARP	48	39	29	24	48	48	44	35	29	25	48	42	35	30	26	48	48	44	45	39	28	26	48	48	47	41	30	27	48	48	48	48	45	41	48	48	48	48	48	43	39	48	48	48	48	48	48	48							
	BUTT	42	27			48	42	31	25			37	29	24			48	44	37	32	27			46	39	33	29			48	48	48	43	32	29	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48	48
8"	WARP	48	37	28		48	48	42	33	28	24	48	39	33	28	24	48	48	48	42	37	27	24	48	48	44	38	28	25	48	48	48	48	42	38	48	48	48	48	47	40	37	48	48	48	48	48	48	48							
	BUTT	39	26			44	39	29				35	27				48	42	35	29	26			44	36	31	27			48	48	47	41	30	27	48	48	45	39	33	28	26	48	48	48	48	48	48	48	48	48	48	48	48	48	48
8 1/2"	WARP	48	35	26		48	48	39	31	26		47	37	31	26		48	48	47	40	35	25		48	48	42	36	26	24	48	48	48	48	40	36	48	48	48	48	44	38	35	48	48	48	48	48	48	48							
	BUTT	37	24			48	37	27				43	26				48	40	33	28	25			41	34	29	25			48	48	44	39	28	25	48	48	42	37	31	26	24	48	48	48	48	48	48	48	48	48	48	48	48	48	48
9"	WARP	48	33	25		48	48	37	30	25		44	35	29	25		48	48	48	38	33	24		48	46	39	34	25		48	48	48	48	42	36	48	48	48	48	42	36	33	48	48	48	48	48	48	48							
	BUTT	35				48	35	26				31	25				47	37	31	27				39	32	27	25			48	48	42	37	27	24	48	47	40	35	29	25	48	48	48	48	48	48	48	48	48	48	48	48	48	48	
9 1/2"	WARP	47	31			48	47	35	28			42	34	28	24		48	48	42	36	31			48	44	37	33	24		48	48	48	48	40	36	48	48	48	48	44	38	35	48	48	48	48	48	48	48							
	BUTT	33				48	33	25				29	24				45	36	29	25				37	31	26	24			48	46	40	35	25		48	45	38	33	28	24	48	48	48	48	48	48	48	48	48	48	48	48	48	48	
10"	WARP	45	30			48	45	34	27			40	32	26			48	48	40	34	30			48	42	36	31			48	48	48	47	34	31	48	48	48	45	38	33	30	48	48	48	48	48	48	48							
	BUTT	32				48	32	24				28					42	34	28	24				35	29	25				48	44	38	33	24		48	42	36	32	27		48	48	48	48	48	48	48	48	48	48	48	48	48	48	
10 1/2"	WARP	43	28			48	43	32	26			38	31	25			48	46	38	33	28			48	40	34	30			48	48	48	45	32	30	48	48	48	43	36	31	28	48	48	48	48	48	48	48							
	BUTT	30				46	30					27					40	32	27					34	28	24				48	42	36	32			48	40	35	30	25		48	48	48	48	48	48	48	48	48	48	48	48	48	48	
11"	WARP	41	27			48	41	31	24			36	29	24			48	44	36	31	27			46	38	32	28			48	48	48	43	31	28	48	48	47	41	34	30	27	48	48	48	48	48	48	48							
	BUTT	29				44	29					25					39	31	25					32	27					48	40	35	30			46	39	33	29	24		48	48	48	48	48	48	48	48	48	48	48	48	48	48	
11 1/2"	WARP	39	26			48	39	29				35	28				48	42	35	30	26			44	36	31	28			48	48	47	41	30	27	48	48	45	40	33	28	26	48	48	48	48	48	48	48							
	BUTT	27				42	27					25					37	30	25					31	25					46	39	33	29			45	37	32	28			48	48	48	48	48	48	48	48	48	48	48	48	48	48	
12"	WARP	38	25			48	38	28				33	27				48	40	33	29	25			42	35	30	26			48	48	45	39	28	26	48	48	43	38	32	27	25	48	48	48	48	48	48	48							
	BUTT	27				40	27					27					35	28						29	25					44	37	32	27			42	35	30	27			48	48	48	48	48	48	48	48	48	48	48	48	48	48	
12 1/2"	WARP	36	24			48	36	27				32	26				48	39	32	27	24			40	33	29	25			48	48	43	38	27	25	48	48	41	36	30	26	24	48	48	48	48	48	48	48							
	BUTT	25				38	25					26					34	27						28						42	35	30	27			41	34	29	25			48	48	48	48	48	48	48	48	48	48	48	48	48	48	
13"	WARP	35				48	35	26				31	25				47	37	31	26				39	32	28	24			48	48	42	36	26	24	48	47	40	35	29	25	48	48	48	48	48	48	48								
	BUTT	25				37	25					25					33	26						27						41	34	29	25			39	33	28	25			48	48	48	48	48	48	48	48	48	48	48	48	48	48	
13 1/2"	WARP	34				48	34	25				30	24				45	36	30	25				37	31	27				48	47	40	35	25		45	38	34	28	24		48	48	48	48	48	48	48								
	BUTT	24				35	24					24					32	25						26						39	33	28	25			38	32	27	24			48	47	40	35	30	26	48	48	48	48	48	48	48		
14"	WARP	32				48	32	24				29					43	35	29	25				36	30	26				48	45	39	34	24		48	43	37	32	27		48	48	48	48	48	48	48								
	BUTT	31				34						28					30	25						25						38	32	27	24			36	30	26				48	46	39	34	29	25	48	48	48	48	48	48	48		
14 1/2"	WARP	31				47	31					28					42	33	28	24				35	29	25				48	44	37	33	24		48	42	36	31	26		48	48	48	48	48	48	48								
	BUTT	33				33						28					29							25						37	31	26				35	29	25				48	44	38	33	28	24	48	48	48	48	48	48	48		

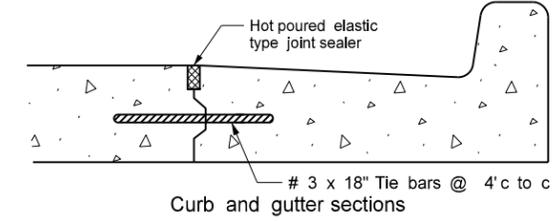


JOINT SEALER DETAILS

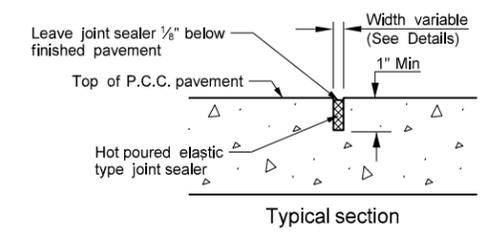


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-15-2010	
REVISIONS	
DATE	CHANGE
10/23/2012	Expanded Tie Bar Table

This document was originally issued and sealed by
Roger Weigel,
 Registration Number
PE-2930,
 on 10/23/2012 and the original document is stored at the
 North Dakota Department
 of Transportation

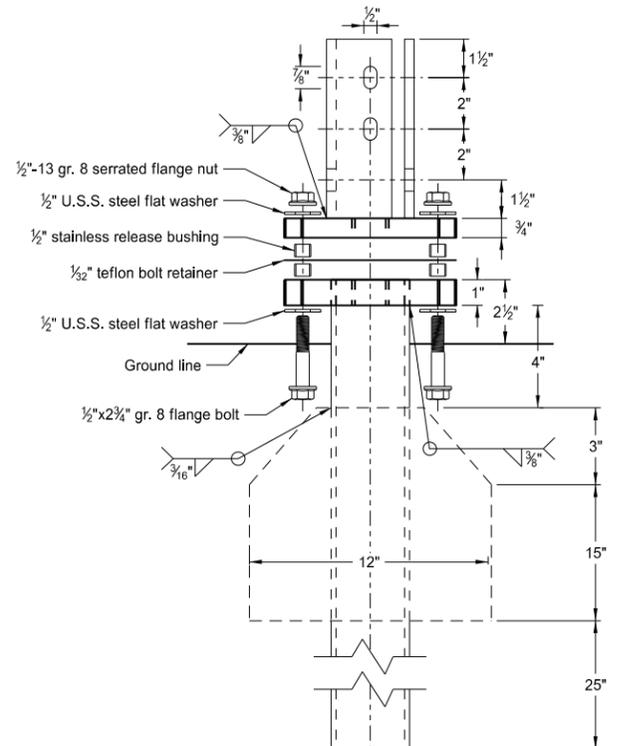


Multi-Directional Slip Base Assembly

Perforated Tube

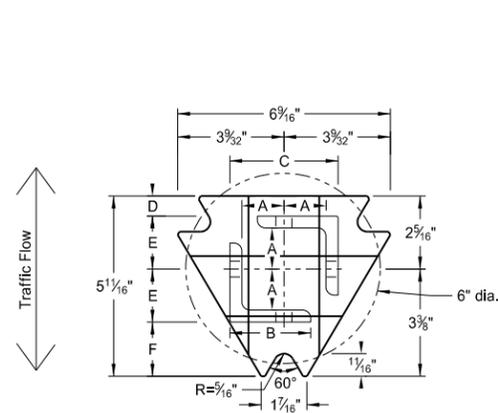

Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2 1/2"x2 1/2"x3/8" ASTM A36 structural angle

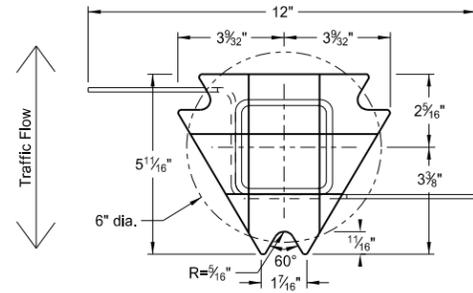

Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50

Notes:


1. Slip base bolts shall be torqued as specified by the manufacturer.
2. Anchor shall have a yield strength of 43.9 KSI and tensile strength of 59.3 KSI.
3. The 4" vertical clearance is required for the anchor or breakaway base. The 4"x60" measurement shall be made above and below post location and also back and ahead of the post.
4. When used in concrete sidewalk, anchor shall be same except without the wings.
5. Four post signs shall have over 7' between the first and the fourth posts.

Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	


Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 9/64"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 1/8"
2 1/2"x10 ga.	1 9/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"


- (A) The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak.
 (B) The 2 3/16"x10 ga. may be inserted into 2 1/2"x10 ga. for additional wind load.

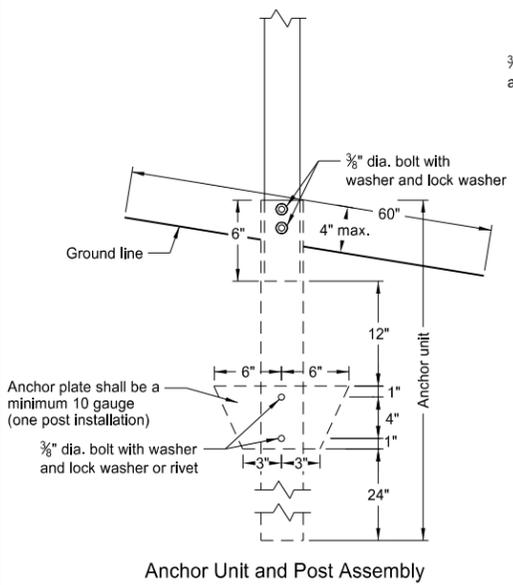

Anchor Unit and Post Assembly

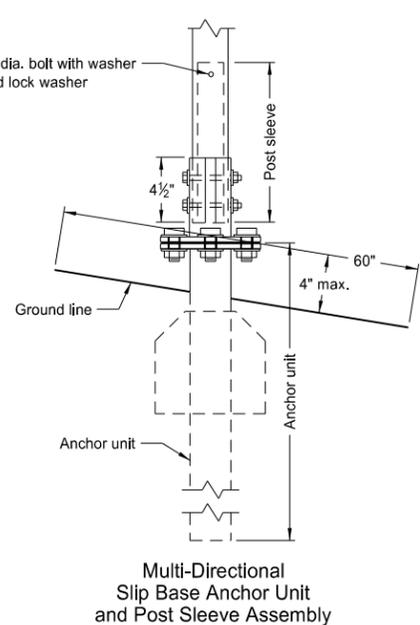

Multi-Directional Slip Base Anchor Unit and Post Sleeve Assembly


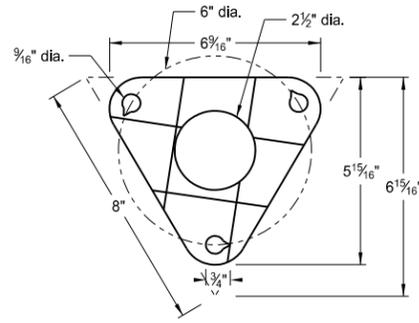


Bolt Retainer for Base Connection
Bolt Retainer - 1/2" Reprocessed Teflon

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

U-Channel Post

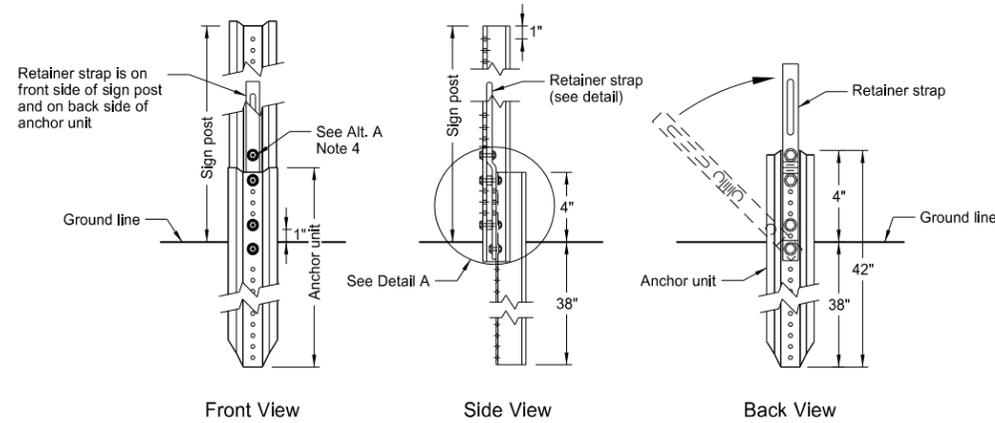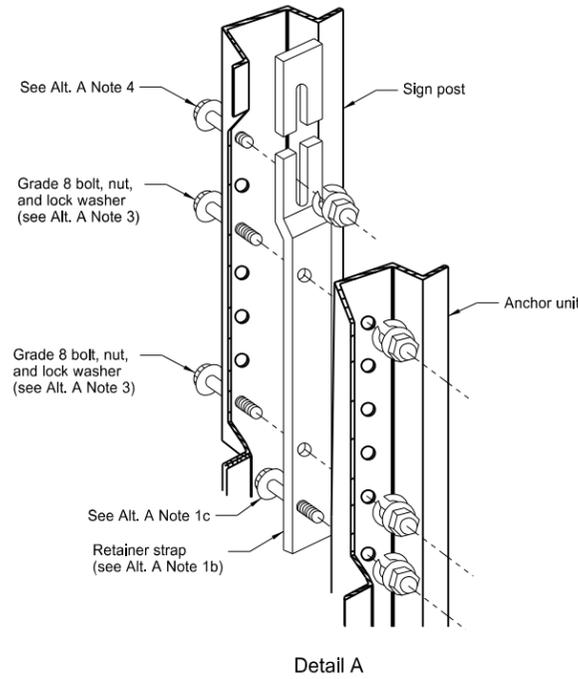


Breakaway U-Channel Detail Alternate A

A maximum of 2 posts shall be installed within 7'.

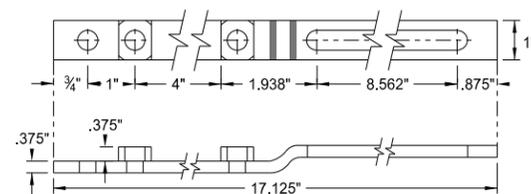


Retainer Strap Detail

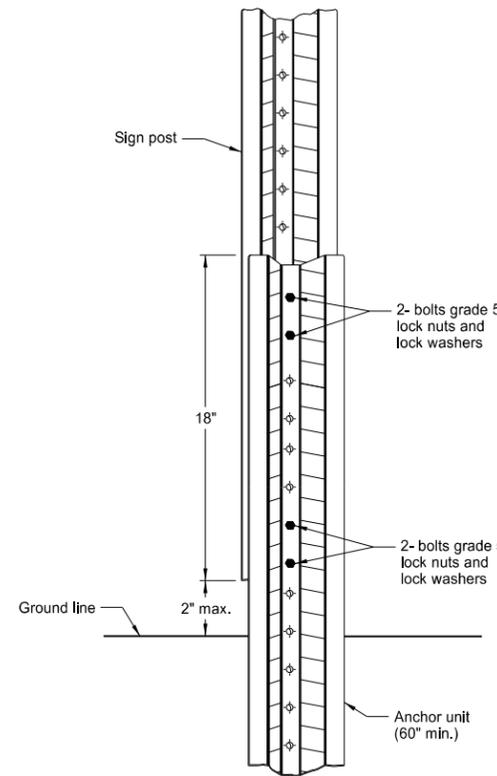

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

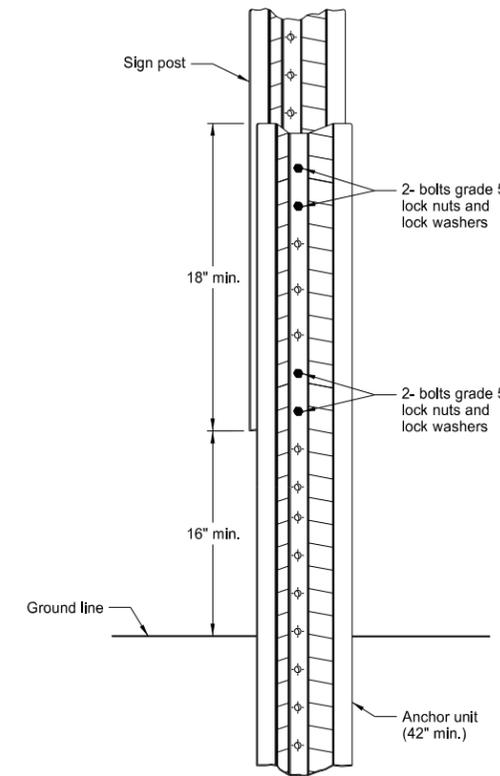

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

Alternate A Steps of Installation:












1. a) Drive anchor unit to within 12" of ground level.
b) Proper assembly established by lining up the bottom hole of retainer strap with the 6th hole from the top of the anchor unit.
c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. The base post, strap and sign post shall be properly nested. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
 TERMINAL AND GUIDE SIGNS

D-704-9

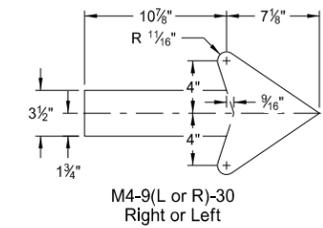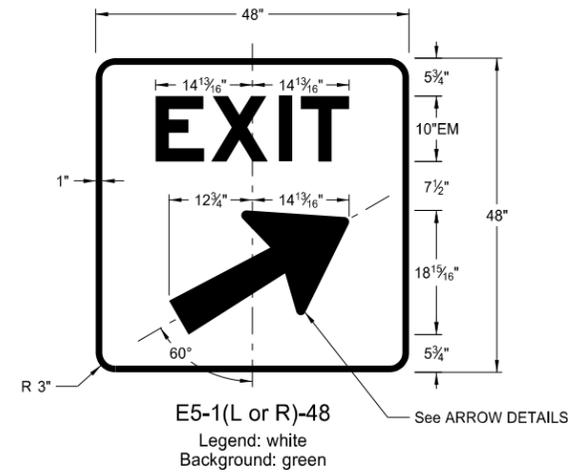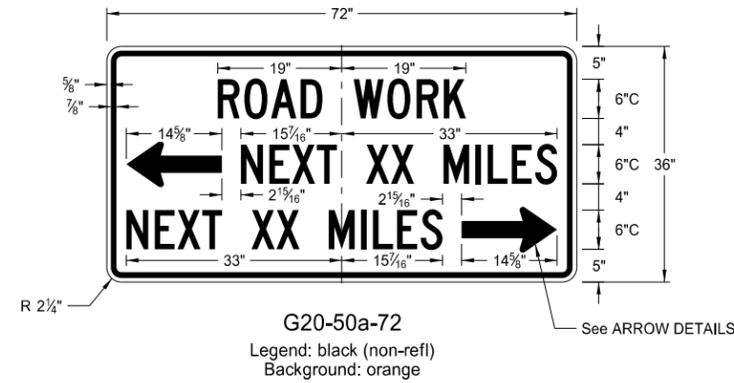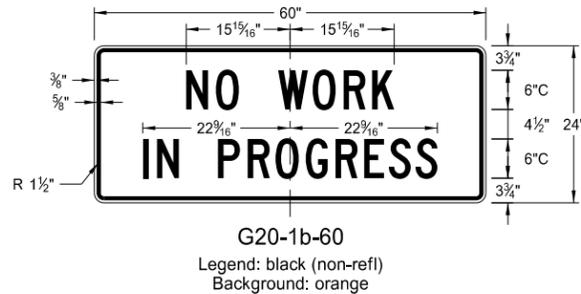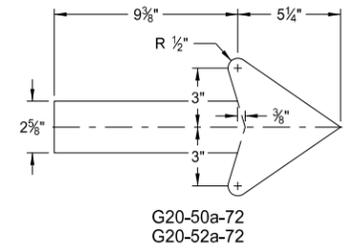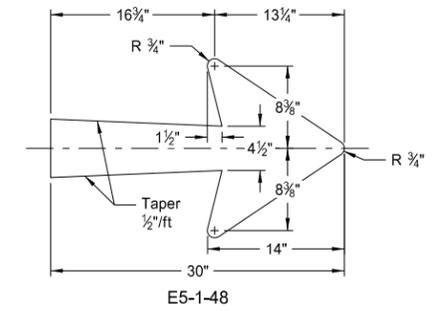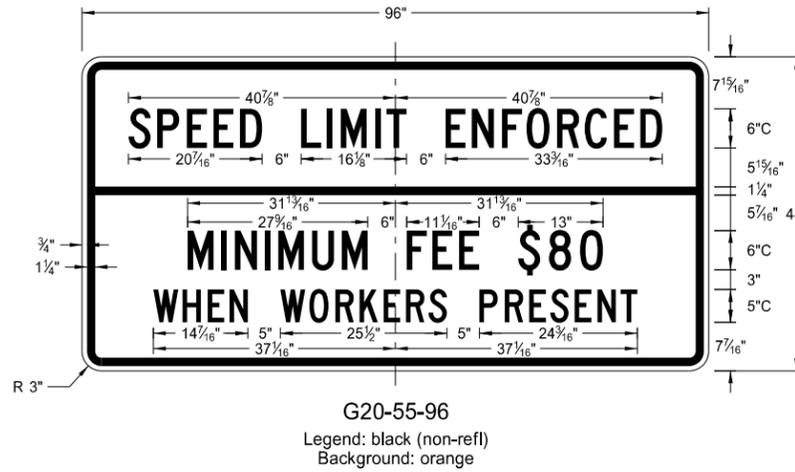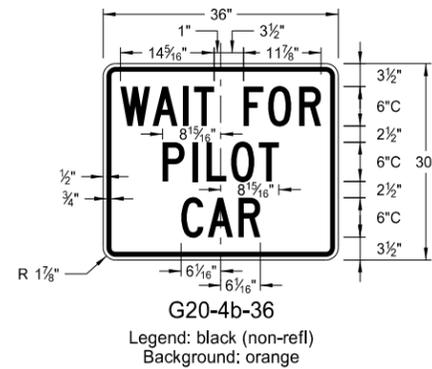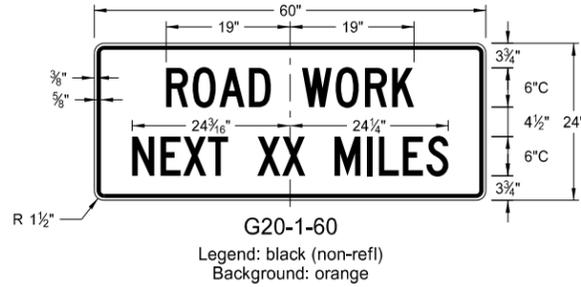

ARROW DETAILS

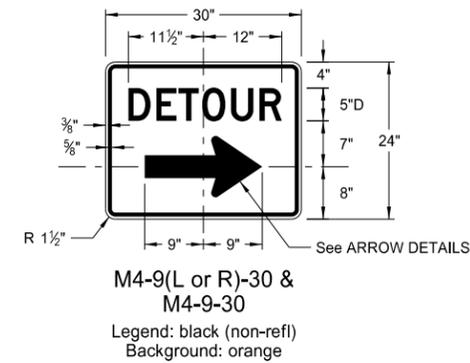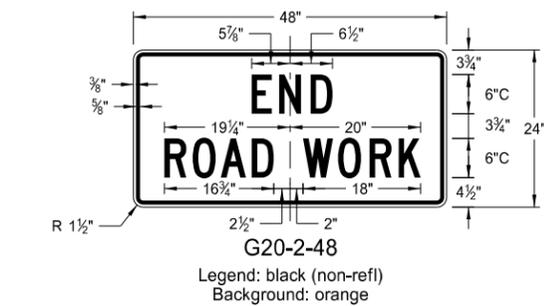

NOTES:


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS

D-704-10

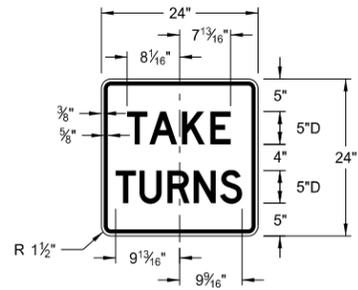


R1-50-24

Legend: black (non-refl)
Background: white

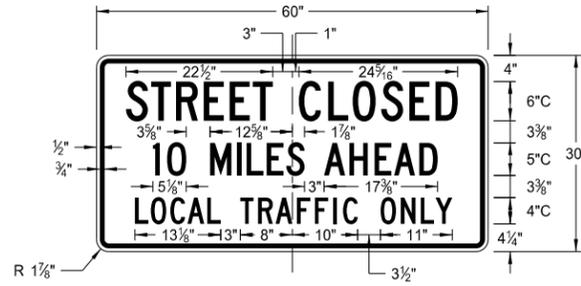


R11-3c-60

Legend: black (non-refl)
Background: white

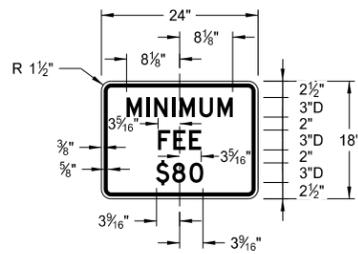

R2-1a-24

Legend: black (non-refl)
Background: white

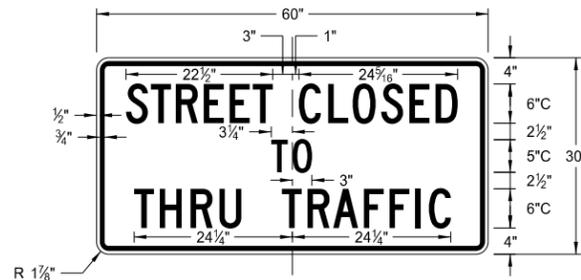

R11-4a-60

Legend: black (non-refl)
Background: white



R11-2a-48

Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

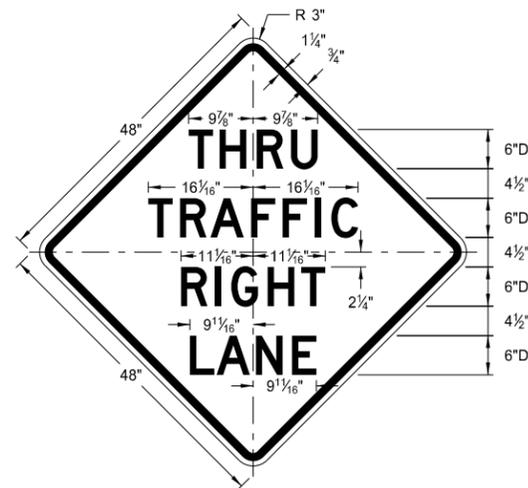


W5-8-48
Legend: black (non-refl)
Background: orange

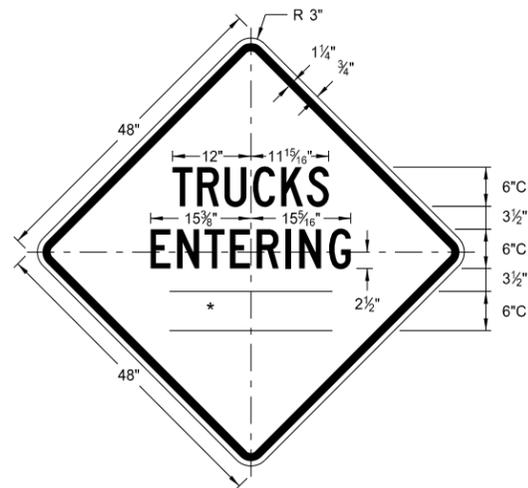


W8-54-48
Legend: black (non-refl)
Background: orange

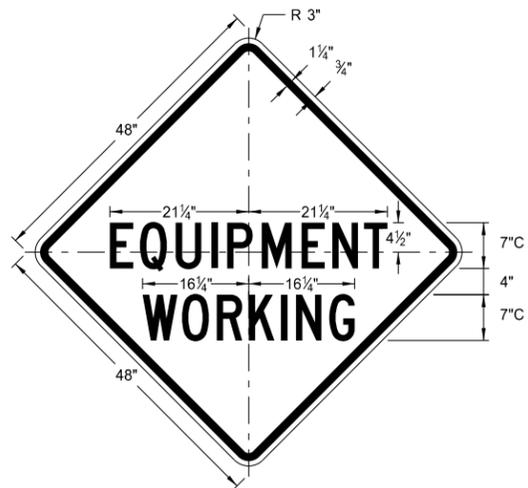


W20-51-48
Legend: black (non-refl)
Background: orange

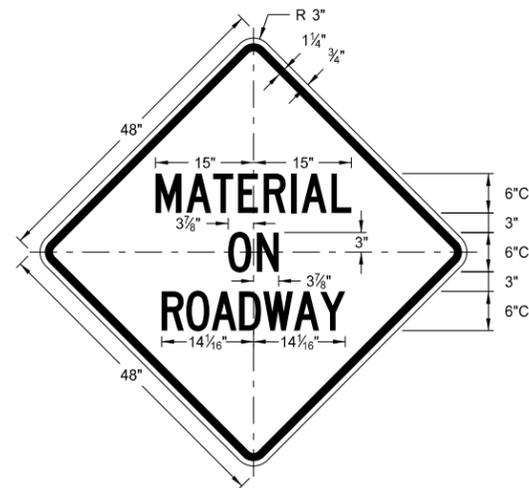


W21-51-48
Legend: black (non-refl)
Background: orange

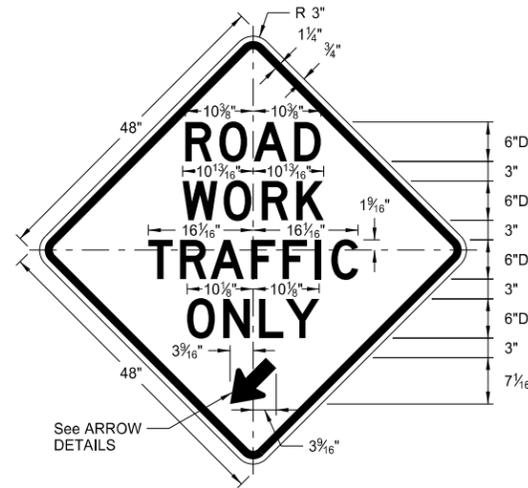


W5-9-48
Legend: black (non-refl)
Background: orange

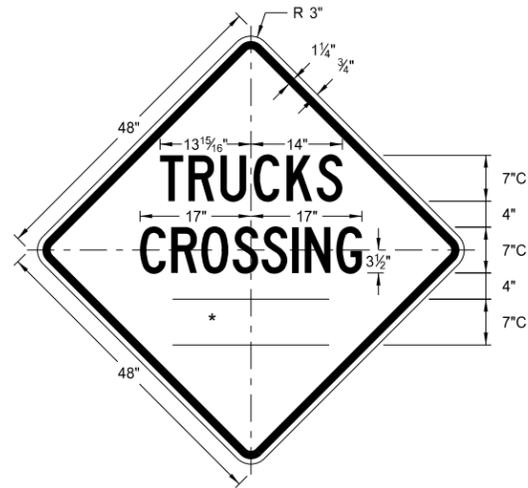


W8-55-48
Legend: black (non-refl)
Background: orange




W20-52-54
Legend: black (non-refl)
Background: orange

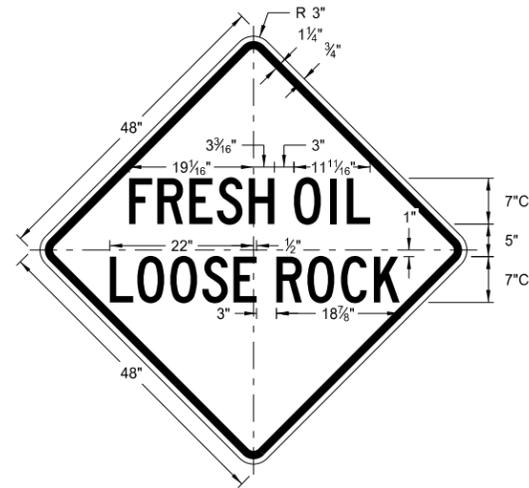


W22-8-48
Legend: black (non-refl)
Background: orange




W5-9-48
ARROW DETAILS

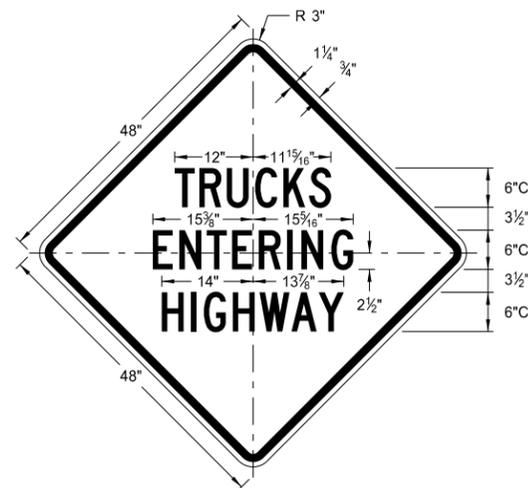

W8-53-48
Legend: black (non-refl)
Background: orange

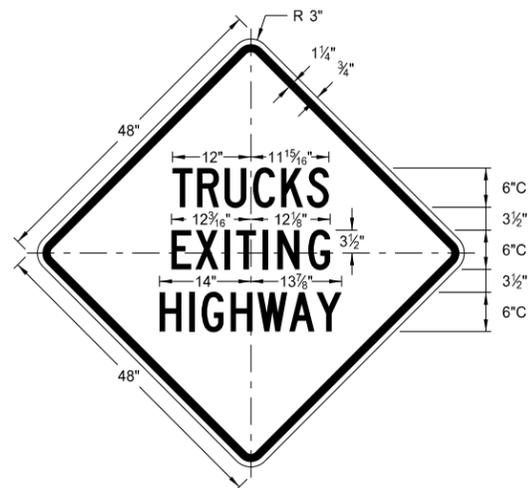

W8-56-48
Legend: black (non-refl)
Background: orange

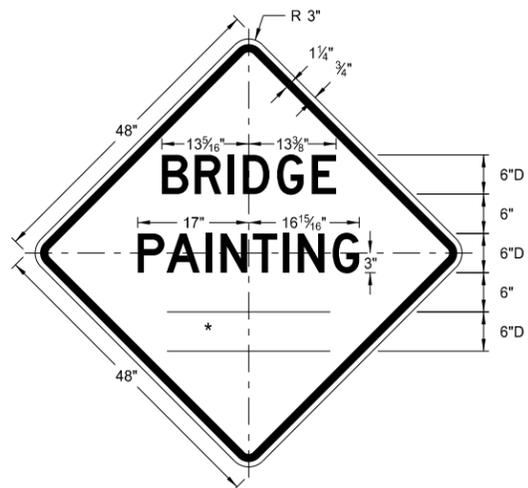


W21-50-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE




This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

SHOULDER CLOSURE TAPERS

D-704-12

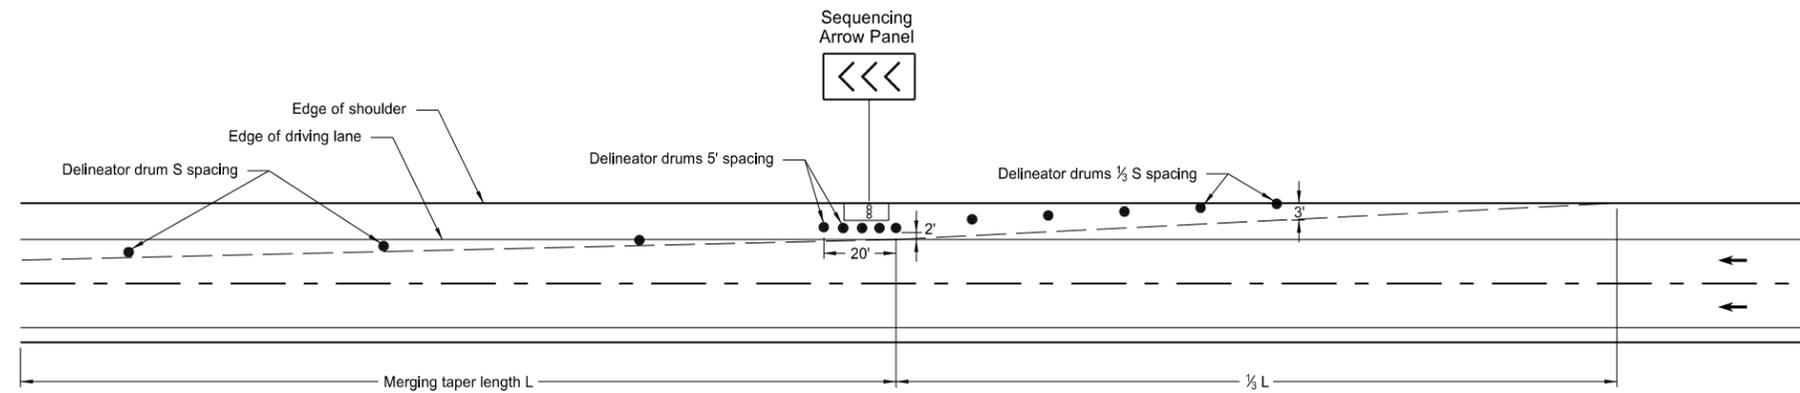

SHOULDER CLOSURE WITH LANE CLOSURE
(when shoulder is 8' or wider)

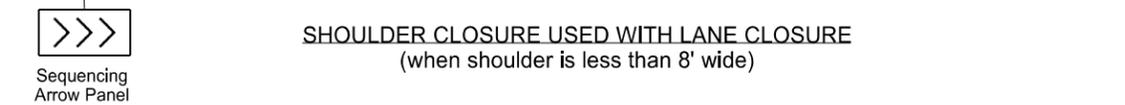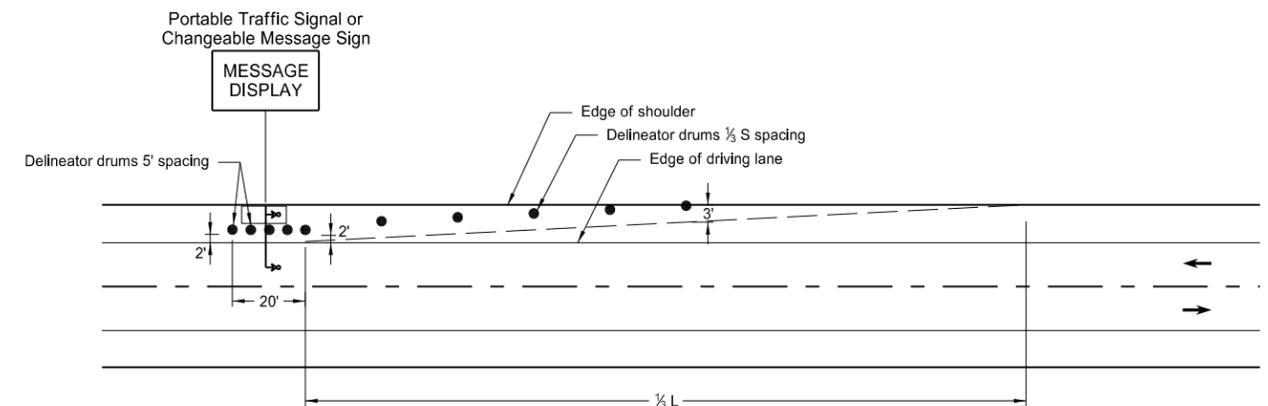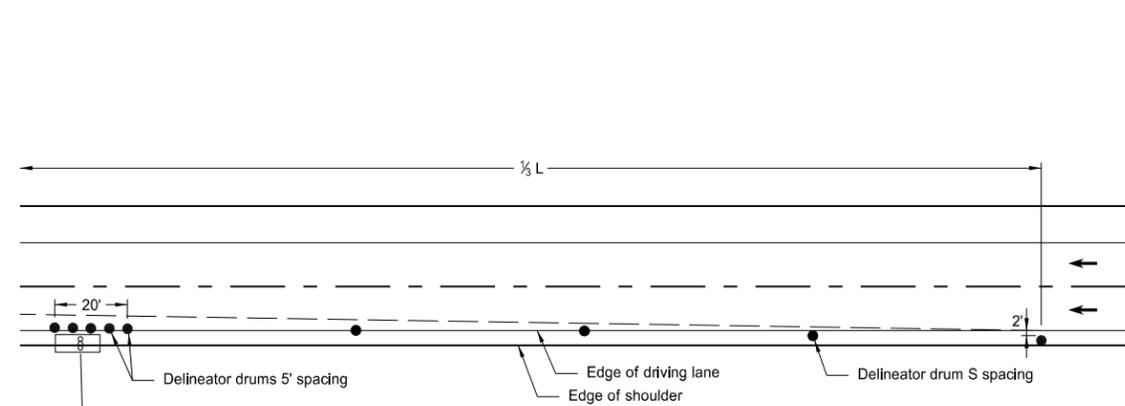

SHOULDER CLOSURE USED WITH LANE CLOSURE
(when shoulder is less than 8' wide)

PORTABLE TRAFFIC SIGNAL OR CHANGEABLE MESSAGE SIGN ON SHOULDER

KEY	
● Delineator Drum	∞ Sequencing Arrow Panel
• Message Display	↳ Portable Traffic Signal


Notes:

- S = Posted Speed Limit in mph
W = Width of offset in feet
L = Taper length in feet
L = $WS^2/60$ (40mph or less)
L = WS (45mph or more)
- If a shoulder taper is used, it should have a length of approximately $1/3L$. If a shoulder is used as a travel lane, a normal merging or shifting taper should be used.
- When paved shoulders of 8 foot width or more are closed, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

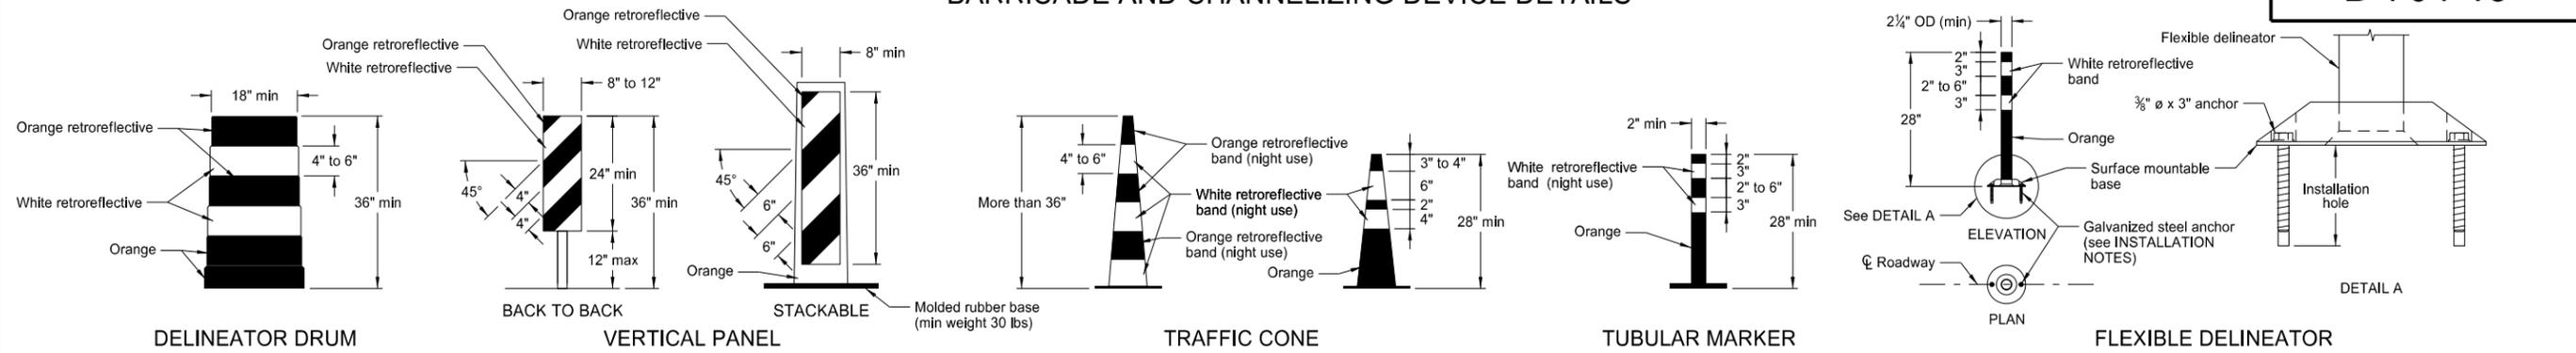

INSTALLATION NOTES:


1. Drill installation holes to diameter and depth as required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, the contractor may use an 8" x 8" butyl pad or hot melt butyl. Butyl shall be removed as close as possible to pavement surface.

The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflective spaces between the horizontal orange and white stripes shall not exceed 3" wide. Stripes shall not be placed on ribs or indentations in the drum. Drums shall have closed tops that will not allow collection of construction debris or other debris. Ballast shall not be placed on the top of a drum.

Markings for vertical panels shall be alternating orange and white retroreflective stripes, sloping downward in the direction vehicular traffic is to pass. Retroreflective sheeting shall be placed on both sides of panel and shall have a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.

Retroreflectization of cones more than 36" in height shall be provided by alternating orange and white retroreflective stripes. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflective space between the orange and white stripes shall not exceed 3" wide.

Retroreflectization of tubular markers more than 42" in height shall be provided by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

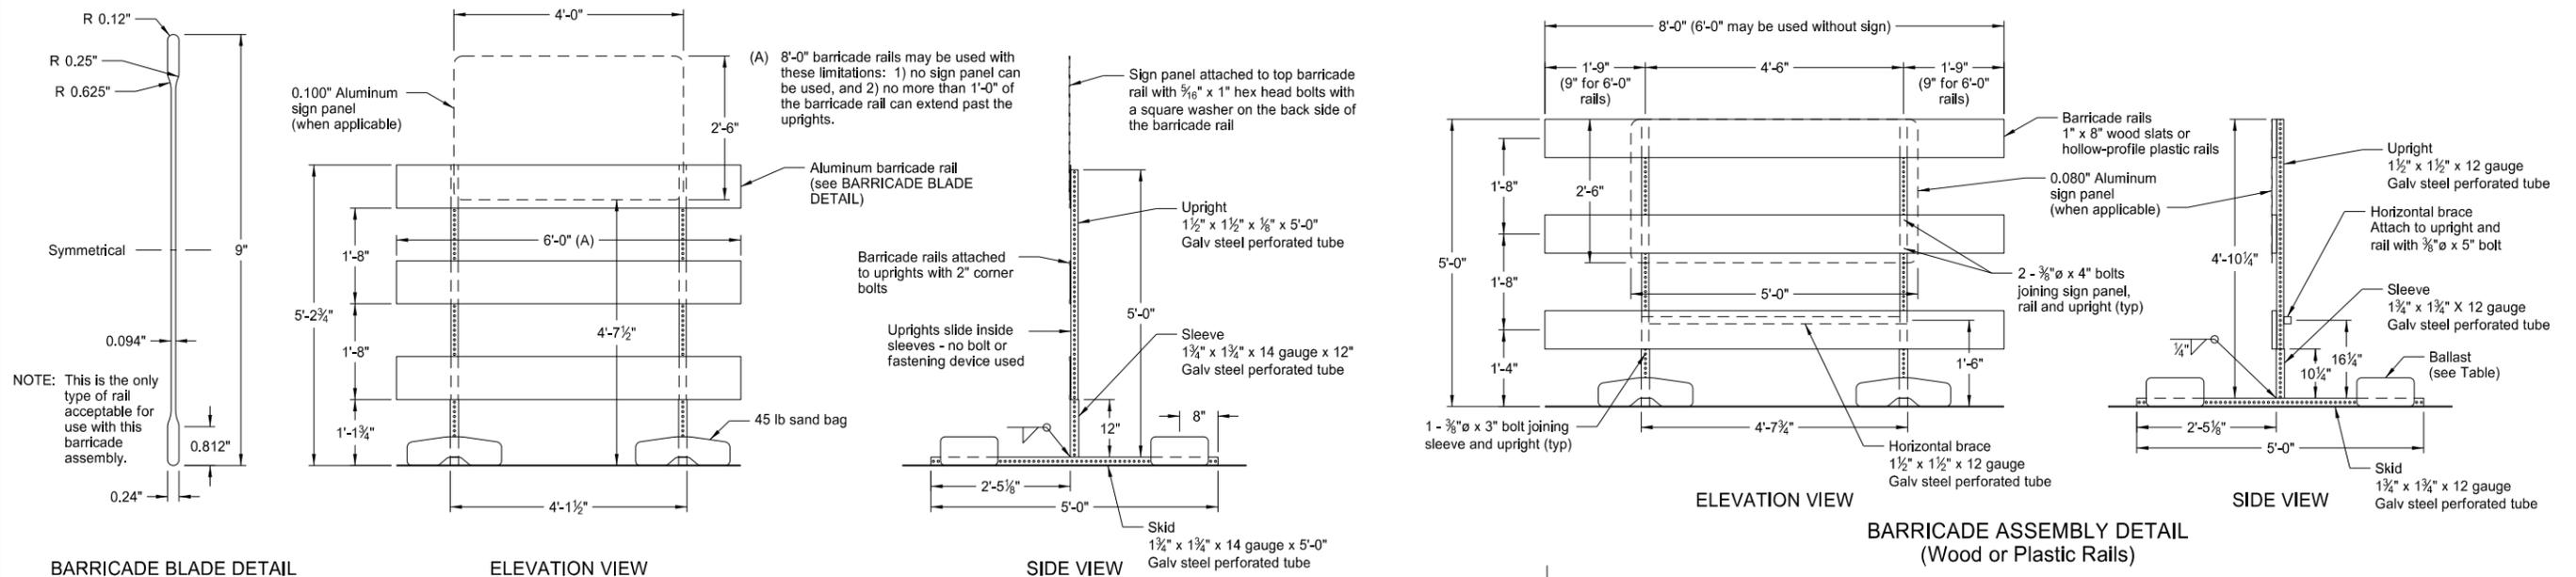

BARRICADE BLADE DETAIL

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)


SIDE VIEW

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

SIDE VIEW

NOTE: Markings for barricades shall be alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Retroreflective sheeting shall be placed on both sides of the rails and shall have a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", the rail stripe width shall be 4".

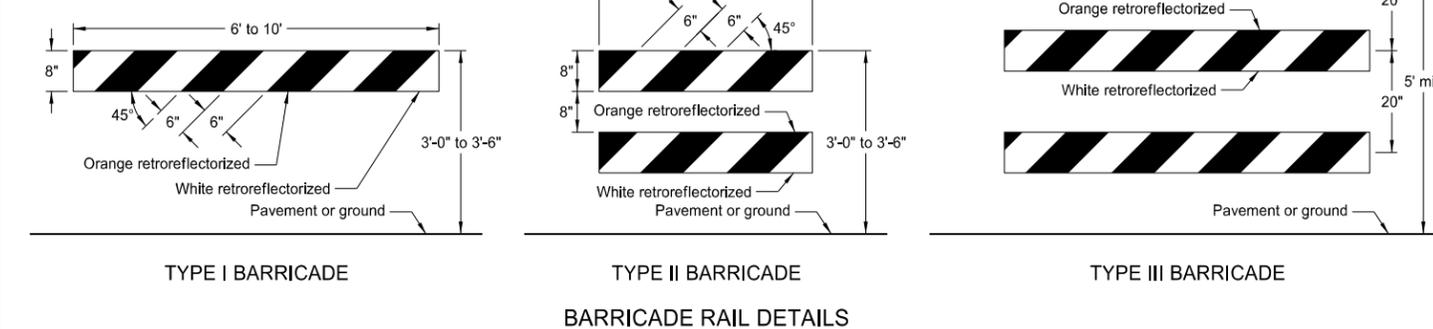


TYPE I BARRICADE

TYPE II BARRICADE

BARRICADE RAIL DETAILS

TYPE III BARRICADE

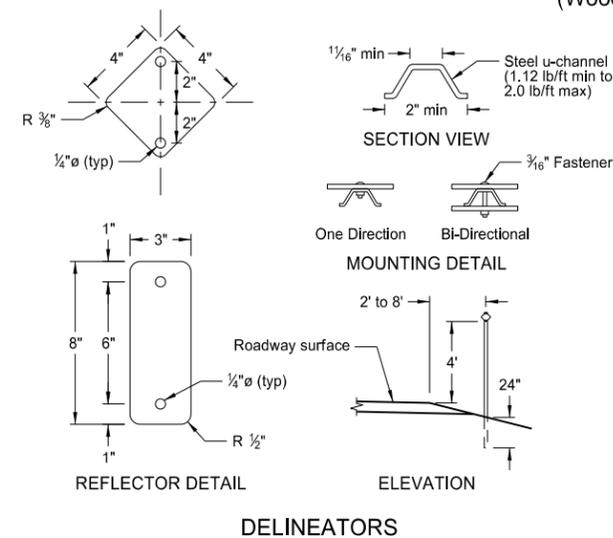

MINIMUM BALLAST (For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: Signs placed in sections with curb shall have a minimum horizontal clearance of 2' from the face of the curb to the near edge of the sign.

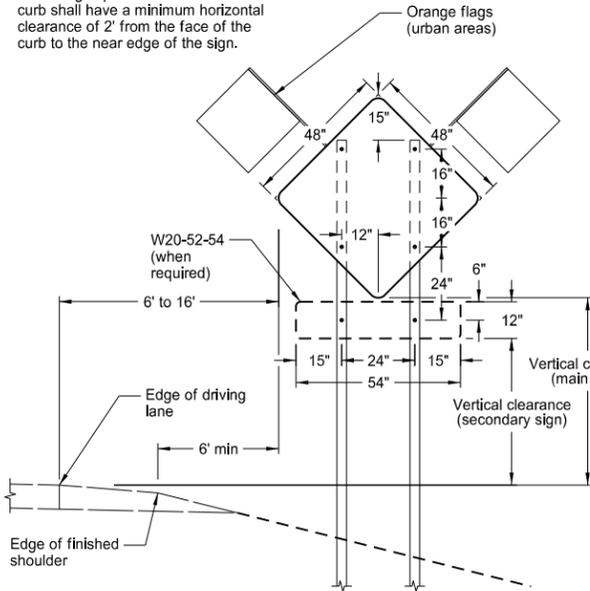


TYPICAL SECTION
(48" x 48" diamond warning sign shown)

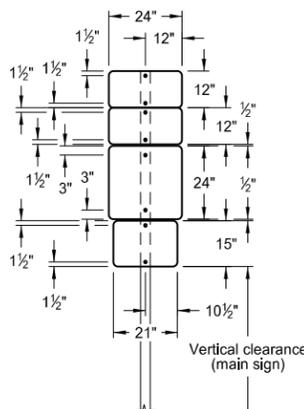


24" x 24" ROUTE MARKER ASSEMBLY

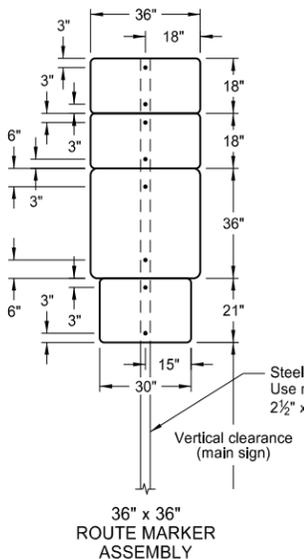


36" x 36" ROUTE MARKER ASSEMBLY




18" x 18" DIAMOND SIGN

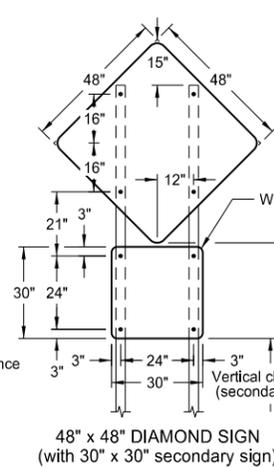


48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)

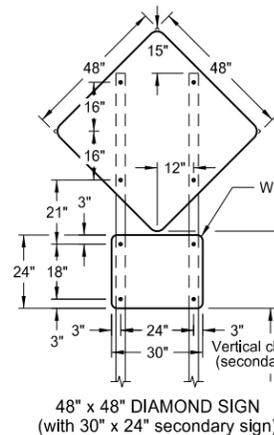


48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)




R1-2-60 - YIELD SIGN

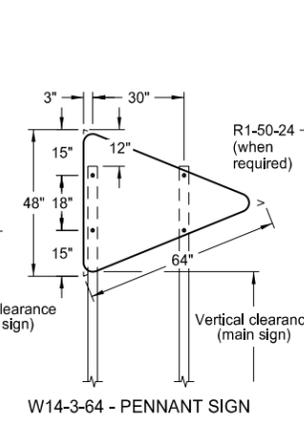


W14-3-64 - PENNANT SIGN

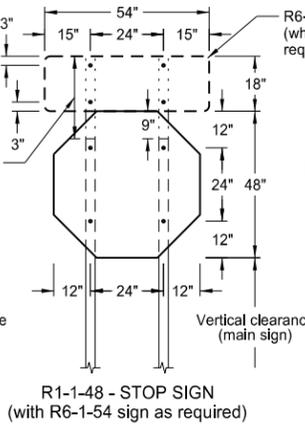


R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)

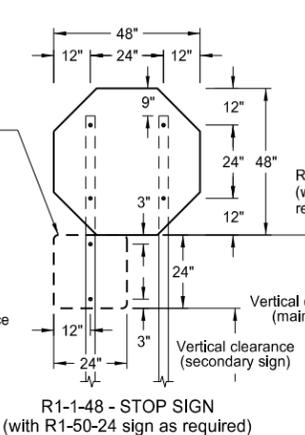


R1-1-48 - STOP SIGN
(with R1-50-24 sign as required)

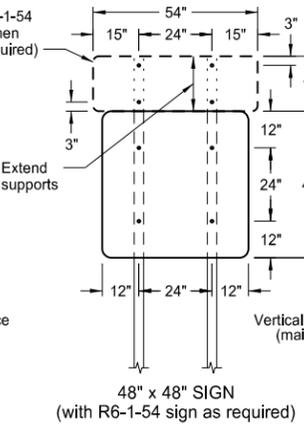


48" x 48" SIGN
(with R6-1-54 sign as required)

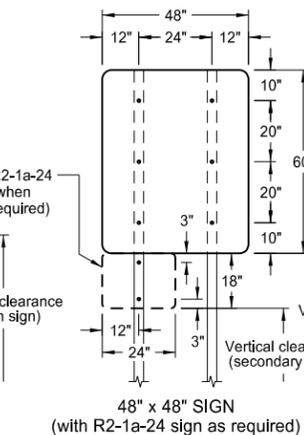


48" x 48" SIGN
(with R2-1a-24 sign as required)




24" x 36" SIGN




30" x 24" SIGN

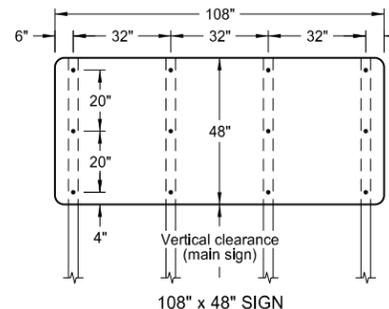


108" x 48" SIGN




96" x 48" SIGN




72" x 36" SIGN




72" x 24" SIGN




60" x 24" SIGN



48" x 24" SIGN

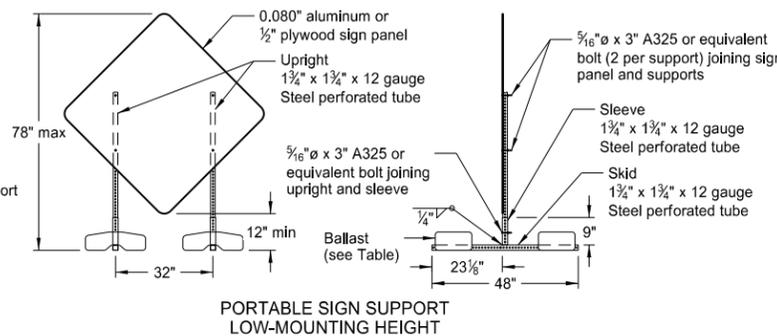

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

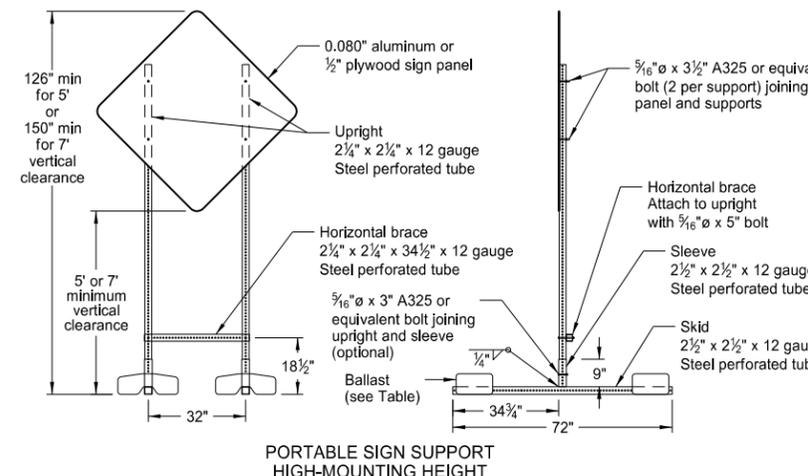

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Supports shall be galvanized or painted. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, the minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes are based on a wind speed of 55 MPH.

Signs over 50 square feet should be installed on 2 1/2" x 2 1/2" perforated tube supports as a minimum.

Guy wires shall not be attached to sign supports. Wind beams may be attached to u-posts behind the sign panels.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, 1/2" plywood, or other approved material, except where noted. All holes to be punched round for 3/8" bolts.

3. Alternate Messages: The signs that have alternate messages may have these alternate messages placed on a reflectorized plate (without a border) and installed and removed as required. (i.e. "Left" and "Right" message on a lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance as stated above.

Large signs having an area exceeding 50 square feet shall have a minimum clearance of 7'-0" from the ground at the post.

6. Portable Signs: Provide portable signs that meet the vertical clearance as stated above. Use portable signs when it is necessary to place signs within the pavement surface.

When portable signs are used for 5 days or less, low-mounting height (minimum 12" vertical clearance) sign supports may be used as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. The R9-8 through R9-11a series, W1-5 through W1-8 series, M4-10, and E5-1 may be used for longer than 5 days.

Signs mounted to the portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT Details shall have a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6.

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/14/13 and the original document is stored at the North Dakota Department of Transportation

ROAD CLOSURE LAYOUTS

Notes

- Variables
 S = Numerical value of speed limit or 85th percentile.
 W = The width of taper.
 L = Minimum length of taper, or $S \times W$ for freeways, expressways, and all other roads with speeds of 45 mph or greater, or $W \times S^2/60$ for urban, residential, and other streets with speeds of 40 mph or less.
- Barricades placed on roadway shall be on a moveable assembly. Signs placed on roadway shall be placed on skid mounted assemblies.
- Delineator drums, barricades or cones used for tapering traffic shall be spaced at the dimension "S". Delineator drums or cones used for tangents shall be spaced at 2 times dimension "S".
- Sequencing Arrow Panels
 Panels should normally be placed at the beginning of the taper. Where shoulder width does not provide sufficient room, the panel should be moved closer to the work area so that it can be placed on the roadway surface. See Shoulder Closure Standard Drawing.
 Type A shall be used on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
 Type B shall be used on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
 Type C shall be used on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
- The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
- The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at $\frac{1}{2}$ B.
- Use when work area is 1 mile or longer.
- When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
- Existing speed limit signs within a reduced speed zone shall be covered.
- Where necessary, safe speed to be determined by the Engineer.
- The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications. G20-55-96 sign is not required if this standard is part of other traffic control layouts, or the work is less than 15 days.


Road Type	ADVANCE WARNING SIGN SPACING		
	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

KEY	
	Type III barricade
	Sign
	Delineator drum
	Tubular markers
	Work area
	Flagger
	Sequencing arrow panel
	Vertical panels back to back

Longitudinal Buffer Space	
Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 09/27/13 and the original document is stored at the North Dakota Department of Transportation

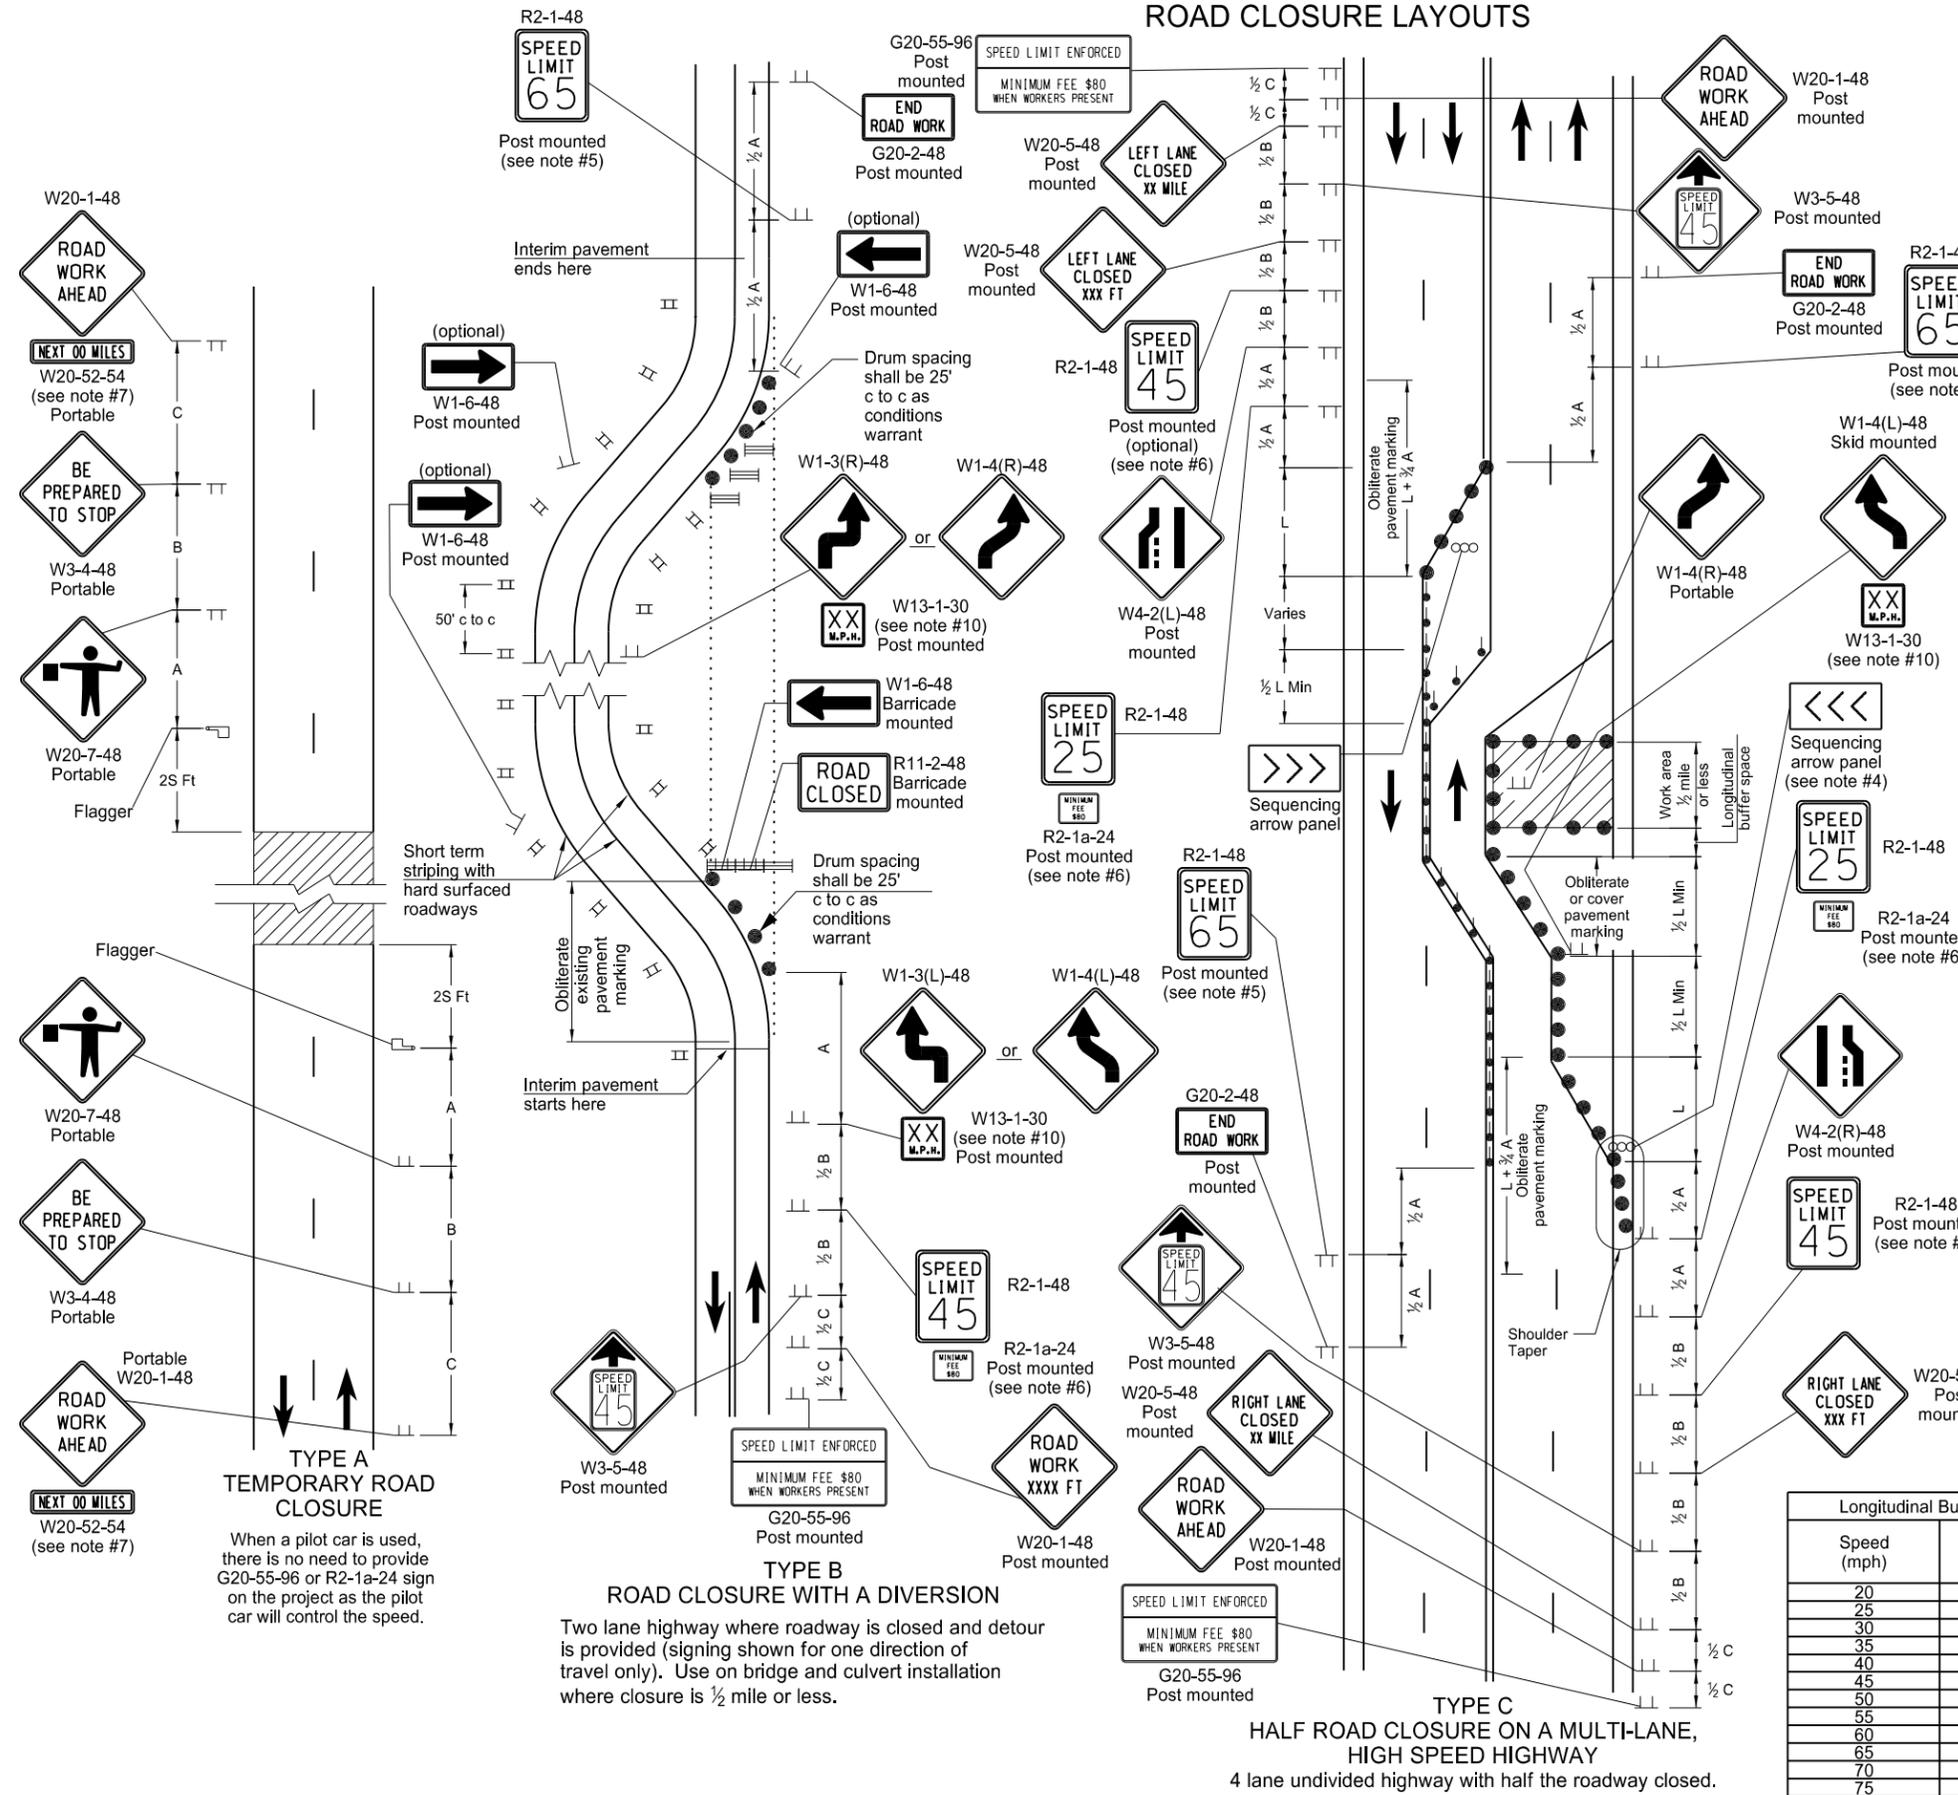


TYPE A TEMPORARY ROAD CLOSURE
 When a pilot car is used, there is no need to provide G20-55-96 or R2-1a-24 sign on the project as the pilot car will control the speed.

TYPE B ROAD CLOSURE WITH A DIVERSION
 Two lane highway where roadway is closed and detour is provided (signing shown for one direction of travel only). Use on bridge and culvert installation where closure is $\frac{1}{2}$ mile or less.


TYPE C HALF ROAD CLOSURE ON A MULTI-LANE, HIGH SPEED HIGHWAY
 4 lane undivided highway with half the roadway closed.

CONSTRUCTION TRUCK AND TEMPORARY DETOUR LAYOUTS

D-704-22

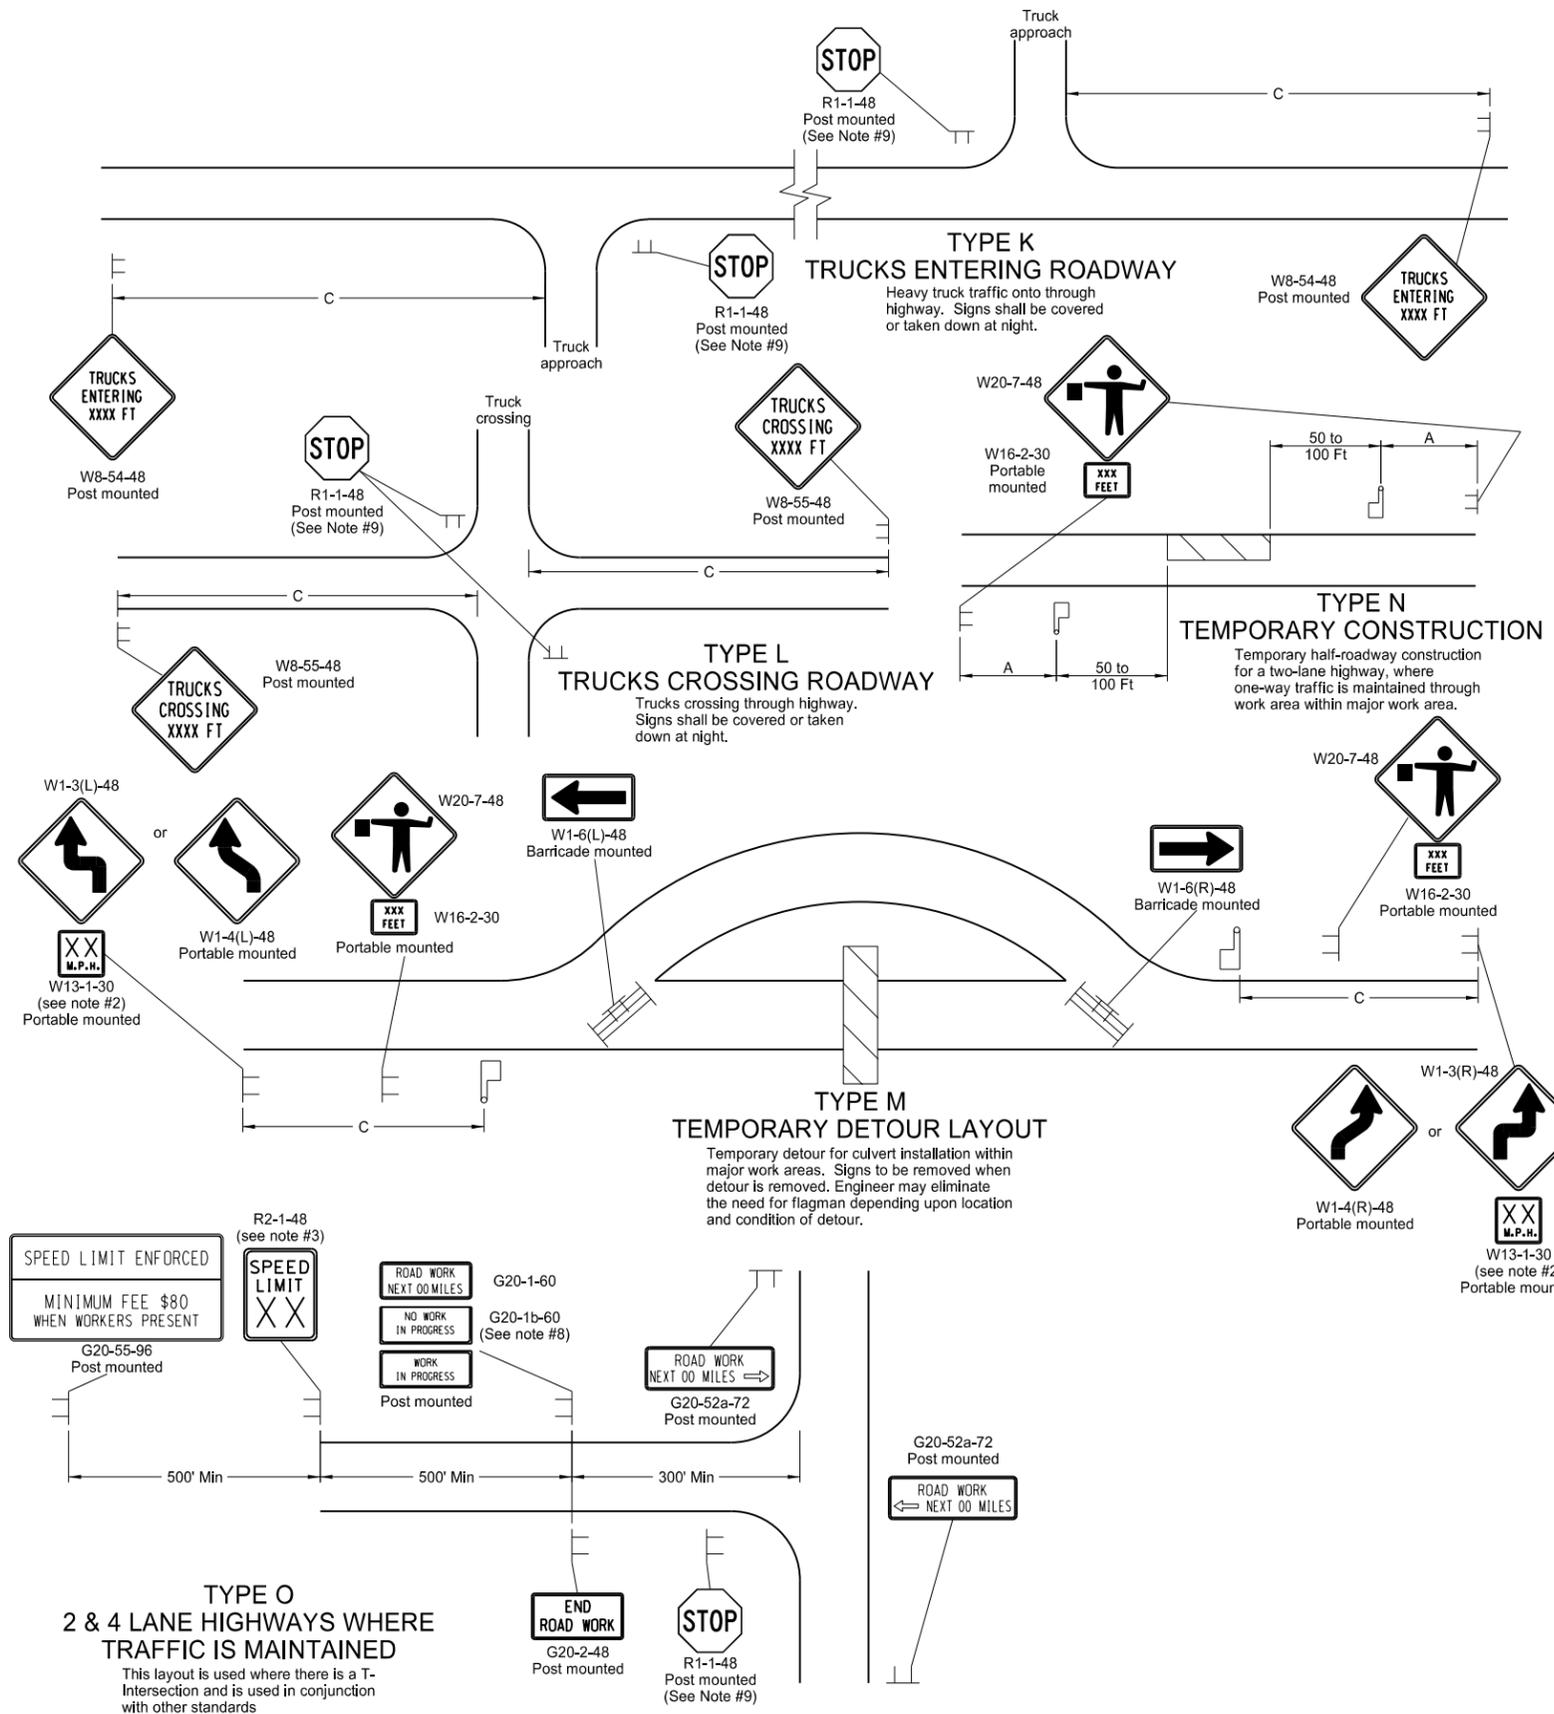

- Notes
1. Barricades placed on roadway shall be on a moveable assembly. Signs placed on the roadway shall be placed on skid mounted assemblies. Where necessary, safe speed to be determined by the Engineer.
 2. The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at 1/2 B.
 3. When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 4. Existing speed limit signs within a reduced speed zone shall be covered. Obliterated or covered pavement marking shall be paid for as Obliteration of Pavement Marking. The covering shall be approved by the engineer.
 5. The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.
 6. The contractor shall install the G20-1b-60 sign when work is suspended for winter.
 7. If existing stop sign is in place, a 48" stop sign is not required.
 8. G20-55-96 sign is not required if this standard is part of other traffic control layouts with this sign or the work is less than 15 days.

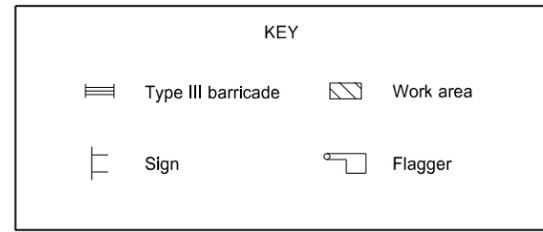


Road Type	ADVANCE WARNING SIGN SPACING		
	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION 9-27-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
 Roger Weigel
 Registration Number
 PE- 2930,
 on 09/27/13 and the original document is stored at the
 North Dakota Department
 of Transportation


EROSION AND SILTATION CONTROLS
MEDIAN OR DITCH INLET PROTECTION

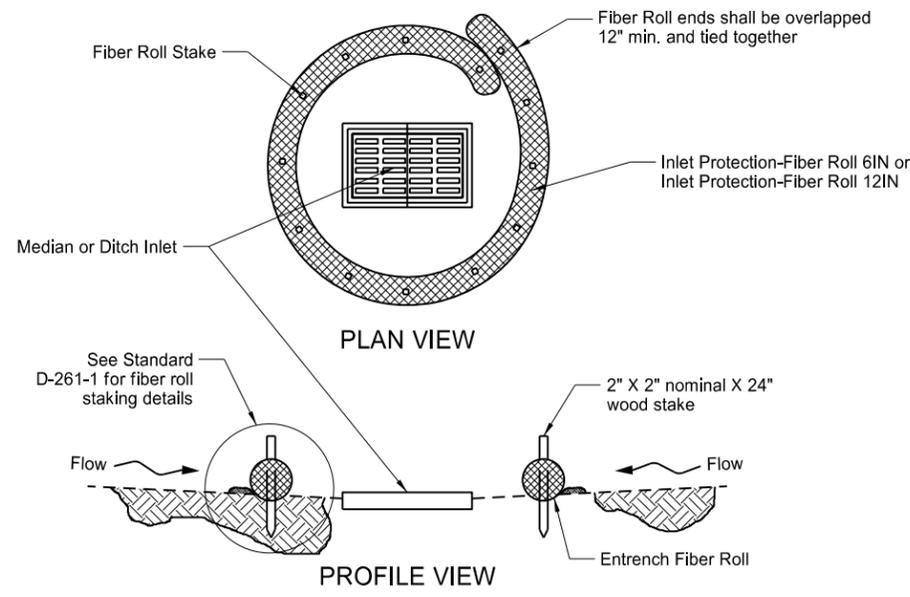


FIBER ROLL PROTECTION (MEDIAN OR DITCH INLET)

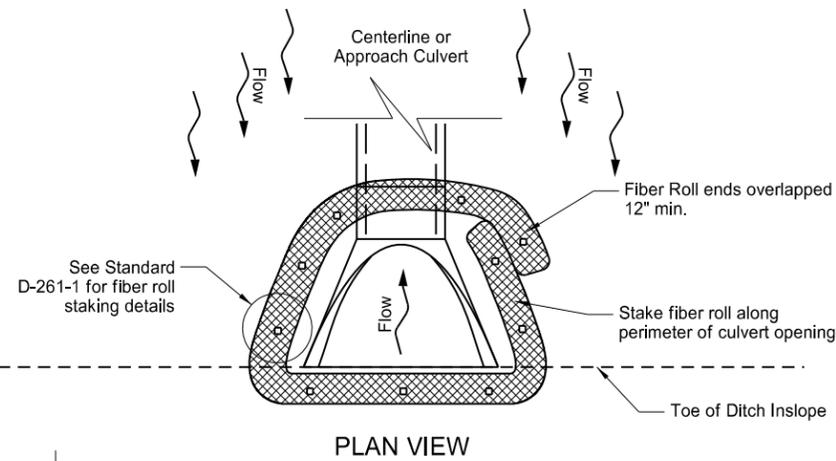



FIBER ROLL PROTECTION (INLET OF CULVERT)

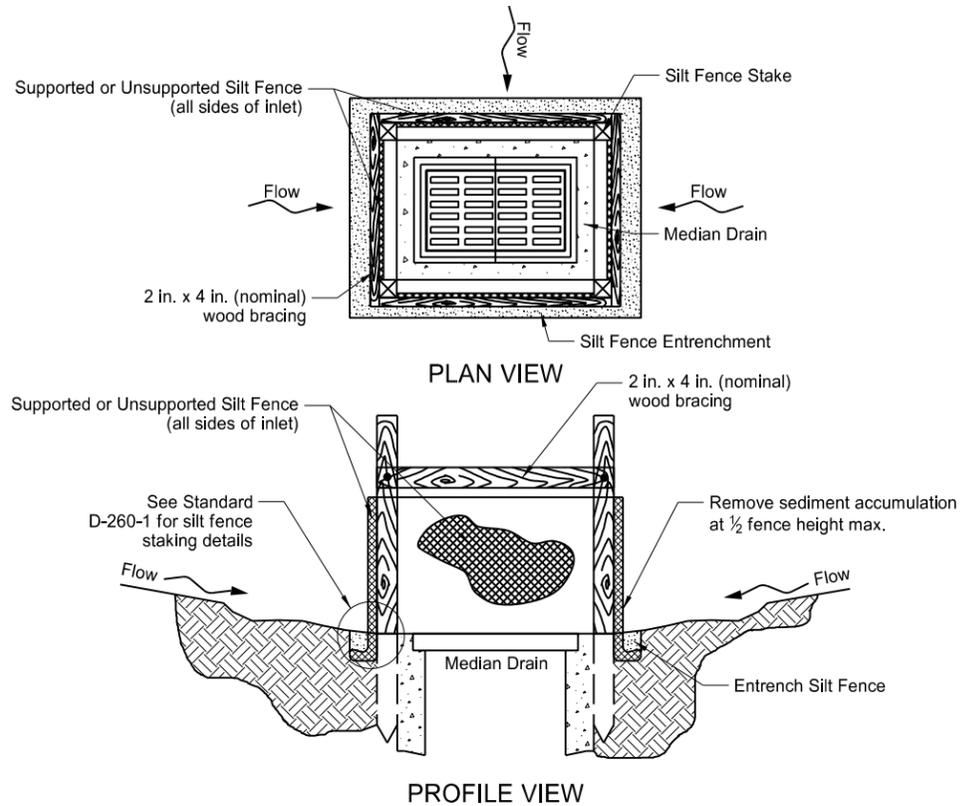



SILT FENCE PROTECTION (MEDIAN OR DITCH INLET)

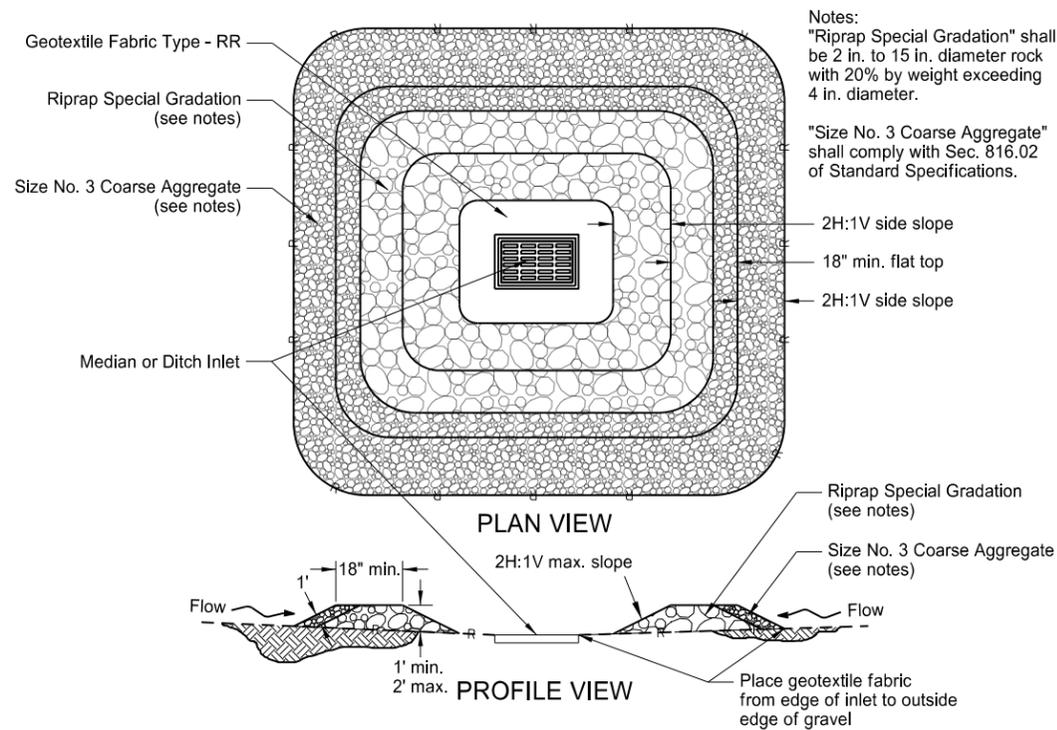

GRAVEL INLET PROTECTION (MEDIAN OR DITCH INLET)

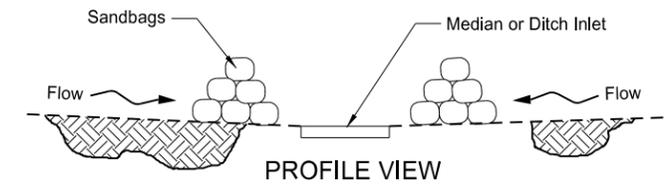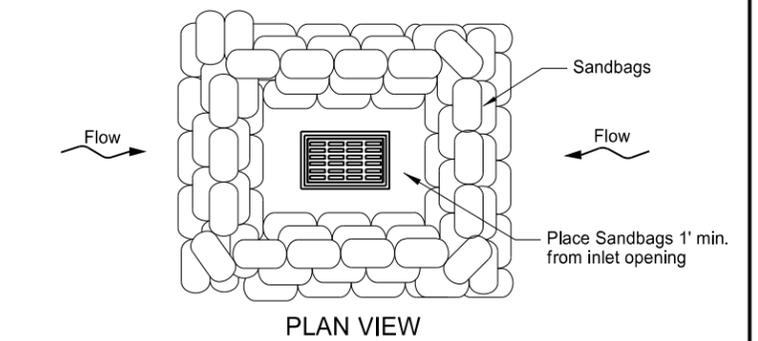

SANDBAG PROTECTION (LOW POINT)

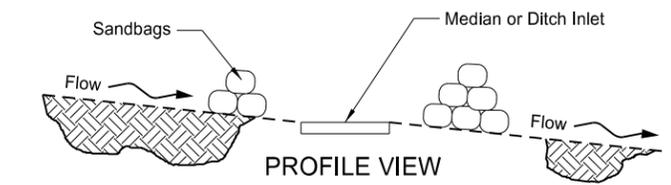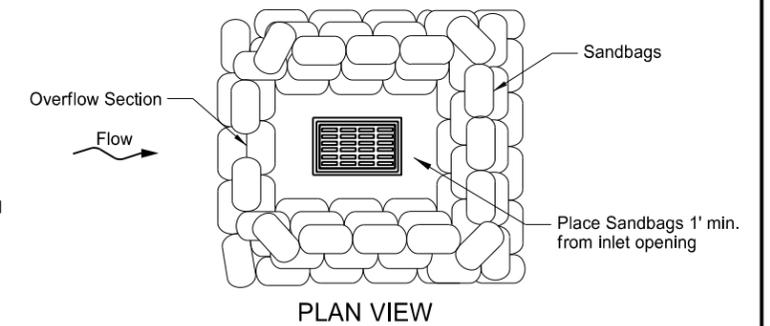

SANDBAG PROTECTION (ON SLOPE)


Notes:
"Riprap Special Gradation" shall be 2 in. to 15 in. diameter rock with 20% by weight exceeding 4 in. diameter.
"Size No. 3 Coarse Aggregate" shall comply with Sec. 816.02 of Standard Specifications.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE

06-26-14	Updated reference to standard drawing number for fiber roll staking details.
10-01-14	Updated reference to standard drawing number for silt fence.


This document was originally issued and sealed by
Roger Weigel
Registration Number
PE-2930,
on 10/01/14 and the original document is stored at the North Dakota Department of Transportation

REINFORCED CONCRETE PIPE CULVERTS AND END SECTIONS
(Round Pipe)

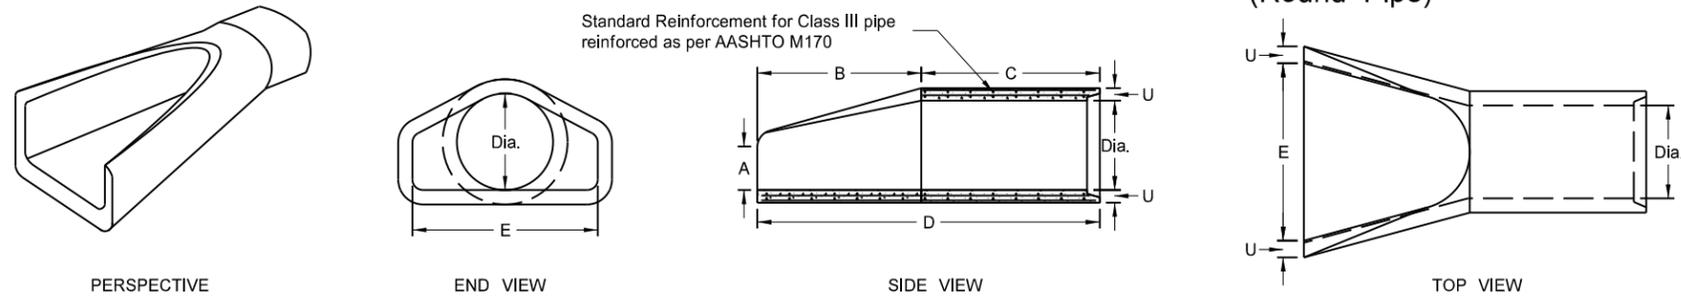

REINFORCED CONCRETE PIPE - FLARED END SECTION
Reinforcement to be equivalent to Class III RCP

TRAVERSABLE END SECTION							
DIA	B	C	D	E	F	R	S
15"	4'	9"	4'-9"	1'-7½"	2½"	3"	6
18"	5'-9"	9"	6'-6"	1'-11"	2½"	3"	6
24"	6'	1'	7'	2'-6"	3"	3"	4
30"	7'-6"	1'	8'-6"	3'-1"	3½"	3½"	4
36"	7'-3"	15"	8'-6"	3'-8"	4"	3"	4

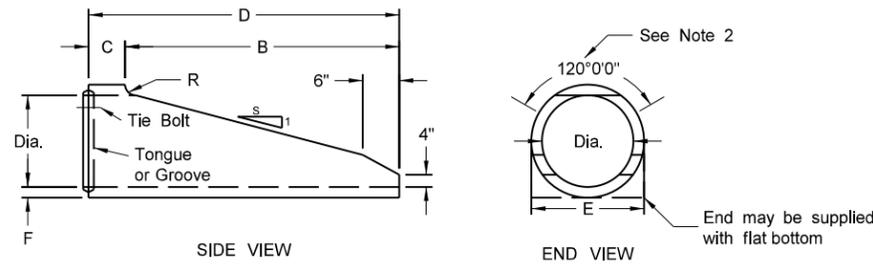

REINFORCED CONCRETE PIPE - TRAVERSABLE END SECTION
Reinforcement to be equivalent to Class III RCP


NOTES (Traversable End Section):

1. Manufactured in accordance with applicable portions of ASTM C76/AASHTO M170.
2. Reinforcement per Class III RCP with double reinforcement in the upper 120° of the full barrel portion.

FLARED END SECTION						
TERMINAL DIMENSIONS						
DIA	A	B	C	D	E	U
12	0'-4"	2'-0"	4'-0½"	6'-0½"	2'-0"	2"
15	0'-6"	2'-3"	3'-10"	6'-1"	2'-6"	2½"
18	0'-9"	2'-3"	3'-10"	6'-1"	3'-0"	2½"
21	0'-9"	3'-0"	3'-1"	6'-1"	3'-6"	2½"
24	0'-9½"	3'-7½"	2'-6"	6'-1½"	4'-0"	3"
27	0'-10½"	4'-0"	2'-1½"	6'-1½"	4'-6"	3½"
30	1'-0"	4'-6"	1'-7¾"	6'-1¾"	5'-0"	3½"
36	1'-3"	5'-3"	2'-9"	8'-0"	6'-0"	4"
42	1'-9"	5'-3"	2'-9"	8'-0"	6'-6"	4½"
48	2'-0"	6'-0"	2'-0"	8'-0"	7'-0"	5"
54	2'-3"	5'-5"	2'-9½"	8'-2½"	7'-6"	5½"
60	2'-11"	5'-0"	3'-3"	8'-3"	8'-0"	5"
66	2'-6"	6'-0"	2'-3"	8'-3"	8'-6"	5½"
72	3'-0"	6'-6"	1'-9"	8'-3"	9'-0"	6"
78	3'-0"	7'-6"	1'-9"	9'-3"	9'-6"	6½"
84	3'-0"	7'-6½"	1'-9"	9'-3½"	10'-0"	6½"
90	3'-5"	7'-3½"	2'-0"	9'-3½"	11'-0"	6½"

All Classifications of Round Concrete Pipe

Internal Dia. of Pipe (In.)	Cross-Sectional Water Area (Sq. ft.)	Weight per Lin. Foot of Pipe (Lbs.)	Joint Groove Min./Max. (In.)	Joint Tongue Min./Max. (In.)	Minimum Wall Thickness (In.)
12	0.79	92	1½-2¾	¾	2
15	1.23	127	1¾-2¾	¾	2½
18	1.77	168	1¾-2¾	1	2½
21	2.40	214	1¾-3¾	1½	2¾
24	3.14	265	2¾-3¾	1½	3
27	3.98	322	2¾-4	1¾	3¼
30	4.91	384	3¼-4¼	1¾	3½
33	5.94	452	3¼-4¼	1½	3¾
36	7.07	524	3¼-4¼	1½	4
42	9.62	685	3¼-4¼	1¾	4½
48	12.57	885	3¼-4¼	1¾	5
54	15.90	1070	4½-5½	2	5½
60	19.63	1296	4½-5½	2¼	6
66	23.76	1542	5-6	2½	6½
72	28.27	1810	5½-6¾	2½	7
78	33.18	2098	6¼-7¼	2½	7½
84	38.48	2410	5½-7¼	3¾	8
90	44.18	2793	6¾-8½	3¾	8½
96	50.27	3092	7-8¼	3½	9
102	56.75	3466	7-8¼	3½	9½
108	63.62	3864	7¼-8½	3¾	10

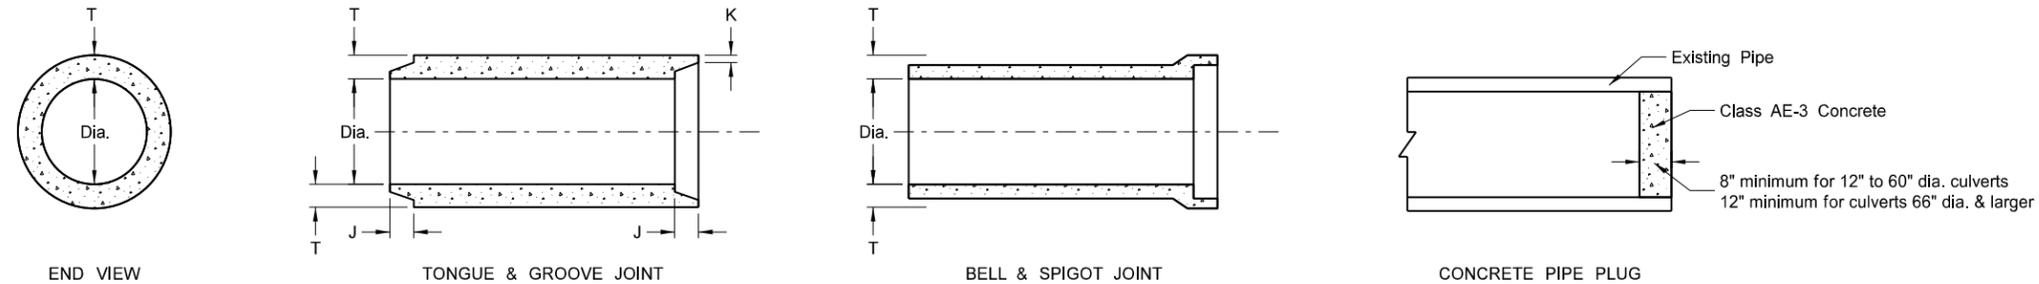

CIRCULAR PIPE

JOINTS FOR REINFORCED CONCRETE PIPE

CONCRETE PIPE PLUG

NOTES:

1. All reinforcing steel shall meet AASHTO M170 requirements.
2. All circular, longitudinal, and elliptical reinforcement shall be assembled and securely fastened in cage fashion so as to maintain reinforcement in exact shape and correct positions within the forms.
3. Laying length of pipe: 12" to 66" (incl.) = not less than 4 feet
66" to 108" (incl.) = not less than 6 feet
4. Joints shall be sealed with rubber gaskets or with sealer approved by the engineer whenever pipe are specified for storm drain or sanitary sewers.
5. For Class IV and Class V reinforced concrete pipe and end section sizes which do not have reinforcement specified by AASHTO M170, shop drawings and design calculations shall be prepared and sealed by a Professional Engineer and submitted for the Engineer's review.










SEE STANDARD DRAWING D-714-22 FOR DETAILS OF CONCRETE PIPE TIES (TIE BOLTS).

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
05-12-14	
REVISIONS	
DATE	CHANGE
01-21-15	Revised Note 5



This document was originally issued and sealed by Terrence R. Udland, Registration Number PE-2674, on 01/21/15 and the original document is stored at the North Dakota Department of Transportation

CONCRETE PIPE OR PRECAST CONCRETE BOX CULVERT TIES

REQUIRED SIZE OF TIE BOLTS		
Pipe Size	Thread ϕ	XXS Pipe Sleeve Inner ϕ
18" - 24"	$\frac{5}{8}$ " See note 2	$\frac{3}{4}$ "
30" - 66"	$\frac{3}{4}$ "	1"
72" - 78"	1"	1 $\frac{1}{4}$ "
RCB		

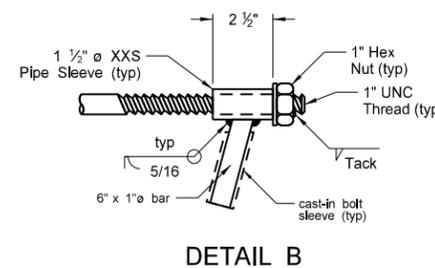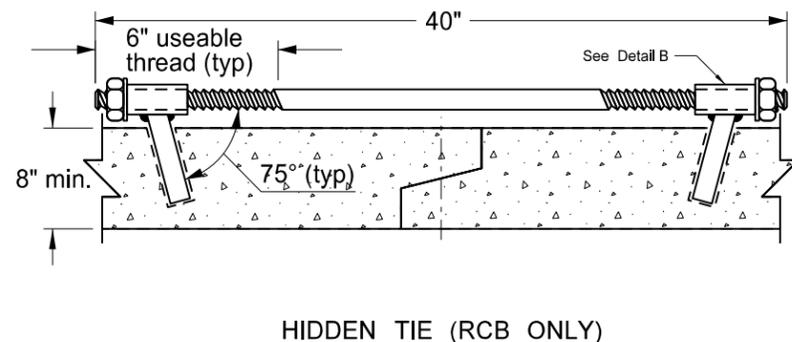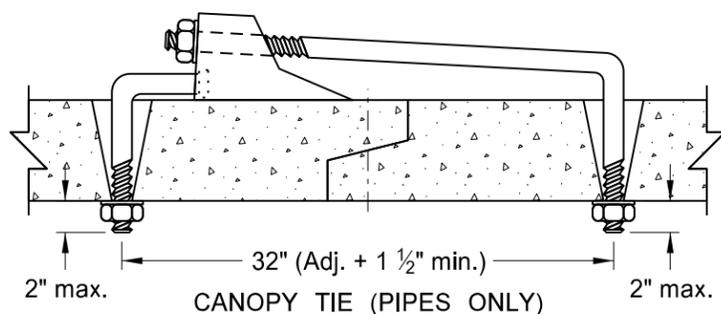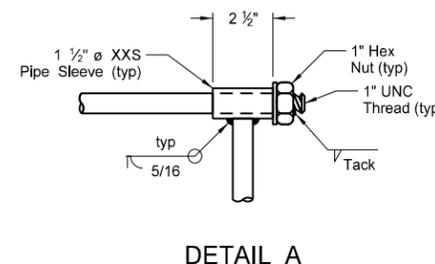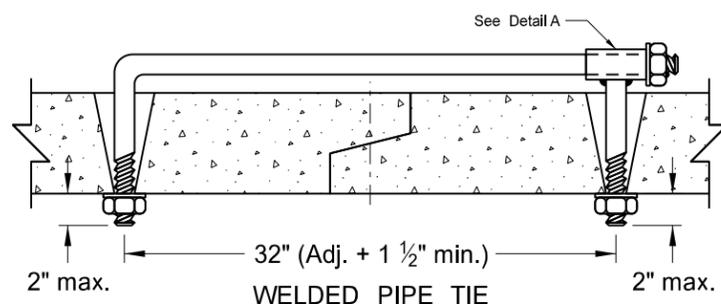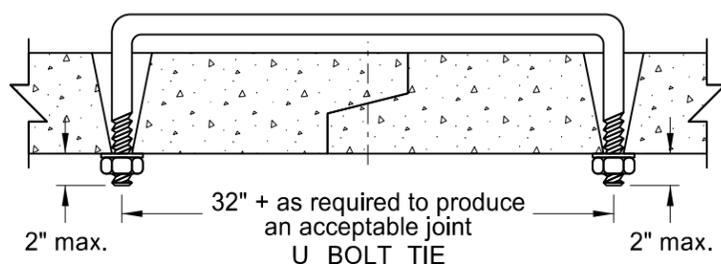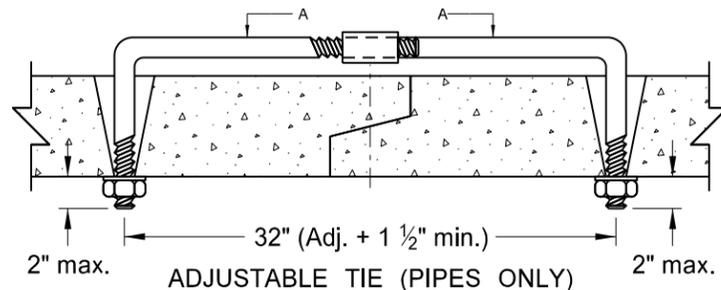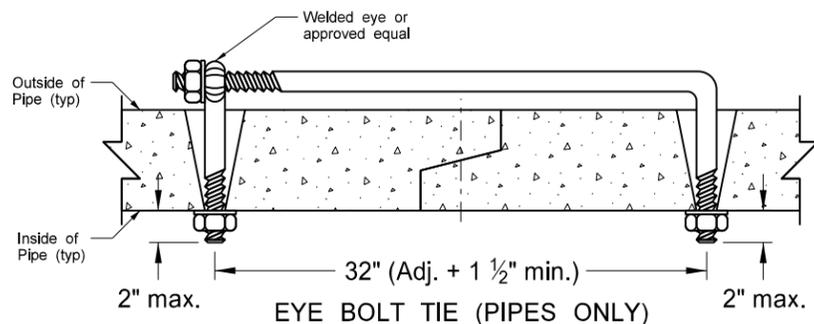


- NOTES:
- The pipe size listed is the inside diameter of round pipe or the equivalent diameter of pipe arch.
 - Nuts and washers are not required on Jacked and Bored pipes or pipes with a 24" diameter or less. Where nuts and washers are not used, the tie bars shall be inserted and grouted into place.
 - Ties are only for holding pipe or RCB sections together, not for pulling sections tight.
 - Tie bolt assembly shall be hot dip galvanized in accordance with AASHTO M232.
 - Holes in pipes to accommodate tie bolts can be precast or drilled. Tapered holes are permitted when precast. Holes shall have a diameter $\frac{1}{4}$ " larger than the diameter of the thread. Holes in precast RCB's shall contain cast-in bolt sleeves with an inside diameter of $1 \frac{1}{4}$ ".
 - The contractor has the option of selecting the type of tie bolt used from those shown.
 - The cost of precasting or drilling the required holes and furnishing and installing the tie bolts shall be included in the price bid for the appropriate conduit or RCB pay item.
 - All centerline and approach RCP culvert joints shall be tied. Storm drain systems shall have the first three joints including the end section of all free ends tied. Free ends are defined as any storm drain end which does not terminate at an inlet or manhole. Outfall culverts with end sections which drain adjacent ditches are examples of free ends.
 - When joint wrap is specified in the plans, place wrap beneath ties. Overlap the joint by 12" in both directions.
 - Tie bolts shall conform to ASTM A 36. Nuts shall be heavy hex and conform to ASTM A 563. Washers shall conform to ASTM F 436, Type 1. Welded pipe sleeves and cast-in bolt sleeves shall conform to ASTM A 53, Grade B.
 - Cattle Pass and Jacked and Bored pipes shall have pipe ties inserted from the inside of the pipes and grouted into place. Jacked and bored pipes with a diameter of 24" or less do not require pipe ties.
 - RCB tie locations shall be as shown on the plans.

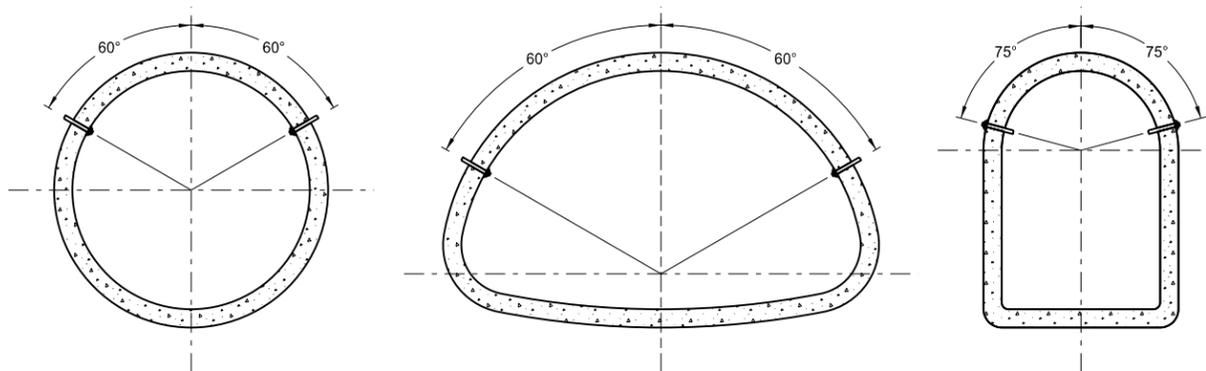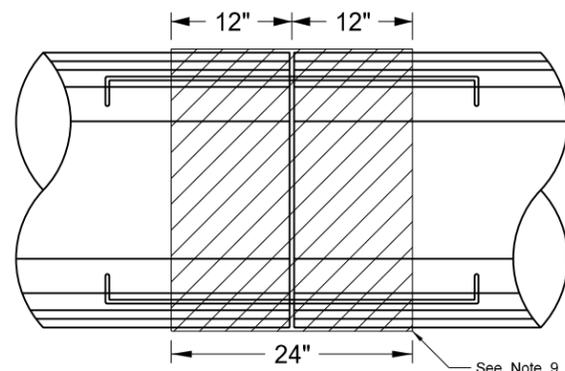


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
3-18-14	
REVISIONS	
DATE	CHANGE
7-21-15	Note 8

This document was originally issued and sealed by Terrence R. Udland, Registration Number PE-2674, on 07/21/15 and the original document is stored at the North Dakota Department of Transportation

PIPE INSTALLATION DETAIL FOR LONGITUDINAL MAINLINE PIPE
OR PIPE NOT UNDER THE ROADWAY

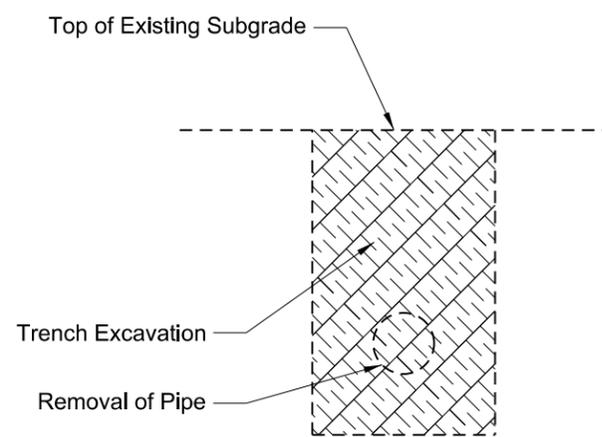

EXCAVATION DETAIL A

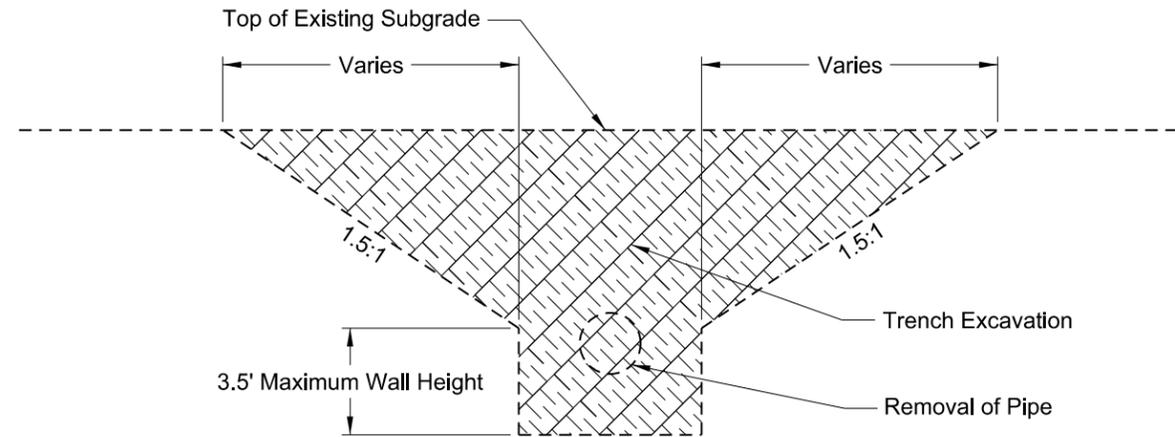

EXCAVATION DETAIL B

Pay Items

- 1) Pipe*
- 2) Removal of Pipe (if required)


*Included in Pipe Pay Item

- 1) Pipe
- 2) Trench excavation
- 3) Aggregate base course CI 3 or CI 5
- 4) Embankment

NOTES:

- 1) This drawing does not apply to pipes in approaches.
- 2) It is the contractor's option to select Detail A or B.
- 3) Embankment may be either Borrow Excavation or Common Excavation - Type A

Bedding and Haunch (A)
Pipes Not Under Roadway = 0.5 O.D. + 4 Inches
Pipes Under the Roadway = 0.5 O.D. + 2 Feet
Backfill Cover (B)
Concrete Pipe = 0.5 O.D.
Metal and Plastic = 0.5 O.D. + 1 Foot
Backfill Material (C)
Top of Pipe 4 Feet or Less Below the Top of Proposed Subgrade = Aggregate Base Course CI3 or CI 5
Top of Pipe Greater than 4 Feet Below the Top of Proposed Subgrade = Common Excavation - Type A
Pipe Not Under Roadway = Common Excavation - Type B

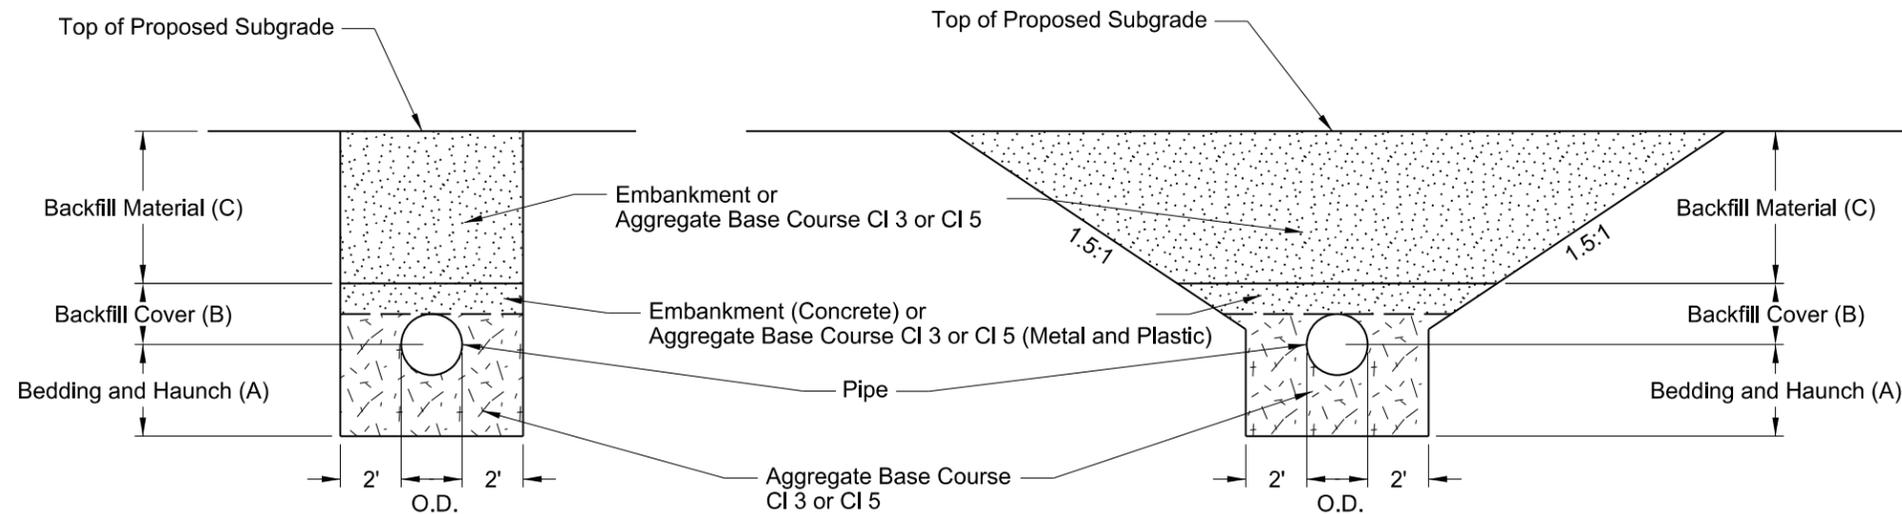

BACKFILL DETAIL A

BACKFILL DETAIL B

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
7-26-13	
REVISIONS	
DATE	CHANGE
10-15-13 1-21-15 12-10-15	Label Formatting Nomenclature Added Plastic Pipe

This document was originally issued and sealed by
Ron Horner,
Registration Number
PE-2087,
on 12/10/2015 and the original document is stored at the North Dakota Department of Transportation

INLET - SPECIAL

D-722-1B

TYPE 1
(See Standard Drawing D-722-1)


TYPE 2
(See Standard Drawing D-722-2)

MOUNTABLE - TYPE A
(See Standard Drawing D-722-3)


MOUNTABLE - TYPE B
(See Standard Drawing D-722-3)

CATCH BASIN - TYPE A
(See Standard Drawing D-722-1A)

CATCH BASIN - BEEHIVE (6 in. or 9 in.)
(See Standard Drawing D-722-1A)

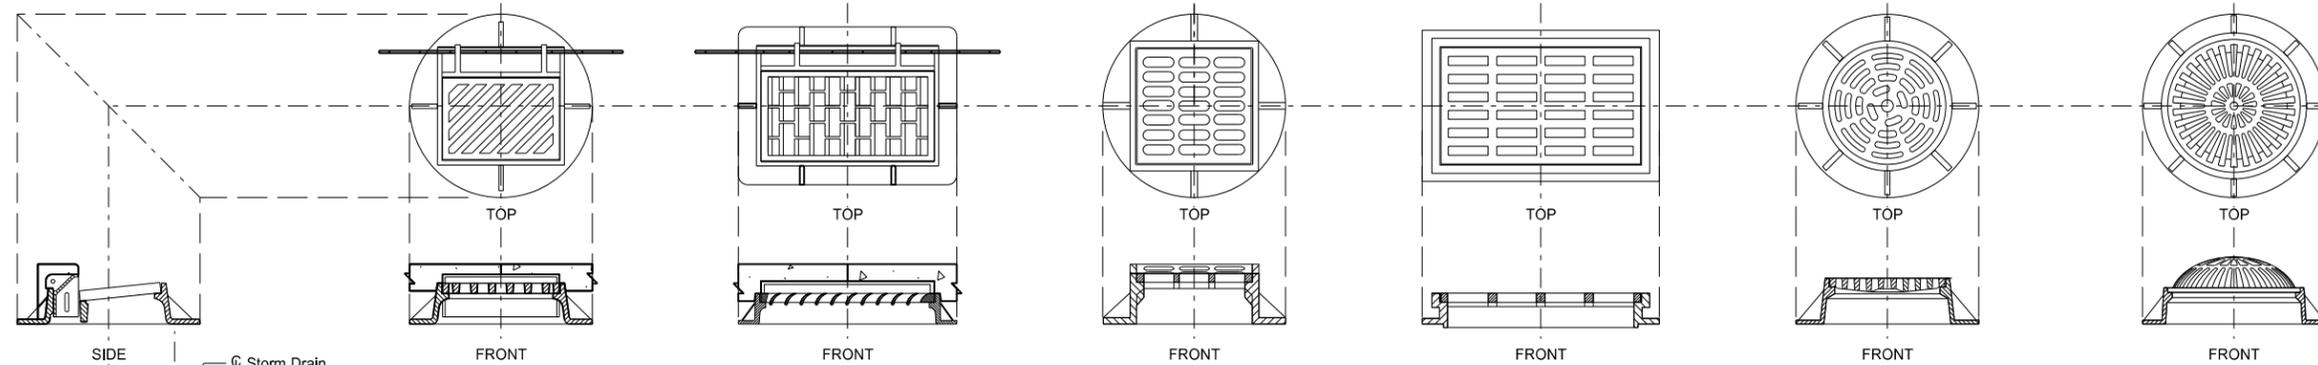

See Note 1.

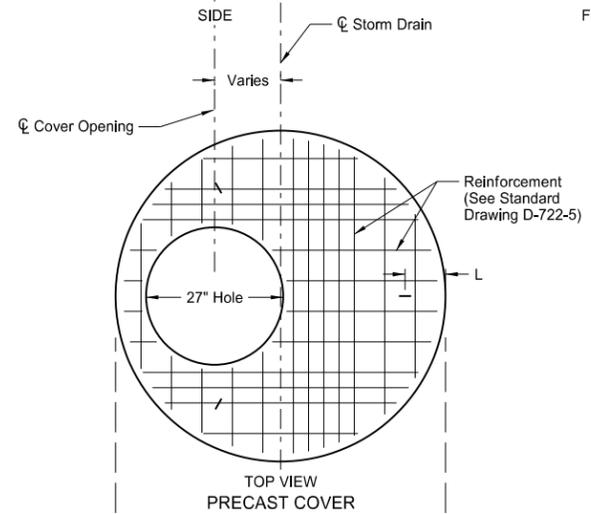

RISER DIAMETER	COVER DIAMETER	BASE DIAMETER
48"	58"	66"
60"	72"	78"
72"	86"	92"


See Note 4.

PAY ITEMS

48 in. Riser	<ul style="list-style-type: none"> Inlet Special - Type 1 48 in. Ea. Inlet Special - Type 2 48 in. Ea. Inlet Special Mountable - Type A 48 in. Ea. Inlet Special Mountable - Type B 48 in. Ea. Inlet Special Catch basin 6 in. beehive 48 in. Ea. Inlet Special Catch basin 9 in. beehive 48 in. Ea. Inlet Special Catch basin - Type A 48 in. Ea. 	
60 in. Riser	<ul style="list-style-type: none"> Inlet Special - Type 1 60 in. Ea. Inlet Special - Type 2 60 in. Ea. Inlet Special Mountable - Type A 60 in. Ea. Inlet Special Mountable - Type B 60 in. Ea. Inlet Special Catch basin 6 in. beehive 60 in. Ea. Inlet Special Catch basin 9 in. beehive 60 in. Ea. Inlet Special Catch basin - Type A 60 in. Ea. 	
72 in. Riser	<ul style="list-style-type: none"> Inlet Special - Type 1 72 in. Ea. Inlet Special - Type 2 72 in. Ea. Inlet Special Mountable - Type A 72 in. Ea. Inlet Special Mountable - Type B 72 in. Ea. Inlet Special Catch basin 6 in. beehive 72 in. Ea. Inlet Special Catch basin 9 in. beehive 72 in. Ea. Inlet Special Catch basin - Type A 72 in. Ea. 	

NOTES:


1. For inlet casting details, see Standard Drawings D-722-1, D-722-21A, D-722-2, and D-722-3. Other castings, similar in dimension, may be used provided the casting meets the requirements set forth in the referenced Standard Drawings. The grate style shall be as specified on the plans and included in the price bid for "Inlet Special - (casting type & riser size)".
2. Metal used in the manufacture of castings shall conform to AASHTO M-105, Class 35B.
3. The Class of concrete, aggregate size, and methods of construction for the manhole riser, cover, and base shall be as detailed in Standard Drawing D-722-5.
4. See Standard Drawing D-722-5 for manhole riser, cover, and base details, dimensions, and reinforcement requirements.
5. The distance between the center of the cover opening and the center of the storm drain shall be noted on the Plan & Profile sheets.
6. Manhole steps, if noted on the Plan and Profile sheets, shall be constructed per Standard Drawing D-722-5.
7. On projects with P.C.C. pavement, all risers shall be constructed 4 to 5 inches below final elevation and adjusted to final elevation after paving. Adjustments may be made with adjusting rings or cast-in-place concrete. All costs for this adjustment shall be included in the price bid for "Inlet - Special, (casting type & riser size)".

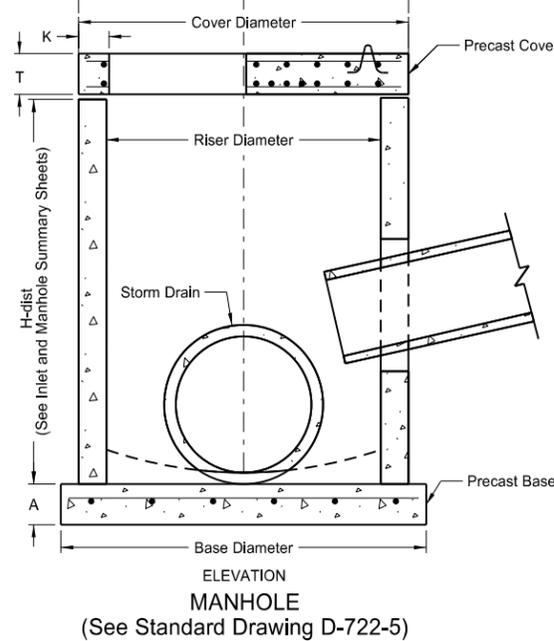


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
03-18-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
 Terrence R. Udland
 Registration Number
 PE-2674 ,
 on 03-18-14 and the original document is stored at the
 North Dakota Department
 of Transportation


Curb & Gutter and Valley Gutter

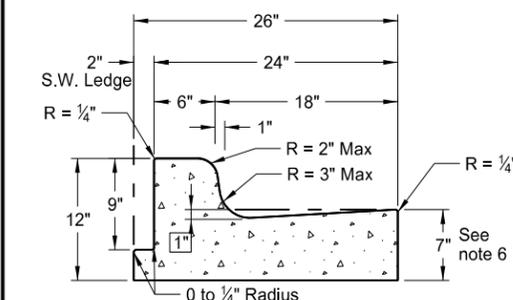


Curb & Gutter Type 1 (Sec. A & B)
Adjacent to Concrete Sidewalk,
Median, or Parking Lot.
(Sec. A shown. See Sec B for
additional details.)

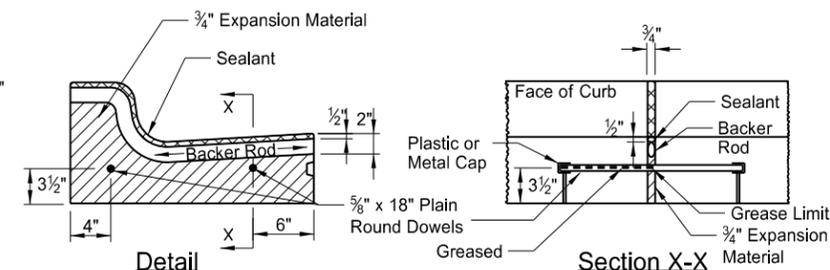

Isolation Joint

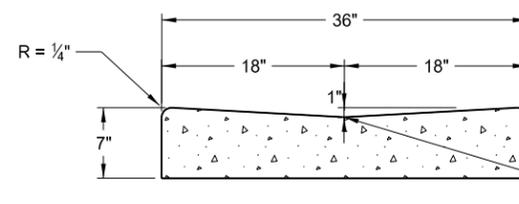


36" Concrete Valley Gutter Detail

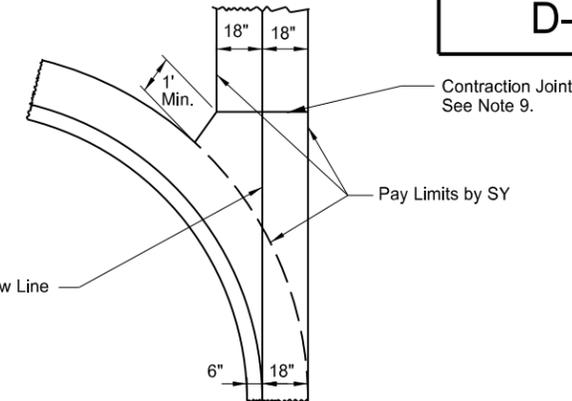


36" Concrete Valley Gutter Plan

NOTES:


1. Curb and Gutter Type 1 (Sec. A & B) to be used. Section "A" to be used with (-) pavement slopes and section "B" to be used with (+) pavement slopes.
2. Contraction Joints: Tool the Curb & Gutter 2" as shown on the contraction joint details.
3. Isolation Joints: Isolation joint material shall be 3/4" preformed expansion joint filler conforming to the standard specifications. The opening for the backer rod and joint sealant shall be formed by a pre-cut piece of wood or other material approved by the engineer. Dowel supports are not required on the second pour at a cold joint, plastic or metal caps and greased dowels shall be installed in the cold joint for the second pour.
4. Joint Spacing: For hot bituminous pavements the joint spacing for the curb and gutter shall be 10' max. with the panels on each side of the inlets. For concrete pavements the joint spacing for the curb and gutter shall match the pavement joint on PCC Pavements of approximately 15' spacing.
5. Joint sealing: All contraction and isolation joints shall be sealed as shown in the details. The joint sealant for contraction joints shall conform to section 826.02B. The sealant for expansion joints shall be as specified in note 3 above. The sealant shall be tooled and installed in accordance with the manufacturer's recommendations.
6. Depth of Face of Gutter: For hot bituminous pavement the depth of gutter shall be 7" as shown. For PCC pavements, the Contractor has the option to match the depth of gutter to the depth of the adjacent PCC pavement or to construct a 7" depth as shown.
7. When the curb and gutter abuts PCC pavement, it shall be tied to the PCC pavement. The tie bar shall consist of a No. 3 bar, 1'-6" in length spaced 4' center to center.
8. On street returns and other locations where the new curb and gutter ends and does not abut existing curb and gutter, the end two (2) feet of the curb shall be tapered from 6" in height to 0". A 1/2" preformed isolation joint which is full depth and the same shape as the curb and gutter shall be installed just ahead of the taper. An 18" tie bar shall be installed across the joint.
9. Valley Gutter Joints: Contraction joints are required at approx. 10' intervals. The contraction joints shall be 1/8" min. to 3/8" max. in width. The joints shall be formed by sawing or scoring to a minimum depth of 2". The joint sealant shall be a hot poured elastic type joint sealer in accordance with Section 826.02A.2 of the Standard Specifications. The joint and sealant shall be included in the price bid for Valley Gutter.

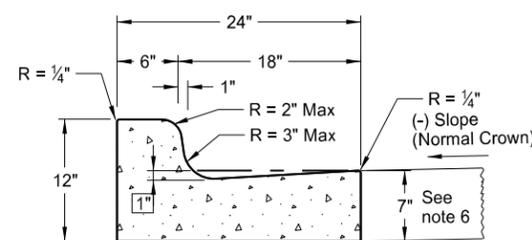


Curb & Gutter Type 1 (Sec. A)

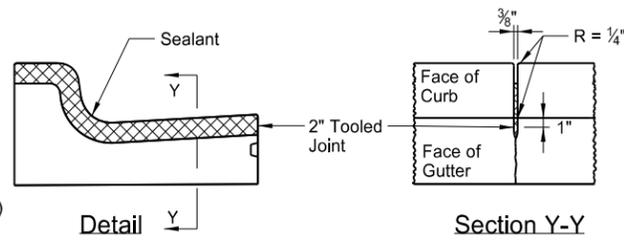


Contraction Joint
(10' Max Spacing)

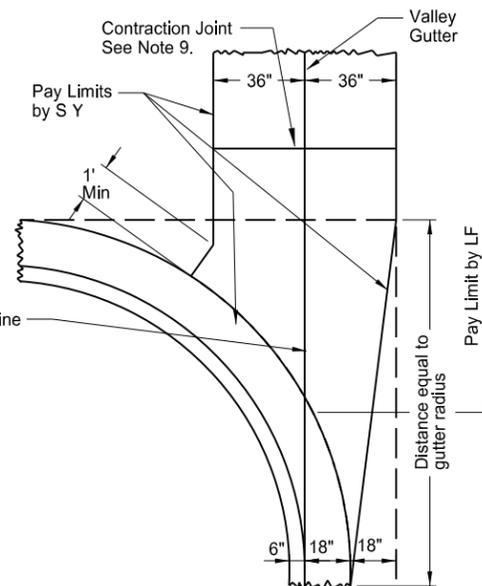


72" Concrete Valley Gutter Detail

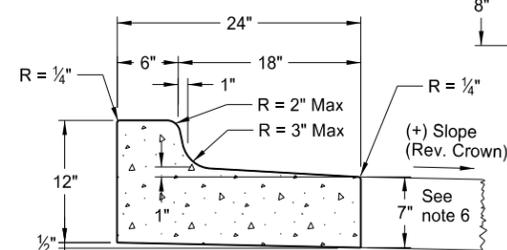


Curb & Gutter Type 1 (Sec. B)

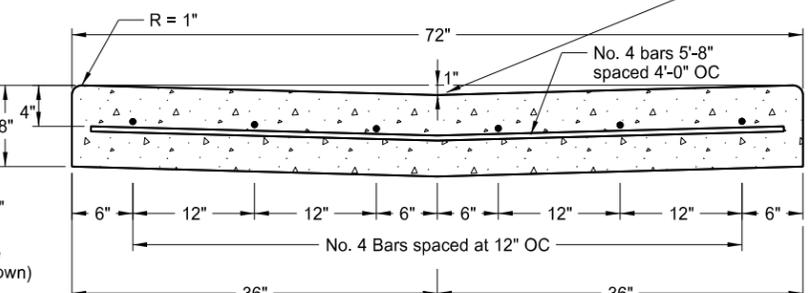


72" Concrete Valley Gutter Detail

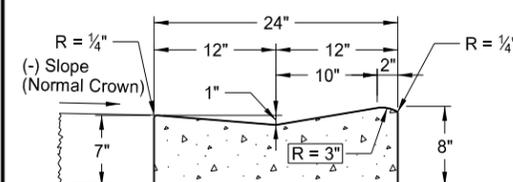


Mountable Curb & Gutter Type 1 (Sec. A)

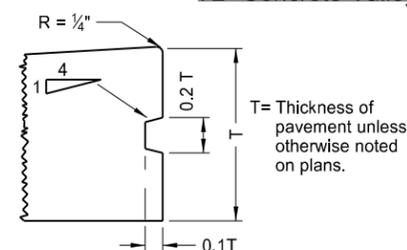


Keyway Detail for Curb & Gutter
(To be used with PCC Pavement and Drives)

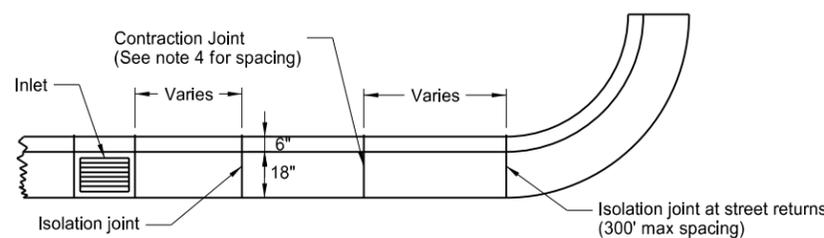


Joint Location Detail

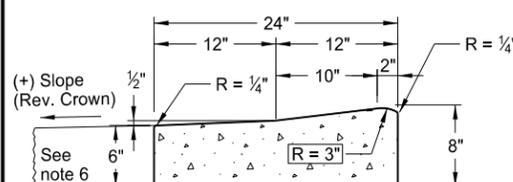

Mountable Curb & Gutter Type 1 (Sec. B)

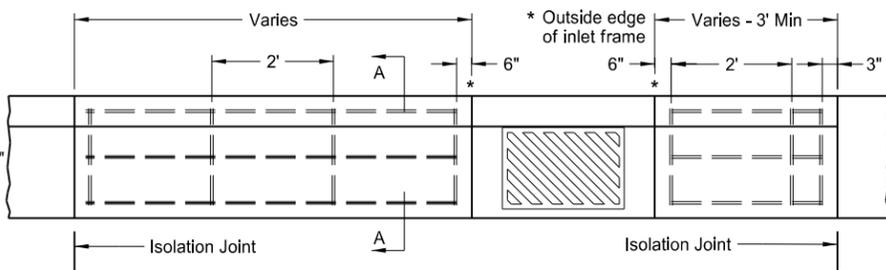

Curb & Gutter Reinforcing at Inlets



Section A-A

NOTE: All bars shall be #4 deformed reinforcing bars. Splices will not be permitted. Reinforcing bars at inlet locations will not be paid for separately, but shall be included in the price bid for "Curb and Gutter - Type 1." This includes inlets located on radii. The reinforcement shall be extended to the second joint (rebar placed through the first joint) in cases where the 3' min. panel length cannot be obtained.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-7-2013	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by
Roger Weigel
Registration Number
PE-2930,
on 08/07/2013 and the original document is stored at the
North Dakota Department
of Transportation

SIDEWALK

D-750-2


NOTES:

1. Curb ramp and detectable warning panel layouts are for informational purposes only. See Standard Drawing D-750-3 for curb ramp and detectable warning panel details.
2. Joint Spacing: Transverse contraction joint spacing shall vary from 4' to 6' to create approximate square panels. Longitudinal contraction joints shall be used where the sidewalk width is 8' or greater, and shall be spaced at half the sidewalk width. The contraction joints may be sawed or a grooved joint, and shall be a minimum of 1/3 the depth of the concrete. When the sidewalk is adjacent to the curb & gutter, the sidewalk joint spacing shall be varied to match up with the curb & gutter joints. Isolation joints should also be used between separately poured concretes, or between old and new concrete. The cost for all labor, equipment, and material necessary to construct contraction and isolation joints shall be included in the price bid for sidewalk concrete.
3. 4" sidewalk concrete thickness to be used unless otherwise specified in the plans.
4. 4" base material thickness to be used unless otherwise specified in the plans. All labor and materials necessary to place the base material shall be included in the price bid for "Salvage Base Course" or "Aggregate Base Course CL 5."
5. Landscaping is preferred to modify existing ground slope changes as needed. If not possible, such as adjacent buildings, a vertical curb may be used as shown in the detail below. The curb will be paid for at the unit price bid for the item "Curb - Type I" per lineal foot.

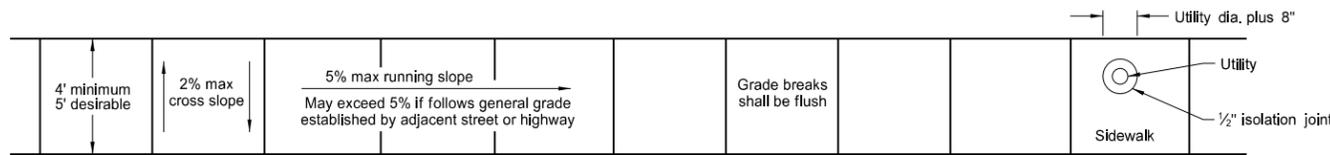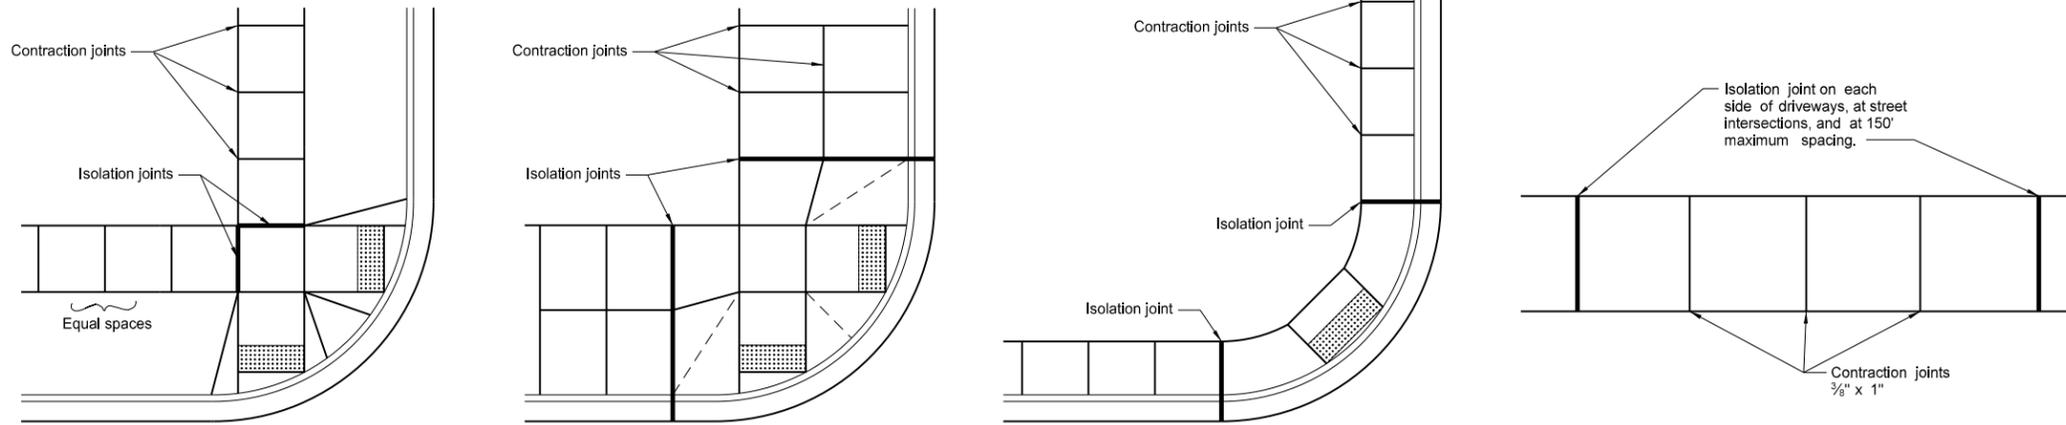


Sidewalk Width and Grade




Utility Blockout

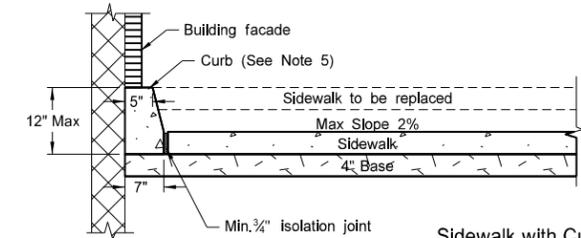


Sidewalk with Curb Detail (Building face application)

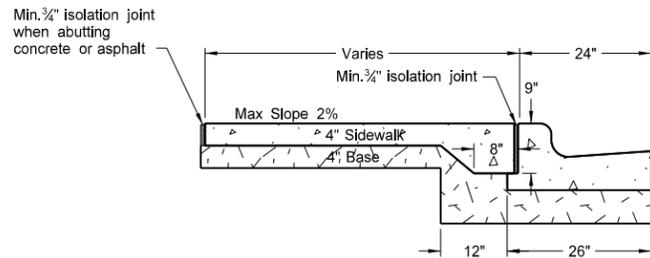


Sidewalk Detail (Installed adjacent to curb and gutter)

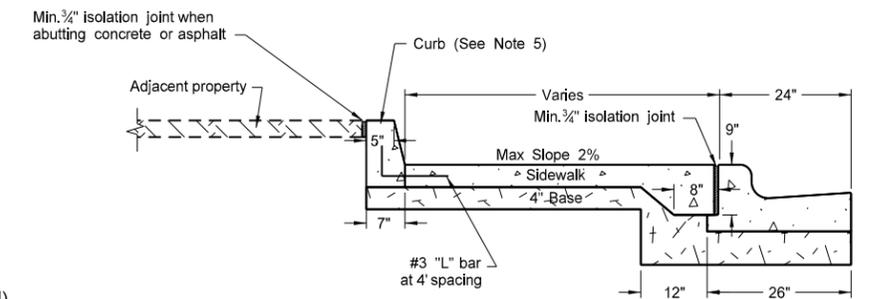

Sidewalk with Curb Detail (Adjacent property application)

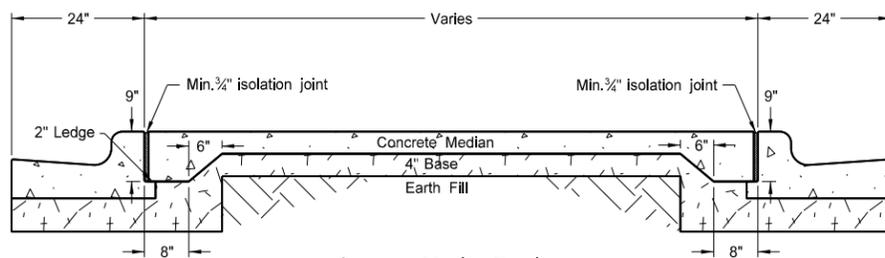

Concrete Median Detail

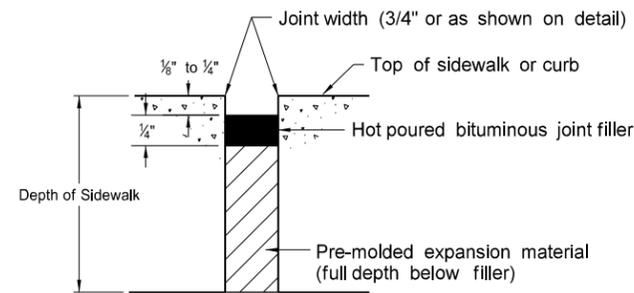

Typical Isolation Joint Seal (longitudinal and transverse)

NORTH DAKOTA	
DEPARTMENT OF TRANSPORTATION	
11-26-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/26/13 and the original document is stored at the North Dakota Department of Transportation

CURB RAMP DETAILS

D-750-3

+More Right of Way








Less Right of Way

NOTES:







- Ramp width is defined as the useable portion of the ramp, excluding flares if used.
Curb ramp width should match the existing sidewalk width, 4' width minimum.
Ramp width for shared-use paths should match the existing shared use path width.
Ramp length shall be maximum of 15'.
- Landings shall be a minimum of 4' x 4' and shall have a max 2% slope in any direction. Landings are desirably 5' x 5' or larger.
- Detectable warning panels shall match the ramp width. Radial panels may also be used. The detectable warning panel may be located within the lower landing.
- The pedestrian access route shall be continuous 4' min. width. Max 2% cross slope applies to all concrete, excluding flares.
- Landscaping is preferred to modify existing ground slope changes as needed. If not possible, such as adjacent buildings, a vertical curb may be used as shown in the detail below. The curb will be paid for at the unit price bid for the item "Curb - Type I" per lineal foot.

LEGEND:

- : Detectable Warning Panel
- : Landscaping
- : Transitional tie-in segment if needed for retrofits. Max grade slope 8.3%.
- : Upper Landing
- : Lower Landing
- 0", 3", or 6" : Curb Height
- 8.3% : All slopes shown are max grades. Flatter slopes may be used.

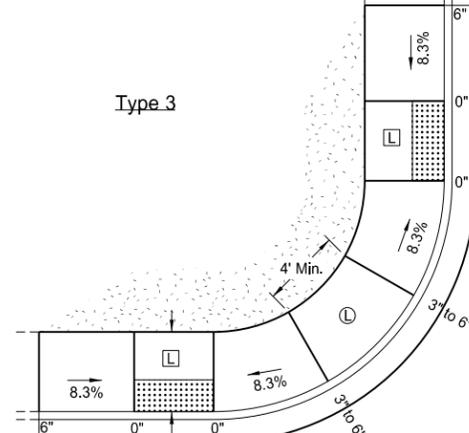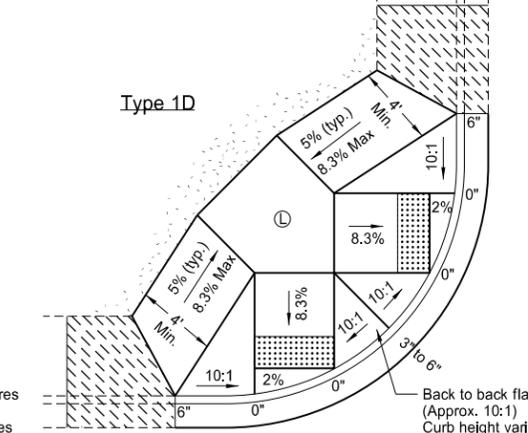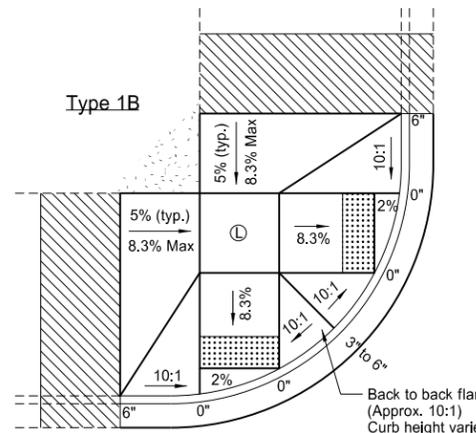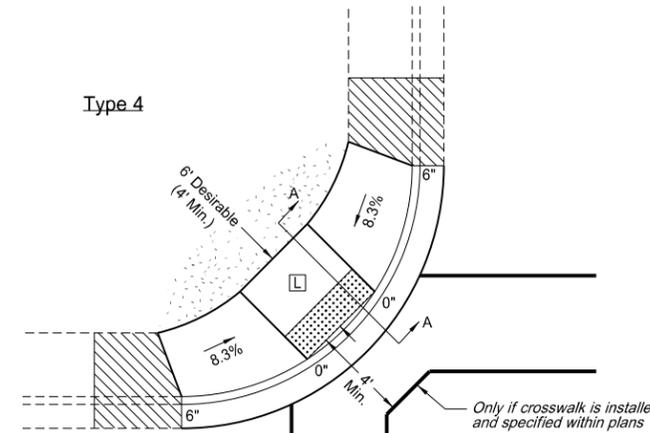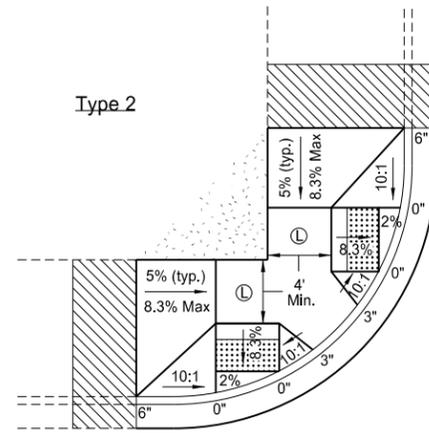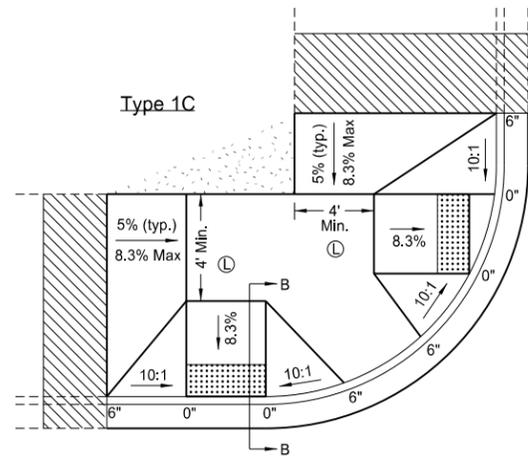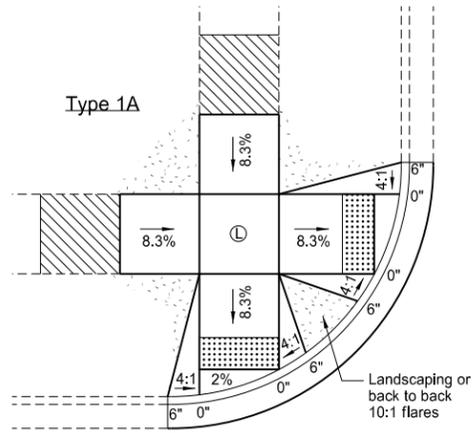

Median Refuge Islands (Cut-Through)

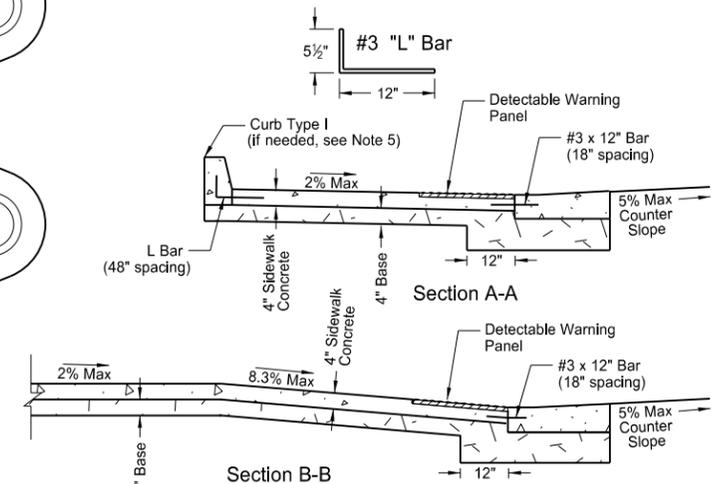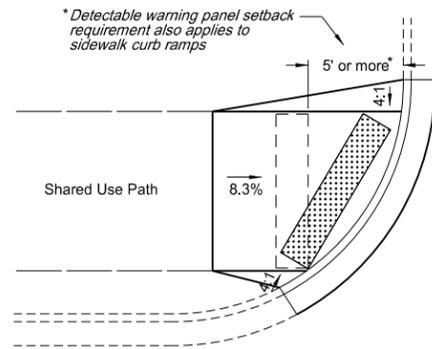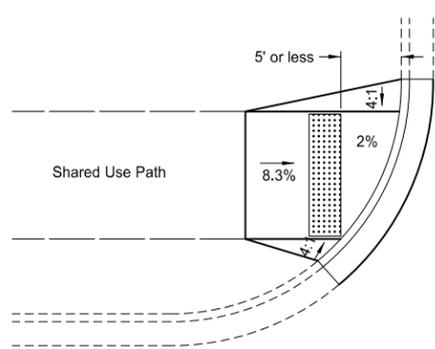
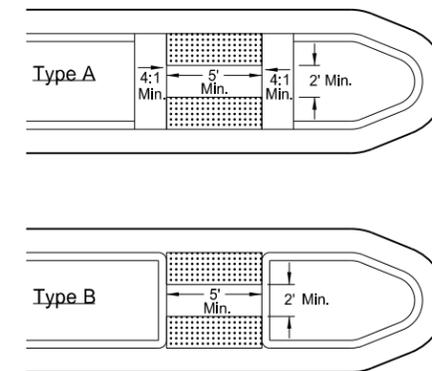


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-26-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/26/13 and the original document is stored at the North Dakota Department of Transportation

CHAIN LINK FENCE


ALTERNATE LINE POST ANCHORAGE

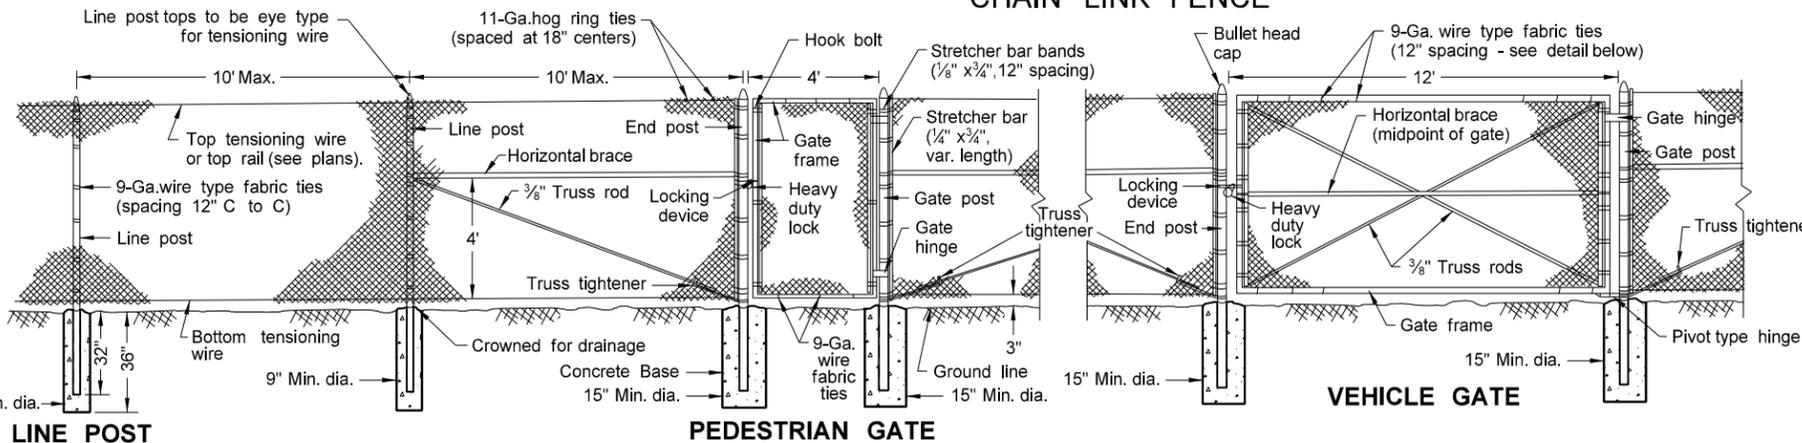


NOTES:

1. Double brace assemblies shall be installed at locations shown on the plans or established by the engineer. The distance between adjacent fence terminals, corner assemblies, or double brace assemblies shall not exceed 1000 feet. No deduction in measured pay length of chain link fence will be made for gates, corner assemblies, double brace assemblies, or fence terminals.
2. All miscellaneous fittings shall be of the type and size recommended by the manufacturer of the fence and approved by the engineer.
3. Height of fabric shall be 6' unless otherwise shown on the plans.
4. Concrete for the post bases shall be Class YE in accordance with Sec. 802 of the Standard Specifications. Course aggregate for concrete mix shall be size No. 4 or 5 at the option of the contractor but shall not be changed during the work except by written permission of the engineer.
5. The contractor shall have the option of using any of the types of posts shown in the table of equivalent post sizes and weights for the specified use.
6. Private fences shall not be connected to the highway right-of-way fence, but may be abutted next to the right-of-way fence.
7. A concrete anchorage shall be used for all end, corner, and brace posts, and for the first line post(s) adjacent to the terminal posts.



LINE POST

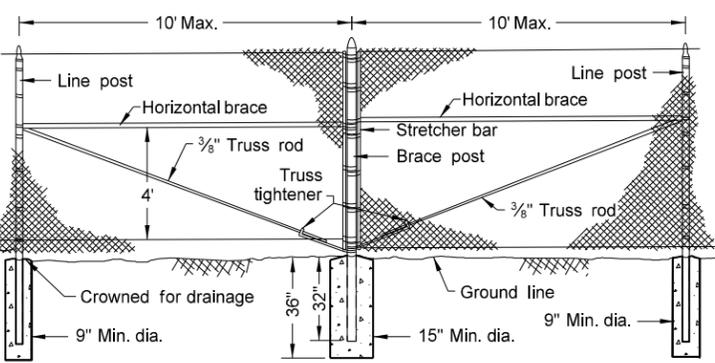


DOUBLE BRACE ASSEMBLY

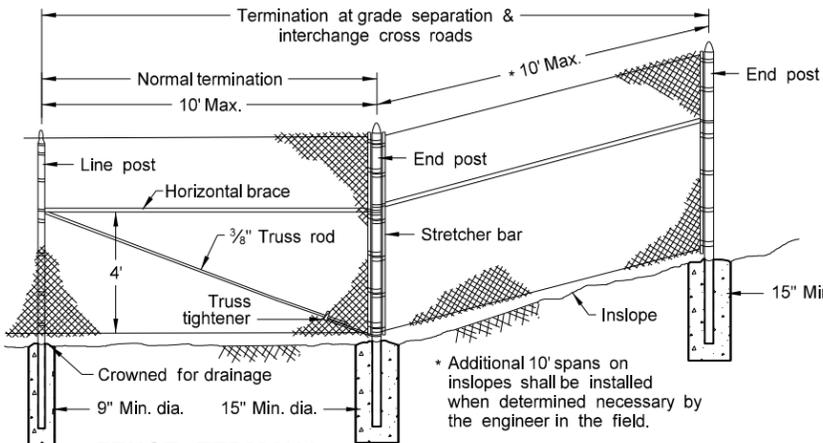


FENCE TERMINAL

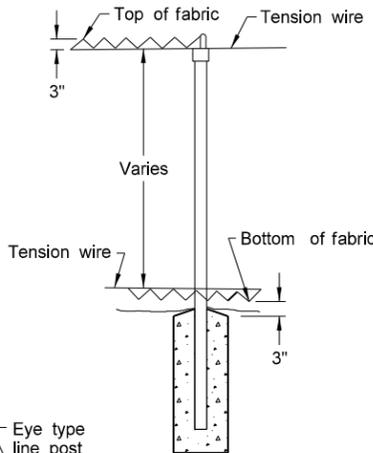


LINE POST TOP DETAIL

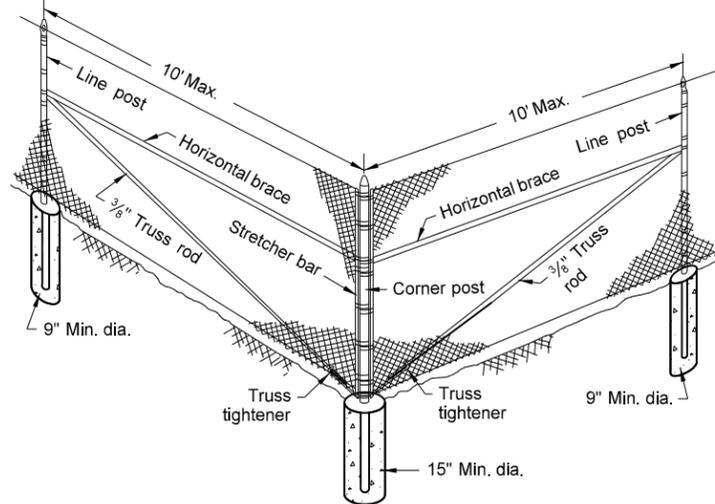


CORNER ASSEMBLY

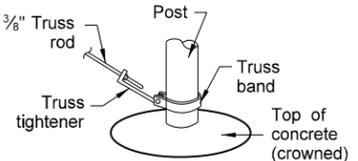


TRUSS ATTACHMENT AT TERMINAL POSTS




BRACE & TRUSS ATTACHMENT



HOG RING FASTENER DETAIL




BRACE ATTACHMENT




TENSION WIRE ANCHORAGE


USE OF POST	FABRIC HEIGHT	EQUIVALENT POST SIZES AND WEIGHTS								
		ROUND STEEL			ROLL FORMED			"H" COLUMN STEEL		
		Size	Weight - Lbs./Ft.		Size	Weight		Size		Weight
LINE POST	6' or less	1.900"	2.72	2.28	1.875"	1.625"	2.40	2.25"	1.70"	3.26
	Over 6'	2.375"	3.65	3.12	2.25"	1.70"	2.78	2.25"	1.70"	3.26
END or CORNER	6' or less	2.375"	3.65	3.12	ROLL FORMED STEEL POSTS NOT PERMITTED	"H" COLUMN STEEL POSTS NOT PERMITTED				
	Over 6'	2.875"	5.79	4.64						
BRACE POST	6' or less	2.375"	3.65	3.12						
	Over 6'	2.875"	5.79	4.64						
GATE POST	6' or less	3.500"	7.58	5.71						
	Over 6'	4.000"	9.11	6.56						
EXTERIOR FRAME FOR GATE	Gate width 6' or less	1.660"	2.27	1.84						
	Gate width over 6'	1.900"	2.72	2.28						
HORIZONTAL BRACE	All	1.660"	2.27	1.84	1.625" x 1.25"		1.35			




LINE POST




TOP & BRACE RAIL



ROLL FORMED POST



"H" COLUMN POST



WIRE TYPE FABRIC TIE DETAIL




STRETCHER BAR BAND

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-5-09	
REVISIONS	
DATE	CHANGE
9-28-10	Revised Equivalent Post Sizes and Weights, details, & notes

This document was originally issued and sealed by Roger Weigel Registration Number PE- 2930 , on 9/28/10 and the original document is stored at the North Dakota Department of Transportation

LETTER AND ARROW DETAILS FOR VARIABLE LENGTH SIGNS



D-754-9

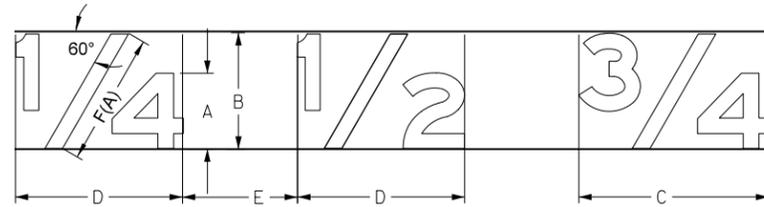

SIZE OF THE FRACTION IS DETERMINED AS FOLLOWS:


SYMBOL	TITLE	RATIO TO HEIGHT OF CAPITAL OR UPPER CASE
A	Letter height	1.0 of capital or upper case
B	Fraction height	1.5 X A
C	Fraction width	2.5 X A
D	Fraction width	2 X A
E	Space to next character	1 to 1.5 X A
F(A)	Length of diagonal	1.75 X A

(A) Diagonal stroke of fraction is to be centered optically.

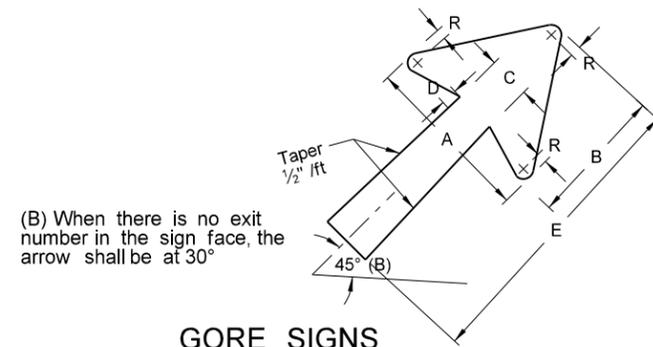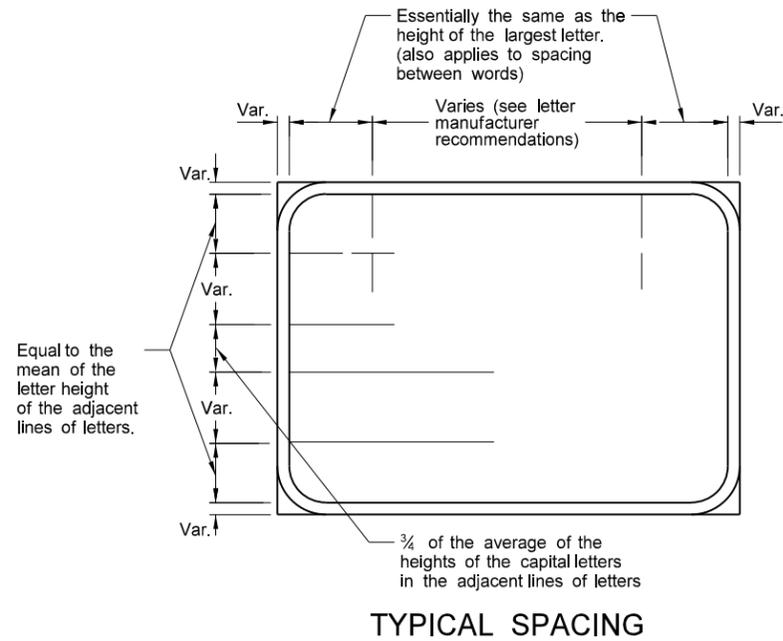


GORE SIGNS

"EXIT" LETTER SIZE (Upper Case)	A	B	C	D	E	R
8"	15 1/8"	11 1/16"	3 3/4"	1 5/16"	25"	13 1/16"
10" - 13 1/3"	18 1/4"	14"	4 1/2"	1 1/2"	30"	3/4"

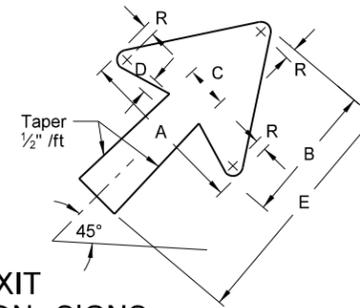


EXIT DIRECTION SIGNS

LETTER SIZE (Upper Case)	A	B	C	D	E	R
8"	15 1/8"	11 1/16"	3 3/4"	1 5/16"	17"	13 1/16"
10" - 13 1/3"	18 1/4"	14"	4 1/2"	1 1/2"	20"	3/4"
16" - 20"	22 1/4"	17"	5 3/8"	1 3/4"	25"	1"



DISTANCE AND DESTINATION SIGNS

LETTER SIZE (Upper Case)	A	B	C	D	E	F
4"	1 3/4"	2"	3 9/16"	5/16"	3/8"	6"
6"	2 3/4"	3"	5 9/16"	7/16"	9/16"	9"
8"	3 1/2"	4"	7 1/8"	9/16"	1 1/16"	12"
12"	5 1/4"	6"	10 5/8"	1 3/16"	1 1/16"	18"

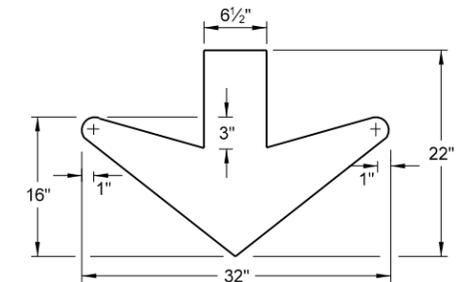

DOWN ARROW

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-3-11	
REVISIONS	
DATE	CHANGE
7-8-14	Revised gore sign and added 4" D & D arrow


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 7/8/14 and the original document is stored at the North Dakota Department of Transportation

PERFORATED TUBE ASSEMBLY DETAILS

D-754-23


Notes:

1. Curbed Roadways: The clearance from the face of the curb should be 3' except where right of way or sidewalk width is limited, a minimum clearance of 2' shall be provided. The horizontal clearance may need to be increased to maintain a minimum sidewalk clear width of 4' from the sign support, not including any attached curb.
2. Minimum vertical clearance: Signs installed at the side of the road in rural districts shall be at least 5' measured from the bottom of the sign to the edge of the driving lane or auxiliary lane. Where parking or pedestrian movements occur, the clearance to the bottom of the sign shall be at least 7'.
- Signs on expressways shall be installed with a minimum height of 7'.
- Adopt-a-highway signs installed on Freeways shall be at least 7' above the edge of the driving lane.
- The vertical clearance shall have a maximum height of 6" above the vertical clearance specified above.
3. Offset signs: Where signs are placed at least 30 feet or more from the edge of the traveled way, the height to the bottom of such sign shall be 5' above the edge of the driving lane.
4. The clearance from edge of shared use path to edge of sign should be 3' except where width is limited, a minimum clearance of 2' shall be provided.

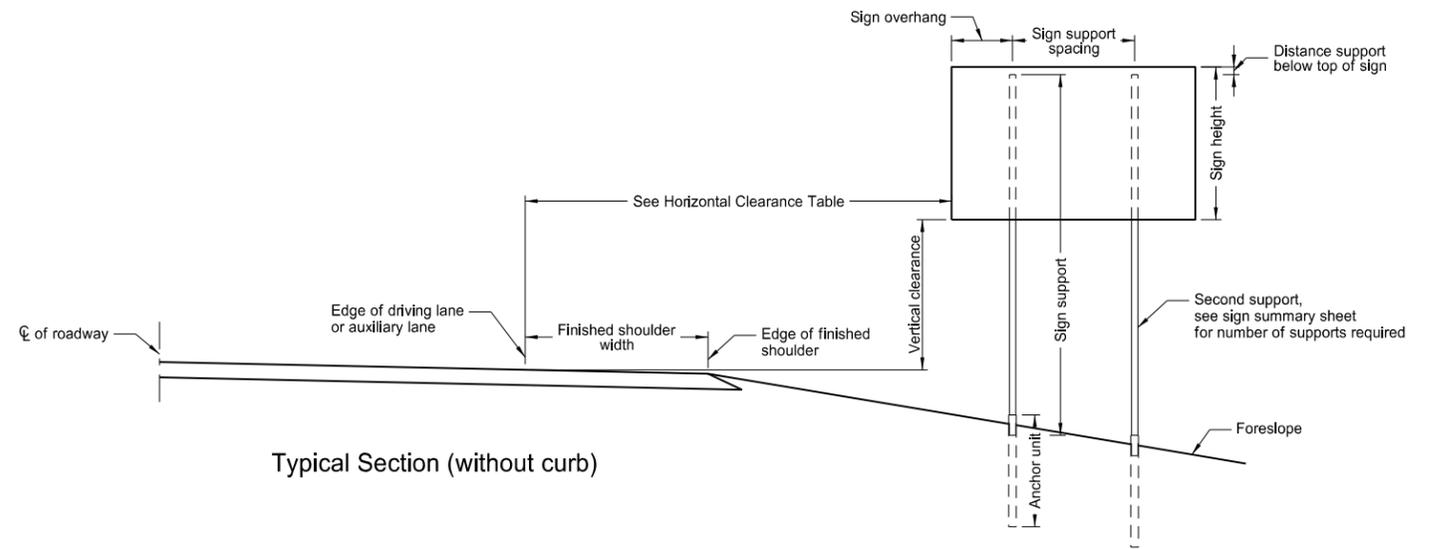


Typical Section (without curb)

Horizontal Clearance Table	
Shoulder Width ft	Offset ft
0 to 2	16
>2 to 4	18
>4 to 6	20
>6 to 8	22
>8 to 10	24

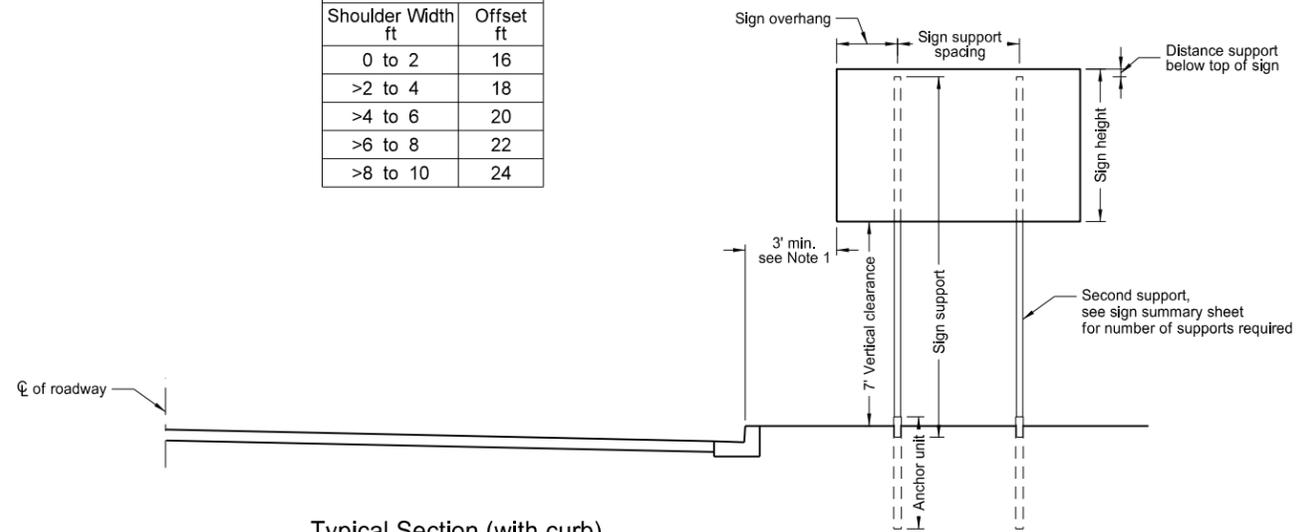


Typical Section (with curb)
Residential or Business District

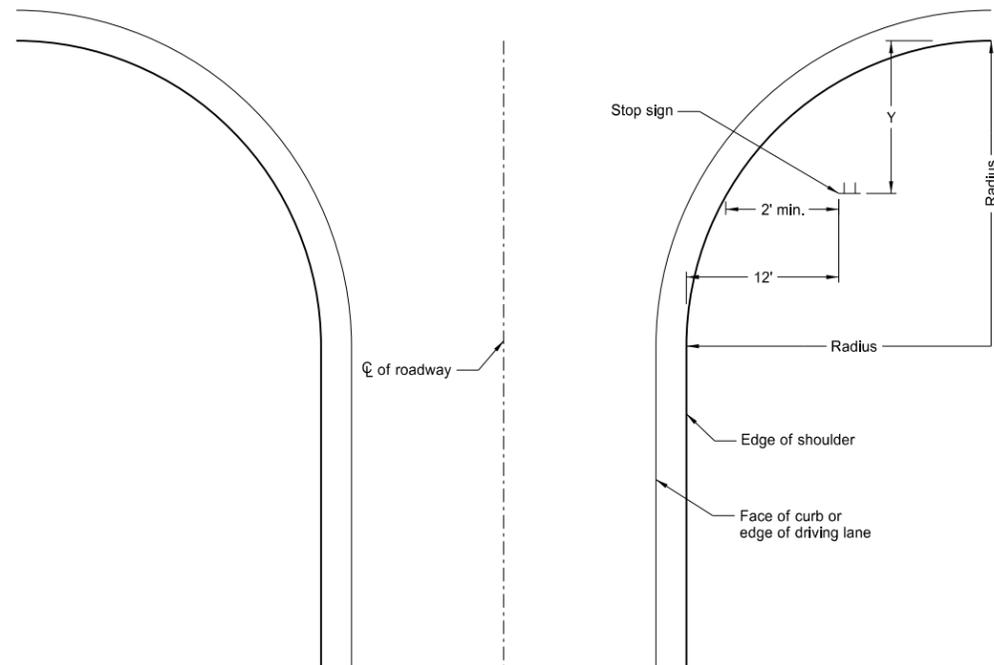

Stop Sign Location
Wide Throat Intersection

This layout is to be used for the placement of "Stop" signs.

Radius ft.	Y-max. ft.	Y-min. ft.
40	50	15
45	50	18
50	50	21
55	50	25
60	50	28
65	50	32
70	50	35
75	50	39
80	50	43

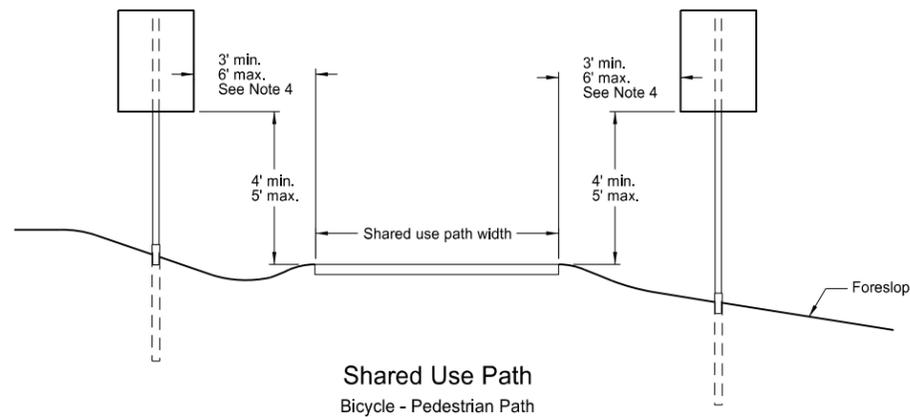



Shared Use Path
Bicycle - Pedestrian Path

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
7-8-14	Revised note 2, added note 4.




This document was originally issued and sealed by
Roger Weigel
 Registration Number
 PE-2930,
 on 7/8/14 and the original document is stored at the
 North Dakota Department
 of Transportation

Telescoping Perforated Tube							
Number of Posts	Post Size In.	Wall Thickness Gauge	Sleeve Size In.	Wall Thickness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thickness Gauge
1	2	12			No	2 1/4	12
1	2 1/4	12			No	2 1/2	12
1	2 1/2	12			(B)	3(C)	7
1	2 1/2	10			Yes		7
1	2 1/4	12	2 1/2(D)	12	Yes		7
1	2 1/2	12	2 1/4	12	Yes		7
2	2 1/2	10			Yes		7
2	2 1/4	12	2 1/2(D)	12	Yes		7
2	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/2	12			Yes		7
3 & 4	2 1/2	10			Yes		7
3 & 4	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/2	12	2 1/2(D)	12	Yes		7
3 & 4	2 1/2	10	2 1/8	10	Yes		7

(B) - The 2 1/2", 12 gauge posts do not need breakaway bases when placed in standard soils, but require a shim as specified by the manufacturer. The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.
 (C) - 3" anchor unit
 (D) - 2 1/2" x 12 ga. x 18" minimum length external sleeve required.

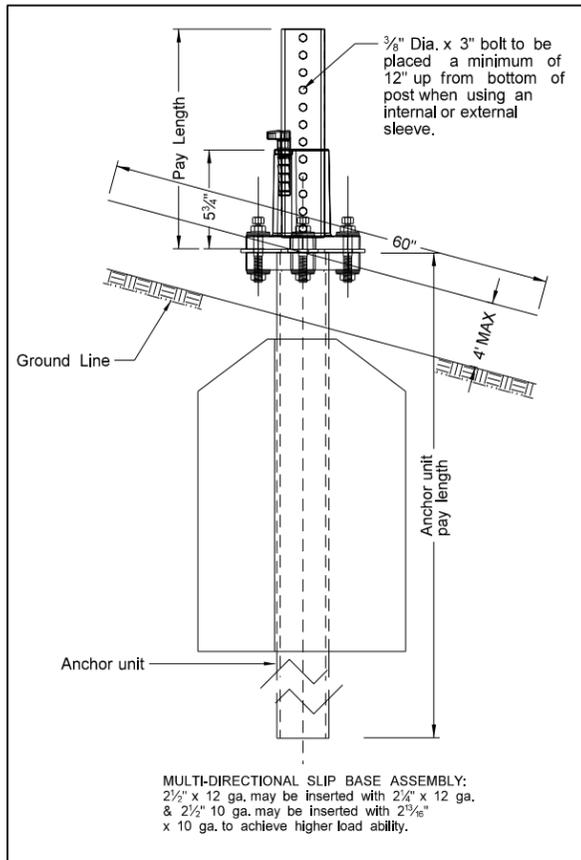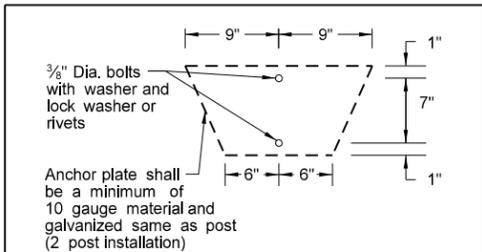

Mounting Details Perforated Tube

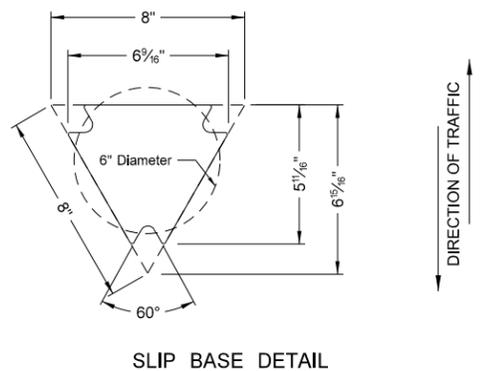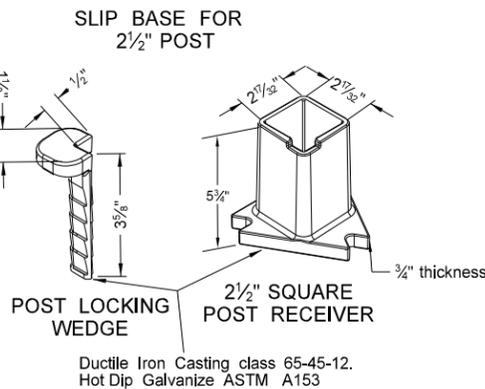
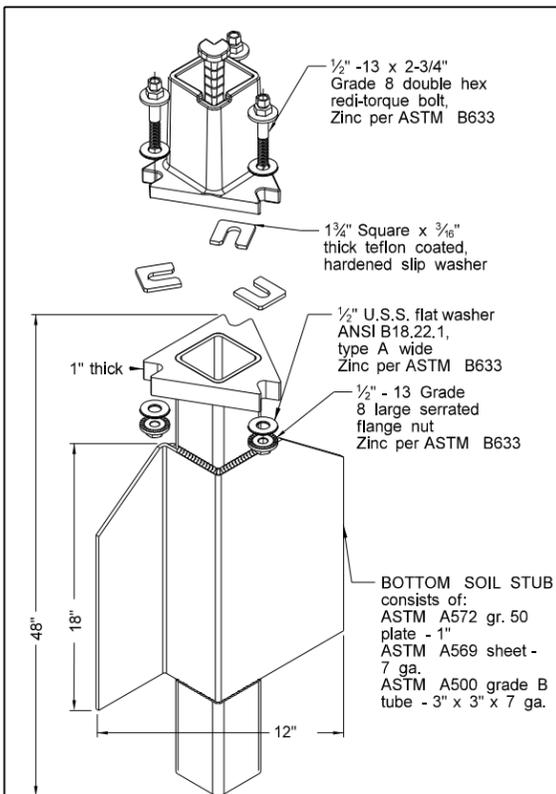


Properties of Telescoping Perforated Tubes							
Tube Size In.	Wall Thickness In.	U.S. Standard Gauge	Weight Per Foot Lbs.	Moment of Inertia In. ⁴	Cross Sect. Area In. ²	Section Modulus In. ³	
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172	
2 x 2	0.105	12	2.416	0.372	0.590	0.372	
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499	
2 3/8 x 2 3/8	0.135	10	3.432	0.605	0.841	0.590	
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643	
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.783	

The 2 3/8" size 10 gauge is shown as 2.19" size on the plans;
 The 2 1/2" size is shown as 2.51" size on the plans.

NOTE:

- 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and below post location and also back and ahead of post.
- Anchor material shall be 7 gauge H.R.P.O. Commercial quality ASTM A569 and 3" x 3" x 7" gauge ASTM A500 grade B. Anchor shall have a yield strength 43.9 KSI and tensile strength of 59.3 KSI. Anchor shall be hot dipped galvanized per ASTM A123/153. All tolerances on anchor unit and slip base bottom assembly are +/- 0.005" unless otherwise noted.
- When used in concrete sidewalk, anchor shall be the same concept without the wings.
- Four post signs shall have over 8" between the first and fourth posts.
- Installation procedures as per manufacturers recommendation.
- Concrete fasteners for surface mount breakaway base shall be a minimum 1/2" diameter x 4" grade 8.

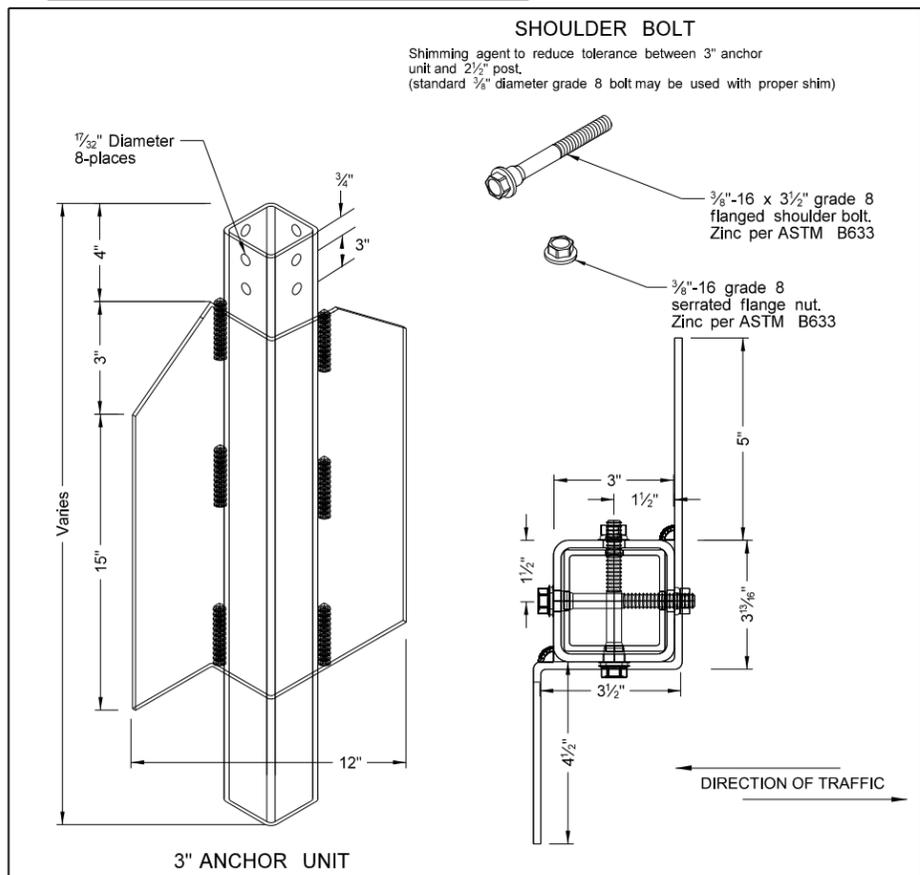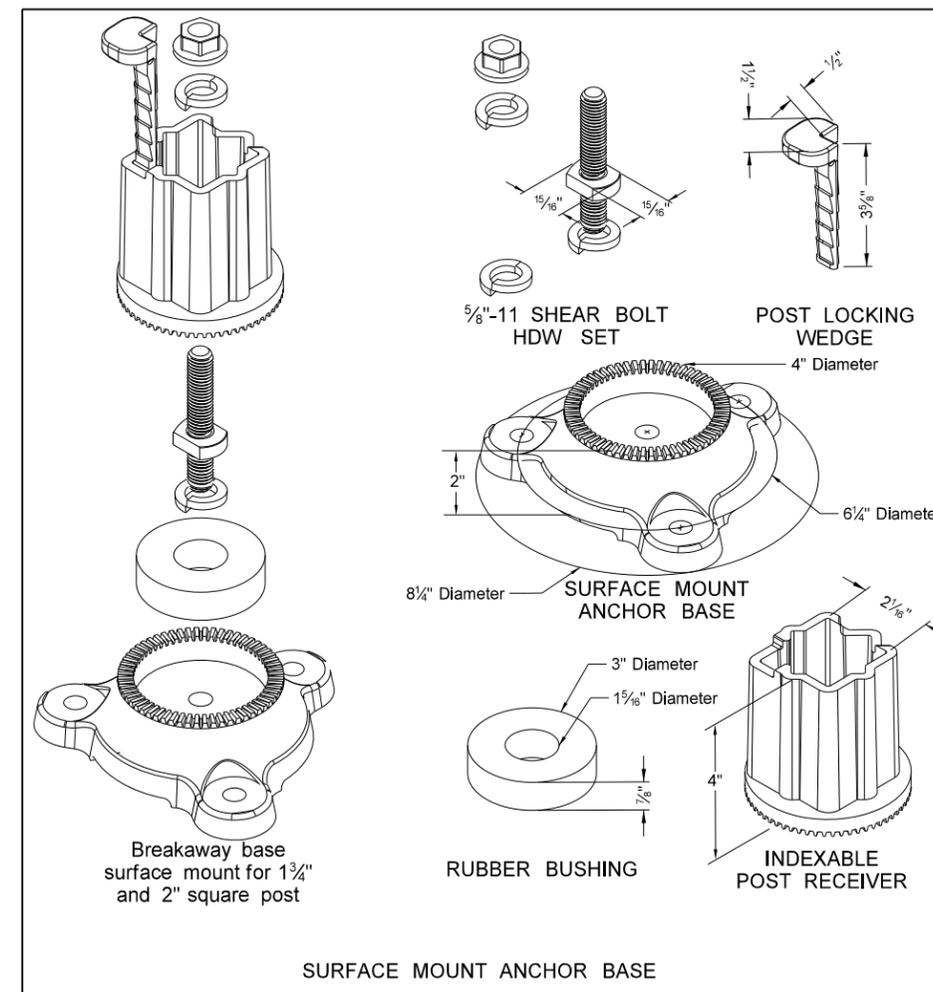



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-8-09	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 08/06/09 and the original document is stored at the North Dakota Department of Transportation

Breakaway Coupler System for Perforated Tubes

Notes:


- 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and below post location and also back and ahead of post.
- Anchor unit shall be the same size as the post and shall have the same specification as the post.
- Four post signs shall have over 8' between the first and fourth post.
- In lieu of the breakaway base system on standard D-754-24 the breakaway coupling system may be used. The breakaway coupler system shall be manufactured from material meeting the requirements of ASTM A325 fasteners with the special requirements as specified by DENT BREAKAWAY IND., INC. which meets the test requirements of NCHRP Report 350.

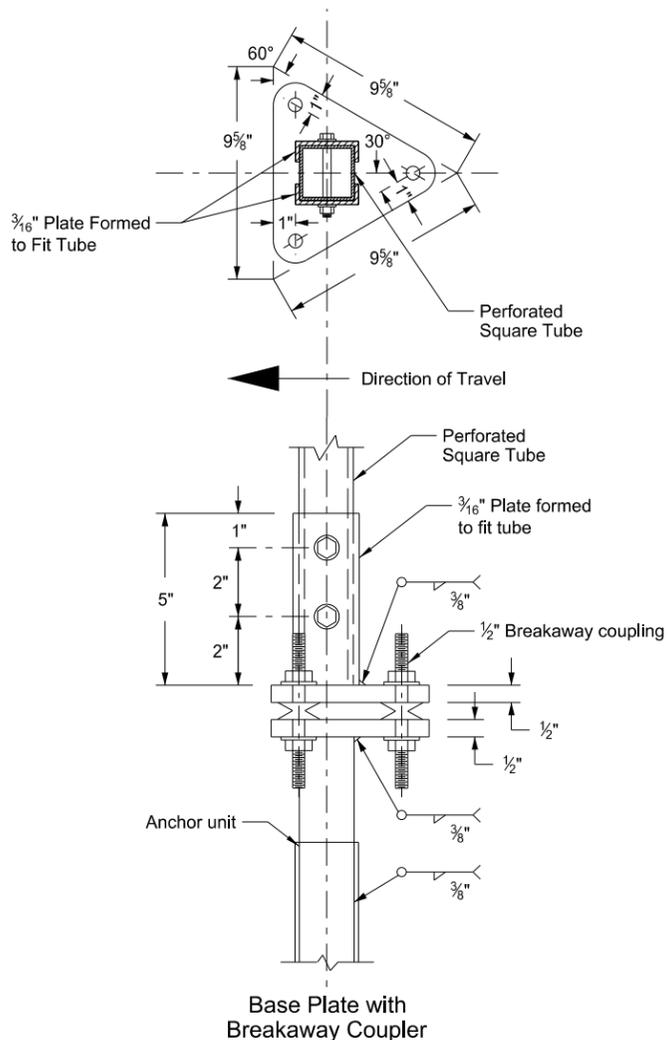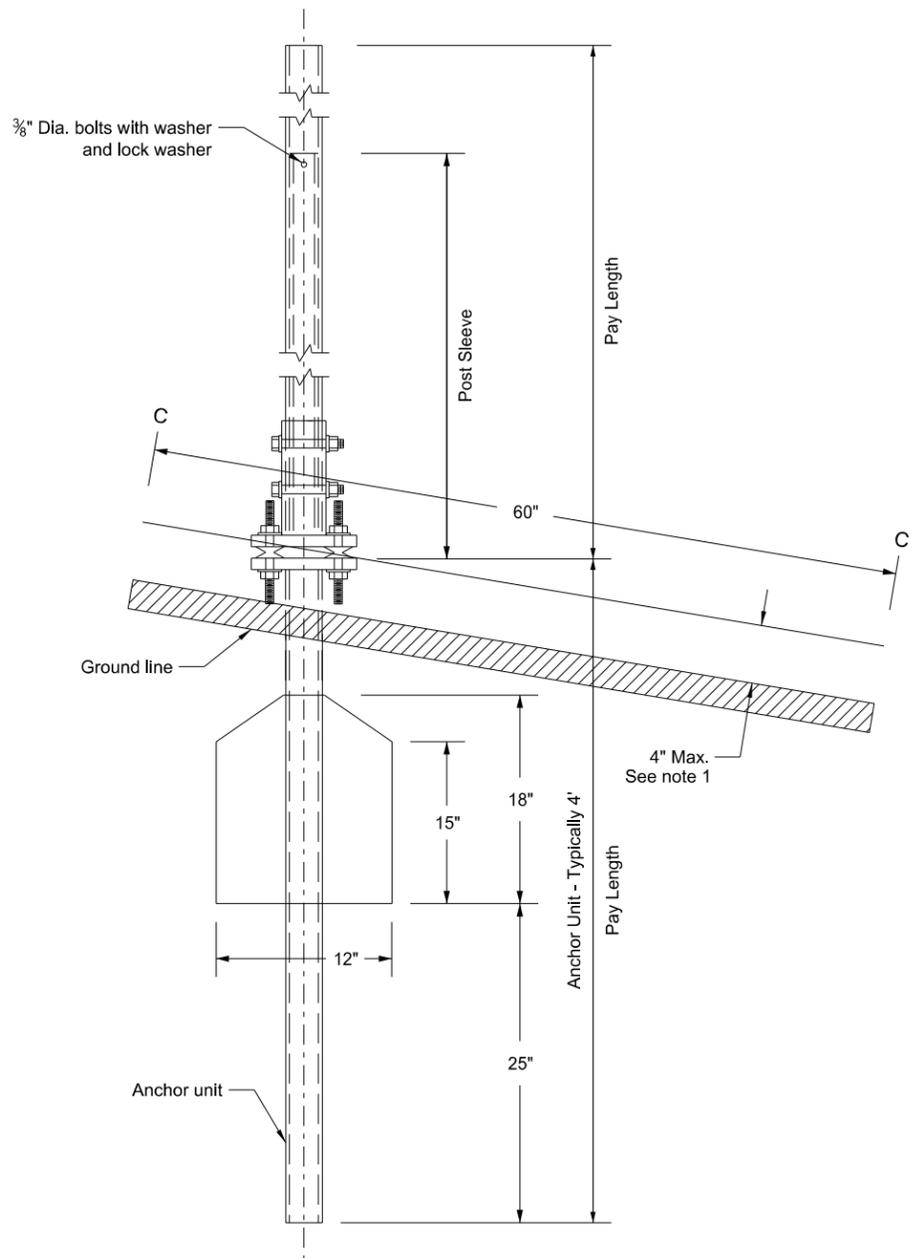


Number of Posts	Telescoping Perforated Tube						
	Post Size In.	Wall Thickness Gauge	Sleeve Size In.	Wall Thickness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thickness Gauge
1	2	12			No	2 1/4	12
1	2 1/4	12			No	2 1/2	12
1	2 1/2	12			(B)	3(C)	7
1	2 1/2	10			Yes		7
1	2 1/4	12	2	12	Yes		7
1	2 1/2	12	2 1/4	12	Yes		7
2	2 1/2	10			Yes		7
2	2 1/4	12	2	12	Yes		7
2	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/2	12			Yes		7
3 & 4	2 1/2	10			Yes		7
3 & 4	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/4	12	2	12	Yes		7
3 & 4	2 1/2	10	2 3/16	10	Yes		7

(B) - The 2 1/2" 12 gauge posts do not need breakaway bases when placed in standard soils. The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.

(C) - 3" anchor unit

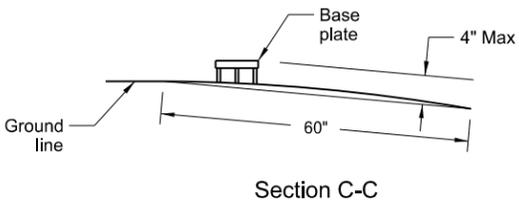

Max. protection of the stub post is 4" above a 60" chord aligned radially to the center line of the highway and connecting any point, within the length of the chord, on the ground surface on one side of the support to a point in the ground surface on the other side.

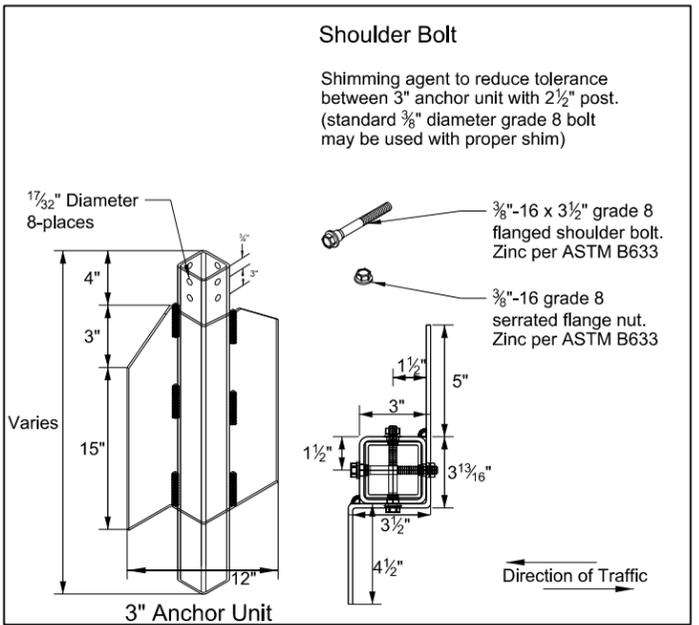


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-2013	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation


Mounting Details Perforated Tube

Note:

- Horizontal stringers - In lieu of perforated tubes, the contractor may substitute z bar stringers. The z bar stringers shall be 1 1/2" x 3/16" thick, 1.08 lbs./ft aluminum or 3.16 lbs./ft steel.
- Metal washers used on sign face shall have a minimum outside diameter of 5/16" ± 1/65" and 10 gauge thickness.
- No Parking Signs: All no parking signs with directional arrows shall be placed at a 30 to 45 degree angle with the line of traffic flow. No parking signs required at the above angles may have the support turned to the correct angle. If the no parking sign is placed with another sign that has to be placed at a 90 degree angle with the line of traffic flow, the detailed angle strap should be used to mount the no parking sign. Flat washers and lock washers shall be used with all nylon washers.
- In lieu of using the bent bolt to attach the post to the stringer, the contractor may choose to punch the sign backing and place the bolt through the sign, the stringer and the post.
- 4" vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and below post location and also back and ahead of post.

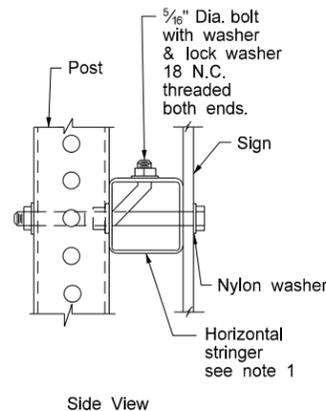


Side View

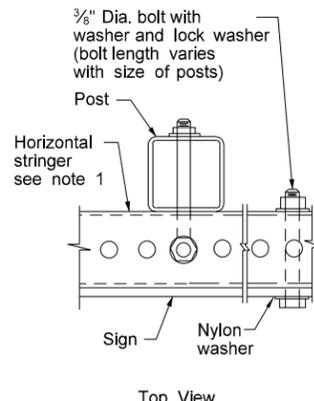


Top View

STRINGER MOUNTING
(WITH STRINGER IN FRONT OF POST)

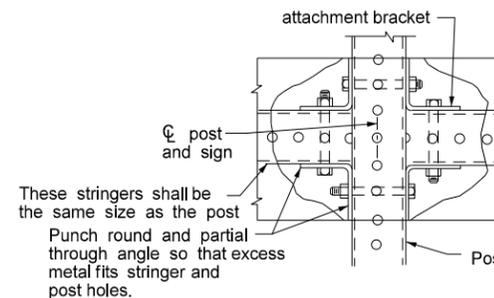


These stringers shall be the same size as the post. Punch round and partial through angle so that excess metal fits stringer and post holes.

STREET NAME SIGNS
AND ONE WAY SIGNS
SINGLE POST ASSEMBLY
ONE STRINGER OR
BACK TO BACK MOUNTING




Side View

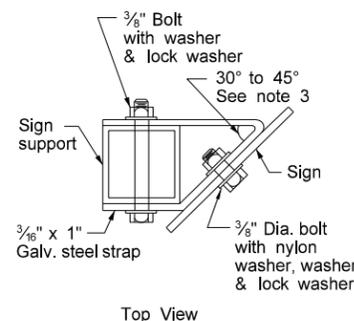

Top View


STRAP DETAIL

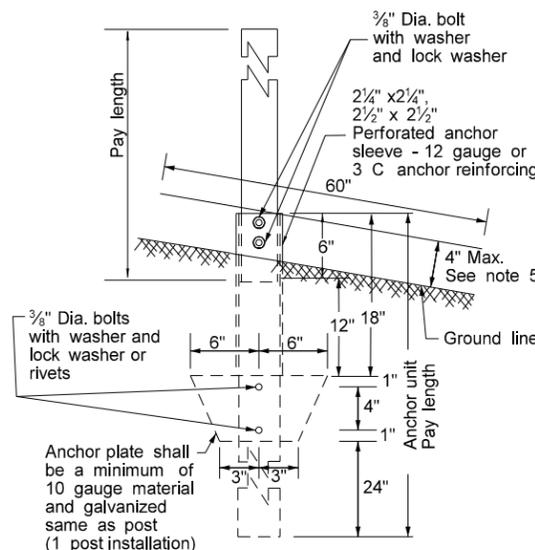


ANCHOR UNIT AND
POST ASSEMBLY

Number of Posts	Telescoping Perforated Tube						
	Post Size In.	Wall Thickness Gauge	Sleeve Size In.	Wall Thickness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thickness Gauge
1	2	12			No	2 1/4	12
1	2 1/4	12			No	2 1/2	12
1	2 1/2	12			(B)	3(C)	7
1	2 1/2	10			Yes		7
1	2 1/4	12	2 1/2(D)	12	Yes		7
1	2 1/2	12	2 1/4	12	Yes		7
2	2 1/2	10			Yes		7
2	2 1/4	12	2 1/2(D)	12	Yes		7
2	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/2	12			Yes		7
3 & 4	2 1/2	10			Yes		7
3 & 4	2 1/2	12	2 1/4	12	Yes		7
3 & 4	2 1/4	12	2 1/2(D)	12	Yes		7
3 & 4	2 1/2	10	2 3/16	10	Yes		7

(B) - The 2 1/2", 12 gauge posts do not need breakaway bases when placed in standard soils, but require a shim as specified by the manufacturer. The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.
(C) - 3" anchor unit
(D) - 2 1/2" x 12 ga. x 18" minimum length external sleeve required.




BOLT MOUNTING

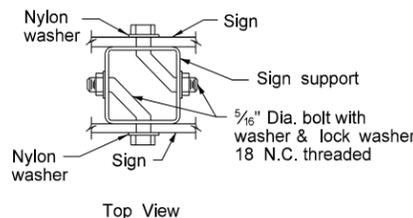

Top View

BACK TO BACK
MOUNTING

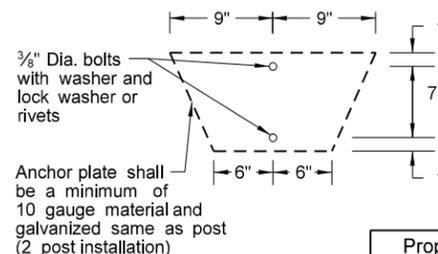


Properties of Telescoping Perforated Tubes						
Tube Size In.	Wall Thickness In.	U.S. Standard Gauge	Weight Per Foot Lbs.	Moment of Inertia In. ⁴	Cross Sect. area In. ²	Section Modulus In. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.783

The 2 3/16" size 10 gauge is shown as 2.19" size on the plans. The 2 1/2" size is shown as 2.51" size on the plans.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-6-09	
REVISIONS	
DATE	CHANGE
7-8-14	Revised Note 3

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 7/8/14 and the original document is stored at the North Dakota Department of Transportation


SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS REGULATORY, WARNING AND GUIDE SIGNS




1 Post




2 Posts

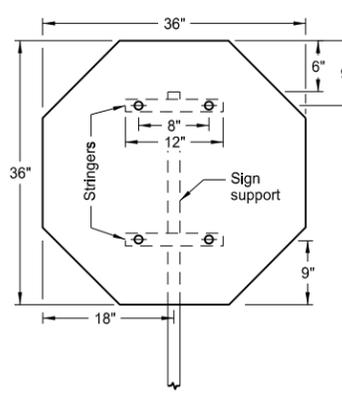

1 Post



2 Posts




3 Posts

Assembly No. 1


Assembly No. 2

Notes:


1. See Standard D-754-25 for mounting details.
2. The minimum sign backing material thickness shall be 0.100 inch.
3. Perforated square tube stringer shall be 1½" x 1½".
4. All holes shall be punched round for ⅜" bolt.

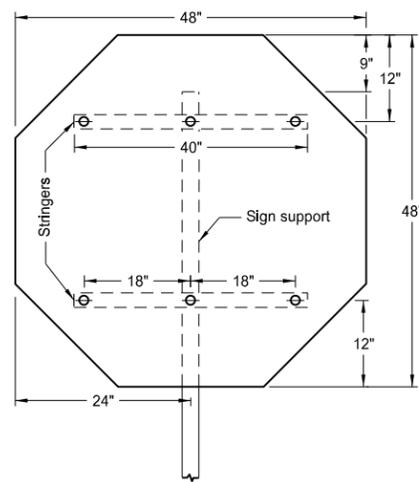

1 Post

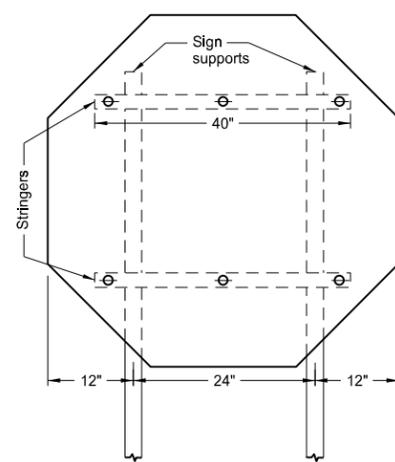


2 Posts

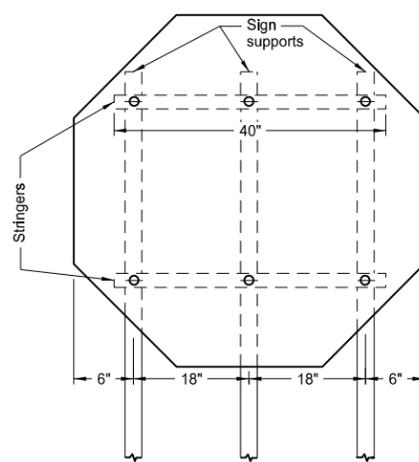


3 Posts

Assembly No. 3

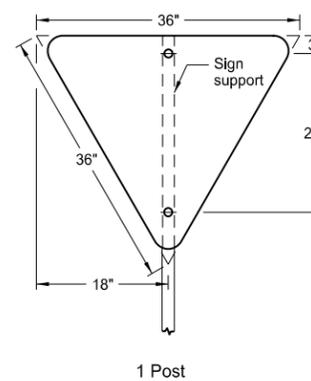


1 Post




2 Posts


Assembly No. 4

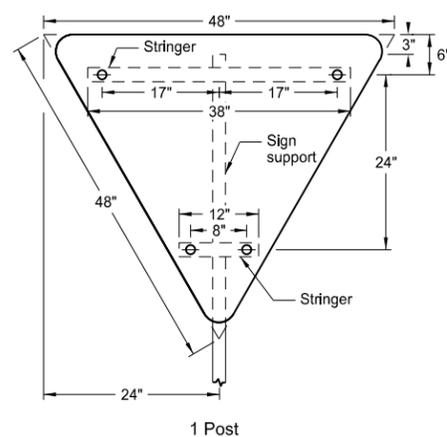

1 Post

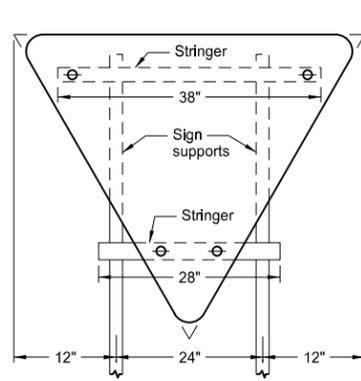

2 Posts

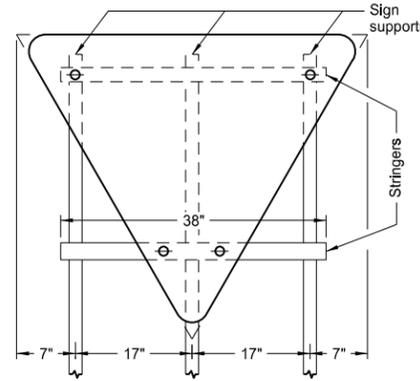


3 Posts

Assembly No. 5


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 12-1-10 and the original document is stored at the North Dakota Department of Transportation


SIGN PUNCHING, STRINGER AND SUPPORT LOCATION
DETAILS REGULATORY, WARNING AND GUIDE SIGNS

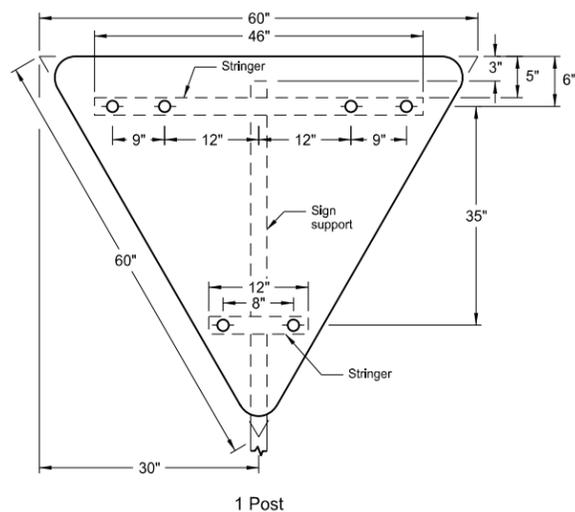

1 Post

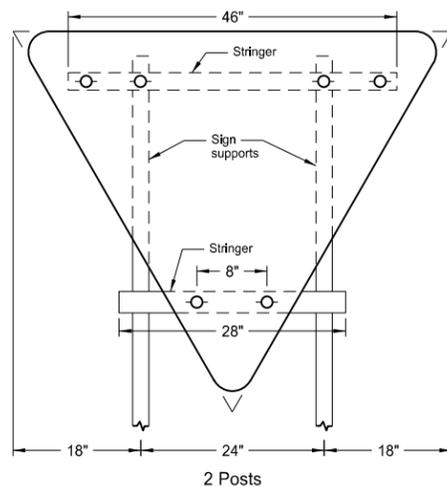

2 Posts

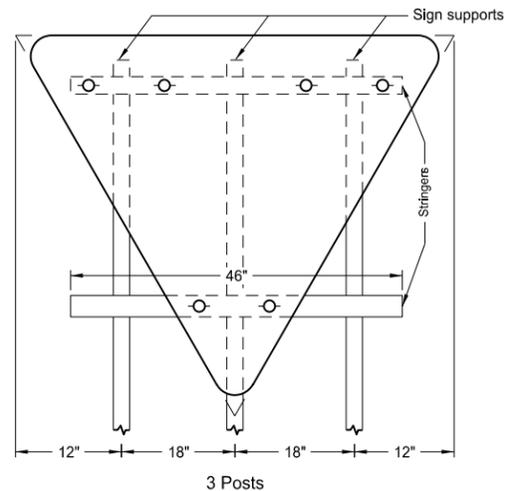


3 Posts

Assembly No. 6


Notes:

1. See Standard D-754-25 for mounting details.
2. The minimum sign backing material thickness shall be 0.100 inch.
3. Perforated square tube stringer shall be 1½" x 1½".
4. All holes shall be punched round for ⅜" bolt.




1 Post

Assembly No. 7




1 Post

Assembly No. 8




1 Post


Assembly No. 9




2 Posts



1 Post




2 Posts




3 Posts

Assembly No. 10

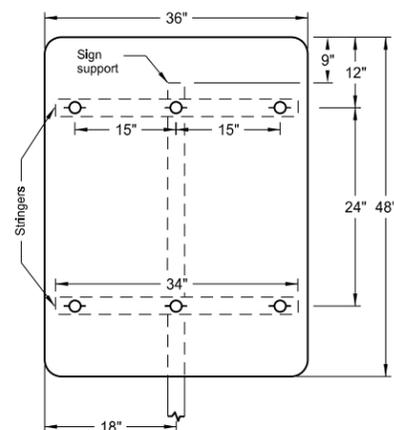


1 Post

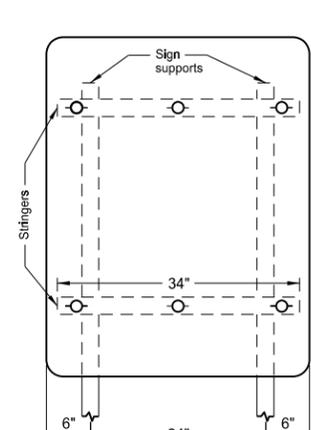

2 Posts

Assembly No. 11

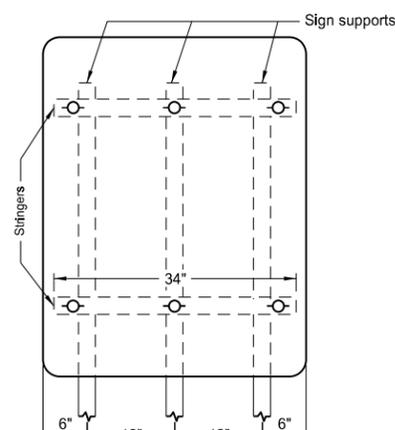


3 Posts


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 12-1-10 and the original document is stored at the North Dakota Department of Transportation

SIGN PUNCHING, STRINGER AND SUPPORT LOCATION
DETAILS REGULATORY, WARNING AND GUIDE SIGNS

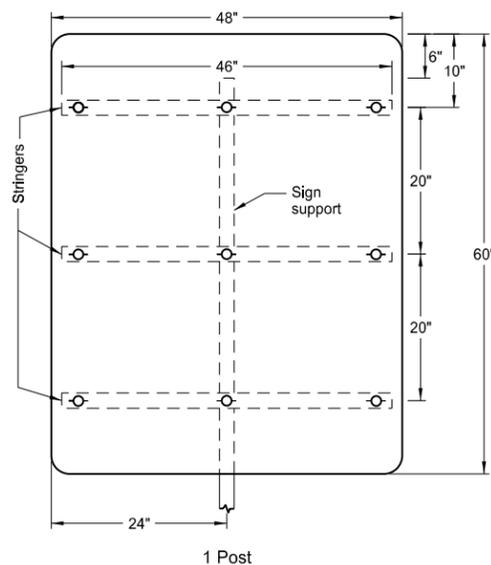


1 Post

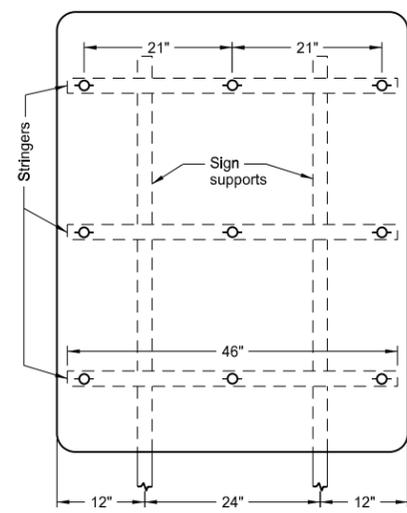


2 Posts

Assembly No. 12

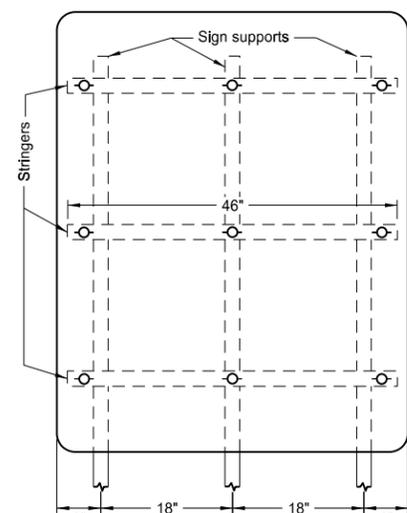


3 Posts




1 Post

Assembly No. 13




1 Post

Assembly No. 14




2 Posts




1 Post


Assembly No. 15



2 Posts

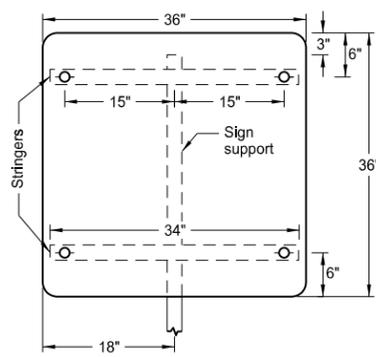


1 Post

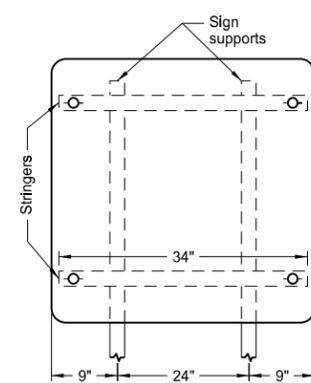


2 Posts


Assembly No. 16

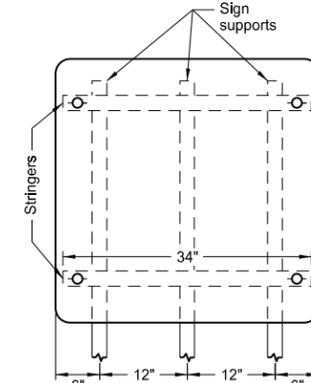

3 Posts

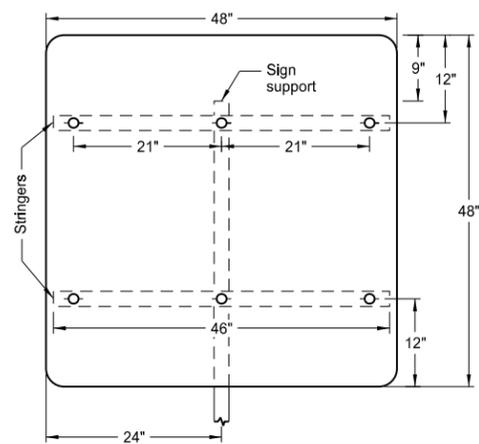


1 Post

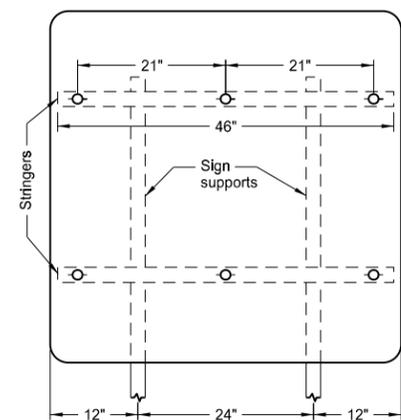

2 Posts

Assembly No. 17

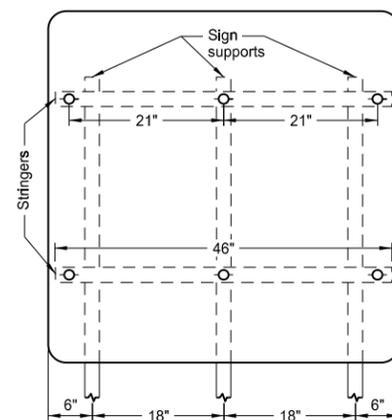

3 Posts

Notes:


1. See Standard D-754-25 for mounting details.
2. The minimum sign backing material thickness shall be 0.100 inch.
3. Perforated square tube stringer shall be 1½" x 1½".
4. All holes shall be punched round for ⅜" bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 12-1-10 and the original document is stored at the North Dakota Department of Transportation

SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS FOR VARIABLE LENGTH SIGNS


D-754-48

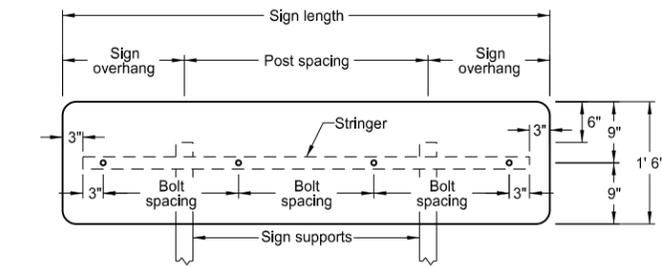


VARIES X 1'-6"

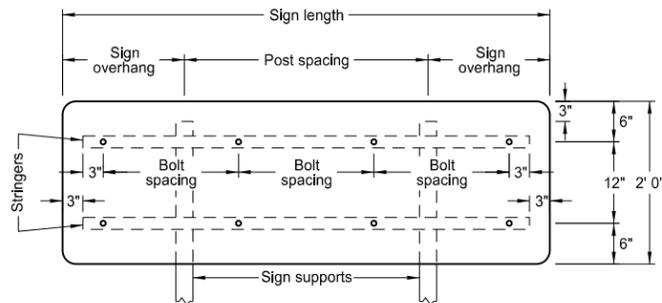


VARIES X 2'-0"

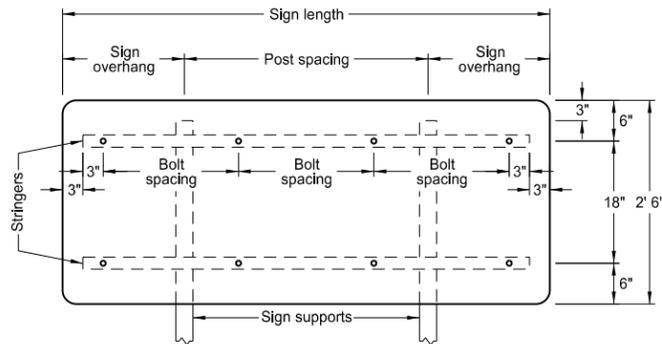


VARIES X 2'-6"

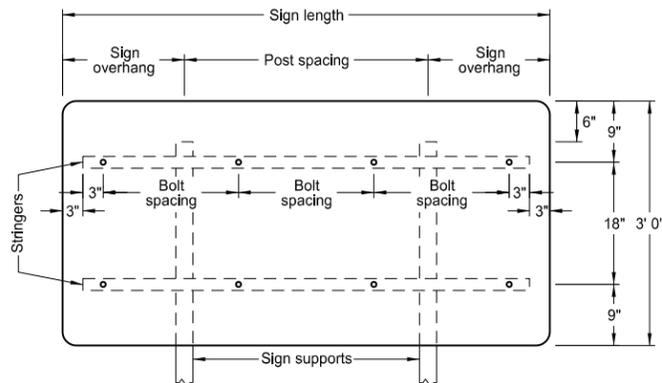


VARIES X 3'-0"

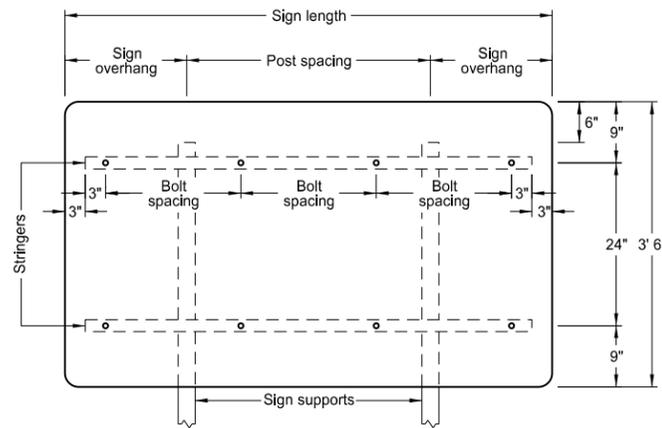


VARIES X 3'-6"

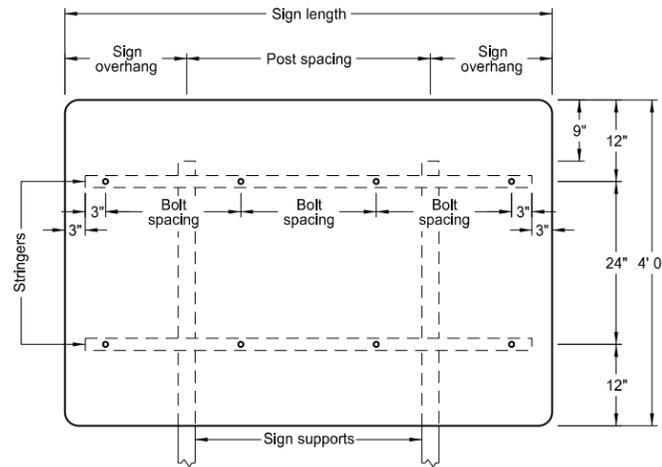


VARIES X 4'-0"

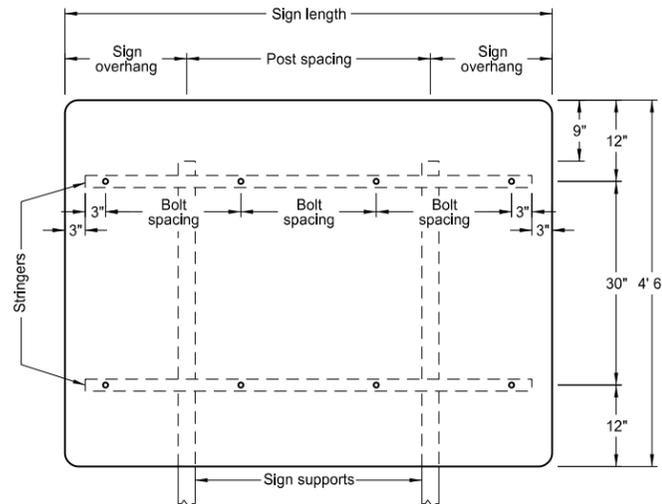

VARIES X 4'-6"

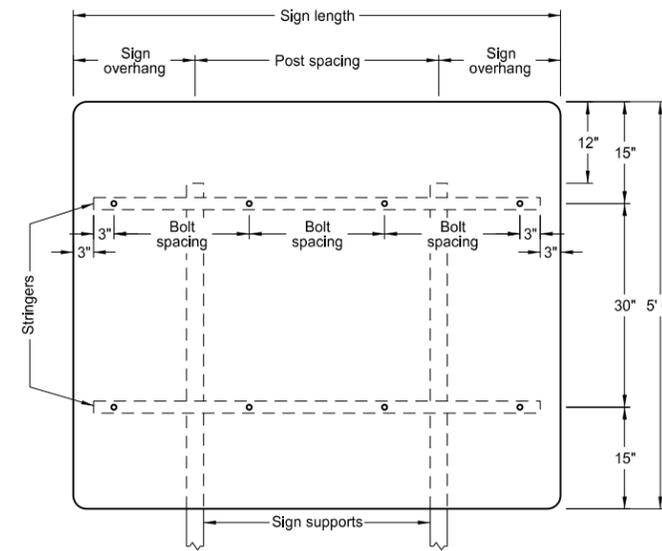

VARIES X 5'-0"

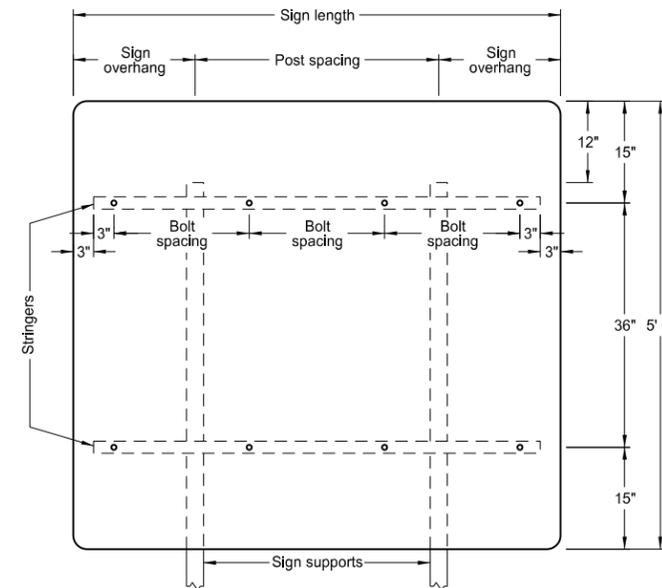

VARIES X 5'-6"

2 POSTS			
Sign Length	Sign Overhang	Post Spacing	Bolt Spacing
4'-0"	1'-0"	2'-0"	18"
4'-6"	1'-3"	2'-0"	21"
5'-0"	1'-0"	3'-0"	24"
5'-6"	1'-3"	3'-0"	18"
6'-0"	1'-6"	3'-0"	20"
6'-6"	1'-3"	4'-0"	22"
7'-0"	1'-6"	4'-0"	24"
7'-6"	1'-9"	4'-0"	2'-20" & 2'-19"
8'-0"	2'-0"	4'-0"	21"
8'-6"	1'-9"	5'-0"	2'-22" & 2'-23"
9'-0"	2'-0"	5'-0"	24"
9'-6"	1'-9"	6'-0"	4'-20" & 1'-22"
10'-0"	2'-0"	6'-0"	2'-21" & 3'-22"
10'-6"	2'-3"	6'-0"	4'-23" & 1'-22"
11'-0"	2'-6"	6'-0"	24"
11'-6"	2'-9"	6'-0"	21"
12'-0"	2'-0"	8'-0"	22"
12'-6"	2'-3"	8'-0"	23"
13'-0"	2'-6"	8'-0"	24"
13'-6"	2'-9"	8'-0"	3'-22" & 4'-21"
14'-0"	3'-0"	8'-0"	2'-23" & 5'-22"
14'-6"	3'-3"	8'-0"	6'-23" & 1'-24"
15'-0"	3'-6"	8'-0"	24"
15'-6"	2'-9"	10'-0"	6'-22" & 2'-21"
16'-0"	3'-0"	10'-0"	4'-23" & 4'-22"
16'-6"	3'-3"	10'-0"	6'-23" & 2'-24"
17'-0"	3'-6"	10'-0"	24"
17'-6"	3'-9"	10'-0"	22"
18'-0"	3'-0"	12'-0"	6'-23" & 3'-22"
18'-6"	3'-3"	12'-0"	6'-23" & 3'-24"
19'-0"	3'-6"	12'-0"	24"
19'-6"	3'-9"	12'-0"	8'-22" & 2'-23"
20'-0"	4'-0"	12'-0"	8'-23" & 2'-22"


- Notes:
1. The minimum sign backing material thickness shall be 0.100 inch.
 2. Perforated square tube stringer shall be 1½" x 1½".
 3. All holes shall be punched round for ⅜" bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 9/25/2012 and the original document is stored at the North Dakota Department of Transportation

SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS - ROUTE MARKER SIGNS

D-754-51

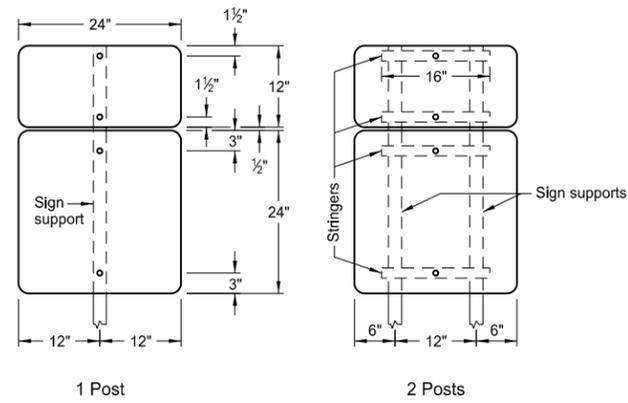


ASSEMBLY NO. 371

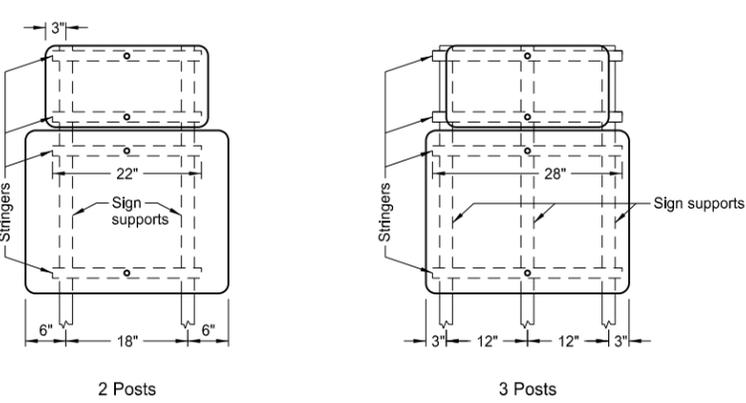
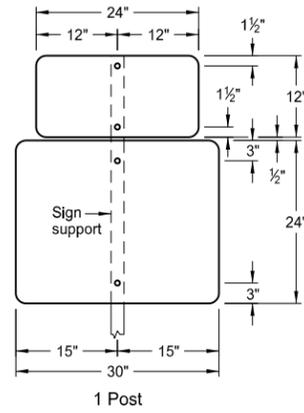


ASSEMBLY NO. 372




- Notes:
1. The minimum sign backing material thickness shall be 0.100 inch.
 2. Perforated square tube stringer shall be 1 1/2"x1 1/2".
 3. All holes shall be punched round for 3/8" bolt.

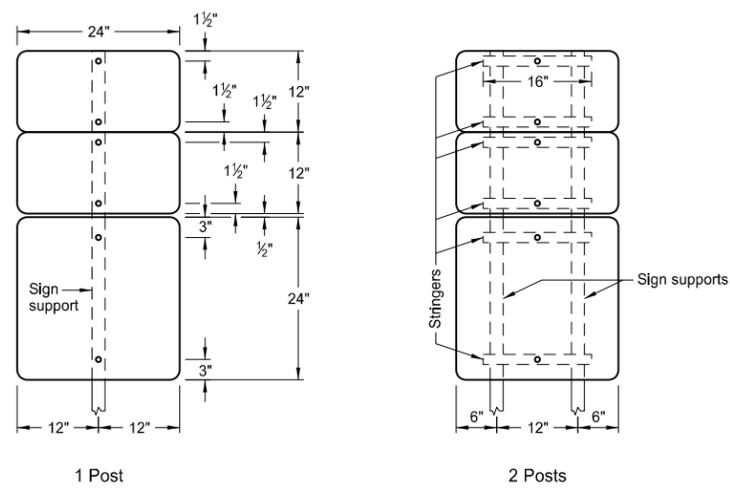


ASSEMBLY NO. 373

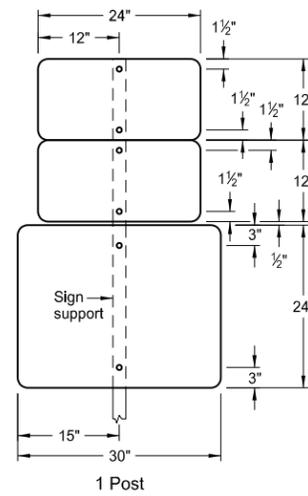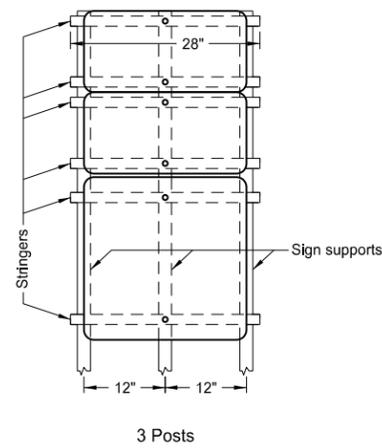

ASSEMBLY NO. 374

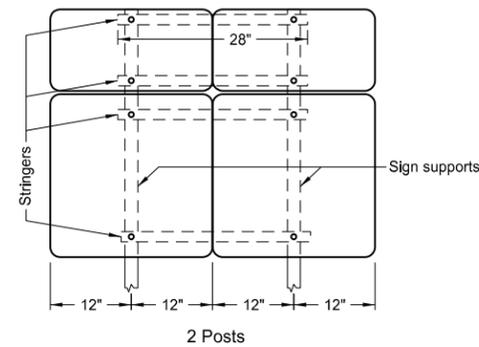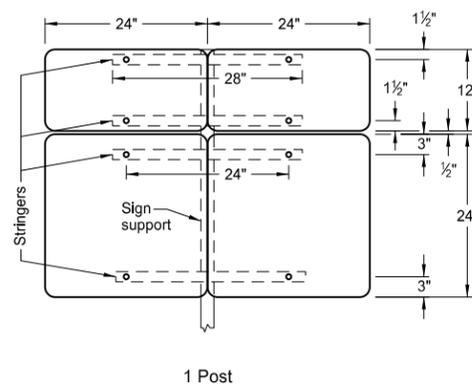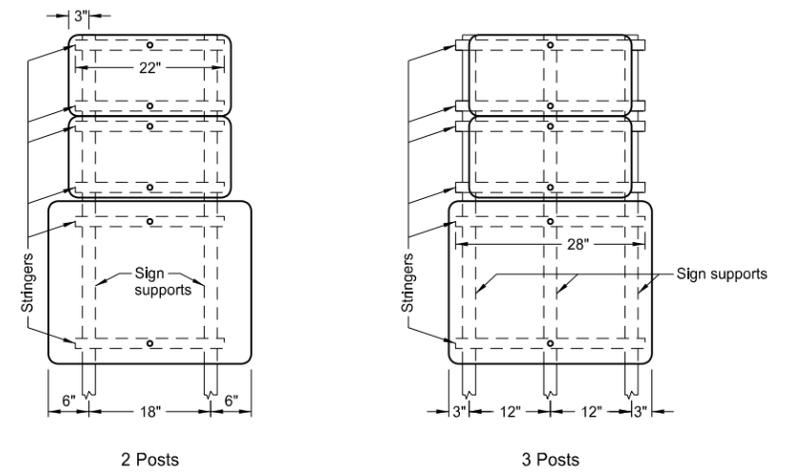

ASSEMBLY NO. 375

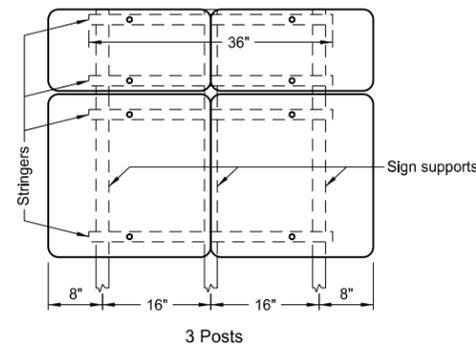


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION 8-22-12	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 8/22/12 and the original document is stored at the North Dakota Department of Transportation

SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS - ROUTE MARKER SIGNS




D-754-57

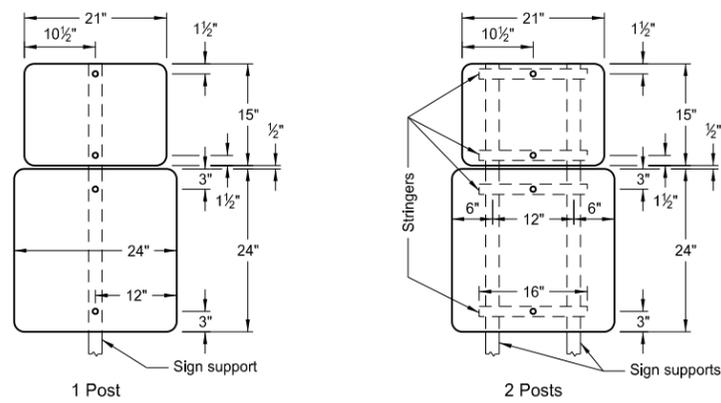




ASSEMBLY 391

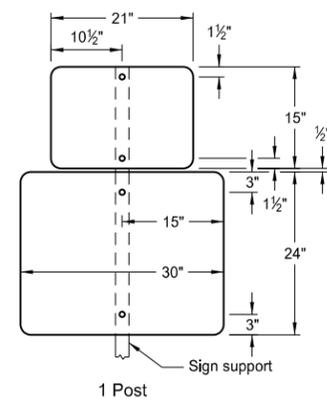




ASSEMBLY 392

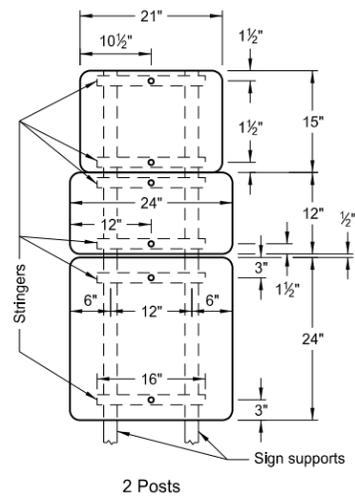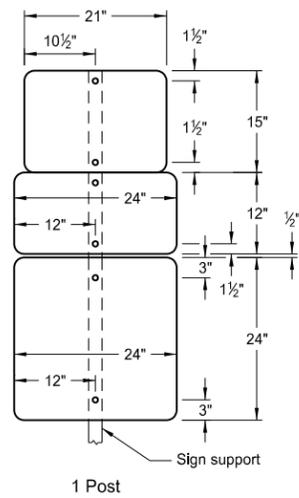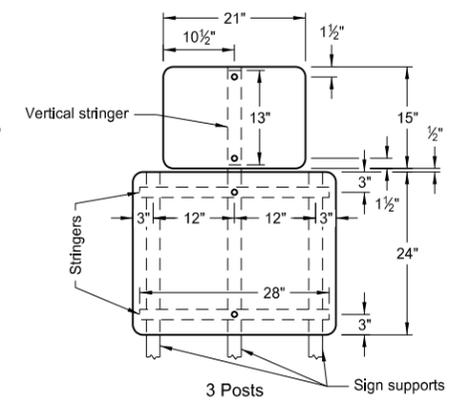


ASSEMBLY 393

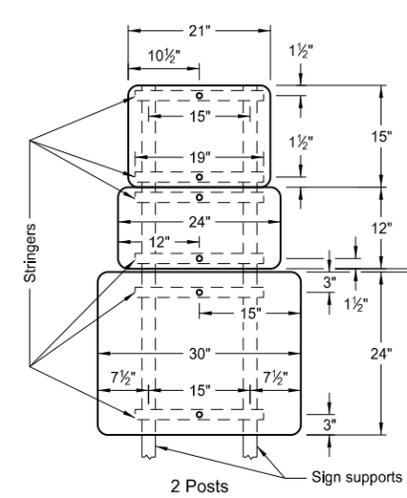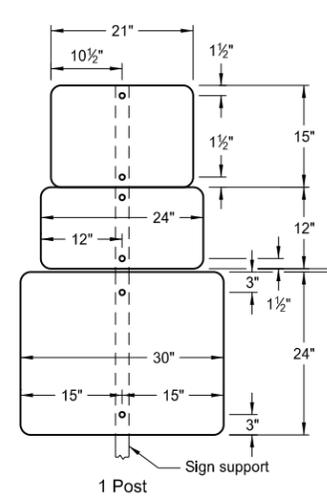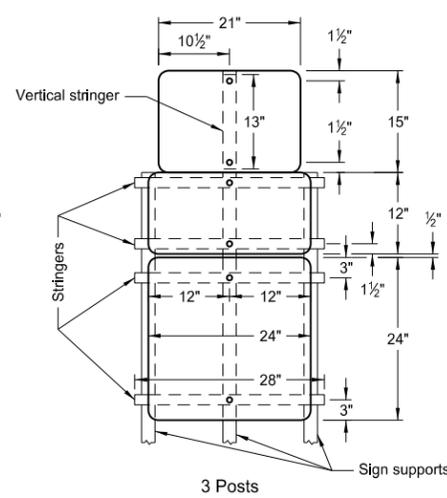

ASSEMBLY 394

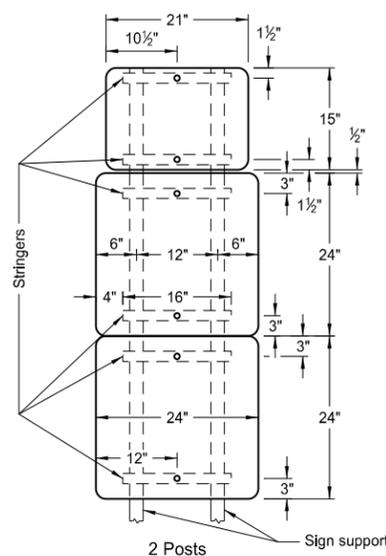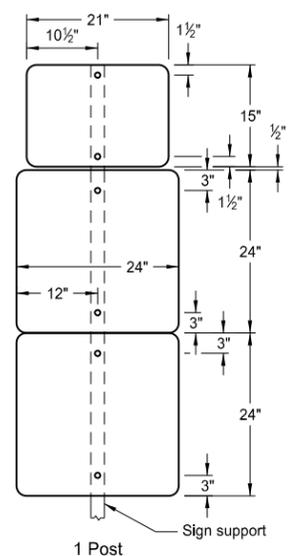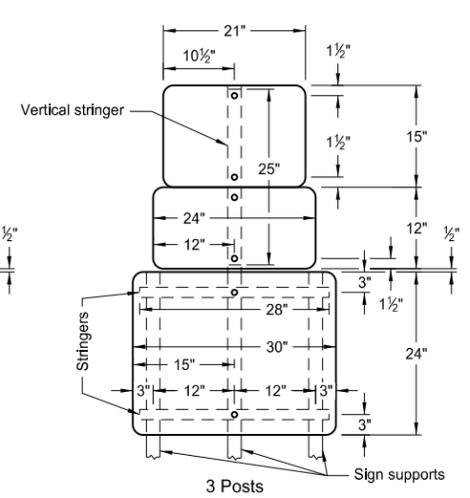

ASSEMBLY 395

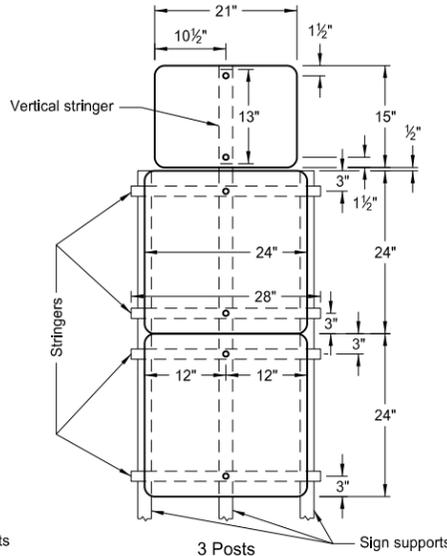

Notes:


1. The minimum sign backing material thickness shall be 0.100 inch.
2. Perforated square tube stringer shall be 1 1/2"x1 1/2".
3. All holes shall be punched round for 3/8" bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-22-12	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 8/22/12 and the original document is stored at the North Dakota Department of Transportation

SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS - ROUTE MARKER SIGNS


D-754-58

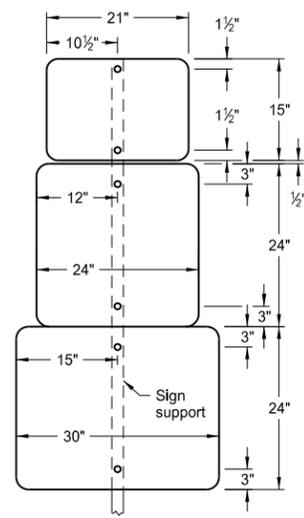


1 Post

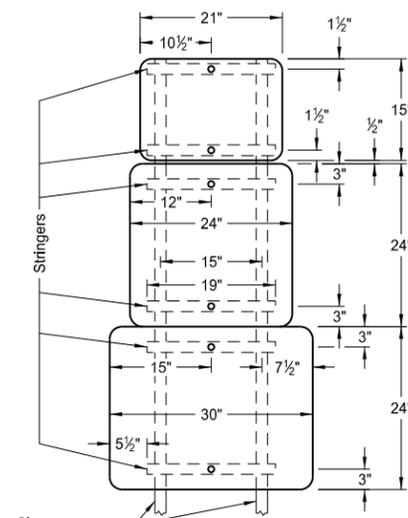


2 Posts
ASSEMBLY 396

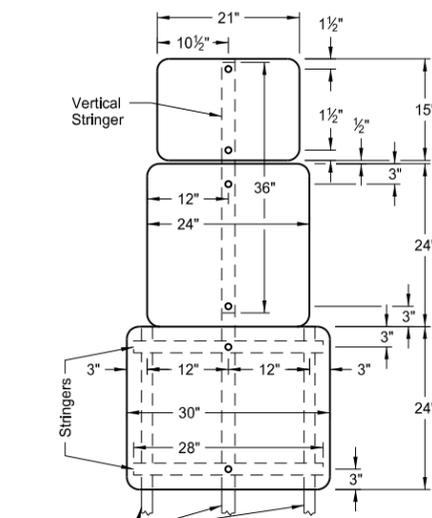


3 Posts

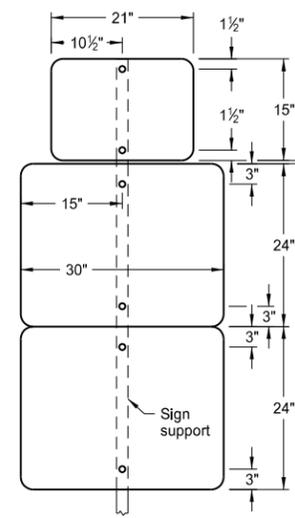


1 Post

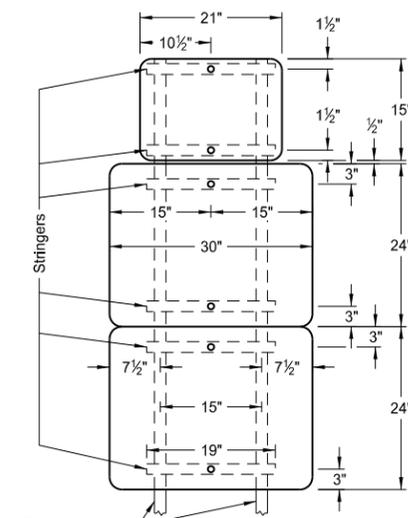


2 Posts
ASSEMBLY 397

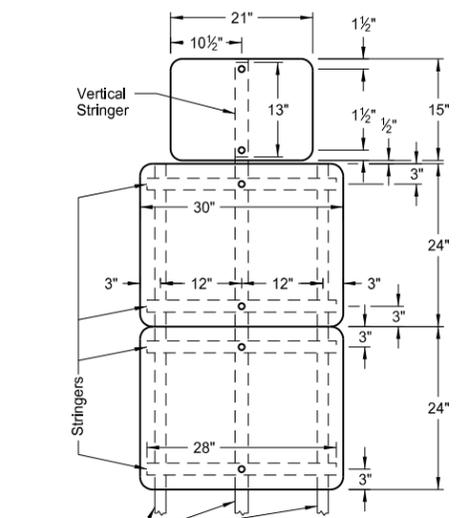


3 Posts

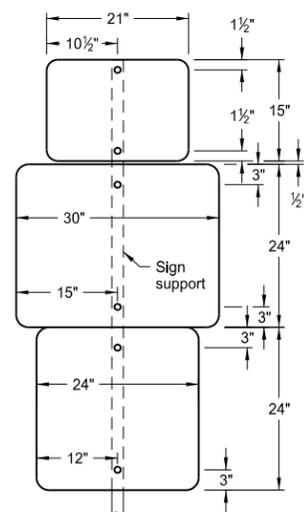


1 Post

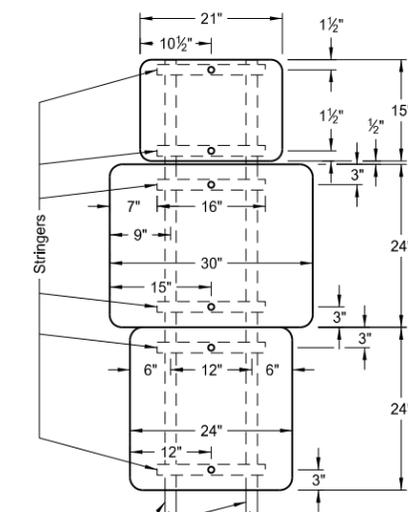


2 Posts
ASSEMBLY 398

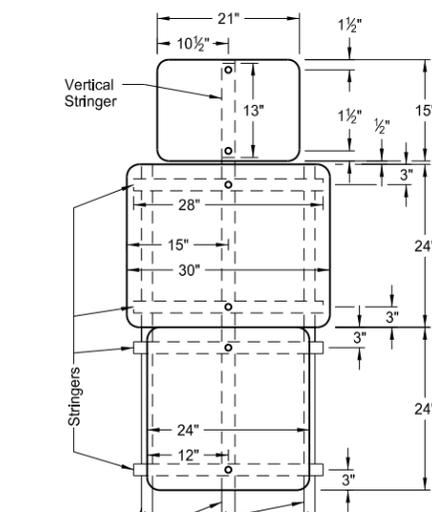

3 Posts



1 Post

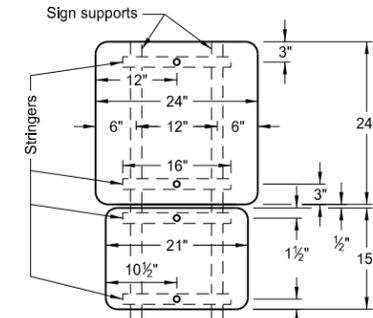

2 Posts

ASSEMBLY 399

Notes:

1. The minimum sign backing material thickness shall be 0.100 inch.
2. Perforated square tube stringer shall be 1 1/2"x1 1/2".
3. All holes shall be punched round for 3/8" bolt.




NORTH DAKOTA DEPARTMENT OF TRANSPORTATION 8-22-12	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 8/22/12 and the original document is stored at the North Dakota Department of Transportation




SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS - ROUTE MARKER SIGNS

D-754-74




- Notes:
1. The minimum sign backing material thickness shall be 0.100 inch.
 2. Perforated square tube stringer shall be 1½"x1½".
 3. All holes shall be punched round for ⅜" bolt.

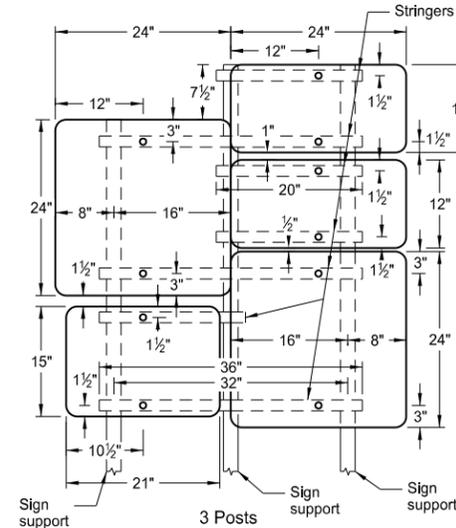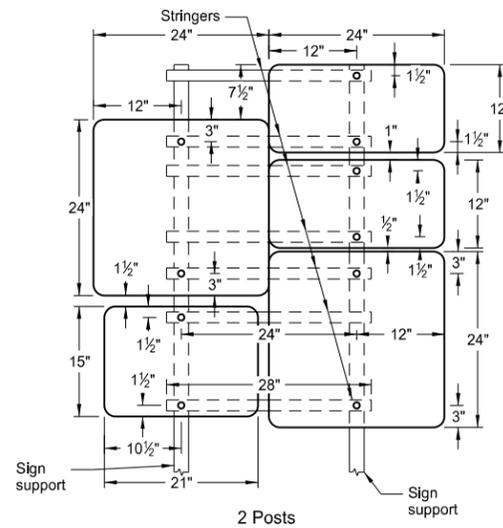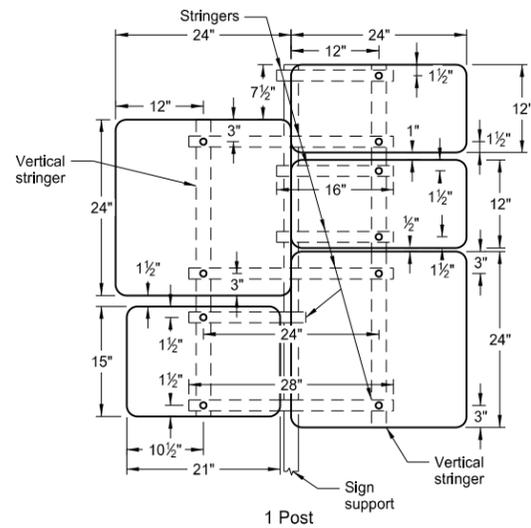

ASSEMBLY NO. 435

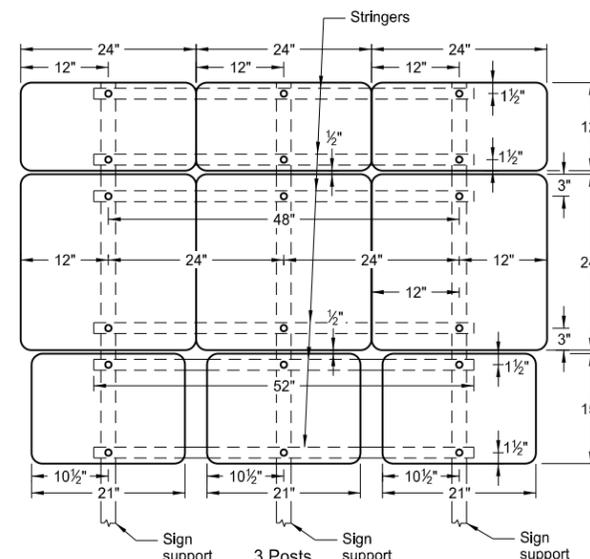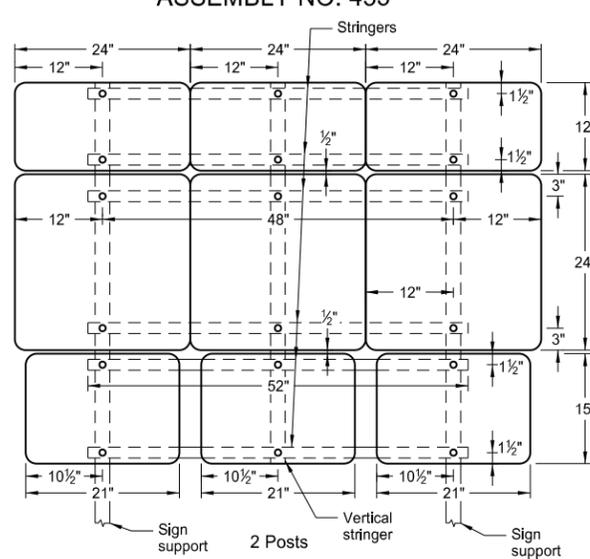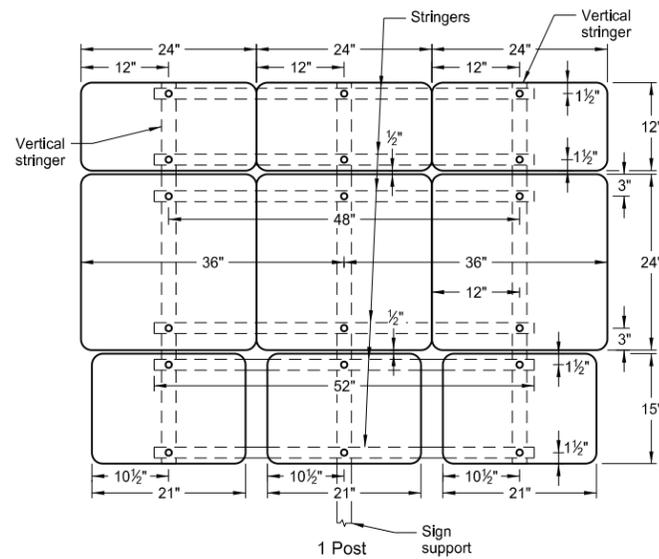

ASSEMBLY NO. 436

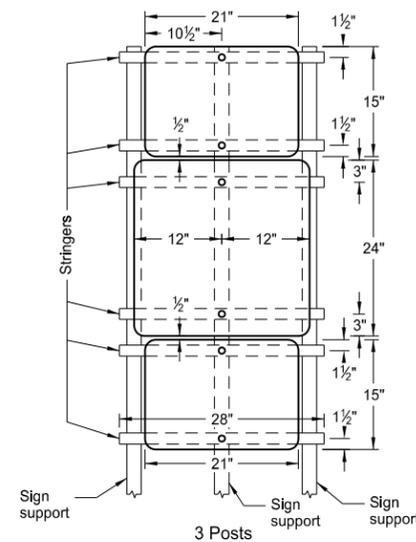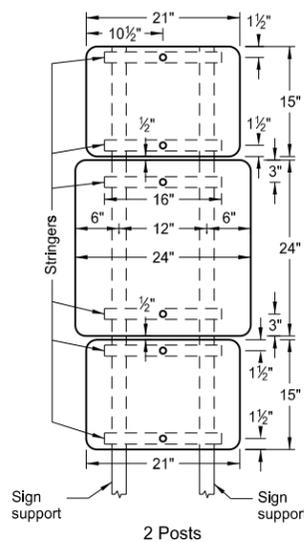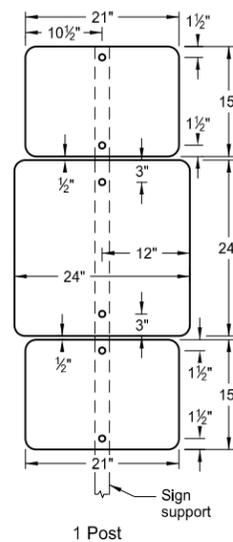


ASSEMBLY NO. 437

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 9/25/2012 and the original document is stored at the North Dakota Department of Transportation

OBJECT MARKERS - CULVERTS

D-754-83

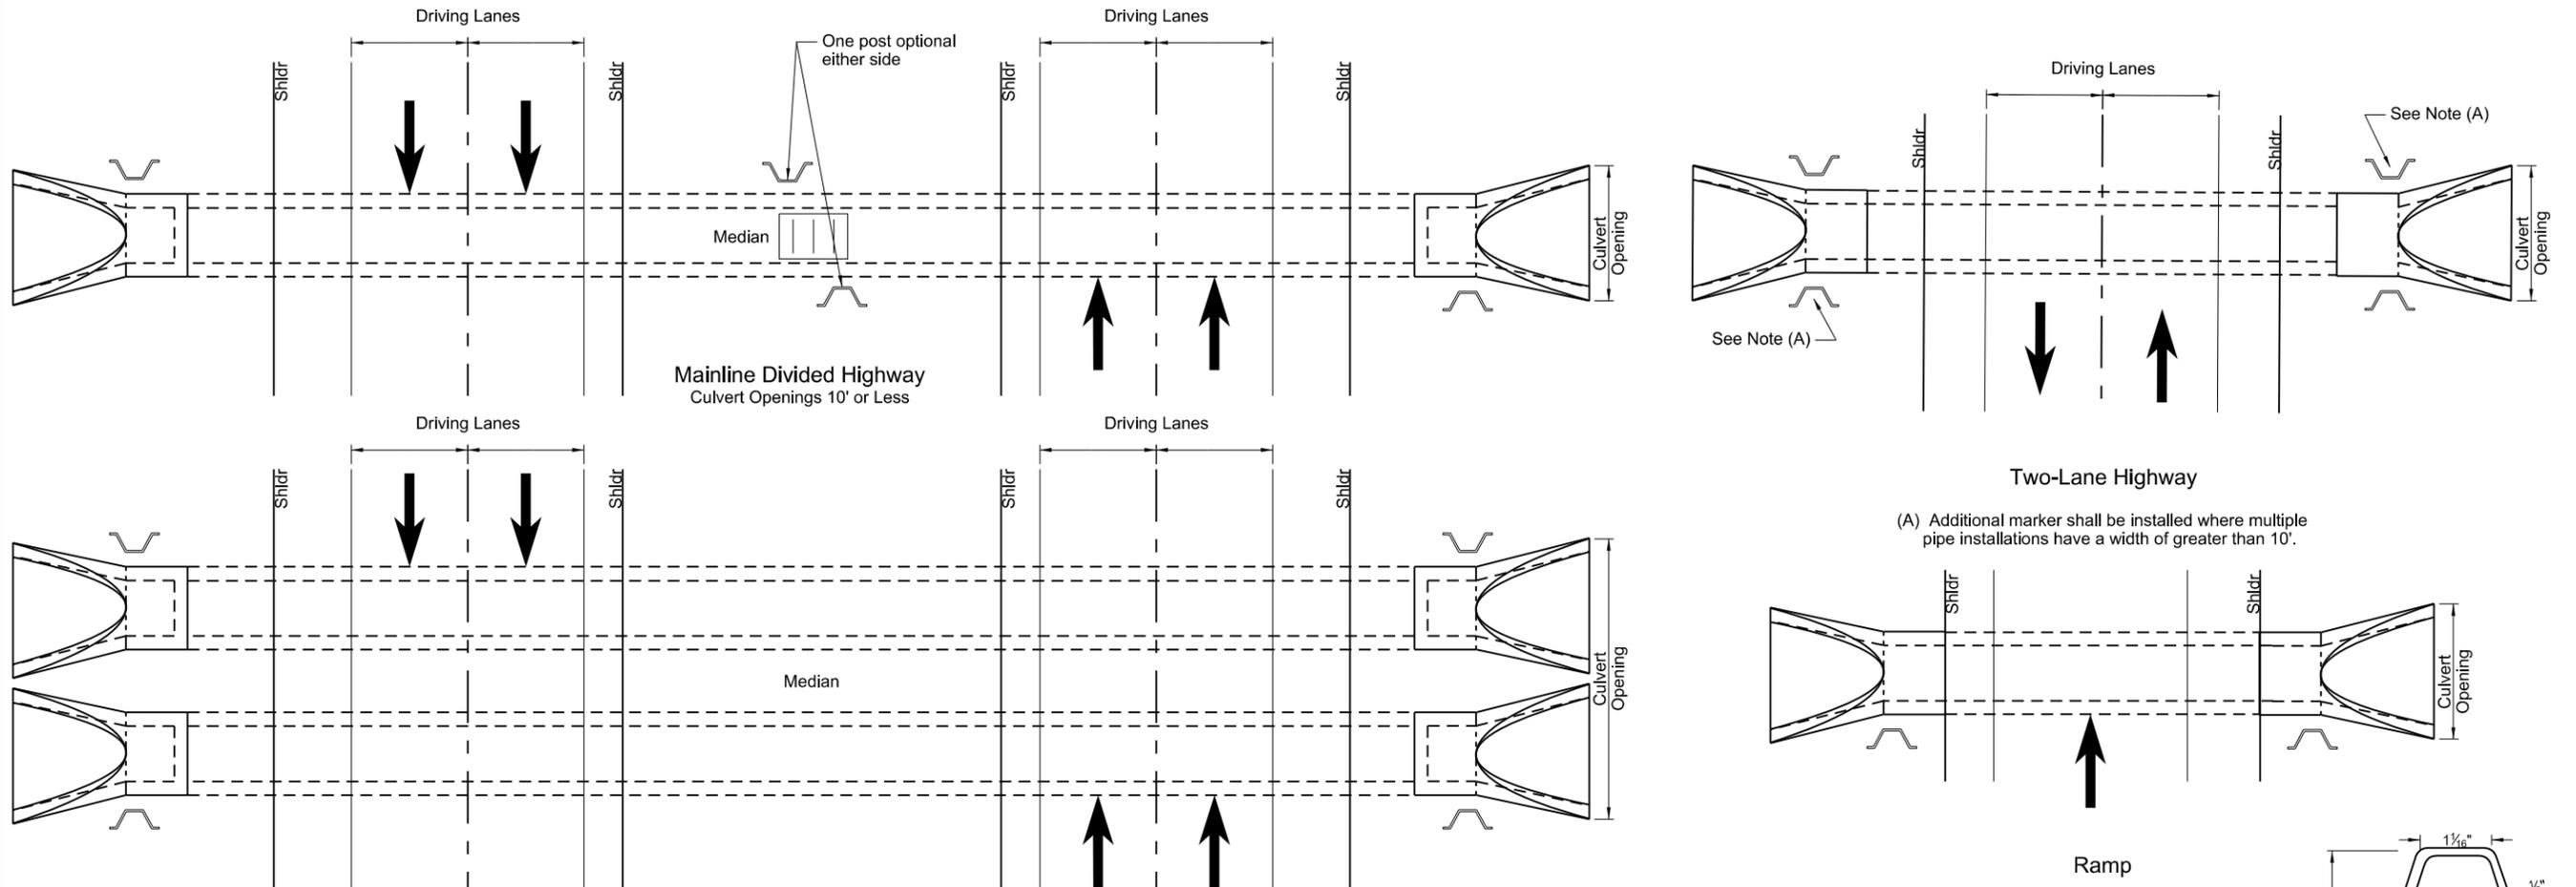


Post Location


Mainline Divided Highway
Culvert Openings Greater than 10'
Multiple Installations

(A) Additional marker shall be installed where multiple pipe installations have a width of greater than 10'.

Ramp




Steel Post Detail
Approx. 2.0 lbs/ft



Aluminum Post Detail
Approx. 0.88 lbs/ft

Top 12 inches painted black

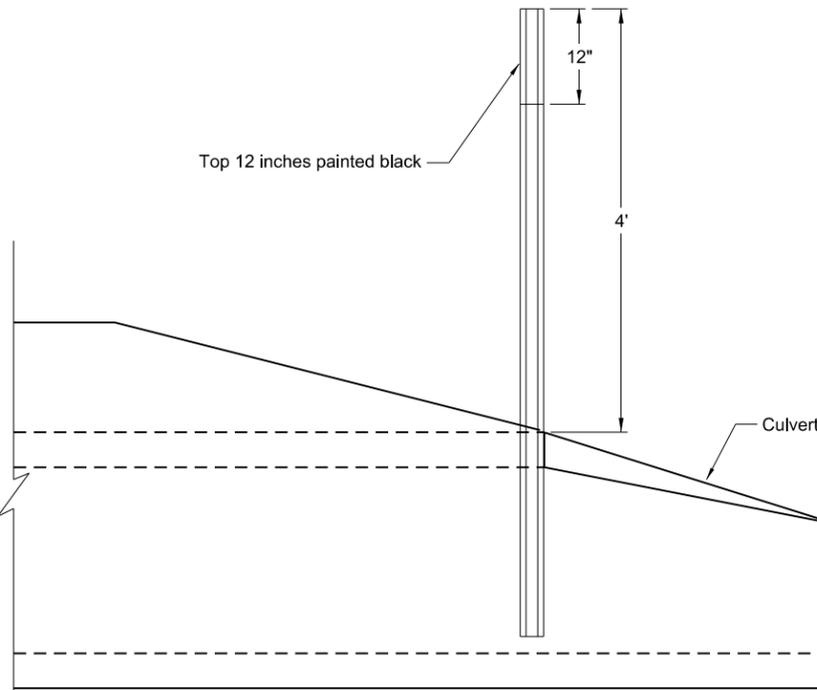

U-Type Post

Installation

Notes:

Installation: Construction requirements shall meet 754.04D. Each end of culverts crossing the roadway within the right-of-way shall be marked with a post as shown. Posts are to be installed in front of the culvert in the direction of travel along the side of the culvert and one foot from the culvert opening unless shown otherwise on the plans.


Posts: Posts shall conform to section 894.04A of the Standard Specifications with the exception that the post may or may not have holes drilled.

Basis of Payment: The quantity will be measured by the number of object markers each installed. All costs for furnishing and installing the markers shall be included in the price bid for the item "Object Markers - Culverts".

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION 8-05-13	
REVISIONS	
DATE	CHANGE
7-7-14	Revised Notes


This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 7/7/2014 and the original document is stored at the North Dakota Department of Transportation

**CONCRETE FOUNDATIONS
(TRAFFIC SIGNALS & HIGHWAY LIGHTING)**

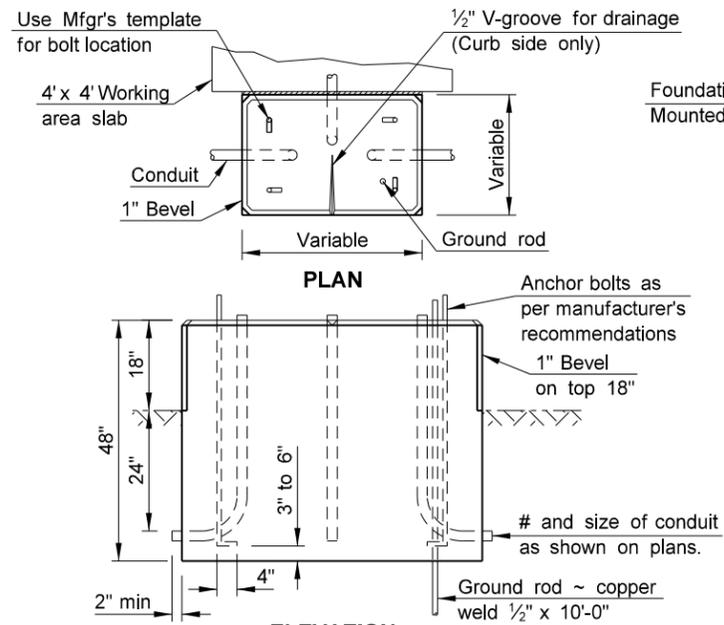


CONTROLLER CABINET FOUNDATION PAD MOUNT

The Controller Cabinet Foundation shall be bid as Concrete Foundation - Traffic Signals.

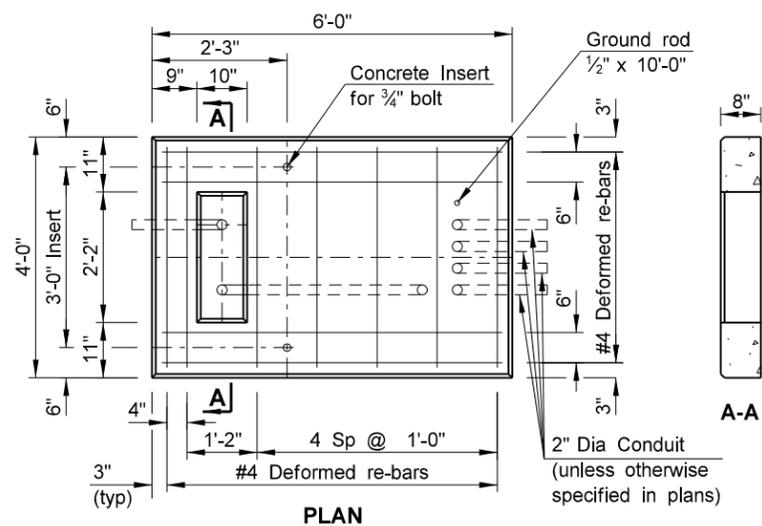


TRANSFORMER & FEED POINT CABINET FOUNDATION PAD MOUNT


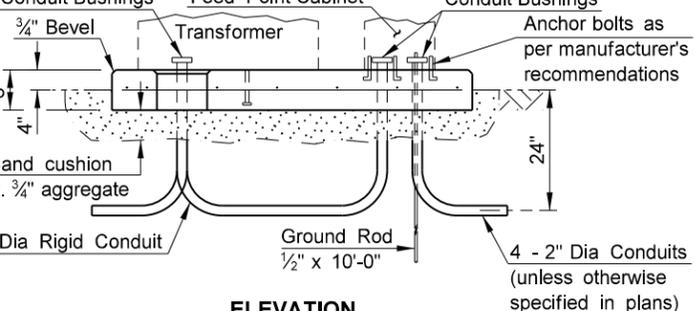


TRANSFORMER & FEED POINT CABINET FOUNDATION PAD MOUNT

The Transformer & Feed Point Cabinet Foundation Pad Mount shall be bid as Concrete Foundation ~ Feed Point ~ Type A.

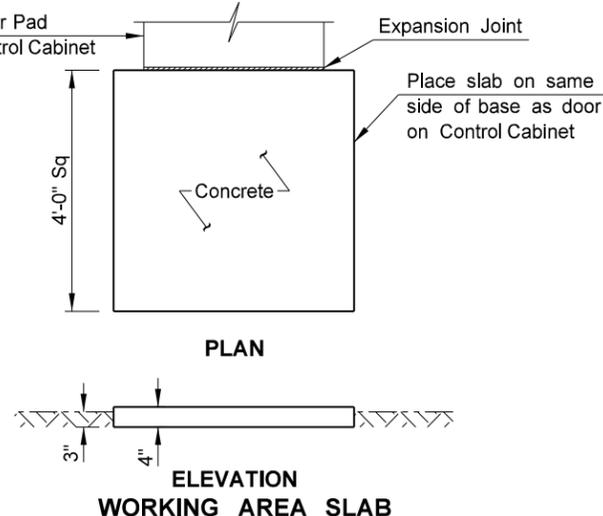


The Working Area Slab shall be installed where shown on the plans and shall not be bid separately but shall be included in the price bid for Concrete Foundation - Traffic Signals.

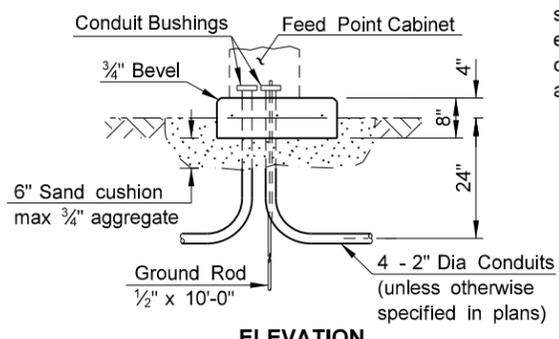
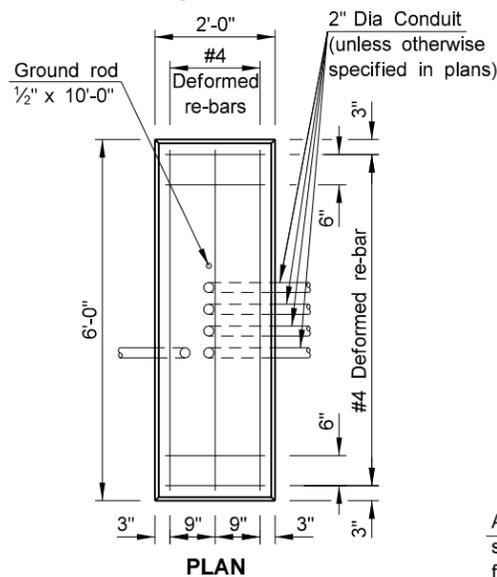


FEED POINT CABINET FOUNDATION PAD MOUNT

The Feed Point Cabinet Foundation Pad Mount shall be bid as Concrete Foundation ~ Feed Point ~ Type B.

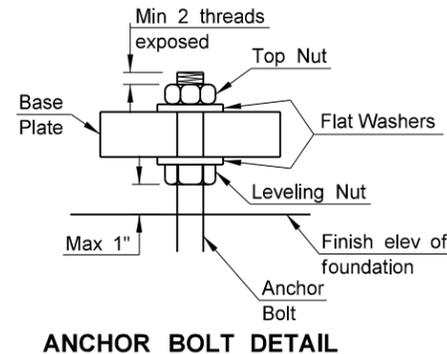

ANCHOR BOLT DETAIL

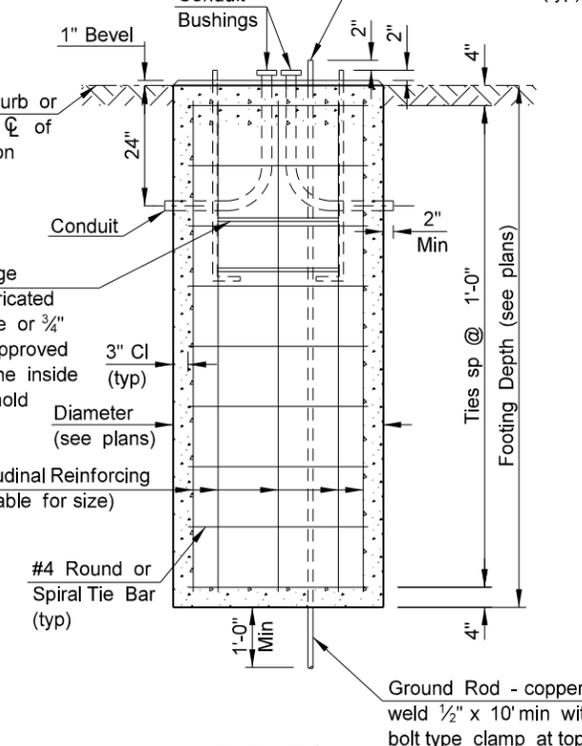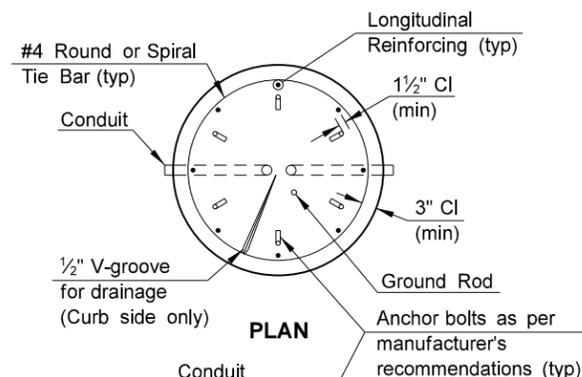

LIGHT & SIGNAL STANDARD FOUNDATION

An anchor bolt cage shall be shop fabricated from #6 bar circle or 3/4\"/>

NOTES:

LIGHT & SIGNAL STANDARD FOUNDATIONS:
See plans for conduit size, number of bends and correct position for each foundation. When conduit does not continue beyond the foundation, conduit with a 105° bend and bushings on both ends may be substituted for the 90° bends shown. See plans for correct size & location of foundations. The grade and exact location shall be established by the Engineer in the field. All reinforcing shall be Grade 60. Tie bars shall have a minimum of a 12\"/>

CONTROLLER CABINET FOUNDATION PAD MOUNT FOUNDATION: See plans for the number of 90° bends per foundation and correct positioning. The foundation for Pad Mounted Controller Cabinet shall be of sufficient size so that there is a minimum of 3\"/>

WORKING AREA SLAB: The materials and preparation of this slab shall be as approved by the Engineer in the field.

TRANSFORMER & FEED POINT CABINET FOUNDATION PAD MOUNTED: The foundation shall have a wood float finish. All conduits shown shall be installed. Conduit that is not used at this time shall be plugged with an expandable plug.






FEED POINT CABINET FOUNDATION PAD MOUNTED: The foundation shall have a wood float finish. All conduits shown shall be installed. Conduit that is not used at this time shall be plugged with an expandable plug.

LIGHT & SIGNAL FOUNDATION TABLE	
FOOTING DEPTH (ft)	LONGITUDINAL REINFORCING
≤ 12	8 - #5
13 - 14	8 - #6
15 - 16	8 - #7
17 - 19	8 - #8

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
6-15-10	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by Terrence R. Udland Registration Number PE- 2674 , on 6/15/10 and the original document is stored at the North Dakota Department of Transportation

PULL BOX DETAILS

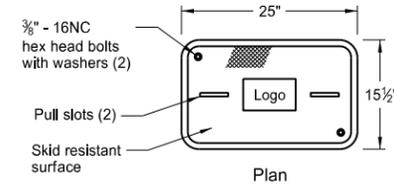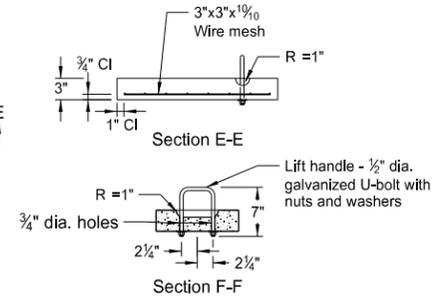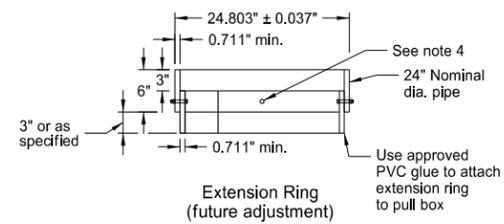


Notes:


1. Place top of pull box flush with surfaced area and approximately one inch above earth or sodded areas on level surfaces.
2. Pull box shall have at least one knockout per side.
3. Polymer Concrete pull box shall be Tier 22 as per ANSI / SCTE 77.

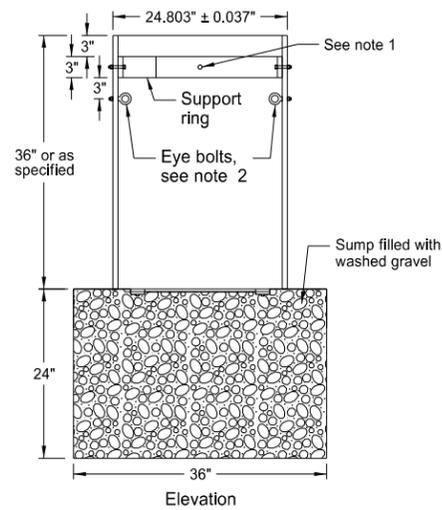

Cast Iron Frame and Cover



Section Cover

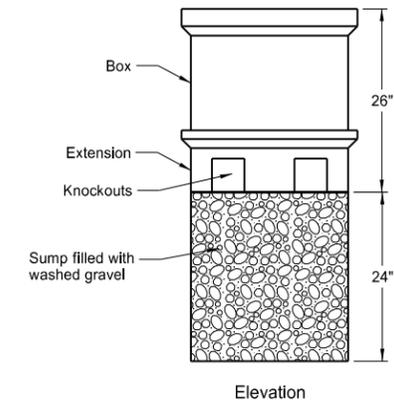


Elevation

Polymer Concrete Pull Box


Note: Polymer concrete reinforced by a heavy weave fiberglass

1 1/4" on box
1" on extension

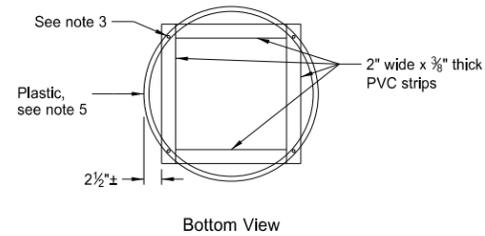

Bottom View

PVC Pull Box

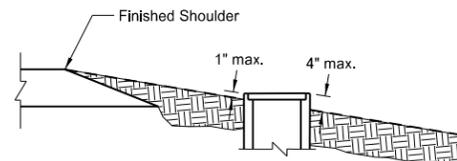

Typical Pull Box in Rural Section


PVC Pull Box Notes:

1. Attach split 24" nominal diameter PVC cover support ring with four 3/8" dia. x 2" long stainless steel hex head bolts with nuts at 90 degrees apart.
2. Two type 2 shoulder eye bolts, 3/8" dia. x 1 1/4" shank length with hex nuts 180 degrees apart (for lifting pull box and supporting electric cable).
3. Four 1/4" x 1 1/4" long galvanized lag screws. Screw assembly together.
4. Attach split 24" nominal diameter PVC cover support extension ring with four 3/8" dia. x 2" long stainless steel hex head bolts with nuts at 90 degrees apart.
5. Bolt assembly together.
6. Conduit holes located in barrel section shall be sized no more than 1" larger than size of conduit being used.
7. After pull box and conduit installation all inside walls and cover shall be made water tight to the satisfaction of the Engineer.
8. PVC pipe to meet requirements of ASTM F679T-1 or equal.
9. Hex head bolts and nuts shall be austenitic stainless steel. Other fasteners to be galvanized as per AASHTO M-232.
10. Concrete cover shall be coated on top and sides with an approved epoxy coating. The epoxy protective coating shall be light gray, clear, or neutral in color and shall be applied as recommended by the manufacturer. The surfaces of the concrete to which the epoxy protective coating is applied, shall be cleaned by wire brush and shall be dry before application.
11. Cast Iron Cover castings shall be gray iron as per AASHTO M 105, Class 35B.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-8-13	
REVISIONS	
DATE	CHANGE
7-8-14	Added Note 3


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/08/14 and the original document is stored at the North Dakota Department of Transportation

LIGHTING AND SIGNAL DETAILS

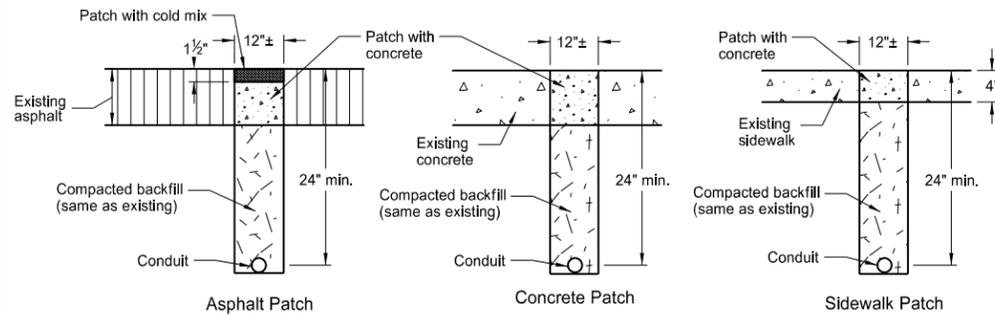


Surface Patch Details

Note: All trenches shall be saw cut. The replacement concrete shall be P.C.C. pavement and the coarse aggregate gradation, maximum size and method of curing shall be as approved by the Engineer. Immediately prior to pouring replacement concrete, all surfaces shall be painted with an approved epoxy compound.

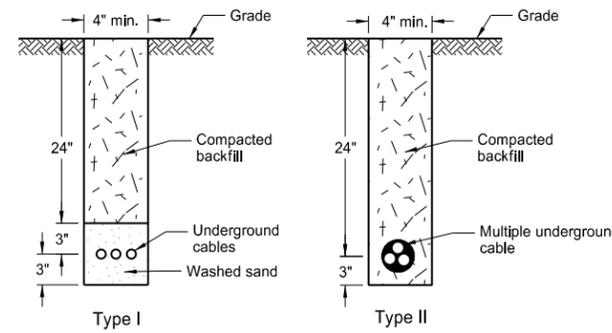


Cable Trench


Note: The entire area which is disturbed by the trenching shall be sodded or as directed by the Engineer.

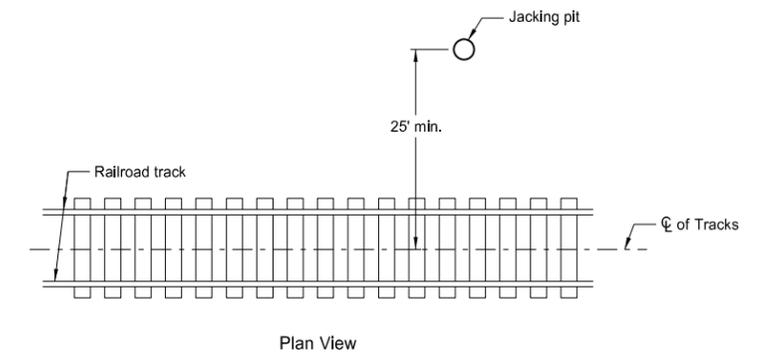

Plan View

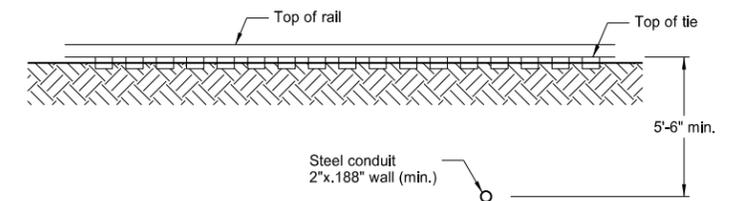


Elevation View
Conduit Placement under Railroad Tracks

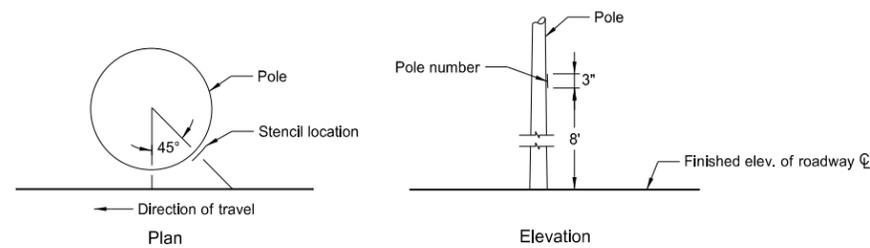


Light Standard Numbering


Note: On the roadway side of each light standard, the Contractor shall stencil on the pole number using black paint or an adhesive coated plastic such as Scotchcal by 3M or as approved by the Engineer. See layout sheets for pole numbers.



Side View Front View
Terminal Block Detail

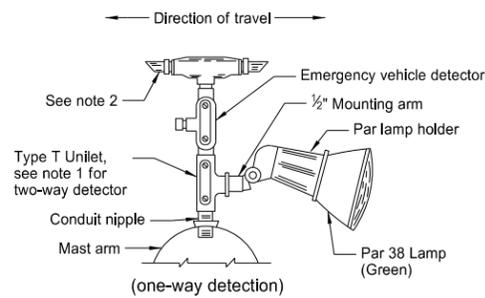


Emergency Vehicle Detector Detail

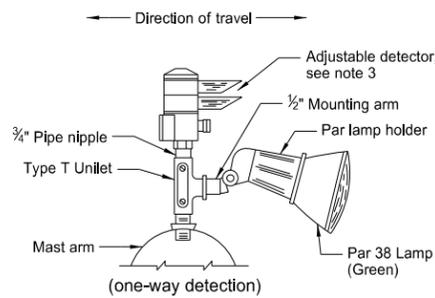


Alternate Emergency Vehicle Detector Detail (adjustable)


Notes:
1. Two-way Detector shall have Type X Unilet with two Par lamp holders and lamps. (one in each direction).
2. One-way Detector shall have the unused end plugged with metal pipe plug.
3. Two-way Detector shall have the detector lens rotated to face the direction of travel, and shall have Type X Unilet with two Par lamp holders and lamps (one in each direction).

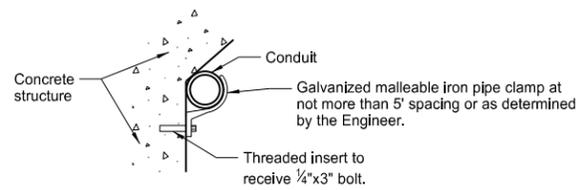


Bridge Mounted Conduit Hanger

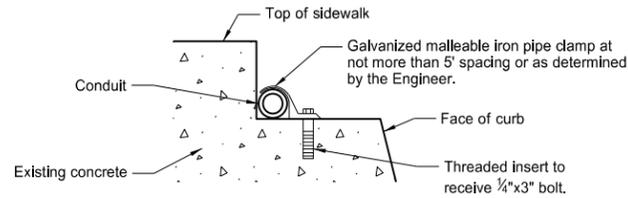

Curb Mounted Conduit

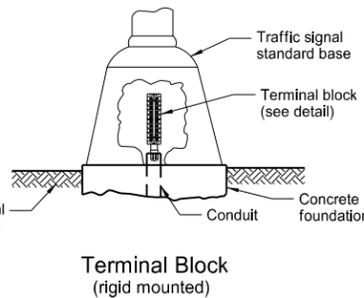

Terminal Block (rigid mounted)

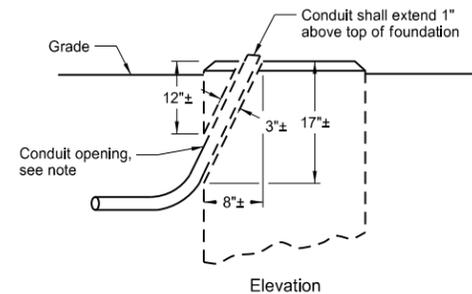


Revise Concrete Foundation


Note: Jackhammer or drill to remove material and provide a location for conduit. Make opening no larger than necessary. Place conduit, fill with concrete and finish foundation to original appearance.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-8-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/08/13 and the original document is stored at the North Dakota Department of Transportation

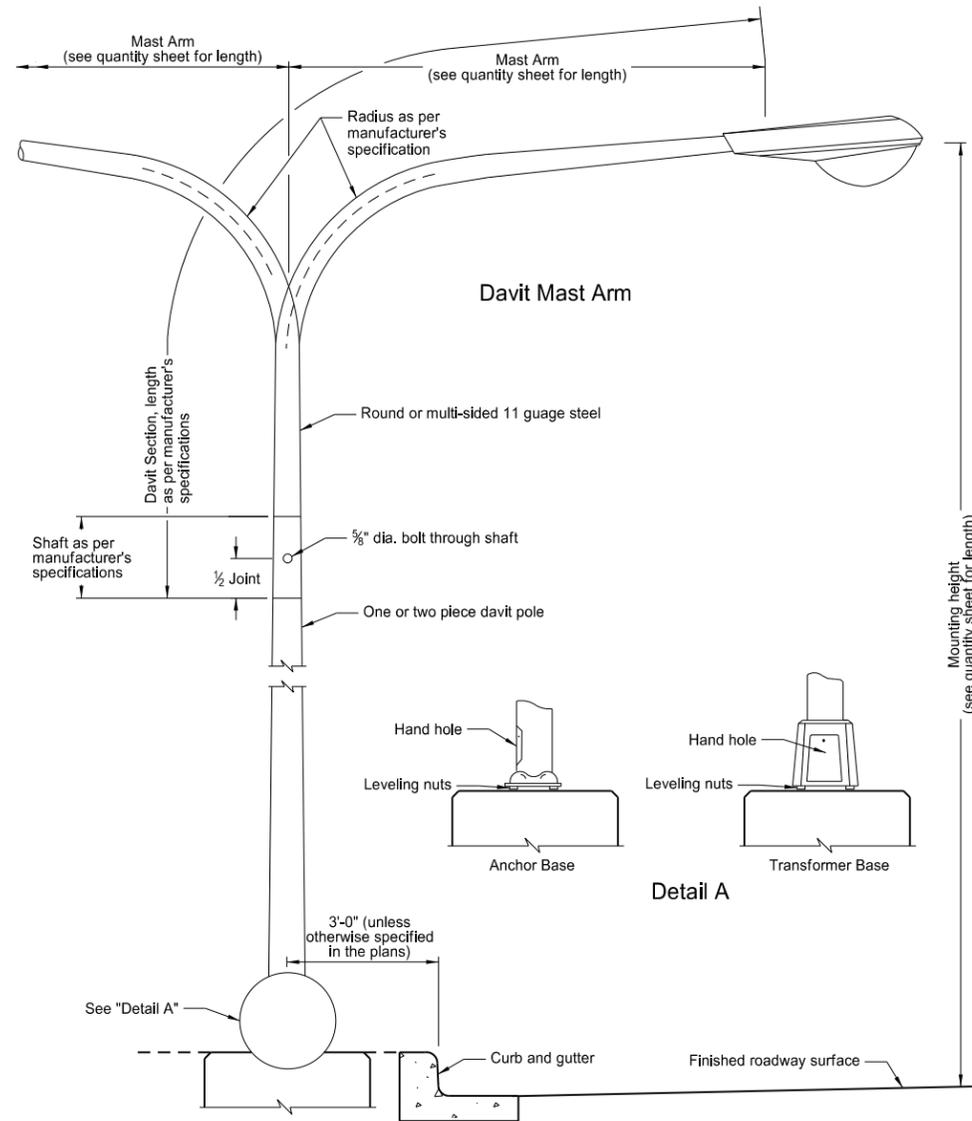


Light Standard Details

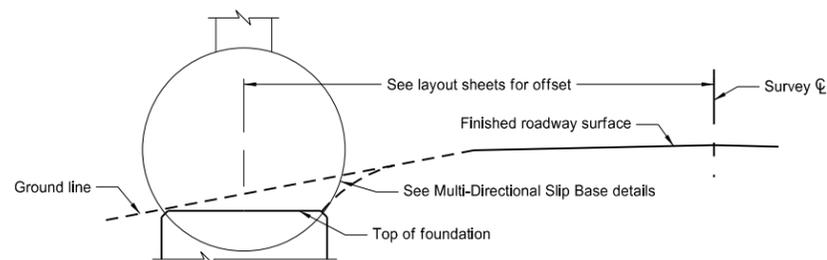

Concrete Foundation Location




Breakaway Support Stub Clearance Diagram

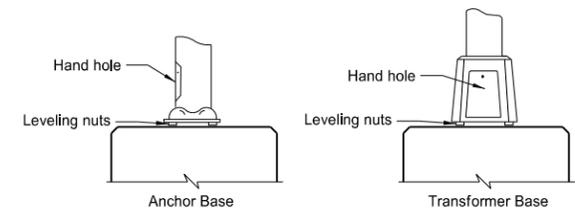


Detail A

Mounting height (see quantity sheet for length)


LIGHT STANDARD DETAILS

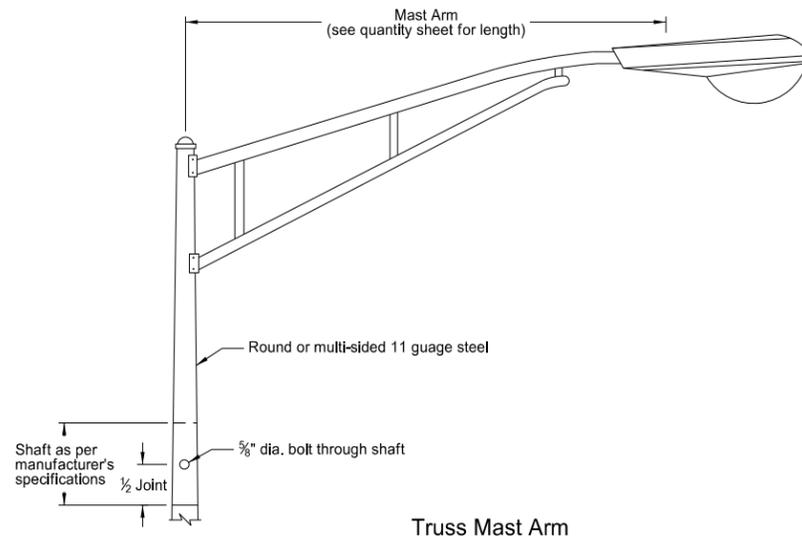


Truss Mast Arm

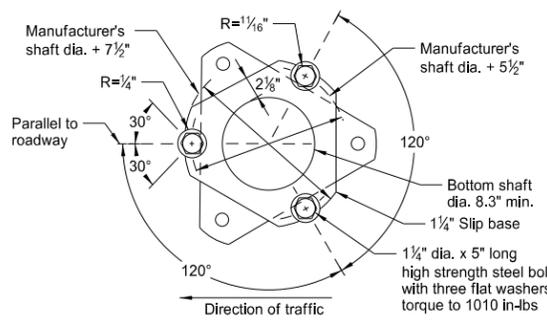

Top View

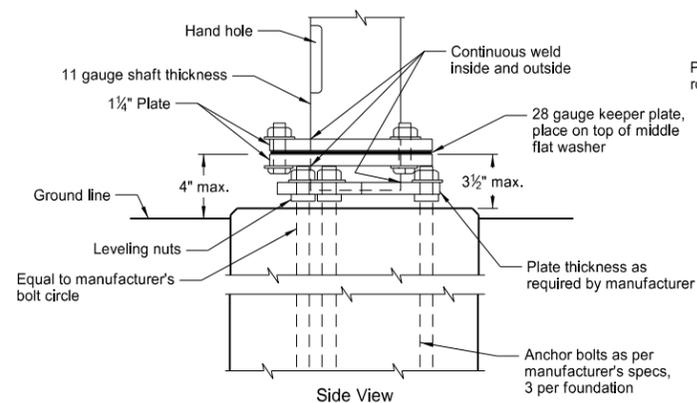


Steel Base Detail

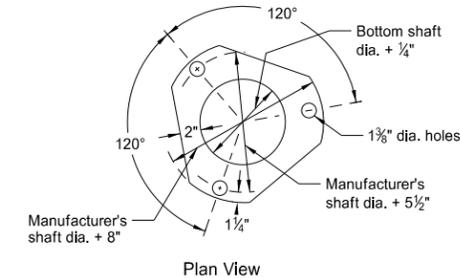


Plan View
Keeper Plate Detail (A)

(A) ASTM A446 Grade "A" 28 gauge keeper plate on top of middle flat washer. The Keeper plate shall be galvanized after fabrication.




Slip Base Placement Detail

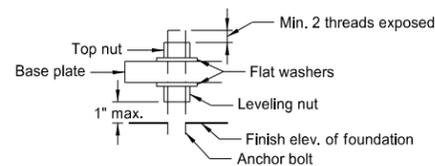


Anchor Bolt Detail

Multi-Directional Slip Base

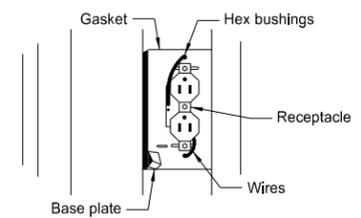

Optional: Festoon receptacle mounted on multi-sided pole.

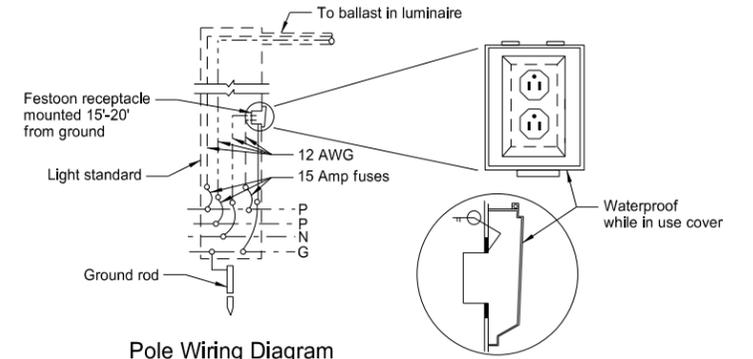

Pole Wiring Diagram

Receptacle Mounting Detail (B)

(B) Receptacle shall be mounted on the side of the pole that faces the street side. Festoon Receptacle shall be installed only when specified in the plans.

Notes:

Light Standard Locations: The offset distance shall have a minimum offset from the curb face of 3 feet. Light standards that are placed in urban areas and where speeds are less than 30 mph, may be placed at 3 feet. Where speeds are 30 mph or more, light standards shall be placed at least 16 feet from the driving lane.

Steel Standards: Marred or scratched areas shall be touched up after erection.

Luminaire: Shall be internal ballast-constant wattage 120x240 voltage. See layout sheets for type of luminaire, wattage, I.E.S. distribution, and operating system.

Fusing: Fusing in base, see specifications.

Slip Base Bolt Torque Procedure:



1. Tighten all bolts the maximum possible with 12" to 15" wrench to bed washers and to clean bolt threads, then loosen.
2. Retighten bolts with a systematic order to prescribed torque.
3. Loosen each bolt and retighten to prescribed torque in the same order as initial retightening.
4. Burr threads of junction with nut using center punch to prevent nut loosening.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-8-13	
REVISIONS	
DATE	CHANGE






This document was originally issued and sealed by
 Roger Weigel,
 Registration Number
 PE-2930,
 on 10/08/13 and the original document is stored at the
 North Dakota Department
 of Transportation

TRAFFIC SIGNAL STANDARDS

D-772-2

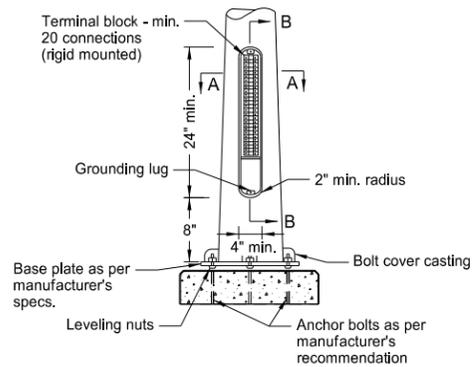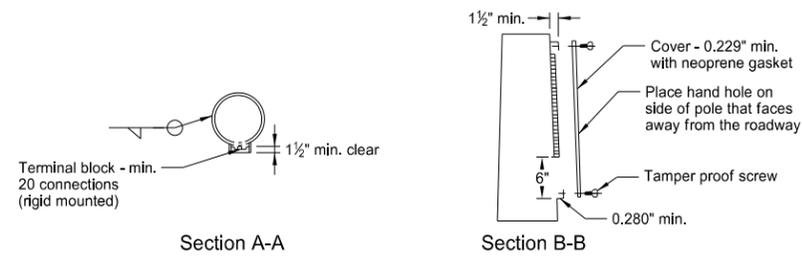

Alternate Signal Standard Base
For use only with Type V, VI, and VII signal standards.

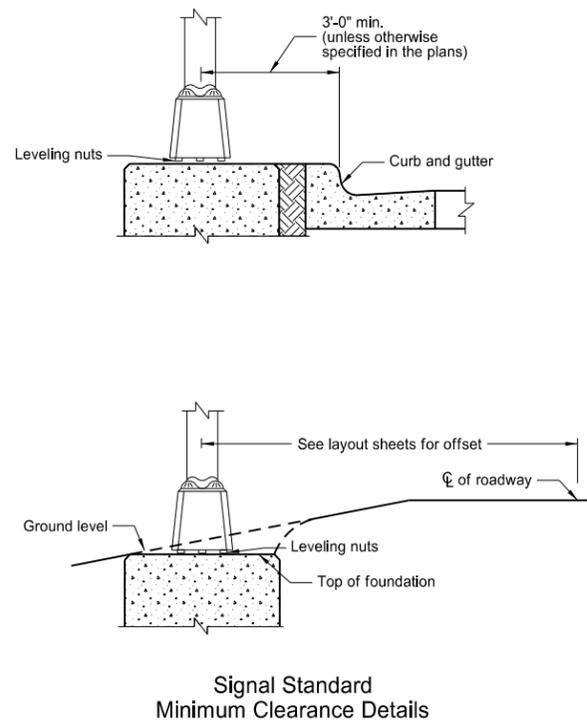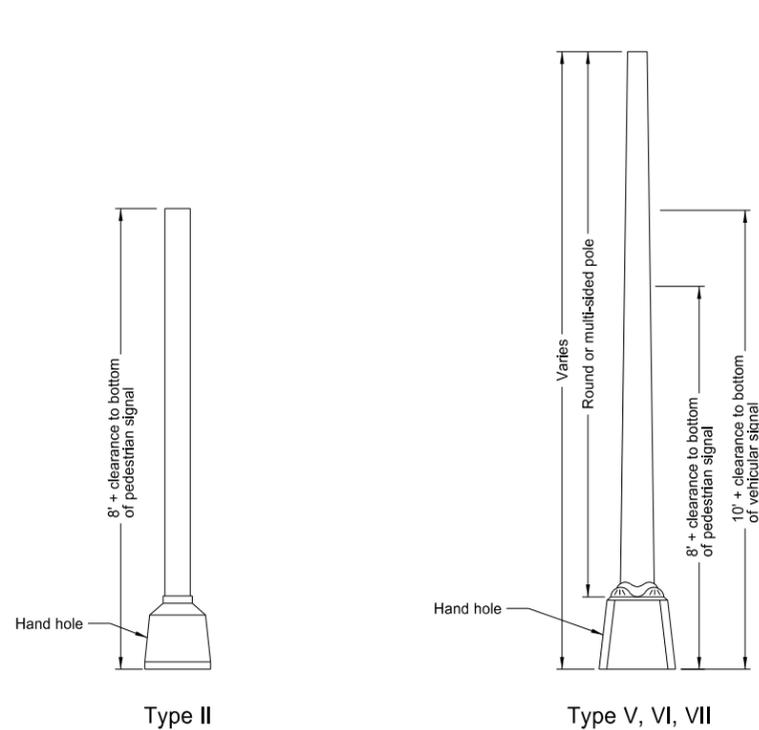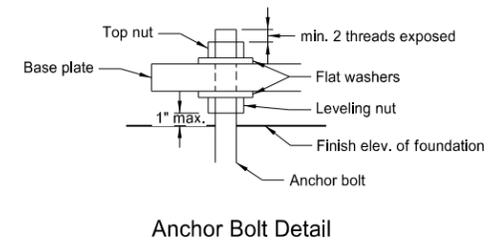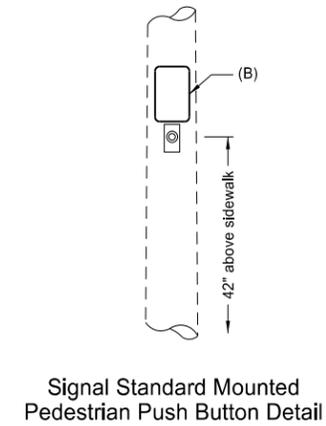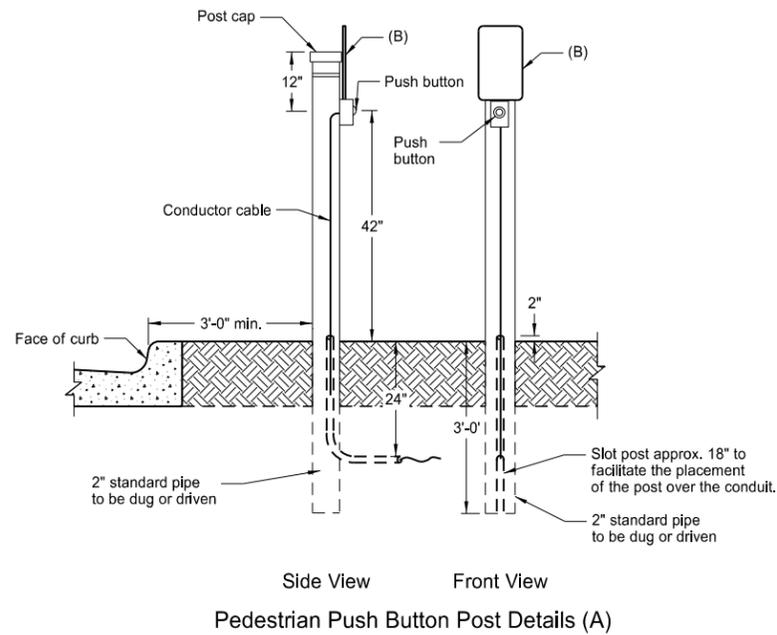

- (A) The positioning of the sign, pushbutton, and direction of arrow shall clearly indicate which crosswalk is actuated by the push button. The type of sign will depend on the jurisdiction they are to be placed in.
- (B) Sign shall be attached to post using rust resistant bracket and banding. The material shall be 0.081 aluminum. See Standard Signs book for dimensions and legend series. See plans for type of sign.


Notes:

- Signal Heads: See traffic signal layout for correct mounting position, number, size, and arrangement of lenses.
- Steel Standards: The center of the signal standard shall be a minimum of 3 ft. from the face of the curb unless shown otherwise on the layout sheets.
- Paint: See note sheet for required color of paint.
- Transformer Base: In lieu of the transformer base the contractor may use the alternate signal standard base.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-14-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/14/13 and the original document is stored at the North Dakota Department of Transportation


TRAFFIC SIGNAL STANDARDS
(MAST ARM TYPE)

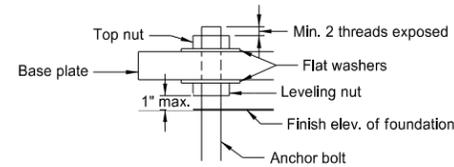

Anchor Bolt Detail

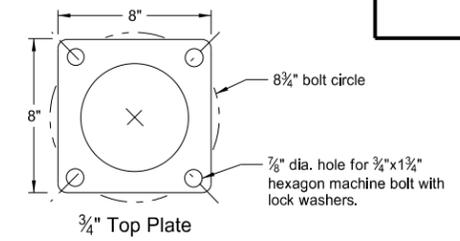


3/4" Top Plate

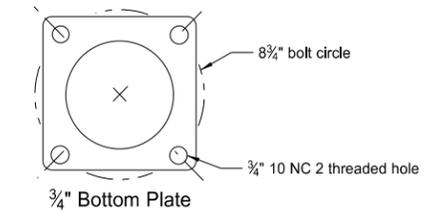


3/4" Bottom Plate

Detail A

Note: In lieu of the plate type connection a telescoping clamp type extension may be used.

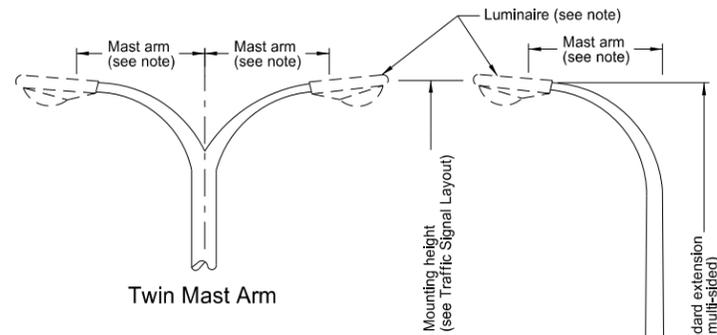

Twin Mast Arm

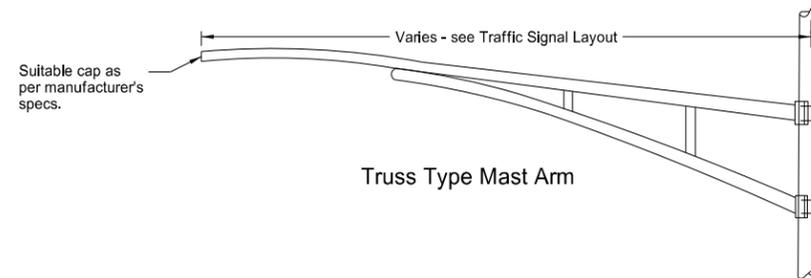




Truss Type Mast Arm

Combination Signal and Light Standard			
Signal Standard Type	Luminaire Mounting height (ft)	Install Light Standard Extension and Luminaire	Luminaire Mast Arm
A	30	yes	single
B	30	(A)	single
C	40	yes	single
D	40	(A)	single
E	30	yes	twin
F	30	(A)	twin
G	40	yes	twin
H	40	(A)	twin
I	50	yes	single
J	50	yes	twin


(A) The light standard extension for these signal standards shall be installed at a later date under a separate contract.

Notes:


- Light standard extension:** The mast arm shall be 6 ft. unless otherwise noted on the plans. The light standard extension shall be galvanized. Galvanizing shall be in accordance with ASTM A 123.
- Luminaire:** Luminaires shall be internal ballast - constant wattage 120 x 240 voltage. See layout sheets for type of luminaire, wattage, and I.E.S. distribution.
- Signal head:** See Traffic Signal Layout for correct mounting position, number, size, and arrangement of lenses. Clearance from the centerline of the roadway to the bottom of mast arm mounted signal heads shall be 17 ft. minimum and 19 ft. maximum.
- Multi-sided poles:** Shall have a means that will not allow the mast arm to be rotated by wind forces other than friction. The pole shall be so fabricated so that the mast arm is rotatable. This feature shall be approved by the Engineer.
- Transformer base:** In lieu of the transformer base the Contractor may use the alternate signal standard base.

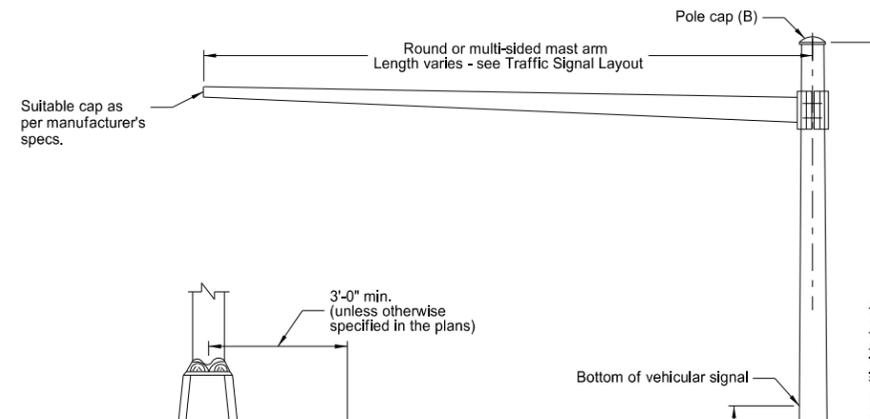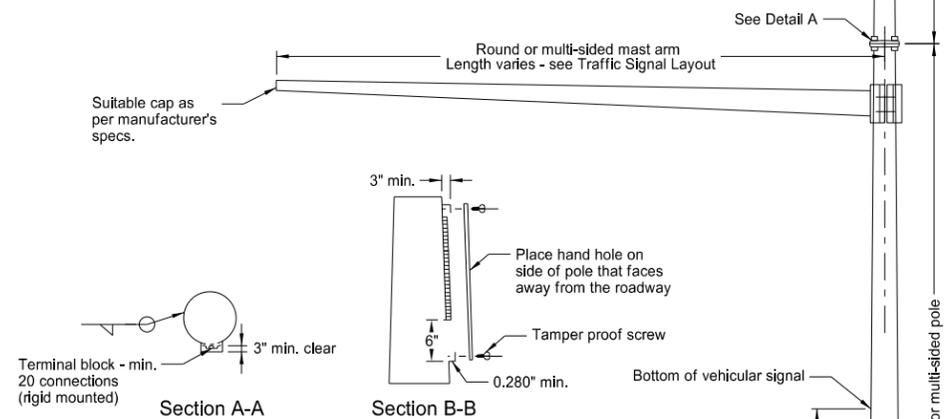

Section A-A




Section B-B

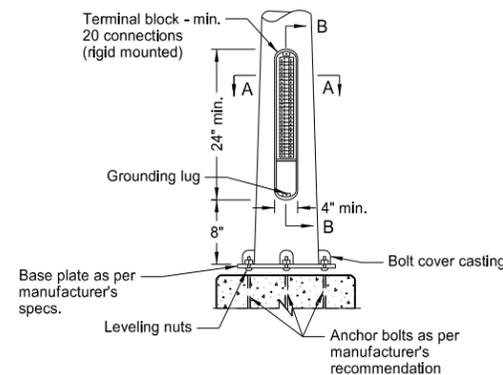


Alternate Signal Standard Base


Note: For use only with Type IV and combination signal standards

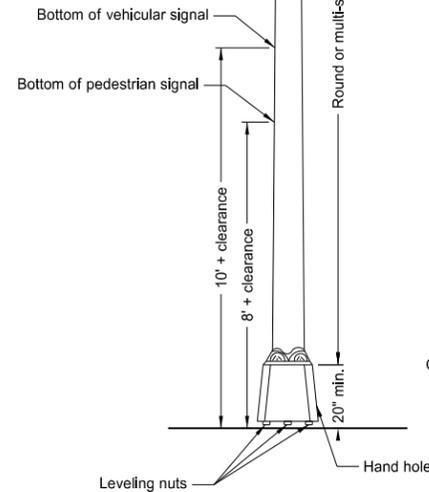

Combination Signal and Light Standard

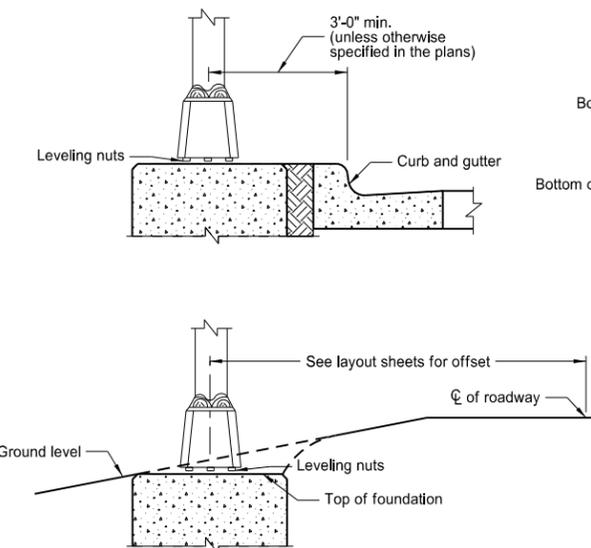

Signal Standard Minimum Clearance Detail

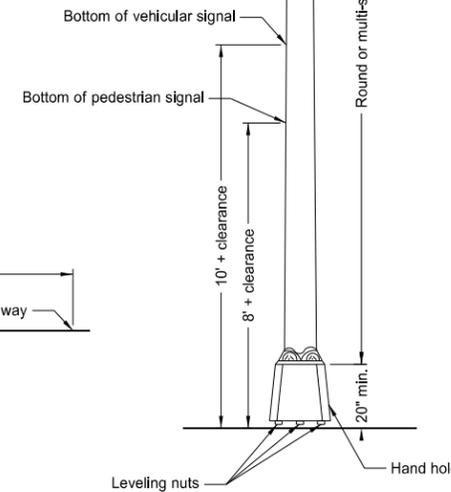

Type IV Signal Standard


(B) On combination signal and light standards Type B, D, F, and H, and on all Type IV signal standards install a suitable pole cap as per manufacturer's specifications.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-14-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/14/13 and the original document is stored at the North Dakota Department of Transportation

TRAFFIC SIGNAL HEAD MOUNTING


D-772-4

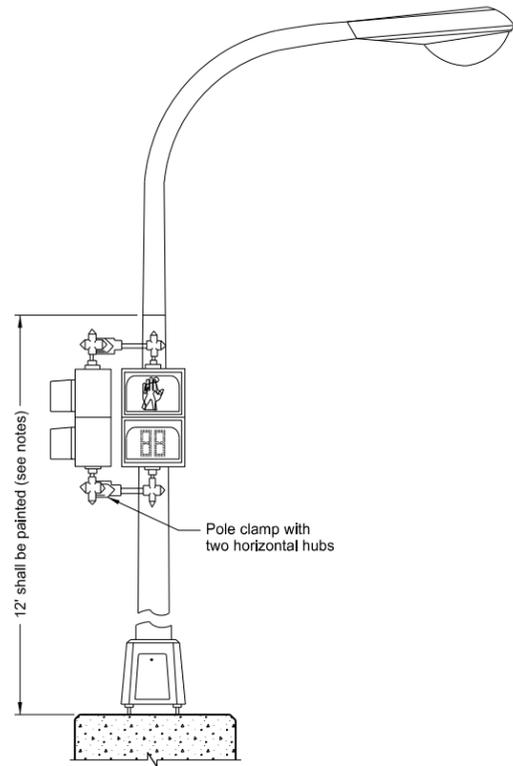


Light Standard Mounted Pedestrian Signal Head (A)




Pedestrian countdown timer
(A) See plans for the appropriate orientation and type of pedestrian signal head to use.




Type II
Pedestal Mounted - Pedestrian (A)

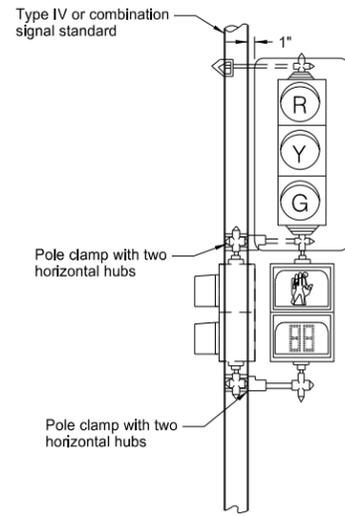


Type IV
Post Mounted - Vehicular
Post Mounted - Pedestrian (A)

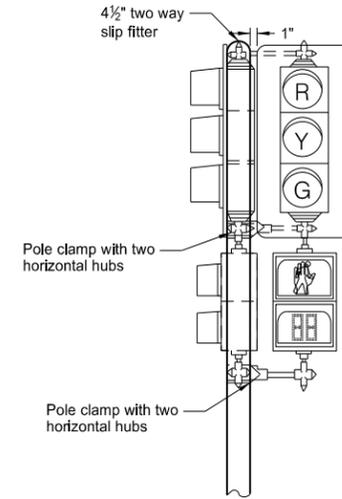


Type V
Post Mounted - Vehicular
Post Mounted - Pedestrian (A)

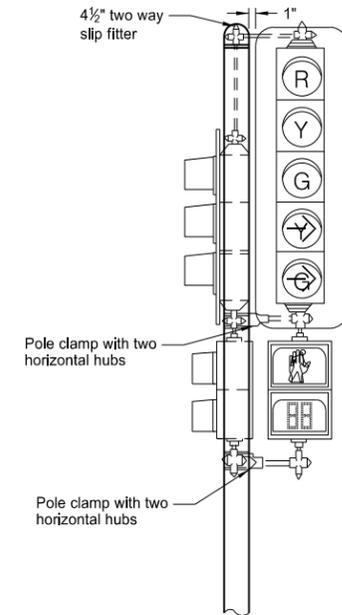


Type VI
Post Mounted - Vehicular
Post Mounted - Pedestrian (A)

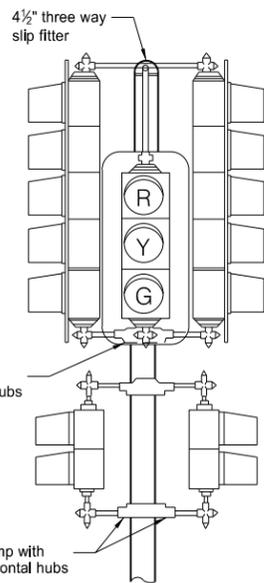


Type VII
Post Mounted - Vehicular
Post Mounted - Pedestrian (A)



Side View
Mid-Span Mounted and Mast Arm Rigid Mounted Signal Heads




Mast Arm Signal Head Bracket

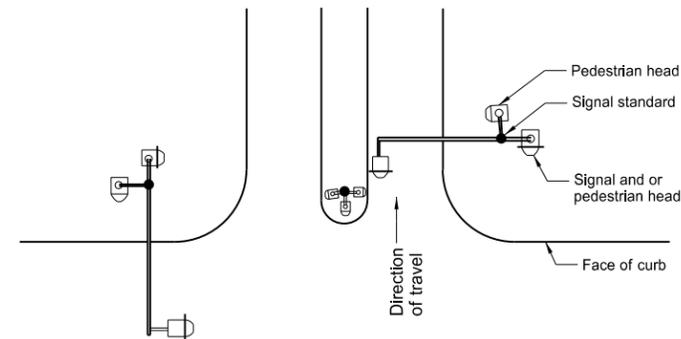


Plan Layout (typical)


Note: Signal heads shall not protrude over the face of the curb.




Front View



Isometric View
End Mounted and Mast Arm Rigid Mounted Signal Heads



Front View



Isometric View

Notes:

- Reinforcing Plates:** Polycarbonate signal heads shall have reinforcing plates installed where the mounting hardware attaches to the signal head. Where a plumbizer is used reinforcing plates shall be placed on each side of the plumbizer.
- Clearance:** Clearance from the ground line or sidewalk to the bottom of post or pedestal mounted vehicular signal heads shall be 10 ft. minimum, from pedestrian signal heads shall be 8 ft. minimum.
- Signal Heads:** See traffic signal layout for correct mounting position, numbers, size, and arrangement of lenses.
- Pole Clamps:** A pole plate with suitable banding material, as approved by the Engineer, may be substituted for the pole clamps. Where traffic signal heads and pedestrian signal heads are mounted one above the other, one pole clamp assembly may be used.
- Paint:** Signal housing shall be painted yellow. Backplates shall be painted dull black. Pole clamps and signal head mounting hardware shall be painted the same color as the signal standard shaft.


When pedestrian heads are light standard mounted, the lower 12 ft. shall be painted the same color as the other traffic signal standards.
- Mounting Details:** All signal heads shown are viewed from direction of travel.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-14-13	
REVISIONS	
DATE	CHANGE
7-8-14	Added reinforcing plate note

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 07/08/14 and the original document is stored at the North Dakota Department of Transportation

SPAN WIRE MOUNTED TRAFFIC SIGNALS

D-772-6

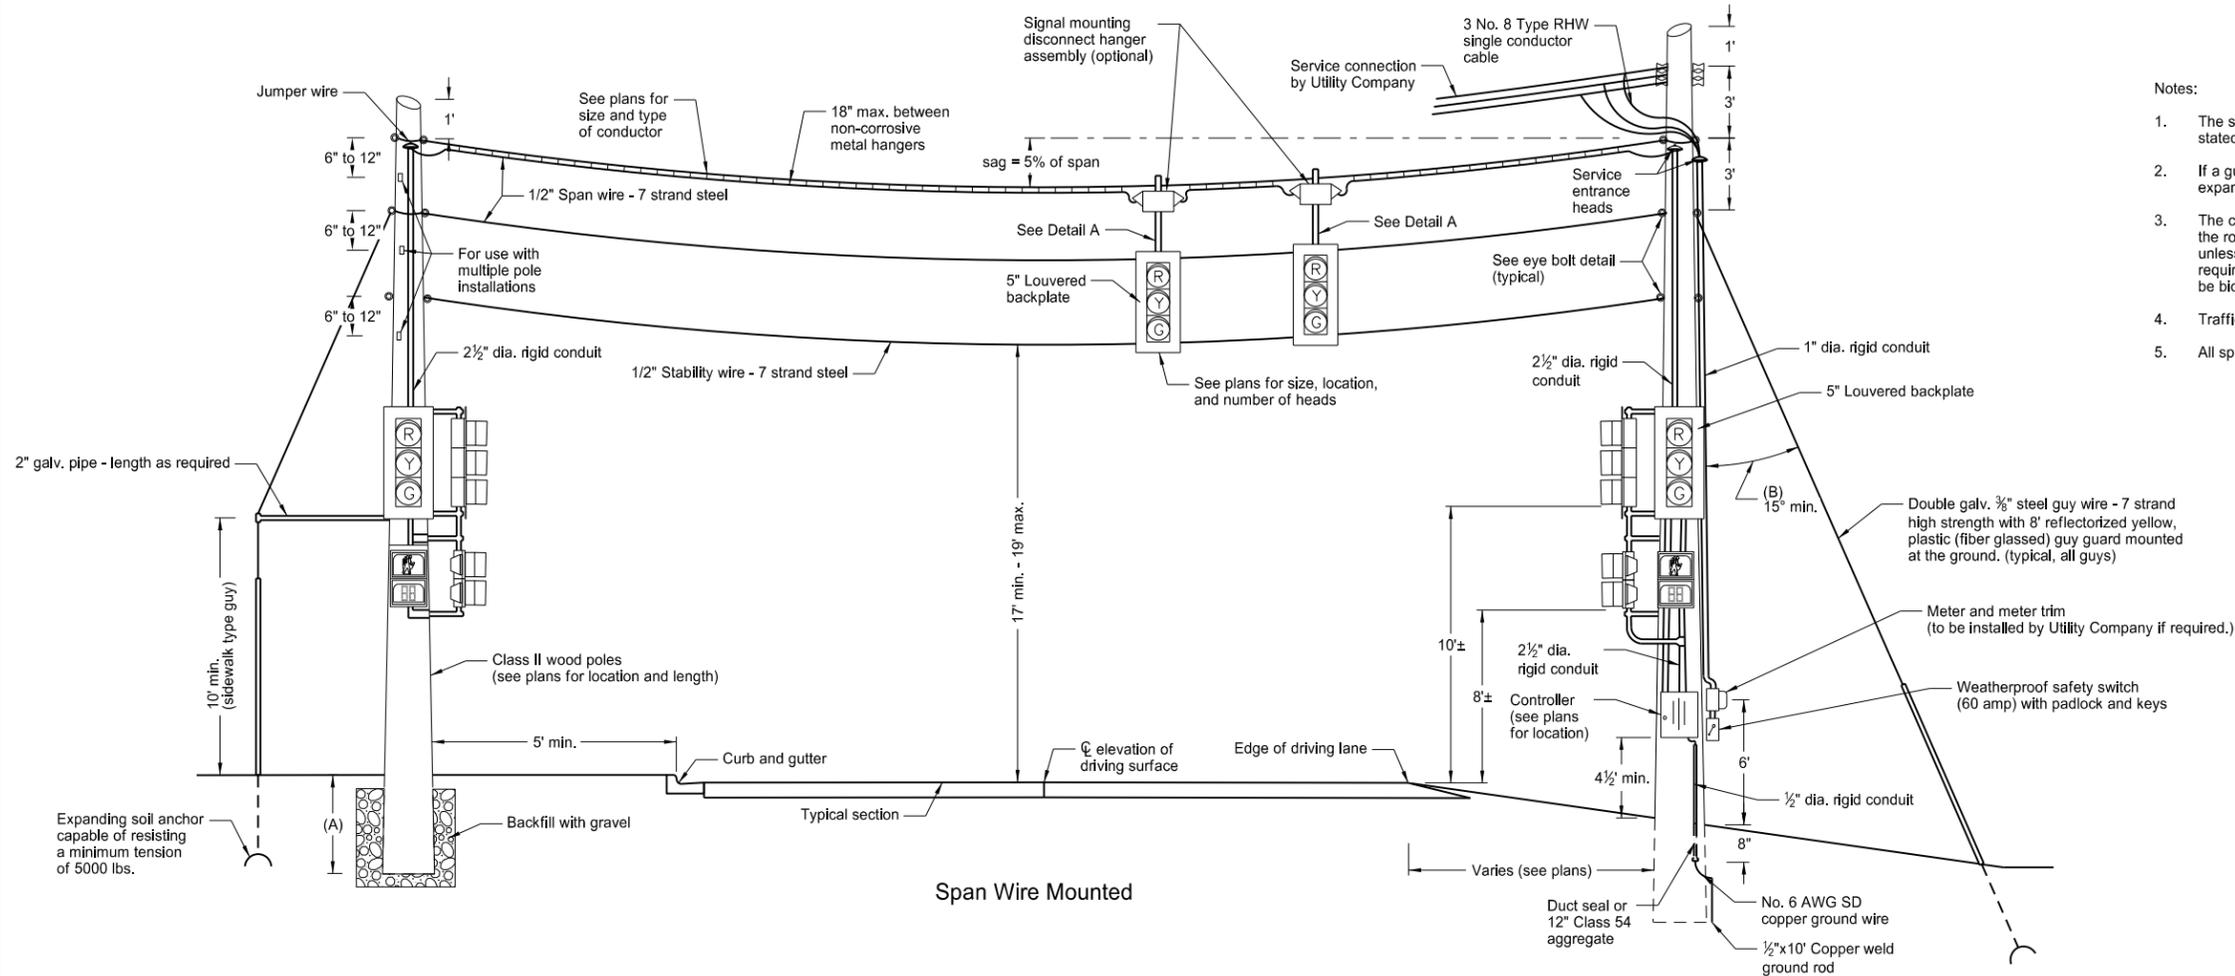


Notes:

1. The span wire mounted traffic signals shall meet the requirements as stated in the Standard Specifications Section 772 and 896.
2. If a guy wire angle of less than 45° is used, the capability of the expanding soil anchor to resist tensions on site must be increased.
3. The contractor shall maintain the required 17 to 19 ft. signal height over the roadway for a minimum period of 90 calendar days after installation, unless written permission is granted the engineer to waive the 90 day requirement. The cost of maintaining the signal head elevation shall not be bid separately but shall be included in the price bid for interim signals.
4. Traffic signal controller shall be operated on 120 volts.
5. All span wire and stability wire shall have thimble type connections.


Length of pole (ft)	Depth of pole min. (ft)
35	6
40	6
45	6.5
50	7
55	7.5

Angle	Anchor Resistance min.
30°	12,000 lbs.
15°	24,500 lbs.


Span Wire Mounted

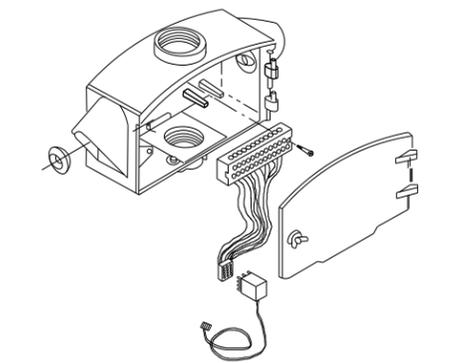



Signal Mounting Disconnect Hanger Assembly

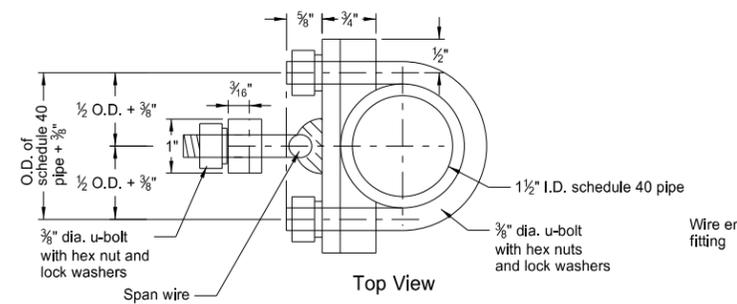


Top View

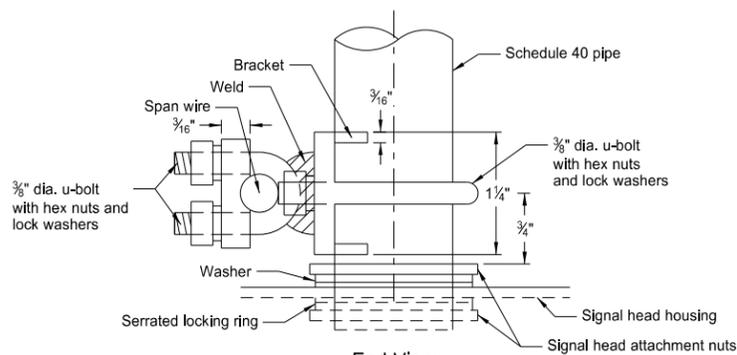

End View Detail B



Detail A

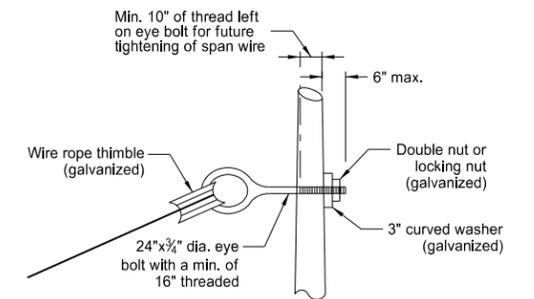

Eye Bolt Detail

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
7-8-14	Title change, span wire size and sag

This document was originally issued and sealed by
Roger Weigel,
 Registration Number
PE-2930,
 on 07/08/14 and the original document is stored at the
 North Dakota Department
 of Transportation