?	This is a special text character used in the labeling of existing features. It indicates a feature that has	BV	butterfly valve	Ct	Court	ES	end section	
	of existing features. It indicates a feature that has	Вур	bypass	Xarm	cross arm	Engr	engineer	
	an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.	C Gdrl	cable guardrail	Xbuck	cross buck	ESS	environmental sensor s	tation
	lack of description, location accuracy of purpose.	Calc	calculate	Xsec	cross sections	Eq	equal	
Abn	abandoned	Cd	candela	Xing	crossing	Eq	equation	
Abut	abutment	CIP	cast iron pipe	Xrd	Crossroad	Evgr	evergreen	
Ac	acres	СВ	catch basin	Crn	crown	Exc	excavation	
Adj	adjusted	CRS	cationic rapid setting	CF	cubic feet	Exst	existing	
Aggr	aggregate	C Gd	cattle guard	M3	cubic meter	Exp	expansion	
Ahd	ahead	C To C	center to center	M3/s	cubic meters per second	Expy	Expressway	
ARV	air release valve	Cl or €	centerline	CY	cubic yard	E ,	external of curve	
Align	alignment	Cm	centimeter	Cy/mi	cubic yards per mile	Extru	extruded	
Al	alley	Ch	chain	Culv	culvert	FOS	factor of safety	
Alt	alternate	Chnlk	chain-link	C&G	curb & gutter	F	Fahrenheit	
Alum	aluminum	Ch Blk	channel block	CI	curb inlet	FS	far side	
ADA	Americans with Disabilities Act	Ch Ch	channel change	CR	curb ramp	F	farad	
A	ampere	Chk	check	CS	curve to spiral	Fed	Federal	
&	and	Chsld	chiseled	C	cut	FP	feed point	
Appr	approach	Cir	circle	Dd Ld	dead load	Ft	feet/foot	
Approx	approximate	CI	class	Defl	deflection	Fn	fence	
ACP	asbestos cement pipe	Cl	clay	Defm	deformed	Fn P	fence post	
Asph	asphalt	CIF	clay fill	Deg or D	degree	FO	fiber optic	
AC	asphalt cement	CI Hvy	clay heavy	Dint	delineate	FB	field book	
Assmd	assumed	CI Lm	clay loam	Dintr	delineator	FD	field drive	
@	at	Clnt	clean-out	Depr	depression	F	fill	
Atten	attenuation	Clr	clear	Desc	description	FAA	fine aggregate angulari	its,
ATR	automatic traffic recorder	Cl&gr	clearing & grubbing	Desc	detail	FS	fine sand	ty
Ave	Avenue	Co S	coal slack	DWP	detectable warning panel	FH	fire hydrant	
		Comb.	combination	Dtr	detour	FI	•	
Avg ADT	average average daily traffic		commercial	Dia	diameter	Fird	flange flared	
	The state of the s	Coml	compression	Dia Dir	direction	FES		
Az	azimuth	Compr	•		distance		flared end section	
Bk	back back face	CADD	computer aided drafting & design	Dist		F Bcn	flashing beacon	
BF Be		Conc	concrete	DM	disturbed material	FA	flight auger sample	
Bs	backsight	Cond	conductor	DB	ditch block	FL	flow line	
Balc	balcony	Const	construction	DG	ditch grade	Ftg	footing	
B Wire	barbed wire	Cont	continuous	Dbl	double	FM	force main	
Barr	barricade	CSB	continuous split barrel sample	Dn	down	Fs	foresight	
Btry	battery	Contr	contraction	Dwg	drawing	Fnd	found	
Brg	bearing	Contr	contractor	Dr	drive	Fdn -	foundation	
BI	beehive inlet	CP	control point	Drwy	driveway	Frac	fractional	
Beg	begin	Coord	coordinate	DI	drop inlet	Frwy	freeway	
BM	bench mark	Cor	corner	D	dry density	Frt	front	
Bkwy	bikeway	Corr	corrected	Ea	each	FF	front face	
Bit	bituminous	CAES	corrugated aluminum end section	Esmt	easement	F Disp	fuel dispenser	
Blk	block	CAP	corrugated aluminum pipe	E	East			
Bd Ft	board feet	CMES	corrugated metal end section	EB	Eastbound		NODTHERMOTA	
ВН	bore hole	CMP	corrugated metal pipe	Elast	elastomeric		NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
BS	both sides	CPVCP	corrugated poly-vinyl chloride pipe	EL	electric locker		07-01-14	This
Bot	bottom	CSES	corrugated steel end section	E Mtr	electric meter		REVISIONS DATE CHANGE	is
DI J	Davidavand	CCD					I DATE I CHANGE	1

Elec

EDM

Ellipt

Emb

Emuls

Elev or El

electric/al

elevation

elliptical

embankment

emulsion/emulsified

electronic distance meter

CSP

С

Co

Crse

C Gr

CS

corrugated steel pipe

coulomb

County

course

course gravel

course sand

Blvd

Bndry

Brkwy

ВС

Br

Bldg

Boulevard

boundary

brass cap

breakaway

bridge

building

DEPARTMENT OF TRANSPORTATION 07-01-14 REVISIONS DATE CHANGE		NORTH DAKOTA					
REVISIONS	DEPARTM						
		07-01-14					
DATE CHANGE		REVISIONS					
	DATE	CHANGE					

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

PSD

Pvmt

passing sight distance

pavement

FFP	fuel filler pipes	I Pn	Iron Pin	MC	medium curing
FLS	fuel leak sensor	IΡ	iron Pipe	M	mega
Furn	furnish/ed	Jt	joint	Mer	meridian
Gal	gallon	J	joule	M	meter
Galv	galvanized	Jct	junction	M/s	meters per second
Gar	garage	K	kelvin	M	mid ordinate of curve
Gs L	gas line	Kn	kilo newton	Mi	mile
3 Reg	gas line regulator	Кра	kilo pascal	MM	mile marker
3MV	gas main valve	Kg	kilogram	MP	mile post
3 Mtr	gas meter	Kg/m3	kilogram per cubic meter	MI	milliliter
3SV	gas service valve	Km	kilometer	Mm	millimeter
GVP	gas vent pipe	K	Kip(s)	Mm/hr	millimeters per hour
3V. 3V	gate valve	LS	Land Surveyor (licensed)	Min	minimum
3a 3a	gauge	LSIT	Land Surveyor In Training	Misc	miscellaneous
Geod	geodetic	Ln	lane	Mon	monument
SIS				Mnd	
	Geographical Information System	Lg	large	Mtbl	mound
) >D0	giga	Lat	latitude		mountable
GPS	Global Positioning System	Lt	left	Mtd	mounted
Gov	government	L	length of curve	Mtg	mounting
Grd	graded/grade	Lens	lenses	Mk	muck
Gr	gravel	LvI	level	Mun	municipal
Grnd	ground	LB	level book	N	nano
GWM	ground water monitor	LvIng	leveling	NGS	National Geodetic Survey
Gdrl	guardra i l	Lht	light	NS	near side
Gtr	gutter	LP	light pole	Neop	neoprene
H Plg	H piling	Ltg	lighting	Ntwk	network
Hdwl	headwall	Lig Co	lignite coal	N	newton
Ha	hectare	L i g SI	lignite slack	N	North
Ht	height	LF	linear foot	NE	North East
HI	height of instrument	Liq	liquid	NW	North West
Hel	helical	LL	liquid limit	NB	Northbound
-1	henry	L	litre	No. or #	number
Hz	hertz	Lm	loam	Obsc	obscure(d)
HDPE	high density polyethylene	Loc	location	Obsn	observation
HM	high mast	LC	long chord	Ocpd	occupied
HP	high pressure	Long.	longitude	Осру	occupy
HPS	high pressure sodium	Lp	loop	Off Loc	office location
Hwy	highway	LD	loop detector	O/s	offset
	horizontal		lumen	O/s OC	on center
Hor		Lm			
HBP	hot bituminous pavement	Lum	luminaire	C	one dimensional consolidation
HMA	hot mix asphalt	L Sum	lump sum	OC	organic content
Hr	hour(s)	Lx	lux	Orig	original
Hyd	hydrant	ML	main line	O To O	out to out
Ph 	hydrogen ion content	M Hr	man hour	OD	outside diameter
d	identification	MH	manhole	ОН	overhead
n or "	inch	Mkd	marked	PMT	pad mounted transformer
ncl	inclinometer tube	Mkr	marker	Pg	pages
IMH	inlet manhole	Mkg	marking	Pntd	painted
D	inside diameter	MA	mast arm	Pr	pair
nst	instrument	Matl	material	Pnl	panel
Intchg	interchange	Max	maximum	Pk	park
Intmdt	intermediate	MC	meander corner	PK	Parker-Kalon nail
ntscn	intersection	Meas	measure	Pa	pascal
Inv	Invert	Mdn	modian	Den	paccing cight distance

Mdn

MD

nν

IM

invert

iron monument

median

median drain

Ped pedestrian PPP pedestrian pushbutton post Pen. penetration perforated Perf Per. perimeter PL pipeline Ы place P&P plan & profile PL plastic limit Ы plate Pt point PCC point of compound curve PC point of curve ΡI point of intersection PRC point of reverse curvature PΤ point of tangent POC point on curve POT point on tangent PΕ polyethylene PVC polyvinyl chloride PCC Portland Cement concrete Lb or # pounds PP power pole Preempt preemption Prefab prefabricated Prfmd preformed Prep preperation Press. pressure PRV pressure relief valve Prestr prestressed Pvt private PD private drive Prod. production/produce Prog programmed Prop. property Prop Ln property line

proposed

pull box

pedestal

Ped

Ppsd

PB

DEDARTA	NORTH DAKOTA MENT OF TRANSPORTATION	
DEPARTM		l
	07-01-14	l
DATE	REVISIONS	l
DATE	CHANGE	l
08-03-15	General Revisions	
		l

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS D-101-3

Qty quantity SN sign number Tan tangent Qtr Sig Т quarter signal tangent (semi) Si CI TS Rad or R radius silt clay tangent to spiral RR Si CI Lm Tel railroad silty clay loam telephone Si Lm Rlwy railway silty loam Tel B Telephone Booth Rsd raised Sgl single Tel P telephone pole RTP random traverse point SC slow curing Τv television SS slow setting Rge or R Temp temperature range Sm RC rapid curing small Temp temporary S TBM Rec record South temporary bench mark SE South East Rcy Τ tesla recycle SW South West RAP Τ thinwall tube sample recycled asphalt pavement SB **RPCC** recycled portland cement concrete Southbound T/mi tons per mile Ref reference Sp spaces Ts topsoil R Mkr reference marker Spcl special Twp or T township SA RMreference monument special assembly Traf traffic SP Refl reflectorized special provisions **TSCB** traffic signal control box G RCB Tr reinforced concrete box specific gravity trail **RCES** Spk reinforced concrete end section spike Transf transformer RCP SC spiral to curve TB reinforced concrete pipe transit book ST RCPS spiral to tangent Trans transition reinforced concrete pipe sewer SB Reinf reinforcement split barrel sample TT transmission tower Res reservation SH sprinkler head Trans transverse Ret retaining SV sprinkler valve Trav traverse Sq TP Rev square traverse point reverse SF Rt square feet Trtd treated right R/W Km2 Trmt right of way square kilometer treatment Riv M2 Qc triaxial compression river square meter SY Rd **TERO** road square yard tribal employment rights ordinance Rdbd Stk Tpl road bed stake triple TP Std turning point Rdwy roadway standard **RWIS** Ν roadway weather information system standard penetration test Тур typical Rk rock Std Specs standard specifications Qu unconfined compressive strength Rt route Sta station Ugrnd underground Sta Yd USC&G US Coast & Geodetic Survey Salv salvage(d) station yards US Geologic Survey Sd sand Stm L steam line USGS Sdy CI sandy clay SEC steel encased concrete Util utility Sdy CI Lm sandy clay loam SMA stone matrix asphalt VG valley gutter Sdy FI sandy fill SSD stopping sight distance Vap vapor Sdy Lm sandy loam SD storm drain Vert vertical San sanitary sewer line St street VC vertical curve SPP VCP Sc scoria structural plate pipe vitrified clay pipe SPPA Sec seconds structural plate pipe arch ٧ volt Sec section Str structure Vol volume SL Subd subdivision Wkwy walkway section line W Sep separation Sub subgrade water content Sub Prep WGV Seq sequence subgrade preperation water gate valve Serv Ss WL water line service subsoil Sh SE superelevation WM water main shale SS Sht sheet supplement specification WMV water main valve Shtng supplemental sheeting Supp W Mtr water meter surfacing WSV Shldr shoulder Surf water service valve Sw sidewalk Surv survey WW water well S W siemens Sym symmetrical watt SD SI systems international Wrng sight distance wearing

Wb weber WIM weigh in motion W west WB westbound Wrng wiring W/ with W/o without WC witness corner WGS world geodetic system Ζ zenith

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION
07-01-14
REVISIONS
DATE CHANGE
08-03-15 General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

702COM 702 Communications
ACCENT Accent Communications
AGASSIZ WU Agassiz Water Users Incorporated
AGC Assiociated General Contractors of America

All PI Alliance Pipeline

ALL SEAS WU All Seasons Water Users Association
AMOCO PI Amoco Pipeline Company
AMRDA HESS Amerada Hess Corporation

AT&T AT&T Corporation

B PAW Bear Paw Energy Incorporated

BAKER ELEC Baker Electric

BASIN ELEC
BEK TEL
BELLE PL
Belle Fourche Pipeline Company
BASIN ELEC
Basin Electric Cooperative Incorporated
Belle Fourche Pipeline Company

BLM Bureau of Land Management
BNSF Burlington Northern Santa Fe Railway

BOEING Boeing

BRNS RWD Barnes Rural Water District
BURK-DIV ELEC Burke-Divide Electric Cooperative

BURL WU Burleigh Water Users

Cable One Cable One CABLE SERV Cable Services

CAP ELEC
Capital Electric Cooperative Incorporat
CASS CO ELEC
CASS RWU
CASS RWU
CAV ELEC
Cass Rural Water Users Incorporated
CAV ELEC
Cavalier Rural Electric Cooperative

CBLCOM Cablecom Of Fargo CENEX PL Cenex Pipeline

CENT PL WATER DIST Central Pipe Line Water District
CENT PWR ELEC Central Power Electric Cooperative

COE Corps of Engineers **CONS TEL** Consolidated Telephone CONT RES Continental Resource Inc CPR Canadian Pacific Railway DOE Department Of Energy DAK CARR Dakota Carrier Network DAK CENT TEL Dakota Central Telephone DAK RWD Dakota Rural Water District DGC Dakota Gasification Company

DICKEY R NET Dickey Rural Networks

DICKEY RWU Dickey Rural Water Users Association

DICKEY TEL Dickey Telephone
DNRR Dakota Northern Railroad
DOME PL Dome Pipeline Company

DVELEC Dakota Valley Electric Cooperative
DVMW Dakota, Missouri Valley & Western
ENBRDG Enbridge Pipelines Incorporated

ENVENTIS Enventis Telephone
FALK MNG Falkirk Mining Company

FHWA Federal Highway Administration
G FKS-TRL WD Grand Forks-traill Water District
GETTY TRD & TRAN Getty Trading & Transportation
GLDN W ELEC Golden West Electric Cooperative
GRGS CO TEL Griggs County Telephone

GT PLNS NAT GAS Great Plains Natural Gas Company
HALS TEL Halstad Telephone Company

IDEA1 Idea1

INT-COMM TEL Inter-Community Telephone Company
KANEB PL Kaneb Pipeline Company
KEM ELEC Kem Electric Cooperative Incorporated

KOCH GATH SYS

Koch Gathering Systems Incorporated

LKHD PL

Lakehead Pipeline Company

LNGDN RWU Langdon Rural Water Users Incorporated

LWR YELL R ELEC Lower Yellowstone Rural Electric
MCKNZ CON McKenzie Consolidated Telcom
MCKNZ ELEC McKenzie Electric Cooperative

MCKNZ WRD McKenzie County Water Resource District

MCLEOD McLeod USA

MCLN ELEC McLean Electric Cooperative MCLN-SHRDN R WAT McLean-Sheridan Rural Water

MDU Montana-dakota Utilities
MID-CONT CABLE Mid-Continent Cable

MIDSTATE TEL Midstate Telephone Company
MINOT CABLE Minot Cable Television
MINOT TEL Minot Telephone Company
MISS W W S Missouri West Water System

MNKOTA PWR Minnkota Power

MOR-GRAN-SOU ELEC Mor-gran-sou Electric Cooperative MOUNT-WILLI ELEC Mountrail-williams Electric Cooperative

MRE LBTY TEL Moore & Liberty Telephone
MUNICIPAL City Water And Sewer
MUNICIPAL City Of '......'

N CENT ELEC
North Central Electric Cooperative
N VALL W DIST
NOrth Valley Water District
ND PKS & REC
North Dakota Parks And Recreation
ND TEL
North Dakota Telephone Company
NDDOT
North Dakota Department of Transportation

NDSU SOIL SCI DEPT NDSU Soil Science Department

NEMONT TEL Nemont Telephone

NODAK R ELEC
NOON FRMS TEL
Noonan Farmers Telephone Company

NPR Northern Plains Railroad
NSP Northern States Power

NTH PRAIR RW Northern Prairie Rural Water Association

NTHN BRDR PL Northern Border Pipeline

NTHN PLNS ELEC Northern Plains Electric Cooperative Incorporated

NTHWSTRN REF Northwestern Refinery Company
NW COMM Northwest Communication Cooperation

ONEOK Oneok gas

OSHA Occupational Safety and Health Administration

OTTR TL PWR Otter Tail Power Company
P L E M Prairielands Energy Marketing
POLAR COM Polar Communications

PVT ELEC Private Electric
QWEST Qwest Communications
R&T W SUPPLY R & T Water Supply Association
RAMSEY R SEW Ramsey Rural Sewer Association
RAMSEY RW Ramsey Rural Water Association
RAMSEY UTIL Ramsey County Rural Utilities

RED RIV TEL Red River Rural Telephone **RESVTN TEL** Reservation Telephone ROBRTS TEL Roberts Company Telephone R-RIDER ELEC Roughrider Electric Coop Red River Valley & Western Railroad RRVW RSR ELEC R.S.R. Electric Cooperative SEWU South East Water Users Incorporated SCOTT CABLE Scott Cable Television Dickinson SHERDN ELEC Sheridan Electric Cooperative

SHEYN VLY ELEC
SKYTECH
Skyland Technologies Incorporated
SLOPE ELEC
SOURIS RIV TELCOM
Sheyenne Valley Electric Cooperative
Skyland Technologies Incorporated
Slope Electric Cooperative Incorporated
Souris River Telecommunications

ST WAT COMM State Water Commission
STATE LN WATER State Line Water Cooperative

STER ENG Sterling Energy

STUT RWU Stutsman Rural Water Users
SW PL PRJ Southwest Pipeline Project
T M C Turtle Mountain Communications

TCI TCI of North Dakota

TESORO HGH PLNS PL
TRI-CNTY WU
TRL CO RWU
UNTD TEL
Tesoro High Plains Pipeline
Tri-County Water Users Incorporated
Traill County Rural Water Users
United Telephone

UPPR SOUR WUA

Upper Souris Water Users Association

US SPRINT U.S. Sprint

USAF MSL CABLE
USFWS
US Fish and Wildlife Service
USW COMM
U.S. West Communications
VRNDRY ELEC
W RIV TEL
West River Telephone Incorporated
WEB
U.S.A.F. Missile Cable
US Fish and Wildlife Service
West Communications
Verendrye Electric Cooperative
West River Telephone Incorporated
W.E.B. Water Development Association

WILLI RWA Williams Rural Water Association
WILSTN BAS PL Williston Basin Interstate Pipeline Company
WLSH RWD Walsh Water Rural Water District

WOLVRTN TEL Wolverton Telephone

Xcel Energy

XLENER

YSVR Yellowstone Valley Railroad

	NORTH DAKOTA MENT OF TRANSPORTATION	DEPARTM
	07-01-14	
	REVISIONS	
	CHANGE	DATE
۰ ا		

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Line Styles D-101-20

	Line Style	es	D-101-20
Limits of Const Transition Line	— s — s — Floating Silt Curtain	Existing Aggregate (Cross Section View)	Existing Centerline
····· Bale Check	——— T —— Existing Telephone Line	Existing Curb and Gutter (Cross Section View	y) ——————— Supplemental Contour
····· Rock Check	——— TV ——— Existing TV Line	—— —— —— Existing Riprap	
····· Sight Distance Triangle Line	void — void — void — v Existing Assumed Ground (Not Surveyed)	—— —— Existing Underground Vault or Lift Station	
Small Hidden Object	void — void — void — v Tentative Ground Line	——— Tangent Line	——————————————————————————————————————
——————————————————————————————————————	——— w ——— Existing Water or Steam Line	Hidden Object	- · · - · - · - · · - · - · - · - · Failure Line
Existing Ground	Existing Under Drain		—— —— —— - Existing Conditions
Existing Topsoil (Cross Section View)		—— —— —— – Existing Conduit	—— —— —— - Existing Ground (Details)
Large Hidden Object		—— — Topsoil Profile	Existing Sixteenth Section Line
—— —— —— Edge Drain	Existing Slotted Drain	————————— Existing Conductor	Existing Right of Way Not State Owned
D D Geotextile Fabric Type D	+ + + Existing Cemetary Boundary	————————— Conductor	Phantom Object
Existing Electrical	Centerline Pavement Marking	——————— Fiber Optic	— - — - — - — Centerline Main
F0 Existing Fiber Optic Line	Barrier with Centerline Pavement Marking	Existing Loop Detector	—·—·—·—·—· Existing Guardrail Cable
F0 Existing TV Fiber Optic	Barrier Pavement Marking	——————————————————————————————————————	• • Existing Guardrail Metal
——— G —— Existing Gas Pipe	Stripe 4 IN Dotted Extension White	——————————————————————————————————————	
Geo - Geogrid	Stripe 8 IN Dotted Extension White	——————————————————————————————————————	— — — — — Excavation Limits
——— OH —— Existing Overhead Utility Line	Stripe 8 IN Lane Drop	——————————————————————————————————————	
——— P —— Existing Power		————————— Existing Tie Point Line	· · · · · · Existing Adjacent Block Lines
———— PL ——— Existing Fuel Pipeline	Existing Box Culvert Bridge	Existing State or International Line	· · · · · · Existing Adjacent Lot Lines
Existing Undefined Above Ground Pipe Line	Existing Concrete Surface		· · · · · · Existing Adjacent Property Line
R — R Geotextile Fabric Type R	Existing Drainage Structure	Existing County	Existing Adjacent Subdivision Lines
R — R — Geotextile Fabric Type R1	Easement	Existing Section Line	NORTH DAKOTA DEPARTMENT OF TRANSPORTATION 07-01-14 This document was originally
— REMOVE — REMOVE — Remove Line	Existing Concrete	Existing Township	REVISIONS issued and sealed by DATE CHANGE Roger Weigel, Registration Number
	Existing Easement	—— — Existing Railroad Centerline	Registration Number PE- 2930, on 07/01/14 and the original
——— s ——— s —— Geotextile Fabric Type S	——— Existing Gravel Surface	—— – — Centerline	document is stored at the North Dakota Department
			of Transportation

D-101-21

			Line Styles		
	Subgrade Reinforcement	•	Existing Railroad Switch		Sheet Piling
	Existing Down Guy Wire Down Guy	•	Overhead Sign Structure Cantilever	R R R R R R	W-Beam w Posts
X X	Existing Fence		24 Inch Pipe	<u> </u>	Existing W-Beam Guardrail with Posts
	Existing Railroad		Reinforced Concrete Pipe		Exst Wet Area-Vegetation Break
======================================	Existing Sanitary Sewer	T	Signal Head with Mast Arm	<u></u>	Existing Wetland Delineated
SAN FM	Existing Sanitary Force Main	f	Existing Signal Head with Mast Arm		
======== sD ======:	Existing Storm Drain	+++++++++++++++++++++++++++++++++++++++	Tie Bar at Random Spacing		
SD FM	Existing Storm Drain Force Main		3-Cable w Posts		
xxx	Fence		Existing 3-Cable w Posts		
xxx	Silt Fence		Site Boundary		
	Existing Field Line		Fiber Rolls		
∼ • ·	Exst Flow		Doweled Joint		
~ · ·	Flow		Tie Bar 30 Inch 4 Foot Center to Center		
	Existing Culvert		Tie Bar 18 Inch 3 Foot Center to Center		
	Existing Curb		Existing Berm, Dike, Pit, or Earth Dam		
	Existing Valley Gutter		Existing Ditch Block		
	Existing Driveway Gutter		Depression Contours		
<u></u>	Existing Curb and Gutter		Existing City Corporate Limits or Reservation Bo	undary	
=======================================	Existing Mountable Curb and Gutter	***************************************	Gravel Pit - Borrow Area		
•	Existing Double Micro Loop Detector		Existing Tree Boundary		
•	Micro Loop Detector Double		Tree Row		
•	Existing Overhead Sign Structure	***************************************	Existing Brush or Shrub Boundary		
•	Existing Micro Loop Detector		Existing Retaining Wall		
•	Micro Loop Detector		Existing Planter or Wall		
•	Existing Overhead Sign Structure Cantilever		Retaining Wall (Plan View)		

	NORTH DAKOTA		
DEPARTMENT OF TRANSPORTATION			
	07-01-14		
	REVISIONS		
DATE	CHANGE		

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

D-101-30 Symbols \triangle North Arrow (Half Scale) Attenuation Device Existing Railroad Battery Box 0 Existing Delineator Type E Existing Bush or Shrub Truck Mounted Attenuator \vdash Diamond Grade Delineator Type A 0 \triangle Existing EFB Misc (Type I Barricade \vdash Diamond Grade Delineator Type B ٦ Existing Flashing Beacon Existing Gas Cap or Stub \bigcirc Diamond Grade Delineator Type C ٦ Existing Pipe Mounted Flasher Type II Barricade # Existing Sanitary Cap or Stub Type III Barricade \bigcirc Diamond Grade Delineator Type D Existing Storm Drain Cap or Stub Existing Pad Mounted Feed Point (1) Catch Basin 0 Diamond Grade Delineator Type E Existing Water Cap or Stub 0.0 Existing Pipe Mounted Feed Point with Pad Flexible Delineator Cairn or Stone Circle (C) **Existing Sanitary Cleanout** Existing Pole Mounted Feed Point Video Detection Camera Flexible Delineator Type A 0 **Existing Concrete Foundation** Existing Railroad Frog \bigcirc Storm Drain Cap or Stub Flexible Delineator Type B Existing Traffic Signal Controller Existing Snow Gate 18 ◁ Corrugated Metal End Section 18 Inch Flexible Delineator Type C \subseteq Existing Pad Mounted Signal Controller Existing Snow Gate 28 Corrugated Metal End Section 24 Inch 0 Flexible Delineator Type D Existing Sixteenth Section Corner Existing Snow Gate 40 Θ 0 Corrugated Metal End Section 30 Inch Flexible Delineator Type E Existing Headwall Existing Quarter Section Corner \oplus Corrugated Metal End Section 36 Inch Existing Pedestrian Head with Number \vdash Delineator Type A **Existing Section Corner** \bigcirc Corrugated Metal End Section 42 Inch \vdash Delineator Type A Reset Existing Railroad Crossbuck Existing Signal Head

Existing Sprinkler Head Corrugated Metal End Section 48 Inch \vdash Delineator Type B Existing Satellite Dish Þ Concrete Foundation \vdash Delineator Type B Reset Existing Fuel Dispensers Q Existing Fire Hydrant ((()) **Ground Connection Conductor** # Delineator Type C Existing Flexible Delineator Type A Existing Catch Basin Drop Inlet Neutral Connection Conductor \bigcirc Delineator Type D Existing Flexible Delineator Type B Existing Curb Inlet OID Phase 1 Connection Conductor **(3)** Delineator Type E Existing Flexible Delineator Type C **Existing Manhole Inlet** Phase 2 Connection Conductor Delineator Drums 0 Existing Flexible Delineator Type D **Existing Junction Box**

(3)

0

Existing Flexible Delineator Type E

Existing Delineator Type A

Existing Delineator Type B

Existing Delineator Type C

Existing Delineator Type D

Spot Elevation

Existing Artifact

₳

(

•

Existing Access Control Arrow

Existing Flashing Beacon

Existing Benchmark

Traffic Cone

Signal Controller

Alignment Data Point

Pad Mounted Signal Controller

Emergency Vehicle Detector

 \bigcirc

DEPARTM	NORTH DAKOTA MENT OF TRANSPORTATION	
	07-01-14	
	REVISIONS	
DATE	CHANGE	

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

D-101-31 Symbols 0 Existing Light Standard (⊗) Existing Manhole with Valve Water 0 Existing Telephone Pole (_) Existing Undefined Manhole (\bigcirc) (3) Existing High Mast Light Standard 10 Luminaire Existing Water Manhole Existing Wood Pole Existing Undefined Pull Box Ω Existing High Mast Light Standard 3 Luminaire Existing Mile Post Type A Existing Post Existing Undefined Pedestal Existing High Mast Light Standard 4 Luminaire Existing Mile Post Type B Existing Pedestrian Push Button Post Existing Undefined Valve Existing High Mast Light Standard 5 Luminaire Existing Mile Post Type C Δ Existing Control Point CP Existing Undefined Pipe Vent Existing Control Point GPS-RTK Existing High Mast Light Standard 6 Luminaire Existing Reference Marker Δ Existing Gas Valve Existing High Mast Light Standard 7 Luminaire Existing RW Marker ◬ **Existing Control Point TRI** Existing Water Valve (D) Existing High Mast Light Standard 8 Luminaire Existing Utility Marker \triangle Existing Reference Marker Point NGS Existing Fuel Pipe Vent (8) Existing Gas Pipe Vent Existing High Mast Light Standard 9 Luminaire 0 Iron Monument Found Existing Pull Box \otimes Existing Overhead Sign Structure Load Center Iron Pin R/W Monument Existing Intelligent Transportation Pull Box Existing Sanitary Pipe Vent 7 Existing Object Marker Type I ø Existing Water Pump Existing Storm Drain Pipe Vent **Existing Luminaire** Existing Object Marker Type II Existing Light Standard Luminaire k OID Existing Slotted Reinforced Concrete Pipe Existing Water Pipe Vent Existing Federal Mailbox Existing Object Marker Type III Existing RR Profile Spot **Existing Weather Station** Existing Private Mailbox Ω Existing Electrical Pedestal Existing Fuel Leak Sensors Existing Ground Water Well Bore Hole \boxtimes \oplus Ω Existing Windmill or Tower Existing Meander Section Corner Existing Telephone Pedestal Existing Highway Sign \oplus Existing Meter П Existing Fiber Optic Telephone Pedestal Existing Miscellaneous Spot Existing Witness Corner (_) Ω ¤ Existing Electrical Manhole Existing TV Pedestal Existing Lighting Standard Pole Flashing Beacon (\bigcirc) Existing Gas Manhole П Existing Fiber Optic TV Pedestal 0 Existing Traffic Signal Standard Flagger \Box (\bigcirc) \bigcirc Existing Sanitary Manhole • Existing Fuel Filler Pipes A Existing Transformer Θ (_) Existing Sanitary Force Main Manhole Δ Existing Traverse PI Aerial Panel Existing Large Evergreen Tree \times (⊗) Existing Sanitary Manhole with Valve \circ Existing Pole Existing Small Evergreen Tree nt was originally (_) Existing Storm Drain Manhole Existing Large Tree d sealed by -**Existing Power Pole** Weigel, £3 (_) Existing Force Main Storm Drain Manhole 8 Existing Power Pole with Transformer Existing Small Tree

Existing Tree Trunk

Existing Pad Mounted Traffic Signal Control Box

 \subseteq

(⊗)

(_)

Existing Force Main Storm Drain Manhole with Valve

Existing Telephone Manhole


) [Pipe Mounted Flasher	
;	Sanitary Force Main with	Valve
DEPARTM	NORTH DAKOTA MENT OF TRANSPORTATION	
	07-01-14	This document
	REVISIONS	issued and
DATE	CHANGE	Roger '
		Registration
		PE- 2
		on 07/01/14 a
		document is
		North Dakota
		of Trans
•		


ion Number 2930, and the original stored at the ta Department sportation

Symbols D-101-32

			Symbols				D-101-32
П	Pad Mounted Feed Point	-	Light Standard 1000 Watt High Pressure Sodium Vapor Luminair	e k	Object Marker Type I		Reinforced Concrete End Section 48 Inch
0 0	Pipe Mounted Feed Point with Pad	→	Light Standard 150 Watt High Pressure Sodium Vapor Luminaire	k	Object Marker Type II		Reinforced Concrete End Section 54 Inch
\bigcirc	Pole Mounted Feed Point	─ ♦	Light Standard 175 Watt High Pressure Sodium Vapor Luminaire	 k	Object Marker Type III	(D)	Reset Right of Way Marker
<u>į</u>	Headwall	-	Light Standard 200 Watt High Pressure Sodium Vapor Luminaire		Caution Mode Arrow Panel	•	Reset USGS Marker
	Double Headwall with Vegitation Barrier	-	Light Standard 250 Watt High Pressure Sodium Vapor Luminaire	П	Back to Back Vertical Panel Sign	(9)	Right of Way Markers
	Single Headwall with Vegitation Barrier	—	Light Standard 310 Watt High Pressure Sodium Vapor Luminaire	\bigoplus_{\blacksquare}	Double Direction Arrow Panel	0	Riser 30 Inch
•	Pole Mounted Head	-O	Light Standard 35 Watt High Pressure Sodium Vapor Luminaire		Left Directional Arrow Panel	CSB	Continuous Split Barrel Sample
	Sprinkler Head	-	Light Standard 400 Watt High Pressure Sodium Vapor Luminaire	\Rightarrow	Right Directional Arrow Panel	EA .	Flight Auger Sample
•	Fire Hydrant	\rightarrow	Light Standard 50 Watt High Pressure Sodium Vapor Luminaire	ooo	Sequencing Arrow Panel	N S B	Split Barrel Sample
	Inlet Type 1	—	Light Standard 70 Watt High Pressure Sodium Vapor Luminaire		Truck Mounted Arrow Panel	Ŀ	Thinwall Tube Sample
	Inlet Type 2	-	Light Standard 700 Watt High Pressure Sodium Vapor Luminaire	-	Power Pole	‡	Highway Sign
	Double Inlet Type 2	0	Manhole		Wood Pole	O .	SNOW GATE 18 FT
Ш	Inlet Grate Type 2	O	Manhole 48 Inch	•	Pedestrian Push Button Post	O .	SNOW GATE 28 FT
	Junction Box	0	Sanitary Force Main Manhole	•	Property Corner	0 .	SNOW GATE 40 FT
	High Mast Light Standard 10 Luminaire	0	Sanitary Sewer Manhole	\otimes	Pull Box	Z	Standard Penetration Test
	High Mast Light Standard 3 Luminaire	0	Storm Drain Manhole	\otimes	Intelligent Transportation Pull Box	A	Transformer
	High Mast Light Standard 4 Luminaire	(11)	Storm Drain Manhole with Inlet	ø	Sanitary Pump	Incl	Inclinometer Tube
	High Mast Light Standard 5 Luminaire	þ	Reset Mile Post	ø	Storm Drain Pump	0	Underdrain Cleanout
	High Mast Light Standard 6 Luminaire	þ	Mile Post Type A		Reinforced Pavement		Excavation Unit
	High Mast Light Standard 7 Luminaire	þ	Mile Post Type B	В	Reinforced Concrete End Section 15 Inch	⊖	Water Valve
	High Mast Light Standard 8 Luminaire	l -	Mile Post Type C	В	Reinforced Concrete End Section 18 Inch	DEPAR	NORTH DAKOTA MENT OF TRANSPORTATION This document was originally
	High Mast Light Standard 9 Luminaire	(11)	Right of Way Marker	\forall	Reinforced Concrete End Section 24 Inch	DATE	O7-01-14 REVISIONS CHANGE This document was originally issued and sealed by Roger Weigel,
	Relocate Light Standard	•-	Tubular Marker	\forall	Reinforced Concrete End Section 30 Inch		Registration Number PE- 2930 ,
	Overhead Sign Structure Load Center	•	Alignment Monument		Reinforced Concrete End Section 36 Inch		on 07/01/14 and the original document is stored at the North Dakota Department
- ♦	Light Standard 100 Watt High Pressure Sodium Vapor Luminaire	•	Iron Pin Reference Monument		Reinforced Concrete End Section 42 Inch		of Transportation


EROSION AND SILTATION CONTROLS

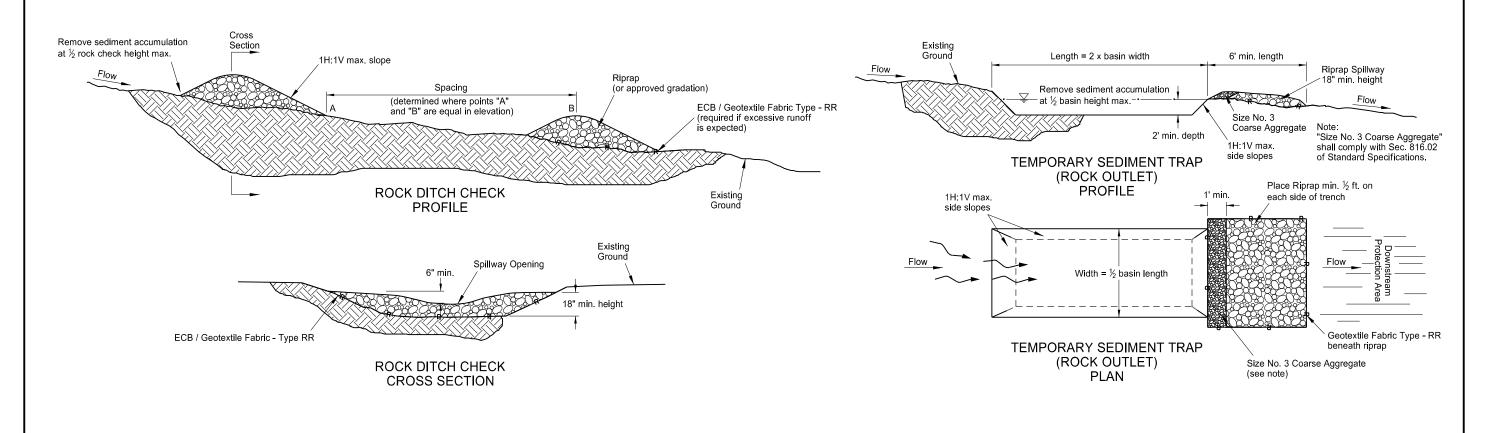

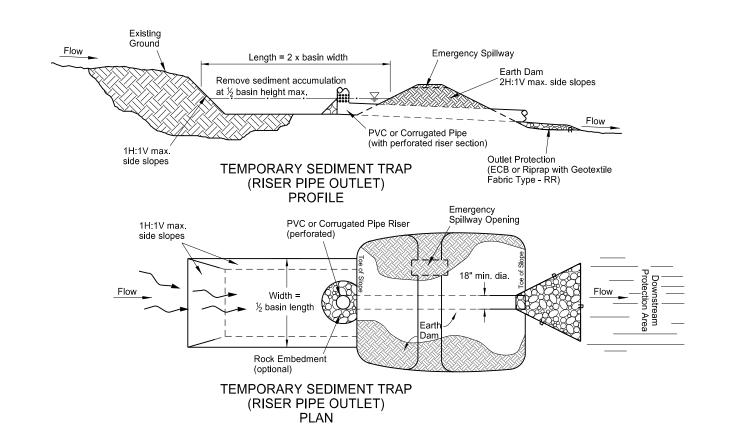


DEPARTM
DATE
06-26-14

This document was originally issued and sealed by Roger Weigel Registration Number PE- 2930, on 06/26/14 and the original document is stored at the North Dakota Department of Transportation

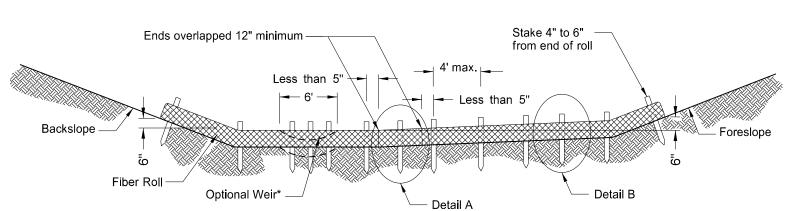



*Optional Weir. Use in flat areas, such as the Red River Valley, where there is potential for water to back up on adjacent property. Lower fiber roll enough to prevent water from backing up on adjacent property. Do not use 20-inch fiber rolls in flat areas where there is potential for water to back up on adjacent property.

12 OR 20 INCH FIBER ROLL - DITCH BOTTOM

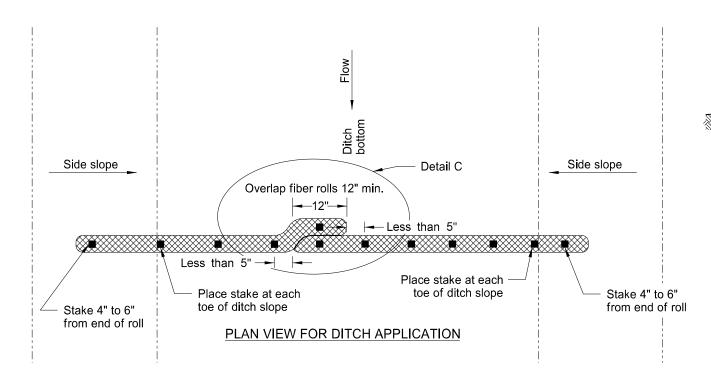


FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	MINIMUM TRENCH DEPTH	MAXIMUM TRENCH DEPTH
6"	2" x 2"	18"	2"	2"
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"

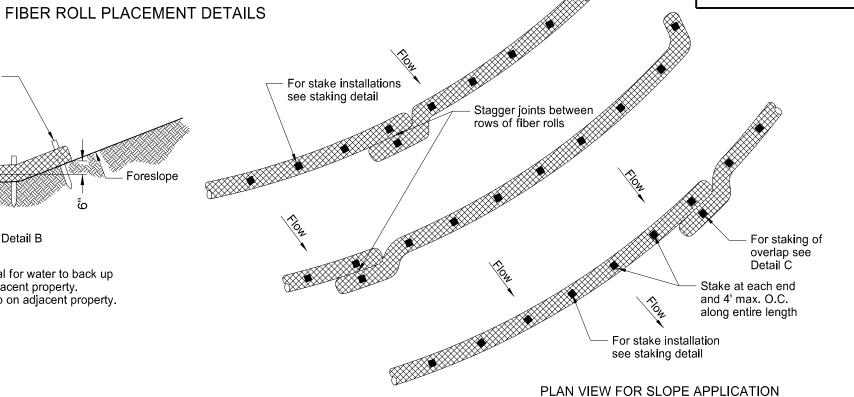



EROSION CONTROL

Fiber Roll Overlapping Staking Detail



<u>Detail B</u>	
Fiber Roll Staking	Detail

NOTE: Runoff must not be allowed to run under or around roll.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION				
11-18-10				
	REVISIONS			
DATE CHANGE				
06-10-13	Added plan view for ditch and slope application. Added table with values for stake and trench dimensions.			
10-04-13	Revised fiber roll overlap detail.			
06-26-14	Changed standard drawing number from D-708-7 to D-261-1			


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 06/26/14 and the original document is stored at the North Dakota Department of Transportation


D-261-1


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

Perforated Tube

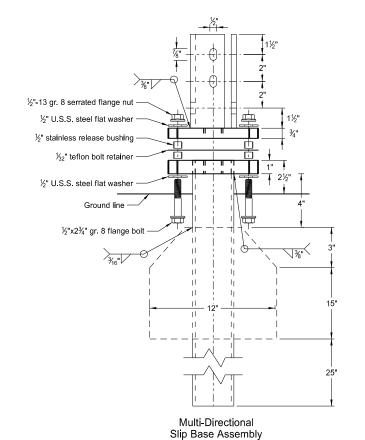


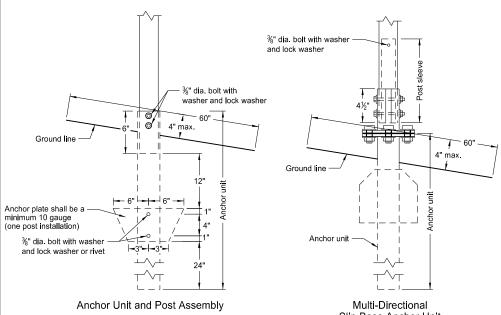

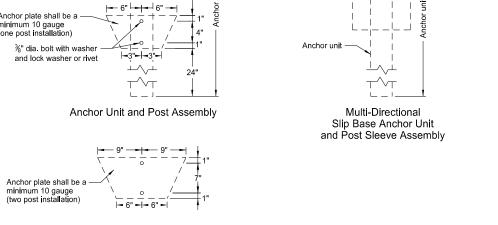


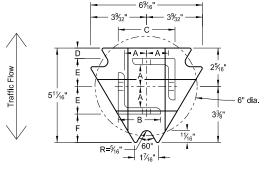

Top Post Receiver Plate - ASTM A572 grade 50 Angle Receiver - 2½"x2½"x¾" ASTM A36 structural angle

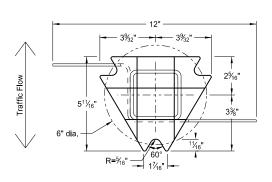

Bottom Soil Stub Tube - 3"x3"x7 gauge ASTM A500 grade B tube Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011 Plate - ASTM A572 grade 50



Bolt Retainer for Base Connection Bolt Retainer- 1/32" Reprocessed Teflon

- 1. Slip base bolts shall be torqued as specified by the manufacturer.
- 2. Anchor shall have a yield strength of 43.9 KSI and tensile strength of 59.3 KSI.
- 3. The 4" vertical clearance is required for the anchor or breakaway base. The 4"x60" measurement shall be made above and below post location and also back and ahead of the post.
- 4. When used in concrete sidewalk, anchor shall be same except without the wings.
- 5. Four post signs shall have over 7' between the first and the fourth posts.

Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thick- ness Gauge	Sleeve Size in.	Wall Thick- ness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	21/4
1	21/4	12			No	2½
1	2½	12			(A)	3
1	2½	10			Yes	
1	21/4	12	2	12	Yes	
1	2½	12	21/4	12	Yes	
2	2	12			No	21/4
2	21/4	12			No	2½
2	2½	12			Yes	
2	2½	12			Yes	
2	21/4	10	2	12	Yes	
2	2½	12	21/4	12	Yes	
3 & 4	2½	12			Yes	
3 & 4	2½	10			Yes	
3 & 4	2½	12	21/4	12	Yes	
3 & 4	21/4	12	2	12	Yes	
3 & 4	2½	10	2¾6	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size In.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs	Moment of Inertia in.4	Cross Sec. Area in.²	Section Modulus in.3
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
2¾ ₆ x 2¾ ₆	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	А	В	С	D	Е	F
2¾ ₁₆ "x10 ga.	1%4"	2½"	31/32"	²⁵ / ₃₂ "	1 ³ % ₄ "	1%"
2½"x10 ga.	1%2"	2½"	35⁄16"	5%"	1 ² / ₃₂ "	1¾"


- (A) The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak.
- (B) The $2\frac{3}{16}$ "x10 ga. may be inserted into $2\frac{1}{2}$ "x10 ga. for additional wind load.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		
	2-28-14	
	REVISIONS	
DATE	CHANGE	


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS


U-Channel Post




Detail A

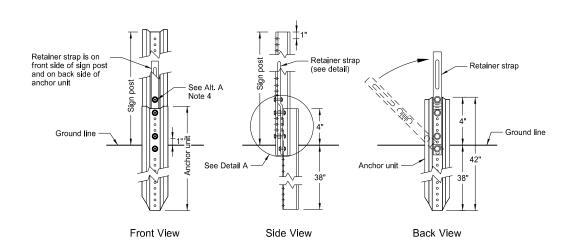

Breakaway U-Channel Detail Alternate A A maximum of 2 posts shall be installed within 7'.




Retainer Strap Detail

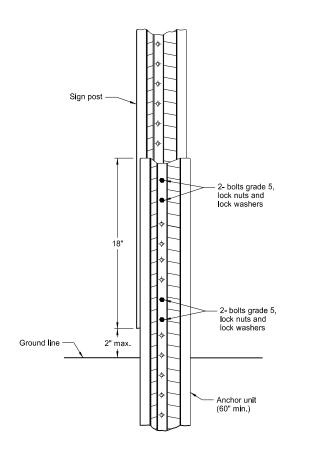

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

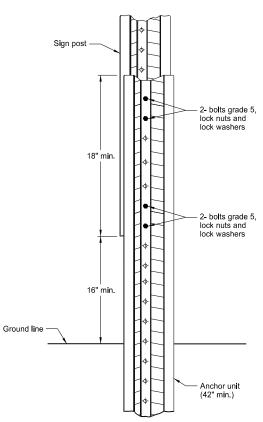

Breakaway U-Channel Splice Detail
Alternate C
(2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

Alternate A Steps of Installation:


- a) Drive anchor unit to within 12" of ground level.
 b) Proper assembly established by lining up the bottom hole of retainer strap with the 6th hole from the top of the anchor unit.
 c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
 d) Rotate strap 90" to left.
- a) Drive anchor unit to 4" above ground.
 b) Rotate strap to vertical position.
- a) Place 5/6"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
 b) Alternately tighten two connector bolts.
- 4. Complete assembly by tightening $\frac{5}{16}$ "x2" bolt (this fastens sign post to retainer strap).
- The base post, strap and sign post shall be properly nested. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the boits have full contact across the entire width.


NORTH DAKOTA		
DEPARTMENT OF TRANSPORTATION 2-28-14		
DATE	CHANGE	
	I	


This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS TERMINAL AND GUIDE SIGNS




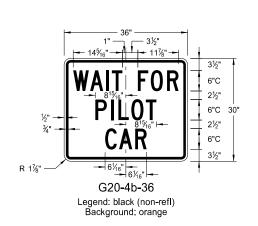


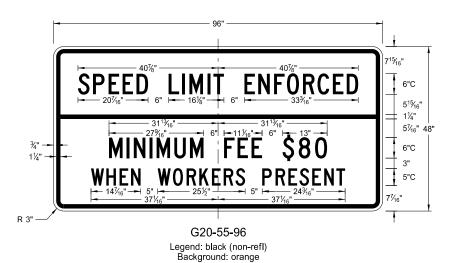













ARROW DETAILS


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

DEPARTI	NORTH DAKOTA MENT OF TRANSPORTATION	
	8-13-13	
	REVISIONS	
DATE	CHANGE	
		(

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation
















Legend: black (non-refl) Background: orange


CONSTRUCTION SIGN DETAILS REGULATORY SIGNS




Legend: black (non-refl) Background: white





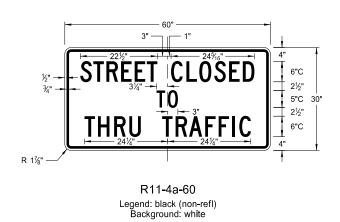

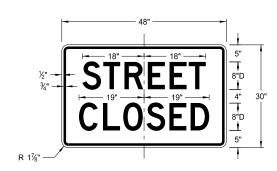


R11-2a-48 Legend: black (non-refl) Background: white


		OTA NSPORTATION	NORTH DAKO	DEPARTM
s document wa	Thi:		8-13-13	
issued and sea		S	REVISION	
Roger Wei		HANGE	CH	DATE
Registration N				
PE- 2930				
8/13/13 and	on			
ocument is stor	d			
orth Dakota De	N			
of Transport				

as originally ealed by eigel, Number 30, I the original ored at the epartment rtation


D-704-11

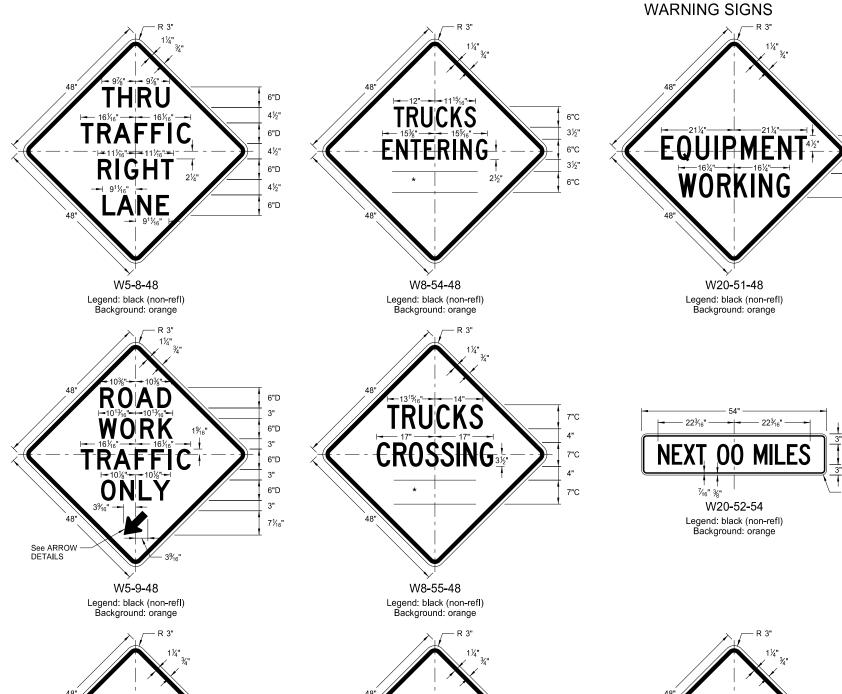


Legend: black (non-refl) Background: orange



CONSTRUCTION SIGN DETAILS

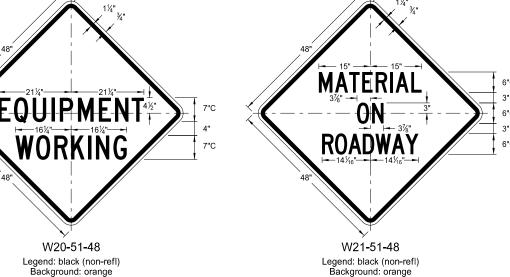


6"C 12"




WORD LETTER SPACING AHEAD Standard 200 FT Standard 350 FT Standard Standard 1000 FT Reduce 40% 1500 FT Reduce 40% ½ MILE Reduce 50% 1 MILE Standard

* DISTANCE MESSAGES




Legend: black (non-refl) Background: orange



ARROW DETAILS

R 3" 1½" 3½" 1111½6"1	R 3" 11/4" 3/4" 11/5/16" 11/5/16" 11/5/16"
TRUCKS 15%" 15%" 6°C 3½"	TRUCKS - 12% - 12% - 3%"
15 [%] ₁ " 15 [%] ₁₆ " 3 ¹ / ₂ "	<u>12¾6"</u> 12½" → 12½" → 13½"
FNTFRING - — -) 6°C	6"C
14" 13%"	14"13%"1 3½"
HIGHWAY 2½" 6"C	HIGHWAY 6°C
	48"
W8-53-48	W8-56-48

Legend: black (non-refl) Background: orange




Background: orange


NORTH DAKOTA			
DEPARTM	MENT OF TRANSPORTATION		
	8-13-13		
REVISIONS			
DATE	CHANGE		

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

SHOULDER CLOSURE TAPERS

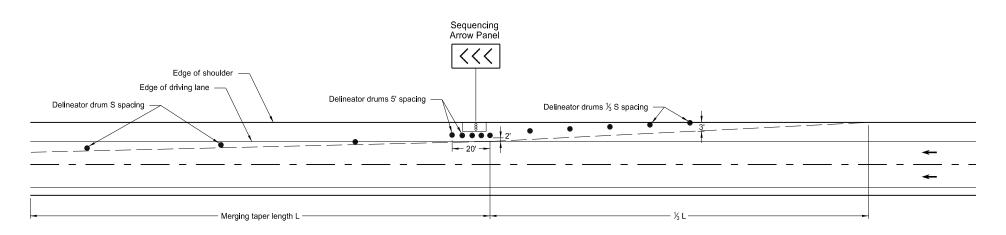

SHOULDER CLOSURE WITH LANE CLOSURE (when shoulder is 8' or wider)

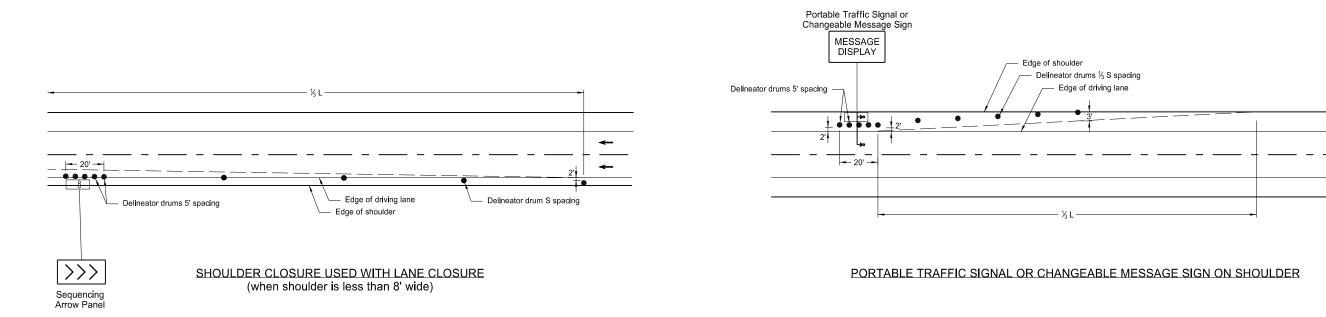


Notes:


- 1. S = Posted Speed Limit in mph W = Width of offset in feet L = Taper length in feet L = WS²/60 (40mph or less) L = WS (45mph or more)
- 2. If a shoulder taper is used, it should have a length of approximately $\frac{1}{2}$ L. If a shoulder is used as a travel lane, a normal merging or shifting taper should be
- When paved shoulders of 8 foot width or more are closed, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.

DEPARTM	NORTH DAKOTA IENT OF TRANSPORTATION	
	10-3-13	This document was originally
	REVISIONS	issued and sealed by
DATE	CHANGE	Roger Weigel
		Registration Number
		PE-2930,
		on 10/3/13 and the original
		document is stored at the
		North Dakota Department
		of Transportation

KEY Delineator Drum

- ∞ Sequencing Arrow Panel
- L≫ Portable Traffic Signal Message Display

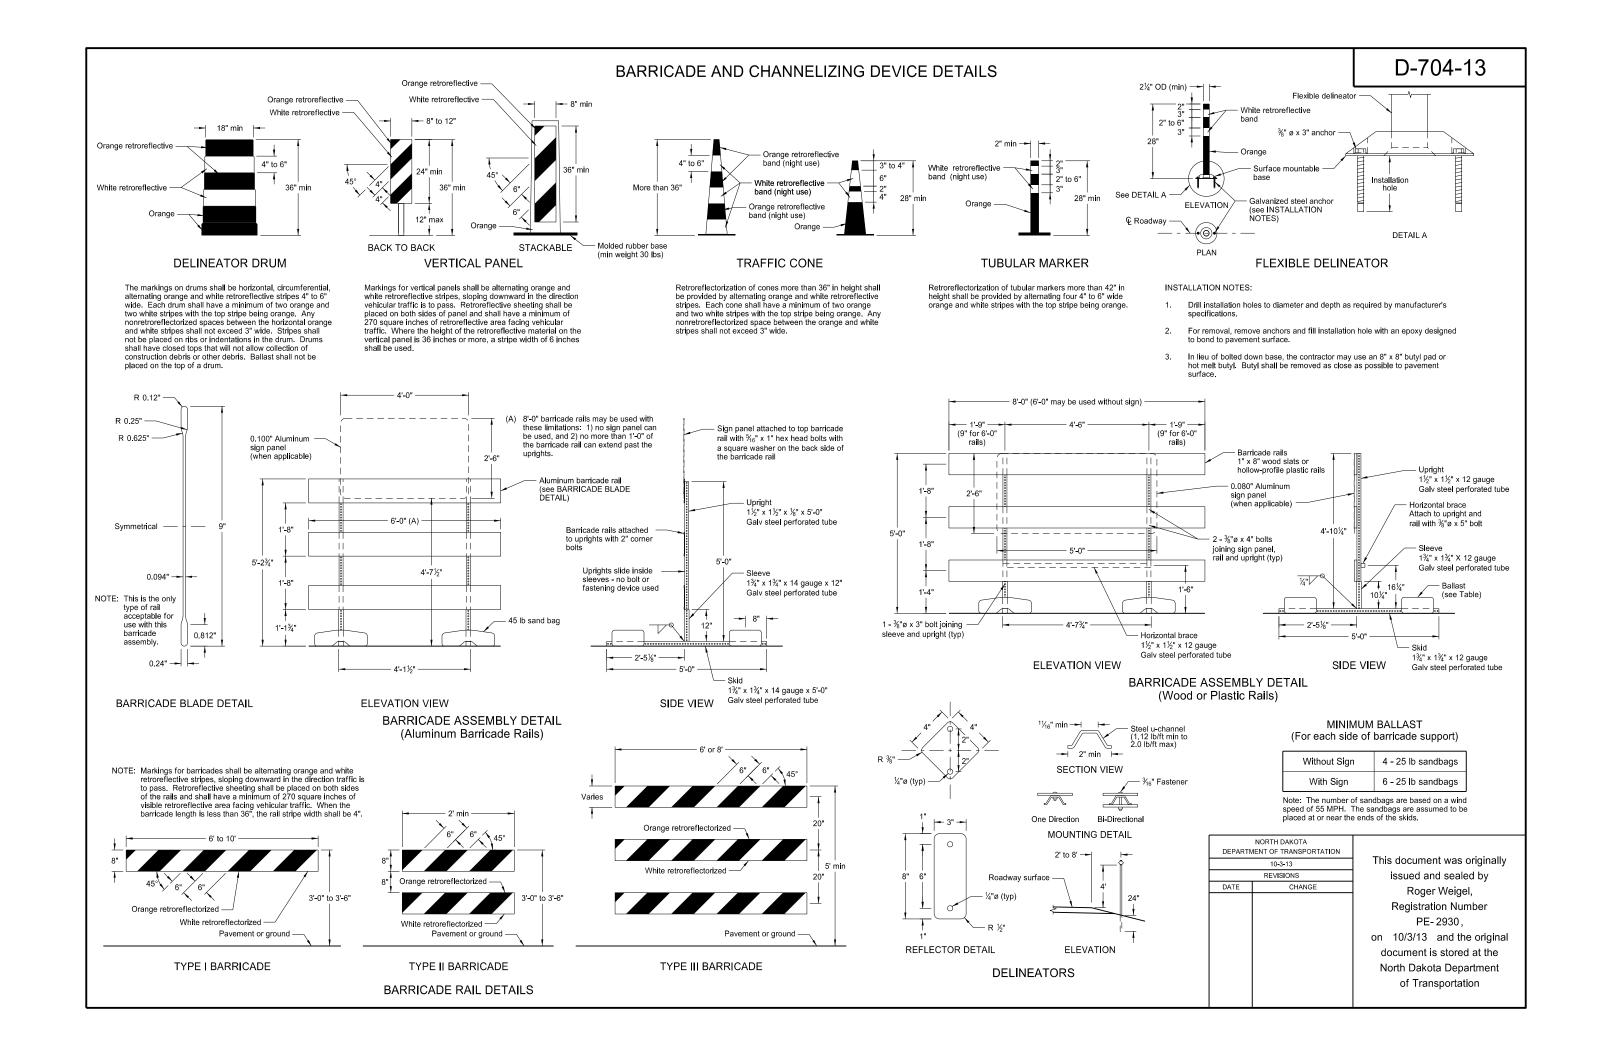

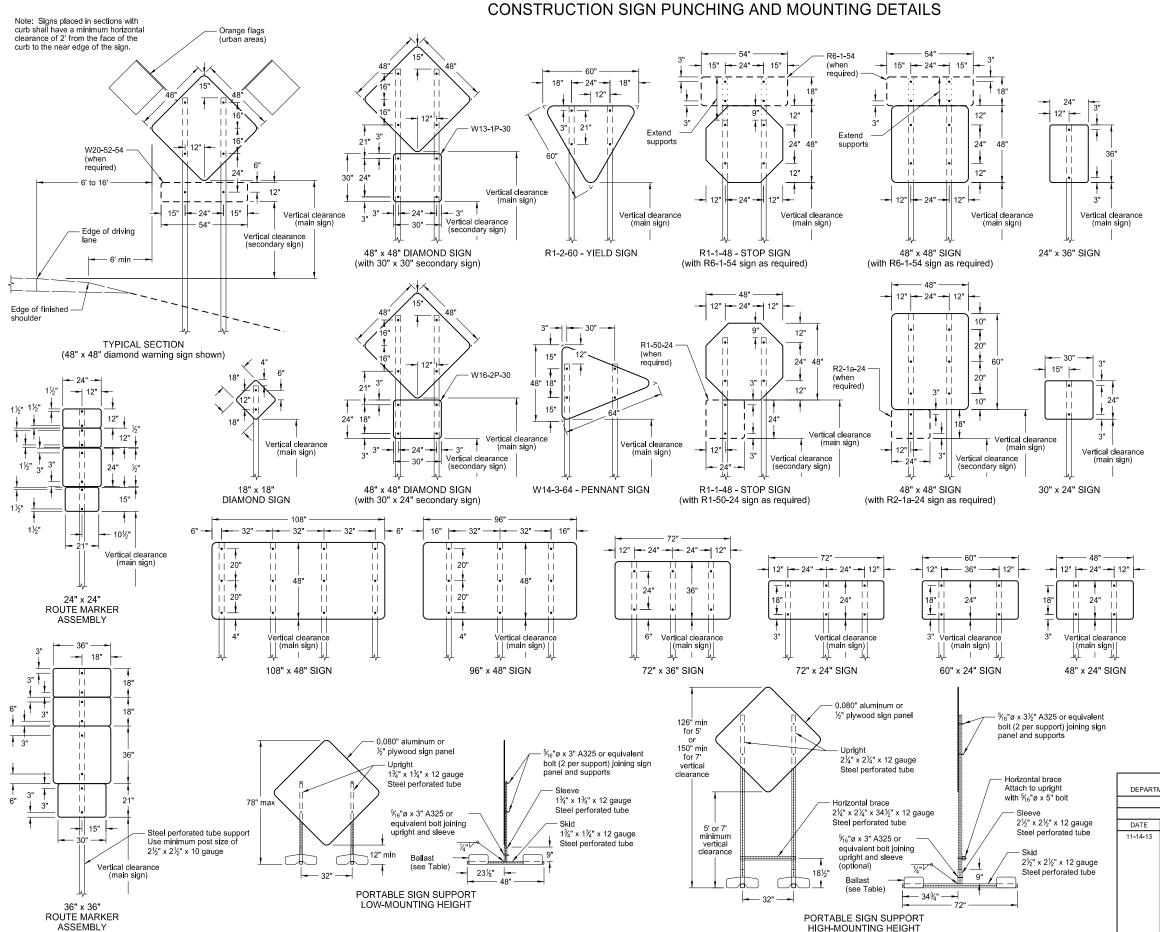

NOTES:

 Sign Supports: Supports shall be galvanized or painted. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, the minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes are based on a wind speed of 55 MPH.

Signs over 50 square feet should be installed on $2 \frac{1}{2}$ x $2 \frac{1}{2}$ perforated tube supports as a minimum.

Guy wires shall not be attached to sign supports. Wind beams may be attached to u-posts behind the sign panels.

- 2. Sign Panels: Provide sign panels made of 0.100" aluminum, $\frac{1}{2}$ " plywood, or other approved material, except where noted. All holes to be punched round for $\frac{1}{2}$ " bolts.
- Alternate Messages: The signs that have alternate messages may have these alternate messages placed on a reflectorized plate (without a border) and installed and removed as required. (i.e. "Left" and "Right" message on a lane closure sign)
- Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background Interstate Business Loop - white legend on green background US and State - black legend on white background County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance as stated above

Large signs having an area exceeding 50 square feet shall have a minimum clearance of 7'-0" from the ground at the post.

Portable Signs: Provide portable signs that meet the vertical clearance as stated above. Use portable signs when it is necessary to place signs within the pavement surface.

When portable signs are used for 5 days or less, low-mounting height (minimum 12" vertical clearance) sign supports may be used as long as the view of the sign is not obstructed. Time delays caused by unforseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. The R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 may be used for longer than 5 days.

Signs mounted to the portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT Details shall have a maximum surface area of 16 square feel

MINIMUM BALLAST (For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION


10-4-13
REVISIONS
DATE CHANGE

11-14-13 Revised Note 6.

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 11/14/13 and the original document is stored at the North Dakota Department

of Transportation

LANE CLOSURES ON URBAN STREETS LAYOUTS

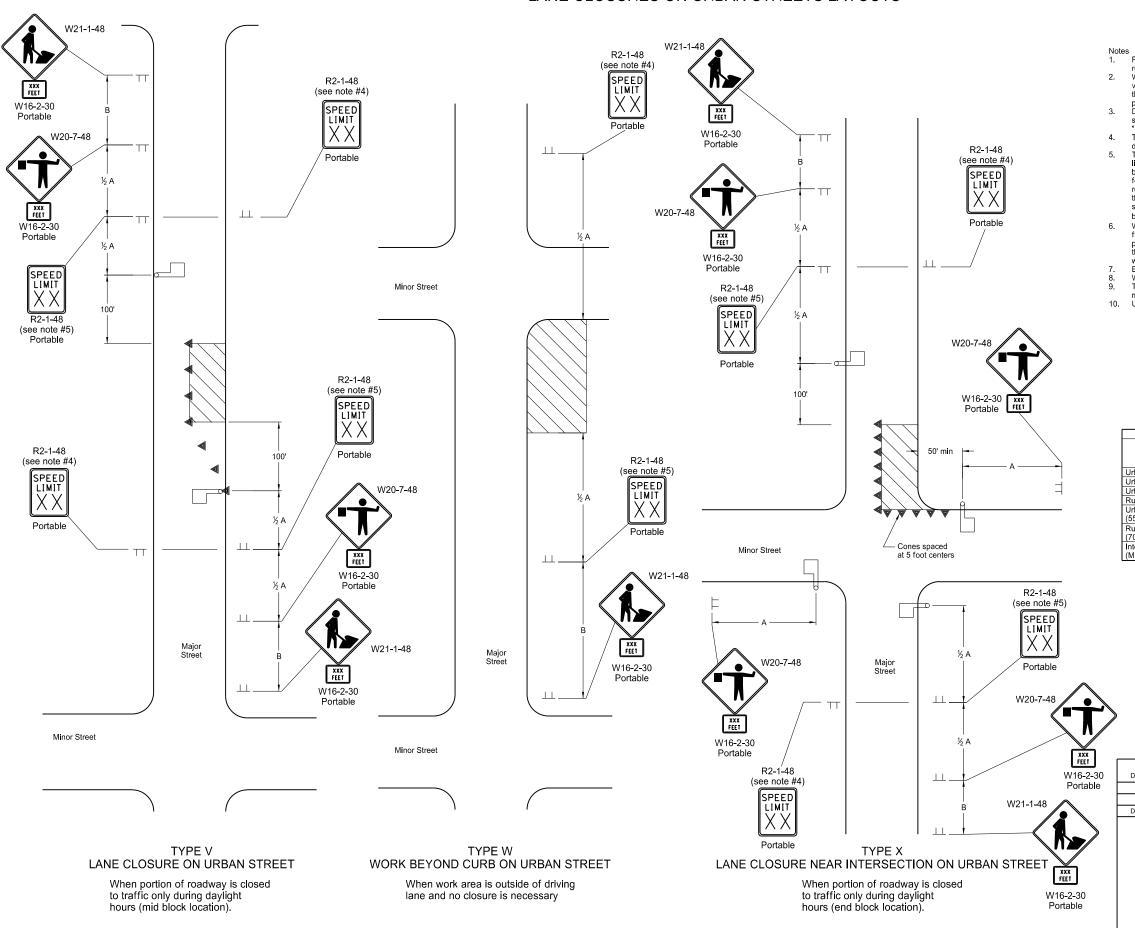

- For Type V: The contractor will be allowed to work only on one side of the roadway at a time so as not to block off any more than one lane of traffic.
- When parking is present, the signs shall be placed so they are entirely visible above the parked vehicles or placed at the edge of the parking area so they are visible to oncoming traffic. These signs may be skid mounted when placed on the roadway surface.

 Delineator cones used for tapering traffic shall be placed at 3 equal
- spaces. Delineator cones for tangents shall be spaced at dimension "S". "S" = the numerical value of speed limit.
- The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.

 The reduced speed limit shall be determined dependent on the in place speed
- limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall
- When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 Existing speed limit signs within a reduced speed zone shall be covered.

- Where necessary, safe speed to be determined by the Engineer.
 The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.
- Urban projects do not need the G20-55-96 and R2-1a-24 signs.

ABWAIGE WATER OF OF	, (01110		
Road Type	Distance Between Signs Min. (ft)		
•	Α	В	С
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500


ADVANCE WARNING SIGN SPACING




NORTH DAKOTA DEPARTMENT OF TRANSPORTATION 9-27-13 REVISIONS


This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 09/27/13 and the original document is stored at the North Dakota Department

of Transportation

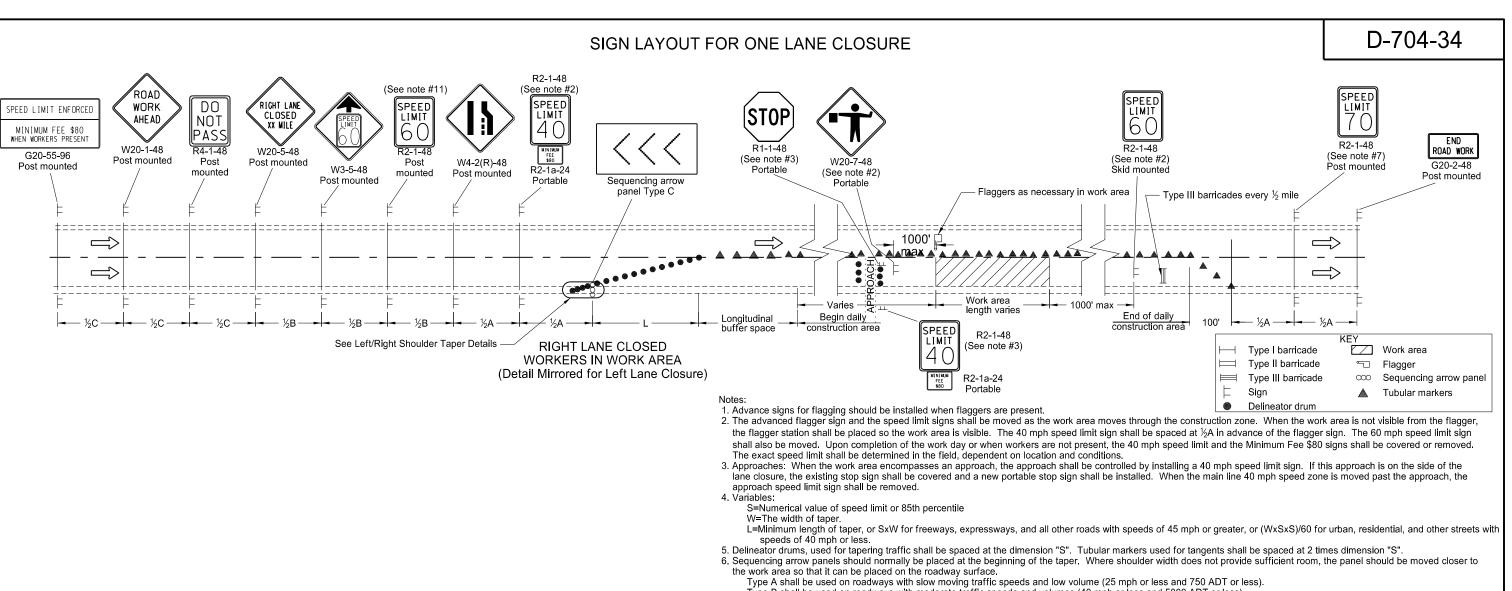



LEFT SHOULDER TAPER DETAIL



Type B shall be used on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).

Type C shall be used on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).

7. The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.

8. Existing speed limit signs within a reduced speed zone shall be covered.

9. When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.


10. The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 mph. Where speed limits are to be reduced more than 30 mph, a second speed limit sign shall be installed with the desired speed reduction, but shall not exceed 30 mph. The second speed limit sign shall be placed at ½B.

11. The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Specifications.

12. Sign G20-55-96 is not required if this standard is part of other traffic control layouts or the work is less than 15 days.

		ADVANCE WARN	ING SIGN SPACING	i			
	Das	Road Type			Distance Between		
	Roa				Signs Min (ft)		
						С	
		w Speed (30 mph or less		150	150	150	
		w Speed (over 30 to 40 r		280	280	280	
		gh Speed (over 40 mph to		360	360	360	
Longitudinal Buffer Space		h Speed (over 50 mph to		720	720	720	
Speed Length		ressway and Freeway (5		850	1350	2200	
(mph)* Min (feet)		ressway and Freeway (70		1000	1500	2640	
(11)	Interstate/	4-Lane Divided (Maintena	ance and Surveying)	750	1000	1500	
20 115		NORTH DAKOTA					
25 155	DEPART	MENT OF TRANSPORTATION					
30 200		9-26-2012	This documer	nt was originally			
35 250		REVISIONS	issued an	and sealed by			
40 305	DATE	CHANGE	1	•			
45 360	DATE	CHANGE	Roger	Weige	el,		
50 425			Registrati	on Nu	mhar		
55 495			ı				
60 570			PE-	2930,			
65 645			on 9/26/2012	and th	e oriai	inal	
70 730		I I			J		
75 820			document is	store	d at th	е	
*Posted speed, off-peak 85th			North Dakot	a Den	artmer	nt l	
percentile speed prior to work	<			•			
starting, or the anticipated			of Trans	sportat	tion		
operating speed in mph.							

PORTABLE SIGN SUPPORT ASSEMBLY

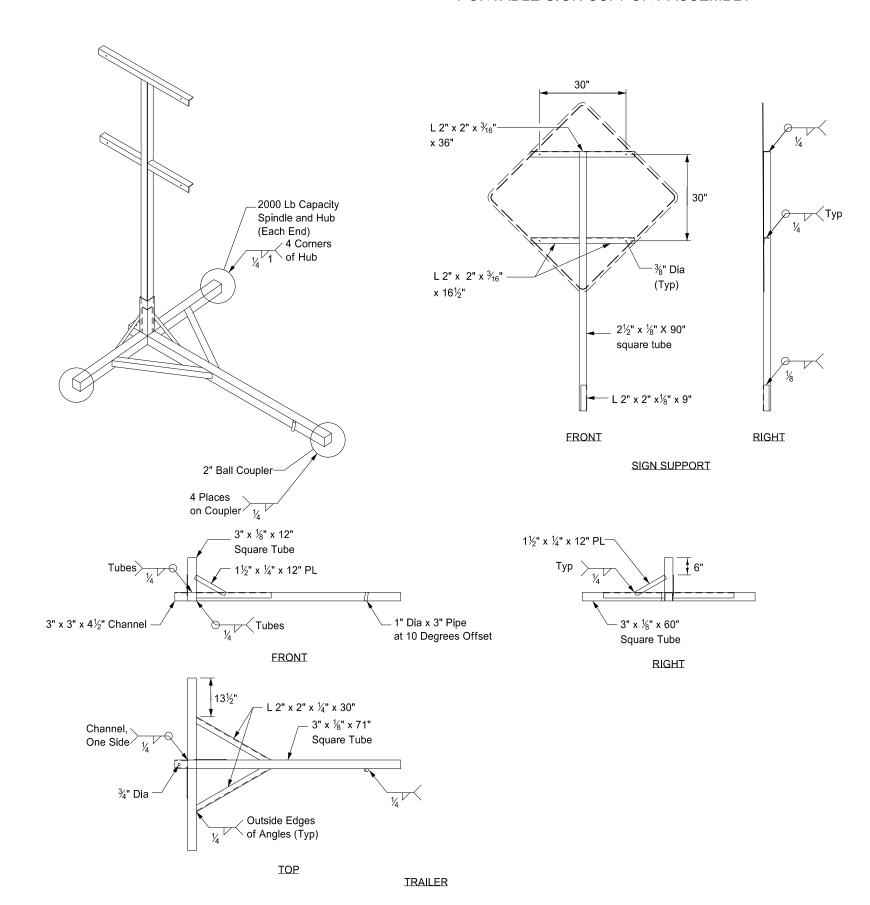



Notes:


- 1. The maximum weight of the assembly is 250 pounds.
- Use a 14" wheel and tire.
- Automotive and equipment axle assemblies may not be used for trailer-mounted sign supports.
- 4. Other NCHRP 350 crash tested assemblies are acceptable.

	NORTH DAKOTA MENT OF TRANSPORTATION	DEPARTM
This document	11-23-10	
issued and	REVISIONS	
Roger V	CHANGE	DATE
Registration		
PE- 29		
on 11/23/10 a		
document is s		
North Dakota		

This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 11/23/10 and the original document is stored at the North Dakota Department of Transportation

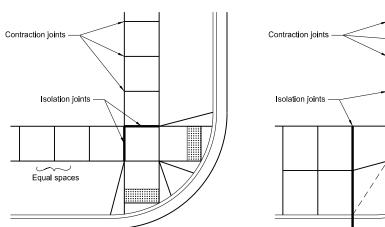


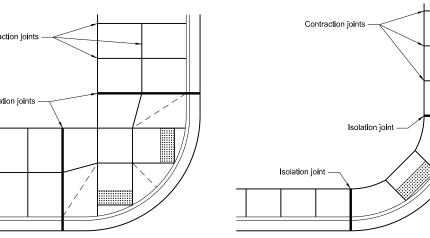

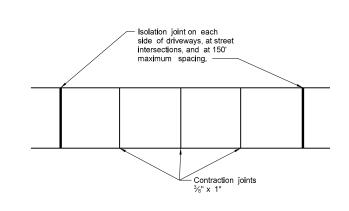

Typical Joint Layouts

1/4" Max



Sidewalk Width and Grade

Sidewalk Detail

(Installed adjacent to curb and gutter)

Varies

Concrete Median


_4" Base

Earth Fill

Concrete Median Detail



½" Max

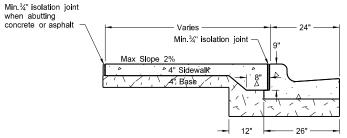


- Min.¾" isolation joint

2" Ledge



Min.3/4" isolation joint

"L"Bar Detail #3 Bar

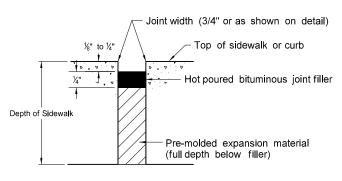

Typical Isolation Joint Seal (longitudinal and transverse)

NOTES:

- Curb ramp and detectable warning panel layouts are for informational purposes only. See Standard Drawing D-750-3 for curb ramp and detectable warning panel details.
- 2. Joint Spacing: Transverse contraction joint spacing shall vary from 4' to 6' to create approximate square panels.

Longitudinal contraction joints shall be used where the sidewalk width is 8' or greater, and shall be spaced at half the sidewalk width


The contraction joints may be sawed or a grooved joint, and shall be a minimum of 1/3 the depth of the concrete.

When the sidewalk is adjacent to the curb & gutter, the sidewalk joint spacing shall be varied to match up with the curb & gutter joints.


Isolation joints should also be used between seperately poured concretes, or between old and new concrete.

The cost for all labor, equipment, and material necessary to construct contraction and isolation joints shall be included in the price bid for sidewalk concrete

- 4" sidewalk concrete thickness to be used unless otherwise specified in the plans.
- 4. 4" base material thickness to be used unless otherwise specified in the plans. All labor and materials necessary to place the base material shall be included in the price bid for "Salvage Base Course" or "Aggregate Base Course CL 5."
- Landscaping is preferred to modify existing ground slope changes as needed. If not possible, such as adjacent buildings, a vertical curb may be used as shown in the detail below. The curb will be paid for at the unit price bid for the item "Curb - Type I" per lineal foot.

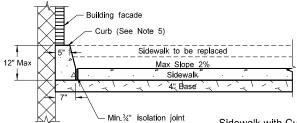

Sidewalk with Curb Detail (Building face application)

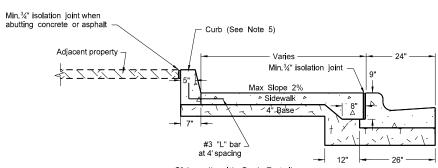


Sidewalk with Curb Detail (Adjacent property application)

	NORTH DAKOTA
DEPARTM	MENT OF TRANSPORTATION
	11-26-13
	REVISIONS
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/26/13 and the original document is stored at the North Dakota Department

of Transportation

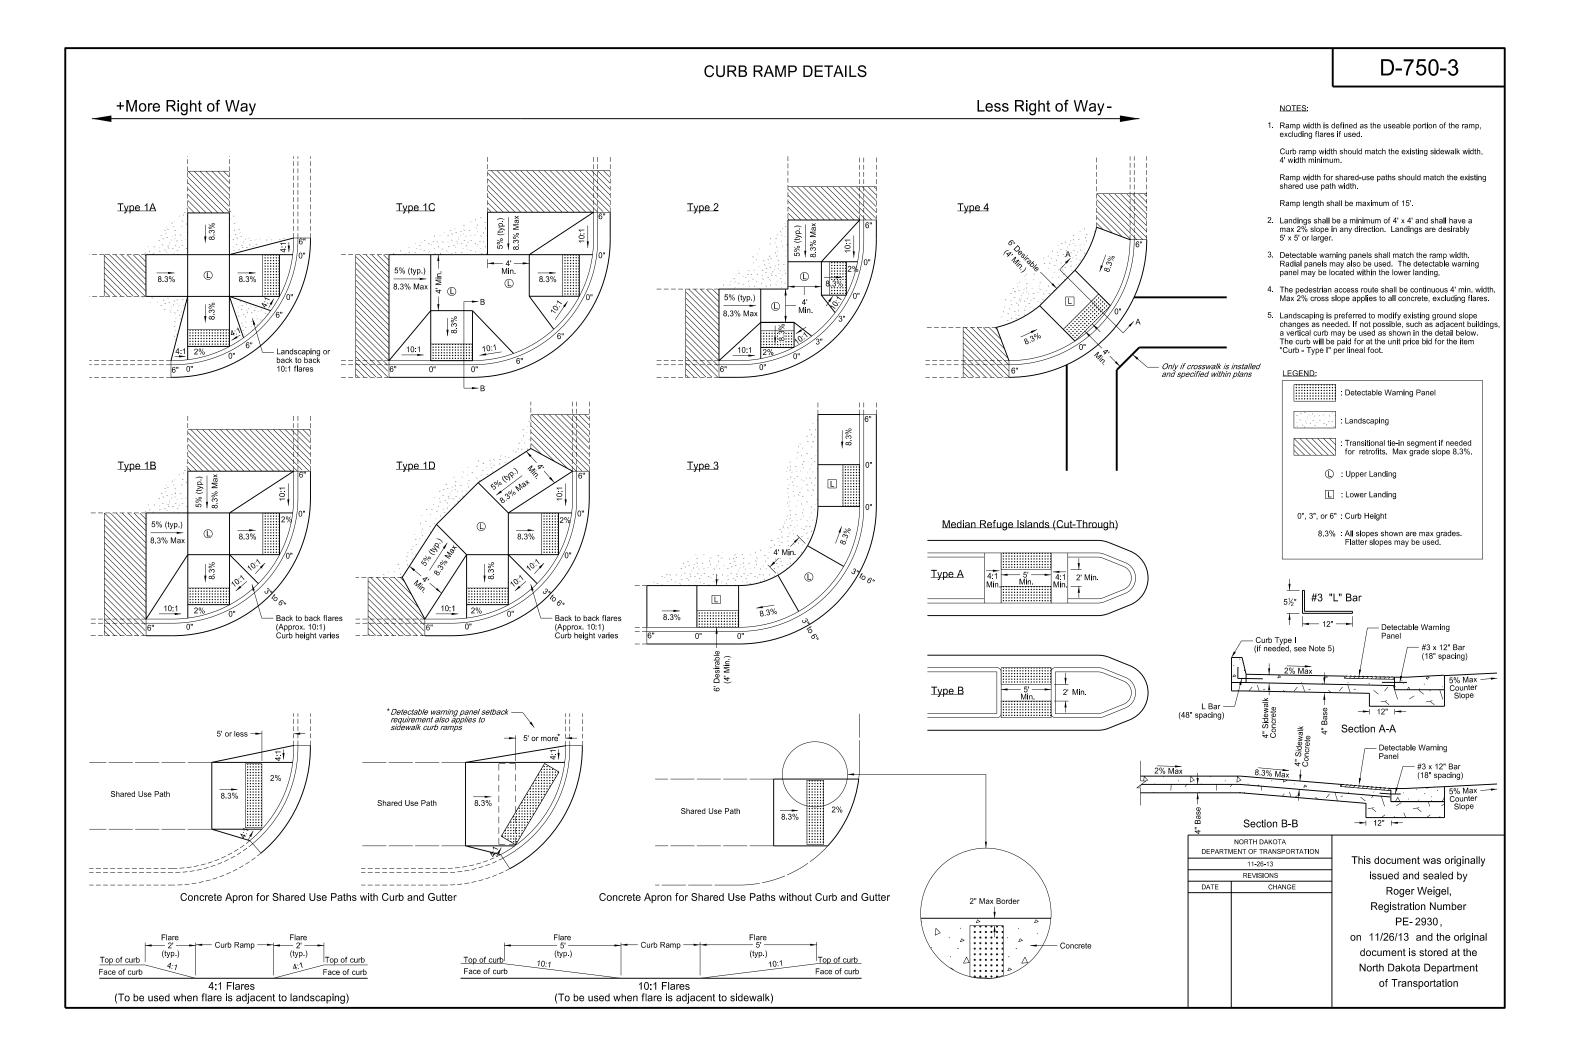

PERFORATED TUBE ASSEMBLY DETAILS

Note


- Curbed Roadways: The clearance from the face of the curb should be 3' except where right of way or sidewalk width is limited, a minimum clearance of 2' shall be provided. The horizontal clearance may need to be increased to maintain a minimum sidewalk clear width of 4' from the sign support, not including any attached curb.
- Minimum vertical clearance: Signs installed at the side of the road in rural districts shall be at least 5' measured from the bottom of the sign to the edge of the driving lane or auxiliary lane. Where parking or pedestrian movements occur, the clearance to the bottom of the sign shall be at least 7'.

Signs on expressways shall be installed with a minimum height of 7'.

Adopt-a-highway signs installed on Freeways shall be at least 7' above the edge of the driving lane.

The vertical clearance shall have a maximum height of 6" above the vertical clearance specified above.


- 3. Offset signs: Where signs are placed at least 30 feet or more from the edge of the traveled way, the height to the bottom of such sign shall be 5' above the edge of the driving lane.
- The clearance from edge of shared use path to edge of sign should be 3' except where width is limited, a minimum clearance of 2' shall be provided.

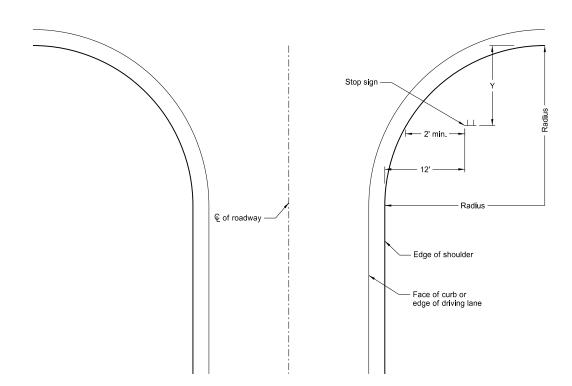


Stop Sign Location Wide Throat Intersection

This layout is to be used for the placement of "Stop" signs.

Radius	Y-max.	Y-min.
ft.	ft.	ft.
40	50	15
45	50	18
50	50	21
55	50	25
60	50	28
65	50	32
70	50	35
75	50 50	39 43
80	50	43

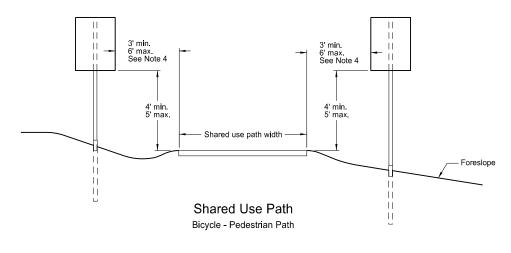

€ of roadway

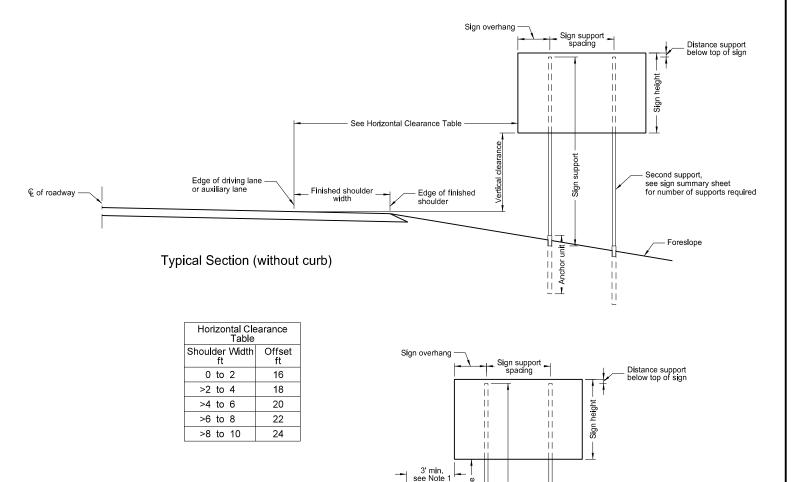

Typical Section (with curb)

Residential or Business District



Second support,

see sign summary sheet for number of supports required

This document was originally issued and sealed by Roger Weigel Registration Number PE- 2930,


on 7/8/14 and the original document is stored at the North Dakota Department of Transportation


		Telescoping Perforated Tube						
Number of Posts	Post Size In.	Wall Thick- ness Gauge	In.	Wall Thick- ness Gauge	Sli p Ba s e	Anchor Size Without Slip Base In.	Wall	
1	2	12			No	21/4	12	
1	21/4	12			No	21/2	12	
1	21/2	12			(B)	3(C)	7	
1	21/2	1 0			Yes		7	
1	21/4	12	2½(D)	12	Yes		7	
1	21/2	12	21/4	12	Yes		7	
2	21/2	1 0			Yes		7	
2	21/4	12	2½(D)	12	Yes		7	
2	21/2	12	21/4	12	Yes		7	
3 & 4	21/2	12			Yes		7	
3 & 4	21/2	1 0			Yes		7	
3 & 4	21/2	12	21/4	12	Yes		7	
3 & 4	21/4	12	2½(D)	12	Yes		7	
3 & 4	21/2	1 0	2³/ ₁₆	1 0	Yes		7	

(B) - The 2½", 12 gauge posts do not need reakway bases when placed in standard soils, but require a shim as specified by the manufacturer. The breaksway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.

(C) - 3" anchor unit


(D) - 2½" x 12 ga. x 18" minimum length external sleeve required.




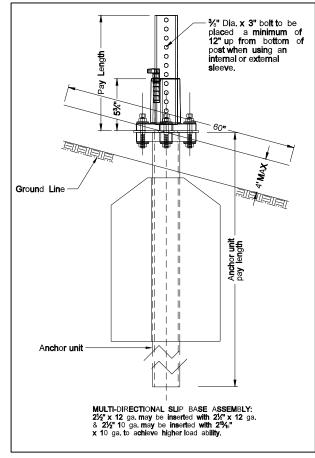

SHOULDER BOLT Shimming agent to reduce tolerance between 3" anchor unit and 2½" post. (standard 3/8" diameter grade 8 bolt may be used with proper shim) 1/32" Diameter 8-places - 3/8"-16 x 31/2" grade 8 flanged shoulder bolt. Zinc per ASTM B633 - 3/8"-16 grade 8 serrated flange nut. Zinc per ASTM B633 2 DIRECTION OF TRAFFIC 3" ANCHOR UNIT

Mounting Details Perforated Tube

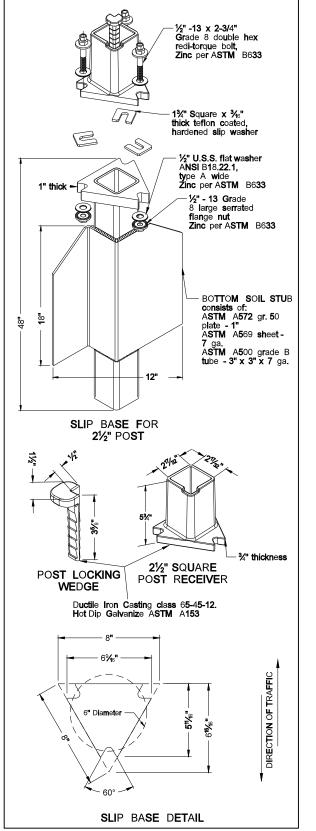

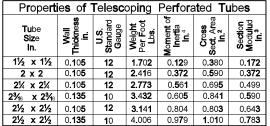

The 2 $\frac{3}{16}$ " size 10 gauge is shown as 2.19" size on the plans; The $\frac{2}{2}$ " size is shown as 2.51" size on the plans.

D-754-24

NOTE:


- 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and
- Ine 4" X 60" measurement snall be made above and below post location and also back and ahead of post.

 2. Anchor material shall be 7 guage H.R.P.O. Commmercial quality ASTM A569 and 3" x 3" x 7" guage ASTM A500 grade B. Anchor shall have a yield strength 43.9 KSI and tensile strength of 59.3 KSI. Anchor shall be hot dipped galvanized per ASTM A123/153. All tolerances on anchor unit and slip base bottom assembly are +/- 0.005" unless ortherwise noted.
- +/- U.U.U.s' unless ortnerwise noted.

 3. When used in concrete sidewalk, anchor shall be the same concept without the wings

 4. Four post signs shall have over 8' between the first and fourth posts.


 5. Installation procedures as per manufacturers
- Concrete fasteners for surface mount breakaway base shall be a minimum ½" diameter x 4" grade 8.

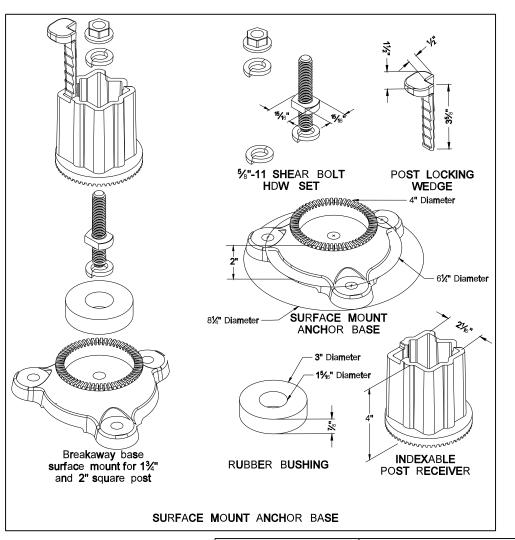


D E PAR TM	NORTH DAKOTA Ent of transportation	
	8-6-09	This document was originally
	REVISIONS	issu ed a n d s ea l ed b y
DA TE	CHANGE	Roge r W eigel,
		Reg istration Num be r
		P E- 2 9 3 0,
		o n 08/06/09 a n d th e o ri gi n al
		do cum e nt is st ored a t th e
		North Dakota Department
		o f Trans po rtation

D-754-25


Mounting Details Perforated Tube







Top View

STRINGER MOUNTING (WITH STRINGER IN FRONT OF POST)






STRAP DETAIL









BACK TO BACK MOUNTING

These stringers shall be the same size as the post Punch round and partial through angle so that excess metal fits stringer and post holes.

STREET NAME SIGNS
AND ONE WAY SIGNS
SINGLE POST ASSEMBLY
ONE STRINGER OR
BACK TO BACK MOUNTING



ANCHOR UNIT AND POST ASSEMBLY



10 gauge material and galvanized same as post (2 post installation)

Properties of Telescoping Perforated Tubes						
Tube Size In.	Wall Thickness In.	U.S. Standard Gauge	Weight Per Foot Lbs.	Moment of Inertia	Cross Sect. area In.²	Section Modulus In.3
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
$2\frac{3}{16}$ x $2\frac{3}{16}$	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.783

The $2^3\!\!/_{16}$ " size 10 gauge is shown as 2.19" size on the plans. The $2^1\!\!/_2$ " size is shown as 2.51" size on the plans.

Not

- Horizontal stringers In lieu of perforated tubes, the contractor may substitute z bar stringers.
 The z bar stringers shall be 1¾" x ¾₁₆" thick,
 1.08 lbs./ft aluminum or 3.16 lbs./ft steel.
- 2. Metal washers used on sign face shall have a minimum outside diameter of $^{15}\!\!/_{16}$ " ± $^{12}\!\!/_{16}$ " and 10 gauge thickness.
- 3. No Parking Signs: All no parking signs with directional arrows shall be placed at a 30 to 45 degree angle with the line of traffic flow. No parking signs required at the above angles may have the support turned to the correct angle. If the no parking sign is placed with another sign that has to be placed at a 90 degree angle with the line of traffic flow, the detailed angle strap should be used to mount the no parking sign. Flat washers and lock washers shall be used with all nylon washers.
- 4. In lieu of using the bent bolt to attach the post to the stringer, the contractor may choose to punch the sign backing and place the bolt through the sign, the stringer and the post.
- 4" vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and below post location and also back and ahead of post.

		Telescoping Perforated Tube						
Number of Posts	Post Size In	Wall Thick- ness Gauge	Sleeve Size In.	Wall Thick- ness Gauge	Slip Base	Anchor Size Without Slip Base In	Anchor Wall Thick- ness Gauge	
1	2	12			No	21/4	12	
1	21/4	12			No	21/2	12	
1	21/2	12			(B)	3(C)	7	
1	21/2	10			Yes		7	
1	21/4	12	2½(D)	12	Yes		7	
1	21/2	12	21/4	12	Yes		7	
2	21/2	10			Yes		7	
2	21/4	12	2½(D)	12	Yes		7	
2	21/2	12	21/4	12	Yes		7	
3 & 4	21/2	12			Yes		7	
3 & 4	21/2	10			Yes		7	
3 & 4	21/2	12	21/4	12	Yes		7	
3 & 4	21/4	12	2½(D)	12	Yes		7	
3 & 4	21/2	10	2¾ ₁₆	10	Yes		7	

(B) - The 2½", 12 gauge posts do not need breakaway bases when placed in standard soils, but require a shim as specified by the manufacturer. The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.

(C) - 3" anchor unit

(D) - $2\frac{1}{2}$ " x 12 ga. x 18" minimum length external sleeve required.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION						
	8-6-09					
	REVISIONS					
DATE	CHANGE					
7-8-14	Revised Note 3					

issued and sealed by
Roger Weigel,
Registration Number
PE- 2930 ,
on 7/8/14 and the original
document is stored at the
North Dakota Department

of Transportation

This document was originally