

?

This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.

Abn abandoned
Abut abutment
Ac acres
Adj adjusted
Aggr aggregate
Ahd ahead
ARV air release valve
Align alignment
Al alley
Alt alternate
Alum aluminum
ADA Americans with Disabilities Act
A ampere
& and
Appr approach
Approx approximate
ACP asbestos cement pipe
Asph asphalt
AC asphalt cement
Assmd assumed
@ at
Atten attenuation
ATR automatic traffic recorder
Ave Avenue
Avg average
ADT average daily traffic
Az azimuth
Bk back
BF back face
Bs backsight
Balc balcony
B Wire barbed wire
Barr barricade
Btry battery
Brg bearing
BI beehive inlet
Beg begin
BG below grade
BM bench mark
Bkwy bikeway
Bit bituminous
Blk block
Bd Ft board feet
BH bore hole
BS both sides
Bot bottom
Blvd Boulevard
Bndry boundary
BC brass cap
Brkwy breakaway
Br bridge

Bldg building
BV butterfly valve
Byp bypass
C Gdrl cable guardrail
Calc calculate
Cd candela
CIP cast iron pipe
CB catch basin
CRS cationic rapid setting
C Gd cattle guard
C To C center to center
Cl or C centerline
Cm centimeter
Ch chain
Chnlk chain-link
Ch Blk channel block
Ch Ch channel change
Chk check
Chsld chiseled
Cir circle
Cl class
Cl clay
Cl F clay fill
Cl Hvy clay heavy
Cl Lm clay loam
Clnt clean-out
Clr clear
Cl&gr clearing & grubbing
Co S coal slack
C Gr coarse gravel
CS coarse sand
Comb. combination
Coml commercial
Compr compression
CADD computer aided drafting & design
Conc concrete
CECB concrete erosion control blanket
Cond conductor
Const construction
Cont continuous
CSB continuous split barrel sample
Contr contraction
Contr contractor
CP control point
Coord coordinate
Cor corner
Corr corrected
CAES corrugated aluminum end section
CAP corrugated aluminum pipe
CMES corrugated metal end section
CMP corrugated metal pipe
CPVCP corrugated poly-vinyl chloride pipe
CSES corrugated steel end section
CSFES corrugated steel flared end section

CSP corrugated steel pipe
CSTES corrugated steel traversable end section
C coulomb
Co County
Crse course
Ct Court
Xarm cross arm
Xbuck cross buck
Xsec cross sections
Xing crossing
Xrd Crossroad
Crn crown
CF cubic feet
M3 cubic meter
M3/s cubic meters per second
CY cubic yard
Cy/mi cubic yards per mile
Culv culvert
C&G curb & gutter
CI curb inlet
CR curb ramp
CS curve to spiral
C cut
Dd Ld dead load
Defl deflection
Defm deformed
Deg or D degree
DInt delineate
DIntr delineator
Depr depression
Desc description
Det detail
DWP detectable warning panel
Dtr detour
Dia or \varnothing diameter
Dir direction
Dist distance
DM disturbed material
DB ditch block
DG ditch grade
Dbl double
Dn down
Dwg drawing
Dr drive
Drwy driveway
DI drop inlet
D dry density
DSDS dynamic speed display sign
Ea each
Esmt easement
E East
EB Eastbound
Elast elastomeric
EL electric locker
E Mtr electric meter
Elec electric/al

EDM electronic distance meter
Elev or El elevation
Ellipt elliptical
Emb embankment
Emuls emulsion/emulsified
ES end section
Engr engineer
ESS environmental sensor station
Eq equal
Eq equation
Evgr evergreen
Exc excavation
Exst existing
Exp expansion
Expy Expressway
E external of curve
Extru extruded
FOS factor of safety
F Fahrenheit
FS far side
F farad
Fed Federal
FP feed point
Ft feet/foot
Fn fence
Fn P fence post
FO fiber optic
FB field book
FD field drive
F fill
FAA fine aggregate angularity
FS fine sand
FH fire hydrant
Fl flange
Flrd flared
FES flared end section
F Bcn flashing beacon
FA flight auger sample
FL flow line
Ftg footing
FM force main
Fs foresight

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18 09-20-18	General Revisions General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 09/20/18 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-2

Fnd	found	ID	inside diameter	Mkg	marking	PMT	pad mounted transformer
Fdn	foundation	Inst	instrument	MA	mast arm	Pg	pages
Frac	fractional	Intchg	interchange	Matl	material	Pntd	painted
Frwy	freeway	Intmdt	intermediate	Max	maximum	Pr	pair
Frt	front	Intscn	intersection	MC	meander corner	Pnl	panel
FF	front face	Inv	invert	Meas	measure	Pk	park
F Disp	fuel dispenser	IM	iron monument	Mdn	median	PK	Parker-Kalon nail
FFP	fuel filler pipes	I Pn	Iron Pin	MD	median drain	Pa	pascal
FLS	fuel leak sensor	IP	iron Pipe	MC	medium curing	PSD	passing sight distance
Furn	furnish/ed	Jt	joint	M	mega	Pvmt	pavement
Gal	gallon	J	joule	Mer	meridian	Ped	pedestal
Galv	galvanized	Jct	junction	M	meter	Ped	pedestrian
Gar	garage	K	kelvin	M/s	meters per second	PPP	pedestrian pushbutton post
Gs L	gas line	Kn	kilo newton	M	mid ordinate of curve	Pen.	penetration
G Reg	gas line regulator	Kpa	kilo pascal	MGS	Midwest Guardrail System	Perf	perforated
GMV	gas main valve	Kg	kilogram	Mi	mile	Per.	perimeter
G Mtr	gas meter	Kg/m3	kilogram per cubic meter	MM	mile marker	PL	pipeline
GSV	gas service valve	Km	kilometer	MP	mile post	PI	place
GVP	gas vent pipe	K	Kip(s)	MI	milliliter	P&P	plan & profile
GV	gate valve	LS	Land Surveyor (licensed)	Mm	millimeter	PL	plastic limit
Ga	gauge	LSIT	Land Surveyor In Training	Mm/hr	millimeters per hour	P Cap	plastic cap
Geod	geodetic	Ln	lane	Min	minimum	PI or \overline{P}	plate
GIS	Geographical Information System	Lg	large	Misc	miscellaneous	Pt	point
G	giga	Lat	latitude	Mon	monument	PCC	point of compound curve
GPS	Global Positioning System	Lt	left	Mnd	mound	PC	point of curve
Gov	government	L	length of curve	Mtbl	mountable	PI	point of intersection
Grd	graded/grade	Lens	lenses	Mtd	mounted	PRC	point of reverse curvature
Gr	gravel	Lvl	level	Mtg	mounting	PT	point of tangent
Grnd	ground	LB	level book	Mk	muck	POC	point on curve
GWM	ground water monitor	Lvng	leveling	Mun	municipal	POT	point on tangent
Gdrl	guardrail	Lht	light	N	nano	PE	polyethylene
Gtr	gutter	LP	light pole	NGS	National Geodetic Survey	PVC	polyvinyl chloride
H Plg	H piling	Ltg	lighting	NS	near side	PCC	Portland Cement concrete
Hdwl	headwall	Lig Co	lignite coal	Neop	neoprene	Lb or #	pounds
Ha	hectare	Lig Sl	lignite slack	Ntwk	network	PP	power pole
Ht	height	LF	linear foot	N	newton	Preempt	preemption
HI	height of instrument	Liq	liquid	N	North	Prefab	prefabricated
Hel	helical	LL	liquid limit	NE	North East	Prfmd or Pref	preformed
H	henry	L	litre	NW	North West	Prep	preperation
Hz	hertz	Lm	loam	NB	Northbound	Press.	pressure
HDPE	high density polyethylene	Loc	location	No. or #	number		
HM	high mast	LC	long chord	Obsc	obscure(d)		
HP	high pressure	Long.	longitude	Obsn	observation		
HPS	high pressure sodium	Lp	loop	Ocpd	occupied		
Hwy	highway	LD	loop detector	Ocpy	occupy		
Hor	horizontal	Lm	lumen	Off Loc	office location		
HBP	hot bituminous pavement	Lum	luminaire	O/s	offset		
HMA	hot mix asphalt	L Sum	lump sum	OC	on center		
Hr	hour(s)	Lx	lux	C	one dimensional consolidation		
Hyd	hydrant	Mb	mailbox	OC	organic content		
Ph	hydrogen ion content	ML	main line	Orig	original		
Id	identification	M Hr	man hour	O To O	out to out		
In or "	inch	MH	manhole	OD	outside diameter		
Incl	inclinometer tube	Mkd	marked	OH	overhead		
IMH	inlet manhole	Mkr	marker				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15 04-23-18	General Revisions General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 04/23/18 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

PRV	pressure relief valve	Sc	scoria	St	street	Vert	vertical
Prestr	prestressed	Sec	seconds	SPP	structural plate pipe	VC	vertical curve
Pvt	private	Sec	section	SPPA	structural plate pipe arch	VCP	vitrified clay pipe
PD	private drive	SL	section line	Str	structure	V	volt
Prod.	production/produce	Sep	separation	Subd	subdivision	Vol	volume
Prog	programmed	Seq	sequence	Sub	subgrade	Wkwy	walkway
Prop.	property	Serv	service	Sub Prep	subgrade preperation	W	water content
Prop Ln	property line	Sh	shale	Ss	subsoil	WGV	water gate valve
Ppsd	proposed	Sht	sheet	SE	superelevation	WL	water line
PB	pull box	Shtng	sheeting	SS	supplement specification	WM	water main
Qty	quantity	Shldr	shoulder	Supp	supplemental	WMV	water main valve
Qtr	quarter	Sw or Sdwk	sidewalk	Surf	surfacing	W Mtr	water meter
Rad or R	radius	S	siemens	Surv	survey	WSV	water service valve
RR	railroad	SD	sight distance	Sym	symmetrical	WW	water well
Rlwy	railway	SN	sign number	SI	systems international	W	watt
Rsd	raised	Sig	signal	Tan	tangent	Wrng	wearing
RTP	random traverse point	Si Cl	silt clay	T	tangent (semi)	Wb	weber
Rge or R	range	Si Cl Lm	silty clay loam	TS	tangent to spiral	WIM	weigh in motion
RC	rapid curing	Si Lm	silty loam	Tel	telephone	W	west
Rec	record	Sgl	single	Tel B	Telephone Booth	WB	westbound
Rcy	recycle	SRCP	slotted reinforced concrete pipe	Tel P	telephone pole	Wrng	wiring
RAP	recycled asphalt pavement	SC	slow curing	Tv	television	W/	with
RPCC	recycled portland cement concrete	SS	slow setting	Temp	temperature	W/o	without
Ref	reference	Sm	small	Temp	temporary	WC	witness corner
R Mkr	reference marker	S	South	TBM	temporary bench mark	WGS	world geodetic system
RM	reference monument	SE	South East	T	tesla	Z	zenith
RP	reference point	SW	South West	T	thinwall tube sample		
Refl	reflectorized	SB	Southbound	T/mi	tons per mile		
RCB	reinforced concrete box	Sp	spaces	Ts	topsoil		
RCES	reinforced concrete end section	Spcl	special	Twp or T	township		
RCFES	reinforced concrete flared end section	SA	special assembly	Traf	traffic		
RCTES	reinforced concrete traversable end section	SP	special provisions	TSCB	traffic signal control box		
RCP	reinforced concrete pipe	G	specific gravity	Tr	trail		
RCPS	reinforced concrete pipe sewer	Spk	spike	Transf	transformer		
Reinf	reinforcement	SC	spiral to curve	TB	transit book		
Res	reservation	ST	spiral to tangent	Trans	transition		
Rs	residence	SB	split barrel sample	TT	transmission tower		
Ret	retaining	SH	sprinkler head	TES	traversable end section		
Rev	reverse	SV	sprinkler valve	Trans	transverse		
Rt	right	Sq	square	Trav	traverse		
R/W	right of way	SF	square feet	TP	traverse point		
Riv	river	Km2	square kilometer	Trtd	treated		
Rd	road	M2	square meter	Trmt	treatment		
Rdbd	road bed	SY	square yard	Qc	triaxial compression		
Rdwy	roadway	Stk	stake	TERO	tribal employment rights ordinance		
RWIS	roadway weather information system	Std	standard	Tpl	triple		
Rk	rock	N	standard penetration test	TP	turning point		
Rt	route	Std Specs	standard specifications	Typ	typical		
Salv	salvage(d)	Sta	station	Qu	unconfined compressive strength		
Sd	sand	Sta Yd	station yards	Ugrnd	underground		
Sdy Cl	sandy clay	Stm L	steam line	USC&G	US Coast & Geodetic Survey		
Sdy Cl Lm	sandy clay loam	SEC	steel encased concrete	USGS	US Geologic Survey		
Sdy Fl	sandy fill	SMA	stone matrix asphalt	Util	utility		
Sdy Lm	sandy loam	SSD	stopping sight distance	VG	valley gutter		
San	sanitary sewer line	SD	storm drain	Vap	vapor		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15 04-23-18	General Revisions General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 04/23/18 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

702COM
ACCENT
AGASSIZ WU
AGC
All PI
ALL SEAS WU
AMOCO PI
AMRDA HESS
AT&T
B PAW
BAKER ELEC
BASIN ELEC
BEK TEL
BELLE PL
BLM
BNSF
BOEING
BRNS RWD
BURK-DIV ELEC
BURL WU
Cable One
CABLE SERV
CAP ELEC
CASS CO ELEC
CASS RWU
CAV ELEC
CBLCOM
CENEX PL
CENT PL WATER DIST
CENT PWR ELEC
COE
CONS TEL
CONT RES
CPR
D O E
DAK CARR
DAK CENT TEL
DAK RWD
DGC
DICKEY R NET
DICKEY RWU
DICKEY TEL
DNRR
DOME PL
DVELEC
DVMW
ENBRDG
ENVENTIS
FALK MNG
FHWA
G FKS-TRL WD
GETTY TRD & TRAN
GLDN W ELEC
GRGS CO TEL
GTR RAMSEY WD

702 Communications
Accent Communications
Agassiz Water Users Incorporated
Associated General Contractors of America
Alliance Pipeline
All Seasons Water Users Association
Amoco Pipeline Company
Amerada Hess Corporation
AT&T Corporation
Bear Paw Energy Incorporated
Baker Electric
Basin Electric Cooperative Incorporated
Bek Communications Cooperative
Belle Fourche Pipeline Company
Bureau of Land Management
Burlington Northern Santa Fe Railway
Boeing
Barnes Rural Water District
Burke-Divide Electric Cooperative
Burleigh Water Users
Cable One
Cable Services
Capital Electric Cooperative Incorporat
Cass County Electric Cooperative
Cass Rural Water Users Incorporated
Cavalier Rural Electric Cooperative
Cablecom Of Fargo
Cenex Pipeline
Central Pipe Line Water District
Central Power Electric Cooperative
Corps of Engineers
Consolidated Telephone
Continental Resource Inc
Canadian Pacific Railway
Department Of Energy
Dakota Carrier Network
Dakota Central Telephone
Dakota Rural Water District
Dakota Gasification Company
Dickey Rural Networks
Dickey Rural Water Users Association
Dickey Telephone
Dakota Northern Railroad
Dome Pipeline Company
Dakota Valley Electric Cooperative
Dakota, Missouri Valley & Western
Enbridge Pipelines Incorporated
Enventis Telephone
Falkirk Mining Company
Federal Highway Administration
Grand Forks-trail Water District
Getty Trading & Transportation
Golden West Electric Cooperative
Griggs County Telephone
Greater Ramsey Water District

GT PLNS NAT GAS
HALS TEL
IDEA1
INT-COMM TEL
KANEB PL
KEM ELEC
KOCH GATH SYS
LKHD PL
LNGDN RWU
LWR YELL R ELEC
MCKNZ CON
MCKNZ ELEC
MCKNZ WRD
MCLEOD
MCLN ELEC
MCLN-SHRDN R WAT
MDU
MID-CONT CABLE
MIDSTATE TEL
MINOT CABLE
MINOT TEL
MISS VALL COMM
MISS W W S
MNKOTA PWR
MOR-GRAN-SOU ELEC
MOUNT-WILLI ELEC
MRE LBTY TEL
MUNICIPAL
MUNICIPAL
N CENT ELEC
N VALL W DIST
ND PKS & REC
ND TEL
NDDOT
NDSU SOIL SCI DEPT
NEMONT TEL
NODAK R ELEC
NOON FRMS TEL
NPR
NSP
NTH PRAIR RW
NTHN BRDR PL
NTHN PLNS ELEC
NTHWSTRN REF
NW COMM
NWRWD
ONEOK
OSHA
OTTR TL PWR
P L E M
POLAR COM
PVT ELEC
QWEST
R&T W SUPPLY

Great Plains Natural Gas Company
Halstad Telephone Company
Idea1
Inter-Community Telephone Company
Kaneb Pipeline Company
Kem Electric Cooperative Incorporated
Koch Gathering Systems Incorporated
Lakehead Pipeline Company
Langdon Rural Water Users Incorporated
Lower Yellowstone Rural Electric
McKenzie Consolidated Telcom
McKenzie Electric Cooperative
McKenzie County Water Resource District
McLeod USA
McLean Electric Cooperative
McLean-Sheridan Rural Water
Montana-dakota Utilities
Mid-Continent Cable
Midstate Telephone Company
Minot Cable Television
Minot Telephone Company
Missouri Valley Communications
Missouri West Water System
Minnkota Power
Mor-gran-sou Electric Cooperative
Mountrail-williams Electric Cooperative
Moore & Liberty Telephone
City Water And Sewer
City Of '.....'
North Central Electric Cooperative
North Valley Water District
North Dakota Parks And Recreation
North Dakota Telephone Company
North Dakota Department of Transportation
NDSU Soil Science Department
Nemont Telephone
Nodak Rural Electric Cooperative
Noonan Farmers Telephone Company
Northern Plains Railroad
Northern States Power
Northern Prairie Rural Water Association
Northern Border Pipeline
Northern Plains Electric Cooperative Incorporated
Northwestern Refinery Company
Northwest Communication Cooperation
Northwest Rural Water District
Oneok gas
Occupational Safety and Health Administration
Otter Tail Power Company
Prairielands Energy Marketing
Polar Communications
Private Electric
Qwest Communications
R & T Water Supply Association
























RED RIV TEL
RESVTN TEL
ROBRTS TEL
R-RIDER ELEC
RRVW
S CENT REG WD
S E W U
SCOTT CABLE
SHERDN ELEC
SHEYN VLY ELEC
SKYTECH
SLOPE ELEC
SOURIS RIV TELCOM
ST WAT COMM
STATE LN WATER
STER ENG
STUT RWU
SW PL PRJ
T M C
TCI
TESORO HGH PLNS PL
TRI-CNTY WU
TRL CO RWU
UNTD TEL
UPPR SOUR WUA
US SPRINT
USAF MSL CABLE
USFWS
USW COMM
VRNDRY ELEC
W RIV TEL
WEB
WILLI RWA
WILSTN BAS PL
WLSH RWD
WOLVRTN TEL
XLENER
YSVR













Red River Rural Telephone
Reservation Telephone
Roberts Company Telephone
Roughrider Electric Cooperative
Red River Valley & Western Railroad
South Central Regional Water District
South East Water Users Incorporated
Scott Cable Television Dickinson
Sheridan Electric Cooperative
Sheyenne Valley Electric Cooperative
Skyland Technologies Incorporated
Slope Electric Cooperative Incorporated
Souris River Telecommunications
State Water Commission
State Line Water Cooperative
Sterling Energy
Stutsman Rural Water Users
Southwest Pipeline Project
Turtle Mountain Communications
TCI of North Dakota
Tesoro High Plains Pipeline
Tri-County Water Users Incorporated
Traill County Rural Water Users
United Telephone
Upper Souris Water Users Association
U.S. Sprint
U.S.A.F. Missile Cable
US Fish and Wildlife Service
U.S. West Communications
Verendrye Electric Cooperative
West River Telephone Incorporated
W. E. B. Water Development Association
Williams Rural Water Association
Williston Basin Interstate Pipeline Company
Walsh Water Rural Water District
Wolverton Telephone
Xcel Energy
Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18 09-20-18	General Revisions General Revisions








This document was originally
issued and sealed by
Roger Weigel,
Registration Number
PE- 2930 ,
on 09/20/18 and the original
document is stored at the
North Dakota Department
of Transportation

Existing Topography























	Existing Ground Void
	Existing Cemetary Boundary
	Existing Box Culvert Bridge
	Existing Concrete Surface
	Existing Drainage Structure
	Existing Gravel Surface
	Existing Riprap
	Existing Dirt Surface
	Existing Asphalt Surface
	Existing Tie Point Line
	Existing Railroad Centerline
	Existing Guardrail Cable
	Existing Guardrail Metal
	Existing Edge of Water
	Existing Fence
	Existing Railroad
	Existing Field Line
	Exst Flow
	Existing Curb
	Existing Valley Gutter
	Existing Driveway Gutter
	Existing Curb and Gutter
	Existing Mountable Curb and Gutter

	Existing 3-Cable w Posts
	Site Boundary
	Existing Berm, Dike, Pit, or Earth Dam
	Existing Ditch Block
	Existing Tree Boundary
	Existing Brush or Shrub Boundary
	Existing Retaining Wall
	Existing Planter or Wall
	Existing W-Beam Guardrail with Posts
	Existing Railroad Switch
	Gravel Pit - Borrow Area
	Existing Wet Area-Vegetation Break





Proposed Topography

	3-Cable w Posts
	Flow
	Fence
	Remove Line
	Wall
	Retaining Wall (Plan View)
	W-Beam w Posts










Existing Utilities

	Existing Electrical
	Existing Fiber Optic Line
	Existing TV Fiber Optic
	Existing Gas Pipe
	Existing Overhead Utility Line
	Existing Power
	Existing Fuel Pipeline
	Existing Undefined Above Ground Pipe Line
	Existing Sanitary Sewer
	Existing Sanitary Force Main
	Existing Storm Drain
	Existing Storm Drain Force Main
	Existing Culvert
	Existing Telephone Line
	Existing TV Line
	Existing Water or Steam Line
	Existing Under Drain
	Existing Slotted Drain
	Existing Conduit
	Existing Conductor
	Existing Down Guy Wire Down Guy
	Existing Underground Vault or Lift Station




Proposed Utilities

	24 Inch Pipe
	Reinforced Concrete Pipe
	Under Drain
	Edge Drain

Traffic Utilities

	Conductor
	Fiber Optic
	Existing Loop Detector
	Existing Double Micro Loop Detector
	Micro Loop Detector Double
	Existing Micro Loop Detector
	Micro Loop Detector
	Signal Head with Mast Arm
	Existing Signal Head with Mast Arm

Sign Structures














	Existing Overhead Sign Structure
	Existing Overhead Sign Structure Cantilever
	Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups










This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 09/23/16 and the original document is stored at the
North Dakota Department
of Transportation

Line Styles









Right Of Way

	Easement
	Existing Easement
	Right of Way
	Existing Right of Way
	Existing Right of Way Railroad
	Existing Right of Way Not State Owned
	Existing Government Lot Line
	Existing Adjacent Block Lines
	Existing Adjacent Lot Lines
	Existing Adjacent Property Line
	Existing Adjacent Subdivision Lines
	Sight Distance Triangle Line
	Dimension Leader







Boundary Control



	Existing City Corporate Limits or Reservation Boundary
	Existing State or International Line
	Existing Township
	Existing County
	Existing Section Line
	Existing Quarter Section Line
	Existing Sixteenth Section Line
	Existing Centerline
	Tangent Line

Cross Sections and Typicals



	Existing Ground
	Existing Topsoil (Cross Section View)
	Existing Ground Void (Not Surveyed)
	Existing Concrete
	Existing Aggregate (Cross Section View)
	Existing Curb and Gutter (Cross Section View)
	Existing Asphalt (Cross Section View)
	Existing Reinforcement Rebar

Geotechnical



	D	Geotextile Fabric Type D
	Geo	Geogrid
	R	Geotextile Fabric Type R
	R	Geotextile Fabric Type R1
	RR	Geotextile Fabric Type RR
	S	Geotextile Fabric Type S

	Subgrade Reinforcement
	Failure Line







Countours

	Depression Contours
	Supplemental Contour





Profile

	Subgrade, Subcut or Ditch Grade
	Topsoil Profile










Striping

	Centerline Pavement Marking
	Barrier with Centerline Pavement Marking
	Barrier Pavement Marking
	Stripe 4 IN Dotted Extension White
	Stripe 8 IN Dotted Extension White
	Stripe 8 IN Lane Drop








Pavement Joints

	Doweled Joint
	Tie Bar 30 Inch 4 Foot Center to Center
	Tie Bar 18 Inch 3 Foot Center to Center
	Tie Bar at Random Spacing






Bridge Details

	Hidden Object
	Small Hidden Object
	Large Hidden Object
	Phantom Object
	Centerline Main
	Centerline
	Existing Ground (Details)
	Existing Conditions
	Sheet Piling

Erosion Control

	Limits of Const Transition Line
	Bale Check
	Rock Check
	S Floating Silt Curtain
	SF Silt Fence
	Excavation Limits
	Fiber Rolls

Environmental

	Wetland Mitigation
	Existing Wetland Easement USFWS
	Existing Wetland Jurisdictional
	Existing Wetland
	Tree Row

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930 , on 09/23/16 and the original document is stored at the North Dakota Department of Transportation






























































































Symbols

	North Arrow (Half Scale)		Attenuation Device		Existing Railroad Battery Box		Existing Delineator Type E										
	Truck Mounted Attenuator		Diamond Grade Delineator Type A		Existing Bush or Shrub		Existing EFB Misc										
	Type I Barricade		Diamond Grade Delineator Type B		Existing Gas Cap or Stub		Existing Flashing Beacon										
	Type II Barricade		Diamond Grade Delineator Type C		Existing Sanitary Cap or Stub		Existing Pipe Mounted Flasher										
	Type III Barricade		Diamond Grade Delineator Type D		Existing Storm Drain Cap or Stub		Existing Pad Mounted Feed Point										
	Catch Basin		Diamond Grade Delineator Type E		Existing Water Cap or Stub		Existing Pipe Mounted Feed Point with Pad										
	Cairn or Stone Circle		Flexible Delineator		Existing Sanitary Cleanout		Existing Pole Mounted Feed Point										
	Video Detection Camera		Flexible Delineator Type A		Existing Concrete Foundation		Existing Railroad Frog										
	Storm Drain Cap or Stub		Flexible Delineator Type B		Existing Traffic Signal Controller		Existing Snow Gate 18										
	Corrugated Metal End Section 18 Inch		Flexible Delineator Type C		Existing Pad Mounted Signal Controller		Existing Snow Gate 28										
	Corrugated Metal End Section 24 Inch		Flexible Delineator Type D		Existing Sixteenth Section Corner		Existing Snow Gate 40										
	Corrugated Metal End Section 30 Inch		Flexible Delineator Type E		Existing Quarter Section Corner		Existing Headwall										
	Corrugated Metal End Section 36 Inch		Delineator Type A		Existing Section Corner		Existing Pedestrian Head with Number										
	Corrugated Metal End Section 42 Inch		Delineator Type A Reset		Existing Railroad Crossbuck		Existing Signal Head										
	Corrugated Metal End Section 48 Inch		Delineator Type B		Existing Satellite Dish		Existing Sprinkler Head										
	Concrete Foundation		Delineator Type B Reset		Existing Fuel Dispensers		Existing Fire Hydrant										
	Ground Connection Conductor		Delineator Type C		Existing Flexible Delineator Type A		Existing Catch Basin Drop Inlet										
	Neutral Connection Conductor		Delineator Type D		Existing Flexible Delineator Type B		Existing Curb Inlet										
	Phase 1 Connection Conductor		Delineator Type E		Existing Flexible Delineator Type C		Existing Manhole Inlet										
	Phase 2 Connection Conductor		Delineator Drums		Existing Flexible Delineator Type D		Existing Junction Box										
	Traffic Cone		Spot Elevation		Existing Flexible Delineator Type E	<table><tr><th colspan="2">NORTH DAKOTA DEPARTMENT OF TRANSPORTATION</th></tr><tr><th colspan="2">07-01-14</th></tr><tr><th colspan="2">REVISIONS</th></tr><tr><th>DATE</th><th>CHANGE</th></tr><tr><td></td><td></td></tr></table>		NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		07-01-14		REVISIONS		DATE	CHANGE		
NORTH DAKOTA DEPARTMENT OF TRANSPORTATION																	
07-01-14																	
REVISIONS																	
DATE	CHANGE																
	Signal Controller		Existing Access Control Arrow		Existing Delineator Type A												
	Pad Mounted Signal Controller		Existing Artifact		Existing Delineator Type B												
	Alignment Data Point		Existing Flashing Beacon		Existing Delineator Type C												
	Emergency Vehicle Detector		Existing Benchmark		Existing Delineator Type D												

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

D-101-31

	Existing Light Standard		Existing Manhole with Valve Water		Existing Telephone Pole		Existing Undefined Manhole
	Existing High Mast Light Standard 10 Luminaire		Existing Water Manhole		Existing Wood Pole		Existing Undefined Pull Box
	Existing High Mast Light Standard 3 Luminaire		Existing Mile Post Type A		Existing Post		Existing Undefined Pedestal
	Existing High Mast Light Standard 4 Luminaire		Existing Mile Post Type B		Existing Pedestrian Push Button Post		Existing Undefined Valve
	Existing High Mast Light Standard 5 Luminaire		Existing Mile Post Type C		Existing Control Point CP		Existing Undefined Pipe Vent
	Existing High Mast Light Standard 6 Luminaire		Existing Reference Marker		Existing Control Point GPS-RTK		Existing Gas Valve
	Existing High Mast Light Standard 7 Luminaire		Existing RW Marker		Existing Control Point TRI		Existing Water Valve
	Existing High Mast Light Standard 8 Luminaire		Existing Utility Marker		Existing Reference Marker Point NGS		Existing Fuel Pipe Vent
	Existing High Mast Light Standard 9 Luminaire		Iron Monument Found		Existing Pull Box		Existing Gas Pipe Vent
	Existing Overhead Sign Structure Load Center		Iron Pin R/W Monument		Existing Intelligent Transportation Pull Box		Existing Sanitary Pipe Vent
	Existing Luminaire		Existing Object Marker Type I		Existing Water Pump		Existing Storm Drain Pipe Vent
	Existing Light Standard Luminaire		Existing Object Marker Type II		Existing Slotted Reinforced Concrete Pipe		Existing Water Pipe Vent
	Existing Federal Mailbox		Existing Object Marker Type III		Existing RR Profile Spot		Existing Weather Station
	Existing Private Mailbox		Existing Electrical Pedestal		Existing Fuel Leak Sensors		Existing Ground Water Well Bore Hole
	Existing Meander Section Corner		Existing Telephone Pedestal		Existing Highway Sign		Existing Windmill or Tower
	Existing Meter		Existing Fiber Optic Telephone Pedestal		Existing Miscellaneous Spot		Existing Witness Corner
	Existing Electrical Manhole		Existing TV Pedestal		Existing Lighting Standard Pole		Flashing Beacon
	Existing Gas Manhole		Existing Fiber Optic TV Pedestal		Existing Traffic Signal Standard		Flagger
	Existing Sanitary Manhole		Existing Fuel Filler Pipes		Existing Transformer		Pipe Mounted Flasher
	Existing Sanitary Force Main Manhole		Existing Traverse PI Aerial Panel		Existing Large Evergreen Tree		Sanitary Force Main with Valve
	Existing Sanitary Manhole with Valve		Existing Pole		Existing Small Evergreen Tree		
	Existing Storm Drain Manhole		Existing Power Pole		Existing Large Tree		
	Existing Force Main Storm Drain Manhole		Existing Power Pole with Transformer		Existing Small Tree		
	Existing Force Main Storm Drain Manhole with Valve				Existing Tree Trunk		
	Existing Telephone Manhole				Existing Pad Mounted Traffic Signal Control Box		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols



Pad Mounted Feed Point



Pipe Mounted Feed Point with Pad



Pole Mounted Feed Point



Headwall



Double Headwall with Vegetation Barrier



Single Headwall with Vegetation Barrier



Pole Mounted Head



Sprinkler Head



Fire Hydrant



Inlet Type 1



Inlet Type 2



Double Inlet Type 2



Inlet Grate Type 2



Junction Box



High Mast Light Standard 10 Luminaire



High Mast Light Standard 3 Luminaire



High Mast Light Standard 4 Luminaire



High Mast Light Standard 5 Luminaire



High Mast Light Standard 6 Luminaire



High Mast Light Standard 7 Luminaire



High Mast Light Standard 8 Luminaire



High Mast Light Standard 9 Luminaire



Relocate Light Standard



Overhead Sign Structure Load Center



Light Standard 100 Watt High Pressure Sodium Vapor Luminaire



Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire



Light Standard 150 Watt High Pressure Sodium Vapor Luminaire



Light Standard 175 Watt High Pressure Sodium Vapor Luminaire



Light Standard 200 Watt High Pressure Sodium Vapor Luminaire



Light Standard 250 Watt High Pressure Sodium Vapor Luminaire



Light Standard 310 Watt High Pressure Sodium Vapor Luminaire



Light Standard 35 Watt High Pressure Sodium Vapor Luminaire



Light Standard 400 Watt High Pressure Sodium Vapor Luminaire



Light Standard 50 Watt High Pressure Sodium Vapor Luminaire



Light Standard 70 Watt High Pressure Sodium Vapor Luminaire



Light Standard 700 Watt High Pressure Sodium Vapor Luminaire



Manhole



Manhole 48 Inch



Sanitary Force Main Manhole



Sanitary Sewer Manhole



Storm Drain Manhole



Storm Drain Manhole with Inlet



Reset Mile Post



Mile Post Type A



Mile Post Type B



Mile Post Type C



Right of Way Marker



Tubular Marker



Alignment Monument



Iron Pin Reference Monument



Object Marker Type I



Object Marker Type II



Object Marker Type III



Caution Mode Arrow Panel



Back to Back Vertical Panel Sign



Double Direction Arrow Panel



Left Directional Arrow Panel



Right Directional Arrow Panel



Sequencing Arrow Panel



Truck Mounted Arrow Panel



Power Pole



Wood Pole



Pedestrian Push Button Post



Property Corner



Pull Box



Intelligent Transportation Pull Box



Sanitary Pump



Storm Drain Pump



Reinforced Pavement



Reinforced Concrete End Section 15 Inch



Reinforced Concrete End Section 18 Inch



Reinforced Concrete End Section 24 Inch



Reinforced Concrete End Section 30 Inch



Reinforced Concrete End Section 36 Inch



Reinforced Concrete End Section 42 Inch



Reinforced Concrete End Section 48 Inch



Reinforced Concrete End Section 54 Inch



Reset Right of Way Marker



Reset USGS Marker



Right of Way Markers



Riser 30 Inch



Continuous Split Barrel Sample



Flight Auger Sample



Split Barrel Sample



Thinwall Tube Sample



Highway Sign



SNOW GATE 18 FT



SNOW GATE 28 FT



SNOW GATE 40 FT



Standard Penetration Test



Transformer



Inclinometer Tube



Underdrain Cleanout



Excavation Unit



Water Valve

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE-2930,
on 07/01/14 and the original document is stored at the
North Dakota Department
of Transportation

Cross Section Legend


Description	Longitudinal Parallel to Roadway	Transverse Perpendicular to Roadway*
Cable Line	● CBL1	● CBL2
Conduit Line	● CDU1	● CDU2
Electric Line	● E1	● E2
Fiber Optic Line	● F1	● F2
Gas Main Line	● GM1	● GM2
Gas Service Line	● GS1	● GS2
Gas Transmission Line	● GT1	● GT2
Fuel Pipeline	● PL1	● PL2
Sanitary Sewer Force Main	● SSF1	● SSF2
Sanitary Sewer	● SS1	● SS2
Steam Line	● STE1	● STE2
Storm Drain (Assumed Depth)	● SD1	● SD2
Telephone Line	● T1	● T2
TV Line	● TV1	● TV2
Water Main Line	● WM1	● WM2
Water Service Line	● WS1	● WS2

Description	Longitudinal Parallel to Roadway	Transverse Perpendicular to Roadway*
Overhead Power Transmission Line	OHT1 ↑	OHT2 ↑
Overhead Line	OH1 ↑	OH2 ↑



When storm drain invert elevations are NOT used to draw pipe, they will appear as shown to the left. When invert elevations are used to draw pipe, they will be a cross section similar to the graphics shown below.

* Usually the transverse utilities are shown on a cross section with 2 or more symbols. The utility runs from one symbol to the other, but the connection may not be shown.



On the right side of most cross sections there is a earthwork table. The following example (values not related to project) details the earthwork table layout.


Cut Area	CA: 34.34 SF
Fill Area	FA: 0.017 SF
Cut Volume	CV: 64.44 CY
Fill Volume	FV: 0.031 CY
Mass Ordinate	MO: 65.13 CY

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-20-18	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PEPE-2930
on 9/20/18 and the original document is stored at the
North Dakota Department
of Transportation


EROSION CONTROL
FIBER ROLL PLACEMENT DETAILS

D-261-1

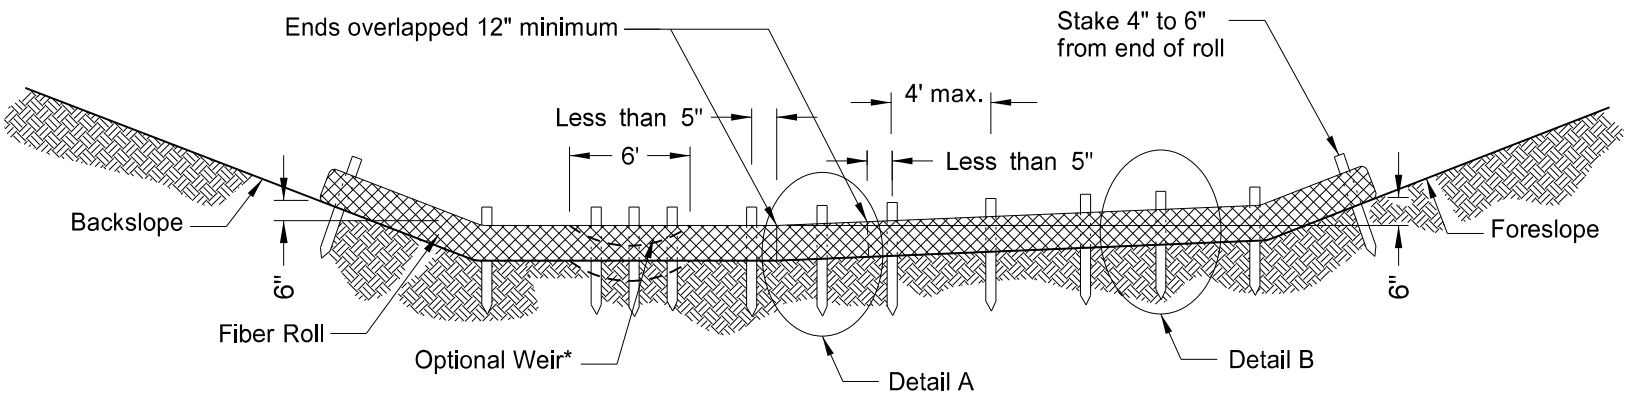


*Optional Weir. Use in flat areas, such as the Red River Valley, where there is potential for water to back up on adjacent property. Lower fiber roll enough to prevent water from backing up on adjacent property. Do not use 20-inch fiber rolls in flat areas where there is potential for water to back up on adjacent property.


12 OR 20 INCH FIBER ROLL - DITCH BOTTOM

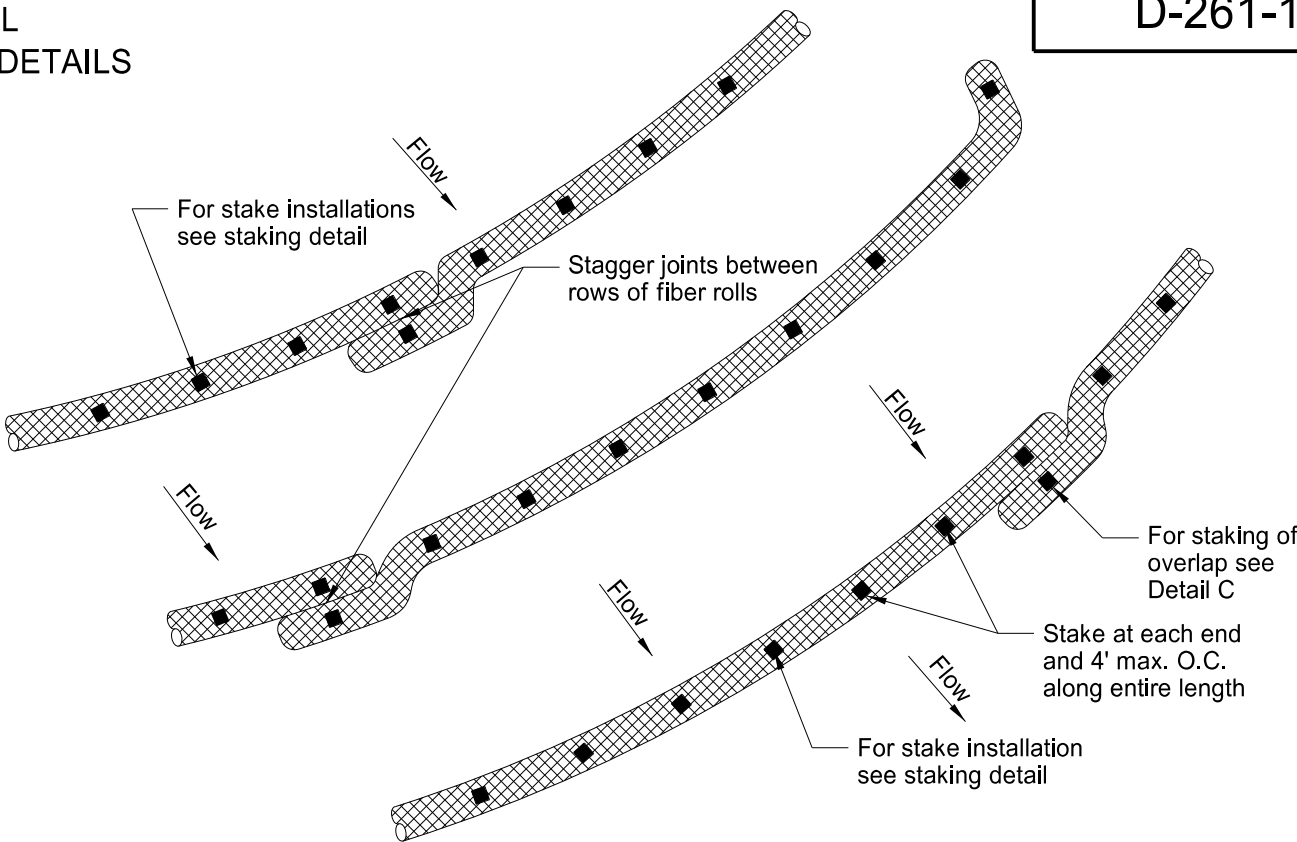


PLAN VIEW FOR SLOPE APPLICATION

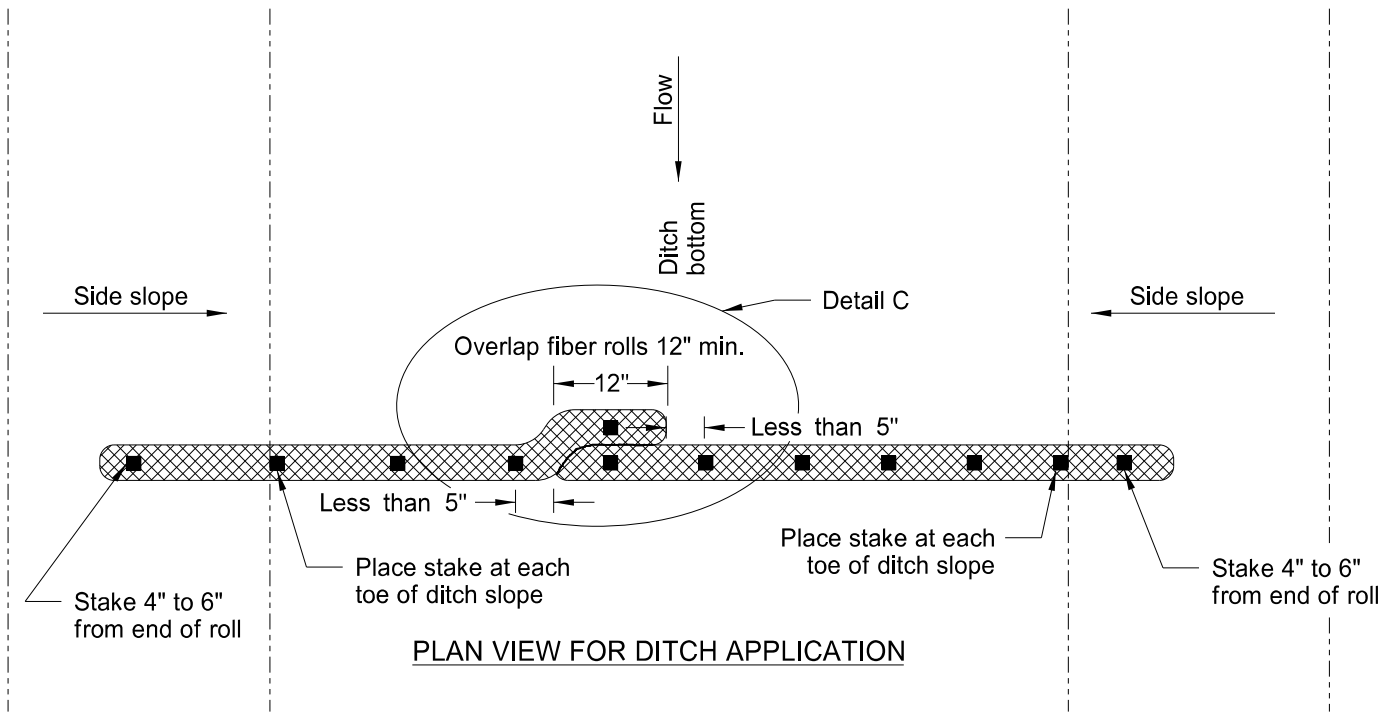

PLAN VIEW FOR DITCH APPLICATION

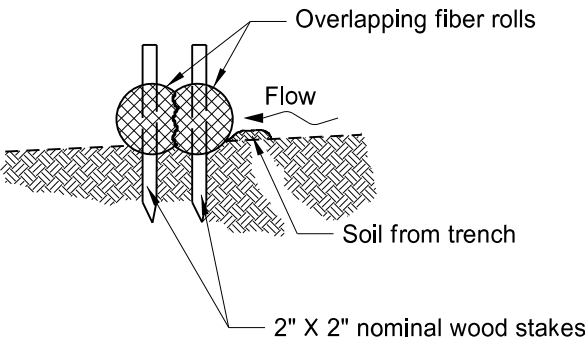

Detail A
Fiber Roll Overlapping Staking Detail

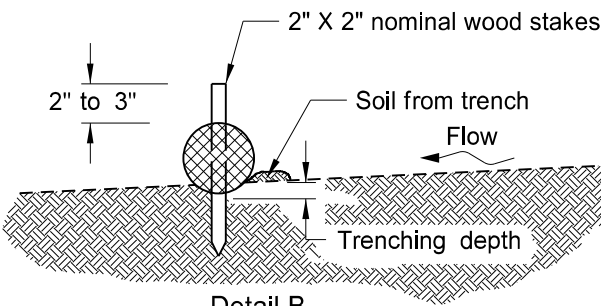

Detail B
Fiber Roll Staking Detail

FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	MINIMUM TRENCH DEPTH	MAXIMUM TRENCH DEPTH
6"	2" x 2"	18"	2"	2"
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"

NOTE: Runoff must not be allowed to run under or around roll.



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-18-10	
REVISIONS	
DATE	CHANGE
06-10-13	Added plan view for ditch and slope application. Added table with values for stake and trench dimensions.
10-04-13	Revised fiber roll overlap detail.
06-26-14	Changed standard drawing number from D-708-7 to D-261-1.
08-27-19	New Design Engineer PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 08/27/19 and the original document is stored at the
North Dakota Department
of Transportation


LONGITUDINAL JOINT DETAILS

D-550-2

UNTIED JOINTS

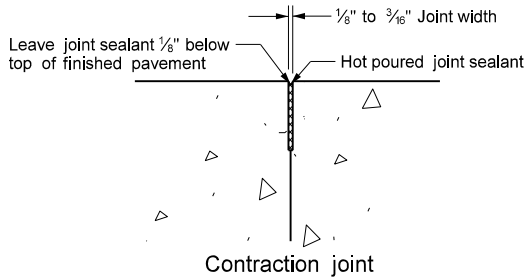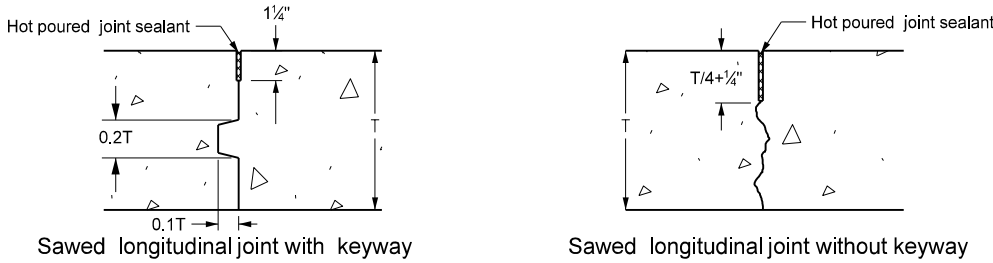

TIED JOINTS

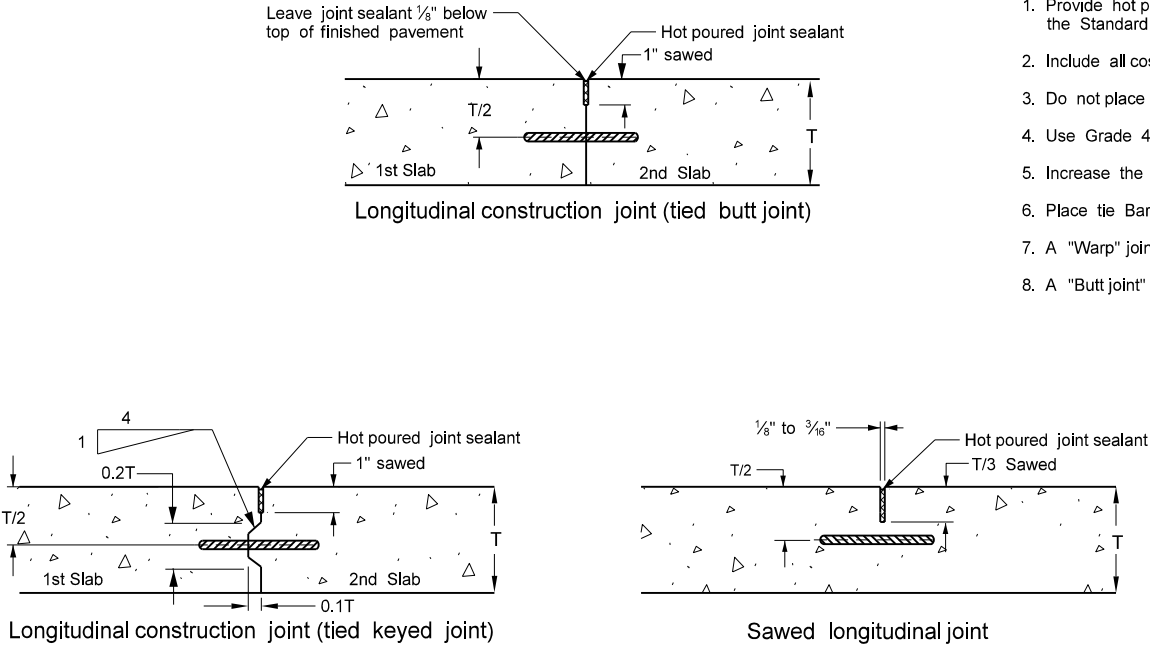


Notes:

1. Provide hot poured joint sealant meeting the requirements of Section 826.02A.2 of the Standard Specifications.
2. Include all costs of the longitudinal joint and seal in the price bid for the PCC pavement.
3. Do not place tie bars within 18 inches of a transverse skewed joint.
4. Use Grade 40 steel for tie bars installed bent and later straightened.
5. Increase the tie bar spacing up to 10%, when necessary to facilitate construction.
6. Place tie Bars at a 48 inch maximum spacing.
7. A "Warp" joint is a sawed joint or a construction joint with a keyway.
8. A "Butt joint" is a construction joint with no keyway.


BAR SIZE
GRADE STEEL
BAR LENGTH
DIST TO FREE EDGE
JOINT TYPE
PVT THICKNESS

TIEBAR SPACINGS (In)

SPE E LENGTH E EDGE (FT)		# 3 BAR										# 4 BAR										# 5 BAR										# 6 BAR																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
		GRADE 40					GRADE 60					GRADE 40					GRADE 60					GRADE 40					GRADE 60					GRADE 40					GRADE 60																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
		24"					30"					24"					36"					30"					42"					36"					48"																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
		4	6	8	10		4	6	8	10	12	14	16		8	10	12	14	16	22	24		10	12	14	16	22	24		10	12	14	16	22	24		10	12	14	16	19	22	24		10	12	14	16	19	22	24																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
6"	WARP BUTT		48	39			48	48					48																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			

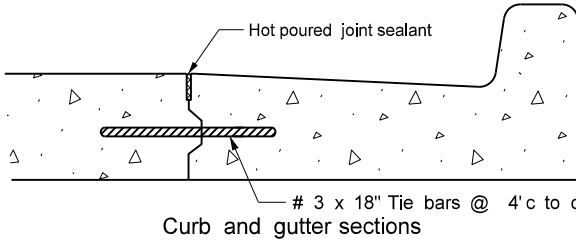

JOINT SEALER DETAILS

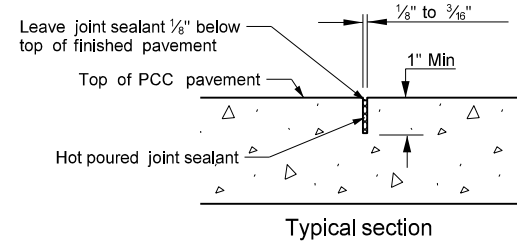

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-15-2010	
REVISIONS	
DATE	CHANGE
10/23/2012	Expanded Tie Bar Table
03/16/2016	Updated Jt Details & notes
10/25/2019	Corrected "Typo" in Note 3

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/25/19 and the original document is stored at the
North Dakota Department
of Transportation</

SIGN NUMBER	G20-10-108
WIDTH x HEIGHT	9'-0" x 4'-0"
BORDER WIDTH	1.25" (inset 0.75")
CORNER RADIUS	3"
MOUNTING	Ground
BACKGROUND	TYPE: IV Reflective
	COLOR: Fluorescent Orange
LEGEND/BORDER	TYPE: Non-Refl
	COLOR: Black

SYMBOL	X	Y	WID	HT	ANGLE
	42.1	6.2	24	4	0

STATION(S):

AREA: 36.0 Sq.Ft.

Dimensions are in inches.tenthsLetter locations are panel edge to lower left corner

LETTER POSITION (X)																		LENGTH	SIZE	SERIES
C	O	N	S	T	R	U	C	T	E	D		B	Y					69.7	6	D 2000
19.2	24.5	30	35.1	39.7	44.3	49.4	54.8	59.7	64.3	69	73.1	79.1	83.7							
Y	O	U	R		C	O	M	P	A	N	Y		N	A	M	E		91.5	6	D 2000
8.3	14.2	19.8	25.3	29.4	35.4	40.7	46.2	52.4	56.8	62.8	67.8	72.9	78.9	83.9	89.9	96				
Y	O	U	R		T	O	W	N	,		N	D						64.6	6	D 2000
21.7	27.6	33.2	38.7	42.8	48.8	53.3	58.4	64.6	69.6	70.7	76.7	82.2								

- Notes:
- 1. Post mount sign a distance of ½A following the End Road Work (G20-2-48) sign (maximum 2 signs per project.)
 - 2. Use sign on rural projects with a 30 day or longer duration (not required on seal coats or other short duration projects.)
 - 3. Do not place sign in urban areas or within city limits.

Advance Warning Sign Spacing (A)			
Road Type	Distance between signs min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-22-12	
REVISIONS	
DATE	CHANGE
7-18-14 9-27-17 8-30-18 10-03-19	Revise sheeting to type IV. Updated to active voice. Updated sign number in note 1. New Design Engineer PE Stamp.

This document was originally issued and sealed by

Kirk J Hoff,

Registration Number


PE- 4683 ,

on 10/03/19 and the original document is stored at the


North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS


D-704-9

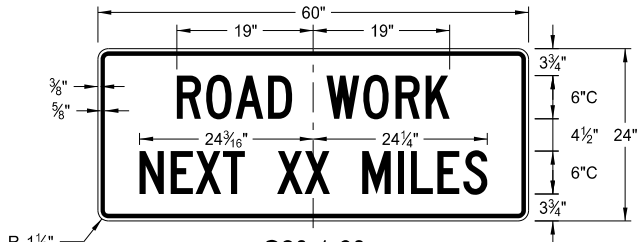

G20-1-60
Legend: black (non-refl)
Background: orange

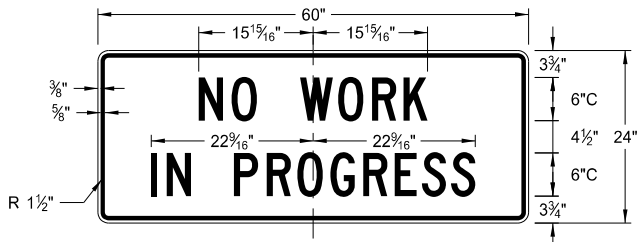


G20-1b-60
Legend: black (non-refl)
Background: orange

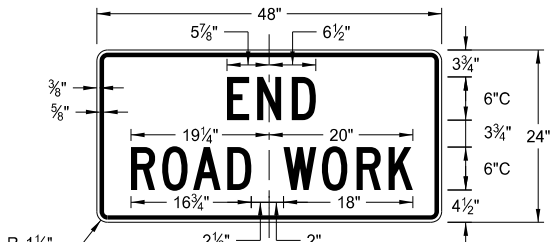


G20-2-48
Legend: black (non-refl)
Background: orange




G20-4b-36
Legend: black (non-refl)
Background: orange

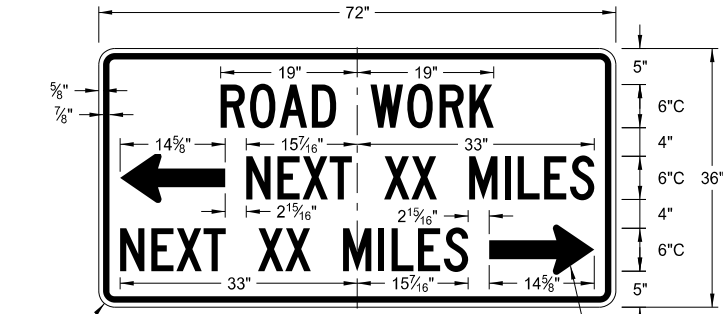


G20-50a-72
Legend: black (non-refl)
Background: orange

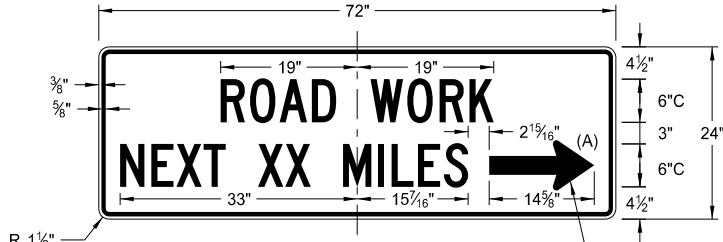


G20-52a-72
Legend: black (non-refl)
Background: orange

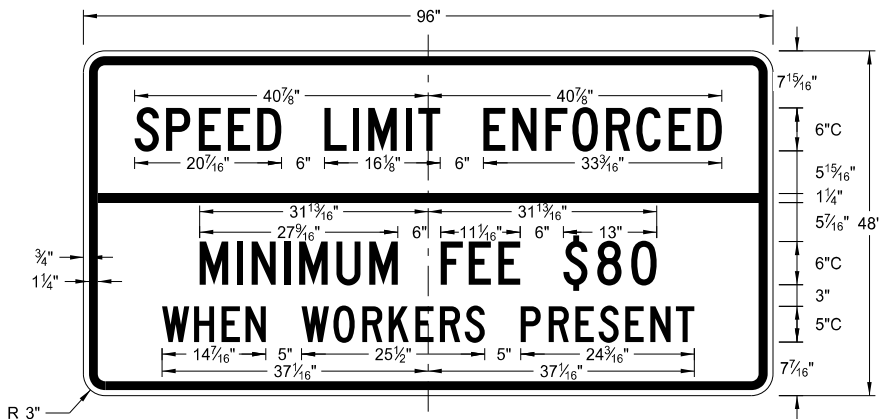


G20-55-96
Legend: black (non-refl)
Background: orange

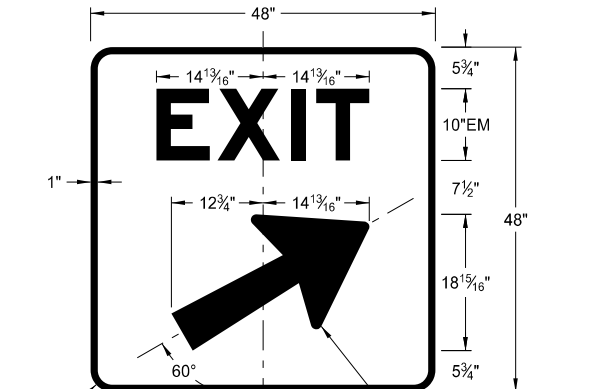


E5-1(L or R)-48
Legend: white
Background: green (orange optional)

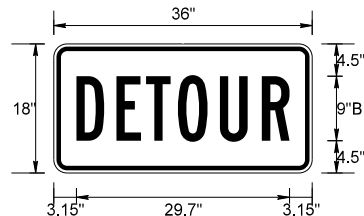


M4-8-36
Legend: black (non-refl)
Background: orange

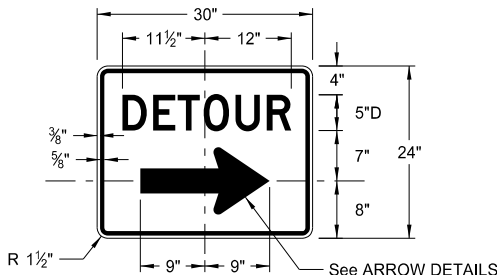


M4-9(L or R)-30 & M4-9-30
Legend: black (non-refl)
Background: orange

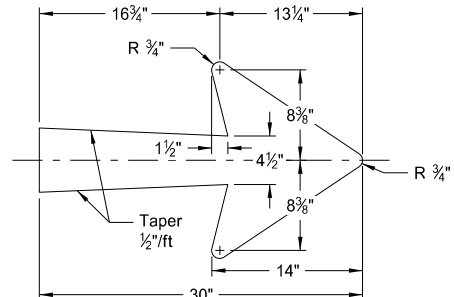


E5-1-48

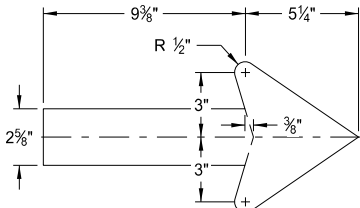


G20-50a-72
G20-52a-72



M4-9(L or R)-30
Right or Left



M4-9(L or R)-30
Advanced Right or Left








M4-9-30
Straight

ARROW DETAILS

- NOTES:
- (A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17 10-03-19	Added sign & background color New Design Engineer PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/03/19 and the original document is stored at the
North Dakota Department
of Transportation




NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17 10-03-19	Revised sign number New Design Engineer PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683 ,
on 10/03/19 and the original document is stored at the
North Dakota Department
of Transportation


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

D-704-11

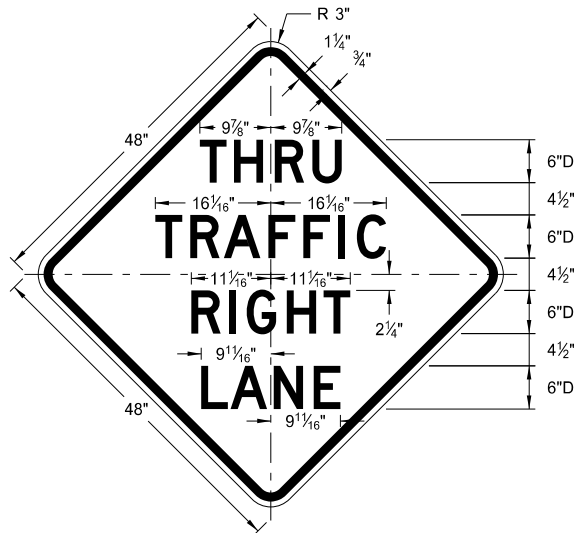


W5-8-48

Legend: black (non-refl)
Background: orange

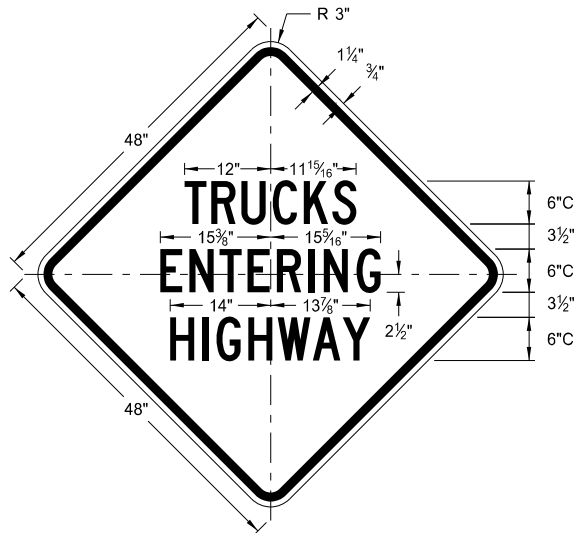


W8-53-48

Legend: black (non-refl)
Background: orange

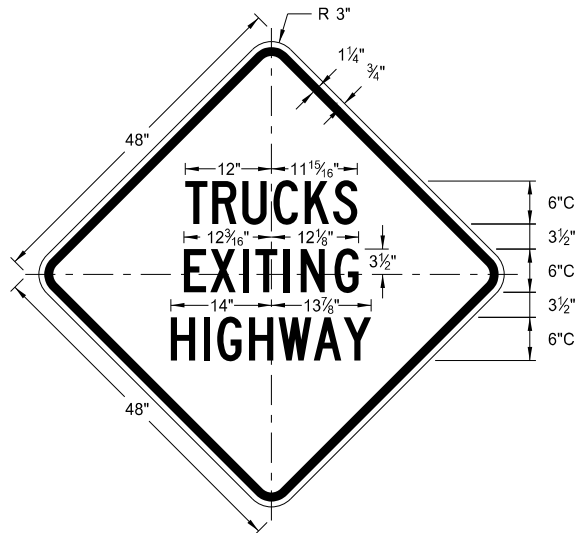


W8-56-48

Legend: black (non-refl)
Background: orange

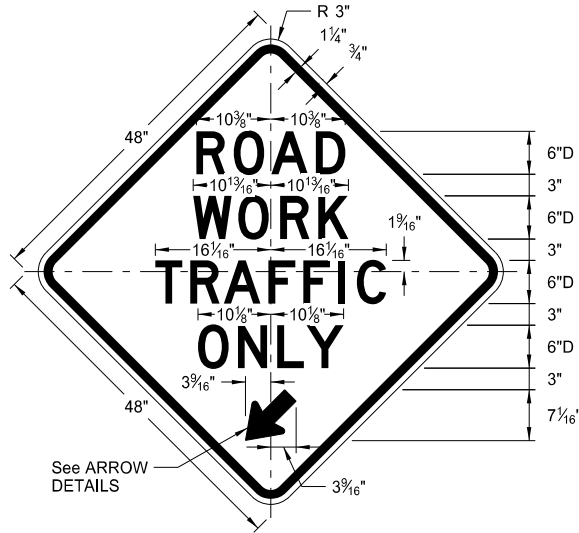


W5-9-48

Legend: black (non-refl)
Background: orange

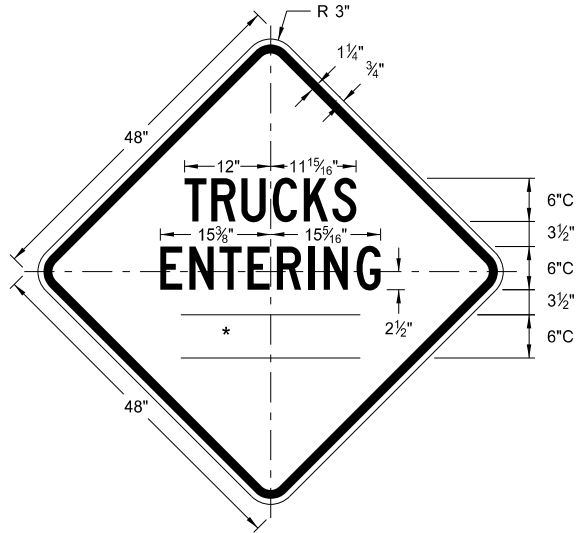


W8-54-48

Legend: black (non-refl)
Background: orange

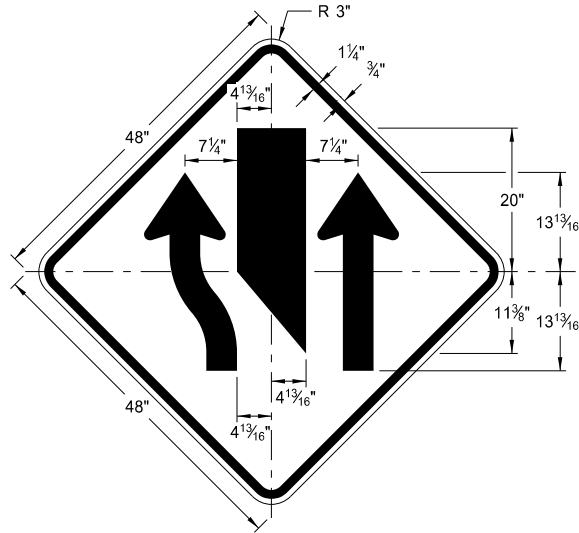


W9-3a-48

Legend: black (non-refl)
Background: orange

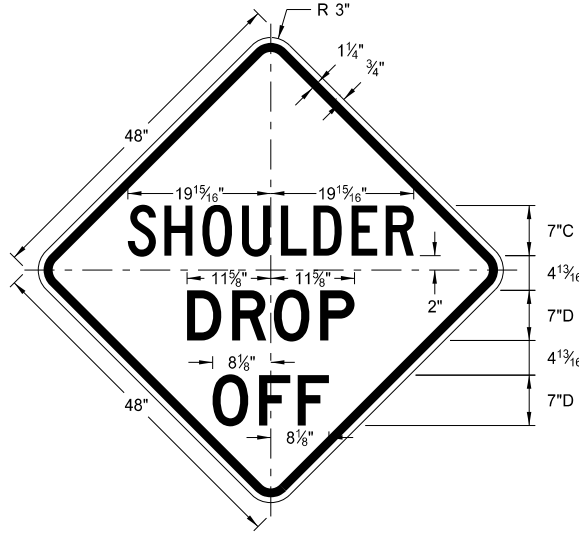

W8-9a-48

Legend: black (non-refl)
Background: orange


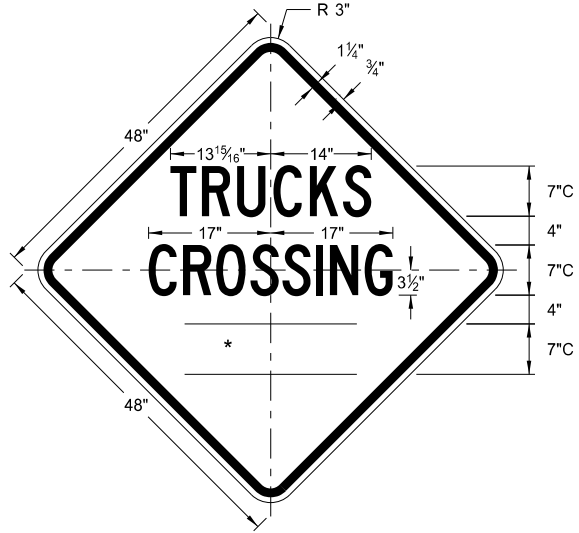


W8-55-48

Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES

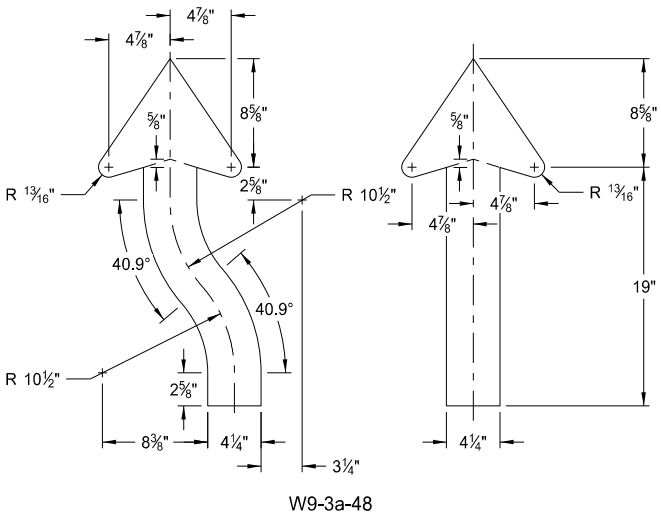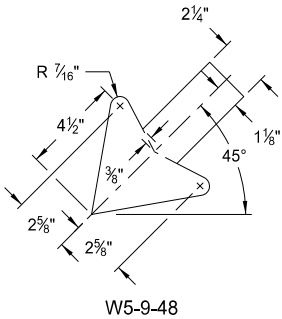


ARROW DETAILS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Updated sign number
5-31-18	Revised sign and arrow details
10-03-19	New Design Engineer PE Stamp


This document was originally
issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/03/19 and the original
document is stored at the
North Dakota Department
of Transportation

SHOULDER CLOSURE TAPERS


D-704-12

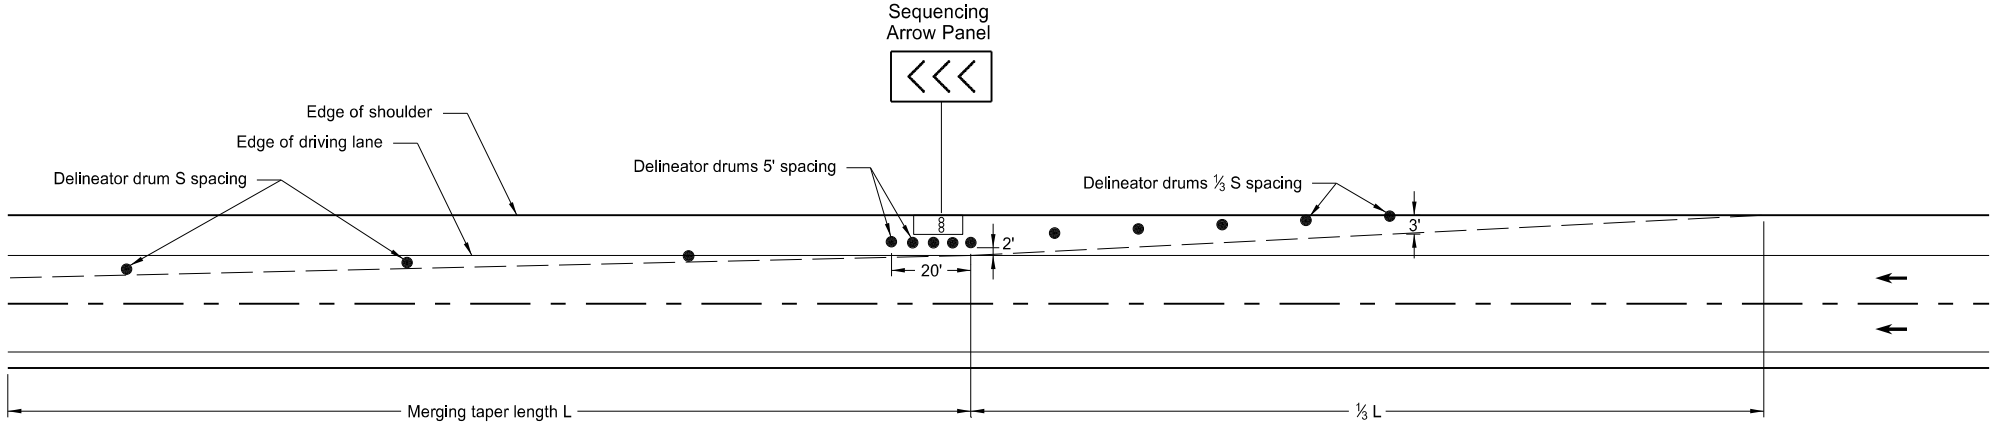

SHOULDER CLOSURE WITH LANE CLOSURE
(when shoulder is 8' or wider)

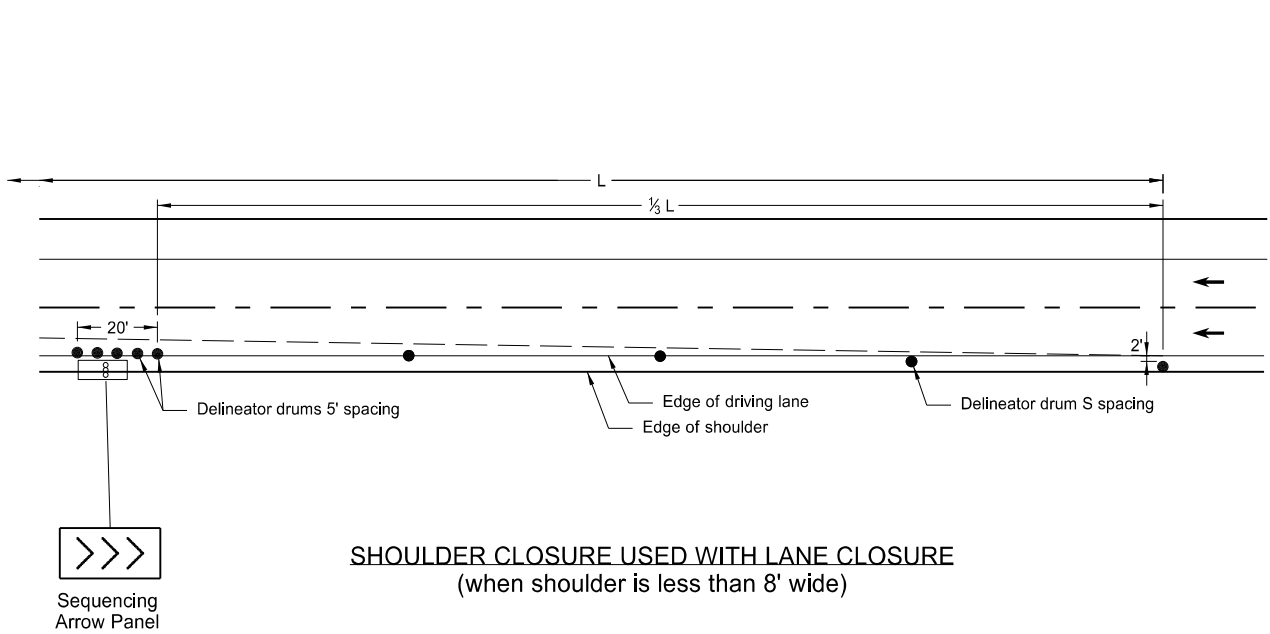

SHOULDER CLOSURE USED WITH LANE CLOSURE
(when shoulder is less than 8' wide)

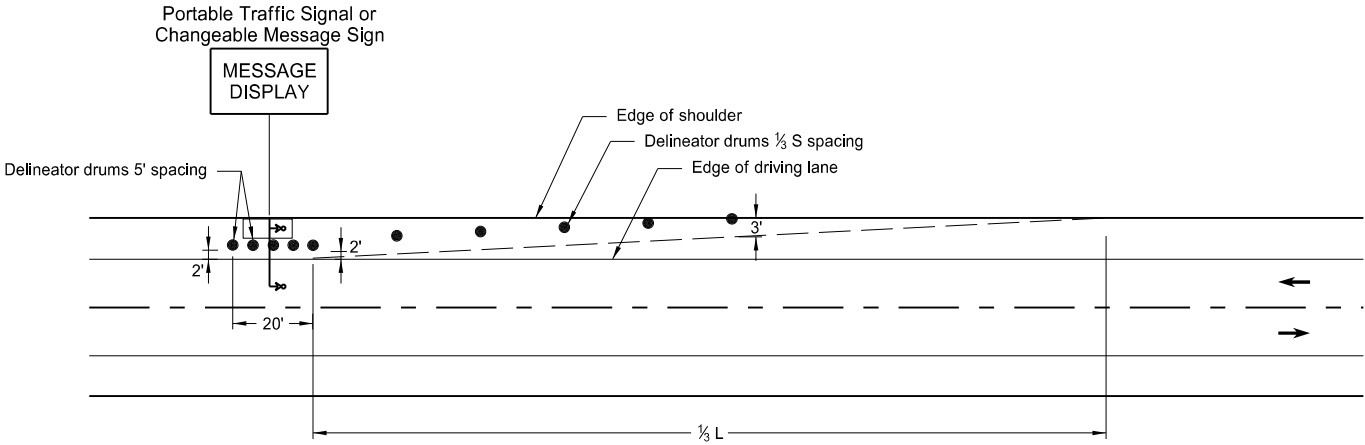

PORTABLE TRAFFIC SIGNAL OR CHANGEABLE MESSAGE SIGN ON SHOULDER

KEY			
●	Delineator Drum	∞	Sequencing Arrow Panel
•	Message Display	LT	Portable Traffic Signal


Notes:

- S = Posted Speed Limit in mph
W = Width of offset in feet
L = Taper length in feet
L = $WS^2/60$ (40mph or less)
L = WS (45mph or more)
- If a shoulder taper is used, use a length of approximately 1/3L. If a shoulder is used as a travel lane, use a normal merging or shifting taper.
- When paved shoulders of 8 foot width or more are closed, use channelizing devices to close shoulder in advance, to delineate beginning of work space, and to direct vehicular traffic to remain within the traveled way.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-25-19	Added L dimension to detail


This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/25/19 and the original document is stored at the North Dakota Department of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

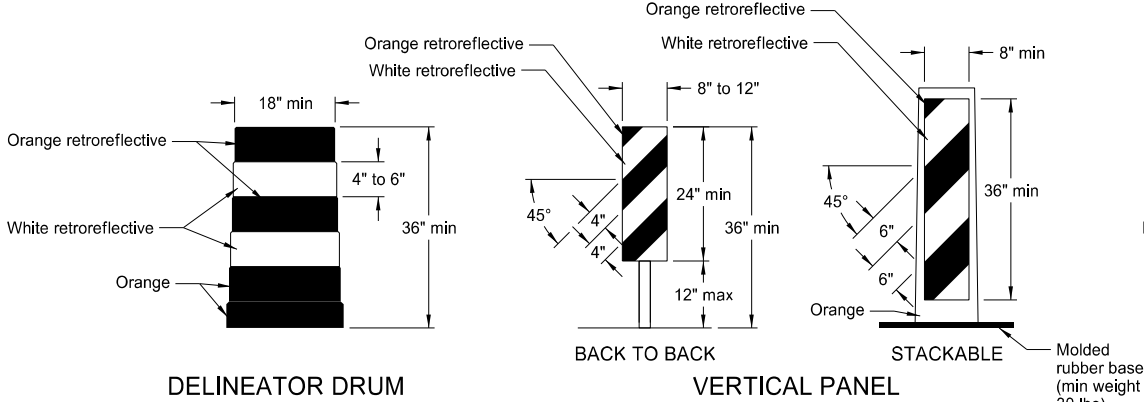


Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectORIZED spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.


Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

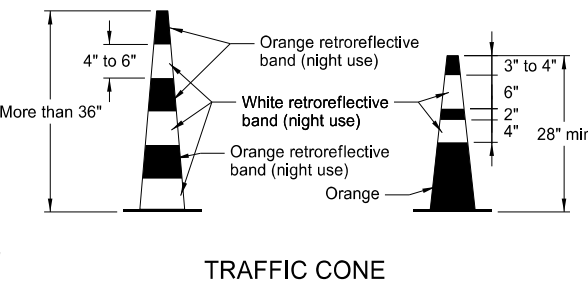


Provide retroreflectORIZATION of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectORIZED space between the orange and white stripes.

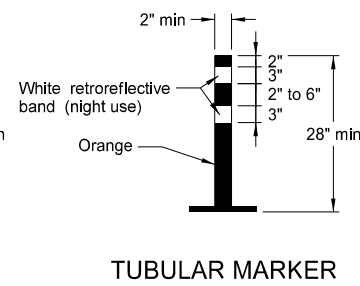

Provide retroreflectORIZATION of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

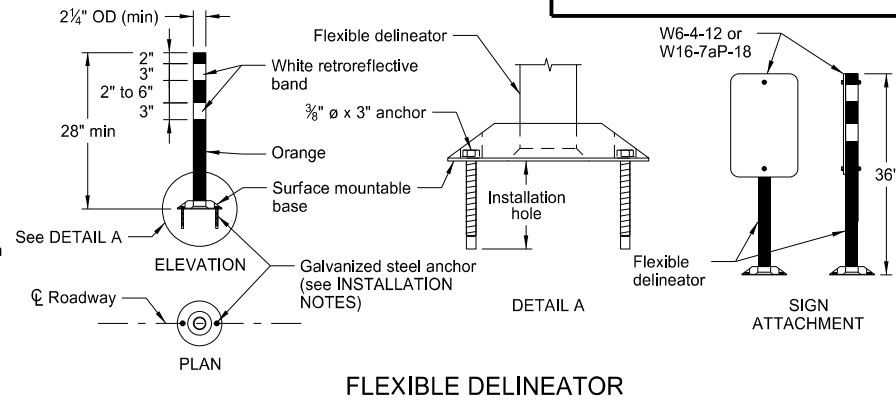


- INSTALLATION NOTES:
1. Drill installation holes to diameter and depth required by manufacturer's specifications.
 2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
 3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

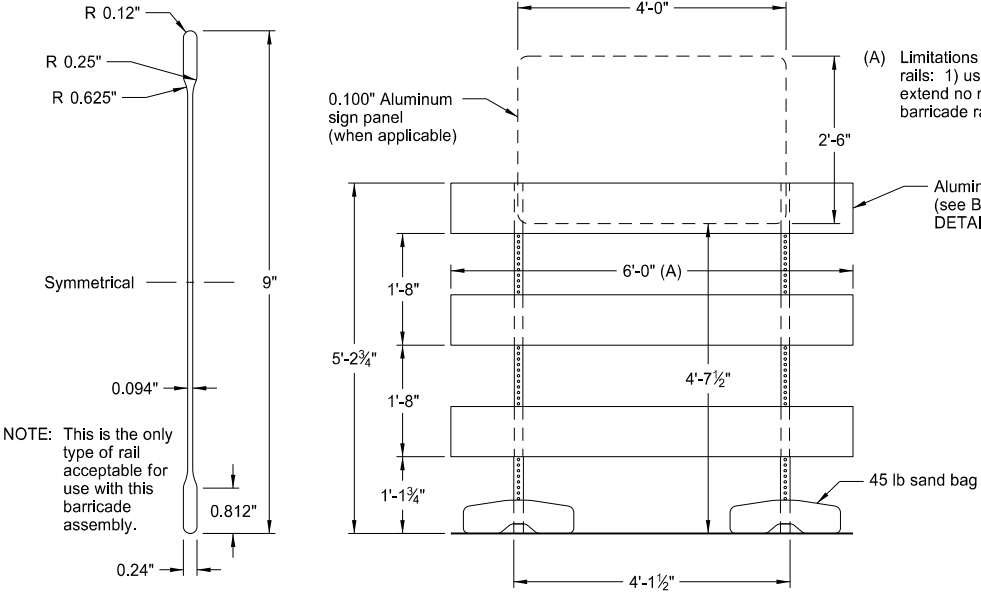

BARRICADE BLADE DETAIL


BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".

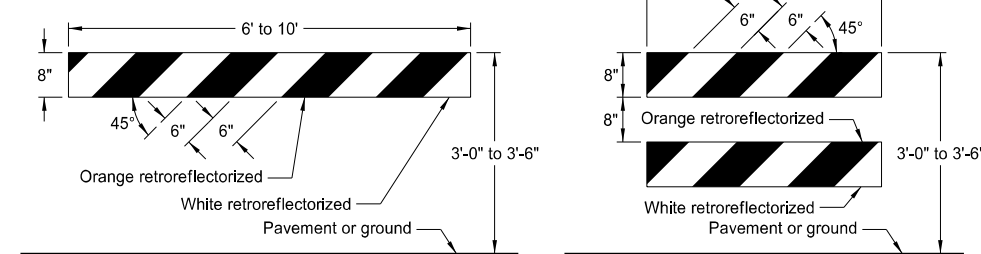


TYPE I BARRICADE


TYPE II BARRICADE
BARRICADE RAIL DETAILS

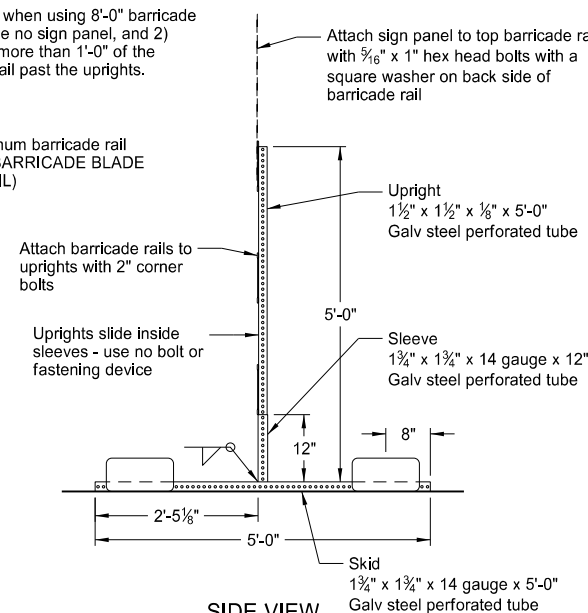

SIDE VIEW

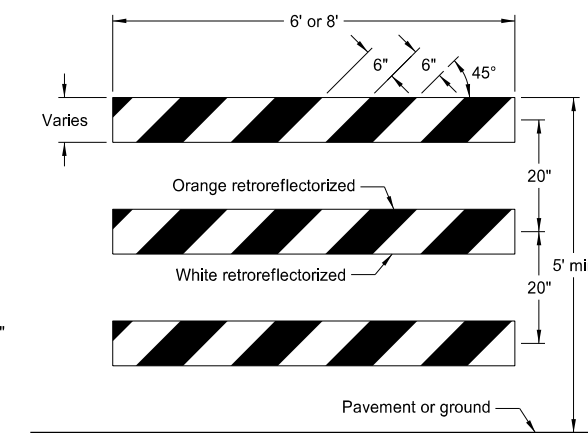


TYPE III BARRICADE

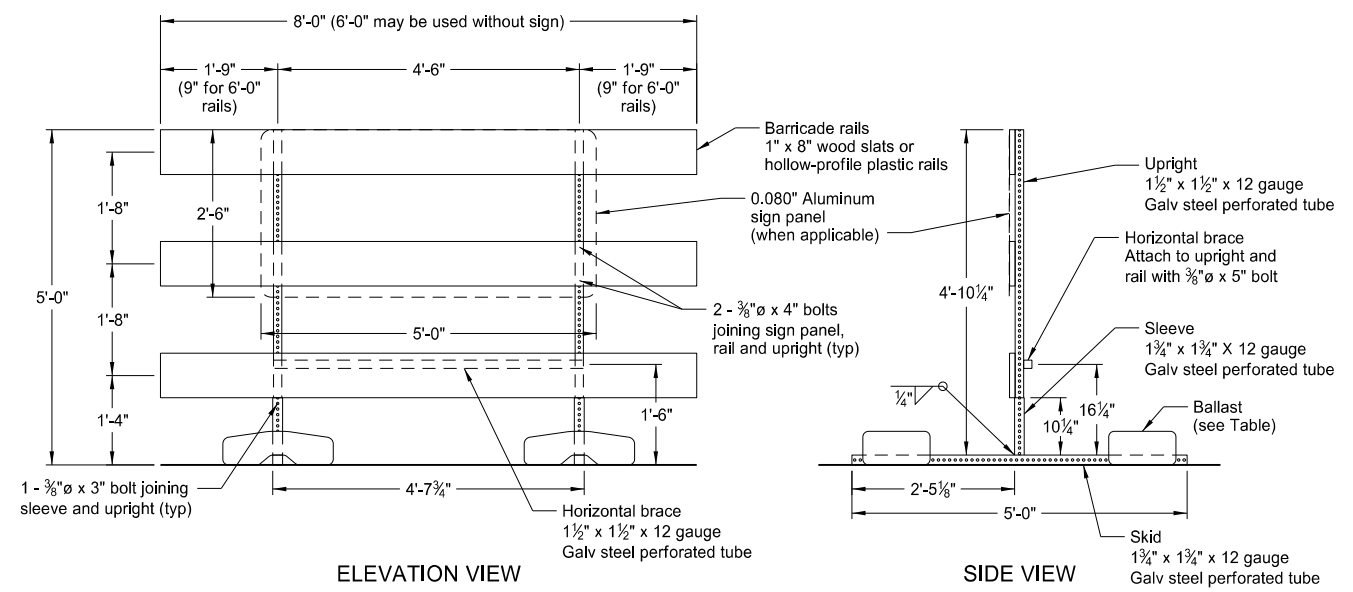

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

SIDE VIEW

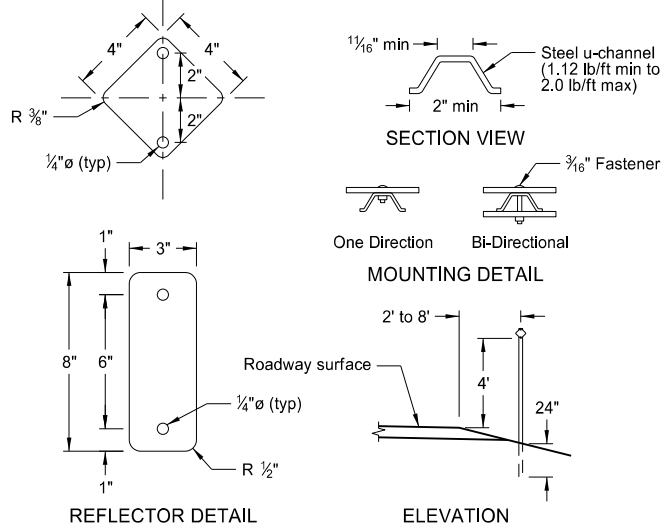

REFLECTOR DETAIL

ELEVATION

DELINEATORS

MINIMUM BALLAST (For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17 11-01-19	Updated to active voice Revised details for Flexible Delineator


This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 11/1/19 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

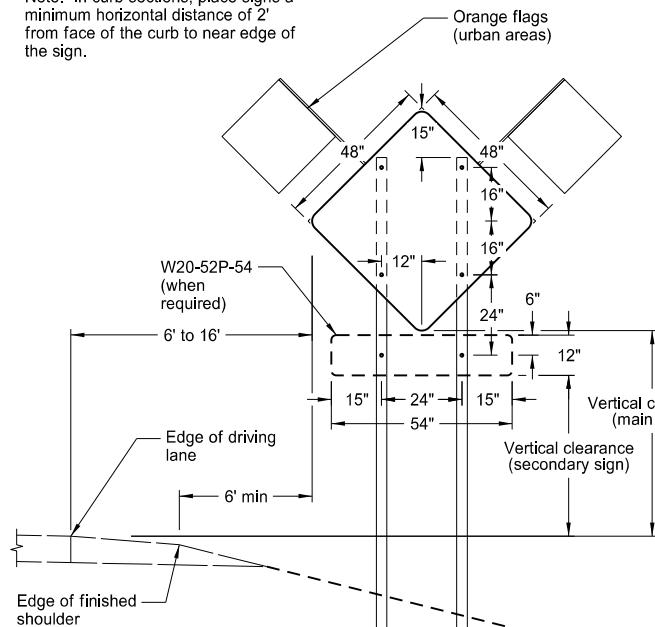


TYPICAL SECTION
(48" x 48" diamond warning sign shown)

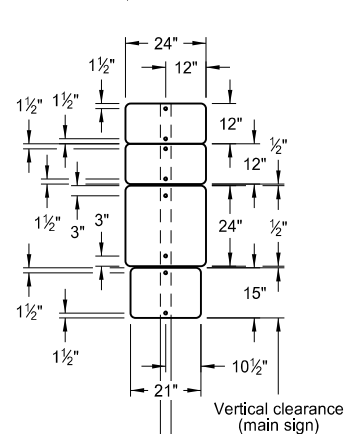


24" x 24"
ROUTE MARKER
ASSEMBLY

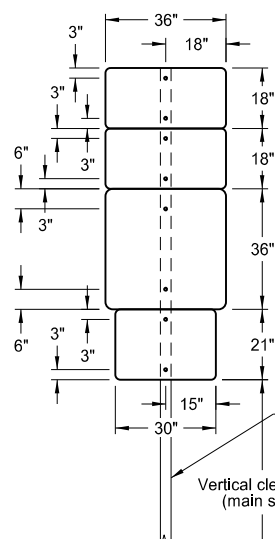


36" x 36"
ROUTE MARKER
ASSEMBLY

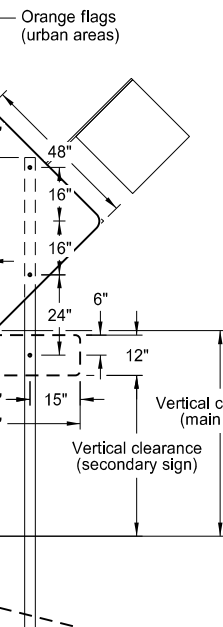


18" x 18"
DIAMOND SIGN

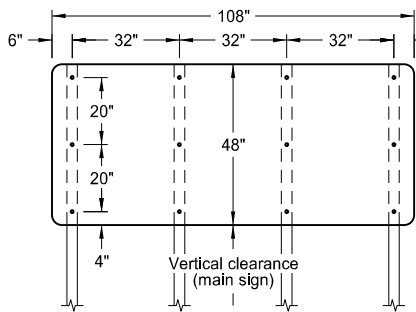


108" x 48" SIGN

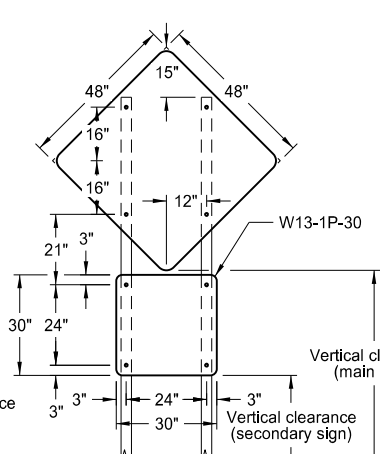


48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)

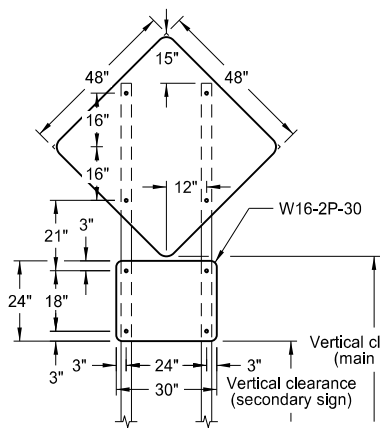


48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)

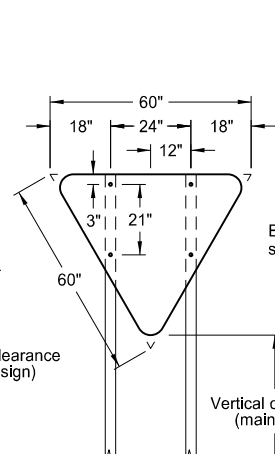


R1-2-60 - YIELD SIGN

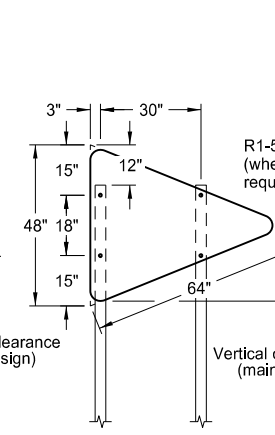


W14-3-64 - PENNANT SIGN




72" x 36" SIGN

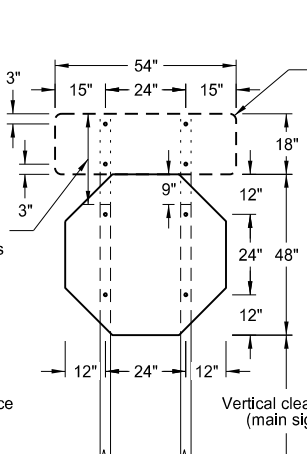


R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)

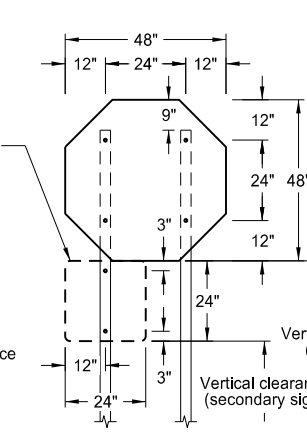


R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)




72" x 24" SIGN

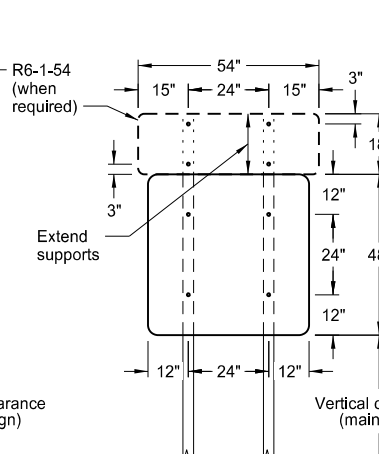


48" x 48" SIGN
(with R6-1-54 sign as required)

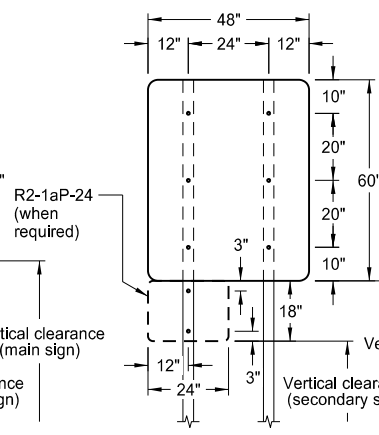


48" x 48" SIGN
(with R2-1aP-24 sign as required)

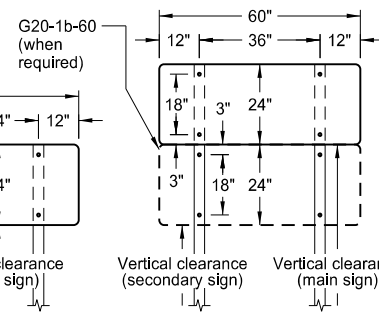


60" x 24" SIGN

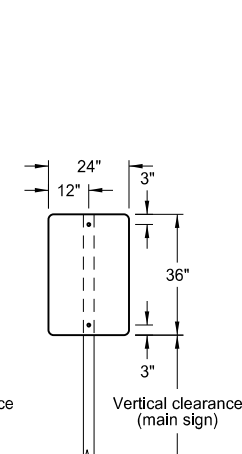


24" x 36" SIGN

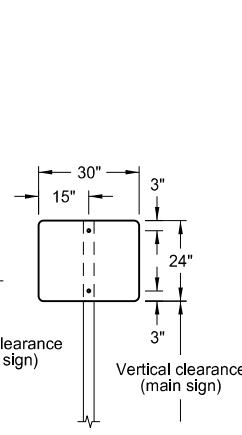


30" x 24" SIGN



48" x 24" SIGN

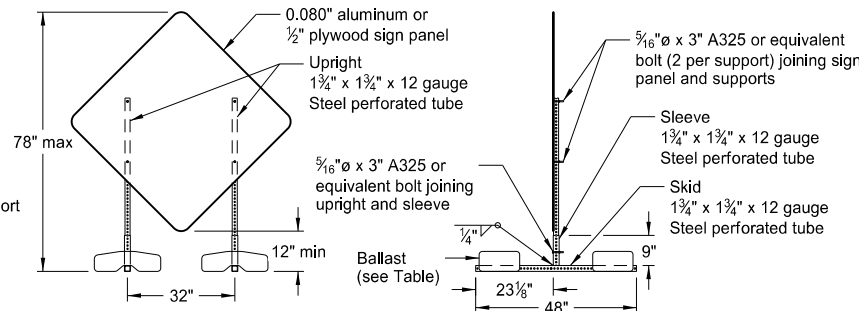

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

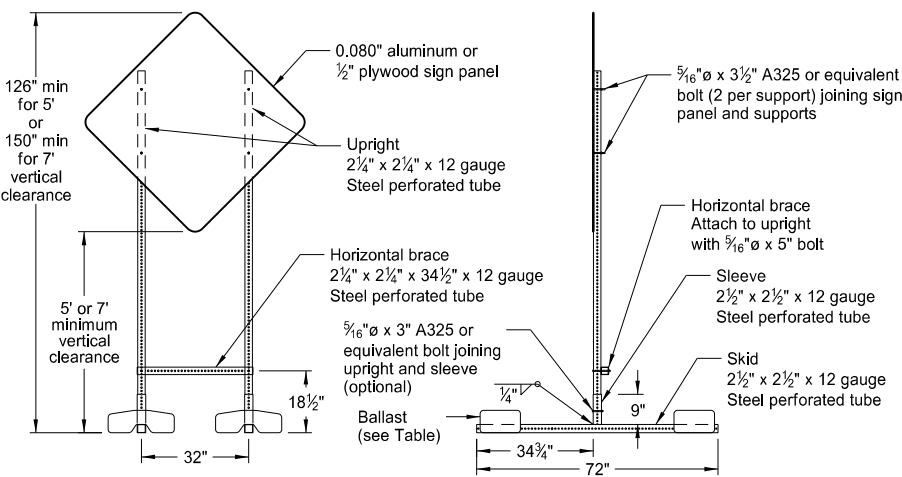

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.
2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅝" bolts.
3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)
4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION). In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail

This document was originally issued and sealed by

Kirk J Hoff,
Registration Number
PE-4683,
on 11/1/19 and the original document is stored at the North Dakota Department of Transportation

SIGN LAYOUT FOR ONE LANE CLOSURE

D-704-34

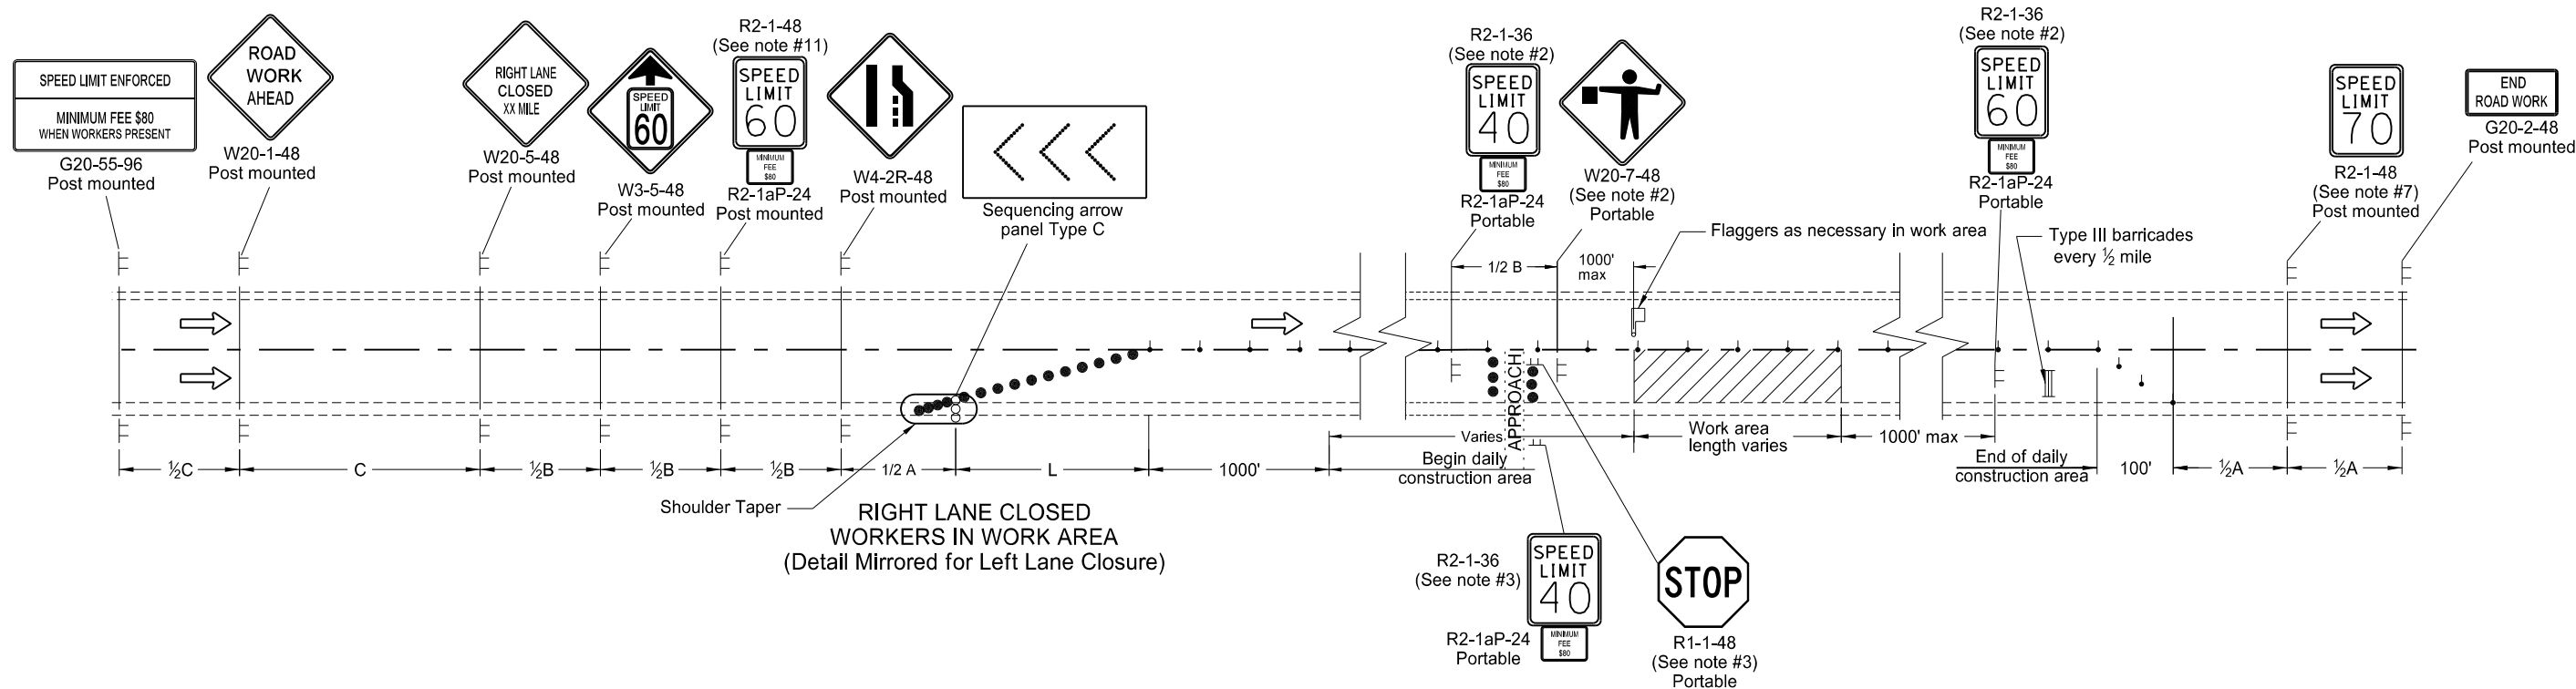

- Notes:
1. Install advance signs for flagging when flaggers are flagging.
 2. Move the advanced flagger sign and speed limit signs as the work area moves through the construction zone. When the work area is not visible from the flagger, move the flagger station so the work area is visible. Place the 40 mph speed limit sign at 1/2 A in advance of the flagger sign and move the 60 mph speed limit sign. Cover or remove the 40 mph speed limit and the Minimum Fee \$80 signs upon completion of the work day or when workers are not present. Determine the exact speed limit in the field, dependent on location and conditions.
 3. Approaches: When the work area encompasses an approach, install a 40 mph speed limit sign to control the approach. Cover the existing stop sign and install a new portable stop sign when the approach is on the side of the lane closure. Remove the approach speed limit sign once the main line 40 mph speed zone is moved past the approach.
 4. Variables:
S=Numerical value of speed limit or 85th percentile
W=The width of taper.
L=Minimum length of taper, or SxW for freeways, expressways, and all other roads with speeds of 45 mph or greater, or (WxSxS)/60 for urban, residential, and other streets with speeds of 40 mph or less.
 5. Space delineator drums for tapering traffic at the dimension "S". Space tubular markers used for tangents at 2 times dimension "S".
 6. Place sequencing arrow panels at the beginning of the taper when possible. Where shoulder width does not provide sufficient room, move the panel closer to the work area and place on the roadway surface.
Use Type A on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
Use Type B on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
Use Type C on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
 7. Re-establish the speed limit. Determine the exact speed limit in the field, dependent on location and conditions.
 8. Cover existing speed limit signs within a reduced speed zone.
 9. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the diamond sign, and at such a distance above the edge that the flag does not touch the sign when limp.
 10. Determine the reduced speed limit dependent on the in place speed limit before construction. Where speed limits are to be reduced more than 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
 11. As an option use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
 12. Sign G20-55-96 is not required if this standard is part of other traffic control layouts or the work is less than 15 days.

KEY	
	Type I barricade
	Type II barricade
	Type III barricade
	Sign
	Delineator drum
	Work area
	Flagger
	Sequencing arrow panel
	Tubular markers

Longitudinal Buffer Space	
Speed (mph)*	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

*Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.


ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-26-2012	
REVISIONS	
DATE	CHANGE
3-15-16	Removed Do Not Pass signs and updated notes.
8-17-17	Updated notes & sign nos. & moved Speed Limit signs.
11-01-19	Removed shldr taper details & revised tubular mkr symbol

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 11/1/19 and the original document is stored at the
North Dakota Department
of Transportation

PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

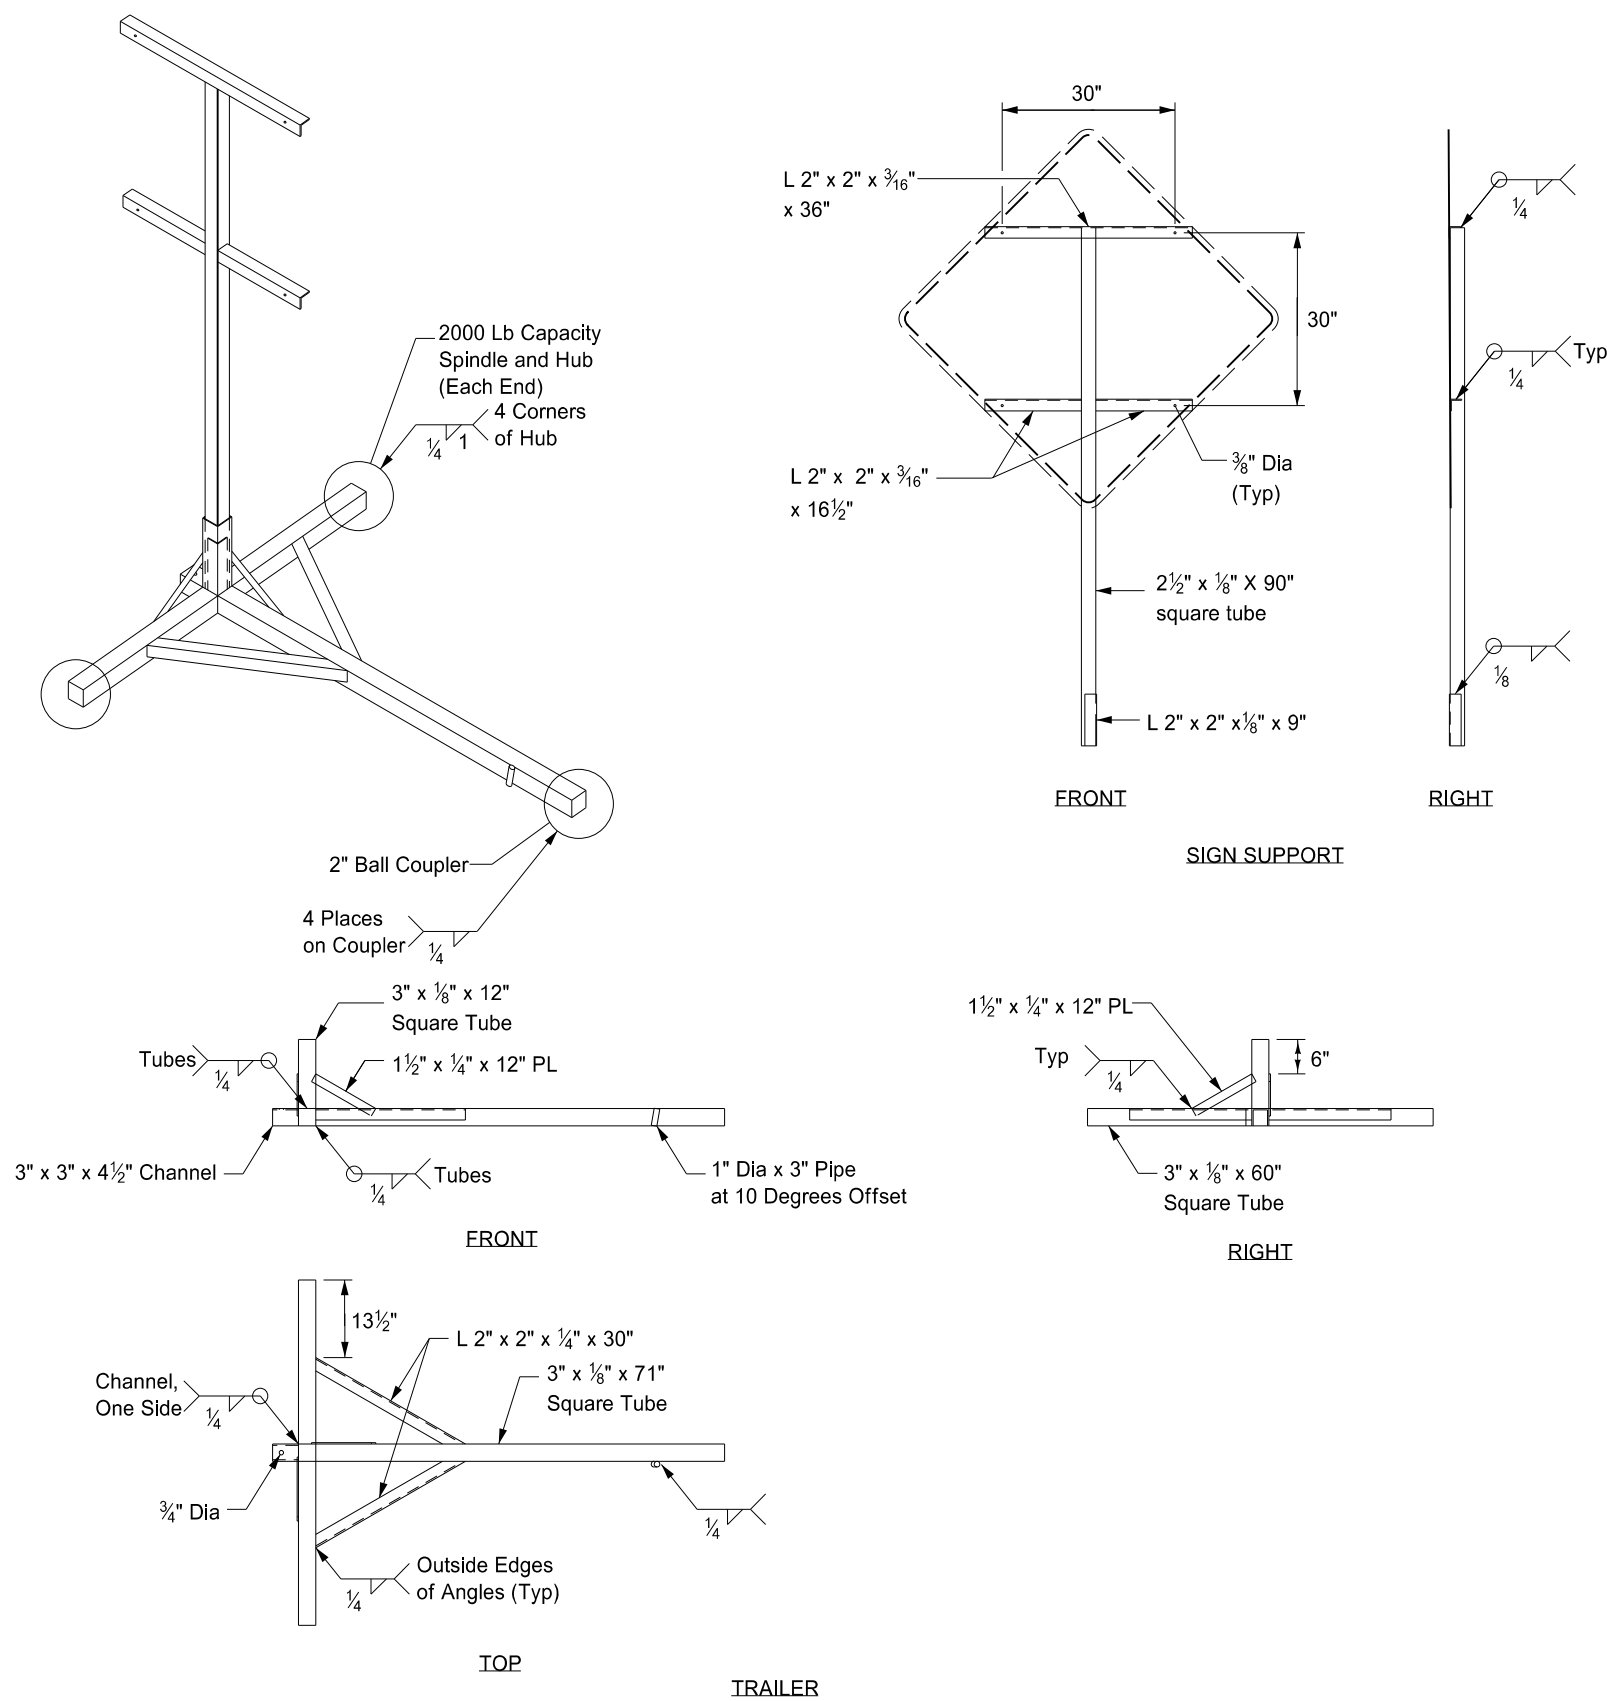


Notes:

- ① The maximum weight of the assembly is 250 pounds.
- ② Use a 14" wheel and tire.
- ③ Automotive and equipment axle assemblies may not be used for trailer-mounted sign supports.
- ④ Other NCHRP 350 crash tested assemblies are acceptable.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
Roger Weigel
Registration Number
PE- 2930 ,
on 11/23/10 and the original document is stored at the
North Dakota Department
of Transportation


EROSION AND SILTATION CONTROLS
MEDIAN OR DITCH INLET PROTECTION

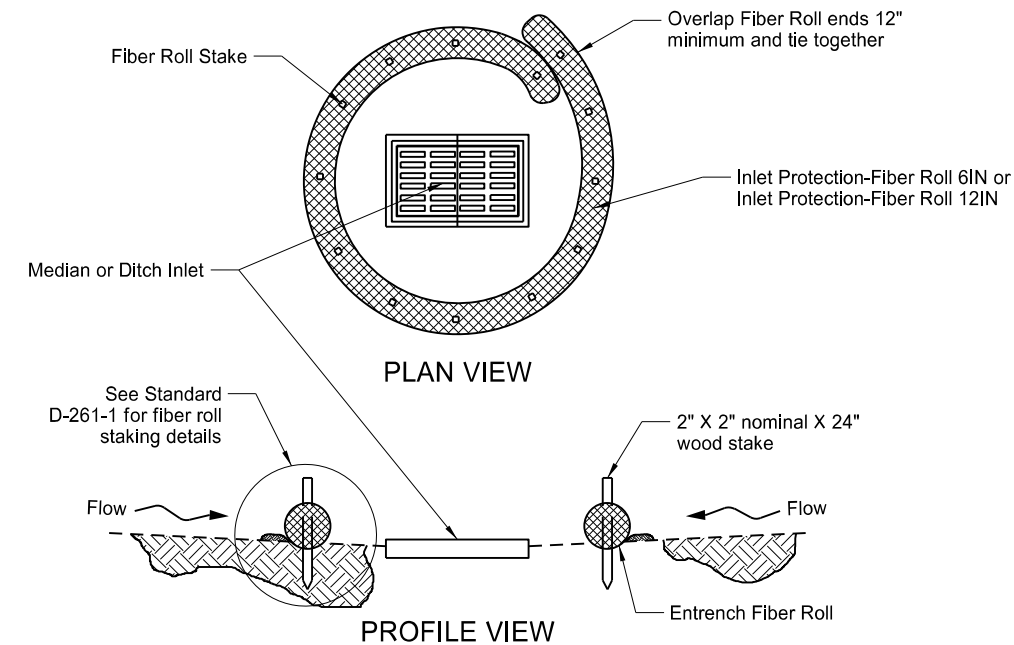


FIBER ROLL PROTECTION
(MEDIAN OR DITCH INLET)

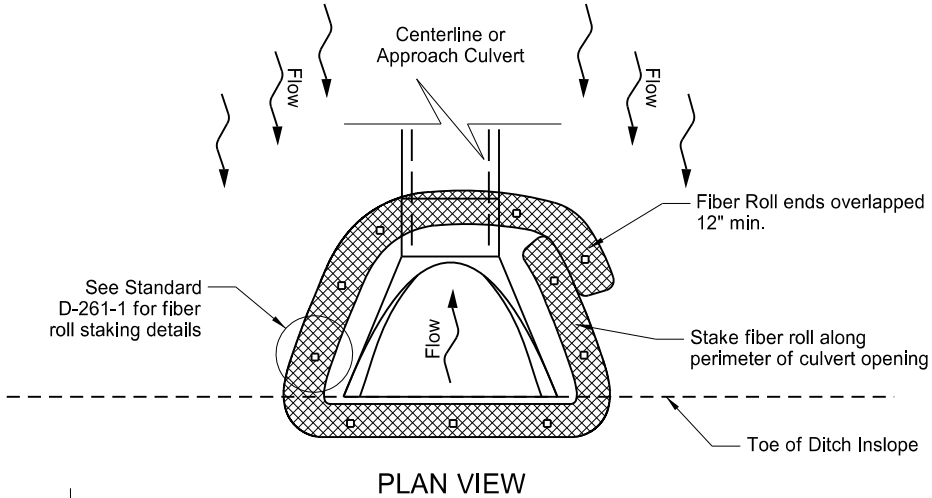


FIBER ROLL PROTECTION
(INLET OF CULVERT)

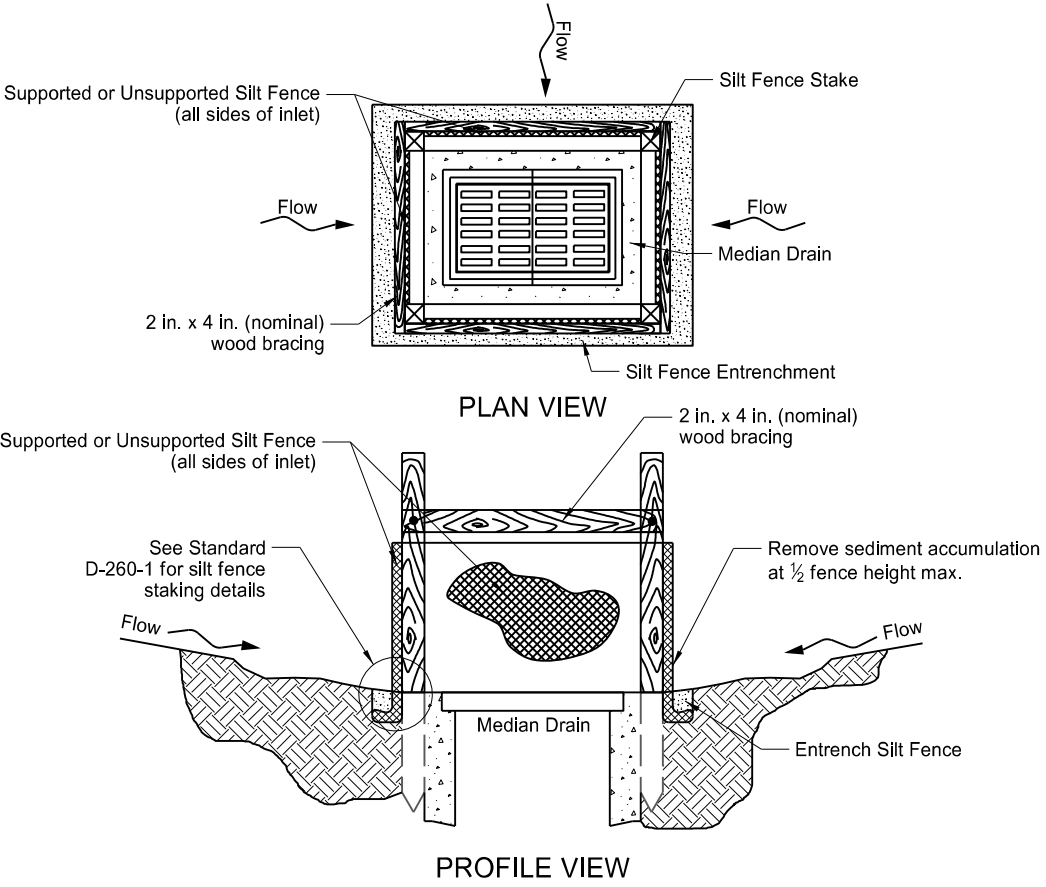


SILT FENCE PROTECTION
(MEDIAN OR DITCH INLET)

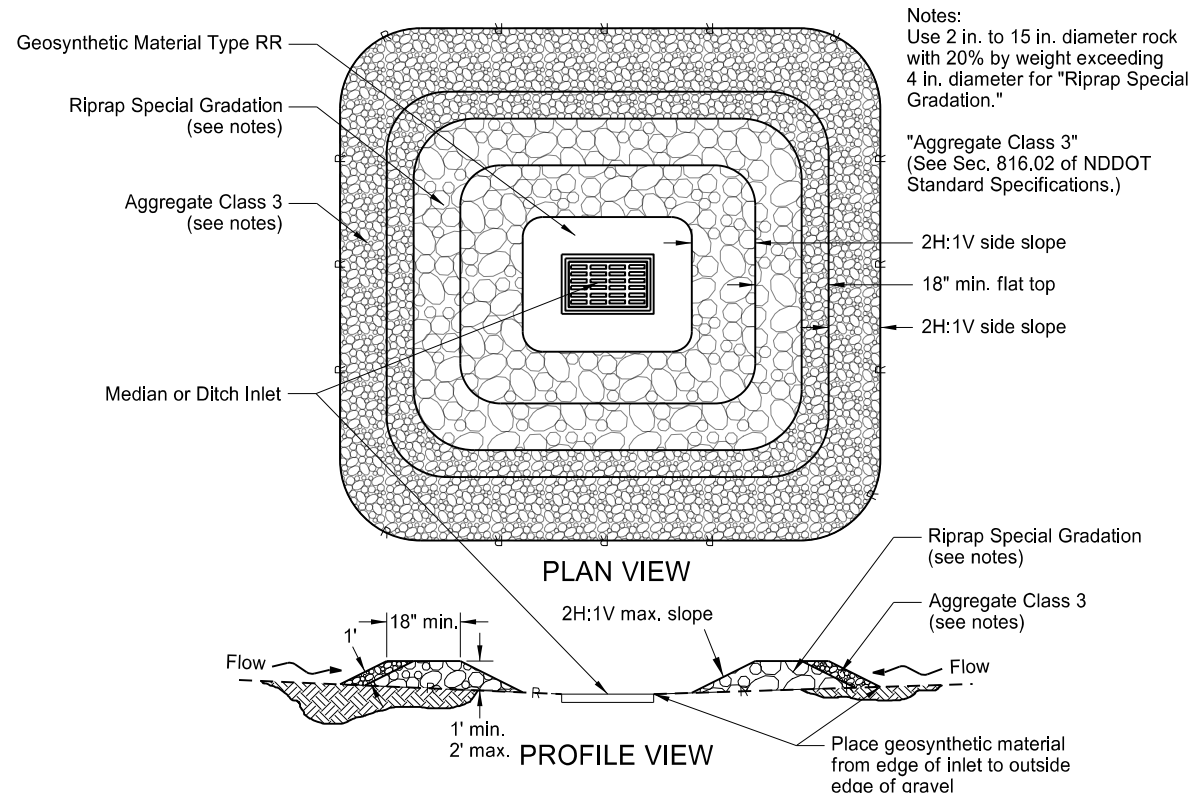

GRAVEL INLET PROTECTION
(MEDIAN OR DITCH INLET)

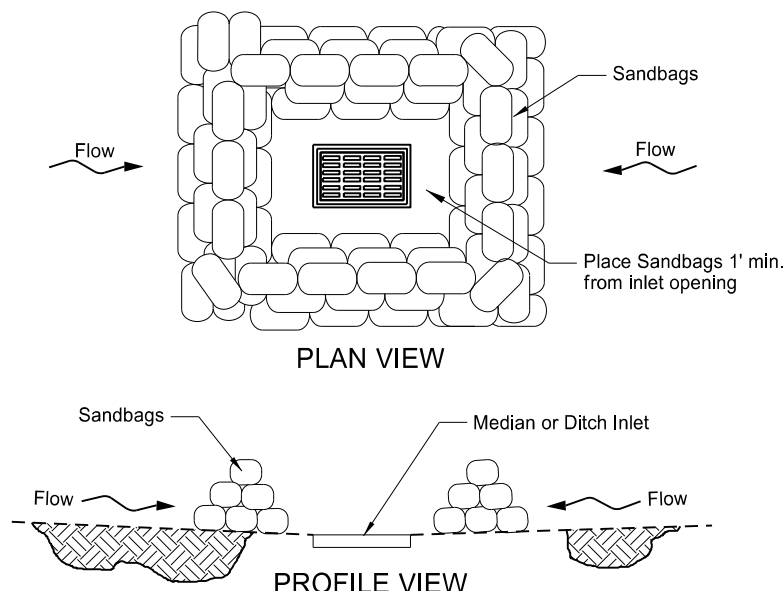

SANDBAG PROTECTION
(LOW POINT)

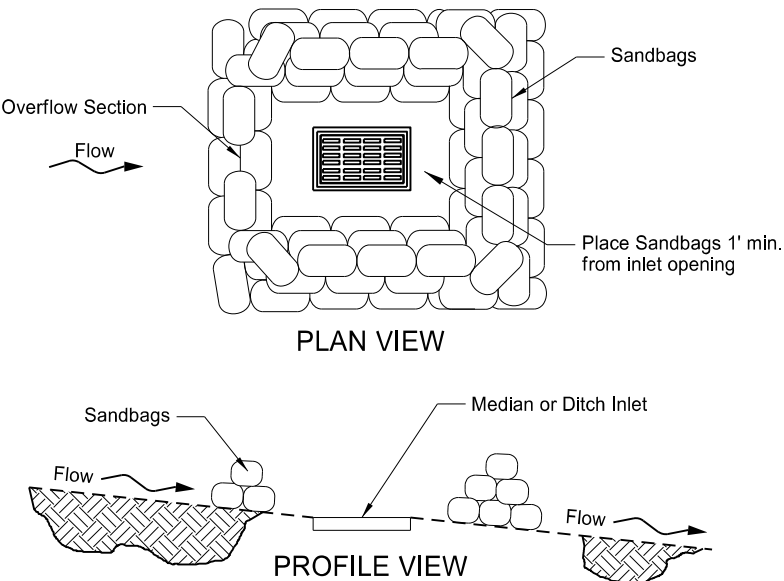


SANDBAG PROTECTION
(ON SLOPE)


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Updated reference to standard drawing number for fiber roll staking details.
10-01-14	Updated reference to standard drawing number for silt fence.
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 8-27-19 and the original document is stored at the
North Dakota Department
of Transportation

FLARED END SECTION						
TERMINAL DIMENSIONS						
DIA	A	B	C	D	E	U
12	0'-4"	2'-0"	4'-0 ⁷ / ₈ "	6'-0 ⁷ / ₈ "	2'-0"	2"
15	0'-6"	2'-3"	3'-10"	6'-1"	2'-6"	2 ¹ / ₄ "
18	0'-9"	2'-3"	3'-10"	6'-1"	3'-0"	2 ¹ / ₂ "
21	0'-9"	3'-0"	3'-1"	6'-1"	3'-6"	2 ³ / ₄ "
24	0'-9 ¹ / ₂ "	3'-7 ¹ / ₂ "	2'-6"	6'-1 ¹ / ₂ "	4'-0"	3"
27	0'-10 ¹ / ₂ "	4'-0"	2'-1 ¹ / ₂ "	6'-1 ¹ / ₂ "	4'-6"	3 ¹ / ₂ "
30	1'-0"	4'-6"	1'-7 ³ / ₄ "	6'-1 ³ / ₄ "	5'-0"	3 ¹ / ₂ "
36	1'-3"	5'-3"	2'-9"	8'-0"	6'-0"	4"
42	1'-9"	5'-3"	2'-9"	8'-0"	6'-6"	4 ¹ / ₂ "
48	2'-0"	6'-0"	2'-0"	8'-0"	7'-0"	5"
54	2'-3"	5'-5"	2'-9 ¹ / ₂ "	8'-2 ¹ / ₄ "	7'-6"	5 ¹ / ₂ "
60	2'-11"	5'-0"	3'-3"	8'-3"	8'-0"	5"
66	2'-6"	6'-0"	2'-3"	8'-3"	8'-6"	5 ¹ / ₂ "
72	3'-0"	6'-6"	1'-9"	8'-3"	9'-0"	6"
78	3'-0"	7'-6"	1'-9"	9'-3"	9'-6"	6 ¹ / ₂ "
84	3'-0"	7'-6 ¹ / ₂ "	1'-9"	9'-3 ¹ / ₂ "	10'-0"	6 ¹ / ₂ "
90	3'-5"	7'-3 ¹ / ₂ "	2'-0"	9'-3 ¹ / ₄ "	11'-0"	6 ¹ / ₂ "




PERSPECTIVE




END VIEW

Standard Reinforcement for Class III pipe reinforced as per AASHTO M170

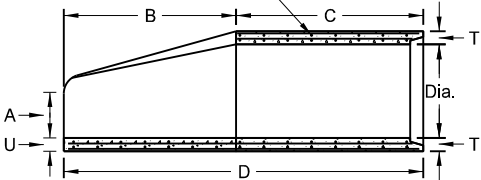

SIDE VIEW

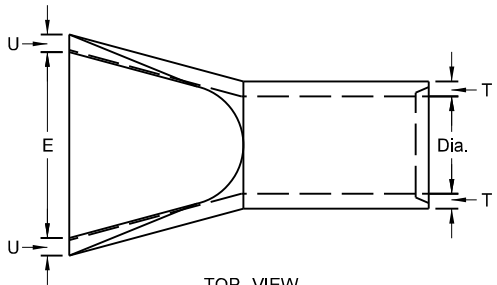

TOP VIEW


NOTES:

1. All reinforcing steel shall meet AASHTO M170 requirements.
2. All circular, longitudinal, and elliptical reinforcement shall be assembled and securely fastened in cage fashion so as to maintain reinforcement in exact shape and correct positions within the forms.
3. Laying length of pipe: 12" to 66" (incl.) = not less than 4 feet
66" to 108" (incl.) = not less than 6 feet
4. Joints shall be sealed with rubber gaskets or with sealer approved by the engineer whenever pipe are specified for storm drain or sanitary sewers.
5. For Class IV and Class V reinforced concrete pipe and end section sizes which do not have reinforcement specified by AASHTO M170, shop drawings and design calculations shall be prepared and sealed by a Professional Engineer and submitted for the Engineer's review.


REINFORCED CONCRETE PIPE - FLARED END SECTION

Reinforcement to be equivalent to Class III RCP


TRAVERSABLE END SECTION						
DIA	B	C	D	E	R	S
15"	4'	9"	4'-9"	1'-7 ¹ / ₂ "	3"	6
18"	5'-9"	9"	6'-6"	1'-11"	3"	6
24"	6'	1'	7'	2'-6"	3"	4
30"	7'-6"	1'	8'-6"	3'-1"	3 ¹ / ₂ "	4
36"	7'-3"	15"	8'-6"	3'-8"	3"	4

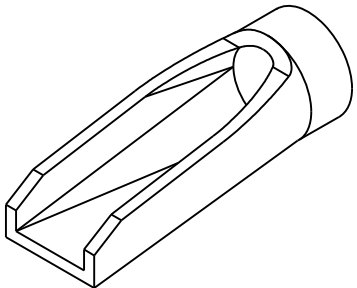


PERSPECTIVE



END VIEW

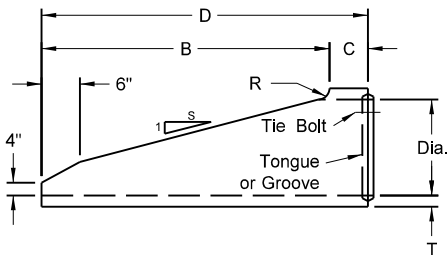

SIDE VIEW

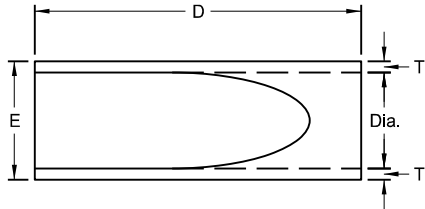

TOP VIEW


NOTES (Traversable End Section):

1. Manufactured in accordance with applicable portions of ASTM C76/AASHTO M170.
2. Reinforcement per Class III RCP with double reinforcement in the upper 120° of the full barrel portion.

REINFORCED CONCRETE PIPE - TRAVERSABLE END SECTION


Reinforcement to be equivalent to Class III RCP

All Classifications of Round Concrete Pipe						
Internal Dia. of pipe in Inches	Cross-Sectional Water Area	Weight per Lin. Foot of pipe Std. Wall	Joint J Groove End Min./Max.	Joint K Tongue Min.	Minimum Wall Thickness (T)	
Dia	Sq. ft.	Lbs.	In.	In.	In.	
12	0.79	92	1 ⁵ / ₈ -2 ³ / ₈	3/4	2	
15	1.23	127	1 ³ / ₄ -2 ¹ / ₄	7/8	2 ¹ / ₄	
18	1.77	168	1 ¹ / ₂ -2 ¹ / ₂	1	2 ¹ / ₂	
21	2.40	214	1 ¹ / ₂ -3 ¹ / ₈	1 ¹ / ₈	2 ³ / ₄	
24	3.14	265	2 ³ / ₄ -3 ¹ / ₄	1 ¹ / ₈	3	
27	3.98	322	2 ³ / ₄ -4	1 ¹ / ₄	3 ¹ / ₄	
30	4.91	384	3 ¹ / ₄ -4 ¹ / ₄	1 ¹ / ₄	3 ¹ / ₂	
33	5.94	452	3 ¹ / ₄ -4 ¹ / ₄	1 ¹ / ₂	3 ³ / ₄	
36	7.07	524	3 ¹ / ₄ -4 ¹ / ₄	1 ¹ / ₂	4	
42	9.62	685	3 ³ / ₄ -4 ³ / ₄	1 ³ / ₄	4 ¹ / ₂	
48	12.57	685	3 ³ / ₄ -4 ³ / ₄	1 ³ / ₄	5	
54	15.90	1070	4 ¹ / ₂ -5 ¹ / ₄	2	5 ¹ / ₂	
60	19.63	1296	4 ¹ / ₂ -5 ¹ / ₂	2 ¹ / ₄	6	
66	23.76	1542	5-6	2 ³ / ₈	6 ¹ / ₂	
72	28.27	1810	5 ⁵ / ₈ -6 ³ / ₄	2 ³ / ₈	7	
78	33.18	2098	6 ¹ / ₄ -7 ¹ / ₄	2 ³ / ₈	7 ¹ / ₂	
84	38.48	2410	5 ⁵ / ₈ -7 ³ / ₄	3 ³ / ₈	8	
90	44.18	2793	6 ³ / ₄ -8 ¹ / ₂	3 ³ / ₈	8 ¹ / ₂	
96	50.27	3092	7-8 ¹ / ₄	3 ¹ / ₂	9	
102	56.75	3466	7-8 ¹ / ₄	3 ¹ / ₂	9 ¹ / ₂	
108	63.62	3864	7 ¹ / ₄ -8 ¹ / ₂	3 ³ / ₄	10	




END VIEW

CIRCULAR PIPE

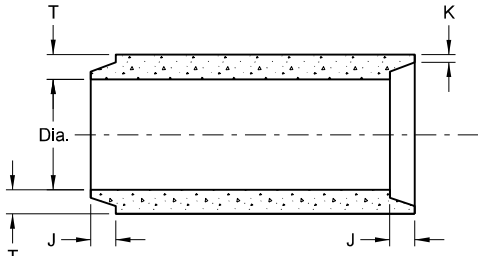


TONGUE & GROOVE JOINT

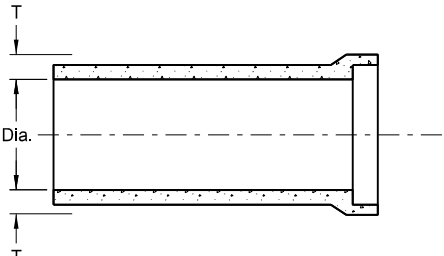

BELL & SPIGOT JOINT

JOINTS FOR REINFORCED CONCRETE PIPE

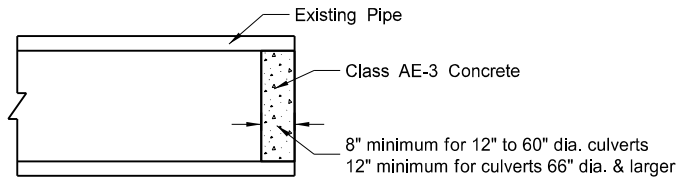

CONCRETE PIPE PLUG

SEE STANDARD DRAWING D-714-22 FOR DETAILS OF CONCRETE PIPE TIES (TIE BOLTS).

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
05-12-14	
REVISIONS	
DATE	CHANGE
01-21-15	Revised Note 5
11-21-16	Revised End Section Dimensions
09-18-19	Updated Perspective View Details

This document was originally issued and sealed by
Jon Ketterling
Registration Number
PE- 4684,
on 9/18/19 and the original document is stored at the
North Dakota Department
of Transportation

TRANSVERSE MAINLINE PIPE INSTALLATION DETAIL
PIPES 4 FEET OR LESS BELOW TOP OF SUBGRADE

Pay Items

- 1) Pipe*
- 2) Geosynthetic Material Type G
- 3) Removal of Pipe (if required)


*Included in Pipe Pay Item

- 1) Pipe
- 2) Trench Excavation
- 3) Aggregate Base Course CI 3 or CI 5
- 4) Embankment


NOTES:

- 1) This drawing applies to new/replaced mainline and paved intersection roadway pipes only (including ramps). It does not include pipes in approaches.
- 2) Embankment may be either borrow Excavation or Common Excavation - Type A


EXCAVATION DETAIL

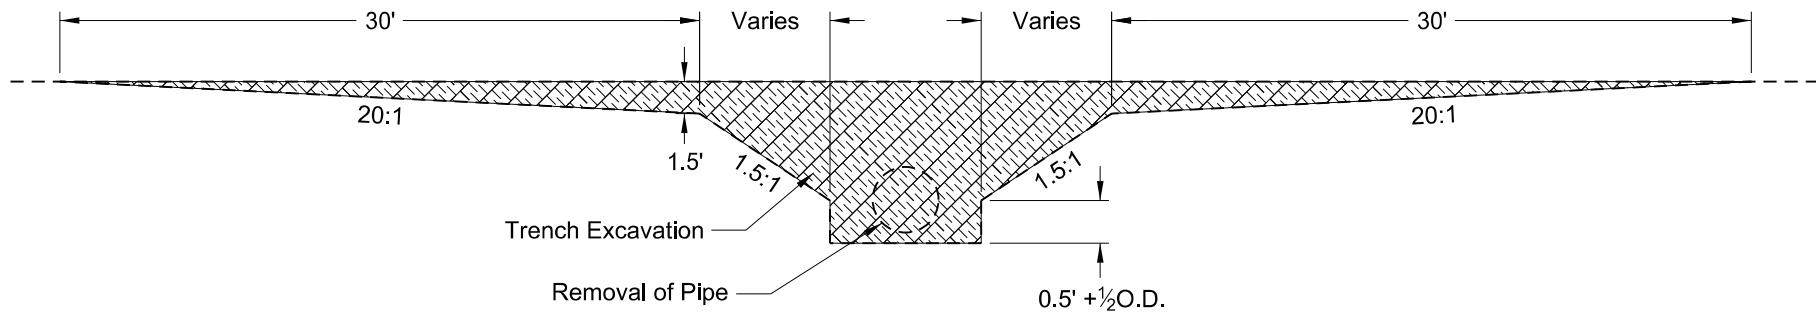

INSTALLATION DETAIL

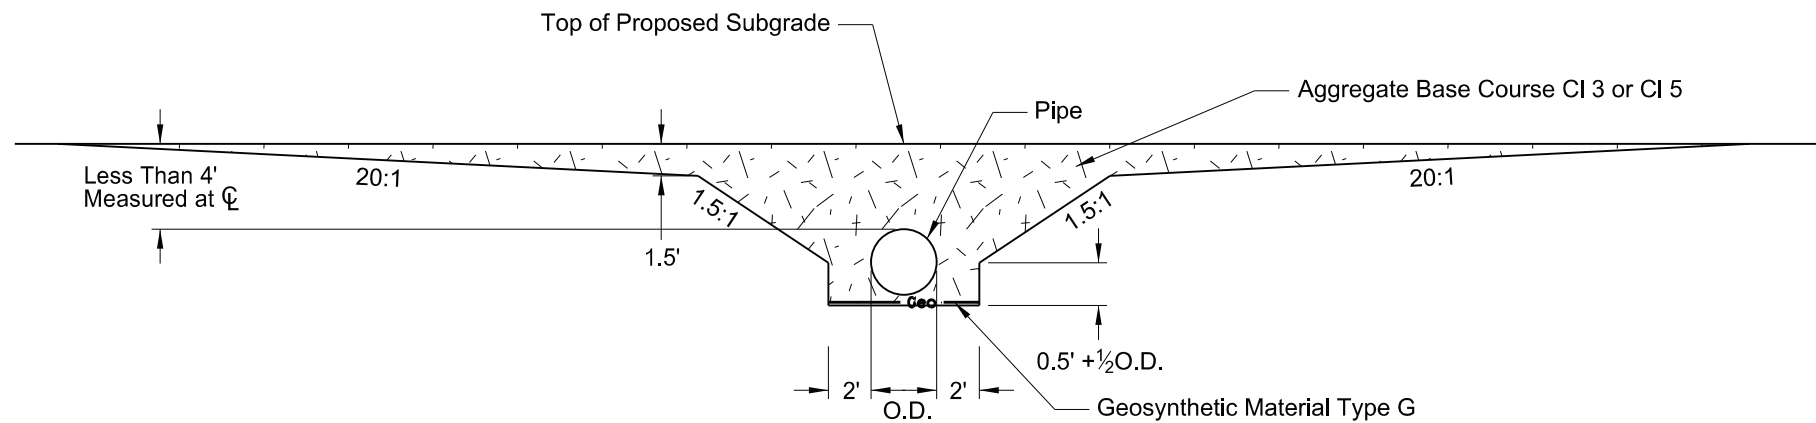

CROSS SECTION

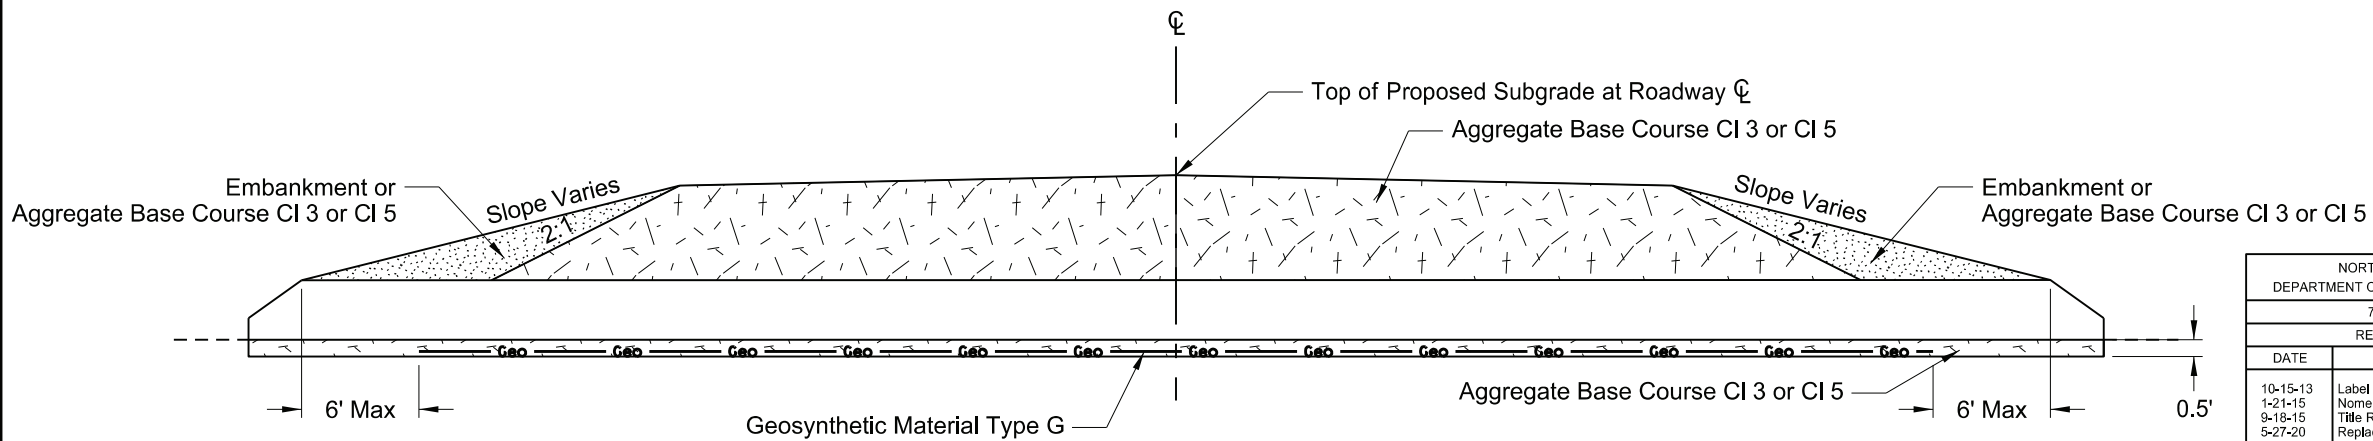


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
7-26-13	
REVISIONS	
DATE	CHANGE
10-15-13	Label Formatting
1-21-15	Nomenclature
9-18-15	Title Rewording
5-27-20	Replaced R1 Fabric with Geogrid Changed bedding depth




INLET - SPECIAL

D-722-1B

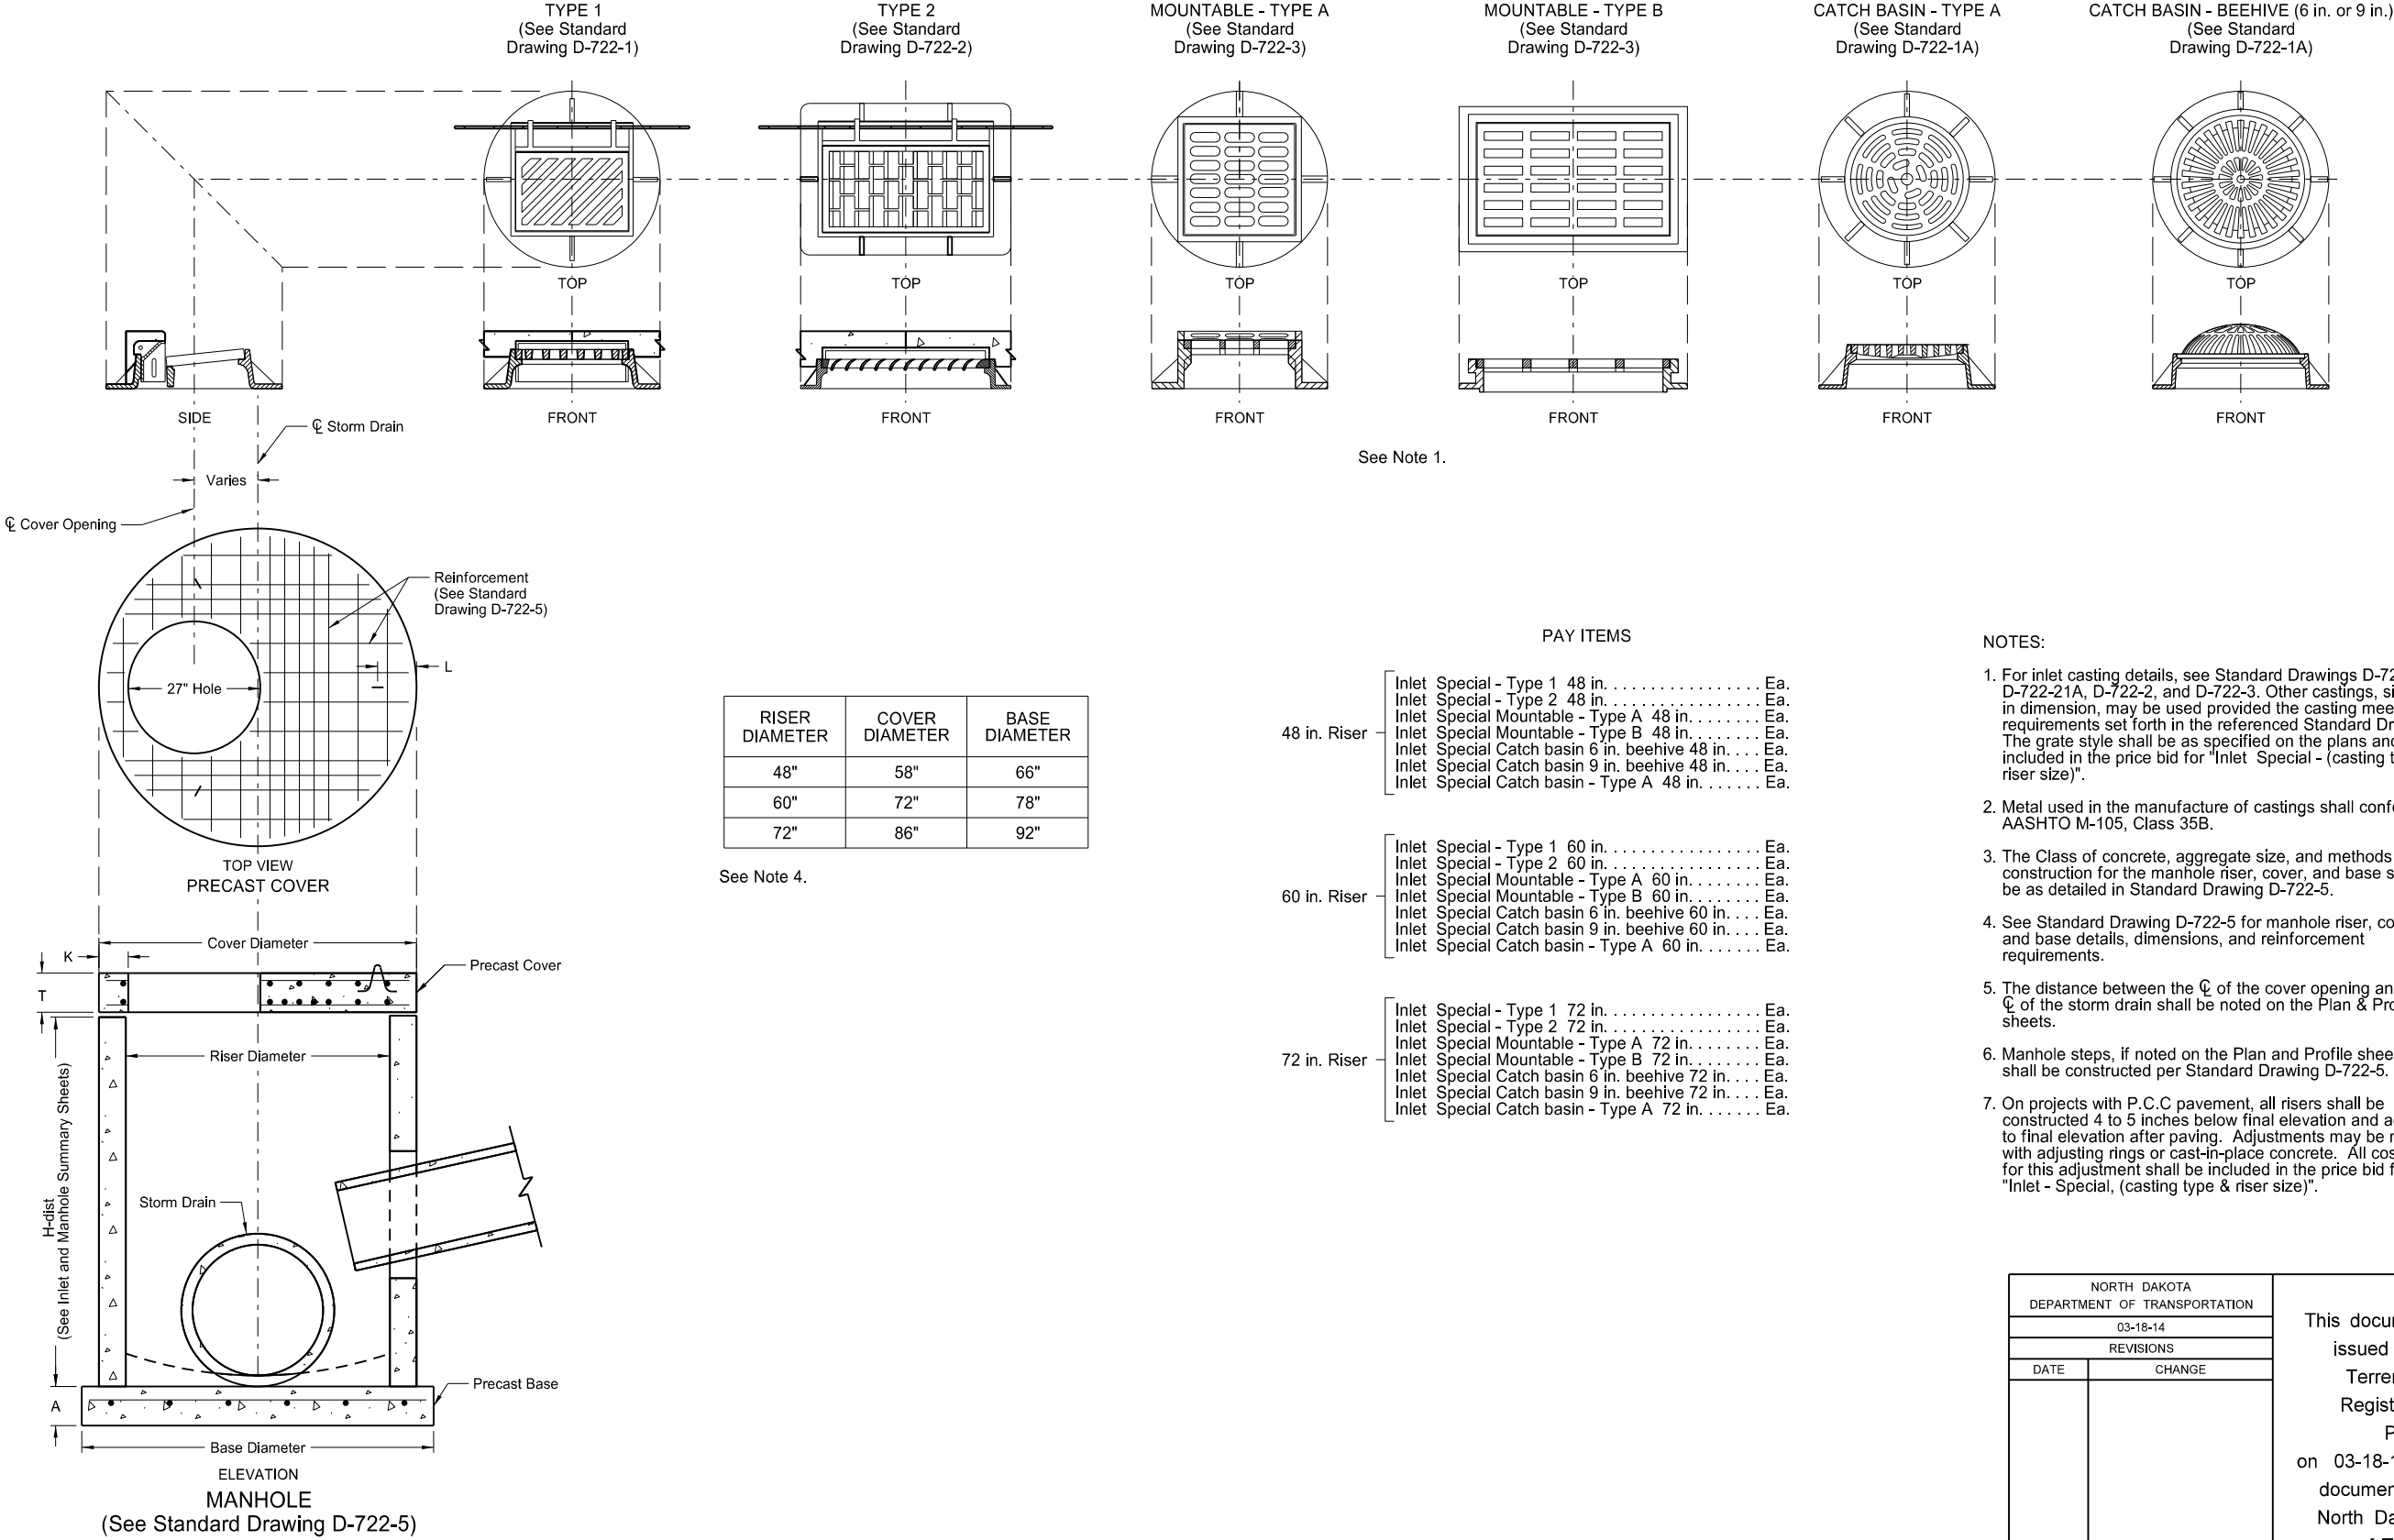


Inlet - Type 2Ea.
Inlet - Type 2, Double.....Ea.

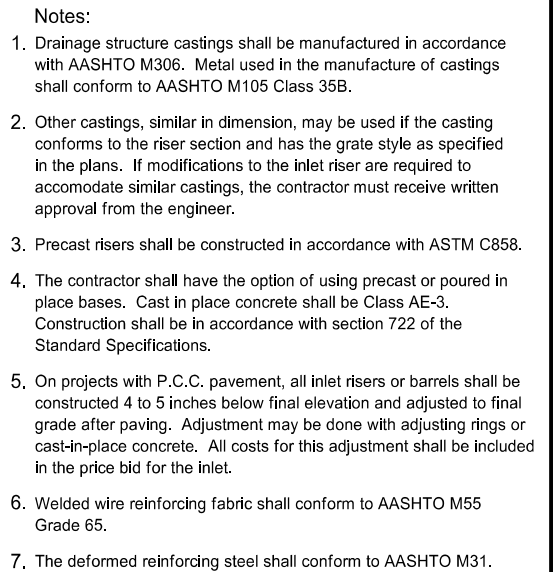


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
05-12-14	
REVISIONS	
DATE	CHANGE
07-07-14	Revised Note 4

This document was originally issued and sealed by
TERRENCE R. UDLAND
Registration Number
PE- 2674,
on 07/07/14 and the original document is stored at the
North Dakota Department
of Transportation

INLET - TYPE 2 - DOUBLE

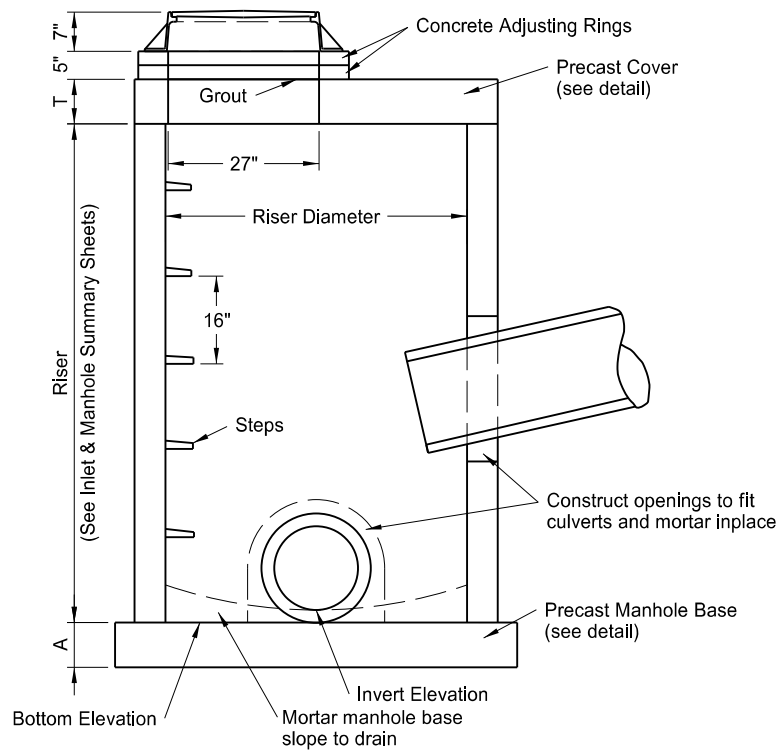

ELEVATION

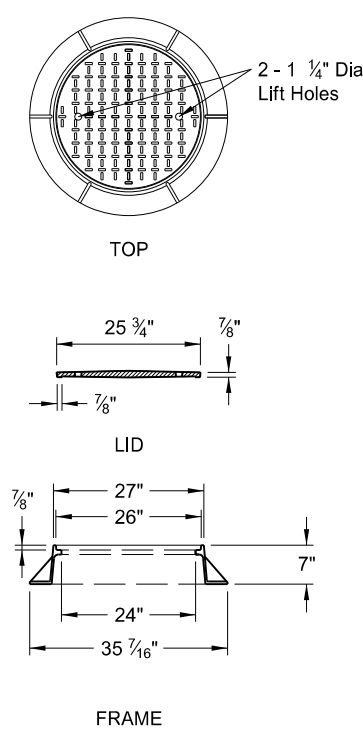

MANHOLE CAST IRON RING & COVER

PRECAST MANHOLE COVERS

RISER DIAMETER	COVER DIAMETER	WEIGHT OF SECTION	T	K	L	BOTTOM * BARS	TOP * BARS
48"	58"	1,080 Lb	6"	6"	8"	#4 at 6"	---
54"	65"	1,910 Lb	8"	6"	8"	#4 at 6"	---
60"	72"	2,430 Lb	8"	7"	9"	#4 at 6"	#4 at 11"
66"	79"	3,010 Lb	8"	7"	9"	#4 at 6"	#4 at 11"
72"	86"	3,640 Lb	8"	8"	10"	#4 at 6"	#4 at 11"
84"	100"	5,060 Lb	8"	9"	11"	#5 at 6"	#5 at 11"
96"	114"	6,695 Lb	8"	9"	11"	#5 at 6"	#5 at 11"
108"	128"	12,810 Lb	12"	10"	12"	#5 at 6"	#5 at 11"
120"	142"	15,900 Lb	12"	11"	13"	#5 at 6"	#5 at 11"

* - Place reinforcement listed in each direction.


MANHOLE BASES

RISER DIAMETER	BASE DIAMETER	WEIGHT OF SECTION	A	BARS *
48"	66"	1,785 Lb	6"	#4 at 12"
54"	72"	2,830 Lb	8"	#4 at 12"
60"	78"	3,320 Lb	8"	#4 at 12"
66"	86"	4,035 Lb	8"	#4 at 12"
72"	92"	4,620 Lb	8"	#4 at 12"
84"	107"	6,245 Lb	8"	#4 at 12"
96"	120"	7,855 Lb	8"	#4 at 12"
108"	132"	14,255 Lb	12"	#4 at 8"
120"	148"	17,925 Lb	12"	#4 at 8"


* - Place reinforcement listed in each direction.

NOTES:


1. Use class AE concrete precast or cast-in-place bases constructed in accordance with NDDOT Standard Specifications. Use aggregate size approved by the engineer.
2. Use precast concrete manholes, risers and steps conforming to AASHTO M199.
3. Reinforce precast concrete bases and covers as shown in the table for the corresponding riser diameter.
4. Use Grade 60 reinforcing steel.
5. Cut or Precast manhole riser bottoms square to fit the manhole base. Grout joint between base and riser with cement mortar.
6. The manhole riser length listed in the plans is based on a 7" manhole casting, plus 2 concrete adjusting rings (5"), plus the "T" dimension shown in the Precast Manhole Covers table.
7. Use corrosion resistant manhole steps with a minimum 800 pound vertical load resistance and a minimum 400 pound horizontal pull-out resistance. Use configuration of steps approved by the Engineer.
8. Precast concrete manhole covers shown are designed for an HS-20 wheel load and maximum fill height of 15'-0". Special design is required for heavier wheel loads and/or greater fill heights.
9. Use of other castings, similar in dimension, is allowed if the casting conforms to the manhole cover and has a lid style specified in the plans. Modifications to the manhole cover to facilitate similar castings are only allowed with written approval from the Engineer.
10. Use castings manufactured in accordance with AASHTO M306-09. Use metal conforming to AASHTO M105 Class 35B in the manufacture of castings.

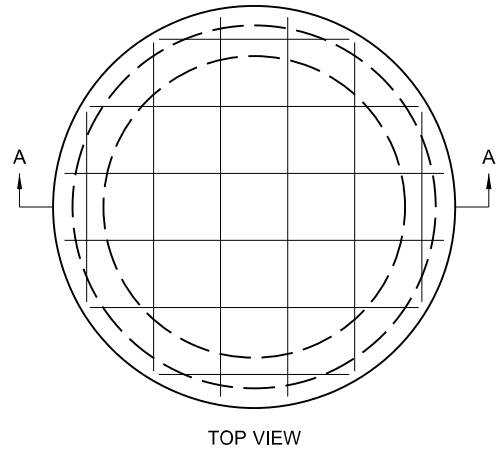


TOP VIEW

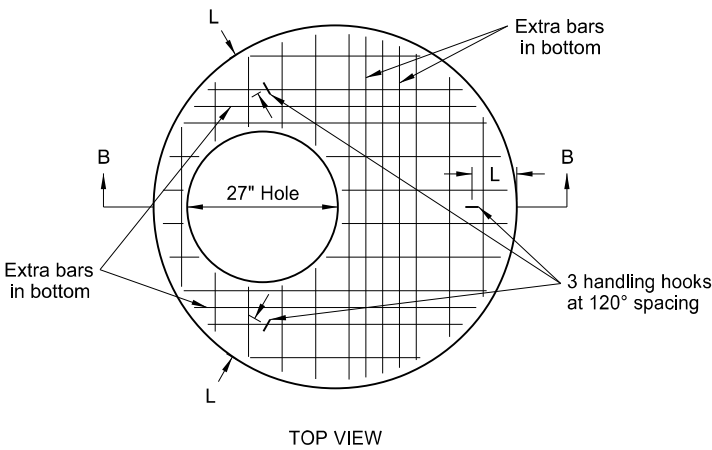


TOP VIEW

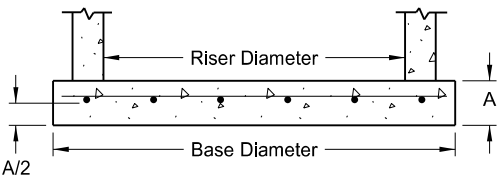


SECTION A-A
PRECAST MANHOLE BASE

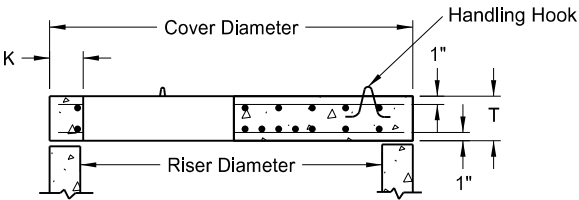

SECTION B-B
PRECAST COVER



TOP VIEW

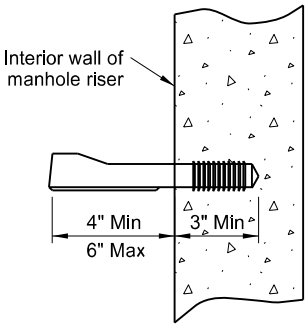

STEP DETAIL

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
05-14-2013	
REVISIONS	
DATE	CHANGE
6-24-14	Revised notes 1 & 6, added dimensions to Elev. drawing.
10-17-17	Updated to active voice.

This document was originally issued and sealed by
Roger Weigel,
Registration Number
PE- 2930,
on 10-17-2017 and the original document is stored at the
North Dakota Department
of Transportation