




ATTENUATION DEVICE



Outer Containers

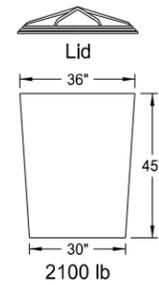


Cones



Typical Assembly

Typical Module Construction Detail

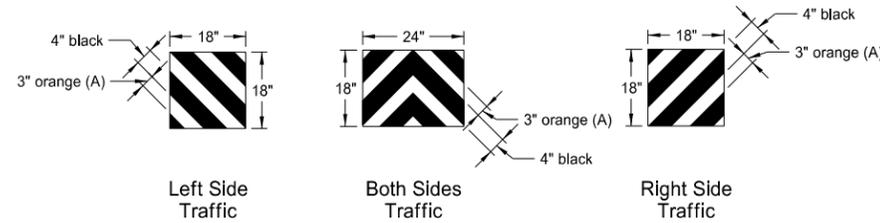


Reflective Sheet Detail

Note:
The last attenuation device facing traffic shall have a reflective sheet, following the details above, directly applied to the outer container. The sheet may also be applied to a metallic sheet and attached to the container with approved fasteners. The reflective sheeting shall be Type IV as specified in NDDOT Standard Specifications.


(A) 3" orange sheeting shall be used for temporary installations, and 3" yellow sheeting shall be used for permanent installations.

	Fill Chart				
	Module Weights (LBS)				
Distance from top edge	200	400	700	1400	2100
	8 1/2"	5"	4"	3"	0"

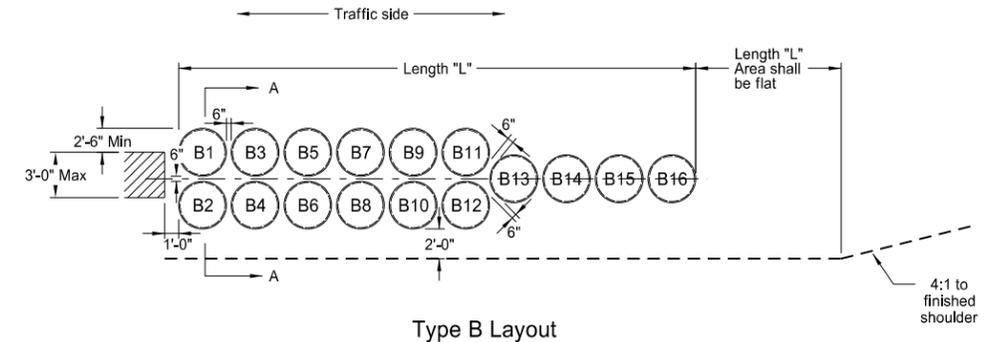

Type B Layout

Note:
When attenuation devices are placed at piers offset from roadway, they shall be angled 10 degrees towards traffic.

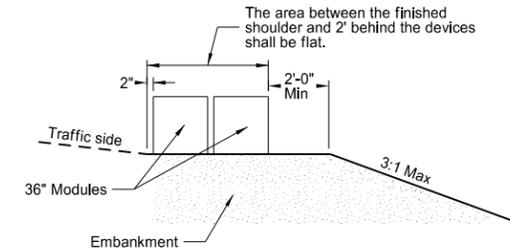

Section A-A (Type B Layout)

Type B Attenuation Device												
Module Number	Dash Number											
	75	70	65	60	55	50	45	40	35	30	25	
Module Weights (LBS)												
B1	2100											
B2	2100											
B3	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100		
B4	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100		
B5	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B6	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B7	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B8	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B9	700	700	700	700	700	700	700	700	700	700	700	700
B10	700	700	700	700	700	700	700	700	700	700	700	700
B11	700	700	700	700	700	700	700	700	700	700	700	700
B12	700	700	700	700	700	700	700	700	700	700	700	700
B13	700	700	700	700	700	700	700	700	700	700	700	700
B14	400	400	400	400	400	400	400	400	400	400	400	400
B15	400	400	400	400	400	400	400	400	400	400	400	400
B16	200	200	200	200	200	200	200	200	200	200	200	200
Length (L)	34.2'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	27.2'	27.2'	
Module Weights (LBS)	Replacement Module											
	2100	1400	700	400	200	2100	1400	700	400	200	2100	1400
2100	1	1	1	1	1	1	1	1	1	1	1	1
1400	1	1	1	1	1	1	1	1	1	1	1	1
700	2	2	2	2	2	2	2	2	2	2	2	2
400	1	1	1	1	1	1	1	1	1	1	1	1
200	2	2	2	1	1	1	1	1	1	1	1	1

Notes:

- Materials
 - A) Modules shall be manufactured from a frangible polyethylene material which will shatter upon impact.
 - B) Modules shall be filled with class 43 aggregate meeting the requirements for aggregate according to NDDOT Standard Specifications. The fill unit weight shall be at least 100 pounds per cubic foot. Fill left over winter shall have a moisture content of 2% or less.
- Modules
 - The modules shall be provided in two sizes to contain volumes of either 2, 4, 7, 14, or 21 cubic feet as a minimum.
 - A) The module for the 2, 4 or 7 cubic foot container shall consist of three components:
 - 1) A 14 C.F., yellow outer container.
 - 2) A black lid which locks securely over the top lip of the container.
 - 3) A cone-shaped supporting insert. The insert shall be varied to allow for the three sizes of modules and capable of supporting 200, 400, or 700 pounds of sand mass. The cone inserts shall be placed inside the 14 cubic foot container.
 - B) The module for the 21 cubic foot container shall consist of two components:
 - 1) A 36" height X 36" width yellow outer container.
 - 2) A black lid which locks securely over the top of the container.
- For temporary use: The modules shall be Energite or Fitch attenuation barrels manufactured by Energy Absorption Systems of Chicago, IL, TrafFix barrels manufactured by TrafFix Devices, Inc. of San Clemente, CA, or an approved equal. The attenuation devices may be placed on pallets to facilitate maintenance. Pallets shall have a maximum thickness of 3 1/2".
- For permanent use: Barrel Attenuation Device installations, the outer sand container portion of the modules shall consist of a one-piece container with separate detachable lid. The modules which meet these requirements are Energite attenuation barrels manufactured by Energy Absorption Systems of Chicago, IL, TrafFix barrels manufactured by TrafFix Devices, Inc. of San Clemente, CA, or an approved equal. Modules having outer sand containers assembled from multiple pieces shall not be accepted for permanent installations.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE
7-18-14	Revised sheeting in reflective sheet detail

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 7/18/14 and the original document is stored at the North Dakota Department of Transportation