
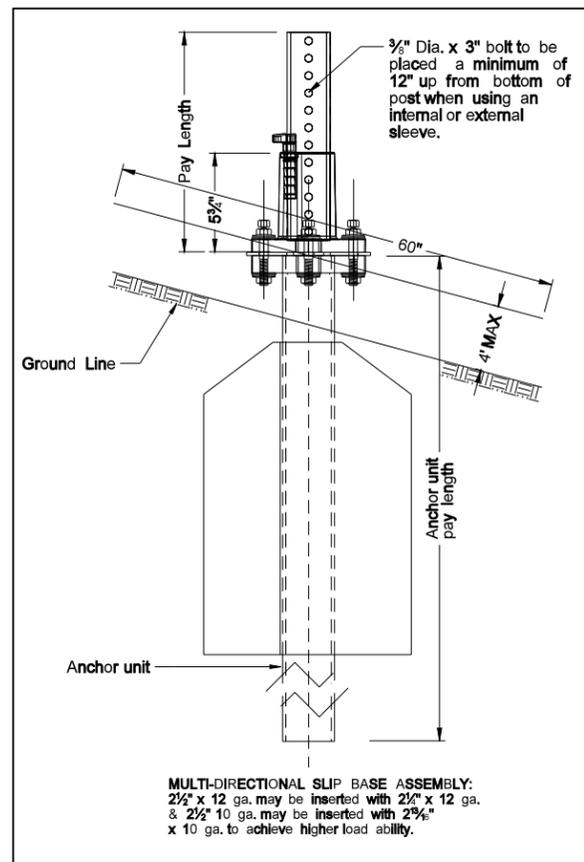



Number of Posts	Telescoping Perforated Tube						
	Post Size In.	Wall Thickness Gauge	Sleeve Size In.	Wall Thickness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thickness Gauge
1	2	12			No	2 1/2	12
1	2 1/2	12			No	2 1/2	12
1	2 1/2	12			(B)	3(C)	7
1	2 1/2	10			Yes		7
1	2 1/2	12	2 1/2(D)	12	Yes		7
1	2 1/2	12	2 1/2	12	Yes		7
2	2 1/2	10			Yes		7
2	2 1/2	12	2 1/2(D)	12	Yes		7
2	2 1/2	12	2 1/2	12	Yes		7
3 & 4	2 1/2	12			Yes		7
3 & 4	2 1/2	10			Yes		7
3 & 4	2 1/2	12	2 1/2	12	Yes		7
3 & 4	2 1/2	12	2 1/2(D)	12	Yes		7
3 & 4	2 1/2	10	2 1/2	10	Yes		7

(B) - The 2 1/2", 12 gauge posts do not need breakaway bases when placed in standard soils, but require a shim as specified by the manufacturer. The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.  
 (C) - 3" anchor unit  
 (D) - 2 1/2" x 12 ga. x 18" minimum length external sleeve required.

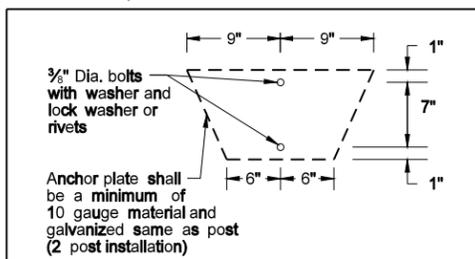


MULTI-DIRECTIONAL SLIP BASE ASSEMBLY:  
 2 1/2" x 12 ga. may be inserted with 2 1/2" x 12 ga. & 2 1/2" 10 ga. may be inserted with 2 3/8" x 10 ga. to achieve higher load ability.

Mounting Details Perforated Tube

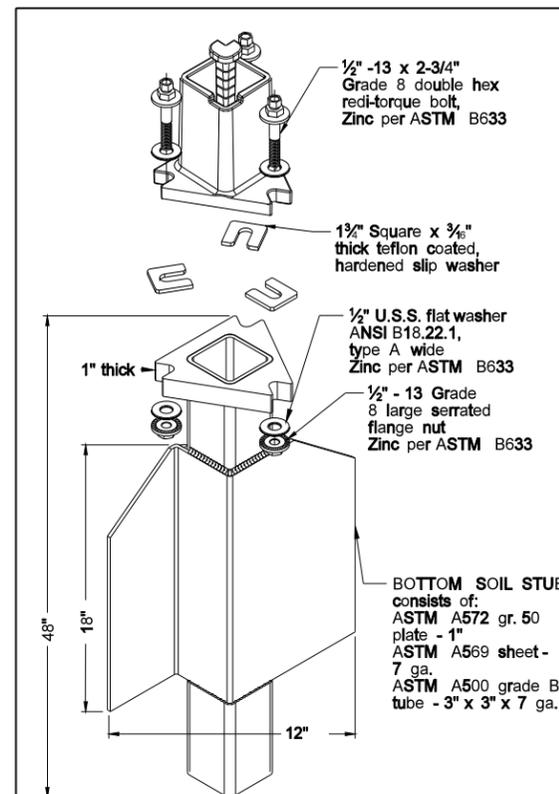

SLIP BASE FOR 2 1/2" POST

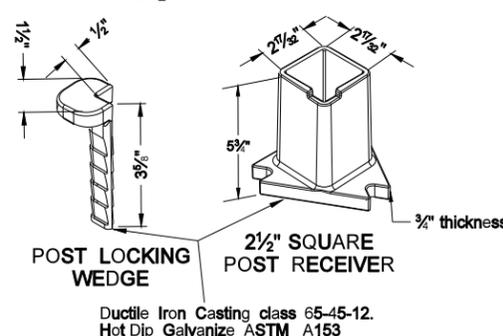


SLIP BASE DETAIL

Properties of Telescoping Perforated Tubes						
Tube Size In.	Wall Thickness in.	U.S. Standard Gauge	Weight Per Foot Lbs.	Moment of Inertia In. <sup>4</sup>	Cross Sect. Area In. <sup>2</sup>	Section Modulus In. <sup>3</sup>
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/2 x 2 1/2	0.105	12	2.773	0.561	0.695	0.499
2 3/8 x 2 3/8	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.783

The 2 3/8" size 10 gauge is shown as 2.19" size on the plans; The 2 1/2" size is shown as 2.51" size on the plans.

NOTE:

- 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement shall be made above and below post location and also back and ahead of post.
- Anchor material shall be 7 gauge H.R.P.O. Commercial quality ASTM A569 and 3" x 3" x 7" gauge ASTM A500 grade B. Anchor shall have a yield strength 43.9 KSI and tensile strength of 59.3 KSI. Anchor shall be hot dipped galvanized per ASTM A123/153. All tolerances on anchor unit and slip base bottom assembly are +/- 0.005" unless otherwise noted.
- When used in concrete sidewalk, anchor shall be the same concept without the wings.
- Four post signs shall have over 8" between the first and fourth posts.
- Installation procedures as per manufacturers recommendation.
- Concrete fasteners for surface mount breakaway base shall be a minimum 1/2" diameter x 4" grade 8.

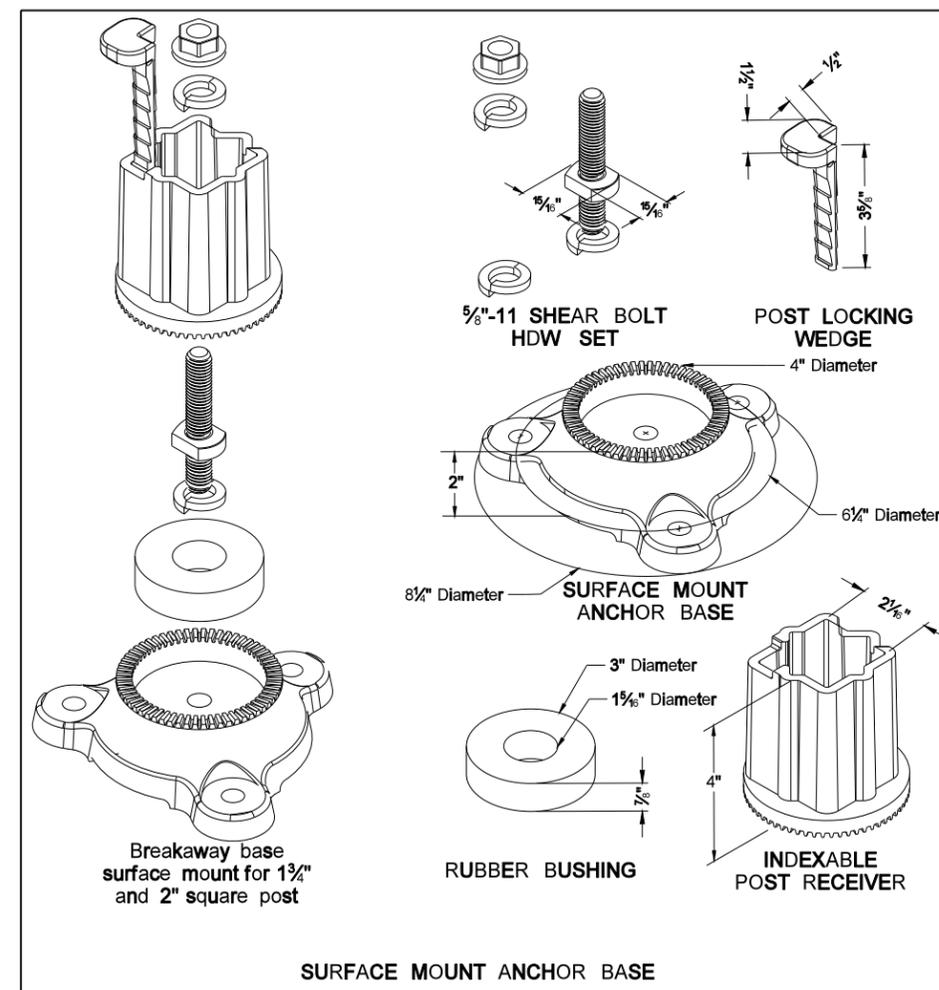


SURFACE MOUNT ANCHOR BASE

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-6-09	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930, on 08/06/09 and the original document is stored at the North Dakota Department of Transportation

SHOULDER BOLT

Shimming agent to reduce tolerance between 3" anchor unit and 2 1/2" post.  
 (standard 3/8" diameter grade 8 bolt may be used with proper shim)

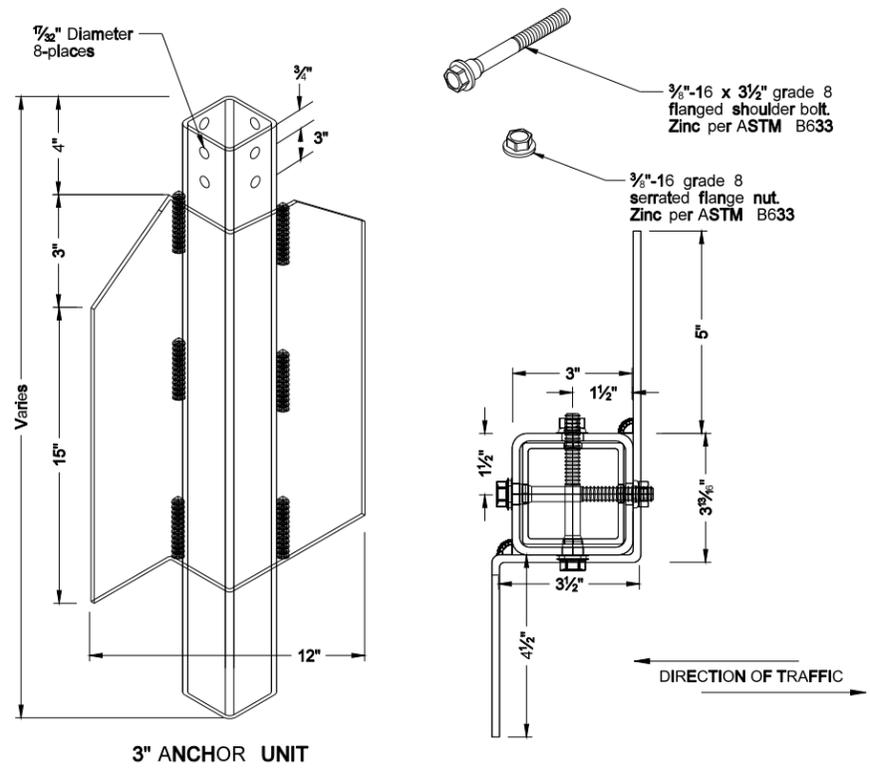

3" ANCHOR UNIT