

NO. 30

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION
REQUEST FOR PROPOSAL

STATE FEDERAL AID PROJECT NOS. NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081
(PCN-18907)

22.535 Miles

HMA

US 52, DONNYBROOK TO BROOKS JUNCTION and US 52, NEAR JCT US 2 (BROOKS JUNCTION)

RENVILLE and WARD COUNTIES

DBE Race Conscious Goal - 5.00%

BID OPENING: The bidder's proposal will be accepted via the Bid Express on-line bidding exchange at www.bidx.com until **09:30AM Central Time on November 17, 2017.**

Prior to submitting a Proposal, the Bidder shall complete all applicable sections and properly execute the Proposal Form in accordance with the specifications.

Proposal Form of:

(Firm Name)

(Address, City, State, Zipcode)

(For official use only)

PAGE INTENTIONALLY LEFT BLANK

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

The company, firm, corporation, or individual hereby acknowledges that it has designated a responsible person or persons as having the authority to obligate the company, firm, or individual, through electronic or paper submittal, to the terms and conditions described herein and in the contract documents. The designated responsible person submitting this proposal shall be hereafter known as the bidder. By submitting this proposal, the bidder fully accepts and agrees to all the provisions of the proposal. The bidder also certifies that the information given in this proposal is true and the certifications made in this proposal are correct.

The bidder acknowledges that they have thoroughly examined the plans, proposal form, specifications, supplemental specifications, special provisions and agrees that they constitute essential parts of this proposal.

The bidder acknowledges that all line items which contain a quantity shall have a unit price bid. Any line item which is bid lump sum shall contain a lump sum bid price.

The bidder acknowledges that they understand that the quantities of work required by the plans and specifications are approximate only and are subject to increases and decreases; the bidder understands that all quantities of work actually required must be performed and that payment therefore shall be at the prices stipulated herein; that the bidder proposes to timely furnish the specified materials in the quantities required and to furnish the machinery, equipment, labor and expertise necessary to competently complete the proposed work in the time specified.

NON-COLLUSION AND DEBARMENT CERTIFICATION

The bidder certifies that neither he/she, nor any official, agent or employee of the bidder has entered into any agreement, participated in any collusion, or otherwise taken any action which is in restraint of free competitive bidding in connection with this bid.

By submitting this proposal, the bidder certifies to the best of his/her knowledge and belief that he/she and his/her principles:

- a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal Department or agency;
- b. Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or perform a public (Federal, State or Local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records; making false statements; or receiving stolen property

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

-
- c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or Local) with commission of any of the offenses enumerated in paragraph b. of the certification; and
 - d. Have not within a three-year period preceding this proposal had one or more public transactions (Federal, State or Local) terminated for cause or default

Where the prospective bidder is unable to certify to any of the statements in this certification, the bidder shall submit an explanation in the blanks provided herein. The explanation will not necessarily result in denial of participation in a contract:

Explanation: _____

If the prequalified bidder's status changes, he/she shall immediately submit a new fully executed non-collusion affidavit and debarment certification with an explanation of the change to the Contract Office prior to submitting the bid.

Failure to furnish a certification or an explanation will be grounds for rejection of a bid.

BID LIMITATION (Optional)

The bidder who desires to bid on more than one project on which bids are to be opened on the same date, and who also desires to avoid receiving an award of more projects than the bidder is equipped to handle, may bid on multiple projects and limit the total amount of work awarded to the bidder on selected projects by completing the "Bid Limitation".

The Bid Limitation must be filled in on each proposal form for which the Bidder desires protection. Each such proposal must be covered by a proposal guaranty.

The bid limitation can be made by declaring the total dollar value of work OR total number of projects a bidder is willing to perform.

The Bidder desires to disqualify all of his/her bids on this bid opening that exceed a total dollar value of \$ _____

OR

that exceed a total number of _____ projects.

The Bidder hereby authorizes the Department to determine which bids shall be disqualified.

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

PERMISSIBLE DISCOUNT (optional)

Only when invited to do so in the Request for Proposal by Special Provision, Bidders are permitted to offer a discount on a specific project (discount project) if they are awarded the contract on one or more additional projects bid at the same bid opening time and date. The bidder must present the proposal so that it can be considered with or without the discount. The bid or discount offered on the "discount project" will not affect the determination of the low bid of any other project.

When discounts are offered, they must be presented as a reduction in the unit price for one or more items of work in the specified proposal (discount project).

Space for Offering Discounts:

Item No: _____

Description: _____

Unit: _____

Proposal Quantity: _____ Unit Price Reduction: \$ _____ Discount: \$ _____

Item No: _____

Description: _____

Unit: _____

Proposal Quantity: _____ Unit Price Reduction: \$ _____ Discount: \$ _____

Item No: _____

Description: _____

Unit: _____

Proposal Quantity: _____ Unit Price Reduction: \$ _____ Discount: \$ _____

TOTAL DISCOUNT _____

It is understood that the discount will only apply if awarded under the conditions as listed above and signed by the bidder.

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

RECEIPT OF ADDENDA ACKNOWLEDGEMENT

We hereby acknowledge receipt of the following addenda:

Addendum # _____ Dated _____

Addendum # _____ Dated _____

Addendum # _____ Dated _____

Addendum # _____ Dated _____

Addendum # _____ Dated _____

Addendum # _____ Dated _____

PROPOSAL GUARANTY

A proposal guaranty is required. The proposal guaranty must comply with Section 102.09, "Proposal Guarantee" of the Standard Specifications.

TYPE OF PROPOSAL GUARANTY APPLIED TO THIS PROJECT (Check one):

_____ Annual Bid Bond*

_____ Single Project Bid Bond

_____ Certified or Cashier's Check

*Annual Bid Bond is required when submitting proposals electronically

BID ITEMS

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

Bidder must type or neatly print unit prices in numerals, make extensions for each item, and total. Do not carry unit prices further than three (3) decimal places.

Item No.	Spec No.	Code No.	Description	Unit	Approx. Quantity	Unit Price		Amount	
						\$\$\$\$	000	\$\$\$\$	00
001	103	0100	CONTRACT BOND	L SUM	1.				
002	216	0100	WATER	M GAL	220.				
003	230	0125	SHOULDER PREPARATION	MILE	45.070				
004	302	0356	AGGREGATE SURFACE COURSE CL 13	TON	500.				
005	401	0050	TACK COAT	GAL	31,061.				
006	411	0105	MILLING PAVEMENT SURFACE	SY	3,942.				
007	430	0045	SUPERPAVE FAA 45	TON	66,324.				
008	430	1000	CORED SAMPLE	EA	259.				
009	430	2000	PATCHING	TON	100.				
010	430	6428	PG 64-28 ASPHALT CEMENT	TON	3,978.				
011	702	0100	MOBILIZATION	L SUM	1.				
012	704	0100	FLAGGING	MHR	500.				
013	704	1000	TRAFFIC CONTROL SIGNS	UNIT	2,906.				
014	704	1052	TYPE III BARRICADE	EA	3.				
015	704	1060	DELINEATOR DRUMS	EA	15.				
016	704	1067	TUBULAR MARKERS	EA	275.				

BID ITEMS

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

Bidder must type or neatly print unit prices in numerals, make extensions for each item, and total. Do not carry unit prices further than three (3) decimal places.

Item No.	Spec No.	Code No.	Description	Unit	Approx. Quantity	Unit Price		Amount	
						\$\$\$\$	000	\$\$\$\$	00
017	704	1185	PILOT CAR	HR	235.				
018	706	0550	BITUMINOUS LABORATORY	EA	1.				
019	706	0600	CONTRACTOR'S LABORATORY	EA	1.				
020	760	0005	RUMBLE STRIPS - ASPHALT SHOULDER	MILE	39.920				
021	760	0007	RUMBLE STRIPS - ASPHALT CENTERLINE	MILE	19.460				
022	762	0112	EPOXY PVMT MK MESSAGE	SF	874.				
023	762	0113	EPOXY PVMT MK 4IN LINE	LF	289,282.				
024	762	0115	EPOXY PVMT MK 8IN LINE	LF	2,530.				
025	762	0117	EPOXY PVMT MK 24IN LINE	LF	150.				
026	762	0430	SHORT TERM 4IN LINE-TYPE NR	LF	85,387.				
027	762	0434	SHORT TERM 8IN LINE-TYPE NR	LF	2,290.				
			TOTAL SUM BID						

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

Type of Work: HMA

Counties: RENVILLE and WARD

Length: 22.5350 Miles

TIME FOR COMPLETION:

The undersigned Bidder agrees, if awarded the contract, to prosecute the work with sufficient forces and equipment to complete the contract work within the allowable time specified as follows:

WORKING DAY CONTRACT: NA working days are provided. The Department will begin charging working days beginning NA or the date work begins on the project site, whichever is earlier.

CALENDAR DAY CONTRACT: NA calendar days are provided. The completion date will be determined by adding NA calendar days to NA or the date work begins on the project site, whichever is earlier.

COMPLETION DATE CONTRACT The project completion date is 10/13/2018. The Department provides a minimum of NA working days. The Department will begin charging working days beginning NA or the date work begins on the project site, whichever is earlier.

PROPOSAL FORM

North Dakota Department of Transportation

BID OPENING: November 17, 2017**Job 030**

Page 8 of 8

Projects: NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)**Type of Work:** HMA**Counties:** RENVILLE and WARD**Length:** 22.5350 Miles**UTILIZATION OF DISADVANTAGED BUSINESS ENTERPRISE (M/WBE):**

The undersigned Bidder certifies that the information given on behalf of the Bidder in Special Provision, "Utilization of Disadvantaged Business Enterprise" (M/WBE), is true and correct and that the bidder has met the assigned goals or has met the good faith effort requirements of the Special Provision.

CONTRACT EXECUTION:

The undersigned Bidder agrees, if awarded the contract, to execute the contract form and furnish a contract bond within fifteen calendar days, as determined by NDCC Section 1-02-15, after date of notice of award, in accordance with the provisions of Sections 103.05 and 103.06 of the Standard Specifications.

AFFIDAVIT:

STATE OF _____)
_____) **ss.**
COUNTY OF _____)

The undersigned bidder, being duly sworn, does depose and say that they are an authorized representative of _____

of _____, a
CONTRACTOR NAME
MAILING ADDRESS

☐ Individual ☐ Partnership ☐ Joint Venture ☐ Corporation

and that they have read, understand, acknowledge, and accept the entire proposal form; and that all statements made by said bidder are true and correct.

_____, TITLE _____
BIDDER MUST SIGN ON THIS LINE

TYPE OR PRINT SIGNATURE ON THIS LINE

Subscribed and sworn to before me this day.

COUNTY

(Seal)

STATE_____
DATE_____
NOTARY PUBLIC

My commission expires _____

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

Job #30, Project No. NH-4-052(083)059 & SNH-4-52(067)081

HMA

INDEX OF PROVISIONS

Road Restriction Permits

Hot Line Notice

NDDOT Supplemental Specifications dated October 1, 2017

Price Schedule for Miscellaneous Items dated October 1, 2014 (PS-1)

SP DBE Program - Race Conscious dated January 1, 2017

E.E.O. Affirmative Action Requirements dated March 15, 2014

Appendix A of the Title VI Assurances dated February 4, 2015

Appendix E of the Title VI Assurances dated February 4, 2015

SP Cargo Preference Act

Required Contract Provisions Federal Aid Construction Contracts
(Form FHWA 1273 Rev. May 1, 2012)

SP Certified Payrolls, dated 9-6-17

SP DBE Project Payment Reporting, dated 10-3-17

Labor Rates from U.S. Department of Labor dated January 6, 2017 (Mod. No. 4)

On-The-Job Training Program dated October 1, 2016

SP 281(14) Buy America

SP 282(14) Certificate of Compliance

SP 449(14) Work Drawings Submittals

SP 453(14) Haul Roads

INDEX OF PROVISIONS

Page 2 of 2

SP 462(14) Limitations of Operations

SP 5148(14) Permits & Environmental Considerations, for NH-4-052(083)059

SP 5152(14) Permits & Environmental Considerations, for SNH-4-052(067)081

Materials Pit List & Material Source Certificate

SP Fuel Cost Adjustment Clause dated September 8, 2006

NOTICE

T0: All prospective bidders on all North Dakota Department of Transportation Highway Construction Projects.

Contractors moving construction equipment to NDDOT highway construction projects are subject to the Road Restriction Policy with the following modifications:

- A. The contractor may purchase up to 10 single trip permits for each NDDOT highway construction project at a cost ranging from \$20 to \$70 each. These permits must be purchased from the Motor Carrier Division of the Highway Patrol at the central office of the NDDOT in Bismarck, North Dakota.
- B. The \$1 per mile fee will not be charged for Gross Vehicle Weights (GVW) exceeding 105,500 pounds, 105,500 pounds, and 105,000 pounds for highways Restricted by Legal Weights, 8 Ton, and 7 Ton highways respectively.
- C. The \$5 per ton per mile fee will be charged only for loads exceeding a GVW of 130,000 pounds, 120,000 pounds, 110,000 pounds and 80,000 pounds for highways Restricted by Legal Weights, 8 Ton, 7 Ton, and 6 Ton highways respectively.
- D. The maximum weights per axle for each of the class restrictions still apply. If it is shown that more axles cannot be added, movement may be authorized; however, a \$1 per ton per mile fee will be charged for all weight in excess of the restricted axle limits.
- E. These construction equipment single trip permits apply to State and US Highways only.
- F. The District Engineers and Highway Patrol will select the route of travel.
- G. Contractors moving equipment to other than NDDOT highway construction projects are subject to all fees as shown in the Road Restriction Permit Policy.
- H. Contractors must call the Highway Patrol prior to movement of all overweight loads on all State and US Highways.

NDDOT ROAD AND VEHICLE RESTRICTIONS

Date Revised 05-22-10

ROAD RESTRICTION PERMITS

Permits shall be issued for the movement of non-divisible vehicles and loads on state highways which exceed the weight limits during spring road restrictions. The issuance of permits may be stopped or posted weights changed at any time based on the varying conditions of the roadways. Permits can be obtained from the Highway Patrol.

RESTRUCTION CLASSIFICATIONS WITH ALLOWABLE AXLE WEIGHTS AND GROSS VEHICLE WEIGHTS	PERMIT AND TON/MILE FEES
Highways Restricted by Legal Weight Single Axle -- 20,000 lbs. Tandem Axle -- 34,000 lbs. Triple Axle -- 48,000 lbs. 4 Axles or more -- 15,000 lbs. per axle Gross Vehicle Weight -- 105,500 lbs. Note: The above weights apply to state highways restricted by legal weights, other than interstate highways, in areas where road restrictions are in force. When the gross weight of an axle grouping exceeds 48,000 pounds, the \$1 per ton per mile shall apply to all weight in excess of 15,000 pounds per axle.	Permit Fee: \$20-\$70 per trip Ton Mile Fee: 105,501 lbs. to 130,000 lbs. GVW -- \$1 per mile Over 130,000 lbs. GVW -- \$1 per mile plus \$5 per ton per mile for that weight exceeding 130,000 lbs. GVW Exceeding axle limits -- \$1 per ton per mile
8-Ton: Single Axle -- 16,000 lbs. Tandem Axle -- 32,000 lbs. 3 Axles or more -- 14,000 lbs. per axle Gross Vehicle Weight -- 105,500 lbs.	Permit Fee: \$20-\$70 per trip Ton Mile Fee: 105,501 lbs. to 120,000 lbs. GVW -- \$1 per mile Over 120,000 lbs. GVW -- \$1 per mile plus \$5 per ton per mile for that weight exceeding 120,000 lbs. GVW Exceeding restricted axle limits -- \$1 per ton per mile
7-Ton: Single Axle -- 14,000 lbs. Tandem Axle -- 28,000 lbs. 3 Axles or more -- 12,000 lbs. per axle Gross Vehicle Weight -- 105,500 lbs.	Permit Fee: \$20-\$70 per trip Ton Mile Fee: 105,500 lbs. to 110,000 lbs. GVW -- \$1 per mile Over 110,000 lbs. GVW -- \$1 per mile plus \$5 per ton per mile for that weight exceeding 110,000 lbs. GVW Exceeding restricted axle limits -- \$1 per ton per mile
6-Ton: Single Axle -- 12,000 lbs. Tandem Axle -- 24,000 lbs. 3 Axles or more -- 10,000 lbs. per axle Gross Vehicle Weight -- 80,000 lbs.	Permit Fee: \$20-\$70 per trip Ton Mile Fee: \$5 per ton per mile for all weight exceeding 80,000 lbs. GVW Exceeding restricted axle limits -- \$1 per ton per mile
5-Ton: Single Axle -- 10,000 lbs. Tandem Axle -- 20,000 lbs. 3 Axles or more -- 10,000 lbs. per axle Gross Vehicle Weight -- 80,000 lbs.	No overweight movement allowed

SINGLE UNIT FIXED LOAD VEHICLES SUCH AS TRUCK CRANES AND WORKOVER RIGS

A. Permit Fee and Ton Mile Fee for Self-Propelled Fixed Load Vehicles .

1. Permit Fee: \$25 per trip
2. \$1 per ton per mile for all weight in excess of restricted axle limits or in excess of legal limits on state highways in areas where road restrictions are in force. When the gross weight of an axle grouping exceeds 48,000 pounds, the \$1 per ton per mile shall apply to all weight in excess of 15,000 pounds per axle (see weight classification chart in section C.)
3. **\$5 per ton per mile** for all movements exceeding the following gross vehicle weight limits:
 - a. 105,500 lbs. GVW on unrestricted state highways, other than interstate highways, in areas where road restrictions are in force.
 - b. 105,500 lbs. GVW on 8-ton highways.
 - c. 105,500 lbs. GVW on 7-ton highways.
 - d. 80,000 lbs. GVW on 6-ton highways.
 - e. No overweight movement allowed on 5-ton highways

B. Permit Fees for Work-Over Rigs and Special Mobile Equipment Exceeding 650 but not 670 Pounds Per Inch Width of Tire.

1. Permit Fee:
 - a. \$50 per trip on work-over rigs up to 650 pounds per inch width.
 - b. \$75 per trip on work -over rigs that exceed 650 but not 670 pounds per inch width of tire.
2. The work-over rig shall be stripped to the most minimum weights.
3. A minimal number of state highway miles shall be used.
4. District engineer approval shall be obtained prior to movement when vehicle exceeds restricted axle weights by more than 5,000 pounds.
5. A validation number ending in TM must be obtained from the Highway Patrol prior to using a self-issue single trip movement approval form.
6. The ton mile shall be waived .

NOTICE

U.S. DEPARTMENT OF TRANSPORTATION

"HOT LINE"

As part of its continuing investigation into Highway Construction Contract Bid Rigging and abuses in the Disadvantaged Business Enterprise Program, the Inspector General for the Department of Transportation (DOT) has established a "HOT LINE" to receive information from contractors, suppliers, or anyone with knowledge of such activities.

The toll-free "HOT LINE" telephone number is 1-800-424-9071 and will be manned during normal working hours (8 a.m. to 5 p.m. EST). This operation is under the direction of DOT's Inspector General. All information will be treated confidentially and anonymity will be respected.

CALL

Inspector General's 'HOT LINE'
Toll Free 1-800-424-9071
Washington, DC Area:
202-366-1461
Fax: 202-366-7749

WRITE

Inspector General
Post Office Box 23178
Washington, DC 20026-0178

Email: hotline@oig.dot.gov

The field office address and telephone number for NORTH DAKOTA is:

CHICAGO REGIONAL OFFICE

Special Agent-in-Charge
Commercial: 312-353-0106
111 N. Canal St., Suite 677
Chicago, Illinois 60606

CERTIFICATION

I hereby certify the attached supplemental specifications effective on October 1, 2017.

/S/

Bob Fode, P.E., Director
Office of Project Development

6/9/2017

Date



**NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
SUPPLEMENTAL SPECIFICATION
REVISIONS**

Effective Date: 10/01/2017

The following specifications are supplementary to the 2014 Edition of the *Standard Specifications for Road and Bridge Construction* as they apply to this Contract. Page references in this document apply to the hard bound, printed edition of the specifications (the “blue book”) and the “as printed” version of the specifications on the Department’s website.

101.03 ABBREVIATIONS

PAGE 8

10/01/15

Delete the line for “ACPA American Concrete Precast Association” and replace it with the following:

ACPA American Concrete Pipe Association

Add the following item to Section 101.03:

NPCA National Precast Concrete Association
SWPPP Storm Water Pollution Prevention Plan

101.04 DEFINITIONS

PAGE 10

10/01/15

Delete the definition for “Sieve” and replace it with the following:

Sieve. U.S.A. Standard Sieve, as defined in ASTM E 11. The specified percent passing for each sieve is measured by weight.

102.07 B Electronic Proposal

Page 23

10/1/16

Replace 102.07 B with the following:

B. Electronic Proposal.

1. Electronic Bidding Credentials.

A Digital ID is required to electronically sign proposals.

If a Bidder does not have a Digital ID, create a Digital ID and set up bidding privileges by following the instructions on the Bid Express website (www.bidx.com). Begin the Digital ID creation process a minimum of 7 business days before the bid opening.

2. Submitting an Electronic Proposal.

Prepare the proposal using Bid Express as follows:

1. Download the most current “Proposal Files” and “DBE Roster File” from the Bid Express website (www.bidx.com).
2. Use the Bid Component for AASHTOWare Project Bids to prepare and submit the proposal forms. Follow the Bid Component software instructions and review the help

screens provided on the Bid Express website to ensure that the bid item list is prepared properly. Provide a unit price for each bid item.

If the proposal forms contain alternate or optional bid items, provide unit prices for those bid items as follows:

- a. For alternate bid items, provide a unit price for each bid item included in the Bidder's preferred alternate.
- b. For optional bid items, provide a unit price for all bid items under all options.

The user's Digital ID must be on file and enabled by Bid Express. The use of the Digital ID constitutes the Bidder's signature for execution of the proposal. The Department is not responsible for the Bidder's inability to submit a proposal using AASHTOWare.

103.08 A General**PAGE 30****10/1/16**

Replace the second paragraph with the following:

For subcontracts at any tier equal to or greater than \$750,000, obtain from the subcontractor all bid documentation used to prepare the subcontractor's bid for the portion of the work reflected in the subcontract. The subcontractor's bid documentation requirements shall be the same as for the Contractor, except it shall be submitted within 5 days of approval of the Prime Contractor's Request to Sublet. Submit to the Department the bid documentation and affidavit in a separate sealed container, including the subcontractor's name and address on the container.

104.02 C Significant Changes to the Character of Work**PAGE 34****10/01/15**

Delete the following paragraph in its entirety:

If the Contractor believes an alteration in the work is a significant change that necessitates a contract revision, the Contractor shall notify the Engineer in accordance with Section 104.03, "Contractor Requested Contract Revisions".

104.05 A Submission of the Claim**PAGE 37****10/01/15**

Replace the fourth paragraph of Section 104.05 with the following:

Provide a claim submittal to the Engineer that contains, at a minimum, the following information for each claim issue included on the [Notice of Intention to File a Claim \(SFN 16743\)](#). Failure to supply the following information for each claim issue constitutes a waiver of claim for additional compensation for each submitted claim item.

104.07 C. Conditions**PAGE 42****10/01/16**

Replace number 5 with the following:

5. Contains revisions to the contract that the Department has previously accepted on another Department project, or is based on or similar to standard specifications, special provisions, or another set of plans.

Delete Section 105.03 COOPERATION WITH UTILITY OWNERS and replace with the following:

105.03 COOPERATION WITH UTILITY OWNERS**A. General.**

Utility facilities shown on the plans, if any, are for reference purposes only and may not constitute an exhaustive representation of all utility facilities within the project. Notify the North Dakota One Call System (811) before starting the work, so they may locate and mark all utility facilities within the project.

Comply with Chapter 49-23 of the NDCC in determining the location of underground utilities.

Locate Department-owned, publicly-owned, and privately-owned utility facilities, whether on or off the One Call System.

If the Contractor's operations have the potential to damage utility facilities identified in the contract to remain in place during the work, including operations adjacent to these utility facilities, the Contractor shall account for and protect the utility facilities. Before starting the work, coordinate the protections with the utility owner.

B. Utilities Identified in Plans.

Notify all utility owners of the anticipated project schedule within two weeks of receiving notice to proceed. Coordinate adjustments and relocations with affected utility owners. The Contractor, the Engineer, and the utility owners shall agree to a schedule of the work and the adjustments and relocations before beginning the work.

Cooperate with utility owners in relocating and adjusting utility facilities to minimize interruption to service and duplication of work by utility owners.

The Department will provide utility conflict plans, if available. Utility conflict plans are not part of the contract and are for information purposes only.

C. Utilities Encountered During Work.

If the Engineer determines that adjustment or relocation of utility facilities is necessary to accommodate construction, the Engineer will arrange and coordinate the work with the owner if the contract does not otherwise provide for such work. This does not relieve the Contractor of any liability that may arise under the provisions of the NDCC.

D. Scheduling.**1. General.**

In order to minimize interference with traffic operations, the Contractor, Engineer, and utility owner shall agree to a detailed schedule before starting work.

2. Utility Coordination Meeting.

If the contract requires a utility coordination meeting, arrange the meeting with the utility owners and the Engineer to occur no later than two weeks after the notice to proceed. At the meeting, provide an agenda and a tentative construction schedule for planning utility relocations and adjustments; after the meeting, publish minutes and distribute a copy to all meeting attendees.

E. Fire Hydrants.

Before starting work that affects a fire hydrant, coordinate with the local fire authority to determine if provisions need to be in place before starting the work. If provisions are necessary, obtain the approval of the local fire authority before beginning the work affecting the fire hydrant.

F. Damage and Interruptions.

If the Contractor causes damage to utility facilities, the Contractor is responsible for the costs of restoring or repairing the damaged utility facility to a condition equal to or better than the condition existing before the damage occurred. Immediately notify the utility owner of the damage or, if the owner is unknown, the One Call System. Do not conceal, attempt to conceal, or make repairs to the utility facilities until approved by the utility owner. If this damage causes interruption to utility service, continuously coordinate with the utility owner until the service is fully restored.

The Department will not pay the Contractor for the cost to restore or repair damage utility facilities and will consider any delays resulting from this damage to be non-excusable in accordance with Section 108.06, Determination of and Extensions to the Contract Time.”

**105.08 A.3 Additional Section 600 Work Drawing Submittal Requirements. PAGE 50
10/01/16**

Replace the first paragraph with the following:

Provide work drawings on 11 inch × 17 inch sheets generated by a CADD system.

Use the minimum text sizes shown in Table 105-01.

Table 105-01	
Dimensions and Notes	0.08 Inches
Detail Subtitles	0.09 Inches
Detail Titles	0.10 Inches

105.08 B Work Drawings Submittal Requirements PAGE 50 10/1/17

Replace 105.08 B with the following:

B. Work Drawing Submittal Requirements.

Submit work drawings by either of the following methods:

1. Paper Submittal.

Submit a cover letter and two copies of the work drawings to the Engineer.

2. Electronic Submittal.

To submit the work drawings electronically to the Engineer, post a cover letter and one electronic copy of the work drawing to the Department's managed file transfer (MFT) website. Follow the requirements of NDAC Title 28 for all submittals.

Contact the Engineer to receive instructions describing how to upload files to the MFT website.

Replace the Section 105.08 C with the following:

C. Engineer's Response to Work Drawing.

Allow 21 days for the Engineer to review the work drawing. The Engineer will respond in one of the following ways:

- No Exceptions Noted;
- Returned for Correction;
- Not Required for Review; or
- Not Acceptable.

If the work drawing is returned stating "Returned for Correction" or "Not Acceptable", make necessary revisions and resubmit the work drawing as specified in Section 105.08, "Work Drawings".

After the Department has reviewed the work drawings, the Department will return the reviewed work drawing submittal to the Contractor as follows:

- If a paper submittal, the Engineer will return the reviewed drawings to the Contractor.
- If an electronic submittal, the Department will post reviewed work drawings on the MFT site and will send an email notification to the Contractor that the reviewed work drawings are available on the MFT site. Retrieve the reviewed work drawings from the MFT site within 30 calendar days. The Department will delete files from the MFT site after 30 calendar days.

Include the cost of drafting and submitting work drawings in the contract unit price for the relevant contract items.

106.01 C Certificate of Compliance

Replace 106.01 C, "Certificate of Compliance with the following:

C. Certificate of Compliance (CoC).

SP 282(14) Certificate of Compliance (CoC) has replaced this section.

106.02 D Aggregate Source Limitations

Delete number 8 and replace it with the following:

8. In Stark County, within the 2-mile radius from the center of Section 30-137-92;

Delete number 11 and replace it with the following:

11. In Hettinger County, within the 1-mile radius from the center of Section 28-135-91;

107.06 Discoveries

Replace the first paragraph with the following:

If the Contractor encounters one or more of the items included in the following list anywhere the Contractor performs the work, the Contractor shall immediately suspend the work and notify the Engineer of the encounter:

- Threatened or endangered species;
- Prehistoric dwelling sites;
- Human remains;
- Concentrated historic or prehistoric artifacts; or
- Vertebrate, invertebrate, plant and trace fossils.

If encountering one of the following, protect the location from further disturbance:

- Prehistoric dwelling sites;
- Human remains;
- Concentrated historic or prehistoric artifacts; or
- Vertebrate, invertebrate, plant and trace fossils.

Resume work in the location of the encounter only with written approval from the Engineer.

107.07 Responsibility to the Public

PAGE 70

10/01/17

Add the following to the end of Section 107.07

F. Crossing Traffic.

Construction vehicles are not allowed to cross lanes of traffic to enter or exit work zones on the interstate. Construction vehicles are required to merge into public traffic.

107.08 Haul Roads

PAGE 72

10/01/17

Replace 107.08 with the following:

107.08 HAUL ROADS

SP 453(14) Haul Roads has replaced this section.

107.13 G Railroad Flagging

PAGE 78

10/01/17

Delete the last sentence of the first paragraph.

107.17 REMOVED MATERIAL

PAGE 80

10/01/15

Replace Section 107.17 with the following:

107.17 REMOVED MATERIAL

Unless otherwise designated in the contract, removed material becomes the property of the Contractor.

If the Contractor determines that the material will be disposed of, the material must be disposed in one of the following ways:

- A. Dispose of the material through a beneficial use. Apply for a beneficial use permit from the NDDoH by completing an [*NDDOT Projects-Inert Waste Beneficial Use Application \(SFN 58981\)*](#). Provide the Engineer with copies of all documents submitted to the NDDoH.
- B. Dispose of the material at an approved permanent waste management facility.

- C. If waste cannot be reasonably managed at a permanent waste management facility, obtain approval from the NDDoH for a variance to dispose of the inert waste at another site. Apply for a variance by completing an [*NDDOT Projects-Inert Waste Disposal Variance Application \(SFN 54344\)*](#). Provide the Engineer with copies of all documents submitted to the NDDoH.

Obtain locations of permanent waste facilities, applications, and guidelines from the NDDoH, Division of Waste Management. View a list of municipal and inert waste landfills and review guidance on the NDDoH website: <http://www.ndhealth.gov>.

Include the cost of material disposal in the contract unit price of the relevant contract item.

108.02 PRECONSTRUCTION CONFERENCE

PAGE 81

10/01/16

Delete Section 108.02 and replace with the following:

108.02 CONSTRUCTION MEETINGS

A. Preconstruction Conference.

Before beginning the work, including pit operations specific to the project, and unless waived by the Engineer, coordinate and hold a preconstruction conference with the Engineer at a mutually agreed time and place. Notify subcontractors, utility companies, and other interested parties of the time and place of the preconstruction conference.

Submit the following to the Engineer before or at the preconstruction conference:

1. A company safety plan and the name of the safety officer;
2. An EEO / affirmative action plan and the name of the EEO officer;
3. A list of key project personnel and their phone numbers;
4. The initial or baseline schedule in accordance with Section 108.03, "Progress Schedule";
5. A list of proposed subcontractors requested in accordance with Section 108.01, "Subletting of Contract";
6. A list of material suppliers;
7. A list of pits to be used (owner and legal description);
8. All COAs in accordance with Section 107.05, "Material Source Approval";
9. The applicable storm water permits and the SWPPP in accordance with Section 107.02.C, "Storm Water Permits";
10. The names of Quality Control Personnel and a Quality Control Plan in accordance with Section 430.04 A, "Contractor Quality Control (QC)."

B. Weekly Planning and Reporting Meeting.

The weekly planning and reporting meeting is required when specified in the plans.

Organize a weekly meeting to coordinate efforts between subcontractors, utilities, local authorities, and others. The Engineer will develop a list of parties to be invited to the meeting and will provide the list to the Contractor at the Preconstruction Meeting. The Engineer may provide an updated list with additional attendees at any time.

Send a knowledgeable representative to conduct the meeting. Prepare minutes for each meeting and make the appropriate distribution of the minutes. Distribute the minutes within 48 hours of the meeting conclusion. Allow the Engineer to review and approve the minutes before distribution.

Include in the meeting agenda a discussion of problems encountered since the last meeting, and information of interest to those invited to the meeting. Provide a written schedule of the next week's work and a tentative schedule for the following week.

108.03 D Measurement and Payment**PAGE 91****10/01/15**

Replace Table 108-01 with the following:

**Table 108-01
CPM Schedule Price Reductions**

Days Late Submitting Update Schedule	Percentage Price Reduction to the Prorated Amount¹
1	20
2	40
3	60
4	80
5	100

¹ The "prorated amount" is equivalent to the amount calculated for each update schedule submission in Section 108.03 D, Item 2.

108.05 Limitation of Operations**PAGE 91****10/01/17**

Replace 108.05 Limitations of Operations with the following:

108.05 LIMITATION OF OPERATIONS

SP 462(14) "Limitation of Operations" has replaced this section.

108.06 B.1 General**PAGE 93****10/01/15**

Replace the 6th paragraph of Section 108.06 B.1 with the following:

The Contractor's plea that the contract time was insufficient is not a valid reason for an extension of time. For calendar day and completion date contracts, the Department will not extend the contract time for delays encountered on holidays and during the period from November 15 to April 15. When the time as extended by the Department falls on a date that is a holiday, the Engineer will extend the contract time to the next business day.

108.06 B.4 Excusable, Non-compensable Delays**PAGE 96****10/01/16**

Replace letter "f." with the following:

- f. Delays due to utility or railroad work when the Contractor has complied with the requirements of Section 105.03.D, "Scheduling," but the utility or railroad company failed to perform their work within the time agreed to in the utility coordination meeting.

109.01 J.2 Scale Applications**PAGE 103****10/01/16**

Replace the paragraph with the following:

Use either computerized or non-computerized scales to determine weights for material when the quantity of the material included in the bid item list is 2,000 tons or less.

109.01 J.2.a Computerized Scales**PAGE 103****10/01/16**

Replace the first paragraph with the following:

Use a computerized scale to determine the weight of material when the quantity included on the bid item list is greater than 2,000 tons.

109.01 J.2.b Computerized Loader Bucket Scales**PAGE 103****10/01/15**

Delete the first paragraph and replace with the following:

Loader bucket scales may be used to weigh materials when the quantity of material included in the bid item list is less than 10,000 tons and for aggregates specified under Sections 420 "Bituminous Seal Coat", 421 "Microsurfacing", and 422 "Slurry Seal" regardless of quantity.

109.01 J.4.b(2) Hopper or Batch Scales**PAGE 105****10/01/15**

Replace Section 109.01 J.4.b(2) with the following:

After the material has been weighed on the project scale and placed in a truck, weigh the loaded truck on a certified scale owned and operated by an entity other than the Contractor. Provide the tare weight of the truck along with the comparison weigh ticket.

109.01 J.6.a General**PAGE 106****10/01/15**

Delete the second paragraph and replace with the following:

Document the weight of each load on a separate, sequentially numbered weigh ticket that has a maximum size of 5.5 × 8.5 inches. Provide one copy to the driver of the truck. The truck driver shall deliver the weigh ticket to the Engineer at the location where the material is incorporated into the work. The Engineer will reject loads that are not accompanied by a legible weigh ticket.

155.02 A General**PAGE 140****10/01/17**

Add the following paragraph to Section 155.02 A:

Provide a NRMCA Certified plant for concrete used in Sections 550, "Concrete Pavement", 570 "Concrete Pavement Repair", 602 "Concrete Structures", and 622 "Pilings".

Replace the second paragraph in Section 155.03 A.3 with the following:

Use a water measuring system that:

- Delivers the designated quantity of water for each batch within the tolerance specified in Section 802.03 B.4, "Batching Water";
- Automatically stops the water flow when the designated quantity has been delivered; and
- Is adjustable and has a calibrated indicator showing the quantity of water measured for each batch.

Replace Section 155.07 D with the following:

D. Bridge Deck Overlays Finishing Equipment.

Use a finishing machine that is:

- Equipped with an oscillating screed or screeds with an effective weight of at least 75 pounds for each square foot of bottom face area, and provided with positive control of vertical position, the angle of tilt, and the shape of the crown. At least one oscillating screed shall be capable of consolidating the concrete to the specified density;
- Long enough to uniformly strike off and consolidate the width of lane to be paved
- Capable of forward and reverse motion under positive control;
- Travelling on rails with fully-adjustable and stable supports;
- Supported without the use of shims; and
- Not anchored to the concrete using powder actuated fasteners, unless that concrete will be subsequently overlaid.

Replace the second paragraph with the following:

Remove existing bituminous and concrete surfaces to a joint or create a smooth, vertical plane along the entire length of the remaining surface.

Replace Section 202.04 B with the following:

B. Removal of Structures and Box Culverts.

When the removal is of a bridge, perform asbestos inspection and testing and submit SFN 17987 "Asbestos Notification of Demolition and Renovation" to NDDoH at least 10 working days before conducting any demolition. If asbestos is discovered, the Engineer will issue a contract revision for work related to the asbestos.

Remove existing substructures to one foot below the existing stream bottom, and remove those parts outside the stream to one foot below final ground surface.

If bridge elements are designated for salvage, match mark the elements and transport them to the location specified in the contract.

202.06 BASIS OF PAYMENT**PAGE 162****10/01/16**

Delete the "Saw Concrete, Linear Foot" and "Saw Bituminous Surfacing-Full Depth, Linear Foot" from the "Pay Item List".

203.02 EQUIPMENT**PAGE 163****10/01/15**

Replace the equipment list in Section 203.02 with the following:

Equipment	Section
Vibratory Sheepsfoot/Pad Foot/Extended Pad Foot Rollers	151.01 E

203.04 B Topsoil**PAGE 164****10/01/17**

Replace 203.04 B with the following:

B. Topsoil.**1. General.**

Remove topsoil to its full depth or a depth up to 6 inches, whichever is less, from all excavation and embankment areas. Do not remove the subsoil or other deleterious material with topsoil. Stockpile the removed topsoil.

Place topsoil piles at acceptable locations outside of the grading limits or, if necessary, outside the right of way at no additional cost to the Department. If stockpiling topsoil outside the right of way, submit a copy of the agreement negotiated with the landowner 10 days before constructing topsoil stockpiles.

When stockpiling topsoil within the clear zone, construct topsoil stockpiles with foreslopes of 4:1 or flatter and approach slopes of 10:1 or flatter.

Scarify the surface to a depth of 2 inches before replacing topsoil.

Uniformly spread the stockpiled topsoil over the disturbed areas within the right of way.

2. Topsoil – Imported.

Provide imported topsoil consisting of friable, fertile soil of loamy character, containing an amount of organic matter normal to the region, capable of sustaining healthy plant life, and reasonably free from subsoil, roots, heavy or stiff clay, stones larger than two inch in greatest dimension, noxious weeds, sticks, brush, litter, and other deleterious matter. Provide the topsoil from a site outside the right of way. Spread the topsoil uniformly to a minimum depth of 6 inches. Use all existing stockpiled topsoil before importing topsoil.

203.04 C Subcut**PAGE 165****10/01/15**

Add the following paragraph to the end of Section 203.04 C:

Dispose of material removed from the subcut area as specified in Section 107.17, "Removed Material".

203.05 B Borrow Excavation**PAGE 169****10/01/16**

Replace the third paragraph of Section 203.05 with the following:

If the borrow source is a Department option, the Engineer will measure the topsoil stripped from the borrow area. Provide a minimum of two working days' notice to allow the Engineer to complete the preliminary cross sectioning before removing topsoil. Remove and stockpile topsoil, as specified in Section 203.04 B, "Topsoil", before excavation. Provide notice and allow one working day for the Engineer to complete the topsoil measurement before beginning borrow excavation.

203.05 C Topsoil**PAGE 170****10/01/17**

Add the following to 203.05 C:

The agreement will be in writing and signed by the both the Contractor and the Engineer.

203.05 D Topsoil – Wetland**PAGE 170****10/01/16**

Replace 203.05 D Topsoil – Wetland with the following:

D. Reserved.
Reserved.

203.06 BASIS OF PAYMENT**PAGE 171
10/1/17****10/01/16 &**

Delete "Topsoil Borrow Area, Cubic Yard" from the Pay Item List and replace with "Topsoil – Dept Option Borrow Area, Cubic Yard".

Delete "Topsoil – Wetland, Cubic Yard" from the Pay Item List.

203.06 C Department Optioned Borrow**PAGE 171****10/01/16**

Add the following to the end of Section 203.06 C:

Include the removal and replacement of topsoil in Department optioned borrow areas in the contract unit price for "Topsoil – Dept Option Borrow Area".

216.06 Basis of Payment**PAGE 175****10/01/15**

Replace Section 216.06 with the following:

Pay Item	Pay Unit
Water	M Gal

An "M Gal" is equivalent to 1,000 gallons.

Such payment is full compensation for furnishing all materials, equipment, labor, and incidentals to complete the work as specified.

230.05 B Reshaping Inslopes**PAGE 179****10/01/16**

Replace Section 230.05 Reshaping Inslopes with the following:

B. Reshaping Foreslopes.

The Engineer will measure each foreslope on each side of the roadway separately.

251.03 D Seed Class**PAGE 182****10/01/15**

Add the following footnote to Table 251-01:

¹ Substitute Thickspike or Stream bank Wheatgrass of the Critana, Banstock, Sodar, AC Polar or Elbee variety if Sideoats Grama is unavailable.

253.02 A Hydraulic Mulch**PAGE 188****10/01/16**

Replace the first paragraph with the following:

When applying hydraulic mulch and seed together, use hydraulic spraying equipment that mixes the seed and mulch in water.

253.03 B Hydraulic Mulch**PAGE 188****10/01/16**

Delete the third paragraph.

253.03 C Straw Mulch**PAGE 188****10/01/15**

Delete the following sentence from this section:

At least 50 percent of the mulch by weight must be at least 8 inches in length.

262.04 A Installation**PAGE 201****10/01/15**

Replace the first paragraph of Section 262.04 A with the following:

Attach anchor lines to the flotation device.

265.06 Basis of Payment**PAGE 204****10/01/15**

Replace the first paragraph after the list of pay items with the following:

Include the cost for pipe, geosynthetic material, topsoil, and seed in the price bid for "Stabilized Construction Access".

Replace table in Section 302.03 with the following:

Material	Section
Aggregates	816
Salvaged Base Course	817
Traffic Service Aggregate	816 Class 5; or 817

302.04 A.2 Gradation**PAGE 209****10/01/15**

Replace the first paragraph in Section 302.04 A.2 with the following:

The Engineer will collect three samples for each 1,000 tons of material placed, except when more than 1,000 tons are placed in a day. If more than 1,000 tons are placed in a day, the Engineer will collect three samples for that day's placement. If the aggregate fails to meet the specified gradation, the Engineer will apply a price reduction as specified in Section 302.06 B, "Contract Price Adjustments".

302.04 B Placement and Compaction**PAGE 210****10/01/17**

Replace the third paragraph with the following:

Compact aggregate, utilizing pneumatic-tired rollers, until the surface is tightly bound and shows no rutting or displacement occurs under the roller operation. The Engineer may allow other compaction methods, when placing aggregate under sidewalks, driveways, or medians.

302.04 C Surface Tolerance**PAGE 210****10/01/15**

Replace Section 302.04 C with the following:

C. Surface Tolerance.

Unless one of the following surface tolerances is specified, construct the surface to within 0.08 feet of the proposed elevation.

1. Surface Tolerance Type B.

Use trimming equipment, including motor graders, equipped with automatic grade control to adjust for the cross slope and longitudinal profile. Construct the finished surface to within 0.04 feet of the proposed elevation.

Reincorporate material removed from high points during trimming into other portions of the base.

2. Surface Tolerance Type C.

Use roadbed planers to construct the finished surface. The Engineer will allow the base or surface course to be used as the grade reference when trimming shoulders. Construct the finished surface to within 0.04 feet of the proposed elevation.

Reincorporate material removed from high points during trimming into other portions of the base.

Replace the first paragraph in Section 306.04 A.1 with the following:

The Engineer will collect three samples for each 1,000 tons of material placed, except when more than 1,000 tons are placed in a day. If more than 1,000 tons are placed in a day, the Engineer will collect three samples for that day's placement. If the aggregate fails to meet the specified gradation, the Engineer will apply a price reduction as specified in Section 306.06 B, "Contract Price Adjustments".

401.03 MATERIAL**PAGE 221****10/01/16**

Replace the last paragraph in Section 401.03 with the following:

Obtain samples of the bitumen under the observation of the Engineer. The Engineer will take immediate possession of the samples.

401.03 B Tack Coat and Fog Seal.**PAGE 221****10/01/15**

Delete Section 401.03 B and add the following:

B. Tack Coat.

Use a material from Table 401-01.

Table 401-01

Material	Section
SS-1h	818.02 F
MS-1	818.02 F
CSS-1h	818.02 E.1

When MS-1 is used it may be diluted by the supplier or the Contractor.

C. Fog Seal.

Use a material from Table 401-02.

Table 401-02

Material	Section
SS-1h	818.02 F
CSS-1h	818.02 E.1

401.04 A Application of Bitumen**PAGE 221****10/01/15**

Delete Section 401.04 A and add the following:

A. Application of Bitumen.**1. General.**

Prepare the surface by removing loose dirt and deleterious material.

Provide the Engineer with the manufacturer recommended application temperature ranges. During application, maintain the temperature of bitumen within the ranges recommended by the manufacturer.

Apply bitumen with a distributor on a compacted and stable surface. Use hand sprayers to cover irregular areas. Completely cover the area receiving the bitumen application.

If applying bitumen in multiple passes, overlap the bitumen along adjoining edges of the passes.

Protect the surfaces of structures and other roadway appurtenances against tracking and splattering.

2. Prime Coat.

Apply prime coat when the ambient air temperature is at least 40°F.

Allow the prime coat to cure a minimum of 48 hours before placing pavement.

3. Tack Coat.

Apply tack coat when the air temperature and existing mat temperature are at least 35°F.

Apply tack coat to a dry surface.

Allow tack coat to cure before applying surfacing material.

4. Fog Coat.

Apply fog coat when the ambient air temperature is at least 40°F.

Apply fog coat to a dry surface.

411.04 Construction Requirements

PAGE 223

10/01/17

Replace the sixth paragraph with the following:

Coordinate milling and paving operations so that no section of milled roadway has public or construction traffic operating on it for more than 5 days. If public or construction traffic operates on the milled surface for more than 5 days, repair the roadway as directed by the Engineer at no additional cost to the Department.

420.04 A General

PAGE 224

10/01/15

Replace Section 420.04 A with the following:

A. General.

Do not start seal work after September 1.

Allow material to cure as shown in Table 420-01 before applying seal coat materials.

Table 420-01 Curing Period	
Material Type	Curing Period
Prime Coat	4 days
Asphalt Cement Pavements	7 days
Emulsion Pavements	15 days

Schedule the work so that the last bitumen application of the day is sufficiently cured to allow installation of the short-term pavement marking before sunset.

420.04 D Cover Coat Material Application**PAGE 225****10/01/15**

Replace the third paragraph with the following:

Within one minute following the application of the bitumen, spread the cover coat material uniformly over the bituminous material with an aggregate spreader. Apply cover material by hand to areas that are inaccessible to the aggregate spreader.

420.04 D Cover Coat Material Application**PAGE 225****10/01/15**

Delete the eighth paragraph in its entirety.

420.04 H.1 Bitumen**PAGE 226****10/01/16**

Replace Section 420.04 H.1 with the following:

1. Bitumen.

Obtain samples of this material under the observation of the Engineer. The Engineer will take immediate possession of the samples.

421.03 MATERIALS**PAGE 228****10/01/16**

Add the paragraph following to the end of Section 421.03:

Obtain samples of the bitumen under the observation of the Engineer. The Engineer will take immediate possession of the samples.

422.03 MATERIALS**PAGE 232****10/01/16**

Add the paragraph following to the end of Section 422.03:

Obtain samples of the bitumen under the observation of the Engineer. The Engineer will take immediate possession of the samples.

430.03 F Commercial Grade Hot Mix Asphalt**PAGE 238****10/01/17**

Delete Section 430.03 F "Commercial Grade Hot Mix Asphalt" from Section "430.03 Material".

430.04 D.1 General**PAGE 241****10/01/15**

Replace the third paragraph of Section 430.04 D.1 with the following:

Submit the mix design a minimum of 10 calendar days before beginning paving operations. The Engineer will review the mix design. If the Engineer does not approve the mix design, revise the mix design and submit the revised mix design. Allow 10 calendar days for the Engineer to review a revised mix design before beginning paving operations.

430.04 D.2 Items to be Submitted**PAGE 242****10/01/15**

Add the following item to Section 430.04 D.2:

- e. If the mix contains RAP, submit a 50 pound sample of the milled material.

430.04 E.5 Control Limits**PAGE 245****10/01/17**

Replace “Percent Air Voids” values in Table 430-07 with the following:

Test/Assessment	Single Test Target Value Control Limit	Moving Average Target Value Control Limit
Percent Air Voids	2.0% to 6.0%	2.5% to 5.0%

430.04 F Surface Preparation**PAGE 246****10/01/15**

Replace the second paragraph of Section 430.04 F with the following:

Correct local irregularities in the existing surface before placing the first lift of bituminous material. If milling is specified, correct local irregularities after milling. Apply a tack coat to the surface before correcting the irregularities. Use the same type of mix that is required for the subsequent lift. Use a pneumatic roller as specified in Section 151.01 A.3. “Self-Propelled Pneumatic-Tired Roller” to compact the mix.

430.04 G Patching**PAGE 247****10/01/15**

Replace Section 430.04 G with the following:

G. Patching.

Remove existing broken or unstable surface material and replace that material with the same mixture specified for the next course.

Place the bituminous material in lifts not to exceed 3 inches and compact the material. Allow the patch material to cool to 130°F before placing additional material. If patching is required during the paving operation, allow the patch material to cool to 185°F before placing additional material.

430.04 H.1 General**PAGE 248****10/01/15**

Delete the ninth paragraph of Section 430.04 H.1

430.04 I.3.c Intermediate Rolling**PAGE 250****10/01/15**

Replace the second paragraph of Section 430.04 I.3.c with the following:

If roller tires pick up the bituminous material or there are excessive roller marks in the mat, the Engineer may allow the removal of the intermediate rolling operation if it appears to the Engineer that compaction is being achieved.

430.04 J Joints**PAGE 250****10/01/15**

Replace Section 430.04 J with the following:

J. Joints.**1. General.**

Place pavement against the surface of curbing, gutters, manholes, and similar structures uniformly near the contact surfaces so the pavement is slightly higher than the edge of the structure after compaction. Do not construct a joint on top of a joint from a previous lift.

2. Longitudinal Joints.

Construct longitudinal joints on successive lifts between 6 and 12 inches from the previous longitudinal joint.

Place and follow markings to guide the paver. Construct joints in a uniform line. Correct pavement edges that deviate from the uniform line and correct areas of the joint that vary from the intended location of the joint by more than 2 inches. Construct joints with tight seams and no visible segregation.

3. Transverse Joints.

Construct transverse joints on successive lifts a minimum of 12 feet from the previous transverse joint.

430.06 A General**PAGE 253****10/01/17**

Delete "Commercial Grade Asphalt, Ton" from the Pay Item List

550.03 Materials**PAGE 261****10/01/15**

Add the following to Section 550.03:

Develop a mix design with a maximum water-cement ratio of 0.40 when placing concrete with a slip form paving machine. Use the water-cement ratio shown in Section 802.01 B.2, "Concrete Class Designation" for all other paving methods.

550.04 D.1 General**PAGE 263****10/01/16**

Replace the fourth paragraph with the following:

Adjacent concrete may be used as a side form after the concrete has attained a minimum compressive strength of 3,000 psi or a minimum flexural strength of 450 psi.

Replace Section 550.04 H.1.d with the following:

d. Final Surface Finish.

(1) General.

Uniformly texture the surface by dragging a seamless strip of stiff-fiber artificial grass carpet longitudinally along the full width of the pavement in a single pass.

Use and maintain a taut string line for operating the carpet drag. Attach the leading edge of the carpet drag to a bridge. If the Engineer determines it is not feasible to use a bridge or string line, other texturing methods will be allowed.

Maintain a clean carpet free of encrusted concrete.

Provide a minimum texture depth of 0.031 inches.

(2) Roadways with Speed Limits Less than 45 MPH.

The Engineer will test the texture achieved by the carpet drag in accordance with ASTM E 965 and the Field Sampling and Testing Manual. The Engineer will determine the test location.

If three or more lots have texture depths less than 0.031 inches but greater than or equal to 0.025 inches, perform diamond grinding on those lots.

Perform diamond grinding any lot having a texture depth of less than 0.025 inches.

Perform grinding as specified in Section 550.04 M.4, "Grinding."

The Engineer will determine the limits of any failing test by running additional tests at 100 foot intervals before and after the failing test. The Engineer will determine the location of the additional tests.

(3) Roadways with Speed Limits 45 MPH or Greater.

Run a clean, metal tine longitudinally along the surface immediately following the carpet drag. Exclude areas within 3 inches of the edge of the slab and longitudinal joints. Run the tine continuously across transverse joints.

Use a tine that provides:

- 1/8 inch $\pm$ 1/64 inch groove width;
- 3/16 inch $\pm$ 1/16 inch groove depth; and
- 3/4 inch spacing of between grooves.

If the concrete has become too stiff to receive the metal tine finish, use diamond bladed equipment to produce the longitudinal grooves.

Replace the first paragraph of Section 550.04 I.3 with the following:

Use a curing compound that meets the requirements of Section 810.01 B.2, "Type 2, Class B".

Replace the title of “Impervious Membrane Cure” with “Concrete Curing Compound”.

550.04 M.3.a General

PAGE 273

10/01/16

Replace the first sentence of the first paragraph with the following:

The Engineer will determine the pavement smoothness by profiling the finished surface of the mainline pavement.

550.04 M.3.b Operation

**PAGE 273
10/1/17**

10/01/16 &

Replace the second paragraph with the following:

The Engineer will apply a liquidated damage of \$1,500 per trip for each profile collected after the second profile.

Replace the third paragraph with the following:

The Engineer will use an inertial profiler to collect the profile in each wheel path of each lane.

550.04 M.3.c(1) General

PAGE 274

10/1/17

Replace the second bullet with the following:

- Use ProVal, <http://www.roadprofile.com>, to calculate the IRI for the Pavement Profile (PPF);

Replace all instances of “ERD” with “PPF”.

550.04 M.3.c(1)(b) Corrective Action Plan

PAGE 275

10/1/17

Replace all instances of “ERD” with “PPF”.

550.04 N.1 Contractor Coring

PAGE 276

10/01/17

Add the following to the end of the first paragraph of 550.04 N.1:

Fill the core hole with fresh concrete mix and use a vibrator to consolidate the concrete in the holes. Screed the new concrete off and apply curing compound to the new concrete.

570.03 A General

PAGE 281

10/01/15

Add the following item to the table:

Impervious Membrane Cure

810.01 B.1

Replace Section 570.03 B.2.a with the following:

a. Concrete.

Use Class AE concrete with cement that meets the requirements of AASHTO M 85, Type I or Type IA for spall repairs.

570.03 D Curing Compound

Delete Section 570.03 D.

570.04 A.1.b Full Depth Repairs

Replace Section 570.04 A.1.b with the following:

b. Full Depth Repairs.

Use the lift out method to remove concrete in full depth repair areas with minimal disruption to the subgrade and without damage to the remaining concrete. Do not operate equipment, other than compaction equipment, in areas where concrete has been removed. Fill voids deeper than 1 inch with aggregate and compact the material to the level of the existing subgrade.

Place concrete for repairs less than 100 feet long the same day that removals are initiated. Place concrete for repairs longer than 100 feet within 48 hours of initiating removals. Dampen the faces of existing concrete before placing new concrete.

Place, consolidate, finish, and cure concrete according to the following portions of Section 550.04, "Construction Requirements":

- 550.04 C, "Roadbed Condition";
- 550.04 D, "Placing and Spreading Concrete";
- 550.04 E, "Placing Reinforcing Steel and Tie Bars";
- 550.04 F, "Uncontrolled Cracking";
- 550.04 G, "Joints";
- 550.04 H, "Finishing Concrete", except parts 1.d, "Final Surface Finish" and 1.e, "Imprinting Pavement";
- 550.04 J, "Removing Forms";
- 550.04 K, "Sealing Joints"; and
- 550.04 L, "Opening to Traffic".

Provide finished concrete that is flush with all adjacent pavement surfaces. Before the concrete sets, check the repair utilizing a 10 foot straight edge and correct areas that deviate by 1/8 inch or greater.

Texture the repair by dragging a carpet of artificial grass longitudinally over the repaired area.

If repairs involve multiple lanes, fill the gap between the lane under repair and the existing concrete with cold bituminous material. Remove this material before making the repair to the adjacent lane.

(1) Repairs One Lane Wide.

Use a bond breaker along the centerline joint. Tie bars are not required on repairs that are one lane wide.

When the repair falls in a ramp, restore the longitudinal joints crossing the repair, but do not use tie bars.

(2) Repairs Wider Than One Lane.

Before placing the concrete in the second lane, install 30 inch #5 tie bars in the longitudinal joint using the original tie bar pattern. Drill holes for the bars and secure the bars in the holes using epoxy.

(3) Impervious Membrane Cure.

Use a curing compound that meets the requirements of Section 810.01 B.1, "Type 2".

Apply the cure at a minimum rate of 1 gallon per 150 square feet of pavement in one or two applications. If applying two coats, apply the second application within 30 minutes of the first application.

Protect joints that require sealing from infiltration of the curing compound.

Immediately cover the exposed sides of the concrete pavement with curing compound if removing forms exposes curing concrete before the expiration of the curing period.

Immediately reapply curing compound to damaged areas within the curing period.

570.04 A.2.c Dowel Bars

PAGE 284

10/01/15

Replace the first paragraph of Section 570.04 A.2.c with the following:

Drill 1-3/8 inch diameter holes using a rigid frame-mounted drill. Clean the hole, inject epoxy into the hole, and insert dowels.

570.04 A.3.a Concrete Removal

PAGE 285

10/01/15

Replace the third paragraph of Section 570.04 A.3.a with the following:

If existing reinforcing steel is damaged or bent within the 18 inch lap area, replace the damaged reinforcing steel.

570.04 C Grinding

PAGE 285

10/01/15

Replace the first paragraph of Section 570.04 C with the following:

Allow new concrete and dowel bar retrofit patch material to cure for a minimum of 24 hours before grinding.

570.04 C.6 Slurry Removal

PAGE 286

10/01/15

Replace Section 570.04 C.6 with the following:

6. Slurry Removal.

Continuously collect all slurry or residue resulting from the grinding operation.

In areas with speed limits of 45 mph or less and in areas with curb and gutter, dispose of slurry as specified in Section 107.17, "Removed Material".

In areas with speeds greater than 45 mph and without curb and gutter, slurry may be place on the foreslope of the roadway. Prevent slurry from entering pipes, culverts, storm drains, ravines, streams, waterways, wetlands, and all other water conveyances. Install erosion control features as necessary to prevent contamination, or dispose of slurry as specified in Section 107.17, "Removed Material".

570.04 D.1 General**PAGE 286****10/01/16**

Replace the first sentence of the first paragraph with the following:

The Engineer will determine the pavement smoothness by profiling the finished surface of the mainline pavement.

570.04 D.2 Operation**PAGE 286****10/01/16**

Replace the second paragraph with the following:

The Engineer will apply a liquidated damage of \$1,500 per trip for each profile collected after the second profile.

570.05 METHOD OF MEASUREMENT**PAGE 289****10/01/16**

Add the following to Section 570.05:

E. Full-Depth Doweled.

Include the cost of the end dowel bars in the contract unit price "___-Inch Concrete Pavement Repair – Full-Depth Doweled". The cost for intermediate dowel bar assemblies is paid by "Doweled Contraction Joint Assembly".

570.06 BASIS OF PAYMENT**PAGE 289****10/01/15**

Delete the following paragraph from Section 570.06:

Include all costs for saw cuts, steel reinforcing, bar supports, tie bars, and joint sealing in the unit price bid for "___Inch Concrete Pavement Repair - Full-Depth _____".

602.02 EQUIPMENT**PAGE 299
10/1/17****10/01/16 &**

Add the following to Section 602.02.

E. Curing Concrete.

Use a fogging machine as specified in Section 156.02, "Fogger" for exposed surfaces.

F. Shot Blasting Equipment.

Use centrifugal or wheel type shot blasting equipment that is designed to clean concrete surfaces and leave no oil or other foreign material on concrete surfaces. Use a shot blaster capable of collecting blast media and dust.

602.02 A General**PAGE 299****10/01/17**

Add the following sentence to the end of 602.02 A:

Use a plant and equipment as specified in Section 155, "Concrete Equipment".

602.03 A General**PAGE 299****10/01/16**

Delete the last paragraph.

602.04 D Deck Finishing**PAGE 303****10/01/16**

Replace Section 602.04 D with the following:

D. Deck and Bridge Approach Slab Finishing.

Following the screed operations, obtain the final surfacing with a 10 foot long scraping straightedge with a suitable handle. Ensure the final surface has the required crown and does not vary more than 1/8 inch from a 10 foot straightedge laid longitudinally thereon.

Pull a burlap or artificial grass drag over the surface in a longitudinal direction while the concrete is plastic.

Immediately following the artificial grass drag, run a clean metal tine transversely across the deck. Stop the tine 18 inches from the face of the barrier or curb and 6 inches from the beginning and end of the deck or approach slab. The tine may be hand-operated. Use a tine that provides:

- 1/8 inch $\pm$ 1/64 inch groove width;
 - 3/16 inch $\pm$ 1/16 inch groove depth; and
 - 3/4 inch spacing between grooves.
-

602.04 F.1 General**PAGE 304****10/01/17**

Add the following to the end of the third paragraph of Section 602.04 F.1:

Do not use a waterproof material to cover the wet burlap during the curing period.

602.04 F.2 Deck Slab Concrete**PAGE 304****10/01/16**

Delete Section 602.04 F.2 and replace with the following:

2. Deck and Bridge Approach Slab Concrete.

Cure the concrete surface by covering with a double thickness of burlap. Moisten the concrete surface using a light fog spray if the surface begins to dry after finishing and before placement of the wet cure. Keep the burlap continuously moist at all times.

During the curing process do not allow vehicles and equipment on the deck or approach slab and do not perform work on the deck or approach slab.

For deck slab concrete, place the wet cure burlap and start the wet cure within 15 minutes of the passing of the finishing machine.

Delete Section 602.04 G and add the following:

G. Barriers.

1. General.

Use Class AAE-3 concrete for barriers.

Perform corrective actions of any surface that deviates by 3/8 inches or more when measured with a 10 foot straightedge. Make corrections by grinding, filling with an approved epoxy mortar, or replacing.

Except at expansion joints, construct V-grooves that are 3/4 inch wide and 3/4 inch deep in all faces of the barriers at each pier and at equal spaces between piers and abutments at approximately 10 foot spacing.

2. Conventional Forming.

Adequately tie forms to avoid any shifting during concrete placement.

If concrete inserts in the deck slab are holding the barrier forms in place, remove the inserts. Clean and fill the cavities flush with the deck slab using an epoxy resin adhesive.

3. Slipforming.

Conventional form a minimum distance of 4 feet on each side of expansion joints before slip forming.

After the reinforcement is installed, check the clear distance between the reinforcement and the slipform for the entire length of the pour.

The Engineer will allow slab overhang distance to be increased up to 1 inch provided the specified gutterline is maintained.

The Engineer will allow a radius to be used instead of a bevel on all edges of the barrier.

602.04 J Penetrating Water Repellent Treatment of Concrete Surfaces

Replace section 602.04 J with the following:

J. Penetrating Water Repellent Treatment.

Apply penetrating water repellent solution a minimum of 21 days after placement of the concrete bridge deck and approach slabs.

Apply penetrating water repellent solution to the following surfaces:

- Driving surfaces of bridge deck;
- Approach slabs;
- Concrete medians;
- Front faces and tops of curbs; and
- Front faces and tops of barriers.

Remove the barrier forms before applying treatment to surfaces. Clean all surfaces receiving treatment using either sandblasting, shot blasting, or water-washing equipment. Remove dirt, dust, grease, oil, laitance, asphalt, or other materials that may inhibit the coverage and penetration of the solution. Use hand tools and penetrating water repellent solution manufacturer's approved solvents to remove any bonded foreign materials. Do not remove or alter the existing surface finish or expose the coarse aggregate.

Allow any wet concrete surfaces to dry a minimum of 48 hours or longer if required by the solution manufacturer.

Apply the penetrating water repellent solution when the following conditions are met:

- The air temperature is within the following:
 - o 40 °F and rising; or
 - o 95 °F and falling;
- Wind is less than 25 mph; and
- Rain is not expected within 4 hours.

Use airless equipment that has a pressure range between 15 to 40 psi. Apply the repellent treatment solution uniformly so that one gallon of material does not spread over more than 200 sf. If the repellent solution manufacturer recommends a coverage of an area less than 200 sf per gallon, use the manufacturer's recommended rate. Squeegee or broom excess material to avoid ponding.

602.04 K.1 General**PAGE 307****10/01/15**

Replace Section 602.04 K.1 with the following:

1. General.

When shown in the plans, apply membrane and primer in dry weather and when the air temperature is above 40°F. Apply to surfaces that are dry, clean, free of sharp protrusions and above 40°F.

604.03 B.1 General**PAGE 309****10/01/16**

Replace Section 604.03 B.1 with the following:

1. General.

Develop a mix design that produces concrete that will achieve a minimum compressive strength of 5,000 psi within 28 days.

Section 802.01 H, "Air Content" will not apply.

Obtain the Engineer's approval for admixtures before developing the mix design. Include approved admixtures in the mix design.

Perform tests to determine the concrete's compressive strength using 6 inch by 12 inch cylinders.

604.03 B.3 Trial Mix**PAGE 310****10/01/15**

Replace the "AASHTO T 23" test requirement with "ND T 23"

604.03 E.1 Concrete**PAGE 310****10/01/15**

Replace the "AASHTO T 23" test requirement with "ND T 23"

604.04 B Work Drawings**PAGE 311****10/01/16**

Replace Section 604.04 B with the following:

B. Work Drawings.

Provide work drawings that include:

- Beam dimensions;
- Size and location of all reinforcing and prestressing steel including;
 - o Strand layout;
 - o Pull down locations;
 - o Tensioning forces;
 - o Elongation; and
 - o Proposed changes in the reinforcing steel;
- Initial prestress forces;
- Location of handling hooks or devices; and
- Losses in the prestress due to:
 - o Elastic shortening;
 - o Shrinking or creeping of concrete; and
 - o Relaxation of steel stress as determined by the Contractor method of stressing.

Submit calculations and work drawings that are signed, sealed, and dated by a Professional Engineer registered in the State of North Dakota as set forth in NDCC Title 43.

604.04 D Placing Concrete**PAGE 312****10/01/16**

Replace Section 604.04 D with the following:

D. Placing Concrete.

Place concrete in forms made entirely of steel.

Vibrate concrete for the beams. Vibrate without displacement of reinforcing, conduits, voids, or wire. Vibrate for a sufficient duration and intensity to thoroughly consolidate the concrete without causing segregation.

Rough float and transversely broom the top of the beams.

606.04 A Design and Manufacture**PAGE 314****10/01/15**

Replace the second paragraph in Section 606.04 A with the following:

Use an ACPA or NPCA certified plant in the construction.

624.03 B E-Rail Retrofit**PAGE 336****10/01/16**

Replace ASTM A 307, Grade C with ASTM F 1554, Grade 36.

624.03 C Free Standing Rail Retrofit**PAGE 336****10/01/16**

Replace ASTM A 307, Grade C with ASTM F 1554, Grade 36.

650.02 EQUIPMENT**PAGE 341****10/01/16**

Replace the Equipment list with the following:

Equipment	Section
Mobile Mixer	155.03 C
Bridge Deck Overlays Finishing Equipment	155.07 D
Sawing	155.09
Grinding	155.11
Concrete Buggy	155.12
Fogger	156.02
Milling Machine	156.03

650.03 A Concrete**PAGE 342****10/01/16**

Delete the last paragraph in its entirety.

650.03 B Low Slump Concrete**PAGE 342****10/01/17**

Replace Section 650.03 B with the following:

B. Low Slump Concrete.**1. General.**

Item	Section
Fine Aggregate	802.01 C.3
Coarse Aggregate – Size 5	802.01 C.2
Concrete Admixtures	808
Burlap Cloth	810.01 A
Water	812

Use cement that meets the requirements of AASHTO M 85, Type I or Type IA.

Mix low slump concrete using 8.75 bags of cement per cubic yard and a maximum water-cement ration of 0.42.

Use coarse aggregate composed of crushed stone. Use crushed stone that has at least one fractured face on 75 percent of the particles retained on the number 4 sieve.

Entrain air within the concrete as specified in Section 802.01 H, "Air Content", except supply concrete with an air content between 5.0 and 7.0 percent of the volume of the concrete at the time of placement.

Produce concrete that has a slump of 1 inch or less, when determined according to ND T 119.

Use a mobile mixer to produce low slump concrete.

2. Mix Design.

Use a mix design that has the percentages shown in Table 650-01.

Table 650-01	
Coarse Aggregate	31%
Fine Aggregate	31%
Air	6%
Water	16%
Cement	16%

650.04 C Removals with Hydrodemolition Equipment

PAGE 343

10/01/16

Add the following to 650.04 C:

In areas inaccessible for using hydrodemolition equipment, remove concrete using hand held hydrodemolition equipment or mechanical equipment.

650.04 C.1 Class 1H

PAGE 343

10/01/16

Delete the last paragraph in 650.04 C.1.

650.04 G Finishing

PAGE 345

10/01/16

Remove and replace the last paragraph of 650.04 G with the following:

Pull a burlap or artificial grass drag over the surface in a longitudinal direction while the concrete is plastic. Immediately follow the drag with a metal tine finish as specified in Section 602.04 D, "Deck and Approach Slab Finishing".

650.04 I Curing

PAGE 345

10/01/16

Replace all instances of Section 602.04 F.2, "Deck Slab Concrete" with the following:

Section 602.04 F.2, "Deck and Bridge Approach Slab Concrete".

650.05 Method of Measurement

PAGE 346

10/01/17

Add the following to the end of Section 650.05:

C. Hydrodemolition Removals.

Removals made beyond the designated limits stated in Sections 650.04 C.1, "Class 1H", and 650.04 C.2, "Class 2H" will not be paid for under any classification of removal.

Replace the Table 702-01 with the following:

Table 702-01
Payment for Mobilization

Original Contract Amount Earned	Payment will be the Lesser of:	
	Mobilization Bid Amount	Original Contract Amount
5%	25%	2.5%
10%	50%	5.0%
50%	100%	7.5%
75%	100%	10.0%

704.03 A General**PAGE 356****10/01/17**

Add the following to the end of 704.03 A:

Provide traffic control devices that meet the crash testing requirements of the appropriate classification under NCHRP 350. The Engineer will accept devices that meet the requirements of MASH.

Submit a Certificate of Compliance for all temporary traffic control materials before installation.

Replace 704.04 A.1 with the following:

1. Requirements Before Device Installation.

Before beginning work, coordinate and hold a meeting with the Engineer to review the traffic control plans.

704.04 B Traffic Control Device Condition Classifications**PAGE 359****10/01/15**

Replace all instances of "ATSAA" in Section 704.04 B with "ATSSA".

704.04 C.5 Flaggers**PAGE 362****10/01/17**

Replace the web address in the first paragraph with <http://www.ndsc.org>.

Replace the last sentence of the second paragraph with the following:

The handbook is available for download at www.ndltp.org and at <http://www.ndsc.org>.

704.04 M Protection Vehicle with Truck Mounted Attenuation Device (TMA)**PAGE 366**
10/01/15

Replace the last paragraph of 704.04 M with the following:

Equip the protection vehicle with an advance warning flashing or sequencing arrow panel conforming to Section 704.03 M, "Advance Warning Flasher or Sequencing Arrow Panel" and the MUTCD.

704.04 O Traffic Control for Uneven Pavement**PAGE 367**
10/01/15
10/01/17

Replace all instances of "Sign W20-52-24" in Section 704.04 O with "W20-52-54".

Change the title of Section 704.04 O.3.b to "Uneven Pavement Greater Than 2 Inches."

Add the following to 704.04 O:

4. Uneven Shoulder and Adjacent Lane.

If the shoulder and adjacent driving lane are not even at the end of the day, the following criteria will apply:

Install "Shoulder Drop Off" signs (Sign W8-9a-48) at the following locations:

- In advance of the drop off;
- Spaced at each mile from the advance sign; and
- At major intersections (CMC routes, state and US highways, and Interstate ramps).

If the difference in elevation between the shoulder and the driving lane is 2" or greater, construct a slough at the edge of the driving lane that is 4:1 or flatter.

If the difference in elevation between the shoulder and the driving lane is less than 2", no slough is required.

704.04 O.1 General.**Page 367**
10/01/17

Replace 704.04 O.1 with the following:

1. General.

If pavement in adjacent lanes or the shoulder adjacent to an open lane is uneven at the completion of a day's work, install traffic control devices as specified in this section.

Leave these devices in place until the pavement surface in the adjacent lanes or shoulder are even.

706.02 A General**PAGE 372**
10/01/16

Add the following to the end of Section 706.02 A:

Furnish Aggregate and Bituminous labs with DSL broadband internet and a router that broadcasts Wi-Fi and will allow for hard wiring of a computer.

Replace Section 706.02 B with the following:

B. Aggregate Laboratory.

Place the laboratory at a location acceptable to the Engineer. The Engineer will have the full control and the exclusive use of the laboratory.

Provide a laboratory with a minimum floor area of 230 square feet, minimum exterior width of 8 feet, and a minimum ceiling height of 7 feet.

Partition the building into a minimum of two rooms, a smaller room having a floor area of approximately 70 square feet.

Provide a workbench with a length of 7 feet in the smaller room.

Provide the following equipment in the larger room:

1. Mechanical shaker capable of receiving 6 trays that have a screen size of 14 inches by 14 inches and the following compatible sieves:
 - 1-1/2 inch;
 - 1-1/4 inch;
 - 1 inch;
 - 3/4 inch;
 - 1/2 inch;
 - 3/8 inch;
 - No. 4; and
 - An enclosed dust pan.
2. Mary Ann shaker capable of being adjusted to receive 8 and 12 inch diameter sieves;
3. Splitter with a maximum hopper capacity of 0.6 cubic feet;
4. Splitter with a minimum hopper capacity of 1.0 cubic feet; and
5. An exhaust fan capable of changing the air in the room every minute.

709.04 C Geosynthetic Geogrid (Type G)

Replace Section 709.04 C with the following:

C. Geosynthetic Geogrid (Type G).

Unroll geogrid parallel to the centerline of the road. Do not drag the geogrid across the underlying material. Use geogrid widths that produce overlaps of parallel rolls at the centerline and at the shoulders and so that no overlaps are required along wheel paths.

Overlap geogrid a minimum of 30 inches at all splices and joints when placing on subgrade. Overlap geogrid a minimum of 12 inches at all splices and joints when placing on base.

Construct overlaps at the end of a roll so the previous roll laps over the subsequent roll in the direction of the cover material placement. Mechanically tie transverse joints to maintain the minimum overlap. Place pins, staples, or small piles of aggregate to maintain the geogrid position before placement of cover material.

Stagger end overlaps at least 10 feet from other end overlaps in parallel rolls. Cut or increase overlaps to conform to curves.

Patch damaged areas of geogrid. Place a patch that overlaps the damaged area by 36 inches on all sides. Mechanically tie the patch to the underlying grid.

Place the first lift of material over geogrid installed on subgrade to a depth of 10 inches of loose material. Place the first lift of material over geogrid installed on base to a depth of 6 inches of loose material.

Use low ground pressure equipment to spread the initial lift of material. If rutting occurs, fill the ruts with additional material before placing the subsequent lift. Do not blade out ruts. Do not turn construction equipment on the first layer of material.

714.03 A Culverts and Storm Drains**PAGE 378
10/1/17****10/01/16 &**

Replace the last paragraph of Section 714.03 A with the following:

Provide mortar consisting of a mixture of one part Portland Cement to two parts mortar sand, and sufficient water to furnish proper consistency.

Where placing new end sections on existing pipe, identify whether the type of end section needed is male or female.

Add the following to the end of Section 714.03 A:

If using polymer coated corrugated steel pipe, install end sections that meet the requirements of Section 830.02 C "Polymer Coated Corrugated Steel Pipes" or 830.02 B, "Metallic (Zinc or Aluminum) Coated Corrugated Steel Culverts, Storm Drains, and Underdrains".

714.04 A.1 Bedding**PAGE 379****10/01/15**

Delete the first paragraph from Section 714.04 A.1.

714.04 A.3 Joining Pipe**PAGE 380****10/01/17**

Delete the last paragraph.

714.04 A.5 Deflection Testing**PAGE 380****10/01/16**

Replace the second paragraph of 714.04 A.5 with the following;

The Engineer will visually inspect all metal and thermoplastic pipe under unpaved approaches for deflection. If the Engineer sees any deflection, the Engineer will require the Contractor to pass a nine point mandrel or other approved object through the pipe to check for deflection. Use a mandrel with a diameter not less than 95 percent of the inside diameter of the pipe. If the mandrel cannot be passed through the pipe, replace the pipe.

714.04 A.6 Connection to Manholes, Inlets, and Pipes**PAGE 380****10/01/15**

Replace Section 714.04 A.6 with the following:

6. Connection to Manholes, Inlets, and Pipes.

If connections are required to a manhole, inlet barrel, or pipe entrance; connect pipe by cutting the opening and grouting in the connecting pipe.

714.04 A.7 Compaction Control for Aggregate**PAGE 380****10/01/15**

Replace Section 714.04 A.7 with the following:

7. Compaction Control for Aggregate.

Compact aggregate according to Section 203.04 E.2, "Compaction Control, Type A". The moisture content of the aggregate at the time of compaction shall be not less than 2.0 percentage points below, nor more than 3.0 percentage points above the optimum moisture content.

Compact aggregate for approach pipes according to the conduit manufacturer's recommendation

Use a maximum lift thickness of 6 inches.

714.04 A.8 Compaction Control for Non-Aggregate Material**PAGE 380****10/01/15**

Replace Section 714.04 A.8 with the following:

8. Compaction Control for Non-Aggregate Material.

If Common Excavation Type A is specified, follow the compaction requirements in Section 203.04 E.2, "Compaction Control, Type A". If Common Excavation Type B is specified, follow the compaction requirements in Section 203.04 E.3, "Compaction Control, Type B".

Compact material for approach pipes according to the conduit manufacturer's recommendations.

748.03 MATERIALS**PAGE 393****10/01/15**

Add the following item to the table:

Impervious Membrane Cure	810.01 B.1 or 810.01 B.2
--------------------------	-----------------------------

750.03 MATERIALS**PAGE 395****10/01/15**

Add the following item to the table:

Impervious Membrane Cure	810.01 B
--------------------------	----------

Replace the paragraph directly after the table with the following:

For imprinted concrete use any size coarse aggregate specified in Section 802.01 C.2, "Coarse Aggregate". Produce a mix that consists of 60 percent fine aggregate and 40 percent coarse aggregate

752.05 Method of Measurement**PAGE 399****10/01/17**

Remove the last paragraph from 752.05:

752.06 Basis of Payment**PAGE 400****10/01/17**

Replace "Fence Terminal – Wood Posts" in the Pay Item List with "Fence Terminal".

754.03 Materials**PAGE 401****10/01/17**

Replace Concrete Class AAE with Concrete Class AE.

754.04 D.2 Anchor for Telescoping Perforated Tubes Supports**PAGE 403****10/01/15**

Replace the last two paragraphs in Section 754.04 D.2 with the following:

If installation is in either concrete or bituminous material, omit the soil plate or use a surface mount anchor base.

Core concrete and bituminous surfacing before installing the anchor unit and fill the cored area with like material that matches the surrounding surfacing.

754.04 F Removing and Resetting Signs and Supports**PAGE 407****10/01/15****10/01/16**

Replace the Section 754.04 F with the following:

F. Removing and Resetting Signs and Supports.**1. General.**

Remove and reset existing signs and supports as specified. Stockpile all signs and supports not to be reset at designated locations within the project limits. The Engineer will arrange to have stockpiled signs removed from the project limits and delivered to the Department's facility.

Replace removed or reset signs and supports that are damaged during removing, resetting, or stockpiling at no additional cost to the Department.

Remove existing signs and supports as construction progresses, and immediately reset or install new signs.

The Engineer will allow the temporary reset of existing signs, or the temporary installation of new signs. Include the cost of installing and resetting signs temporarily in the price bid for other items.

2. Reset Sign Panel.

Remove sign panels from existing supports. Reinstall sign panels, angles, stringers, and steel channels on new supports.

Provide all necessary brackets and hardware to attach sign panels, angles, stringers, and steel channels on new supports.

3. Reset Sign Support.

Remove sign panels from existing supports. Reinstall support and install new sign panels, angles, stringers, and steel channels.

Provide all necessary brackets and hardware to attach sign panels, angles, stringers, and steel channels on supports.

754.04 I Overlay Panel Sign Refacing

PAGE 407

10/01/15

Replace the second paragraph of Section 754.04 I with the following:

Remove the legend, border, and symbol on those signs that have demountable copy and remove any existing sign overlays and place overlay panels on the signs. Do not remove direct applied sheeting legends, borders, and symbols. Direct apply the new legends, borders, and symbols to the overlay panels and install on the existing signs.

754.04 J Auxiliary Signs

PAGE 408

10/01/15

Replace the Section 754.04 J with the following:

J. Auxiliary Signs.

Install auxiliary signs used with route markers with the same background color as the route markers:

- Interstate, Blue;
- Interstate Business Loop, Green;
- State, White;
- US, White; and
- County, Blue.

754.05 METHOD OF MEASUREMENT

PAGE 408

10/01/15

Add the following to Section 754.05:

D. Reset Sign Panel.

The Engineer will measure the item “Reset Sign Panel” by the number of locations a sign or sign assembly has been reset.

E. Reset Sign Support.

The Engineer will measure the item “Reset Sign Support” by each leg of a sign support that has been reset.

760.03 Materials

PAGE 410

10/01/15

Replace Section 760.03 with the following:

760.03 MATERIALS

Use one of the following materials when applying a fog coat to rumble strips:

- SS-1h, Section 818.02 F, “Anionic Emulsified Asphalt”;
- MS-1 Section 818.02 F, “Anionic Emulsified Asphalt”; or

- CSS-1h Section 818.02 E.1 “Cationic Emulsified Asphalt”.

When MS-1 is used it may be diluted by the supplier or the Contractor.

760.04 F Traffic Control**PAGE 411****10/01/15**

Replace Section 760.04 F with the following:

F. Traffic Control.**1. General.**

Use a TMA as specified in Section 704.04 M, “Protection Vehicle with Truck Mounted Attenuation Device (TMA)”.

2. Centerline Rumble Strip Installation.

Provide flaggers and 2 sets of the required flagger signing for each direction of travel. Ensure that at least one set of the required flagger signing is in place in each direction of travel whenever work centerline installation is performed. Limit the work area to a maximum of 3 miles.

760.05 METHOD OF MEASUREMENT**PAGE 411****10/01/15****10/01/16**

Add the following to the end of Section 760.05:

The Engineer will measure flagging and traffic control signs as specified in Section 704.05, “Method of Measurement.

The Engineer will count each leg of an intersection receiving rumbles strips as one “Set”.

760.06 BASIS OF PAYMENT**PAGE 411****10/01/15****10/01/16**

Delete “Rumble Strips – Intersection, Each” and replace with “Rumble Strips – Intersection, Set”.

Add the following paragraph after the list of pay items in Section 760.06:

Flagging and traffic control signs will be paid for as specified in Section 704.06, “Basis of Payment”.

762.04 A.4 Grooved Pavement Markings**PAGE 413****10/01/16**

Replace Section 762.04 A.4 with the following:

4. Grooved Pavement Markings.**a. General.**

For messages, groove the same area as the messages. Do not groove a rectangular area to contain the message.

After grinding, blow the grooved slot clean to remove any residue and loose material before the installation of the pavement marking. When wet-grinding, immediately pressure wash the grooved slot to remove residue.

b. Grooves for Preformed Patterned Pavement Marking Film.

If specified in the plans, groove a recess into the pavement surface for each stripe that meets the tolerances specified in Table 762-01.

**Table 762-01
Preformed Patterned Pavement Marking Film Grooves**

Parameter	Tolerance
Depth	90 to 110 mils
Smoothness	Ridges, within the groove, shall be no more than 6 mils higher than either adjacent valley
Width	line width plus 1/2 inch
Length	line length plus 3 inches per end of line
Line End Tapers	3 inches

If pavement marking installation does not occur within 24 hours of grinding, sandblast the groove and install the pavement markings the same day the sandblasting occurs.

c. Grooves for Epoxy Paint.

If specified in the plans, groove a recess into the pavement surface for each stripe that meets the tolerances specified in Table 762-02.

**Table 762-02
Epoxy Paint Grooves**

Parameter	Tolerance
Depth	45 to 55 mils
Smoothness	Ridges, within the groove, shall be no more than 6 mils higher than either adjacent valley
Width	line width plus 1 inch
Length (skips)	line length plus 3 inches per end of line
Line End Tapers	3 inches

After creating the groove, prepare the surface in accordance with the manufacturer's instruction.

762.04 C.1.a Application

PAGE 415 10/1/16

Delete the last paragraph of Section 762.04 C.1.a.

762.04 C.1.b. Data Logging System (DLS)

PAGE 415 10/1/16

Replace the first paragraph of Section 762.04 C.1.b with the following:

The use of a computerized DLS is required for monitoring the application of water based paint and epoxy pavement markings when the plan quantity of long lines for liquid pavement marking is 30,000 linear feet or greater.

Replace Section 762.04 C.2.a with the following:

a. Method of Application.

Allow new bituminous treatment to cool to a temperature below 125°F and cure for a period of 72 hours before applying permanent pavement marking.

Apply pavement marking paint and glass beads separately by machine. Use hand application where machine application is not feasible.

Apply water based paint when the air and pavement surface temperatures are 45°F or warmer. Do not apply paint when the air or pavement surface temperatures are forecasted to be colder than the minimum application temperature during the curing period of the paint. Apply pavement marking paint and beads only during daylight hours.

Replace the last paragraph of Section 762.04 C.3.a with the following:

Place epoxy material after bituminous material has been in place for a minimum of 14 days.

Replace the second paragraph of Section 762.04 D.2 with the following:

Place the short term pavement markings at the rate specified in Section 762.04 C.2.b, “Rate of Application” with the following exception:

Exception: When the permanent pavement marking is specified as epoxy paint, apply the short term pavement marking at a thickness of 10 mils.

Replace Section 762.04 D.3 with the following:

3. Short-Term Pavement Marking – Type R (Removable).

Install Type R markings when the air and pavement temperatures are at a minimum of 50°F and expected to remain above 50°F.

If the air or pavement temperature falls below 50°F during installation, Type NR markings may be installed as specified in Section 762.04 D.2, “Short-Term Pavement Markings – Type NR (Non-Removable)”. Install Type R markings once the specified temperatures exist.

Remove Type R markings once they are no longer necessary for traffic control operations. If Type NR markings were substituted for Type R markings, remove the Type NR markings using a method that does not leave a scar on the pavement.

Add the following to the end of the first paragraph:

If Type NR markings are substituted for Type R markings due to temperature requirements, the markings will be paid for at the contract unit price for Type R markings.

764.04 A General

Replace section 764.04 A with the following:

A. General.**1. Installation Requirements.**

Before guardrail removal, installation, and extension, develop a written construction schedule for work at the guardrail location, and have the schedule reviewed by the Engineer. Include a sequence of controlling items and the timing of each in the schedule of work. Do not stop work between controlling items for more than four working days at any individual run.

Install the guardrail to produce a smooth continuous line with uniform height.

Set posts plumb with the front faces uniformly aligned.

Backfill posts with approved material placed and compacted in 6 inch layers, using a mechanical tamper.

Place hot bituminous pavement before guardrail post installation. Drill post holes for the new or reset guardrail through the hot bituminous pavement. Install the post in the remaining material by augured holes or driving.

When posts are installed in augured holes, backfill the holes with approved material without displacing the post alignment. Remove surplus excavated material.

When posts are driven, make the diameter of the hole in the bituminous pavement sufficient so when the soil around a post heaves up while the post is driven, the remaining asphalt will not move. If driving causes damage to posts, replace the post and install the replacement post by auguring the hole. Use a post cap if making minor vertical adjustments with a sledgehammer or maul.

Place a maximum thickness of 2 inches of bituminous material around each post to blend the post hole into the surrounding bituminous material.

Do not burn or weld after the material has been galvanized. All holes shall be machined drilled.

Repair areas exposed by cutting or drilling and any damaged galvanized coating according to Section 854.02, "Damaged Galvanized Coatings".

Hang guardrail and end terminals for individual runs in a single day.

2. Installation on Roadways Open to Public Traffic.

At locations of guardrail installation where the roadway is open to traffic, complete the installation of each individual run within 10 working days from the date all controlling items allow guardrail installation to begin.

Install delineator drums, as specified in Section 704, "Temporary Traffic Control", at 25-foot intervals adjacent to areas meeting one of the following conditions:

- Existing guardrail was removed and new guardrail will be installed;
- Where no guardrail previously existed but will be installed; or
- At guardrail extensions.

Leave the drums in place until guardrail installation at that location is complete and accepted by the Engineer.

3. Failure to Comply with Installation Requirements.

Provide temporary protection according to the plans at an object if unable to complete the required work in the specified time. Do not use material installed for this purpose in the final guardrail installation. The Department will not make separate payment for attenuation provided due to the Contractor's inability to complete the work in the specified time.

If the Contractor fails to comply with all requirements of Section 764.04 A.2, "Installation on Roadways Open to Public Traffic", the Engineer will perform one or both of the following:

1. The Engineer will apply a contract price reduction of \$1000 per day if the deficiency is not remedied within 24 hours of notification to correct the item.
2. The Engineer will have the temporary protection installed by other forces and deduct the costs from monies due or that become due to the Contractor.

If the Engineer uses other forces to install temporary protections, remove and dispose of the materials installed by the other forces at no additional cost to the Department.

764.04 D Removal of Guardrail

PAGE 422

10/1/17

Replace section 764.04 D with the following:

D. Removal of Guardrail.

1. General.

If the Engineer determines that the concrete anchors do not interfere with other construction, cut off concrete anchors one foot below ground level. When concrete anchors are removed, backfill the holes with approved material in 6 inch layers. Thoroughly tamp each layer using a mechanical tamper. If concrete anchors are cut off or removed, shape the surface to match the surrounding area and dispose of the removed concrete.

When removing guardrail posts and not replacing the posts in the same hole, backfill the hole with approved material. When the existing surrounding surface is bituminous, place 2 inches of bituminous material at the top of the hole to match existing surrounding surface.

2. Removed Guardrail in Locations Where There will be no permanent guardrail.

At locations where guardrail is to be removed and no guardrail will exist upon completion of the work, leave the guardrail in place until the hazard associated with the guardrail is no longer present and all work is complete except for that which requires the guardrail to be removed.

764.04 G Completion Requirements

PAGE 423

10/1/17

Replace section 764.04 G Completion Requirements with the following:

G. Reserved.

Reserved.

764.04 H Attenuation Devices

PAGE 423 10/1/17

Replace the first paragraph with the following:

Install attenuating devices that meet the appropriate MASH testing Requirements and have an eligibility letter from FHWA.

766.04 CONSTRUCTION REQUIREMENTS

**PAGE 425 10/01/15 &
10/1/17**

Replace Section 766.04 with the following:

766.04 CONSTRUCTION REQUIREMENTS

A. General.

The mailbox owner will furnish a postal service approved mailbox. Install the furnished mailbox on the new support system.

B. Temporary Relocation.

If construction activities require the removal of the support system and delayed installation of the new support system, reset the existing support system at a location approved by the Engineer and postal service.

If construction activities require the removal of the support system and delayed installation of the new support system, relocate mailboxes to a location approved by the Engineer and postal service.

If existing mailboxes meet NCHRP 350 or MASH requirements, they may be reset temporarily during construction. If the existing support does not meet NCHRP 350 or MASH, place temporarily located mailboxes on supports that meet MASH requirements. If there is no support that meets MASH requirements, perform one of the following actions:

- Place them outside the clear zone;
- Place them on a 4 × 4 inch wood post; or
- Reset them using assemblies shown in the plans.

After construction has progressed to allow permanent installation, install the mailbox assemblies and mailboxes at the specified locations.

770.03 A General

PAGE 426 10/01/17

Replace Concrete Class AAE-3 with Concrete Class AE-3.

770.04 C. Concrete Foundation

PAGE 428 10/01/17

Replace Section 770.04 C with the following:

C. Concrete Foundation.

Cast concrete foundations in place. Place the concrete in one continuous operation with no construction joints. Consolidate the concrete according to Section 602.04 C.2 "Vibration".

Allow the concrete foundation to cure for 7 days before placing poles on the foundation.

Do not grout between the foundation and the pole base.

Install anchor bolts according to Section 754.04 D.5.b, "Anchor Bolt Installation".

770.04 D.1 General**PAGE 428****10/01/15**

Add the following to the end of Section 770.04 D.1:

Install duct seal on all conduits containing cables at controller cabinets, traffic signal bases, and pull boxes.

770.04 G Light Standards**PAGE 430****10/01/16**

Replace the first paragraph of Section 770.04 G with the following:

Plumb the light standard with leveling nuts. Adjust the leveling nuts on assembled light standards before 10:00 am. Tighten anchor nuts according to Section 754.04 D.5.c "Anchor Bolt Tightening".

772.03 A General**PAGE 433****10/01/17**

Replace Concrete Class AAE-3 with Concrete Class AE-3.

772.03 D Wiring Diagrams**PAGE 434****10/01/15**

Replace the first paragraph with the following:

At the time the cabinet and control equipment is accepted, furnish a traffic signal cabinet wiring diagrams showing all circuits and parts in detail. Place the wiring diagram in the signal cabinet and submit one PDF copy to the Engineer.

772.04 A General**PAGE 435****10/01/15**

Replace the second paragraph with the following:

Provide and bear all costs for the electrical service necessary to operate and maintain the traffic signal system until the system is accepted as specified in Section 772.04 N.3, "Supplemental Inspections and Final Acceptance".

772.04 E.8 Final Testing**PAGE 439****10/01/15**

Replace Section 772.04 E.8 with the following:

After installing sealer, perform the tests specified in Section 772.04 E.6, "Initial Testing". Record the test results on SFN 60844 *Traffic Signal Loop Detector Test Report* and submit the form to the Engineer.

Replace number 3 with the following:

Install and tighten the anchor bolts as specified in Section 754.04 D.5, "Overhead Sign Structures".

772.04 N Tests and Acceptance**PAGE 442****10/01/15**

Replace 772.04 N with the following:

1. General.

Furnish all instruments and personnel required for testing and record test results. If a subcontractor performed electrical work, ensure the subcontractor is present during testing and inspection.

The Engineer will perform the initial and final inspections when:

- Winds are 30 mph or less;
- Ambient temperature is 15°F or greater; and
- It is not raining or snowing.

a. Malfunction Management Unit Test.

Before uncovering the signal heads, perform a malfunction management unit test. Record the test results on SFN 60836 *Traffic Signal Malfunction Management Unit Test* and submit the results to the Engineer.

b. Ground Test.

Before opening to traffic, perform a ground test. The maximum allowable resistance at the controller cabinet is 10 Ohms. The maximum allowable resistance at each traffic signal standard is 25 Ohms. Record and submit the test results on SFN 60834, *Traffic Signal Ground Test*.

2. Initial Inspection.

After the signal system is operational and open to traffic, submit a request to schedule the initial inspection. The system must be fully operational for a minimum of 15 days before the Engineer will perform the initial inspection. The Engineer will record the inspection results on form SFN 59867, *Traffic Signal Inspection Checklist* or SFN 60845 *Flashing Beacon Inspection Checklist*. Copies of completed forms will be sent to the Contractor.

3. Supplemental Inspections and Final Acceptance.

After performing corrections, submit a request for a supplemental inspection. The Engineer will perform a supplemental inspection within 30 days of receiving the request.

If this inspection discloses any unsatisfactory items, the Engineer will provide the Contractor with a written list of items that require correction. After correcting the items, request another supplemental inspection.

If the Engineer determines that the work is complete, the signal system must operate for 14 consecutive days without interruption from defective equipment or improper workmanship.

If the signal system fails within the 14 days, make necessary repairs. After repairs are complete, request another supplemental inspection.

If the signal system operates for 14 consecutive days without interruption from defective equipment or improper workmanship, the Engineer will consider the last supplemental inspection as the final inspection and will accept the signal system.

802.01 A.1 Development**PAGE 453****10/01/16**

Replace the second paragraph of Section 802.01 A.1 with the following:

Design a mix that will attain a compressive strength of 3,000 psi after 7 days or a flexural strength of 450 psi after 7 days. Mix designs used for Section 550, "Concrete Pavement" will be required to attain both a compressive strength of 3,000 psi and a flexural strength of 450 psi after 7 days. Measure compressive strength according to AASHTO T 22 and flexural strength according to AASHTO T 97. Apply a correction factor of 0.92 when using 4 inch x 8 inch concrete cylinders.

802.01 B Cement**PAGE 453****10/01/17**

Delete section 802.01 B.3.

802.01 C.2 Coarse Aggregate**PAGE 454****10/01/15**

Replace Table 802-02 with the following:

**Table 802-02
Miscellaneous Coarse Aggregate Properties**

Test	Method	Max. Percent by Weight of the Plus No. 4 fraction
Shale	NDDOT 3	0.7
Iron oxide particles	NDDOT 3	4.0 ¹
Lignite and other coal	NDDOT 3	0.5
Soft Particles (Excluding Shale, Iron oxide particles and Lignite and other coal)	NDDOT 3	2.5
Thin or Elongated Pieces	NDDOT 3	15
L.A. Abrasion	AASHTO T 96	40.0
Soundness (Sodium Sulfate)	AASHTO T 104	12

¹ For concrete for spall repairs and bridge deck overlays, the maximum iron oxide particles shall be 2.0 percent.

802.01 C.3 Fine Aggregate**PAGE 454****10/01/15**

Replace the second paragraph of Section 802.01 C.3 with the following:

Test fine aggregates in accordance with AASHTO T 21. If the results of the analysis are darker than the standard color, determine the compressive strength of mortar mixed using the aggregate in accordance with AASHTO T 71. If the results of the AASHTO T 71 test result in a relative strength less than 95 percent, do not use the fine aggregate.

Replace the last paragraph with the following:

Supply concrete with an air content between 5.0 and 8.0 percent of the volume of the concrete at the time of placement.

Delete 802.01 J "Tests on Concrete" and replace with the following:

J. Tests on Concrete.

Furnish the concrete necessary for the tests.

Near the site of concrete placement, provide a level area protected from construction activities near the site of placement for the Engineer to conduct tests.

Add the following to the end of Section 810.01 B:

3. Curing Compound for Pigmented Concrete.

Use a curing compound when curing pigmented concrete that meets the requirements of ASTM C 309 Type 1-D.

Replace Table 816-02 with the following:

Table 816-02
Aggregates for Blotter and Seal coats

Sieve Size Or Testing Method	Aggregate Class					
	41	41M	42	43	44	45
	Percent Passing or Testing Requirement					
5/8 inch					100	
3/8 inch	100					100
No. 4	20-70				90-100	85-100
No. 8	0-17		2-20	0-17		
No. 16						45-80
No. 50						10-30
No. 200	0-1.5		0-5	0-2	0-20	0-3
ND T 113, Shale (max %)	8.0%					3.0%
AASHTO T 96, L.A. Abrasion (max %)	40%					
NDDOT 4, Fractured Faces ¹		50%				

**Table 816-02
Aggregates for Blotter and Seal coats**

Sieve Size Or Testing Method	Aggregate Class					
	41	41M	42	43	44	45
	Percent Passing or Testing Requirement					

¹ Minimum weight percentage allowable for the portion of the aggregate retained on a No. 4 sieve having at least 1 fractured face for Class 41M.

816.04 AGGREGATE FOR MICRO SURFACING

PAGE 467

10/01/15

Replace Section 816.04 with the following:

816.04 AGGREGATE FOR MICRO SURFACING

A. General.

Use aggregate that is manufactured crushed stone such as granite, slag, limestone, or other high quality aggregate or combination thereof.

Before stockpiling aggregate, perform the tests specified in Table 816-03.

Table 816-03

Test	Test Method	Requirement
Soundness of Aggregates by Use of Sodium Sulfate	AASHTO T 104	15% Max
Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine ¹	AASHTO T 96	30% Max
Deleterious Substances	ND T 176	60 or Higher

¹ Perform the AASHTO T 96 test on the parent aggregate

B. Mix Design.

Develop a mix design using aggregate that meets the requirements of Table 816-04. Establish mix design target values for each sieve and submit the mix design before beginning placement operations.

**Table 816-04
Aggregate Gradation for Development of Mix Design**

SIEVE SIZE	TYPE II %PASSING	TYPE III %PASSING
3/8"	100	100
#4	90 – 100	70 – 90
#8	65 – 90	45 – 70
#16	45 – 70	28 – 50
#30	30 – 50	19 – 34
#50	18 – 30	12 – 25
#100	10 – 21	7 – 18
#200	5 – 15	5 – 15

C. Stockpile Tolerances.

The mix design target values will be used for acceptance of material. Gradation tests may vary from the mix design target values based on the stockpile tolerance shown in Table 816-05. The percent passing each sieve for gradation tests may not fall outside the gradation limits specified in Table 816-04.

Table 816-05

SIEVE SIZE	STOCKPILE TOLERANCE
3/8"	-
#4	± 5%
#8	±5%
#16	±5%
#30	±5%
#50	±4%
#100	±3%
#200	±2%

D. Acceptance.

1. Stockpile Testing.

Perform a gradation test in accordance with ND T 11 and ND T 27 for every 500 tons of material produced and placed in the stockpile. Also perform test ND T 176 when performing gradation tests. Submit the test results to the Engineer.

The Engineer will perform acceptance testing. If the result of the Engineer's testing lead to rejection of the stockpile, additional material may be blended with the stockpiled material so that the stockpile meets the requirements. The Engineer will resample and retest for both gradation and deleterious substances to determine if the stockpiled material will be accepted.

If choosing to blend additional material into the stockpile, use additional material that meets the requirements of Table 816-06. After blending, develop and submit a new mix design.

2. Gradation.

The Engineer will obtain 5 independent samples from the stockpile and perform a gradation analysis in accordance with ND T 11 and ND T 27. If the average gradation for each sieve is within the stockpile tolerance of the mix design target values, the Engineer will accept the material.

If the stockpile is rejected, additional material may be blended with the stockpiled material to obtain the required gradation. The Engineer will resample and retest to determine if the stockpiled material will be accepted.

If choosing to blend additional material into the stockpile, use additional material that meets the requirements of Table 816-03. After blending, develop and submit a new mix design.

3. Deleterious Substances.

The Engineer will determine the amount of deleterious substances in the aggregate using the same samples obtained in Section 816.04 D.2, "Gradation". If the average of the test results is 60 or higher, the Engineer will accept the material.

A. General.

Use aggregate that is manufactured crushed stone such as granite, slag, limestone, or other high quality aggregate or combination thereof. Use aggregate with 100 percent of the parent aggregate larger than the largest stone in the specified gradation.

Before stockpiling aggregate, perform the tests specified in Table 816-06.

Table 816-06

Test	Test Method	Requirement
Soundness of Aggregates by Use of Sodium Sulfate	AASHTO T 104	15% Max
Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine ¹	AASHTO T 96	35% Max
Deleterious Substances	ND T 176	60 or Higher

¹ Perform the AASHTO T 96 test on the parent aggregate

B. Mix Design.

Develop a mix design using aggregate that meets the requirements of Table 816-07. Establish mix design target values for each sieve and submit the mix design before beginning placement operations.

Table 816-07
Aggregate Gradation for Development of Mix Design

SIEVE SIZE	TYPE II %PASSING	TYPE III %PASSING
3/8"	100	100
#4	90 – 100	70 – 90
#8	65 – 90	45 – 70
#16	45 – 70	28 – 50
#30	30 – 50	19 – 34
#50	18 – 30	12 – 25
#100	10 – 21	7 – 18
#200	5 – 15	5 – 15

C. Stockpile Tolerances.

The mix design target values will be used for acceptance of material. Gradation tests may vary from the mix design target values based on the stockpile tolerance shown in Table 816-08. The percent passing each sieve for gradation tests may not fall outside the gradation limits specified in Table 816-07.

Table 816-08

SIEVE SIZE	STOCKPILE TOLERANCE
3/8"	-
#4	± 5%
#8	±5%
#16	±5%
#30	±5%
#50	±4%
#100	±3%
#200	±2%

D. Acceptance.

1. Stockpile Testing.

Perform a gradation test in accordance with ND T 11 and ND T 27 for every 500 tons of material produced and placed in the stockpile. Also perform test ND T 176 when performing gradation tests. Submit the test results to the Engineer.

The Engineer will perform acceptance testing. If the result of the Engineer's testing lead to rejection of the stockpile, additional material may be blended with the stockpiled material so that the stockpile meets the requirements. The Engineer will resample and retest for both gradation and deleterious substances to determine if the stockpiled material will be accepted.

If choosing to blend additional material into the stockpile, use additional material that meets the requirements of Table 816-06. After blending, develop and submit a new mix design.

2. Gradation.

The Engineer will obtain 5 independent samples from the stockpile and perform a gradation analysis in accordance with ND T 11 and ND T 27. If the average gradation for each sieve is within the stockpile tolerance of the mix design target values, the Engineer will accept the material.

3. Deleterious Substances.

The Engineer will determine the amount of deleterious substances in the aggregate using the same samples obtained in Section 816.05 D.2, "Gradation". If the average of the test results is 60 or higher, the Engineer will accept the material.

817.01 D Salvage Base Course Containing Bituminous Material	PAGE 472	10/01/17
--	-----------------	-----------------

Replace the last paragraph with the following:

If salvaged base course is to be placed beneath a bituminous asphalt roadway or used as a final surfacing, the following specifications apply.

817.01 D.2.a Extraction Test Method	PAGE 472	10/01/15
--	-----------------	-----------------

Replace the second paragraph of Section 817.01 D.2.a with the following:

The Engineer will determine the percentage of asphalt binder in the stockpile in accordance with AASHTO T 164 and average the results obtained from the three samples. The material will be rejected if any single sample has a value greater than 4.0 percent or the average extraction is greater than 3.5 percent. If the stockpile is rejected, the stockpiled material may be blended with other material.

818.02 A Performance Graded (PG) Asphalt Cement	PAGE 474	10/01/17
--	-----------------	-----------------

Replace the first and second paragraph with the following:

If the Performance Graded (PG) asphalt cement called for in the plans contains an S, H, V, or E designation, use PG asphalt cement that meets AASHTO M 332. In all other cases use PG asphalt cement that meets AASHTO M 320.

Base asphalt may be modified with Polyphosphoric Acid (PPA). PPA may make up no more than 0.50 percent of the finished binder, by weight.

818.02 E.2 Modified Cationic Emulsified Asphalt**PAGE 474****10/01/16**

Replace the second paragraph of Section 818.02 E.2 with the following:

Use asphalt with a maximum 3.0 percent oil distillate by volume of emulsified asphalt when tested according to AASHTO T 59, Residue and Oil Distillate by Distillation on Emulsified Asphalt. Use the manufacturer's recommended distillation temperature when using CRS-2P emulsion.

818.03 Bituminous Materials for Micro Surfacing**PAGE 475****10/01/15**

Replace Table 818-01 with the following:

Table 818-01

Test	Specification	Requirement
Settlement and Storage Stability of Emulsified Asphalts, 24-h	AASHTO T 59	1% Minimum
Distillation of Emulsified Asphalt ¹	AASHTO T 59	62% Minimum
Tests on Emulsified Asphalt Residue		
Softening Point of Bitumen (Ring and Ball Apparatus)	AASHTO T 53	135°F Minimum

¹ Hold the temperature for this test at 350°F for 20 minutes.

822.01 General**PAGE 477****10/01/17**

Replace the second paragraph with the following:

Use an Alkyl-Alkoxysilane organosilicon compound.

Replace the second bullet in the third paragraph with the following:

- Contains 100 percent active solids;

Replace the last bullet in the third paragraph with the following:

- Treated concrete is surface dry a maximum of 4 hours after application.
-

822.02 TESTING**PAGE 477
10/1/17****10/01/16 &
10/1/17**

Replace the first sentence of Section 822.02 with the following:

Provide a repellent that, when applied to concrete, meets the following requirements:

Add the following to Section 822.02:

C. Scaling Resistance to Deicing Chemicals.

Test	Duration	Visual Rating	Method
Salt Water Ponding	50 Cycles	0 at 25 cycles	ASTM C 672
		≤ 3 at 50 cycles	ASTM C 672

826.02 B.1 Sealant

Page 479

10/01/16

Replace Section 826.02 B.1 with the following:

1. Sealant.

Provide a one-part silicone joint sealant that meets the requirements of ASTM D 5893, Type NS and the following:

- Low modulus; and
- Is capable of withstanding repeated joint movement between 50 percent shrinkage and 100 percent expansion without losing adhesion to the concrete and without cohesion failure.

826.02 B.2 Backer Rod

PAGE 479

10/01/16

Replace the first paragraph of Section 826.02 B.2 with the following:

Use backer rod that meets the requirements of ASTM D 5249, Type 1 or Type 3.

830.01 CONCRETE PIPE AND DRAINAGE STRUCTURES

PAGE 480

10/01/16

Replace Section 830.01 with the following:

830.01 CONCRETE PIPE AND DRAINAGE STRUCTURES

The Department will evaluate the fabricator's concrete pipe plant according to Department procedures described in Field Sampling and Testing Manual, Quality Assurance Program for Prestressed and Precast Concrete Products. The results of this evaluation will determine if the material may be accepted by certificate of compliance as specified in Section 106.01 C "Certificate of Compliance."

Use an ACPA or NPCA certified plant in the construction.

A. Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe.

Provide pipe that meets AASHTO M 170, M 206, or M 207 for the specified diameters and strength class except use aggregates that meet the requirements in:

- Table 802-02 of Section 802.01 C.2 "Course Aggregate"
- Table 802-05 of Section 802.01 C.3 "Fine Aggregate"

B. Work Drawings.

Provide work drawings for Class IV and V Pipes that include:

- Reinforcing steel layouts;
- Type and strength of concrete and reinforcing steel;
- All concrete and reinforcing dimensions;
- Installation and handling instructions; and
- Design calculations.

Submit calculations and work drawings that are signed, sealed, and dated by a Professional Engineer registered in the State of North Dakota as set forth in NDCC Title 43.

C. Fasteners and Tie Bolts.

Provide tie bolts and nuts that are of steel meeting ASTM A 307 Grade A. Provide steel washers that meet ASTM A 1008 or ASTM A 1011. Provide fastener castings that are gray iron castings that meet ASTM A 48 Class 20.

834.03 A.2 Rotational Capacity Testing of Assemblies

PAGE 483

10/01/16

Replace Section 834.03 A.2 with the following:

2. Rotational Capacity Testing of Assemblies.

Perform the rotational capacity test according to ASTM A 325, except as modified by this specification.

a. General.

Perform rotational capacity tests on all bolt, nut, and washer assemblies before shipping.

If galvanized parts are required, perform the rotational capacity test after galvanization.

Washers are required as part of the tests even if the final assembly does not require washers.

b. Assemblies.

Test each combination of bolt lot, nut lot, and washer lot as an assembly.

c. Rotational Capacity Lot Numbers.

Assign each combination of lots a rotational capacity lot number. Washers do not need to be identified as part of the assembly lot if they are not required in the final assembly.

d. Testing Frequency.

Test a minimum of two assemblies per rotational capacity lot.

e. Testing Device.

Use a Skidmore-Wilhelm Calibrator, or an approved alternate, to perform the rotational capacity tests.

Test bolts that are too short for the Skidmore-Wilhelm Calibrator in a steel joint. The tension requirements of Table 834-02 do not apply. Compute the maximum torque required in Section 834.03 A.2.g, "Results" using a value of "P" equal to the Turn Test Tension in Table 834-02.

f. Performance of the Test.

The minimum rotation from initial tightening (10 percent of the specified proof load) shall be as specified in Table 834-01.

Table 834-01

Bolt Length	Amount of Turn
Length $\geq$ 4 diameters	240 degrees (2/3 turn)
4 diameters < Length $\leq$ 8 diameters	360 degrees (1 turn)
Length > 8 diameters	480 degrees (1-1/3 turn)

The tension reached at the rotation specified in Table 834-01 shall be equal to values for the Turn Test Tension shown in Table 834-02.

Table 834-02

Diameter (in)	1/2	5/8	3/4	7/8	1	1-1/8	1-1/4	1-3/8	1-1/2
Installation Tension (kips)	12	19	28	39	51	56	71	85	103
Turn Test Tension (kips)	12	22	32	45	59	64	82	98	118

g. Results.

After exceeding the Installation Tension specified in Table 834-02, obtain and record a reading of the tension and torque.

The maximum torque (T) shall be equal to 0.25 the measured bolt tension (P) and the bolt diameter (D):

$$T \text{ (foot pounds)} \leq 0.25 \times P(\text{pounds}) \times D(\text{feet})$$

856.01 A General**PAGE 495****10/01/15**

Replace the "Slope Gradient" row in Table 856-01 with the following:

Slope Gradient Application	≤ 3H:1V	< 3H:1V - 2H:1V	≤ 2H:1V	< 2H:1 - 1.5H:1V
----------------------------	---------	-----------------	---------	------------------

860.02 A Barbed Wire**PAGE 501****10/01/15**

Replace Section 860.02 A with the following:

A. Barbed Wire.

Provide barbed wire that meets the requirements of AASHTO M 280. Provide wire that has a minimum gage of 12½ and at least 2 point barbs.

860.02 B Woven Wire**PAGE 501****10/01/15**

Replace Section 860.02 B with the following:

Provide woven wire that meets the requirement of AASHTO M 279, Design Number 939-6-12½.

862.03 E W-Beam Guardrail End Treatments**PAGE 504****10/1/17**

Replace the first paragraph with the following:

Provide W-beam guardrail end treatments that meet the requirements of MASH TL-3.

Replace the Section 862.04 C with the following:

C. 3-Cable.

Provide round treated timber posts used for three-cable guardrail that are between 4.5 and 6.5 inches in diameter.

Replace Section 880.02 B.2 with the following:

2. Color.

Provide material that meets the requirements of Table 880-03 and 880-04 when tested in accordance with ASTM D 2805.

Table 880-03
CIE Chromaticity limits using illuminant "C" for Yellow Epoxy

x	0.470	0.485	0.520	0.048
y	0.440	0.460	0.450	0.420

Table 880-04
Daylight Directional Reflectance (Y)

Color	Minimum Value
White	83
Yellow	50

Replace Section 885.01 E.1 with the following:

1. Cast Iron.

Provide cast iron panels with a minimum thickness of 0.2 inches. Use either grey cast iron that meets AASHTO M 105, Class 35 B or use ductile cast iron that meets ASTM A 536, Grade 65-45-12. Provide panels without a surface coating and allow the panels to transition to the iron's natural patina.

Delete the second paragraph from Section 894.03 A.1:

Replace Section 894.05 A with the following:

A. General.

Galvanize all materials requiring galvanization according to Section 854, "Galvanizing" after fabrication.

Submit work drawings for all structures for overhead signs according to Sections 105.08 A.3, "Additional Section 600 Work Drawing Submittal Requirements".

1. Welding.

a. General.

Perform all steel welding according to the specifications for welding of steel structures in the AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals.

b. Treatment of Welded Areas.

Punch a minimum 3/4 inch hole into chords to facilitate galvanizing the struts and diagonal tubes. Provide two 1/2 inch holes at the top and bottom of the chords on the capped end to facilitate galvanizing. Provide on the end tower vertical columns two 1/4 inch holes in the base plate and two 3/4 inch holes at the top of each column to facilitate galvanizing.

c. Repair Galvanization.

Repair damaged galvanization according to Section 854, "Galvanizing".

894.05 B.2 Round-Tapered or Octagonal-Tapered Tubes

PAGE 523

10/1/16

Replace the second paragraph of 894.05 B.2 with the following

Retain major dimensions, such as truss cross section and length, and end towers vertical dimensions. If this option is chosen, furnish to the Engineer all necessary calculations and drawings used in designing these structures. Design the structures according to the latest issue of the AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals. Use a wind velocity of 90 mph to compute the wind pressures on the signs and structures.

895.05 A General

PAGE 528

10/01/16

Replace Section 895.05 A with the following:

A. General.

Design lighting poles to meet the requirements of AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals.

When a breakaway base is required, provide a manufacturer certification that the light standard base meets the AASHTO requirements for both breakaway and structural adequacy.

Use a wind velocity of 90 mph with the following height and exposure correction factor:

- If the traffic signal is less than 33 feet use a K_z^a of 1.00; or
- If the traffic signal is greater than 33 feet use the K_z^a found in Table 3.8.4-1 "Height and Exposure Factors, K_z^a ".

Apply different wind pressures to the structure at different heights rather than using an average wind pressure for the entire height of the structure.

Design each structural component on light standards 55 feet or greater for fatigue using the requirements of Table 11.6-2, "Fatigue Importance Categories for HMLT's".

Furnish all the necessary calculations and drawings used in the design of poles with the shop drawing submittal. A Professional Engineer duly registered in the State of North Dakota must sign, seal, and date the calculations and work drawings used in the design of lighting standards.

Replace the first paragraph with the following:

Use cables that are rated for 600 volts and meet IMSA 19-1 or 20-1.

Delete the fifth paragraph.

896.05 A GENERAL**Page 549****10/01/16**

Replace Section 896.05 A with the following:

A. Design.

Design traffic signal standards to meet the requirements of AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals.

Use a wind velocity of 90 mph with the following height and exposure correction factor:

- If the traffic signal is less than 33 feet use a K_z^a of 1.00; or
- If the traffic signal is greater than 33 feet use the K_z^a found in Table 3.8.4-1 "Height and Exposure Factors, K_z^a ".

Apply different wind pressures to the structure at different heights rather than using an average wind pressure for the entire height of the structure.

Design each structure component using the requirements of Table 11.6-1, "Fatigue Importance Factors, I_F ."

Design the components for the total deflection, with galloping, at the free end of the traffic signal arm is limited to less than 8 Inches.

Furnish all the necessary calculations and drawings used in the design of poles with the shop drawing submittal. A Professional Engineer duly registered in the State of North Dakota must sign, seal, and date the calculations and work drawings used in the design of lighting standards.

896.10 Controller Cabinet**PAGE 557****10/01/15**

Replace the 3 with the following:

3. Provide a metal weatherproof cover that blocks air flow in cold weather, and adequately covers the fan vent assembly and the louver on the door. Install a gasket to the cover and attach the cover to the inside of the cabinet. Construct the cover of the same material as the cabinet.

Provide a weep hole in the bottom loop on each end of the cabinet full-size door.

Build the cabinet to contain the following items:

- All items of control equipment specified in these Specifications.
- Provide a thermostatically-controlled minimum 250 watt strip-type heater mounted on the full-size door cover with a protective wire-mesh shield installed around the heater. Use a heavy-duty thermostat capable of being set within a temperature range of 30°F to 90°F. Activate the power to the fan and to the heater using a three-position toggle switch located on the auxiliary switch panel.

Use a switch that operates vertically up and down with the:

- o Up position being FAN (power to the fan on and power to the heater off);
- o Center position being OFF (power to both the fan and the heater off); and
- o Down position being HEATER (power to the heater on and power to the fan off).

Provide an electrical three-prong twist lock-type plug between the switch and the heater. Mount the heater thermostat on the auxiliary switch panel. Make the connection to the heater with stranded copper wire having 200°C insulation and non-insulated, solderless terminals.

- Provide three duplex receptacles with ground fault interrupter. Fuse the receptacles ahead of the main circuit breaker.
- Provide a switched lamp socket, fuse the lamp socket ahead of the main circuit breaker.
- Include the following in the maintenance switches inside the cabinet:
 - o Stop time control.
 - o Timer power.
 - o Flash.
 - o Vehicle detector input for each phase in use and all future phases.
 - o Pedestrian input for each phase in use and all future phases.

10/1/2014

**NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
PRICE SCHEDULE FOR MISCELLANEOUS ITEMS (PS-1)**

The Contractor agrees to accept the following unit prices for each listed item of work and or material when no project contract unit price exists for that item. Each price listed will be full compensation for the cost of labor, material and equipment necessary to provide the item of work and/or material, complete in place, including (but not limited to) royalty, disposal of unsuitable material, equipment rental, sales tax, use tax, overhead, profit, and incidentals.

Each listed item is referenced to the Standard Specifications by Section number and Section name.

SECTION NO.	SECTION NAME	ITEM NAME	PRICE PER ITEM
107.08	Haul Roads	Water	\$27 per M Gal
107.08	Haul Roads	Bitumen for Mix	Invoice Price ¹ + 10%
107.08	Haul Roads	Bituminous Mix	\$42 per Ton ²
107.08	Haul Roads	Aggregate Base	\$17 per Ton ²
203.01 B	Rock Excavation	Rock Excavation	\$11 per CY
203.01 C	Shale Excavation	Shale Excavation	Common Excavation Price + \$1.00 per CY
203.01 D	Muck Excavation	Muck Excavation	\$9 per CY
203.05 H.3	Embankment	Overhaul	\$1.40 per CY - Mile
260	Silt Fence	Mucking Silt Fence	\$3.90 per LF
260	Silt Fence	Removal of Silt Fence ³	\$4.25 per LF
261	Fiber Rolls	Mucking of Fiber Rolls	\$3.90 per LF
261	Fiber Rolls	Removal of Fiber Rolls ³	\$4.25 per LF
420.04 E	Bituminous Seal Coat	Blotter Sand	\$27 per Ton ²
430.04 G	Hot Mix Asphalt (Exc. Material Hauled to Disposal Area)	Bituminous Mixture	Machine Placed: Bid or Invoice Price + \$31 per ton Hand Placed: Bid or Invoice Price + \$48 per Ton
704	Temporary Traffic Control	Flagging	\$32 per MHR

¹Price paid for bituminous material will be invoice price plus freight costs.

²Price Includes haul up to 10 miles. Payment for haul exceeding 10 miles will be according to Section 109.03 E, "Force Account." The haul distance for aggregate base and bituminous mix will be based on the average haul. The haul distance for blotter sand will be from the point where the haul begins to the point where it enters the project.

³This is only for pre-existing items that were not installed under the Contract.

**NORTH DAKOTA DEPARTMENT OF TRANSPORTATION SPECIAL PROVISION:
DISADVANTAGED BUSINESS ENTERPRISE (DBE) PROGRAM**

PROJECTS NH-4-052(083)059 (PCN-21523) and SNH-4-052(067)081 (PCN-18907)

RACE/GENDER CONSCIOUS GOAL The DBE goal for this project is: **5.00%**

NDDOT Contact Information	
Civil Rights Certification & Compliance System (CRCCS): https://dotnd.diversitycompliance.com/ may be used to submit post bid documentation.	
Contractor Sign In & Submit Advertisements at: https://apps.nd.gov/dot/cr/csi/login.htm	Amy Conklin, DBE Program Administrator 701-328-3116 - or - aconklin@nd.gov
Submit quotes and post bid documentation to: subquotes@nd.gov or Fax: 701-328-0343	Ramona Bernard, Civil Rights Division Director 701-328-2576 - or - rbernard@nd.gov
Search DBE Directory https://dotnd.diversitycompliance.com/	All times are stated in Central Time. “Days” refers to calendar days, unless otherwise stated.
All subcontractors, suppliers, manufacturers, regular dealers, vendors, and brokers must fax or email quotes to the Department no later than 9 PM the day before each bid opening. All DBEs quoting on this project MUST submit all quotes and a list of contractors they quoted to NDDOT no later than 9 PM the day before each bid opening.	
Prime contractors preparing to bid on NDDOT highway projects have requested that quotes be sent to them by: 2 PM Central - Suppliers (brokers/regular dealers), vendors, & manufacturers 5 PM Central - Subcontractors under \$500,000 8 PM Central - Subcontractors over \$500,000	

PURPOSE

These provisions:

1. Provide an explanation of the federal law and information regarding compliance with the DBE requirements applicable to this contract,
2. Explain the process NDDOT will follow to evaluate bidders' efforts to obtain DBE participation
3. Provide the standards NDDOT will use to measure compliance with the requirements
4. Identify sanctions

FEDERAL AUTHORITY

This Special Provision is written per 49 CFR Part 26 and Appendix A – Guidance Concerning Good Faith Efforts.

The following paragraph must be included in all subcontracts of all tiers in accordance with 49 CFR § 26.13(b):

“The contractor or all tiers of subcontractors shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR § 26.13 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as NDDOT deems appropriate which may include, but is not limited to:

- (1) Withholding monthly progress payments;
- (2) Assessing sanctions;
- (3) Liquidated damages; and/or
- (4) Disqualifying the contractor from future bidding as non-responsible”

It is the prime contractors' responsibility to ensure all tiers of subcontractors, brokers, manufacturers, suppliers, vendors, and regular dealers comply with the requirements of this special provision. In addition, the prime contractor has the responsibility to monitor DBE performance on the project, and to ensure that the DBE performs a commercially useful function (CUF).

INDEX

NDDOT Contact Information	1	Non-Compliance - Sanctions.....	9
Purpose	1	NDDOT Monitoring & Enforcement	10
Federal Authority.....	1	Commercially Useful Function (CUF)	10
Pre-Bid/Pre-Award Bidder Requirements.....	2	Counting DBE Participation	10
Demonstrate Good Faith Efforts (GFE).....	2		
DBE Participation Plan.....	3	Definitions	12
Submit REQUIRED Documentation	4		
NDDOT Evaluation of Good Faith Efforts.....	4	Instructions for Submitting Forms:	
Administrative Reconsideration.....	5	SFN 52750 – Form A	15
Post-Award Requirements	6	SFN 52013 – Form B	16
Monitoring, Responsibilities, Reporting	6	SFN 52160 – Form C	17
GFE Responsibilities.....	6	SFN 60829 – GFE Documentation.....	18
Exception for Replacements	7	Identifying DBE Subcontracting Opportunities..	20
Termination for Cause.....	7		
Unfulfilled Obligations	8		

All bidders and all subcontractors over \$500,000 (regardless of whether they are apparent low bidder or their quote was used on a project in this bid opening) must submit copies of all quotes received or submit SFN 52013-List of Businesses Submitting Quotes within 5 calendar days of the bid opening. This process is necessary in identifying “ready, willing, and able” contractors upon which to base the NDDOT Triennial DBE Goal. The number of contractors and the types of work they have bid/quoted will be used in the calculation of the DBE goal for each goal setting period.

Contract award will be made to the lowest responsible bidder whose proposal substantially complies with the requirements prescribed herein and *who has met the goal for DBE participation, or has demonstrated, to the satisfaction of the Department, adequate good faith efforts to do so.*

The project may be awarded only after the ALB submits all documentation by 4 PM five (5) calendar days after the Bid Opening (as required by 49 CFR § 26.53(b)(3)(i)(B)). Prime contractors are encouraged to submit their post-bid documentation in one electronic file.

WHEN THE PROJECT DBE GOAL IS MET AT THE TIME OF BID:

The ALB must submit [SFN 52160](#), Form C - [Notification of Intent to Use](#) for each DBE used, any Form A revisions on [SFN 52750](#), and copies of all quotes received or SFN 52013 [Form B - List of Businesses Submitting Quotes](#). (Form instructions begin on page 15 of this special provision.)

If the goal has been met, pre-award requirements are complete after the contractor has submitted the required forms.

If the BIDDER has not met the project goal, the following is REQUIRED:

GOOD FAITH EFFORTS

If the project goal is not met, the bidder must complete and submit documentation of the following by 4 PM 5 CALENDAR days after the bid opening. Failure to demonstrate good faith efforts may cause NDDOT to “Not Award”. Prime contractors are encouraged to submit their post-bid documentation in one electronic file.

The ALB must submit [SFN 52160](#), Form C - [Notification of Intent to Use](#) for each DBE used **and** non-

DBE used in Bid Differential (Non-DBE/BD), any Form A revisions on [SFN 52750](#), copies of all quotes received or SFN 52013 [Form B - List of Businesses Submitting Quotes](#), and their DBE Participation Plan and supporting documentation along with SFN 60829, [Contractor Good Faith Efforts Documentation](#). (Form instructions begin on page 15 of this special provision.)

The bidder is responsible for taking actions toward achieving the project goal as required by Appendix A to 49 CFR Part 26 – Guidance Concerning Good Faith Efforts. Therefore, it is a bidder's responsibility to either achieve the project goal or to follow a course of actions that would, by their scope, intensity, and appropriateness, reasonably be expected to obtain sufficient DBE participation, even if they were not fully successful.

NDDOT will measure the bidder's efforts by actions demonstrated/taken prior to submitting their bid. The description and documentation of these efforts must adequately show NDDOT that the bidder took all necessary and reasonable steps to achieve the DBE goal.

The efforts employed by the bidder should be those that one could reasonably expect if the bidder were actively and aggressively trying to obtain DBE participation sufficient to meet the DBE contract goal.

DBE PARTICIPATION PLAN

- ☐ Access and review the Notice to Bidders and Project Plans & Proposals (available on the NDDOT website).
- ☐ Use the bid items list from the project proposal to select work types you will seek DBEs to perform. (Example on page 20.)
- ☐ Search the DBE Directory to locate DBEs to perform the work.
- ☐ Break out contract work items into smaller tasks or quantities to facilitate DBE participation, even when you might otherwise prefer to self-perform the work items with your own forces.
 - o The ability or desire of a prime contractor to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts.
 - o It is not acceptable to limit the use of DBEs because a larger amount of work is intended to be subcontracted to a Non-DBE. Example: Ask a non-DBE whose tied quote includes a work item quoted by a DBE to untie their quote rather than not using the DBE quote.
- ☐ Solicit DBEs who are certified to perform the work you've outlined in your plan. Provide DBEs with information about the plans, specifications, and requirements of the contract so they are able to respond to your solicitation in a timely manner.
 - o Keep an example of the request for bids/quotes used to solicit DBE participation on the project to submit with your DBE Participation Plan.
- ☐ Take steps to follow up your initial solicitation.
 - o Track contacts made by listing DBE firms contacted and the person contacted with the dates and times, contact methods, and DBE responses to the solicitation.
 - o Submit a copy of your list with your DBE Participation Plan
- ☐ Ask your firm's subcontractors to solicit DBE work for the subcontractors' portion of the project
 - o Ask subcontractors over \$500,000 being used in your bid to submit Form A ([SFN 52750](#)) with any DBE Participation included in their quote(s).
- ☐ Receive and evaluate all quotes given; convert the quotes to an acceptable format, whether the quotes are calculated by ton-mile, hour, acre or square mile, and whether you intend to subcontract the work quoted.
- ☐ Calculate whether the contract dollar value using the DBEs and work types selected will meet the project goal.
- ☐ **Advertise** using one or both of the following options. Submit a copy with your DBE Participation Plan.

OPTION 1: Place an advertisement soliciting DBE participation using the electronic DBE Advertisement System.

- o Submit the required information online at <https://apps.nd.gov/dot/cr/csi/login.htm> no later than noon, 15 calendar days before the bid opening.

OPTION 2: Directly contact by email or fax, all DBEs certified in the specific work type (NAICS) required.

- o Make contact with DBEs no later than 5 PM 7 calendar days before the bid opening.
- o Use the DBE Directory to determine the DBE firms certified in the work to be subcontracted.

Either method of advertisement must:

- o Provide the name, email address, telephone, and fax number of the company contact who will be available to discuss and/or receive quotes.
- o Offer assistance to DBEs in interpreting plans; quantities; expected overtime; project scheduling; pit and batch plan locations, length of haul, type of road; method of measurement (seeding by the mile or acre, hauling by hour or by ton-mile) or other issues that may affect a price quote.

☐ **Indicate your intention to bid** and/or receive quotes on specific jobs by using the Department's Bid Opening Sign In System

- o The **Bid Opening Sign-In** web application located at <https://apps.nd.gov/dot/cr/csi/login.htm>.
Sign-In opens at 8 AM seven days prior to the bid opening and closes at 11 AM the day before the bid opening.
- o Fill in the online form fields as required.
- o Log in to download the "Bid Opening Contact Report" at <https://apps.nd.gov/dot/cr/csi/public/listBidOpenings.htm>

COMPILE AND SUBMIT GOOD FAITH EFFORTS DOCUMENTATION BY 4 PM 5 CALENDAR DAYS AFTER THE BID OPENING

The project may be awarded only after the ALB submits all documentation by 4 PM five (5) calendar days after the Bid Opening (as required by 49 CFR § 26.53(b)(3)(i)(B)).

This documentation must include:

1. A cover letter explaining actions taken attempting to meet the project goal.
2. DBE Participation Plan with copies of the work product of the items listed above.
3. SFN 60829
4. If applicable, bid differential detailing the reasons for selecting a non-DBE over a DBE firm. Attach DBE and Non-DBE/BD quotes being compared and the analysis of the cost difference with an individual Form C with each DBE and Non-DBE/BD proposed for use on the project.
 - If the ALB indicates that it intends to self-perform and/or use a non-DBE to perform work quoted by a DBE, a written comparison between the DBE's quote and the prime's and/or non-DBE's cost of performing the specific spec/code item must accompany SFN 60829. The ALB also must fully detail the methodology applied in calculating the cost of their self-performed work items.

EVALUATION OF GOOD FAITH EFFORTS

Proposals may be considered irregular and may be rejected by the Department if there is a substantial and material non-compliance with the DBE requirements. The Department reserves the right to waive minor irregularities and/or certain elements of this special provision.

Federal regulations require the Department to scrutinize a bidder's documented good faith efforts (see appropriate actions on pages 3-4).

If the ALB fails to meet the contract goal, but others meet it, it is reasonable to question whether the ALB made good faith efforts to meet the goal.

If the ALB fails to meet the goal, but meets or exceeds the average DBE participation obtained by other bidders, it may be viewed, in conjunction with other factors, as evidence of the ALB having made good faith efforts.

If the ALB fails to meet or exceed the average DBE participation of other bidders, it may be viewed, in conjunction with other factors, as evidence of the ALB having not made adequate good faith efforts.

If the ALB fails to meet the project goal and fails to submit adequate GFE documentation by the deadline, the DBE Participation Review Committee (Committee) will notify the Director's designee that the bidder failed to demonstrate GFE. The Department may reject the proposal.

If the ALB submits no documentation of its good faith efforts (GFE), the Department may reject the proposal.

If the ALB has not met the project goal, provides the required documentation timely, and adequately describes their efforts to meet the goal, the Committee will evaluate the ALB's GFE and DBE participation. The Committee will notify the Director's designee(s) of its determination.

1. **Award:** If the Committee determines the ALB has adequately demonstrated GFE, the committee will recommend "Award".
2. **Award Subject To Using DBE:** If the committee determines the ALB has not adequately demonstrated GFE by selecting a non-DBE used in a Bid Differential (non-DBE/BD), the committee may recommend "Award Subject To" using the DBE(s).

The Director's designee(s) will consider whether the DBE quote not used due to bid differential was reasonable and whether the ALB should have in good faith used the DBE quote. If the DBE quote is determined to be reasonable, the Director's designee(s) will provide the ALB an opportunity to increase participation by using the DBE or a DBE performing another type of work.

If the Department determines that a non-DBE's quote is reasonable, the non-DBE/BD may be used.

If the ALB commits to additional participation, an updated/corrected Form A and a completed Form C with the DBE must be submitted prior to award. Faxed or photocopied signatures are acceptable. The ALB is responsible for all additional costs incurred.

If the ALB does not commit to additional participation, administrative reconsideration is available.

3. **Not Award:** If the Committee determines the ALB has not adequately demonstrated GFE, the committee may recommend "Not Award".

Upon notification of a recommendation for a Not Award determination, the Director's designee(s) will consider the Committee's recommendation. If the Designee(s) agrees with the Committee's recommendation, the Designee(s) will contact the ALB to inform them of the determination, the reasons for it, and that administrative reconsideration is available.

Administrative Reconsideration 49 CFR § 26.53 (d)

- The ALB has two calendar days to respond with documentation or argument(s) concerning whether its good faith efforts to meet the goal were adequate.
 - o An in-person reconsideration meeting is available at the ALB's request.

- The Director's designee(s) will consider any information submitted.
 - The NDDOT reconsideration decision will be made by the Director's designee(s), who will not have taken part in the original determination.
 - o If the Director's designee(s) determines the ALB made adequate good faith efforts to meet the goal, the job will be recommended for award.
 - o If the Director's designee(s) determines that the ALB has failed to sway the decision from "Not Award", the ALB will receive written notice of the decision.
 - The Director will make the final decision and may exercise such discretion as deemed appropriate.
 - The result of the reconsideration process is not administratively appealable to the US Department of Transportation.
-

POST-AWARD REQUIREMENTS

PRIME CONTRACTOR'S MONITORING, RESPONSIBILITIES, REPORTING

For the life of the project, the prime contractor is responsible for the DBEs listed on Form C and for the specific spec/code items or products that the prime committed to during the award process.

The prime is responsible to:

- Report payments to DBEs used to meet the project goal. The CRCCS may be used to report payments on the contract in lieu of submitting SFN 60638 monthly and SFN 14268 at the end of the project.
- Invite and encourage all subcontractors and all DBEs listed on Form C to the pre-construction conference.
- Provide minutes to any DBE not in attendance at the pre-construction conference.
- Ensure their firm as well as any subcontractors, manufacturers, and regular dealers/suppliers comply with the requirements of this special provision.
- Provide all subcontractors with Proposed Project Schedules and any necessary updates.
- Monitor DBE performance on the project.
 - o Submit SFN 60597, DBE Performance – Commercially Useful Function (CUF) Certification to the project engineer with SFN 5682, Prime Contractor's Request to Sublet. Project engineers will not approve Requests to Sublet without the CUF Certification.
 - o Submit SFN 60638, Monthly Record of DBE Project Payments for each DBE on the project, by the 15th calendar day of every month while payments are made to the DBE.
- Maintain project records and documentation of payments to DBEs for three years following acceptance of the final payment from NDDOT (per FHWA-1273, Section II Nondiscrimination #11).
 - o Submit SFN 14268, DBE Participation Certification for each DBE, to the project engineer within 4 weeks of the DBE contract work completion. Each certification must be signed by the prime contractor and DBE used on the project.
 - This reporting requirement also applies to any certified DBE.
 - NDDOT may perform interim audits of contract payments to DBEs to ensure that the actual amount paid to DBEs equals or exceeds the dollar amount stated on Form C.
 - Make these records available for inspection, upon request, by an authorized representative of the NDDOT or USDOT.
 - o **Payments on the contract may be entered and stored in the CRCCS. Use of CRCCS**

on the project eliminates the requirement to submit SFN 60638 and SFN 14268.

- If SFN 60597, SFN 60638, and/or SFN 14268 are not received in a timely manner, progress payments will be withheld until submitted.

If award of the contract is made based on the contractor's good faith efforts, the goal will not be waived; the contractor must make good faith efforts throughout the duration of the project.

The prime contractor shall not terminate or replace a DBE subcontractor without the Department's prior written consent. 49 CFR 26.53(f)(1)i.

The Department's contract includes a provision stating:

- (A) That the contractor shall utilize the specific DBEs listed to perform the work and/or supply the materials unless the contractor obtains written consent; and
- (B) That, unless the Department's consent is provided, the contractor shall not be entitled to any payment for work or material unless it is performed or supplied by the listed DBE.

SFN 60595 - Replacement Approval Request must be submitted and approved prior to replacement of each DBE firm(s), or Non-DBE/BD(s), or any work the prime originally intended to self-perform prior to the commencement of any replacement work. No payment will be made if work commences without written approval. The form may be accessed at the Department's website:

<http://www.dot.nd.gov/forms/sfn60595.pdf>

If the prime has not achieved the goal and additional work becomes available, the prime must follow the replacement approval request process using SFN 60595.

EXCEPTION FOR REPLACEMENTS DUE TO PUBLIC NECESSITY

When replacement work is required as a matter of public necessity, (e.g., safety, storm water issues), the contractor must immediately notify the project engineer and the DBE or Non-DBE/BD intended at the time of award. If the DBE or Non-DBE/BD is unable to perform the work within the time specified by permit or administrative rule, the DBE or Non-DBE/BD must notify the prime immediately; and, within one business day, a written explanation must be submitted to the prime with a copy to the project engineer. The project engineer refers all replacement approval requests to the Assistant District Engineer (ADE). In a case of public necessity, the ADE has the authority to allow the contractor to self-perform the replacement work or to find another contractor to complete it.

TERMINATION FOR CAUSE

A DBE or Non-DBE/BD may not be terminated without the Department's prior written consent. (49 CFR 26.53(f)(1)(i))

The Department will provide such written consent if the Department agrees that the contractor or subcontractor has good cause to terminate the DBE firm or Non-DBE/BD.

Circumstances which may be considered good cause for termination include when the listed DBE or Non-DBE/BD:

- Fails or refuses to execute a written contract
- Fails or refuses to perform the work of its subcontract in a way consistent with the contract and/or with normal industry standards, provided, that good cause does not exist if the failure or refusal of the listed DBE or Non-DBE/BD to perform its work on the subcontract results from the bad faith or discriminatory action of the prime or subcontractor
- Fails or refuses to meet the prime contractor's reasonable nondiscriminatory bond requirements
- Becomes bankrupt, insolvent, or exhibits credit unworthiness
- Is ineligible to work on public works projects because of suspension and debarment proceedings pursuant 2 CFR Parts 180, 215, and 1,200 or applicable state law

- Is ineligible to receive DBE credit for the type of work required
- Dies or becomes disabled with the result that the listed DBE or Non-DBE/BD is unable to complete its work on the contract
- Other documented good cause that the Department determines compels the termination of the listed DBE or Non-DBE/BD

Good cause does not exist if the prime contractor or subcontractor seeks to terminate a DBE or Non-DBE/BD which was relied upon to obtain the contract so that the contractor can self-perform the work for which the DBE or Non-DBE/BD was engaged or so that the contractor can substitute another DBE or Non-DBE contractor after contract award.

The contractor must immediately give written termination notice to DBE or the Non-DBE/BD. At the same time, SFN 60595 and its supporting documentation must be provided to the project engineer for review and analysis of the reasons for the intended termination.

The contractor must give the DBE or Non-DBE/BD five calendar days to respond to the termination notice. Within that time, the DBE or Non-DBE/BD should respond with a written explanation of their reasons and/or objections to the proposed termination and specifically address why the Department should deny the contractor's request. This explanation should be submitted in reply to the contractor with a copy to the project engineer.

The project engineer will send the contractor's SFN 60595, the DBE or Non-DBE/BD's written response(s) and any other accompanying documentation to the Civil Rights Division (CRD). If the CRD concurs that a termination is warranted, the contractor must seek a DBE to perform the work.

All DBEs currently certified in the specific area of work to be performed, must be contacted in writing or by phone, and quotes solicited. If available, a DBE will be selected to perform a dollar value of work, equal to the value of the commitment not achieved, unless the contractor can demonstrate the DBE quote is unreasonable, using the same comparison in section "Good Faith Efforts Documentation."

Upon receipt of appropriate written GFE documentation, and prior to commencement of any replacement work, CRD will consider the contractor's efforts and provide a final written decision to the project engineer.

In instances where trucking replacements are sought, DBEs and/or Non-DBEs as allowed by regulation must be selected to cover all the trucking required until sufficient participation is met.

UNFULFILLED OBLIGATIONS

The Department requires SFN 60595 and its supporting documentation when a contractor, DBE, or Non-DBE/BD does not fulfill her or his obligations in any of the following situations:

- The prime contractor is unable to perform the full amount of work committed to be completed, by the prime's workforce and equipment, at the time of award, or
- The Non-DBE/BD to which the prime contractor committed using at the time of award, is unable to perform the full amount of work, or
- The DBE or Non-DBE/BD withdraws voluntarily from the project and provides to the prime written notice of its withdrawal.

SFN 60595 and its supporting documentation must be provided to the project engineer for review and analysis. If the DBE or Non-DBE/BD is not able to perform, the prime contractor must provide written documentation from the DBE or Non-DBE/BD as to the reasons. The project engineer refers all replacement approval requests to the ADE. The Civil Rights Division will provide a written final determination to the project engineer.

If the Department concurs that a substitution is warranted, the prime contractor will seek a DBE to

perform the work. All DBEs currently certified in the specific area of work to be performed, must be contacted in writing or by phone, and quotes solicited. If available, a DBE will be selected to perform a dollar value of work, equal to the value of the commitment not achieved, unless the contractor can demonstrate the DBE quote is unreasonable, using the same bid differential comparison in section “Good Faith Efforts Documentation.”

In instances where trucking replacements are sought, DBEs and/or Non-DBEs as allowed by regulation must be selected to cover all the trucking required until sufficient participation is met.

The prime contractor is responsible for any additional costs incurred as a result of the prime contractor’s failure or the subcontractor quoting over \$500,000 to fulfill the original commitment or the DBE or Non-DBE/BD’s failure to perform.

NON-COMPLIANCE, FAILURE TO PERFORM, AND SANCTIONS

If the Department determines that a contractor should be sanctioned, the Department will provide written notice to the contractor informing them of the sanction for the following:

- Not submitting required documentation in a timely manner
- Not paying a DBE in a timely manner
- Not having a DBE perform the specified dollar amount of work (subject to plan quantity changes) tasks or bid items
- For otherwise not fulfilling the requirements of this DBE special provision

If the Department determines that a DBE should be sanctioned, the Department will provide written notice to the DBE informing them of the sanction for the following:

- Failure to perform work as specified in the contract
- Failure to pay contract-related bills in a timely manner
- Failure to perform a commercially useful function
- Failure to notify the prime contractor orally and in writing if they are unable to perform a commercially useful function
- Otherwise not fulfilling the requirements of this DBE special provision

Other grounds for sanctions may include, but are not limited to: repeated instances of failure to perform the contract requirements, repeated instances of late contract-related payments, or documented fraudulent practices.

If sanctions are applied, the contractor or the DBE may make a written request to the Department for reconsideration. The contractor or the DBE must provide a written statement defending their actions within 3 calendar days.

If the Department does not receive a written request for reconsideration, or if the contractor or DBE does not provide sufficient evidence that the provisions have been met, the Department may suspend the contractor or the DBE bidding or quoting privileges and not allow the contractor or the DBE to participate in one or more scheduled bid openings after the date the sanction is imposed.

Further sanctions which may be imposed by the Department for failure on the part of the contractor may include, but are not limited to:

- Withhold the contractor’s progress payment until the contractor complies with all DBE contract provisions
- Deduct, from the contractor’s progress payments, the dollar amount of DBE participation committed to but not achieved by the contractor
- Find the contractor in default
- Liquidated damages
- Disqualifying the contractor from future bidding

- Take other corrective action determined by the Department to be appropriate
- Any combination of the above.

NDDOT MONITORING AND ENFORCEMENT MECHANISMS

The Department will bring any false, fraudulent, or dishonest conduct in connection with the DBE program to the attention of USDOT. USDOT may pursue action as provided in 49 CFR § 26.107. Actions include referral to the Department of Justice for criminal prosecution or referral to the USDOT Office of Inspector General for action under suspension and debarment, or Program Fraud and Civil Remedies rules. The Department will also consider similar action under its own legal authority, including responsibility determination in future contracts.

COMMERCIALLY USEFUL FUNCTION

DBEs are required to perform a commercially useful function (CUF). CUF refers to those services the DBE is certified to perform. Certified services for each DBE are listed in the online DBE Directory. It is a DBE's responsibility to immediately notify the prime contractor in writing if the DBE is unable to perform a CUF or the services indicated on Form C.

The contractor must certify that DBEs working on the prime's contract are performing a commercially useful function. Submit SFN 60597, DBE Performance – Commercially Useful Function Certification to the project engineer with SFN 5682, Prime Contractor's Request to Sublet. Project engineers will not approve the Requests to Sublet without the CUF Certification. A review of the certification must be performed by the project engineer to determine whether the contract dollar value of the DBE's work may be counted toward the project goal.

The Department counts participation to a DBE contractor toward DBE goals only if the DBE is performing a CUF on that contract.

- A. A DBE performs a CUF when it is responsible for execution of the work of the contract and is carrying out its responsibilities by actually performing, managing, and supervising the work involved. To perform a CUF, the DBE must also be responsible, with respect to materials and supplies used on the contract, for negotiating price, determining quality and quantity, ordering the material, installation and paying for the material itself. 49 CFR § 26.55(c)(1)
- B. A DBE does not perform a CUF if its role is limited to that of an extra participant in a transaction, contract, or project through which funds are passed in order to obtain the appearance of DBE participation. 49 CFR § 26.55(c)(2)
- C. If a DBE does not perform or exercise responsibility for at least 30 percent of the total cost of its contract with its own work force, the Department must presume that it is not performing a CUF. 49 CFR § 26.55(c)(3)
- D. When a DBE is presumed not to be performing a CUF as provided in paragraph C (above), the DBE may present evidence to rebut this presumption. 49 CFR § 26.55(c)(4)
- E. The Department's decisions on CUF matters are subject to review by Federal Highway Administration, but are not administratively appealable to USDOT. 49 CFR § 26.55(c)(5)

COUNTING RACE/GENDER CONSCIOUS DBE PARTICIPATION - 49 CFR § 26.55

The Department does not count the participation of a DBE subcontractor toward a contractor's final compliance with its DBE obligations on a contract until the amount being counted has actually been paid to the DBE. 49 CFR § 26.55 (h)

The Department will count DBE participation toward our overall annual goal as provided in 49 CFR § 26.55 as noted below.

1. The Department will use the following factors in counting DBE trucking participation.
 - A. For purposes of this section, a lease must indicate that the DBE has exclusive use of and control over the truck. This does not preclude the leased truck from working for others during the term of the lease with the consent of the DBE, so long as the lease gives the DBE absolute priority for use of the leased truck. Leased trucks must display the name and identification number of the DBE. 49 § 26.55(d)(7)
 - B. The DBE must be responsible for the management and supervision of the entire trucking operation for which it is responsible on a particular contract. 49 CFR § 26.55(d)(1)
 - C. The DBE must itself own and operate at least one fully licensed, insured, and operational truck used on the contract and receives credit for the total value of the transportation services it provides on the contract using trucks it owns, insures, and operates using drivers it employs. 49 CFR § 26.55(d)(2-3)
 - D. The DBE may lease trucks and drivers from another DBE firm and receives credit for the total value of the transportation services the lessee DBE provides. 49 CFR § 26.55(d)(4)
 - E. The DBE may also lease trucks with drivers and is entitled to credit for the total value of transportation services provided by non-DBE leased trucks equipped with drivers not to exceed the services under items 1C and 1D. Additional participation by non-DBE owned trucks equipped with drivers receives credit only for the fee or commission it receives as a result of the lease arrangement. 49 CFR § 26.55(d)(5)

Example to 1D: DBE Firm X uses two of its own trucks on a contract. It leases two trucks with drivers from DBE Firm Y and six trucks **with drivers** from non-DBE Firm Z. DBE credit would be awarded for the total value of transportation services provided by Firm X and Firm Y, and may also be awarded for the total value of transportation services provided by four of the six trucks provided by Firm Z. In all, full credit would be allowed for the participation of eight trucks. DBE credit could be awarded only for the fees or commissions pertaining to the remaining trucks Firm X receives as a result of the lease with Firm Z.
 - F. The DBE may lease trucks without drivers from a non-DBE truck leasing company and if the DBE uses its own employees as drivers, it is entitled to credit for the total value of these hauling services.

Example to paragraph 1F: DBE Firm X uses two of its own trucks and drivers on a contract. It leases two additional trucks and drivers from non-DBE Firm Z. Firm X uses its own employees to drive the trucks leased from Firm Z. DBE credit would be awarded for the total value of the transportation services provided by all four trucks. 49 § 26.55(d)(6)
2. Only the value of the work actually performed by the DBE counts toward the project goal when a DBE participates in a contract provided the DBE is certified in this work.
 - A. The Department counts the entire amount of that portion of a construction contract, or other contract not covered by item 2. B, that is performed by the DBE's own forces. Included are the cost of supplies and materials obtained by the DBE for the work of the contract, including supplies purchased or equipment leased by the DBE (except supplies and equipment the DBE subcontractor purchases or leases from the prime contractor or its affiliate). 49 CFR § 26.55 (a)(1)
 - B. The Department counts the entire amount of fees or commissions charged by a DBE firm for providing a bona fide service for which they are certified, such as professional, technical, consultant, or managerial services, or for providing bonds or insurance specifically required for the performance of a USDOT-assisted contract, toward DBE goals, if the Department determines the fee to be reasonable and not excessive. 49 CFR § 26.55 (a)(2)
 - C. When a DBE subcontracts part of the work of its contract to another firm, the value of the subcontracted work may be counted toward DBE goals only if the DBE's subcontractor is also a DBE. 49 CFR § 26.55 (a)(3)
3. The Department counts expenditures with DBEs for materials or supplies toward DBE goals as provided in the following:
 - A. If the materials or supplies are obtained from a DBE manufacturer, count 100% of the cost of the materials or supplies toward DBE goals. 49 CFR § 26.55 (e)(1)(i)
 - B. If the materials or supplies are purchased from a DBE regular dealer, count 60 percent of the

cost of the materials or supplies toward DBE goals. 49 CFR § 26.55 (e)(2)(i)

- C. Packagers, brokers, manufacturers' representatives, or other persons who arrange or expedite transactions are not regular dealers within the meaning of 3B (above) 49 CFR § 26.55 (e) (2) (ii) (C)
 - D. With respect to materials or supplies purchased from a DBE which is neither a manufacturer nor a regular dealer, count the entire amount of fees or commissions charged for assistance in the procurement of the materials and supplies, or fees or transportation charges for the delivery of materials or supplies required on a job site, toward DBE goals, if the Department determines the fees to be reasonable and not excessive. Do not count any portion of the cost of the materials and supplies themselves toward DBE goals, however. 49 CFR § 26.55 (e) (3)
 - E. The Department determines the amount of credit awarded to a firm for the provisions of materials and supplies (e.g., whether a firm is acting as a regular dealer or a transaction expeditor) on a contract-by-contract basis. 49 CFR § 26.55 (e)(4)
- 4. If a firm is not currently certified in ND at the time of the execution of the contract, the Department does not count the firm's participation toward any DBE goal. 49 CFR § 26.55 (f)
 - 5. The Department does not count the dollar value of work performed under a contract with a firm after it has ceased to be certified toward the Department's overall annual goal. 49 CFR § 26.55 (g)

DEFINITIONS

The definitions specified below apply only to this Special Provision and may contain differences from NDDOT Standard Specifications.

Achievement means any DBE certified service dollar amount committed to at the time of award. Any achievement must be supported by a request to sublet and Monthly DBE Payment Records for each DBE.

Aggregate providers are considered subcontractors rather than regular dealers/suppliers, regardless of the amount of their quote.

Apparent low bidder (ALB) means the bidder whose bid is read as low bid at the bid opening.

Bid differential means written documentation provided by the low bidder comparing a Non-DBE quote to a DBE quote.

Bid Opening Sign-In System means the Department's online system to which all prime contractors and subcontractors must register to indicate their interest in quoting or bidding prior to each bid opening.

Bidder/prime contractor means bidders who are submitting proposals on this project, regardless of the size of the highway construction projects; a contractor intending to serve as the prime contractor.

Blanket quote means when a business provides the same quote, for all projects, at a bid opening, using the same price, at one rate, not project specific. Blanket quotes for the construction season are not allowed, i.e. trucking, striping, signing, construction supplies, etc.

Commercially Useful Function describes a DBE's responsibilities and involvement in a project, see section Commercially Useful Function of this SP.

Commitment means the dollar amount of work the DBE will complete according to the bidder's submitted proposal.

Contractor means all DBE and Non-DBE firms, including prime contractors, subcontractors (under/over \$500,000), brokers, vendors, regular dealers/suppliers, and manufacturers at any tier.

DBE Goal means a percentage of the total contract targeted for the hiring of DBE subcontractors to do specific bid items for which the DBE has been certified to perform. Project goals are set by assessing the project's bid items, location, whether DBEs are available to do the work.

DBE Participation means the percentage achieved when the dollar amount committed to the DBE is divided by the dollar amount of all contract items.

DBE Participation Review summarizes the prime's participation at the time of award. A replacement approval request must be submitted to substitute a firm for any DBEs reported as being used at the time of award.

Department means the project owner regardless of whether the owner is NDDOT, a city or a county project.

Disadvantaged business enterprise or DBE means a for-profit small business concern that is certified by the Department and listed in the DBE Directory available on the Department's web site. DBEs must first be certified in the work intended before any DBE achievement may be counted toward the project goal.

Equipment supplier is a firm which provides equipment for sale or lease, without operators, and whose primary business function is equipment sales or leasing.

Good Faith Efforts (GFE) means efforts made by the prime contractor to achieve a DBE goal. This includes but is not limited to providing assistance to DBEs in preparing their quotes, advertise, sign in, etc.

Manufacturer means a firm that operates or maintains a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract and of the general character described by the specifications. 49 CFR § 26.55 (e) (1) (ii)

Materials means aggregate, steel, petroleum products, concrete, asphalt, and other construction supplies.

NAICS Codes means industry codes assigned by North American Industry Classification System. When certified, DBE businesses are assigned NAICS codes which are identified in the DBE Directory.

NDDOT Civil Rights Certification & Compliance System (CRCCS) refers to the online compliance reporting system whereby contractors report/submit job related payments, commitments, and Utilization Plan documentation.

Non-DBE means a contractor, subcontractor, supplier (broker or regular dealer), vendor, or manufacturer that has not been certified as a DBE by the NDDOT Uniform Certification Program.

Non-DBE used in bid differential (Non-DBE/BD) means a Non-DBE which, at the time of award, was approved for use due to a price comparison with a DBE. A Form C with the Non-DBE/BD must be included in the DBE Good Faith Efforts Review documentation. A replacement approval request must be submitted when the Non-DBE/BD is unable to complete the work.

Positive Contact means active and documented solicitation of DBE and other subcontractors. Advertising the prime's intention to bid or contacting individual DBEs is deemed a positive contact.

Project owner means any political subdivision such as a city or county which provides match to federal highway funds and uses NDDOT's electronic bidding system to let their projects to bid. The Department "owns" state projects.

Quoter means a DBE or a Non-DBE subcontractor (under/over \$500,000), brokers, vendors, regular dealers/suppliers, and manufacturers at any tier who submits quotes to another contractor.

Race/Gender Conscious (RGC) goals are those focused specifically on assisting DBEs. The RGC portion of NDDOT's 2016 overall 6.22 percent DBE goal is 2.75 percent.

Responsible Bid Proposal means a bidder's proposal in which the project goal has been achieved, or the bidder demonstrates Good Faith Efforts (GFE) as outlined in this Special Provision.

Subcontractor means any firm intending to perform work, or intending to perform work and supply the materials, which were intended for their work on the project. All subcontractors must attach a list of DBE subcontractors intended for use to their quote when submitting it to the prime contractor.

Subcontractor quoting over \$500,000 means a subcontractor whose quote is over \$500,000 on any project and who is not a supplier, broker, vendor, regular dealer, or manufacturer. All aggregate providers are considered subcontractors, regardless of the amount of their quote.

Supplier means a party providing goods, services, and supplies on the project.

Broker means an agent who, without having custody of the property, a) negotiates contracts of purchase, work, lease, or sale; b) buys and sells goods; or c) negotiates between buyers and sellers. See Counting DBE Participation section.

Regular Dealer means a DBE firm that owns, operates, or maintains a store, warehouse, or other establishment in which the materials supplies, articles, or equipment of the general character described by the specifications and required under the contract are bought, kept in stock, and regularly sold or leased to the public in the usual course of business. See Counting DBE Participation section.

Tier means various levels of contractors on the job. For example a prime contractor's subcontractor (B) is referred to as the second tier. When B subcontracts with C, C becomes the third tier, etc.

Tied quote means the quote will be considered only if all of the bid items are included.

Untied quote means that any item or group of items quoted may be used for price noted on the quote whether one or all are used.

Utilization Plan (UP) is completed and submitted electronically by the prime to identify DBE and non-DBE

subcontractors and lists DBE participation on a given project. (Example below) – User Manual is available as a resource from a link on the first page of the UP.

Generated by Test Vendor 2, NDDOT Test Vendor 2 on 8/17/2016

Utilization Plan: Submit Plan

[Help & Tools](#)

This Utilization Plan is ready to be completed and submitted. Complete steps 1, 2, and 3 (if applicable) before you sign and submit. Follow the instructions for each step. **Firms that do not perform commercially useful functions may not be counted toward DBE utilization**

This is a practice Utilization Plan. You can enter data, subcontractors or other suppliers without messing anything up. I just wanted to be sure that if we had the contact information correct prior to setting up the plan, we could get the UP to the correct person in a timely manner.

This is a practice Utilization Plan. You can enter data, subcontractors or other suppliers without messing anything up. I just wanted to be sure that if we had the contact information correct prior to setting up the plan, we could get the UP to the correct person in a timely manner.

[User Manual](#) [Refresh](#)

Utilization Plan Summary

Organization	North Dakota Department of Transportation
Proposal	11111: Practice Proposal & Utilization Plan
Reference	11111
Phase	Original, version 0
Status	Pending Submission
Notification Date	8/17/2016 by Denise Spanjer
Due Date	8/17/2016 5:00 pm US/Central

Step 1: Provide Utilization Plan Information

Use this section to provide information on the plan. Click the button to **Fill in Utilization Plan Details**.

Utilization Plan Information

Estimated Bid/Transaction Amount **\$2,000,000**

[Fill In Utilization Plan Details](#)

Step 2: Provide Subcontractor Information

Use this section to add subcontractors to the Utilization Plan, if applicable. Click the **Add Subcontractor** button to get started. **Firms that do not perform commercially useful functions may not be counted toward DBE utilization.**

Certification Types Recognized for this Utilization Plan

Firms selected for credit on this utilization plan must hold one of the recognized certification types listed in this box.

Organization	Certification Type
North Dakota Department of Transportation	DBE - Disadvantaged Business Enterprise

Prime Contractor

Vendor Name	Cert	Inc in Goal	\$ Total	\$ Self Perf	\$ For Credit	Actions
NDDOT Test Vendor 2	No	No	\$2,000,000	\$2,000,000 100.00%	-	Edit View

[Add Subcontractor](#)

Instructions for submitting forms:

SFN 52750 – FORM A – DBE PARTICIPATION

The original Form A is submitted as part of the bidder's electronic bid proposal. Apparent low bidders must submit a revised Form A ([SFN 52750](#)) before the deadline if:

- Additional DBE Participation is achieved after the time of bid,
- Electronic Form A was incorrectly completed, or
- By request of the Department.

All subcontractors over \$500,000 must submit Form A (SFN 52750) with their quotes to bidders and to NDDOT. Bidders should account for any intended use of DBEs by their subcontractors in order to more accurately reflect their DBE participation.

Download SFN 52750 from the NDDOT Website at: <http://www.dot.nd.gov/forms/sfn52750.pdf>

DISADVANTAGED BUSINESS ENTERPRISE PARTICIPATION (RGC)

North Dakota Department of Transportation, Civil Rights
SFN 52750 (10-2016)

FORM A

Contractor		Revision Date
Project Number		Telephone Number
		Bid Opening Date

to subquotes@nd.gov or upload this form to the project's Utilization Plan via the Civil Rights Certification & Compliance form (<https://dot.nd.gov/civilrights/crc>) 7 calendar days before the bid opening date.

Revised Form A reports additions to the bidder's original Form A submitted electronically at the time of the project. Additions in listed items to be performed by a DBE or to be completed by a contractor must be approved by the Civil Rights Office.

PRINT ALL NUMBERS CLEARLY AND LEGIBLY.

List all DBE firms who quoted your firm on this project in Section 1, Section 2, and/or Section 3.

Section 1

List DBE firms to be used on the project.

1. List DBEs to be used by the bidder toward the project's goal.
2. List the DBEs to be used by subcontractors toward the project goal. Include the subcontractor's Form A listing the DBEs to be used by the subcontractor.
3. List the bid item numbers to be performed by DBEs and the total dollar value of the contract.
Note whether the DBE firm is to perform a partial item (supply, haul, place, etc.) and state the reason(s) the DBE is not being used for the entire item.
State name of the contractor who will perform the remaining portion.
4. DBE bidders: List the work to be performed with "own forces and equipment".
Separately list any work to be subcontracted to DBEs and any materials to be purchased from DBEs.

DBE Firm	
List Specific Bid Item Numbers or Products to be Supplied	Total Contract Dollar Value
X 1.	
Percent DBE will do with own equipment/forces =	
Percent Non-DBE trucker will perform =	If Regular Dealer, X 60% =
ADD FIRM	

Section 2:

List DBE firms not used because the bidder will self-perform or procure specific bid item numbers.

DBE Firms not used; Bidder Self-Performing	Bid item numbers or products to be supplied by the bidder
X 1.	
ADD FIRM	

Section 3:

List DBE firms not used due to bid differential and indicate which firm will be performing the work instead.

DBE Firms not used; Bidder Differential	Firms to be used instead of DBE
---	---------------------------------

SFN 52013 – FORM B OR QUOTE COPIES

All bidders must submit one of the following:

- Copies of all quotes from all tiers of subcontracting or,
- SFN 52013, [Form B - List of Businesses Submitting Quotes](#) with a list of all businesses that submitted quotes from all tiers of subcontracting. When submitting Form B, copies of all quotes must be retained, by each bidder, until the job is awarded.

Bidders must indicate which subcontractor(s), suppliers, regular dealers, vendors, manufacturers, and brokers will be used on the job.

Download SFN 52013 from the NDDOT Website at: <http://www.dot.nd.gov/forms/sfn52013.pdf>

LIST OF BUSINESSES THAT SUBMITTED QUOTES (RGN & RGC)
North Dakota Department of Transportation, Civil Rights
13 (8-2016)

Example

Contractor	Address	Telephone Number
PCN	Project Number	Bid Opening Date

All bidders must upload one of the following to the project's Utilization Plan via the Civil Rights Certification & Compliance System (<https://dot.nd.gov/diversity/compliance>):

1. Copies of all quotes received from all tiers of subcontracting on the project.
2. Form B, SFN 52013: List all firms that submitted quotes from all tiers of subcontracting.
Use the check box to indicate which subcontractor will be used on the job. When submitting Form B, copies of all DBE and non-DBE quotes must be retained until the project is awarded.

☐	Business	Contact Person	Telephone Number
X	Mailing or Email Address	Type of Work	

ADD FIRM

SFN 52160 – INTENT TO USE

Submit one Form C - [Notification of Intent to Use](#) for each DBE or Non-DBE/BD to be used, through the Civil Rights Certification & Compliance System Utilization Plan.

The contractor and DBE and/or Non-DBE/BD must each sign the form; faxed or photocopied signatures are acceptable.

The apparent low bidder and their direct DBEs or their subcontractor(s) and the subcontractor(s) DBEs must submit signed copies of Form C (SFN 52160) before credit will be given toward DBE participation.

Download SFN 52160 from the NDDOT Website at: <http://www.dot.nd.gov/forms/sfn52160.pdf>

NOTIFICATION OF INTENT TO USE (RGN & RGC)

North Dakota Department of Transportation, Civil Rights
SFN 52160 (11-2016)

- FOR C - DBE BY 7 CASES AFTER THE END OF BIDDING**
1. The apparent low bidder submit an original Form C for each DBE and non-DBE/BD to be used on the project to cs@nd.gov or (701)328-3435.
 2. The contractor and DBE and/or Non-DBE/BD must sign the form; faxed or photocopied signatures are acceptable. This form applies to all tiers of subcontractors for DBE achievement credit to be given.
 3. If Form C contains additional pages or attachments, both parties must sign each page or attachment.
 4. Explain any difference between the information on Form A and Form C in the comments section below.

This form is not a contract and does not take the place of any contract. This form indicates to the NDDOT that all DBEs identified on Form A will be used on the project.

Prime Contractor or Subcontractor				Project Number		
Intended DBE/ Non-DBE				Bid Opening Date		Job Number
	Spec & Code #	Work Description	(DBE) Percent of work to be done with own forces	Approx. Quantity	Unit Costs	Amount
X						
ADD EXPENSE						
Total:						\$0.00

Are there any agreements not addressed in your quote? ☐ Yes ☐ No If yes, explain:

Comments: Use this space to explain any differences between the amounts, units, work descriptions, spec/code items, quantities, and totals between those indicated on Form A as submitted with the bid proposal and this Form C.

Prime Contractor/Subcontractor Signature	Title	Date
Intended DBE/Non-DBE Signature	Title	Date

SFN 60829 – Contractor Good Faith Efforts Documentation

Complete pages 1 and 2 of SFN60829, gather supporting documentation as instructed starting on page 2 of this DBE SP, and complete and submit this form with the DBE Participation Plan to demonstrate your Good Faith Efforts by 4 p.m. Central Time 5 CALENDAR days after the bid opening.

Download SFN 60289 from the NDDOT Website at: <http://www.dot.nd.gov/forms/sfn60289.pdf>

CONTRACTOR GOOD FAITH EFFORTS DOCUMENTATION

North Dakota Department of Transportation, Civil Rights
SFN 60829 (10-2016)

Submit this form and the required attachments to document the contractor's good faith efforts to meet the project goal. Attach supporting documentation to provide evidence of good faith efforts. The contractor shall be held responsible for the accuracy of the information provided. Submittal to Subquotes@nd.gov by fax (701)328-4343 or by email 43 business days before the bid opening.

PART A - PRIME CONTRACTOR INFORMATION

Address		City	State	ZIP Code
Telephone Number	FAX Number		Email Address	
Contact Person		Title		

PART B - PROJECT DESCRIPTION

Date	Job Number	PCN	Project Number
------	------------	-----	----------------

PART C - CONTRACTOR PARTICIPATION ACHIEVEMENT DATA

Project DBE Goal Percent	Total DBE PARTICIPATION DOLLARS required to meet DBE GOAL (Total prime Bid dollar amount X DBE % Goal)
Contractor's DBE Participation Percent	

PART D - PROJECT SUMMARY AMOUNTS

1. Total Prime Bid	
2. Total Dollars Committed to DBEs - include all tiers (From Part E line 13)	0
3. Total Dollars Committed to Non-DBEs (From Part F line 24)	0
4. Total DBE Supplier Dollars not Counted but Committed (Total committed to DBE suppliers X 40% - include all tiers)	
5. Work to be Performed by Prime (Add Part D lines 2, 3, and 4 subtract from Part D line 1)	0
6. Percent of Work Performed by Prime (Divide Part D line 5 by Part D line 1)	
7. Total DBE Participation (Add Part D lines 2 and 4)	\$0.00

PART E - DBE COMMITMENTS Attach additional sheet if necessary.

	COMMITTED DOLLARS	DBEs WITH A COMPLETED FORM C to be used on the project	SPEC/CODES QUOTED
8.			
9.			
10.			
11.			
12.			
13.	\$0.00	Total Dollars committed to DBEs	

1. Use a cover letter to describe, in detail, all relevant issues which your firm wants NDDOT to consider in determining whether to award. Yes/No answers do not address Good Faith Efforts in the appropriate detail required by NDDOT to determine a bidder's GFE. If the letter does not detail a bidder's actions (as listed in the DBE RGC Special Provision and described below), the DBE Participation Review Committee may determine that the bidder has not made sufficient efforts toward meeting the project goal.
2. Explain the efforts your firm made in attempting to meet the project DBE goal prior to the bid opening.
 - a. Which lower tier subcontractor(s) and what types of work did your firm ask to obtain DBE participation as a lower tier subcontractor? Describe the outcome of these efforts.
 - b. Which DBE firms and types of work to meet the project goal did your firm identify using the DBE Directory located at: <https://dot.nd.diversitycompliance.com/>?
 - c. Which other areas of the project plans did your firm review to determine whether DBE participation was available on the project?
3. Provide a copy of any email or fax used to solicit additional participation after the time of bid. Explain how your firm identified additional work that could be subcontracted to a DBE firm.
 - a. Include the following information; another format may be used provided all information requested is included.

DBE Firm Contacted	Person Contacted	Date & Time Contacted	Fax, Phone, or Email	Specific Responses, Number of Contacts


- If a **non-DBE was selected over a DBE**, provide the quotes compared, a detailed comparison between the specific spec/code items quoted by the non-DBE and the DBE, the specific reasons for your selection, and a Form C with each firm selected.
- If the **prime contractor intends to self-perform the work quoted by a DBE**, provide a detailed comparison between the prime's costs for the specific spec/code items quoted by the DBE along with an explanation of the method of valuation of the prime's costs.
- Another format may be used provided all information requested is included.

BID	Differentiation Name as per Division	Description	Quantity	Unit Price	Labor DBE XYZ Contracting	Non-DBE ABC Construction Co.	Prior Self Performance	General Contractor's Percentage Difference
202	019	SAW CONCRETE	LF	54				
203	0101	COMMON EXCAVATION-TYPE A	CY	107,262				
203	0108	TOPSOIL-BORROW AREA	CY	31,269				
203	0109	TOPSOIL	CY	83,126				
TOTALS								

USING THE PROPOSAL'S BID ITEMS TO IDENTIFY TYPES OF WORK FOR DBE SUBCONTRACTING

Example:

- Print the Bid Items Listing from the Project Proposal.
- Identify types of work your firm intends to subcontract out.
- Refer to the DBE Directory to determine the firms certified to perform the functions you've selected to subcontract.
- Identify whether there may be DBE subcontracting opportunities with your larger subcontractors
- Identify the projected costs of the types of work selected.
- Determine the percentage of the subcontracted amount by dividing the amount by your total expected bid amount.
- If at the time of bid your firm has not achieved the project's DBE goal, submit this plan with your DBE Participation Plan.

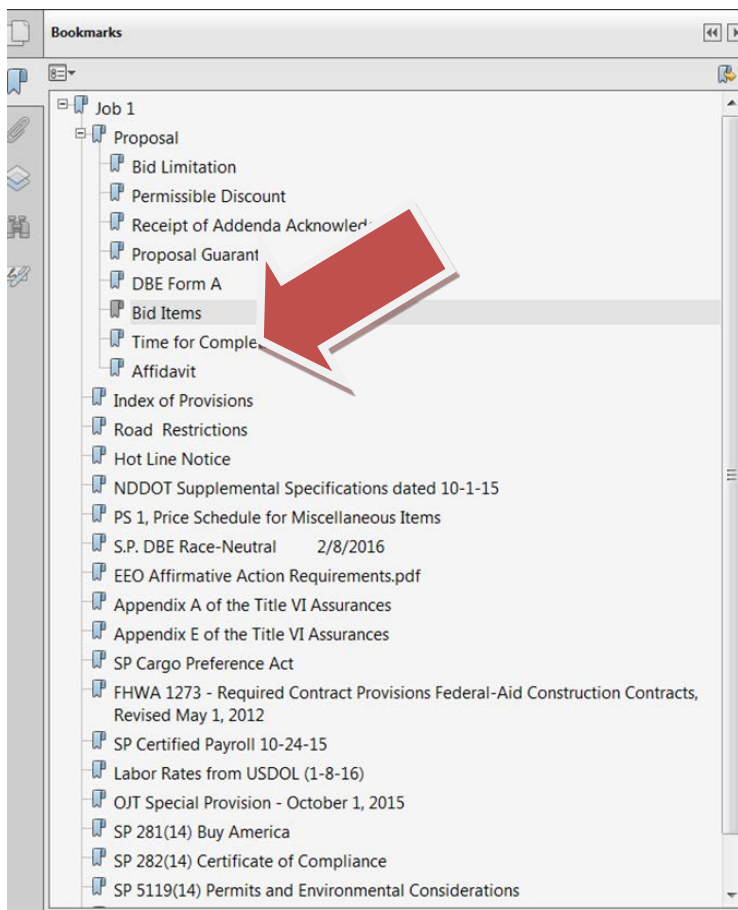

Bookmarks

- Job 1
 - Proposal
 - Bid Limitation
 - Permissible Discount
 - Receipt of Addenda Acknowledgment
 - Proposal Guarant
 - DBE Form A
 - Bid Items**
 - Time for Comple
 - Affidavit
 - Index of Provisions
 - Road Restrictions
 - Hot Line Notice
 - NDDOT Supplemental Specifications dated 10-1-15
 - PS 1, Price Schedule for Miscellaneous Items
 - S.P. DBE Race-Neutral 2/8/2016
 - EEO Affirmative Action Requirements.pdf
 - Appendix A of the Title VI Assurances
 - Appendix E of the Title VI Assurances
 - SP Cargo Preference Act
 - FHWA 1273 - Required Contract Provisions Federal-Aid Construction Contracts, Revised May 1, 2012
 - SP Certified Payroll 10-24-15
 - Labor Rates from USDOL (1-8-16)
 - OJT Special Provision - October 1, 2015
 - SP 281(14) Buy America
 - SP 282(14) Certificate of Compliance
 - SP 5119(14) Permits and Environmental Considerations

PROPOSAL FORM
North Dakota Department of Transportation

BID OPENING: September 09, 2016

Job 001
Page 7 of 9

BID ITEMS

Project: NH-4-002(117)187 (PCN-21370)

Bidder must type or neatly print unit prices in numerals, make extensions for each item, and total. Do not carry unit prices further than three (3) decimal places.

Item No.	Spec. Code No.	Description	Unit	Approx. Quantity	Unit Price \$5555.000	Amount \$5555.000
001	103	0100 CONTRACT BOND	L SUM	1.		
002	256	0200 RIPRAP GRADE II	CY	100		
003	252	0100 FLOTATION SILT CURTAIN	LF	200.		
004	302	0321 AGGREGATE SURFACE COURSE CL 5	CY	465.		
005	700	1000 MOBILIZATION	L SUM	1.		
006	704	1000 TRUCKS AND TRAILERS	UNIT	689		
007	704	1010 TRAILER SERVICE TYPE B-70	EA	1.		
008	704	1010 TRAILER SERVICE TYPE B-70	EA	1.		
009	704	1060 DELINEATOR DRUMS	EA	22.		
010	704	1067 TUBULAR MARKERS	EA	18.		
011	704	1087 SEQUENCING ARROW PANEL TYPE C	EA	1.		
012	704	3510 PRECAST CONCRETE MED BARRIER-STATE FURNISHED	EA	36.		
TOTAL SUM BID						

Supply Only

Supply & Deliver

Haul only

**NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
EEO AFFIRMATIVE ACTION REQUIREMENTS**

March 15, 2014

Bidders shall become familiar with the following requirements and be prepared to comply in good faith with all of them:

APPENDIX A

Notice or Requirement for Affirmative Action to Ensure Equal Employment Opportunity (Executive Order 11246).

1. The Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth herein.
2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate work force in each trade on all construction work in the covered area, are as follows:
 - a. Goals for Female Participation in Each Trade – Statewide6.9%
 - b. Goals for Minority Participation in Each Trade by County:
Barnes, Cass, Dickey, Eddy, Foster, Griggs, LaMoure, Logan,
McIntosh, Ransom, Richland, Sargent, Steele, Stutsman, Traill0.7%

Grand Forks1.2%

Benson, Cavalier, Nelson, Pembina, Ramsey, Towner, Walsh2.0%

Burleigh, Morton0.4%

Adams, Billings, Bowman, Dunn, Emmons, Golden Valley, Grant,
Hettinger, Kidder, Mercer, Oliver, Sheridan, Sioux, Slope, Stark, Wells . . .1.3%

Bottineau, Burke, Divide, McHenry, McKenzie, McLean, Mountrail,
Pierce, Renville, Rolette, Ward, Williams4.4%

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both federally involved and nonfederally involved construction.

The Contractor's compliance with the Executive Order and the regulations in 41 CFR 60-4 shall be based on its implementation of the Equal Opportunity Clause specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3 (a)

and its efforts to meet the goals established for the geographical area where the contract resulting from this solicitation is to be performed. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order, and the regulations in 41 CFR part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall notify the Office of Federal Contract Compliance Programs, in writing, within ten working days of award of any subcontract in excess of \$10,000. The notification shall include the name, address, and telephone number of the subcontractor and their employer identification number; dollar amount of the contract, estimated starting and completion dates of the contract; the contract number; and geographical area in which the contract is to be performed.

Notification should be sent to

U.S. Department of Labor/ESA
OFCCP
Denver District Office
1244 Speer Boulevard
Denver, Colorado 80202
Phone: 720-264-3200
Fax: 720-264-3211

4. As used in this "Notice" and in the contract for this project, the "covered area" is the State of North Dakota.

APPENDIX B

Standard Federal Equal Employment Opportunity Construction Contract Specifications
(Executive Order 11246)

1. As used in these specifications
 - a. "Covered area" means the geographical area described in the proposal from which this contract resulted.
 - b. "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority.
 - c. "Employer identification number" means the Federal Social Security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.
 - d. "Minority" includes:

- (1) Black (all persons having origins in any of the Black African racial groups, not of Hispanic origin);
 - (2) Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American, or other Spanish Culture or origin, regardless of race);
 - (3) Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and
 - (4) American Indian or Alaskan Native (all persons having origins in any of the original peoples of North America and maintaining identifiable tribal affiliations through membership and participation of community identification)
2. Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of \$10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the proposal from which this contract resulted.
3. If the Contractor is participating (pursuant to 41 CFR 60-4.5) in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan. Each Contractor or Subcontractor participating in an approved Plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other Contractors or Subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or Subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.
4. The Contractor shall implement the specific affirmative action standards provided in paragraphs 7a through p of these specifications. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. The Contractor is expected to make substantially uniform progress toward its goals in each craft.
5. Neither the provisions of any collective bargaining agreement, nor the failure by a union with whom the Contractor has a collective bargaining agreement, to refer either minorities or women shall excuse the Contractor's obligations under these specifications, Executive Order 12466, or the regulations promulgated pursuant thereto.
6. In order for the nonworking training hours of apprentices and trainees to be counted

in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor. (Training programs approved by the North Dakota Department of Transportation are recognized by the U.S. Department of Labor.)

7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully, and shall implement affirmative action steps at least as extensive as the following:
 - a. Ensure and maintain a working environment free of harassment, intimidation, and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all Foremen, Superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such sites or in such facilities.
 - b. Establish and maintain a current list of minority and female recruitment sources; provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its union have employment opportunities available, and maintain a record of the organization's responses.
 - c. Maintain a current file of the names, addresses, and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union, or if referred, not employed by the Contractor, this shall be documented in the file with the reason therefore, along with whatever additional actions the Contractor may have taken.
 - d. Provide immediate written notification to the Director when the union with which the Contractor has a collective bargaining agreement has not referred to the Contractor a minority or woman sent by the Contractor, or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.
 - e. Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to

the sources compiled under 7b above.

- f. Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations; by including it in any policy manual and collective bargaining agreement; by publicizing it in the Company newspaper, annual report, etc., by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the Company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.
- g. Review, at least annually, the Company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination, or other employment decisions including specific review of these items with on-site supervisory personnel such as Superintendents, General Foremen, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.
- h. Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing it with the Contractors and Subcontractors with whom the Contractor does or anticipates doing business.
- i. Direct its recruitment efforts, both oral and written, to minority, female, and community organizations, to schools with minority and female students, and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notification to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.
- j. Encourage present minority and female employees to recruit other minorities and women, and where reasonable, provide after school, summer, and vacation employment to minority and female youth both on the site and in other areas of the Contractor's work force.
- k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.
- l. Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities and encourage these to seek or to prepare for, through appropriate training, etc., such opportunities.
- m. Ensure that seniority practices, job classifications, work assignments, and other personnel practices do not have a discriminatory effect by continually monitoring

- all personnel and employment related activities to ensure that the EEO policy and the Contractor's obligations under these specifications are being carried out.
- n. Ensure that all facilities and Company activities are non-segregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.
 - o. Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction Contractors and Suppliers, including circulation of solicitations to minority and female Contractor associations and other business associations.
 - p. Conduct a review, at least annually, of all Supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligation
8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (7a through p) The efforts of a Contractor association, joint Contractor- union, Contractor-community, or other similar group of which the Contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under 7a through p of these Specifications provided that the Contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program are reflected in the Contractor's minority and female work force participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply, however, is the Contractor's, and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's noncompliance.
9. Goals for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minorities, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specific minority group of women is underutilized).
10. The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex, or national origin.
11. The Contractor shall not enter into any subcontract with any person or firm d - barred from Government contracts pursuant to Executive Order 11246.
12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, termin -

tion, and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in paragraph 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41 CFR 60 4.8.
14. The Contractor shall designate a responsible official to monitor all employment-related activity to ensure that the Company EEO policy is being carried out, to submit reports relating to the provisions hereof as may be required by the Government, and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade, union affiliation, if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form, however, to the degree that existing records satisfy this requirement, Contractors shall not be required to maintain separate records.
15. Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon application of requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

**NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
APPENDIX A OF THE TITLE VI ASSURANCES**

During the performance of this contract, the Contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the Contractor) agrees as follows:

1. Compliance with Regulations: The Contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, the Federal Highway Administration, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

2. Non-discrimination: The Contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The Contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.

3. Solicitations for Subcontracts, Including Procurements of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation made by the Contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the Contractor of the Contractor's obligations under this contract and the Acts and the Regulations relative to Non-discrimination on the grounds of race, color, or national origin.

4. Information and Reports: The Contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Federal Highway Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a Contractor is in the exclusive possession of another who fails or refuses to furnish the information, the Contractor will so certify to the Recipient or the Federal Highway Administration as appropriate, and will set forth what efforts it has made to obtain the information.

5. Sanctions for Noncompliance: In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to:

- a. withholding payments to the Contractor under the contract until the Contractor complies; and/or
- b. cancelling, terminating, or suspending a contract, in whole or in part.

6. Incorporation of Provisions: The Contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The Contractor will take action with respect to any subcontract or procurement as the Recipient or the Federal Highway Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the Contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the Contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the Contractor may request the United States to enter into the litigation to protect the interests of the United States.

**NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
APPENDIX E OF THE TITLE VI ASSURANCES**

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the Contractor) agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Pertinent Non-Discrimination Authorities:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 *et seq.*), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 *et seq.*), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 *et seq.*), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures non-discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 *et seq.*)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

CARGO PREFERENCE ACT (CPA)

DESCRIPTION

The Federal Highway Administration (FHWA) in partnership with the Federal Maritime Administration (MARAD) has mandated the implementation of 46 CFR 381 making the cargo preference requirements applicable to the Federal Aid Highway Program.

The requirements of this Special Provision apply to items transported by ocean vessel.

CONTRACT REQUIREMENTS

A. General

Utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels. Gross tonnage is computed separately for dry bulk carriers, dry cargo liners, and tankers.

Furnish a legible, English language copy of a rated 'on-board' commercial ocean bill-of-lading for each shipment of cargo described in the previous paragraph. Furnish the bill-of-lading within 20 days following the date of loading for shipments originating in the United States and within 30 working days following the date of loading from shipments originating outside the United States.

Furnish bills-of-lading to the Engineer and to the following:

Division of National Cargo
Office of Market Development
Maritime Administration
Washington, DC 20590

B. Subcontracts

Include the language in Section "A, General" of this Special Provision in all subcontracts issued pursuant to this contract.

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar

with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on [Form FHWA-1391](#). The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions

of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. (1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program. Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-

Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly

rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

- (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
- (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is

evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.

2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS
PREFERENCE FOR APPALACHIAN DEVELOPMENT
HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS
ROAD CONTRACTS**

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

**CONTRACT SPECIAL PROVISION
MANDATORY USE OF
AUTOMATED CERTIFIED
PAYROLL**

All contractors on NDDOT federal-aid projects, including city/county projects, must file weekly Certified Payrolls, as required under Davis-Bacon and Related Acts (DBRA). **The NDDOT requires the use of LCPtracker, a paperless online system for entering and filing these certified payrolls. Certified payrolls in paper form will no longer be accepted, and all contractors must file their payroll electronically.**

After award, the Prime Contractor (Prime) must:

1. Designate an individual as Prime Approver for the project. The Prime Approver will oversee DBRA payroll for all subcontractors of all tiers on the project. A contractor may inform the NDDOT Civil Rights Division (CRD) that the same individual will be Prime Approver on all projects. CRD will set up the Prime Approver Account for the project. Thereafter, the Prime Approver will have the responsibility to use the Account to approve all payroll on the project. Until payroll is approved by the Prime Approver, it cannot be viewed by the NDDOT and it is not deemed submitted to the NDDOT.
2. The prime contractor has the responsibility to assign subcontractors within the LCPtracker system to the project and to ensure that all subcontractors are aware of the necessity to file payrolls electronically and are set up within the system. Any subcontractor not on Approved Subcontractor List or the Qualified Contractor List must register and be placed on one of these lists before entry of the subcontractor into LCPtracker. These lists may be found at <https://www.dot.nd.gov/pacer/qualified.htm> and <https://www.dot.nd.gov/pacer/registered.htm>. Only Prime Approvers or the CRD may enter subcontractors into LCPtracker.
3. The prime contractor has the responsibility to see that all required payrolls are filed by subcontractors of all tiers. If payroll is rejected or project staff otherwise requests a correction of payroll by any subcontractor on the project, the prime contractor has a responsibility to see that corrected payroll is submitted.
4. For further information on certified payroll, go to the NDDOT Labor Compliance/LCPtracker page at <https://www.dot.nd.gov/divisions/civilrights/laborcompliance.htm>. On this page, contractors will find a Getting Started on LCPtracker Guide and a Prime Approver Guide. Recorded trainings are also available on this page for both contractors and prime approvers. Contractors can obtain an LCPtracker user name and password by calling the NDDOT Civil Rights Division at (701) 328-2605 or (701) 328-2576.

09/06/2017

**CONTRACT SPECIAL PROVISION
MANDATORY USE OF ONLINE
DBE PROJECT PAYMENT REPORTING**

Payments made to all tiers of subcontractors must be reported electronically using the B2GNow system. Paper forms (Monthly Record of DBE Project Payments – SFN 60638) will no longer be accepted.

After award, the Prime Contractor (Prime) must:

1. Create a new account if not already in the system. Create a user for each employee who will use the system. If there is no account already set up, you can email Customer Support directly from the Account Lookup page. Your email address will be your user ID. Customer Support will email you with the information you need to log in.
2. Once the project has been awarded and the Utilization Plan (UP) has been created in the system and assigned to the contractor it must be filled out and submitted. An automated email message will be sent to a designated individual within the company alerting them that a UP is pending. Log into the system using the link provided in the email. For each contract the Prime must add all DBE and non-DBE subs being used on the project. When all information has been provided submit the UP. Civil Rights will review the UP and if everything is in order it will be approved. If changes need to be made the UP will be returned to the contractor and they will have 7 days to make the necessary adjustments and resubmit. If DBE or non-DBE subcontractors are added after the initial UP is set up the Prime can submit a request for them to be added.
3. Once the UP is submitted the project is “locked in” after Financial Management has processed the project in their system. After a UP is locked in payments from NDDOT to the Prime are reported through the system. The Prime must start reporting DBE and non-DBE subcontractor payments through the system in accordance with prompt pay guidelines outlined in the contract.
4. A user manual for UP’s and recording project payments is available to the contractors within the system. After login they can go to View>>My Utilization Plans and they will find the guide on the top of the Utilization Plan screen. They do not have to have a current UP assigned to them to see this guide. The guide is also on the actual UP page when a UP is assigned to them.
5. For further information on the Certification and Compliance System, go to the NDDOT Civil Rights page at <https://www.dot.nd.gov/divisions/civilrights/civilrights.htm>. There is various training available on a regular basis, to sign up for training go to the main Certification and Compliance System page and click the “Training and Events” box. Contractors that need to obtain an account or need subcontractors set up within the system should call the NDDOT Civil Rights Division at (701) 328-3116 or email civilrights@nd.gov

10/3/2017

LABOR RATES FROM U.S. DEPARTMENT OF LABOR

Page 1 of 4

NDDOT's *Davis-Bacon Wage and Payroll Requirements Handbook* is available at:
www.dot.nd.gov/manuals/civilrights/davisbacon.pdf

U.S. DEPARTMENT OF LABOR

STATE NORTH DAKOTA	COUNTY STATEWIDE	DECISION NO. ND170002	PAGE 1
		DATE OF DECISION 1-6-17	

Revised 1-13-17 (Mod. No. 1)
 Revised 7-7-17 (Mod. No. 2)
 Revised 9-15-17 (Mod. No. 3)
 Revised 10-6-17 (Mod. No. 4)

	Basic Hourly Rates	Fringe Benefits Payments			
		H & W/Pensions	Vacation	App. Tr	Others
CARPENTERS	\$27.40	\$ 6.70			
CEMENT MASONS/FINISHERS	27.40	6.70			
LINE CONSTRUCTION:					
Lineman	41.50	5.50 + 29%			
Cable Splicer	41.50	5.50 + 29%			
Line Equipment Operator	35.50	5.50 + 29%			
Groundman	23.67	5.50 + 19%			
ELECTRICIANS:					
Electrician	40.51	9.10 + 10.5%			
Cable Splicer	40.91	9.10 + 10.5%			
(Adams, Billings, Bottineau, Bowman, Burke, Burleigh, Divide, Dunn, Emmons, Golden Valley, Grant, Hettinger, McHenry, McKenzie, McLean, Mercer, Morton, Mountrail, Oliver, Pierce, Renville, Rolette, Sheridan, Sioux, Slope, Stark, Ward, and Williams Counties)					
Electrician	30.13	12.36			
Cable Splicer	28.30	11.26			
(Barnes, Benson, Cavalier, Dickey, Eddy, Foster, Grand Forks, Griggs, Kidder, La-Moure, Logan, McIntosh, Nelson, Pembina, Ramsey, Ransom, Richland, Sargent, Steele, Stutsman, Towner, Traill, Walsh, and Wells Counties)					
Electrician (Cass County)	14.72	3.40			
WELDERS: Receive rate prescribed for craft performing operation to which welding is incidental					
LABORERS:					
Group 1 Drill Runner Tender; Flaggers and Pilot Car Drivers; General Construction Laborer; Light Truck and Pickup Driver; Pipe Handler; Sack Shaker (cement and mineral filler); Salamander Heater and Blower Tender	19.70	2.50			

Page 2 of 4

Revised 1-13-17 (Mod. No. 1)
Revised 7-7-17 (Mod. No. 2)
Revised 9-15-17 (Mod. No. 3)
Revised 10-6-17 (Mod. No. 4)

Page 2

	Basic Hourly Rates	Fringe Benefits Payments			
		H & W/Pensions	Vacation	App. Tr.	Others
LABORERS: (CONT.)					
Group 2 Bituminous Worker (Shoveler, Dumper, Raker, and Floater); Brick and Mason Tender; Bulk Cement Handler; Carpenter Tender; Chain Saw Operator; Chipping Hammer, Grinders, and Paving Brakers (tamper-dirt); Concrete Bucket Signalman; Concrete Curing Man (not water); Concrete Saw Operator; Concrete Vibrator Operator; Conduit Layer, telephone or electrical; Culvert Pipe Layer; Form Setter (pavement); Gas, Electric, or Pneumatic Tool Operator; Kettleman (bitum. or lead); Multiplate Pipe Layer; Power Buggy Operator; Semi Skilled Laborer					
	\$19.95	\$ 2.50			
Group 3 Bottom Man (sanitary sewer, storm sewer, water, and gas lines); Caisson Worker; Concrete Mixer Operator (one bag capacity); Mortar Mixer					
	20.10	2.50			
Group 4 Drill Runner (includes Wagon Churn or Air Track); Pipe Layers (sanitary sewer, storm sewer, water, and gas lines); Powderman, gunite and sandblast; Nozzleman; Reinforcing Steel Setters/Tiers; Concrete Finisher Tender					
	20.85	2.50			
POWER EQUIPMENT OPERATORS:					
Group 1 All Cranes, 60 tons and over; Cranes doing piling, sheeting, dragline/clam work; Derrick (Guy and Stiff); Gentry Crane Operator; Helicopter Operator; Mole Operator or Tunnel Mucking Machine; Power Shovel, 3-1/2 cy and over; Traveling Tower Crane					
	28.60	16.15			
Group 2 All Cranes, 21 tons and up to 59 tons; Backhoe Operator, 3 cy and over; Creter Crane; Dredge Operator, 12" and over; Equipment Dispatcher; Equipment Foreman, Finish Dozer, Finish Motor Grader; Front End Loader Operator, 8 cy and over; Master Mechanic (when super-vising 5 or more Mechanics); Mon-O-Rail Hoist Operator; Power Shovel, up to and including 3-1/2 cy; Tugboat					
	27.70	16.15			

Page 3 of 4

Revised 1-13-17 (Mod. No. 1)
Revised 7-7-17 (Mod. No. 2)
Revised 9-15-17 (Mod. No. 3)
Revised 10-6-17 (Mod. No. 4)

Page 3

	Basic Hourly Rates	Fringe Benefits Payments			
		H & W/Pensions	Vacation	App. Tr.	Others
POWER EQUIP. OPERATORS: (CONT.) Group 3 All Cranes, 20 tons and under; Asphalt Paving Machine Operator; Asphalt Plant Operator; Automated Grade Trimmer; Backhoe Operator, 1 cy up to and including 2-1/2 cy; Boom Truck, Hydraulic, 8 tons and over; Cableway Operator; Concrete Batch Plant Operator (electronic or manual); Concrete Mixer Paving Machine Operator; Concrete Paver, Bridge Decks; Concrete Pump; Concrete Spreader Operator and Belt Placer; Crushing Plant Operator; Dozer Operator; Dredge Operator or Engineer, 11" and under; Drill Rigs, Heavy Duty Rotary or Churn or Cable Drill; Front End Loader Operator, 3-1/2 cy up to and including 7-1/2 cy; Gravel Washing and Screening Plant Operator; Locomotive, all types; Mechanic or Welder, Heavy Duty; Motor Grader Operator; Pavement Breaker, Non-Hydro Hammer Type; Pipeline Wrapping, Cleaning, and Bending Machine Operator; Power Actuated Auger and Horizontal Boring Machine Operator, 6" and over; Refrigeration Plant Engineer; Roto Milling Machine (Surface Planer), 43" and over; Scraper Operator; Slip Form Concrete Paving Operator; Tandem Pushed Quad 9 or similar; Tractor with Boom Attachment; Trenching Machine Operator, 100 H.P. and over Group 4 Articulated/Off Road Hauler; Asphalt Dump Person; Asphalt Paving Screed Operator; Backhoe, up to and including 1/2 cy; Boring Machine Locator; Con-sole Board Operator; Curb Machine Operator; Distributor Operator (Bituminous); Forklift Operator; Front End Loader, 1-1/2 cy up to and including 3 cy; Grade Person; Gravel Screening Plant Operator (not Crushing or Washing); Greaser; Lazer Screed Operator; longitudinal Float and Spray Operator; Micro Surfacer Machine; Motor Grader Operator (Haul Road); Paving Breaker, Hydro Hammer Type; Pugmill Operator; Push Tractor; Roller, Steel and Rubber on Hot Mix Asphalt Paving; Rotomill Machine (Surface Planer), up to and including 42"; Rumble Strip Machine; Sand and Chip Spreader; Self-Propelled Sheepfoot Packer with or without Blade Attachment; Self-Propelled Traveling Soil Stabilizer; Sheepfoot	\$27.45	\$16.15			

LABOR RATES

Page 4 of 4

1-6-17

Revised 1-13-17 (Mod. No. 1)

Revised 7-7-17 (Mod. No. 2)

Revised 9-15-17 (Mod. No. 3)

Revised 10-6-17 (Mod. No. 4)

ND170002

Page 4

POWER EQUIP. OPERATORS: (CONT.)

Group 4 (cont.)

Packer with Dozer Attachment, 100 H.P. and over; Shouldering Machine; Slip Form, Curb and Gutter Operator; Slurry Seal Machine; Tamping Machine Operator; Tie Tamper and Ballast Machine; Trenching Machine Operator, 46 H.P. up to and including 99 H.P.; Truck Mechanic; Tub Grinder; Well Points; Fuel/Lube Operator

\$27.30

\$16.15

Group 5

Boom Truck, A-Frame or Hydraulic, 2 tons up to and including 7 tons; Broom, Self-Propelled; Concrete Saw (power operated); Cure Bridge Operator; Front End Loader Operator, less than 1-1/2 cy; Mobile Cement Mixer; Oiler; Power Actuated Auger and Horizontal Boring Machine Operator, up to and including 5"; Roller (on other than hot mix asphalt paving); Vibrating Packer Operator (Pad Type) (Self-Propelled); Water Spraying Equipment, Self-Propelled; Skidsteer Operator with attachments

26.45

16.15

Group 6

Brakeman or Switchman; Curb Machine Operator (Manual); Dredge or Tugboat Deckhand; Drill Truck Gravel/Testing Operator; Form Trench Digger (Power); Gunite Operator; Gunall; Paint Machine Striping Operator; Pick-up Sweeper, 1 cy and over Hopper Capacity; Scissor Jack (Self-Propelled) Platform Lift; Straw Mulcher and Blower; Stump Chipper Operator; Tractor Pulling Compaction or Acreting Equipment; Trenching Machine Operator, up to and including 45 H.P.; Assistant/Apprentice Operator

25.15

16.15

TRUCK DRIVERS:

Single-Axle Truck

28.02

12.65

Tandem- and Tri-Axle Truck

28.14

12.65

Tandem- and Tri-Axle Semi

28.45

12.65

Lowboy

28.45

12.65

Off Road Heavy Duty End Dumps, 20 Yards and Under

28.45

12.65

Euclid, Over 20 Yards

29.97

12.65

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses [29 CFR, 5.5 (a) (1) (ii)].

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION (NDDOT)

2017 ON-THE-JOB TRAINING PROGRAM SPECIAL PROVISION

The bidder's signature on the proposal sheet indicates the bidder agrees to take part in the On-the-Job Training (OJT) Program and to follow the OJT Program Manual and Special Provision. Contractors that fail to do so will be subject to suspension of progress payments or sanctions up to and including revocation of bidding privileges.

OJT is training conducted in a highway construction work environment designed to enable minority, female, and economically disadvantaged individuals to learn a bona fide skill and qualify for a specific occupation through demonstration and practice.

After a training program and trainee candidate have been approved, the contractor begins training its regular employee according to the approved program. The goal of this training is to retain the trainee as a permanent employee. OJT involves individuals at the entry level. Training is designed to help participants reach their fullest potential and become self-sufficient in the job.

I. POLICY STATEMENT

The purpose of the OJT Program is to provide training in the highway construction industry for minority, female, and economically disadvantaged individuals, from this time known as the targeted group. Pursuant to 23 Code of Federal Regulations Part 230, Subpart A, Appendix B - Training Special Provisions, this program provides for on-the-job training aimed at developing journey-level workers in skilled trades.

The Contractor shall take all necessary and reasonable steps to ensure that minorities and women have the opportunity to compete for and participate as trainees or apprentices and to develop as journey-level workers employed in the skilled trades.

Contractors should select a training program(s) based on their company's employment/staffing needs as stated in the OJT Program Manual.

II. INTRODUCTION/PROGRAM BACKGROUND

The OJT Program was originally prepared through the cooperative efforts of the Associated General Contractors of North Dakota (AGC); the Federal Highway Administration (FHWA); the North Dakota Department of Transportation (Department); and, other program stakeholders.

Successful operation of the OJT Program requires contractors to follow uniform and basic training procedures, keep records of trainee progress, and report each trainee's completion or termination.

III. ASSIGNED OJT POSITIONS

A. Trainee positions are assigned contractors based only on federal highway dollars awarded from October 1 to September 30. Trainee assignments are not project specific; that means the contractor may train program participants on any project where training opportunities exist.

The number of trainee positions assigned will be determined by formula based on calculations involving particular project specification numbers on applicable projects. The types of projects NOT applicable in the calculation to assign trainee positions are:

- County-only or state-only funded projects
- Emergency relief, concrete pavement repair (CPR), electrical, rest area, signing, striping projects
- Projects subject to Tribal Employment Rights Ordinances (TERO)
- Projects not let through NDDOT bid openings

- B. Contractors will receive the number of positions assigned and links to resources necessary for completion of program requirements via email.
- C. The number of trainee positions assigned to each contractor will increase proportionately, as shown below, for any applicable federally funded projects awarded to them.

For all federal highway dollars awarded from October 1 to September 30:

6,000,000 to 15,000,000	1	trainee
15,000,001 to 23,000,000	2	trainees
22,000,001 to 31,000,000	3	trainees
31,000,001 and above	4	trainees

A maximum of four (4) trainee positions in a federal fiscal year will be assigned to any prime contractor regardless of dollar amount. Carryover positions from a prior construction season are not included in the four trainee maximum, e.g., a contractor with one carryover and four assigned positions may have a total five trainees.

Failure to follow this OJT Special Provision and the accompanying OJT Program Manual may result in suspension of progress payments or sanctions up to and including revocation of bidding privileges.

IV. FUNDING

The Department will establish an OJT fund annually from which contractors may bill the Department directly for eligible trainee hours. The funds for payment of trainee hours on federal-aid projects will be made available based on 23 USC 504(e) to a maximum of \$100,000. The funds for payment of trainee hours on state-aid only projects will be allocated to a maximum of \$10,000.

V. ONLINE RESOURCES

OJT Program Manual: Includes program requirements, wage rates, and curriculum:
<https://www.dot.nd.gov/divisions/civilrights/docs/ojtprogram.pdf>

SFN 60226 Request for On-the-Job Training Program and Trainee Approval:
<http://www.dot.nd.gov/forms/sfn60226.pdf>

SFN 51023 Voucher for On-the-Job Training Program Hourly Reimbursement:
<http://www.dot.nd.gov/forms/sfn51023.pdf>

Davis-Bacon and Related Acts (DBRA) Handbook: <https://www.dot.nd.gov/manuals/civilrights/davisbacon.pdf>

VI. APPROVALS REQUIRED

- A. Requests for Training Programs and Trainee Approvals must be submitted to Civil Rights Division (CRD). Contractors must request and receive program and trainee candidate approval in order to pay trainees less than the established Davis-Bacon wage for the job classification concerned. No training program hours will count toward the fulfillment of an assigned trainee position or be eligible for reimbursement without prior approval. No retroactive approval will be granted.
 - 1. Submit SFN 60226 *Request for On-the-Job Training Program and Trainee Approval* with each trainee's employment application. <http://www.dot.nd.gov/forms/sfn60226.pdf> and the pre-approved training curriculum for each trainee position assigned by April 1 or within fifteen (15) calendar days of notification of any additional position assignments.
 - 2. Submit SFN 7857 *Application for Eligibility*, Job Service North Dakota (JSND) approval of an economically disadvantaged individual for participation in the OJT Program.

- B. Pre-approved curriculum: NDDOT's OJT Program Manual contains pre-approved training curriculum for a number of skilled trade positions. Contractors should select a training program(s) based on their company's employment/staffing needs.
- C. Customized curriculum: To request a training curriculum not included in the pre-approved curriculum, submit a written request for approval by NDDOT and FHWA.

The request must include:

- A training curriculum, including the classification requested, minimum number of hours required, and type of training the individual will receive to achieve journey-level worker status.
- A minimum wage scale.

If approved, each new classification must comply with the provisions specified in the OJT Program Manual. No hours worked prior to approval will be credited toward completion of the customized training program. Training programs for classifications not covered by the Davis-Bacon and Related Acts (DBRA) will be considered on a limited basis.

The contractor may commence its "customized" training as of the date of the written approval.

- D. Union apprenticeship and on-the-job training programs registered with the Bureau of Apprenticeship and Training (BAT), U.S. Department of Labor, may be used for trainee positions assigned under the OJT Program, provided the trainees or apprentices are minority, female, or economically disadvantaged. Nonminority males not certified as economically disadvantaged may only be used when the contractor has requested and received approval, from the Department, for additional trainee positions. The apprenticeship indenture agreements serve as the trainee's job application and must be provided prior to any hours being credited toward OJT Program completion.
- E. Power Equipment Operators:

The contractor may train an individual on a combination of equipment if each piece of equipment falls within the same groups of power equipment operators identified in the training curricula (groups 1-3 and groups 4-6). These power equipment operator groups are referenced to the federal DBRA wage rates contained in the contract proposal. As an example, a "utility operator" may receive training on a broom, a front-end loader less than 1½ cubic yards, or other piece of equipment that is used around a paver if each piece falls within either groups 1-3 or groups 4-6. When multiple wage rates apply, the trainee's wage will be based on the equipment being operated at the time or on the highest of the applicable wage rates.

Use of the classification "pickup machine operator (asphalt dump-person)" as a group 4 power equipment operator is considered standard industry practice. The classification is defined as: "Operates the controls on the pickup machine that runs in front of the paver, trips the levers on the dump trucks, and balances the loads for the paver. The pickup machine operates on similar principles as a shouldering machine."

- F. Contractors not qualifying for the OJT Program, or contractors desiring to train more than the allotted number of trainees, may apply to the Department for additional trainee positions. Approval of additional positions will be at the sole discretion of the Department. The Department will take into consideration whether there is enough work for the trainee to successfully complete the curriculum and whether the contractor will be exceeding the allowable ratio of trainees to journey-workers (generally considered to be one trainee or apprentice to every three to five journey-workers).

The additional positions may be filled by individuals outside of the targeted groups. The contractor may pay the reduced training rates to additional trainees outside of the targeted groups, but will not receive hourly reimbursement for any individuals who are outside the targeted groups.

VII. NDDOT'S RESPONSIBILITIES

- A. The NDDOT OJT supportive services (OJTSS) consultant will monitor excerpts from the weekly certified payrolls submitted with the monthly vouchers for reimbursement. This includes weekly payrolls from

contractors working on state funded only projects. On contracts where certified payrolls are not required and not available for supporting documentation, contractors may enter trainee wages, hours in training, and the project control number(s) (PCN) in a spreadsheet to support their reimbursement vouchers. In this case, contractors should work with OJTSS to assure that all information required for payment is provided. The OJTSS consultant will assess when the trainees have completed the specified number of hours and their wages are increased accordingly. The OJTSS consultant will also assure that applicable fringe benefits are paid either directly to the trainees or for the trainee into approved plans, funds, or programs.

- B. The OJTSS consultant is charged with visiting trainees and monitoring their progress under the OJT Program. To facilitate the on-site visits, the OJTSS consultant will contact contractors for the location of the trainees weekly.

VIII. CONTRACTOR'S RESPONSIBILITIES

- A. Consistently demonstrate efforts to recruit, hire, and train candidates for the OJT Program.
- B. Assign each trainee to a particular person—either a supervisor or an employee proficient in the skills to be trained—who shall see that the trainee is given timely, instructional experience. This person must be familiar with the OJT Program, keep proper records, and ensure completion of the required training hours in accordance with the training curriculum.
- C. Appoint a company employee who will be available and responsive to weekly contacts by the OJTSS consultant. OJTSS monitors the status of assigned trainee positions (e.g., program and trainee approvals, trainees' progress, etc.). The OJTSS consultant will contact the individual listed on the company's approved SFN 60226 Request for OJT Trainee Approval. This person must reply to communications from the Department and the OJTSS consultant in a timely manner.
- D. Make trainees available to the OJTSS consultant for at least two on-site visits during the construction season.
- E. Make the trainer and project superintendent available to the OJTSS consultant for at least two on-site visits each construction season.
- F. Make trainees aware they are formally enrolled in the OJT program.
- G. Identify trainees on the payroll excerpts, for example: "grp. 4 roller operator trainee." This includes trainees in job classifications not covered by DBRA. Handwritten notes are appropriate for identification.
- H. Notify the Department when a trainee completes the number of hours required to graduate from the OJT Program. The Department will issue the trainee a certificate of completion and a wallet-sized card as proof of the graduate's successful training program completion.
- I. Notify the Department to "propose graduation" or discontinue the training period of a trainee who has completed 90% or more of their hours and thereafter advance the trainee to journey-worker status.
- J. Elect to upgrade proficient trainees from one power equipment operator group or truck driver group to another, with the approval of CRD. Fewer hours are required to complete the upgraded position.

Minimum number of hours required:

Power Equipment Operator Groups 4-6 to Groups 1-3 = 400 hrs.
Class C Truck Driver to Class B = 200 hrs.
Class B Truck Driver to Class A = 200 hrs.

Depending on the variety of experience the trainee has gained under the previous curriculum, the difference in the hours may be deducted from the actual operation of the piece of equipment or truck. The contractor will need to review the trainee's past performance in order to make this determination.

- K. May hire commercial driver's license (CDL) holders as truck driver trainees. Those having over-the-road driving experience, with little or no highway construction experience, may be considered to have completed

the Class C truck driver training curriculum and, therefore, are eligible to be upgraded to a Class B truck driver trainee, with the approval CRD.

- L. May transfer trainees from one project to another in order to complete the OJT Program. If transfers are made, CRD must be notified and provided with the name of the trainer. The training hours will count toward overall OJT Program completion.
- M. May train trainees on municipal, private, out-of-state projects or other non-highway work. These training hours must be paid at the OJT minimum wage scale to count toward their OJT Program completion; however, no program reimbursement will be made for those hours.
- N. May delegate or reassign trainee positions to subcontractors, with the acceptance of the subcontractors and the approval of CRD. The prime contractor must verify that the trainee will be able to accumulate enough hours to complete his or her training program. If approved, the subcontractor must obtain training program and trainee approval from CRD before the trainee begins work under the OJT program. Program reimbursement will be made directly to the prime contractor. The trainee position will remain the responsibility of the prime contractor.
- O. May use trainees on projects subject to TERO requirements as part of the core crew or as part of the skilled labor supplied by the contractor. The training hours will count toward overall OJT Program completion; however, no program reimbursement will be made for those hours unless it is a NDDOT let project.
- P. May not use one trainee to simultaneously fill multiple trainee positions
- Q. May use a trainee on a piece of equipment in groups 1-3 or groups 4-6 for one assigned trainee position, then once that trainee has completed the program, the trainee may be trained on a different piece of equipment in groups 1-3 or groups 4-6 to fulfill a second assigned trainee position. When a trainee is used for a second time within a group, the contractor must pay that trainee at the higher wage rate as described in paragraph B under Wage Rates (page 8).

IX. CLASSROOM TRAINING

- A. Classroom training may be used to train employees. Each classroom training curriculum must be pre-approved by CRD if the contractor wishes to count the classroom hours as training hours and be reimbursed.

Submit a proposed classroom training curriculum to CRD for approval. Define the type of training the individual will receive, classroom training curriculum, and the minimum number of hours required. The Department will determine the number of hours of credit each trainee will receive toward their training. No retroactive approval will be granted.
- B. Contractors will be reimbursed for classroom training hours after the trainee has completed 80 hours of work on highway construction projects.
- C. Reimbursement for classroom training will be limited to 60 hours per trainee per construction season. Reimbursement for classroom training required under the NDDOT Transportation Technician Qualification Program will be at the NDDOT discretion.
- D. The minimum wage scale to be used for classroom training will be that of the first federal-aid highway construction project on which the trainee will be employed. If the trainee is already employed on a federal-aid highway construction project, the trainee will be paid in accordance with the minimum wage scale applicable to that project. However, if the first project on which the trainee will be employed is a state funded only contract, the minimum wage scale to be used for the classroom training will be that of the appropriate DBRA wage in effect at the time of award of the state funded contract.

X. WAGE RATES

- A. When the contractor is submitting the trainee's hours toward training program, wages paid shall in no case

be less than that of those stated in the approved curriculum. A trainee working on a state funded only project, must be paid the DBRA wage rate in effect at the time of award for the type of work the trainee is performing as a trainee.

- B. The minimum wage rates shall not be less than 80% of the journey-worker rate for the first two quarters of training, 85% of the journey-worker rate for the third quarter, and 90% of the journey-worker rate for the fourth quarter.
- Under the power equipment operator training curricula only, once a trainee has completed a training curriculum in either groups 1-3 or groups 4-6, the contractor may enroll the trainee in another training curriculum on a different piece of equipment in either groups 1-3 or groups 4-6.
 - The minimum wage rate under the trainee's second program shall not be less than 85% of the journey-worker rate for the first two quarters of training, 90% of the journey-worker rate for the third quarter, and 95% of the journey-worker rate for the fourth quarter.
 - For the purpose of the OJT Program, a quarter is 25% of the hours the trainee works toward completion of their approved program. The first two quarters of a 550-hour training curriculum would end after 275 hours, the third quarter after 138 hours, and the fourth after 137 hours.
- C. At any time hours are being attributed toward the completion of the approved training program, trainees shall be paid full fringe benefit amounts, where applicable, in accordance to DBRA requirements.
- D. At the completion of the OJT Program, the trainee shall receive the wages of a skilled journey-worker.

XI. RECRUITMENT AND SELECTION

- A. Prerequisites:
- Trainees must possess basic physical fitness for the work to be performed, dependability, willingness to learn, ability to follow instructions, and an aptitude to maintain a safe work environment.
- B. Licenses:
- Truck driver trainees must possess appropriate driver permits or licenses for the operation of Class A, B, and C trucks. When an instructional permit is used in lieu of a license, the trainee must be accompanied by an operator who:
1. Holds a license corresponding to the vehicle being operated;
 2. Has had at least one year of driving experience; and
 3. Is occupying the seat next to the driver.
- C. Recruitment:
1. Place notices and posters setting forth the contractor's Equal Employment Opportunity (EEO) Policy and the availability of the OJT Program in areas readily accessible to employees, applicants for employment, and potential employees.
 2. Employ members of the targeted group (minority, female, or economically disadvantaged individuals) for all trainee positions assigned in accordance with the OJT Program. Additional positions requested by the contractor may be filled by individuals outside of the targeted groups.
 3. Conduct systematic and direct recruitment through public and private employee referral sources.
 4. Screen present employees for upgrading to higher skilled crafts. A present employee may qualify as a trainee; however, no work hours will be reimbursed or counted toward program completion prior to training program and trainee approval by CRD.
- D. Selection:
1. Hire and enroll OJT trainee candidates who qualify as an individual in the targeted group.

2. Select a training program(s) based on their company's employment/staffing needs.
3. Individuals in the targeted group having experience in the selected curriculum may be eligible to participate in the OJT Program providing they:
 - Are not or have not been journey-workers in the selected curriculum, and/or
 - Have not been previously trained in the selected curriculum.
4. Non-minority males who are economically disadvantaged must obtain written certification from Job Service North Dakota (JSND) to qualify for the OJT Program. Contractors wishing to hire and enroll economically disadvantaged candidates must provide JSND's certification along with SFN 60226 and the employment application when requesting trainee approval.
 - JSND is the only agency that may certify an individual as economically disadvantaged. If JSND refers the candidate to the contractor, written certification under this category will be provided to the contractor at the time of the interview.
 - Any person wishing to obtain this certification must apply to JSND and complete the Workforce Investment Act Program's Application for Eligibility (SFN 7857). A contractor recruiting a candidate who may qualify must contact the Workforce Investment Act Program Manager at JSND. JSND contacts are also online:
<http://www.dot.nd.gov/divisions/civilrights/docs/jobservice-workforce-invest-contacts.pdf>

XII. BASIS OF PAYMENT

- A. Contractors will be paid \$4.00 for each hour of training in accordance with the OJT Program Manual.
- B. Reimbursement will be made directly to the contractor. Complete SFN 51023 Voucher for On-the-Job Training Program Hourly Reimbursement for each trainee. Attach excerpts from the weekly certified payrolls showing the trainee's hours, rate of pay, and how applicable fringe benefits were paid. Excerpts from weekly payrolls are also required for state funded only projects. Vouchers without excerpts from payrolls will not be paid until the excerpts are provided. If the excerpts from the payrolls are not provided within one week, the voucher will not be paid and the trainee's hours will not be credited toward completion.
<http://www.dot.nd.gov/forms/sfn51023.pdf>
- C. On contracts where certified payrolls are not required and not available for supporting documentation, contractors may enter trainee wages, hours in training, and the project control number(s) (PCN) in a spreadsheet to support their reimbursement vouchers. In this case, contractors should work with OJTSS to assure that all information required for payment is provided.
- D. Submit completed vouchers to CRD for approval and processing by the fifteenth (15th) calendar day of every following month the trainee is employed under the OJT Program.

Regardless, all vouchers for trainee hours worked on state funded only projects from July 1 to June 30 must be received by CRD no later than July 15 in order to be reimbursed. All vouchers for trainee hours worked on federally funded projects from October 1 to September 30 must be received by CRD no later than October 15 in order to be reimbursed. This is due to state and federal end-of-the-year budget fiduciary requirements.

XIII. FAILURE TO PROVIDE THE TRAINING OR HIRE THE TRAINEE AS A JOURNEY-WORKER

- A. The contractor is required to consistently demonstrate efforts to recruit, hire, and train candidates for the OJT Program.
- B. If the contractor does not show in a timely manner good faith efforts to recruit, hire, and train candidates in the targeted group, the Department may withhold progress payments
- C. If payments have been made, the Department will deduct the amount paid from the contractor's progress

payment.

- D. No payment shall be made to a contractor for failure to provide the required training or failure to hire the trainee as a journey-worker when such failure is caused by the contractor and evidences a lack of good faith on the part of the contractor in meeting the requirements of this OJT Program Special Provision.
- E. Hiring a trainee to begin training as soon as feasible after start of work is evidence of a contractor's good faith efforts to comply with the OJT Program requirements. Additional evidence supporting a contractor's good faith efforts would be to keep the trainee employed as long as training opportunities exist in the approved work classification or until the trainee has completed his or her training program.
- F. It is not required that all trainees be employed for the entire length of the construction season. A contractor will have fulfilled its responsibilities under this OJT Special Provision if it has provided acceptable training to the number of trainees assigned.

XIV. UNFILLED OR INCOMPLETE TRAINEE POSITIONS

- A. By October 1, provide written explanation of the firm's good faith efforts for unfilled or incomplete trainee assignments to CRD. CRD will decide, on a case-by-case basis, whether to carry the assigned positions over to the next construction season.
- B. Positions carried over from the previous construction season must be among the first positions filled at season startup. To notify CRD of the trainee's rehiring, submit *SFN 60226 Request for On-the-Job Trainee Approval*, marking 'Check if Carryover Trainee' in the Approved Training Program section of the form. There is no need for the training position or a returning trainee to be re-approved.
- C. Sanctions, up to and including revocation of bidding privileges, may be imposed on the contractor for failure to provide sufficient explanation and documentation for reasons assigned trainee positions when unfilled or incomplete.

XV. DEFINITIONS

Carryover Position: Incomplete trainee position carried forward from a prior program year.

Carryover Trainee: Trainee scheduled to continue training hours under prior year's approved program.

CRD: NDDOT's Civil Rights Division administers the NDDOT On-the-Job Training Program.

Good Faith Efforts: Documentation supporting a contractor's efforts to fulfill the program requirements, e.g., new hires list, advertising examples/locations, current employees reviewed for upgrades, etc.

Journey-worker: A worker employed in a trade or craft who has attained a level of skill, abilities, and competencies recognized within the industry.

OJT Supportive Services (OJTSS): Department contractor providing in-person oversight, support, and guidance to contractors and trainees to increase the effectiveness of approved training programs.

Trainee: A person who receives training through an apprenticeship program or other FHWA approved program.

Trainer/Supervisor: Contractor's employee assigned to train, supervise, and support a trainee.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****BUY AMERICA****DESCRIPTION**

Replace Section 106.08, “Buy America”, with the following:

Buy America.**A. General.**

Provide materials from domestic sources when products are permanently incorporated into the work and the products are composed of steel or iron materials.

Ensure all manufacturing processes, including applications of coatings, occur in the United States. A coating includes all processes required to apply the coating to a product to protect or enhance the value of the product.

The requirements of this SP are not applicable to the temporary iron and steel materials, including materials left in place at the Contractor’s convenience.

B. Steel and Iron Certification.**1. General.**

All certifications are submitted by the prime Contractor. When submitting certifications for materials that are subject to the requirements of this section, the prime Contractor shall include a signed letter stating that the submitted documentation is the documentation that was received by the prime contractor for the material incorporated into the work. The prime Contractor’s signature on the Department’s Certificate of Compliance form meets this requirement.

2. Bulk Manufactured Materials.

In addition to the requirements of Section 106.01 C, “Certificate of Compliance”, submit a contractor’s Certificate of Compliance stating that the iron and steel products listed in Table 1 that are permanently incorporated into the work are of domestic origin.

Table 1

Mailbox supports	Cable Fence Materials
Chain Link Fence Materials	Barbed Wire Fence Materials
Guardrail Components	Woven Wire Fence Materials
Culvert Markers	Delineators
Perforated Tube Sign Supports and Related Materials	

3. Other Steel and Iron Products.

For steel and iron products permanently incorporated into the work that are not listed in Table 1, submit a manufacturer’s Certificate of Compliance as specified in Section 106.01 C, “Certificate of Compliance” and the following information:

- a. A signed mill test report.
- b. A signed certification from each fabricator and manufacturer that has handled the steel and iron products affirming that all processes performed on the steel and iron products were conducted in the United States.
- c. Material descriptions, quantities, and a means of material identification (lot number, bin number, heat number, or factory identification) for each process performed on the steel and iron products.

Each certification shall contain the material identification from all previous fabricators and manufacturers in the process.

C. Foreign or Uncertified Products.

These requirements allow the use of steel and iron products produced and manufactured outside the United States, or products that cannot be certified as originating in the United States, of a total value less than 0.1 percent of the original contract amount, or \$2,500, whichever is greater.

The total value is that shown to be the cost of the steel and iron products as delivered to the project site.

Document the cost of:

- Foreign steel and iron products, plus
- Steel and iron products which cannot be certified as originating in the United States.

Submit the documentation of foreign and uncertified products with the certifications required in Section B, “Steel and Iron Certification” of this SP.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****CERTIFICATE OF COMPLIANCE (CoC)****DESCRIPTION**

Section 106.01 C, "Certificate of Compliance" is no longer valid. Use this Special Provision in place of that section.

Certificate of Compliance

A Certificate of Compliance (CoC) states that the materials represented by the CoC comply with the contract requirements.

All materials manufactured off-site require either a Manufacturer or Contractor CoC. Materials listed in Table 1 require a Manufacturer CoC. All other materials require a Contractor CoC.

Submit a CoC before incorporating the material into the work. Submit CoC's electronically. Some materials require the submission of additional information as part of the CoC. When this is required, the contract documents will state the additional requirements.

The Department will not include quantities of material represented by a CoC on a progressive estimate until the Contractor has fully met the CoC requirements.

The Department may sample, test, and inspect material represented by a CoC at any time before project acceptance, and will accept or reject materials based on inspections or test results.

A. Manufacturer Certificate of Compliance.

A Manufacturer CoC requires the signature of a person having the legal authority to act for the material manufacturer. The manufacturer and prime contractor must sign the Manufacturer CoC.

Provide Manufacturer CoC for the products shown in Table 1. The entity batching Portland Cement Concrete is considered the manufacturer.

Table 1
Manufacturer Certificates of Compliance

Section	Item
604	Prestressed Concrete Beams
606	Precast Reinforced Concrete Box Culverts
802	Portland Cement Concrete
804	Cement (excluding Section 802) and Lime
820	Fly Ash (excluding Section 802)
830	Pipe and Drainage Structures
834	Structural Steel
836	Reinforcing Steel, Dowel Bars, and Tie Bars
840	Piling

Table 1
Manufacturer Certificates of Compliance

846	Preservatives and Pressure Treatment Process for Timber (excluding materials provided under Sections 752 and 764)
858	Geosynthetics

Submit Manufacturer CoC using the form [*Manufacturer Certificate of Compliance \(SFN 61041\)*](#).

B. Contractor Certificate of Compliance.

A Contractor CoC requires the signature of a person having the legal authority to act for the prime Contractor. The prime Contractor may require the manufacturer, supplier, or subcontractor to sign the Contractor CoC.

Submit Contractor CoC using the form [*Contractor Certificate of Compliance \(SFN 61040\)*](#).

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION**SPECIAL PROVISION****WORK DRAWINGS SUBMITTALS****DESCRIPTION**

Section 105.08 B, "Work Drawings Submittal Requirements" and Section 105.08 C, "Engineer's Response to Work Drawings" are no longer valid. Use this Special Provision in their place.

105.08 WORK DRAWINGS**B. Work Drawing Submittal Requirements.**

Submit work drawings by either of the following methods:

1. Paper Submittal.

Submit a cover letter and two copies of the work drawings to the Engineer.

2. Electronic Submittal.

To submit the work drawings electronically to the Engineer, post a cover letter and one electronic copy of the work drawing to the Department's managed file transfer (MFT) website. Follow the requirements of NDAC Title 28 for all submittals.

Contact the Engineer to receive instructions describing how to upload files to the MFT website.

C. Engineer's Response to Work Drawing.

Allow 21 days for the Engineer to review the work drawing. The Engineer will respond in one of the following ways:

- No Exceptions Noted;
- Returned for Correction;
- Not Required for Review; or
- Not Acceptable.

If the work drawing is returned stating "Returned for Correction" or "Not Acceptable", make necessary revisions and resubmit the work drawing as specified in Section 105.08, "Work Drawings".

After the Department has reviewed the work drawings, the Department will return the reviewed work drawing submittal to the Contractor as follows:

- If a paper submittal, the Engineer will return the reviewed drawings to the Contractor.
- If an electronic submittal, the Department will post reviewed work drawings on the MFT site and will send an email notification to the Contractor that the reviewed work drawings are available on the MFT site. Retrieve the reviewed work drawings from the MFT site within 30 calendar days. The Department will delete files from the MFT site after 30 calendar days.

Include the cost of drafting and submitting work drawings in the contract unit price for the relevant contract items.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

Haul Roads

DESCRIPTION

Section 107.08, "Haul Roads" is no longer valid. Use this Special Provision in its place.

107.08 HAUL ROADS

A. General.

Before submitting a proposal, contact the appropriate State, County, Township, or City officials to determine if there are any roadways that will be designated as "no haul" routes.

Notify the Engineer of each public road proposed for use as a haul road before hauling over that route. The Engineer will designate the most practical route for transporting materials and designate the route as a "haul road," upon completion of the pre-haul inspection unless deemed unacceptable by a local jurisdiction request.

Change the route of a designated haul road only with the Engineer's written approval. For route change requests made for the Contractor's convenience, the Engineer may require an agreement limiting the Department's liability for the cost of maintenance and restoration of the haul road.

The Engineer will consider the entire haul cycle, loaded and empty, when designating haul routes.

B. Designation of Haul Roads

The Engineer will not designate paved roads off the state system as haul routes.

The Engineer will not designate a road susceptible to severe damage from concentrated heavy hauling as a haul road unless no alternate route is available. Investigate alternate routes before submitting a proposal.

If the Contractor desires to haul on a road that the Engineer determined to be unsuitable for hauling, the Engineer will designate that road as a haul road if the Contractor provides improvements that the Engineer and Contractor agree make the road suitable. Make these improvements at no additional cost to the Department.

If the Engineer determines that pre-haul improvements to a designated haul road will reduce the maintenance or restoration costs, the Department will pay for the materials used to make pre-haul improvements.

A route used to haul material from a commercial pit to the project site is not considered a haul road. A commercial pit is a pit that meets one of the following criteria at the time the project is advertised:

1. The pit has long-term facilities in place and partially derives its annual sales from ongoing operation and sources other than Department or other short-term government contracts;
2. The operator owns the land or has a long-term lease, and did not primarily set up and equip the pit at the location to serve Department contracts; or
3. The operator regularly advertises the availability of material for public sale and has facilities available for effecting public sales at times when there are no government contracted projects utilizing the pit.

C. Pre-Haul Inspection.

Before hauling over a designated haul road, the Engineer, the Contractor, and the agency charged with control and maintenance of the route will make a joint inspection of the haul road. The joint inspection will determine the existing condition of the haul road, including the type, thickness, and width of the surfacing material. The Engineer will record the results in an inspection report. The inspection report will set forth any special conditions for use, maintenance, and restoration of the route. The Contractor, the Engineer, and the agency charged with control and maintenance of the route shall review and sign the report.

D. Use, Maintenance, and Restoration.

Maintain the haul roads used by public traffic in a condition that safely and adequately accommodates public traffic.

If the Contractor damages the haul road by hauling loads in excess of the legal limit, or through negligence or failure to perform maintenance, the Contractor shall repair the damage; the Department will not pay the Contractor for the repairs.

After completing hauling operations over a designated haul road, restore the road to a condition at least equal to the condition existing at the time of the pre-haul inspection. The Engineer will order the type and amount of maintenance and restoration work and the requirements for performing this work.

Maintain and restore the road as required despite the use of the haul road concurrently by other traffic. For haul roads jointly used by multiple contractors on Department contracts, the Engineer will determine the respective obligations for maintenance and restoration.

For haul roads under Department jurisdiction, the Department will only relieve the Contractor of any further obligation for restoration of the road when the Contractor has restored the road to the condition required in the pre-haul inspection report, as accepted in writing by the Engineer. For haul roads under other jurisdiction, obtain a haul road release from the agency charged with control or maintenance of the route and submit a copy of the executed release to the Engineer.

If the Engineer determines that dust from hauling operations on designated haul roads is creating a hazard to traffic or a nuisance to the public, apply water to the haul road as necessary to control the dust.

E. Materials and Construction.

Materials and construction methods used in performing maintenance and restoration work shall meet the requirements of the relevant specifications.

F. Method of Measurement.

The Engineer will measure all approved quantities of material ordered by the Engineer for pre-haul improvements, maintenance, and restoration of designated haul roads as specified in the applicable portions of the contract. The Engineer will measure water used for dust control as specified in Section 216.05, "Method of Measurement".

G. Basis of Payment.

The Department will pay the Contractor for measured quantities of material ordered by the Engineer for pre-haul improvements, maintenance, and restoration of designated haul roads in accordance with Section 109.03, "Compensation for Contract Revisions."

The Department will not pay the Contractor for the costs to maintain and restore routes used to haul materials from commercial pits. Include these costs in the contract unit prices of the relevant contract items.

If maintenance and restoration work only requires the use of equipment, the Department will not pay the Contractor for the costs to use the equipment. Include these costs in the contract unit prices of the relevant contract items.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

LIMITATIONS OF OPERATIONS

DESCRIPTION

Section 108.05, "Limitations of Operations" is no longer valid. Use this Special Provision in its place.

108.05 LIMITATION OF OPERATIONS

A. General.

Perform the work in a manner and sequence that minimizes interference to traffic, and with due regard to the location of detours and provisions for handling traffic. Do not begin work to the prejudice or detriment of work already started; the contract may require a section of roadway to be finished before starting additional sections if the opening of the section is essential to public convenience.

If the prosecution of the work is discontinued, provide the Engineer at least 24-hours notice before resuming operations.

B. Holidays.

Unless the contract allows work on holidays, perform work on holidays only with the Engineer's prior written approval. Submit a written request to the Engineer by noon 2 business days before the requested holiday.

C. Night-time Operations and Extended Hours.

1. General.

When performing work in low light conditions, implement proper safety precautions and provide adequate lighting for the performance and inspection of the work.

2. Nighttime Operations.

Unless the contract allows for nighttime operations, perform work at night only with the Engineer's prior written approval.

Submit a written request to the Engineer a minimum of 7 calendar days before anticipated nighttime operations. The Engineer may deny the request or delay approval if it would require additional staffing considerations. If nighttime operations requires the Engineer to hire additional forces, nighttime operations may not be allowed for up to 30 days from the receipt of the request.

When requesting to perform nighttime operations, include a plan to ensure the safety of all individuals on the project site, including the Contractor's and subcontractor's workers, Department representatives, and the traveling public.

The Department bears no liability for costs or delays resulting from the Engineer's approval, rejection, or delay for staffing purposes of a request to perform nighttime operations.

3. Extended Hours.

Extended hours are allowed before sunrise with verbal notice given to the Engineer the previous day. Extended hours are allowed after sunset with verbal notice given to the Engineer that same day.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

PERMITS AND ENVIRONMENTAL CONSIDERATIONS

PROJECT NUMBER: NH-4-052(083)059 - PCN 21523

This Special Provision incorporates the Floodplain Permits obtained by the North Dakota Department of Transportation (NDDOT) into the bidder's proposal.

The Contractor is responsible for complying with all the terms and conditions as contained in the permit(s) attached hereto. Bidders will become familiar with all standard conditions and special conditions of the permit(s) and submit their bid for the construction of this project based on the following:

- **Floodplain Permit**

The Floodplain Development Permit authorizes work within the mapped 100-year floodplain. The floodplain permits and flood insurance rate maps are attached.

The contractor is responsible for impacts not authorized by the attached Permit(s) obtained by the NDDOT.

FLOODPLAIN DEVELOPMENT PERMIT APPLICATION NON-BUILDING SITUATION

GENERAL INFORMATION

PERMIT APPLICATION # 2017-002 DATE: March 8, 2017

Applicant/Contact: Steve Kessler

Telephone # 328-3736

Address: *North Dakota Department of Transportation
Attn: Engineering and Environmental Services
608 East Boulevard Avenue
Bismarck, ND 58505-0700*

Brief project description - location of proposed development - legal description:
Project includes a 2 inch overlay on US highway 52 from Donnybrook to Brooks
Junction. This application is for the portion of the project within the jurisdiction of Ward
County.

Contractor: Contract Not Awarded

Telephone # _____

Address:

Contract Not Awarded

Estimated Cost of project: *\$5,933,788*

FLOODPLAIN DETERMINATION :

(Complete the appropriate information)

Project is located: 100-year floodplain? (Flood Fringe): *Yes Floodplain*
Regulatory Floodway: *No*

Map information: FIRM Date: *Yes*
FIRM Zone: *A and AE*
BFE at Development Site:
Development will be elevated to:

DEVELOPMENT ACTIVITIES: (check all that apply and explain the activity)

☒ Fill placement (fill brought in from outside the floodplain)
☐ Excavation (where subgrade fill is removed from the floodplain)
☐ Landscaping (cut and fill, fill borrow and placement)
☐ Construction or maintenance of a dike/levee/floodwall

- ☒ Removal of fill, embankment, or dikes
☐ Watercourse alterations (river, stream, lake - channel modifications, rip-rap)
☐ Road, street or bridge construction (new, repair or replacement, realignment)
☐ Drainage improvements (including culvert work)
☐ Mining (removal of gravel, rock, fill or other natural materials)
☐ Installation of utilities (water, sewer, pipeline, gas, electric, communications)
☐ Well drilling (water, oil, natural gas etc.)
☐ Subdivision (new or expansion)
☐ Other (please specify and describe)

ADDITIONAL INFORMATION REQUIRED (attach additional information):

- Comments or further explanation of work:
- Copies of project description, plans, blueprints, etc.
- Wetlands - will the activity impact identified wetlands?
- Will the development aggravate flooding elsewhere? *Unknown*

OTHER NOTIFICATION OR PERMITS NECESSARY:

ELEVATION INFORMATION:

Attach information about the completed project elevations(s) with registered professional engineer or registered land surveyor certifications if part of the project:

ACTION / APPROVAL:

The proposed development is in conformance with applicable community floodplain standards subject to the following conditions with this approval.

PERMIT APPLICATION IS APPROVED



(Conditioned on the description provided. As-built information/certification will be available at the NDDOT District Office upon completion of construction.)

Signature (Floodplain
Administrator):



Date:

March 8, 2017

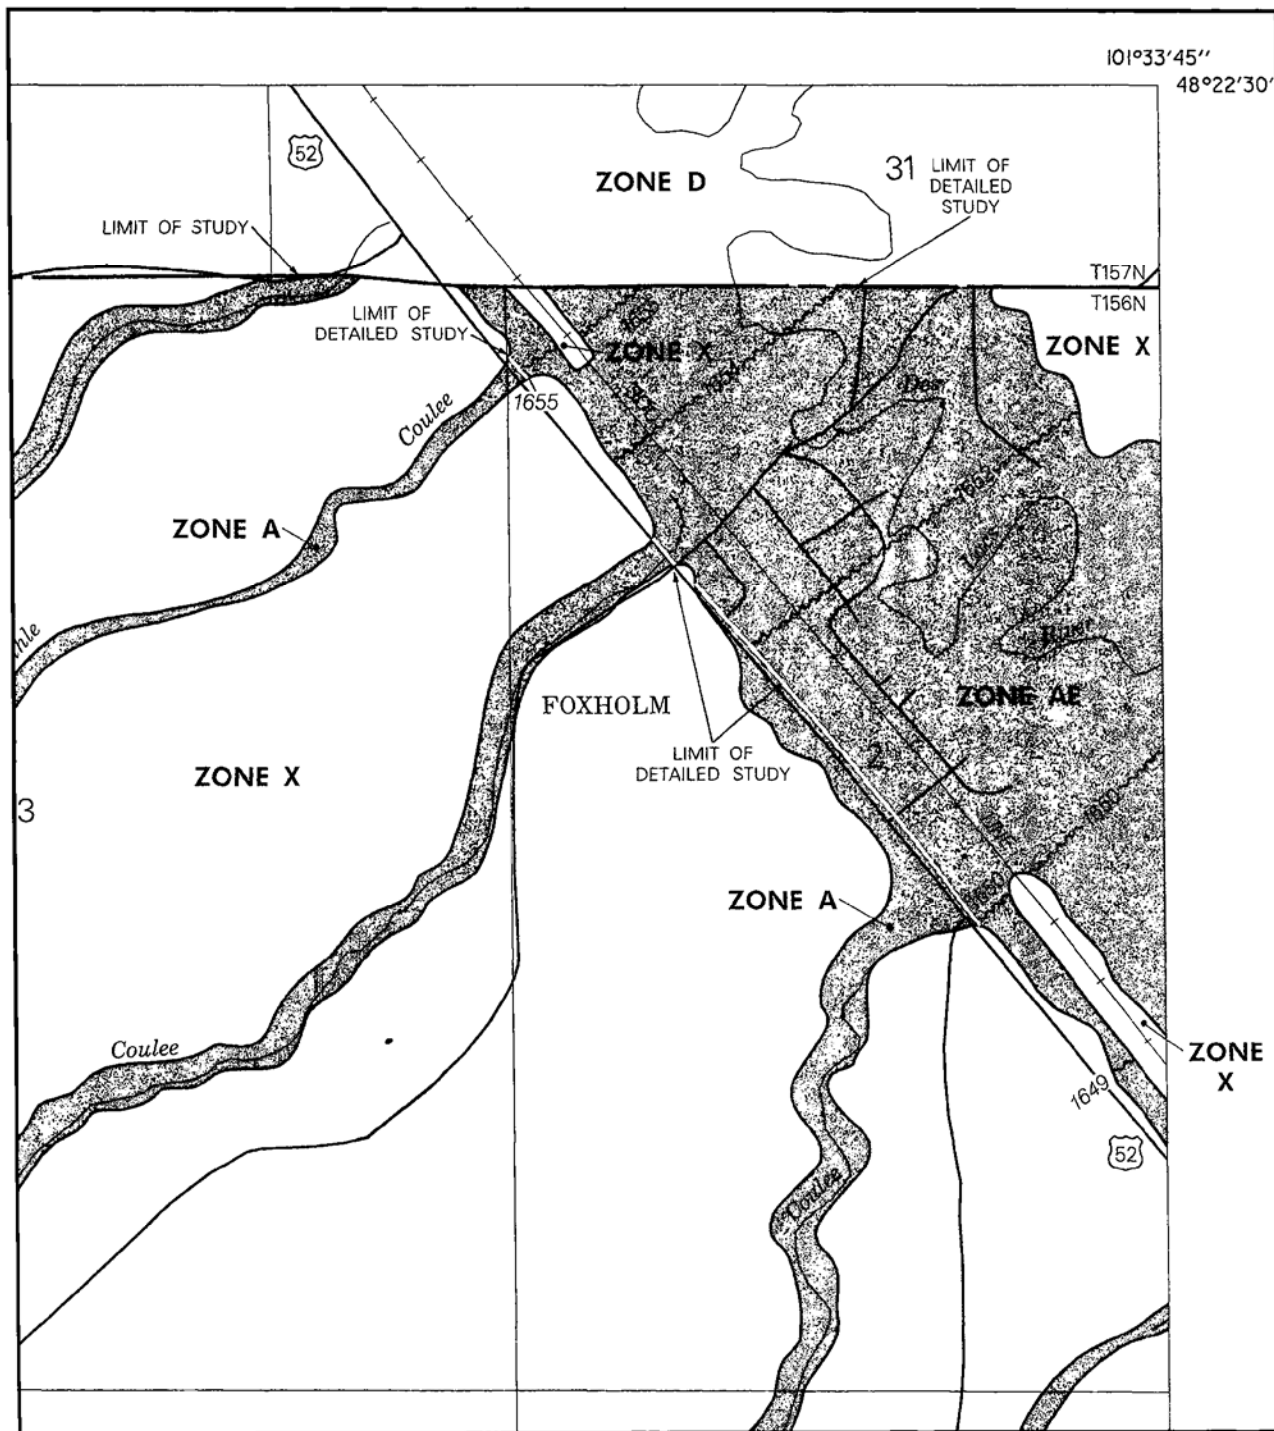

NATIONAL FLOOD INSURANCE PROGRAM

FIRM FLOOD INSURANCE RATE MAP WARD COUNTY, NORTH DAKOTA AND INCORPORATED AREAS

PANEL 530 OF 1475
(SEE MAP INDEX FOR PANELS NOT PRINTED)

CONTAINS:	NUMBER	PANEL	SUFFIX
COMMUNITY			
WARD COUNTY, UNINCORPORATED AREAS	385370	0630	D



MAP NUMBER
38101C0530 D

EFFECTIVE DATE:
JANUARY 19, 2000



Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov

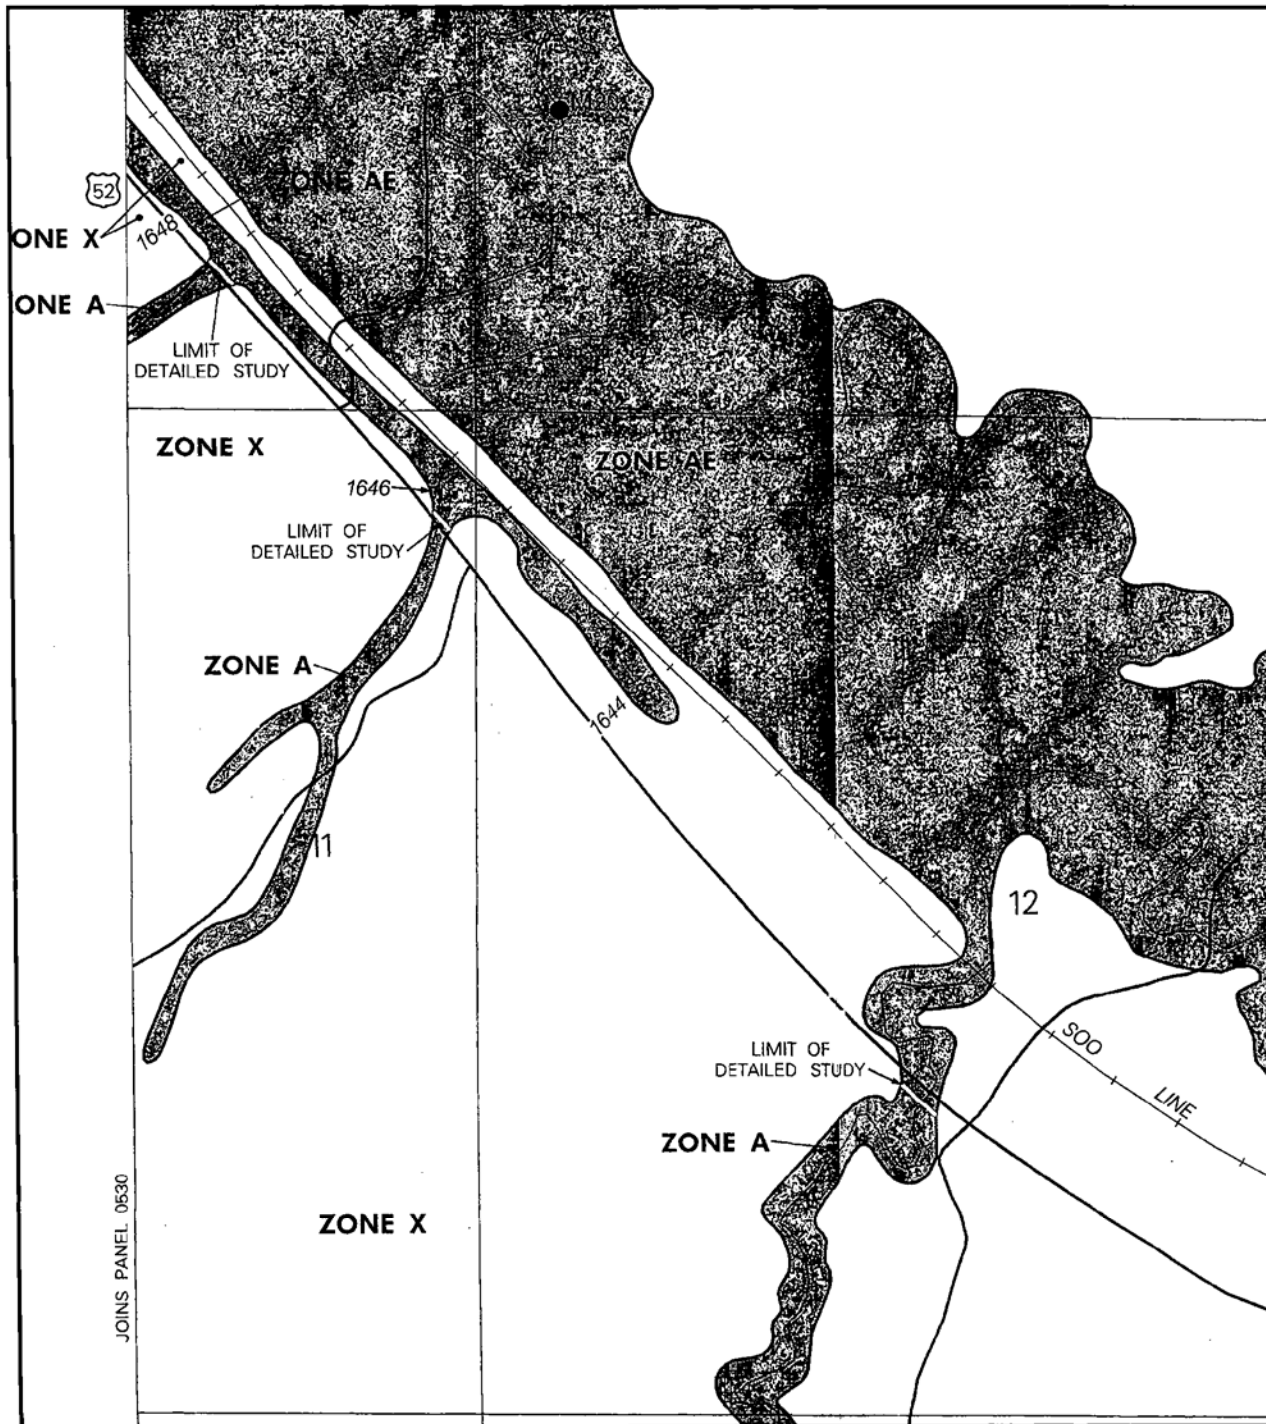

NATIONAL FLOOD INSURANCE PROGRAM

FIRM FLOOD INSURANCE RATE MAP

WARD COUNTY,
NORTH DAKOTA AND
INCORPORATED AREAS

PANEL 535 OF 1475
(SEE MAP INDEX FOR PANELS NOT PRINTED)

CONTAINS:	NUMBER	PANEL	SUFFIX
COMMUNITY			
WARD COUNTY, UNINCORPORATED AREAS	385370	0535	D


MAP NUMBER
38101C0535 D

EFFECTIVE DATE:
JANUARY 19, 2000



Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov

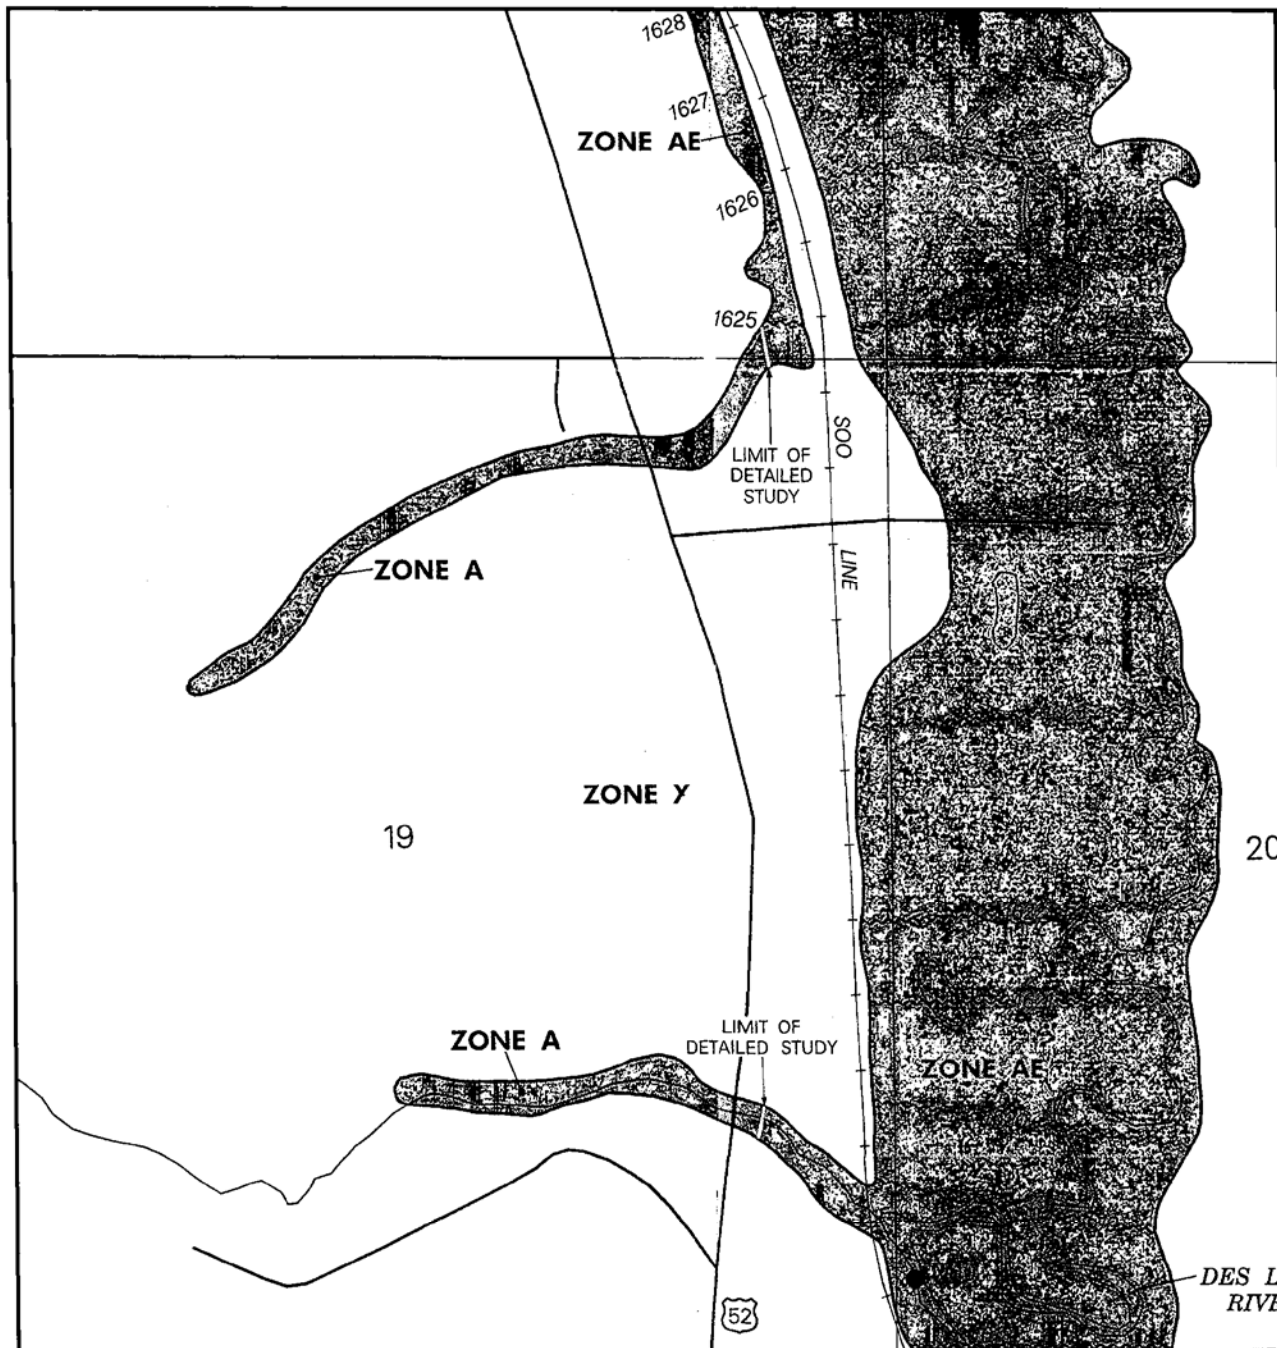

APPROXIMATE SCALE IN FEET

1000 0 1000

NATIONAL FLOOD INSURANCE PROGRAM

FIRM
FLOOD INSURANCE RATE MAP

**WARD COUNTY,
NORTH DAKOTA AND
INCORPORATED AREAS**

PANEL 535 OF 1475
(SEE MAP INDEX FOR PANELS NOT PRINTED)


CONTAINS:	NUMBER	PANEL	SUFFIX
COMMUNITY			
WARD COUNTY, UNINCORPORATED AREAS	385370	0636	D

MAP NUMBER
38101C0535 D

EFFECTIVE DATE:
JANUARY 19, 2000



Federal Emergency Management Agency

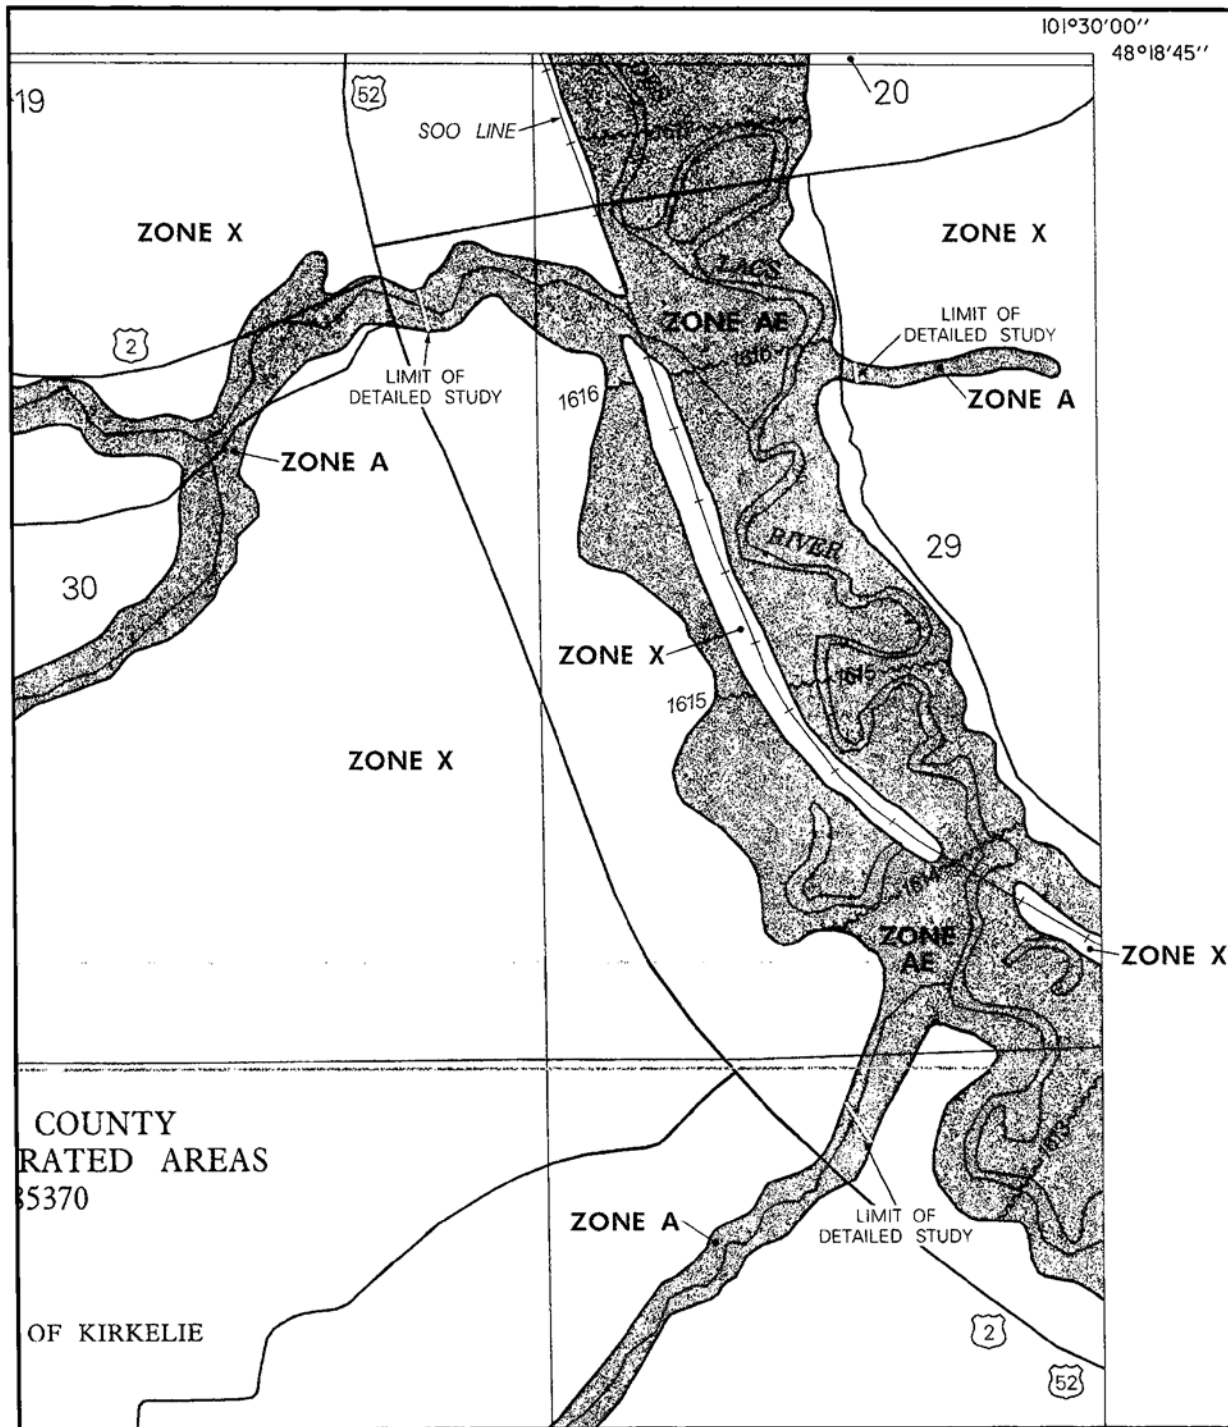

APPROXIMATE SCALE IN FEET

1000 0 1000

NATIONAL FLOOD INSURANCE PROGRAM

FIRM FLOOD INSURANCE RATE MAP

WARD COUNTY,
NORTH DAKOTA AND
INCORPORATED AREAS

PANEL 545 OF 1475
(SEE MAP INDEX FOR PANELS NOT PRINTED)

CONTAINS COMMUNITY	NUMBER	PANEL	SUFFIX
BURLINGTON, TOWNSHIP OF WARD COUNTY, UNINCORPORATED AREAS	380650	0545	E
	385370	0545	E

MAP NUMBER
38101C0545 E

MAP REVISED:
FEBRUARY 15, 2002



Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov

FLOODPLAIN DEVELOPMENT PERMIT APPLICATION NON-BUILDING SITUATION

GENERAL INFORMATION

PERMIT APPLICATION # _____ DATE: _____

Applicant/Contact: Steve Kessler

Telephone # 328-3736

Address: *North Dakota Department of Transportation
Attn: Engineering and Environmental Services
608 East Boulevard Avenue
Bismarck, ND 58505-0700*

Brief project description - location of proposed development - legal description:
Project includes a 2 inch overlay on US highway 52 from Donnybrook to Brooks Junction.

Contractor: Contract Not Awarded

Telephone # _____

Address:

Contract Not Awarded

Estimated Cost of project: *\$5,933,788*

FLOODPLAIN DETERMINATION :

(Complete the appropriate information)

Project is located: 100-year floodplain? (Flood Fringe):
Regulatory Floodway:

Map information: FIRM Date: Yes
FIRM Zone: Floodplain
BFE at Development Site:
Development will be elevated to:

DEVELOPMENT ACTIVITIES: (check all that apply and explain the activity)

☒ Fill placement (fill brought in from outside the floodplain)
☐ Excavation (where subgrade fill is removed from the floodplain)
☐ Landscaping (cut and fill, fill borrow and placement)
☐ Construction or maintenance of a dike/levee/floodwall
☒ Removal of fill, embankment, or dikes

- ☐ Watercourse alterations (river, stream, lake - channel modifications, rip-rap)
- ☐ Road, street or bridge construction (new, repair or replacement, realignment)
- ☐ Drainage improvements (including culvert work)
- ☐ Mining (removal of gravel, rock, fill or other natural materials)
- ☐ Installation of utilities (water, sewer, pipeline, gas, electric, communications)
- ☐ Well drilling (water, oil, natural gas etc.)
- ☐ Subdivision (new or expansion)
- ☐ Other (please specify and describe)

ADDITIONAL INFORMATION REQUIRED (attach additional information):

- Comments or further explanation of work:
- Copies of project description, plans, blueprints, etc.
- Wetlands - will the activity impact identified wetlands?
- Will the development aggravate flooding elsewhere? *Unknown*

OTHER NOTIFICATION OR PERMITS NECESSARY:

U.S. Army Corps of Engineers 404 Permit is pending.

ELEVATION INFORMATION:

Attach information about the completed project elevations(s) with registered professional engineer or registered land surveyor certifications if part of the project:

ACTION / APPROVAL:

The proposed development is in conformance with applicable community floodplain standards subject to the following conditions with this approval.

PERMIT APPLICATION IS APPROVED


(Conditioned on the description provided. As-built information/certification will be available at the NDDOT District Office upon completion of construction.)

Signature (Floodplain
Administrator):

Nicola Michalenko

Date:

2-6-17

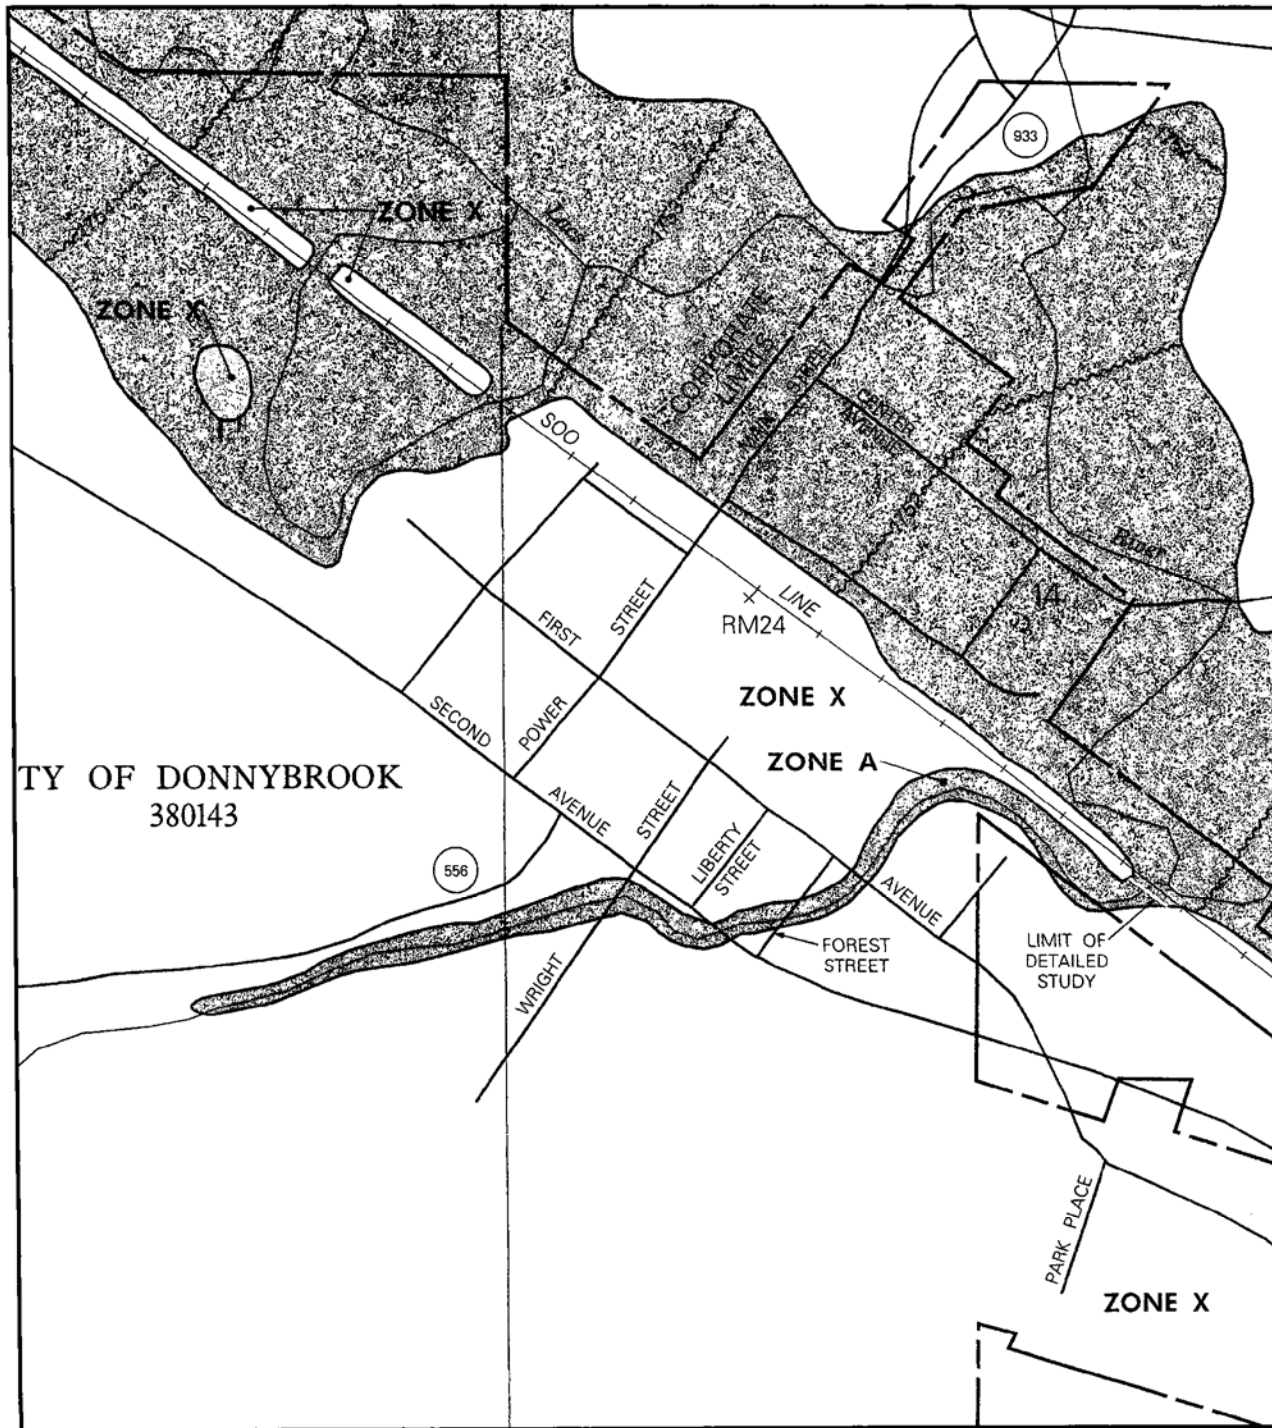

NATIONAL FLOOD INSURANCE PROGRAM

FIRM FLOOD INSURANCE RATE MAP

WARD COUNTY,
NORTH DAKOTA AND
INCORPORATED AREAS

PANEL 219 OF 1475
(SEE MAP INDEX FOR PANELS NOT PRINTED)

CONTAINS COMMUNITY	NUMBER	PANEL	SUFFIX
DONNYBROOK, CITY OF	380143	0219	D
WARD COUNTY, UNINCORPORATED AREAS	380370	0219	D

MAP NUMBER
38101C0219 D

EFFECTIVE DATE:
JANUARY 19, 2000



Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION

PERMITS AND ENVIRONMENTAL CONSIDERATIONS

PROJECT NUMBER: SNH-4-052(067)081 - PCN 18907

This Special Provision incorporates the Floodplain Permit obtained by the North Dakota Department of Transportation (NDDOT) into the bidder's proposal.

The Contractor shall be responsible for complying with all the terms and conditions as contained in the permit(s) attached hereto. Bidders shall become familiar with all standard conditions and special conditions of the permit(s) and submit their bid for the construction of this project based on the following:

- **Floodplain Permit**

The floodplain permit number 2017-001 authorizes work within the regulatory floodplain. The floodplain permit authorizes a 2 inch within the floodplain that overtops US Highway 52 shown on the flood insurance rate maps (FIRM).

The floodplain permit and FIRM identifying the floodplain boundary are attached.

The contractor shall be responsible for obtaining permits for impacts not authorized by the attached Permit obtained by the NDDOT.

FLOODPLAIN DEVELOPMENT PERMIT APPLICATION NON-BUILDING SITUATION

GENERAL INFORMATION

PERMIT APPLICATION # 2017-001 DATE: 1/26/2017

Applicant/Contact: Steve Kessler Telephone # 328-3736

Address: North Dakota Department of Transportation
Attn: Engineering and Environmental Services
608 East Boulevard Avenue
Bismarck, ND 58505-0700

Brief project description - location of proposed development - legal description:
Project include a 2 inch overlay on US Highway 52 near the junction with US Highway 2.

Contractor: Contract Not Awarded Telephone #:

Address:

Estimated Cost of project: \$71,683

FLOODPLAIN DETERMINATION :

(Complete the appropriate information)

Project is located: 100-year floodplain? (Flood Fringe): Yes
Regulatory Floodway: No

Map information: FIRM Date: February 15, 2002
FIRM Zone: A
BFE at Development Site:
Development will be elevated to:

DEVELOPMENT ACTIVITIES: (check all that apply and explain the activity)

- ☒ Fill placement (fill brought in from outside the floodplain)
- ☐ Excavation (where subgrade fill is removed from the floodplain)
- ☐ Landscaping (cut and fill, fill borrow and placement)
- ☐ Construction or maintenance of a dike/levee/floodwall
- ☐ Removal of fill, embankment, or dikes

- ☐ Watercourse alterations (river, stream, lake - channel modifications, rip-rap)
☒ Road, street or bridge construction (new, repair or replacement, realignment)
☐ Drainage improvements (including culvert work)
☐ Mining (removal of gravel, rock, fill or other natural materials)
☐ Installation of utilities (water, sewer, pipeline, gas, electric, communications)
☐ Well drilling (water, oil, natural gas etc.)
☐ Subdivision (new or expansion)
☐ Other (please specify and describe)

ADDITIONAL INFORMATION REQUIRED (attach additional information):

- Comments or further explanation of work:
- Copies of project description, plans, blueprints, etc.
- Wetlands - will the activity impact identified wetlands?
- Will the development aggravate flooding elsewhere? *Unknown*

OTHER NOTIFICATION OR PERMITS NECESSARY:

ELEVATION INFORMATION:

Attach information about the completed project elevations(s) with registered professional engineer or registered land surveyor certifications if part of the project:

ACTION / APPROVAL:

The proposed development is in conformance with applicable community floodplain standards subject to the following conditions with this approval.

PERMIT APPLICATION IS APPROVED


(Conditioned on the description provided. As-built information/certification will be available at the NDDOT District Office upon completion of construction.)


Signature (Floodplain
Administrator):



Date:

1/26/2017

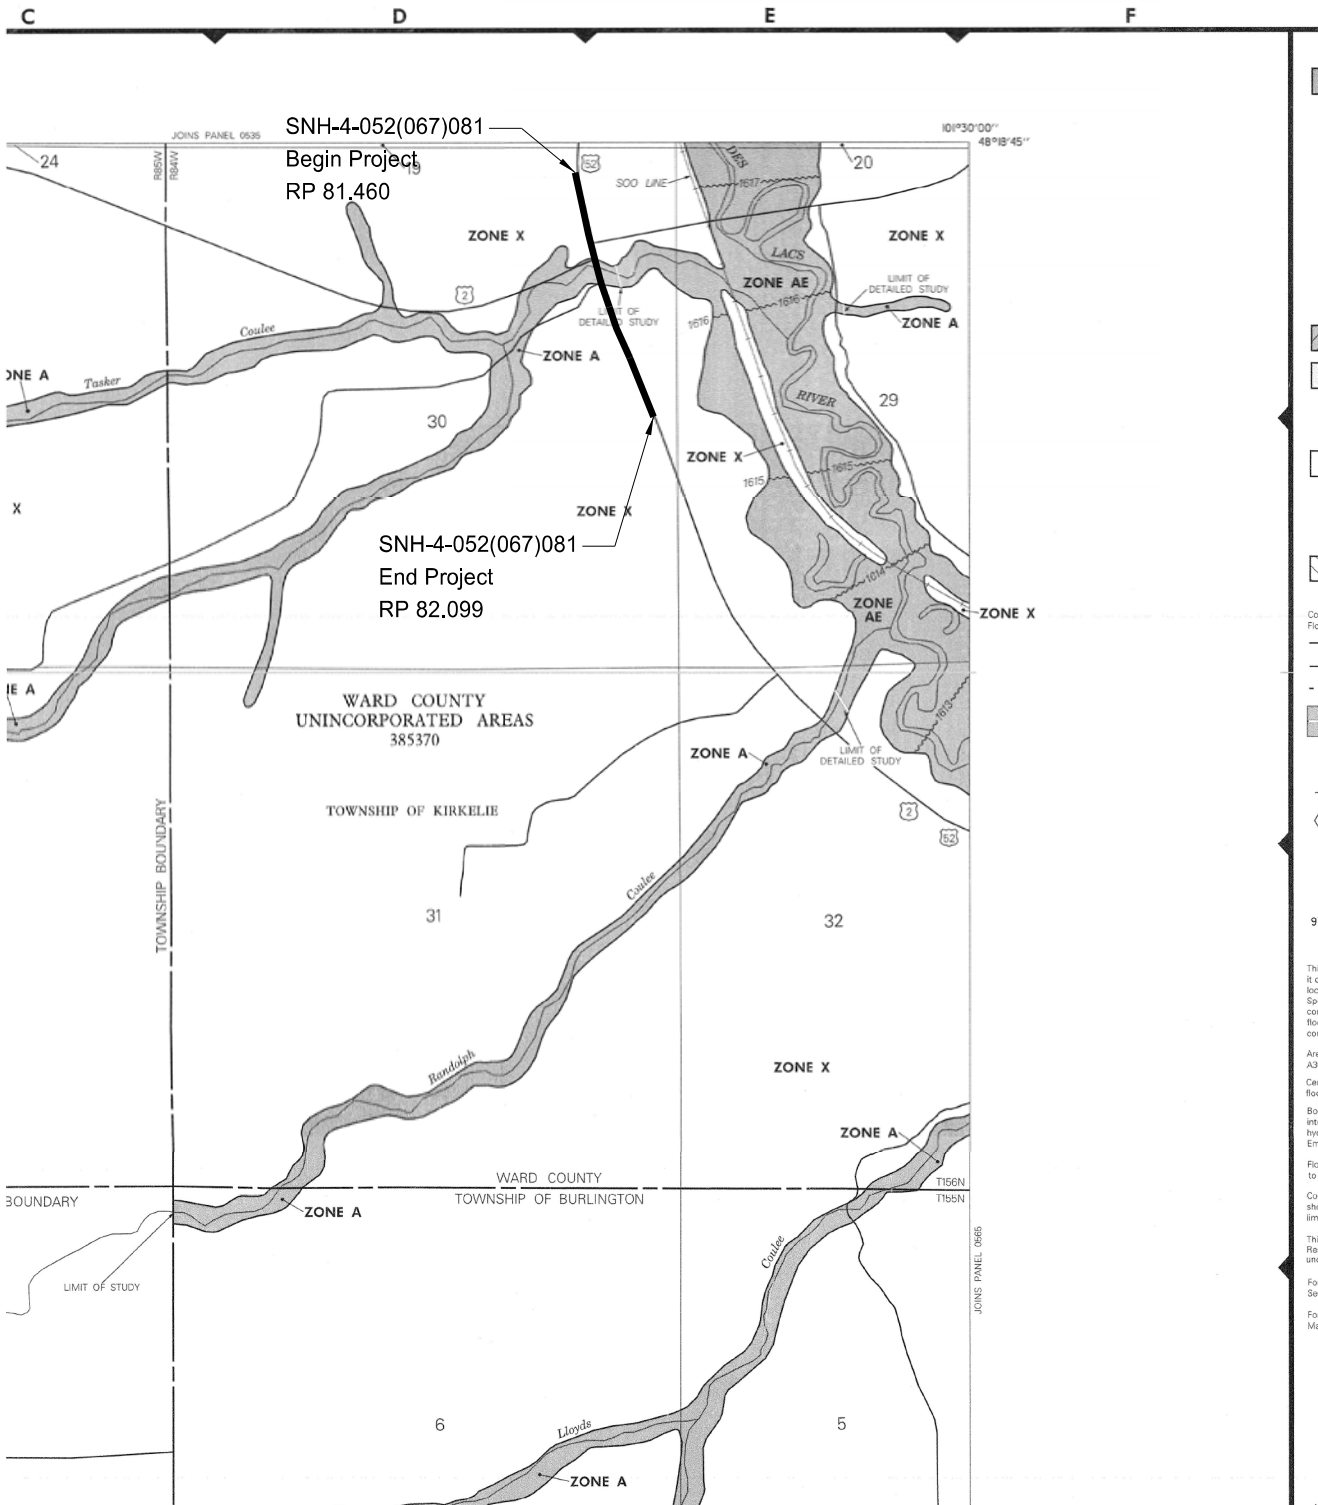

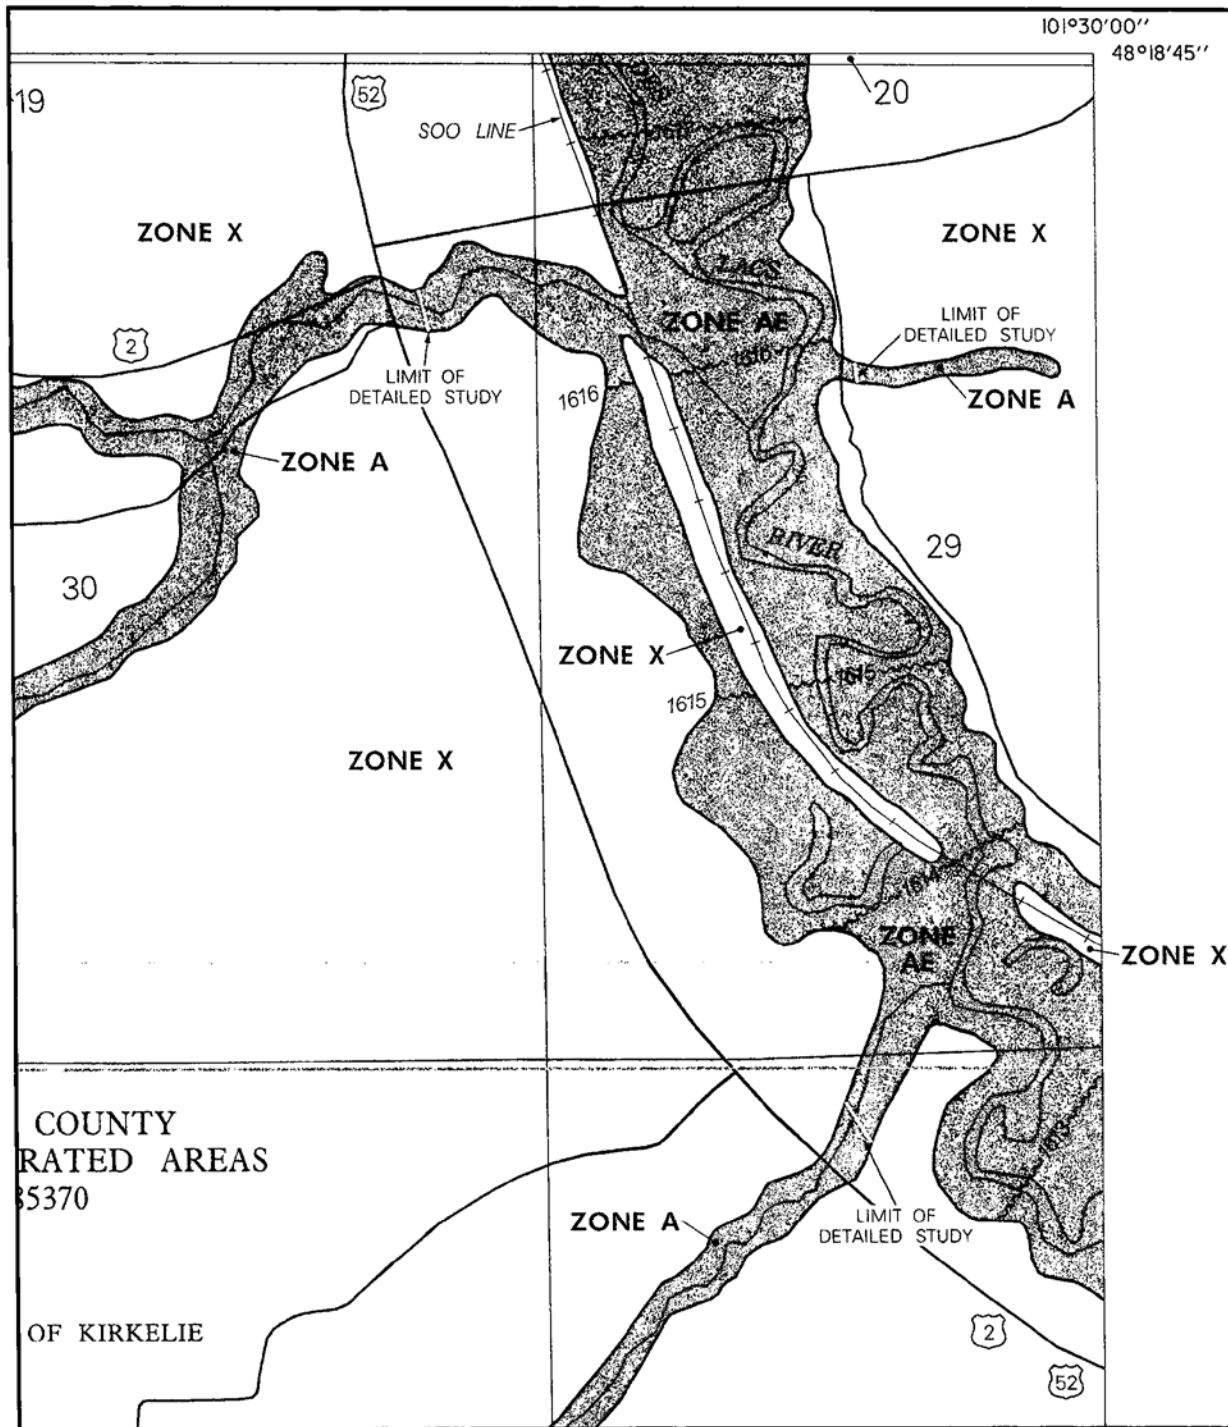

APPROXIMATE SCALE IN FEET

1000 0 1000

NATIONAL FLOOD INSURANCE PROGRAM

FIRM FLOOD INSURANCE RATE MAP

WARD COUNTY,
NORTH DAKOTA AND
INCORPORATED AREAS

PANEL 545 OF 1475
(SEE MAP INDEX FOR PANELS NOT PRINTED)

CONTAINS COMMUNITY	NUMBER	PANEL	SUFFIX
BURLINGTON, TOWNSHIP OF WARD COUNTY, UNINCORPORATED AREAS	380650	0545	E
	385370	0545	E

MAP NUMBER
38101C0545 E

MAP REVISED:
FEBRUARY 15, 2002



Federal Emergency Management Agency

This is an official copy of a portion of the above referenced flood map. It was extracted using F-MIT On-Line. This map does not reflect changes or amendments which may have been made subsequent to the date on the title block. For the latest product information about National Flood Insurance Program flood maps check the FEMA Flood Map Store at www.msc.fema.gov

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

MATERIALS PIT LIST

GENERAL NOTES

NOTES: All pit data for the **November 17, 2017** bid opening has been carefully prepared, and is believed to be correct insofar as reliable preliminary pit information can reasonably be obtained. The contractors are advised to check all pit information before bidding.

It is recommended all bidders discuss pertinent pit data with the Materials and Research Engineer prior to the bid opening. Information such as field notes, field loggings, and comments may not be included in the materials pit list or boring logs. This additional information if present would be in the respective pit file at the Materials and Research Division.

Field logging by prospecting crews may list silt, clay, or silty clay. Our test hole plat will show silt-clay for those listings because the Department does not test to determine what percent is clay and what percent is silt.

Each pit shall be operated to prevent waste and to make the best use of the deposit and to produce a uniform gradation for the item of work under construction. Usually, the material will be removed to the full width and depth of the deposit. The purpose is to exhaust the portion of the pit being worked so the stripping or topsoil can be pushed into this exhausted area and smoothed, thereby eliminating the necessity of covering unused material in the pit unless the owner agrees otherwise.

In the use of pits, the contractor is required to comply with all federal, state, and local laws and regulations.

In the use of department-owned or optioned pits, the contractor shall fulfill all obligations imposed on the Department under the Department's options or agreements.

Project: SNH-4-052(067)081 AND TIED PROJECT NH-4-052(083)059

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

MATERIALS PIT LIST

Material	Location	Approximate Quantity	Price and Ownership
----------	----------	----------------------	---------------------

FEDERAL AID PROJECTS SNH-4-052(067)081 AND TIED PROJECT NH-4-052(083)059 – THIN OVERLAY – US 52 FROM NEAR JCT US 2(BROOKS JCT) AND US 52 FROM S OF DONNYBROOK – BROOKS JCT– WARD AND RENVILLE COUNTIES

Aggregate S1/2SE1/4 9-157-90 Pit A 231,750 ton
Pit B 216,250 ton

State Optioned until December 31, 2021 for 150.0¢ per cu.yd or 100.0¢ per ton. Neal & Cherlyn Biwer and Doug & Marlene Price. Neal is contact: 7605 81st Avenue NW Stanley, ND 58784 Phone: 701-628-2594 or 701-629-1187

Pit A

<u>Percent Passing</u>	<u>Areas</u>												
	A	B	C	D	E	F	G	H	I	J	K	L	M
1" Screen	94	95	96	91	94	95	94	93	91	93	92	95	95
3/4" Screen	88	90	93	86	88	90	90	90	84	88	88	90	89
5/8" Screen	85	86	90	82	84	85	87	87	81	85	84	86	84
1/2" Screen	79	81	86	77	79	81	82	83	76	80	79	81	80
No. 4 Screen	61	61	69	57	59	61	65	63	56	63	62	61	61
No. 8 Screen	50	50	57	44	47	50	50	47	45	53	50	47	50
No. 10 Screen	47	47	54	41	44	47	46	43	42	50	47	43	48
No. 16 Screen	40	39	46	33	34	37	33	33	33	41	38	32	40
No. 30 Screen	27	27	34	22	21	22	17	19	20	27	25	17	29
No. 40 Screen	18	19	26	15	15	14	11	12	14	19	18	10	22
No. 50 Screen	13	13	19	10	9	9	7	7	9	13	12	6	14
No. 100 Screen	7	6	9	6	5	5	3	2	5	7	7	3	5
No. 200 Screen	4.8	4.9	5.9	4.3	3.6	3.9	2.4	0.3	3.6	4.3	4.8	2.3	3.3
Shale & Soft Rock*	0.6	0.5	0.7	0.4	0.6	0.5	1.2	0.6	0.5	0.5	0.5	0.7	1.0
Shale & Soft Rock**	1.4	0.7	1.2	0.6	0.9	0.9	2.5	1.2	0.7	1.5	0.8	0.7	1.3
Shale & Soft Rock***	2.0	1.1	1.9	1.0	1.5	1.4	3.7	1.8	1.2	2.0	1.3	1.3	2.3

Project: SNH-4-052(067)081 AND TIED PROJECT NH-4-052(083)059

Wt Per c.f. loose	93.4	94.9	105.1	108.8	101.5	104.3	107.6	93.8	109.4	110.6	110.0	110.8	107.9
Wt Per c.f. rodded	107.4	108.7	111.6	115.4	108.9	111.6	114.0	107.3	115.3	115.8	115.8	118.3	116.1
P.I.(-40 Sieve)	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP	NP
L.A. Abrasion Loss	21.9% Combined Sample												

*Plus No. 4 fraction – percent lightweight particles by weight of total sample

**Minus No. 4 fraction - Plus No. 30 fraction – percent lightweight particles by percent by weight of total sample

***Lightweight particles in total sample

<u>Size</u>	<u>Aggregate Type</u>	<u>Sieve</u>	<u>Water Absorption</u>
-5/8" +No. 4	natural rock	+ No. 4	1.9%
Minus No. 4	natural fines	- No. 4	3.0%

NOTE: The water absorption data is to be used for information purposes. Water absorption numbers may vary throughout the pit. The contractor shall be responsible for verifying the actual absorption prior to using the material in the project. Pit A originally started out with 287,000 ton, it was used to the best of our knowledge 231,750 ton remain. Pit Plat shows the area that was depleted and boring log should reflect what holes are left. There seems to be a clay hump that runs southwest to northeast through the middle of the deposit. Shale was encountered throughout the deposit. There is a fair amount of crushing rock from 3/4" to 3" with very little over 3". No rock can be scalped off to haul to a new location unless it will be crushed and used for the project it is shown for. There are some existing stockpiles that could be incorporated into the project talk with landowner to see which piles may be available. Contractors are advised to check with the county for planning and zoning regulations. Also talk with landowner to see if a cattle guard must be installed and maintained prior to use.

Pit B

<u>% Pass</u>	A	B	C	D
1"	95	97	99	98
3/4"	94	95	96	97
5/8"	92	93	94	95
1/2"	88	89	90	91
No. 4	72	74	76	77
No. 8	62	64	66	67
No. 10	59	62	63	65
No. 16	51	53	54	58
No. 30	37	38	39	45
No. 40	26	29	31	35
No. 50	17	18	21	24
No. 100	6	6	7	7
No. 200	2.7	2.9	3.7	3.8
+No. 4*	1.0	1.3	1.3	0.9
-No. 4**	1.7	1.8	2.2	1.8
Total***	2.7	3.1	3.5	2.6
Wt/cf ls	106.5	103.8	102.7	103.5
Wt/cf rd	114.4	112.6	110.2	111.8
P.I.(-40)	NP	NP	NP	NP

L.A. Abrasion Loss 22.6% Combined Sample

*Plus No. 4 fraction – percent lightweight particles by weight of total sample

**Minus No. 4 fraction - Plus No. 30 fraction – percent lightweight particles by percent by weight of total sample

***Lightweight particles in total sample

<u>Size</u>	<u>Aggregate Type</u>	<u>Sieves</u>	<u>Water Absorption</u>
-5/8" +No. 4	natural rock	+ No. 4	3.3 %
Minus No. 4	natural fines	- No. 4	2.7 %

NOTE: The water absorption data is to be used for information purposes. Water absorption numbers may vary throughout the pit. The contractor shall be responsible for verifying the actual absorption prior to using the material in the project. This gravel in Pit A is very deep with the top 4' to 7' being coarse. Under this seems to be a 6' to 8' layer of sand before going back into good gravel. No rock can be scalped off to haul to a new location unless it will be crushed and used for the project it is shown for. There are some existing stockpiles that could be incorporated into the project talk with landowner to see which piles may be available. Contractors are advised to check with the county for planning and zoning regulations. Also talk with landowner to see if a cattle guard must be installed and maintained prior to use.

NDDOT Material Source Certificate of Approval is attached at the end of this job pit list.

Interested bidders are advised to investigate all the details concerning these deposits to their own satisfaction before considering them for bidding.

NDDOT Material Source Certificate of Approval

MN-1037



Pit Name: biwer option pit

SSE S. 9 T. 157 N, R 90 W




County: Mountrail

Conditions: The source is located on property encumbered by a USFWS easement. Please coordinate with the USFWS, Lostwood Wetland Management District Office (701-848-2466) and landowner regarding any terms and conditions before using material from this source.

This location is approved for use, provided all avoidance areas shown on the map are avoided, and any Conditions listed above are complied with. NDDOT advises that all applicants (contractors or their representatives) may be subject to meeting certain legal responsibilities pursuant to one or more of the following authorities administered by the USFWS: Migratory Bird Treaty Act (MBTA) (16 U.S.C. 703 et seq.); Endangered Species Act (ESA) (16 U.S.C. 1531 et seq.); and Bald and Golden Eagle Protection Act (BGEPA) (16 U.S.C. 668-668d, 54 Stat. 250). It is unclear at this time what effects, if any, material source activities may have on plants, fish, and/or wildlife species protected by the above-mentioned Acts. It is the responsibility of the applicants and/or any individual conducting activities at any approved site to fulfill the requirements of these Acts.

This approval does not imply landowner permission to acquire material at this location. An agreement with the landowner is still necessary. The contractor will be responsible for any impacts to wetlands, including permitting those impacts and mitigating the loss of the wetlands. As with all projects, if cultural artifacts and/or features (e.g., stone tools, fire hearths, stone circles, burials) are encountered, provisions outlined in Section 107.04 of the Standard Specifications for Road and Bridge Construction shall be followed.

If you have any questions regarding material sources please email materialsourc@nd.gov

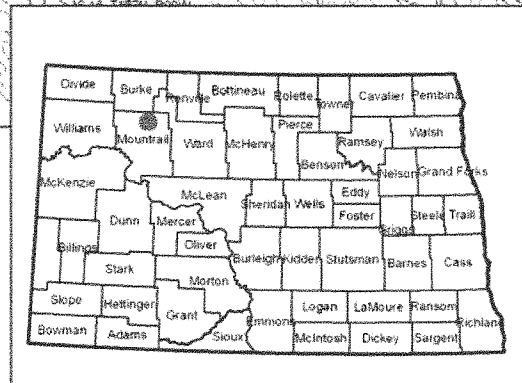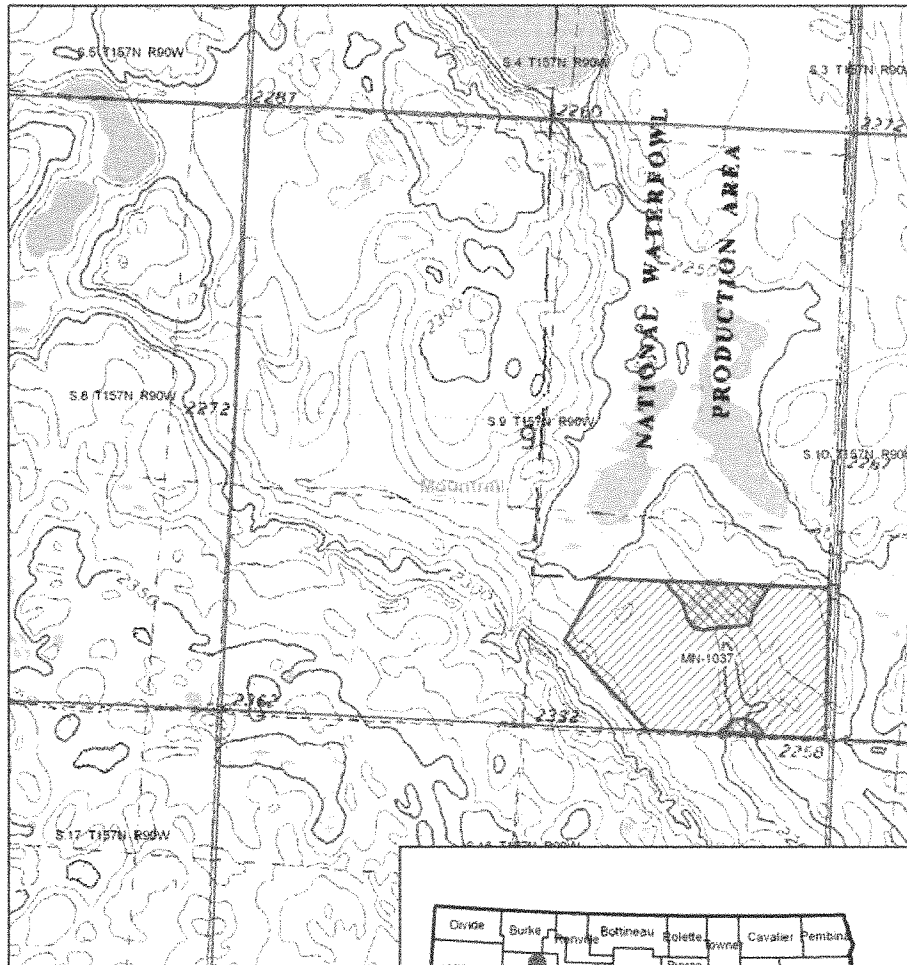

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION

FUEL COST ADJUSTMENT CLAUSE
Revision Date: 9/8/2006

Introduction

This Special Provision provides for price adjustments to the Contract when significant changes in the cost of motor fuels and burner fuels occur while completing the Contract work. Participation in fuel cost adjustment program is not mandatory. A Contractor is not required to notify the Department at the time of submitting bids whether the Contractor will or will not participate in the fuel cost adjustment provision.

The North Dakota Department of Transportation (NDDOT) will send the low responsible bidder a "Fuel Cost Adjustment Affidavit" (SFN 58393) with the proposed Contract. The Contractor shall return a completed Fuel Adjustment Affidavit with the signed Contract as specified in Standard Specification Section 103.06, Execution and Approval of the Contract. The affidavit shall be returned on all Contracts with this provision even if the Contractor elects not to participate in the provision.

Compensation adjustments for motor fuels and burner fuels consumed in prosecuting the Contract shall be determined by the Engineer in accordance with the provisions set forth herein. Compensation adjustments will be assessed monthly for the cost of the motor fuels and burner fuels whenever the Current Fuel Index (CFI) is outside the given threshold of the Base Fuel Index (BFI) for the Contract.

If the Contractor has a fixed price for fuel for motor or burner fuels to complete the work, no fuel cost adjustments will be made for that fuel type. If there is no fixed fuel price for motor or burner fuels, participation in the Fuel Adjustment provision is the decision of the prime Contractor.

If the prime Contractor decides not to participate, no fuel cost adjustments will be made to the Contract for the Contractor or any subcontractors. If the prime Contractor elects to participate in the fuel cost adjustment provision, the prime Contractor shall include the anticipated fuel cost of subcontractors who wish to participate. If fuel cost adjustments are made to the Contract, the prime Contractor shall ensure that participating subcontractors including second and lower tier, are included in the adjustments in proportion to the percentage of work and anticipated fuel cost by that subcontractor.

Fuel Indexes

Each month, NDDOT will record the average wholesale price for No. 2 diesel fuel and the average wholesale price for unleaded gasoline (87 octane). The monthly average will be the average of the daily rack prices for the month as reported by DTN Energy for Fargo ND.

The burner fuel index will be the No. 2 diesel fuel index regardless of the type of burner fuel actually used.

The Base Fuel Index (BFI) price for motor fuels and burner fuel to be used in the Contract will be the average wholesale price for the month prior to the bid opening.

The Current Fuel Index (CFI) price for motor fuels and burner fuel to be used for each monthly adjustment will be the average wholesale price for the month prior to the adjustment month.

Fuel Ratio

For motor fuels diesel and unleaded gas, the fuel ratio of the Contract will be determined by dividing the Contractor's affidavit costs for each motor fuel by the original Contract amount.

For burner fuels, the fuel ratio of the contract will be determined by dividing the Contractor's affidavit cost for burner fuels by the original Contract amount of plant-mixed hot bituminous pavement paid by the ton. Asphalt cement, binders and other miscellaneous bituminous items shall not be included.

The fuel ratio of the contract for motor and burner fuels will remain the same throughout the length of the contract. The sum of the affidavit fuel costs shall not exceed 15% of the original Contract amount.

The fuel ratio for the three fuel types will be determined by the following equation:

Fuel Ratio_(x, y, z) = Affidavit Cost_(x, y, z) / Original Contract Amount_(x, y, z)		
(x)	=	Motor Fuel (Diesel)
(y)	=	Motor Fuel (Unleaded)
(z)	=	Burner Fuel
Fuel Ratio _(x, y, z)	=	Fuel ratio of the contract for each respective fuel type
Affidavit Cost _(x, y, z)	=	Fuel costs from Fuel Adjustment Affidavit (SFN 58393)
Original Contract Amount _(x, y)	=	Total of the original contract amount excluding lane rental, and Part B of the bid (when A+B bidding is used), if applicable.
Original Contract Amount _(z)	=	Total original contract amount for all hot bituminous pavement bid items combined, excluding bid items for asphalt cement, sawing and sealing joints, coring, etc. Only hot bituminous pavement bid items measured by the Ton will be included in the calculation.

Cost Change

The monthly change in fuel costs will be determined by the following equation:

$\text{Cost Change}_{(x, y, z)} = (\text{CFI}_{(x, y, z)} - \text{BFI}_{(x, y, z)}) / \text{BFI}_{(x, y, z)}$		
(x)	=	Motor Fuel (Diesel)
(y)	=	Motor Fuel (Unleaded)
(z)	=	Burner Fuel (use diesel prices)
Cost Change _(x, y, z)	=	The relative change in the current CFI and the BFI for each fuel type
CFI _(x, y, z)	=	Current Fuel Index for each fuel type
BFI _(x, y, z)	=	Base Fuel Index for each fuel type

Contract Adjustments

Contract adjustments will be made for the cost of motor and burner fuels whenever the cost change exceeds a ± 0.10 threshold. No fuel cost adjustment will be made for work done under liquidated damages. Adjustments will be determined for Motor Fuel (diesel), Motor Fuel (unleaded), and Burner Fuel (burner) separately and shall be computed on a monthly basis.

When the cost change is greater than 0.10, the rebate to the Contractor for each fuel type shall be computed according to the following formulas:

$FCA_{(x, y, z)} = \text{Fuel Ratio}_{(x, y, z)} \times \text{Estimate}_{(x, y, z)} \times (\text{Cost Change}_{(x, y, z)} - 0.10)$		
(x)	=	Motor Fuel (Diesel)
(y)	=	Motor Fuel (Unleaded)
(z)	=	Burner Fuel
$FCA_{(x, y, z)}$	=	Fuel Cost Adjustment for each of the fuel types
$\text{Fuel Ratio}_{(x, y, z)}$	=	Fuel Ratio for each of the fuel types
$\text{Estimate}_{(x, y)}$	=	The monthly total of work done on estimates issued in the current month excluding incentive or disincentive payments, pay factor adjustments and any work completed under liquidated damages.
$\text{Estimate}_{(z)}$	=	The monthly total of hot bituminous pavement work done on estimates issued in the current month, excluding bid items for asphalt cement, sawing and sealing joints, coring, etc. Only hot bituminous pavement bid items measured by the Ton will be included in the calculation. Hot bituminous pavement work completed under liquidated damages will not be included.
$\text{Cost Change}_{(x, y, z)}$	=	The monthly change in fuel costs for each of the fuel types

When the cost change is less than -0.10, the credit to the Department for each fuel type shall be computed according to the following formulas:

$FCA_{(x, y, z)} = \text{Fuel Ratio}_{(x, y, z)} \times \text{Estimate}_{(x, y, z)} \times (\text{Cost Change}_{(x, y, z)} + 0.10)$		
(x)	=	Motor Fuel (Diesel)
(y)	=	Motor Fuel (Unleaded)
(z)	=	Burner Fuel
$FCA_{(x, y, z)}$	=	Fuel Cost Adjustment for each of the fuel types
$\text{Fuel Ratio}_{(x, y, z)}$	=	Fuel Ratio for each of the fuel types
$\text{Estimate}_{(x, y)}$	=	The monthly total of work done on estimates issued in the current month excluding any incentive or disincentive payments, pay factor adjustments and any work completed under liquidated damages.
$\text{Estimate}_{(z)}$	=	The monthly total of hot bituminous pavement work done on estimates issued in the current month, excluding bid items for asphalt cement, sawing and sealing joints, coring, etc. Only hot bituminous pavement bid items measured by the Ton will be included in the calculation. Hot bituminous pavement work completed under liquidated damages will not be included.
$\text{Cost Change}_{(x, y, z)}$	=	The monthly change in fuel costs for each of the fuel types

Payments

Adjustments will be determined by the Engineer monthly. Adjustments will be made under the following spec and code for each fuel type:

109 0100	Motor Fuels (Diesel)
109 0200	Motor Fuels (Unleaded)
109 0300	Burner Fuel

When significant payment adjustments are made on final estimates to account for final in-place measured quantities, the Engineer may prorate the adjustments back to the months when the work was done.

Attachments

For informational purposes, a 'Fuel Cost Adjustment Affidavit' (SFN 58393) is included as Attachment A.

FUEL COST ADJUSTMENT AFFIDAVIT

North Dakota Department of Transportation, Construction Services
SFN 58393 (8-2017)

SP Fuel Cost Adjustment Clause
6 of 6

Attachment A

PCN	Project Number
The Contractor is not required to notify the Department at the time of submitting bids whether he will or will not participate in the fuel cost adjustment program. The Contractor shall return the affidavit on all Contracts with this Provision even if the Contractor elects not to participate.	
Check the box for each fuel type that has a fixed price. No adjustments in fuel price will be made for the boxes that are checked. ☐ Diesel ☐ Unleaded ☐ Burner	
Does your company elect to participate in a fuel adjustment for this contract for the fuels that do not have a fixed price? No adjustments in fuel prices will be made if No is checked . ☐ Yes ☐ No	
If yes, provide the total dollars for each of the applicable fuels:	
Diesel (D)	
Unleaded (U)	
Burner Fuel (B)	
Sum (D+U+B)	% of Original Contract Amount *
*The sum of the D, U, and B may not exceed 15% of the original contract amount.	
Under the penalty of law for perjury of falsification, the undersigned,	
Name (print or type)	Title (print or type)
Contractor (print or type)	
hereby certifies that the documentation is submitted in good faith, that the information provided is accurate and complete to the best of their knowledge and belief, and that the monetary amount identified accurately reflects the cost for fuel, and that they are duly authorized to certify the above documentation on behalf of the company.	
I hereby agree that the Department or its authorized representative shall have the right to examine and copy all Contractor records, documents, work sheets, bid sheets and other data pertinent to the justification of the fuel costs shown above.	
Signature	Date

Acknowledgement

State of	
County of	
Signed and sworn to (or affirmed) before me on this day _____ (month, day, year)	
Name of Notary Public or other Authorized Officer (Type or Print)	Affix Notary Stamp
Signature of Notary Public or other Authorized Officer	
Commission Expiration Date (if not listed on stamp)	