





RUMBLE STRIPS  
INTERSTATE HIGHWAYS

NOTES:


1) Discontinue rumble strips through ramps and 100' before and after ramp tapers as shown below.

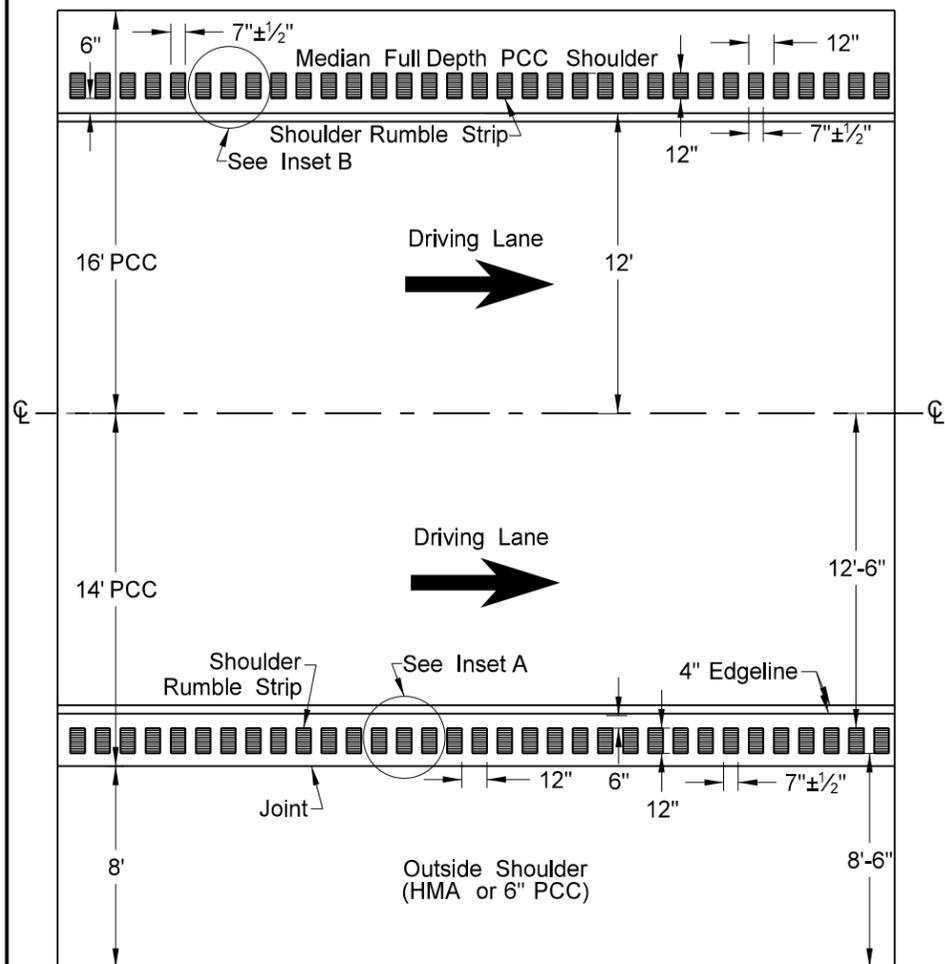


30' Wide Full Depth PCC with 8' Wide HMA Outside Shoulder

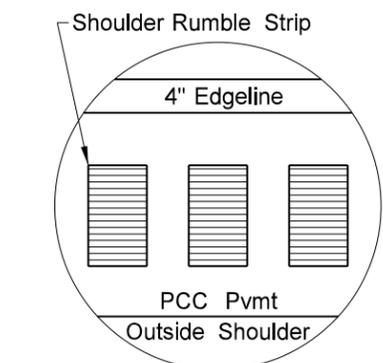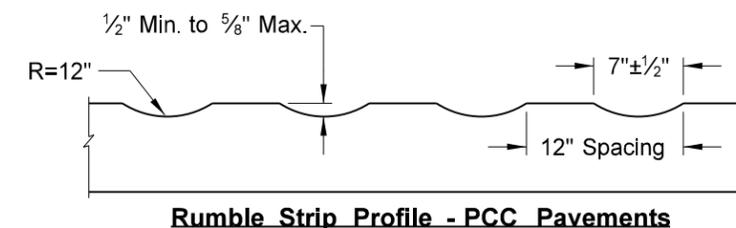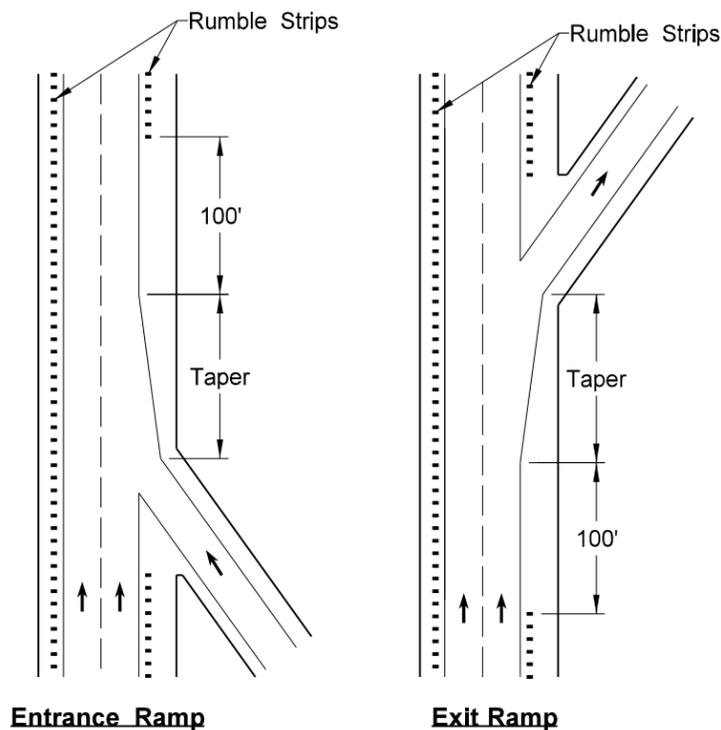

Inset A - Shoulder Rumble Strip

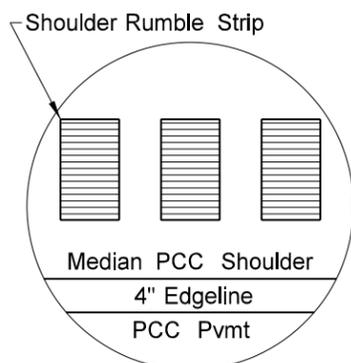

Inset B - Shoulder Rumble Strip

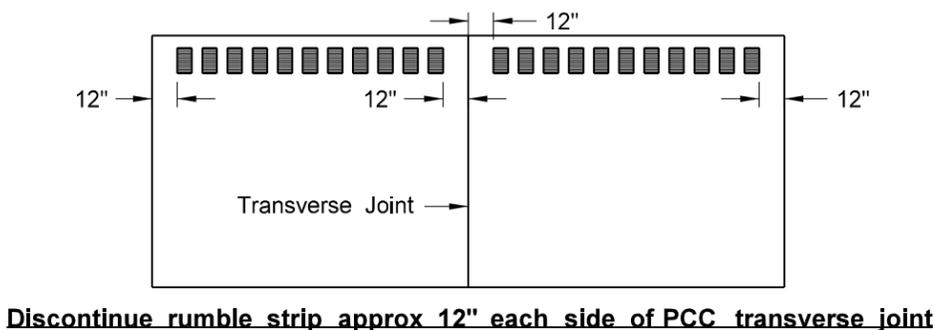

Discontinue rumble strip approx 12" each side of PCC transverse joint

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-29-09	
REVISIONS	
DATE	CHANGE
2-25-10	Note 4 was added.
9-8-11	Revised Notes and D-760-1.
8-30-18	Revised drawings for clarity.
10-25-19	Added missing dimensions.

This document was originally issued and sealed by  
Kirk J Hoff,  
Registration Number  
PE-4683,  
on 10/25/19 and the original document is stored at the  
North Dakota Department  
of Transportation