
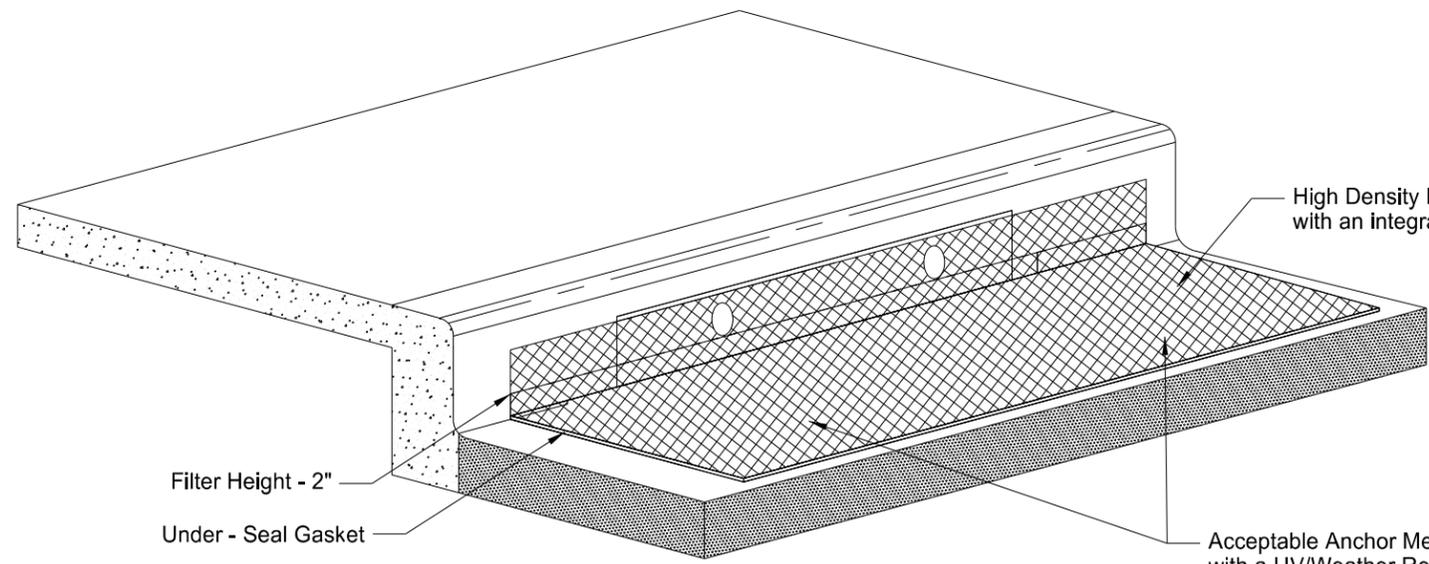


	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	project number	sec	page

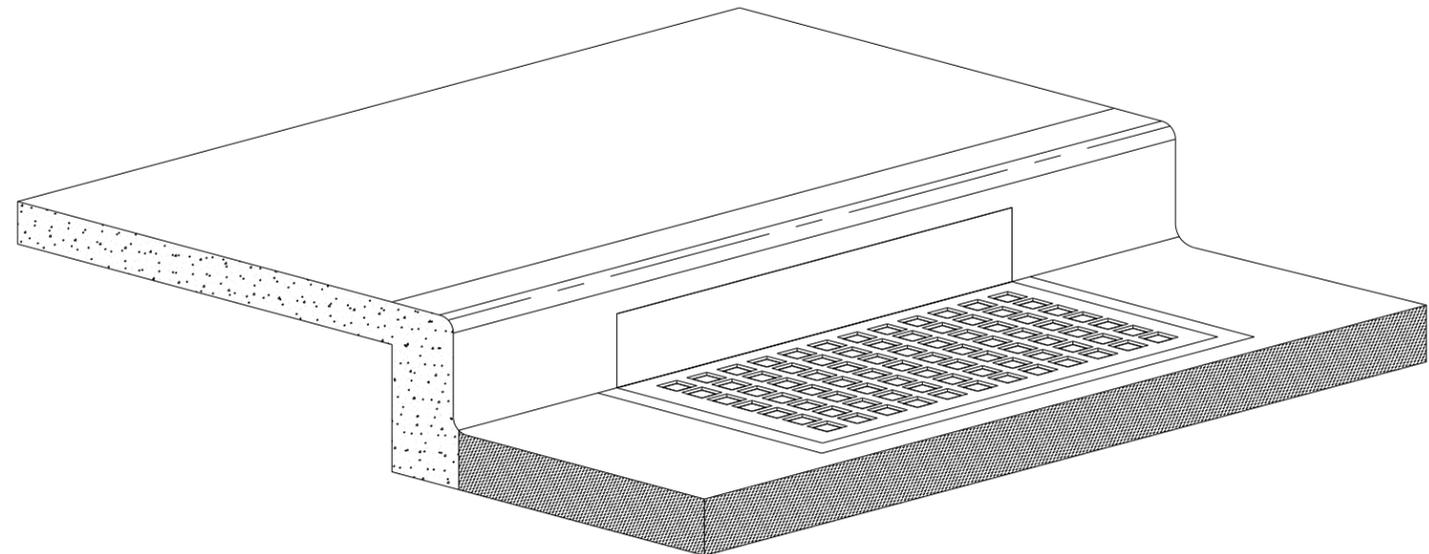

Filter Height - 2"
Under - Seal Gasket

High Density Polyethylene (HDPE) high flow jacket filter (8,000 opening per SY) with an integrated 425 um (micron meter) fine filter particle mesh

Acceptable Anchor Method: Fasten to inlet casting grate with a UV/Weather Resistant Plastic Cable Zip Ties - 16 to 24 in. Install zip ties at each corner of the inlet near the perimeter and two additional zip ties near the middle of the casting. Punch hole through filter and run cable tie downward around grate and back up to fasten.

Inlet Protection Device

Installation Notes:

1. Place device tightly against drain opening and cover entire grate. The device should extend at least 2 inches past grate toward street.
2. Overlap the segments at longer openings.
3. Anchor the device so that water cannot flow behind it.

General Notes:

1. Inlet Protection shall be maintained or replaced at the direction of the engineer.
2. Manufactured alternatives may be substituted at the direction of the engineer.
3. When removing or maintaining inlet protection, care shall be taken so that fabric does not fall into the inlet. Any material falling into the inlet shall be removed immediately.
4. Inlet protection is to be used (and reused) as needed to prevent material from entering inlets as the work progresses through the project.

This document
is preliminary
and not for
construction or
implementation
purposes.

Inlet Protection Device