

NDDOT ABBREVIATIONS

D-101-1

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.						
Abn	abandoned	C Gdrl	cable guardrail	Culv	culvert	FOS	factor of safety
Abut	abutment	Calc	calculate	C&G	curb & gutter	Fed	Federal
Adj	adjusted	CIP	cast iron pipe	CI	curb inlet	FP	feed point
Aggr	aggregate	CB	catch basin	CR	curb ramp	Fn	fence
Ahd	ahead	CRS	cationic rapid setting	C	cut	Fn P	fence post
ARV	air release valve	C Gd	cattle guard			FO	fiber optic
Align	alignment	C To C	center to center	Dd Ld	dead load	FD	field drive
Al	alley	CL or ☐	centerline	Defl	deflection	F	fill
Alt	alternate	Ch	chain	Defm	deformed	FAA	fine aggregate angularity
Alum	aluminum	Chnlk	chain-link	DInt	delineate	FH	fire hydrant
ADA	Americans with Disabilities Act	Ch Blk	channel block	DIntr	delineator	FI	flange
&	and	Ch Ch	channel change	Depr	depression	Flrd	flared
Appr	approach	Chk	check	Desc	description	FES	flared end section
Approx	approximate	Chsld	chiseled	Det	detail	F Bcn	flashing beacon
ACP	asbestos cement pipe	Cir	circle	DWP	detectable warning panel	FA	flight auger sample
Asph	asphalt	Cl	class	Dtr	detour	FL	flow line
AC	asphalt cement	CInt	clean-out	Dia or ø	diameter	Ftg	footing
Assmd	assumed	Clr	clear	Dir	direction	FM	force main
@	at	Cl&gr	clearing & grubbing	Dist	distance	Fnd	found
Atten	attenuation	Comb.	combination	DM	disturbed material	Fdn	foundation
ATR	automatic traffic recorder	Coml	commercial	DB	ditch block	Frac	fractional
Ave	Avenue	Compr	compression	DG	ditch grade	Frwy	freeway
Avg	average	CADD	computer aided drafting & design	Dbl	double	Frt	front
ADT	average daily traffic	Conc	concrete	Dn	down	FF	front face
		CECB	concrete erosion control blanket	Dwg	drawing	F Disp	fuel dispenser
		Cond	conductor	Dr	drive	FFP	fuel filler pipes
		Const	construction	Drwy	driveway	FLS	fuel leak sensor
		Cont	continuous	DI	drop inlet	Furn	furnish/ed
		CSB	continuous split barrel sample	D	dry density		
		Contr	contraction				
		Contr	contractor				
		CP	control point				
Bk	back	Coord	coordinate	Ea	each		
BF	back face	Cor	corner	Esmt	easement		
Balc	balcony	Corr	corrected	E	East		
B Wire	barbed wire	CAES	corrugated aluminum end section	EB	Eastbound		
Barr	barricade	CAP	corrugated aluminum pipe	Elast	elastomeric		
Btry	battery	CMES	corrugated metal end section	EL	electric locker		
BI	beehive inlet	CMP	corrugated metal pipe	E Mtr	electric meter		
Beg	begin	CPVCP	corrugated poly-vinyl chloride pipe	Elec	electric/al		
BG	below grade	CSES	corrugated steel end section	EDM	electronic distance meter		
BM	bench mark	CSFES	corrugated steel flared end section	Elev or El	elevation		
Bkwy	bikeway	CSP	corrugated steel pipe	Ellipt	elliptical		
Bit	bituminous	CSTES	corrugated steel traversable end section	Emb	embankment		
Blk	block	Co	County	Emuls	emulsion/emulsified		
BH	bore hole	Crse	course	ES	end section		
Bot	bottom	Ct	Court	Engr	engineer		
Blvd	Boulevard	Xarm	cross arm	ESS	environmental sensor station		
Bndry	boundary	Xbuck	cross buck	Eq	equal		
Brkwy	breakaway	Xsec	cross sections	Evgr	evergreen		
Br	bridge	Xing	crossing	Exc	excavation		
Bldg	building	Xrd	crossroad	Exst	existing		
Bus.	business	Crn	crown	Exp	expansion		
BV	butterfly valve			Expy	Expressway		
Byp	bypass			E	external of curve		
				Extru	extruded		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18 09-20-18 12-18-20 08-16-22	General Revisions General Revisions General Revisions General Revisions

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18 09-20-18 12-10-20 08-16-22	General Revisions General Revisions General Revisions General Revisions

08/16/22

NDDOT ABBREVIATIONS

D-101-2

Galv	galvanized	Ln	lane	Obsc	obscure(d)	Qty	quantity
Gar	garage	Lg	large	Ocpd	occupied	Qtr	quarter
Gs L	gas line	Lat	latitude	Ocpy	occupy		
G Reg	gas line regulator	Lt	left	O/s	offset		
GMV	gas main valve	Lens	lenses	OC	on center	Rad or R	radius
G Mtr	gas meter	Lvl	level	C	one dimensional consolidation	RR	railroad
GSV	gas service valve	Lvng	leveling	OC	organic content	Rlwy	railway
GVP	gas vent pipe	Lht	light	Orig	original	Rsd	raised
GV	gate valve	LP	light pole	O To O	out to out	RC	rapid curing
Ga	gauge	Ltg	lighting	OD	outside diameter	Rec	record
Gov	government	Liq	liquid	OH	overhead	Rcy	recycle
Grd	graded/grade	LL	liquid limit			RAP	recycled asphalt pavement
Grnd	ground	Loc	location			RPCC	recycled portland cement concrete
GWM	ground water monitor	Long.	longitude	PMT	pad mounted transformer	Ref	reference
Gdrl	guardrail	Lp	loop	Pg	pages	R Mkr	reference marker
Gtr	gutter	LD	loop detector	Pntd	painted	RM	reference monument
		Lum	luminaire	Pr	pair	RP	reference point
				Pnl	panel	Refl	reflectorized
H Plg	H piling			Pk	park	RCB	reinforced concrete box
Hdwl	headwall	Mb	mailbox	PSD	passing sight distance	RCES	reinforced concrete end section
Ht	height	ML	main line	Pvmt	pavement	RCFES	reinforced concrete flared end section
Hel	helical	MH	manhole	Ped	pedestal	RCP	reinforced concrete pipe
HDPE	high density polyethylene	Mkd	marked	Ped	pedestrian	RCPS	reinforced concrete pipe sewer
HM	high mast	Mkr	marker	PPP	pedestrian pushbutton post	RCTES	reinforced concrete traversable end section
HP	high pressure	Mkg	marking	Pen.	penetration	Reinf	reinforcement
HPS	high pressure sodium	MA	mast arm	Perf	perforated	Res	reservation
HTCG	high tension cable guardrail	Matl	material	Per.	perimeter	Res	residence
Hwy	highway	Max	maximum	Perm	permanent	Ret	retaining
Hor	horizontal	MC	meander corner	PL	pipeline	Rev	reverse
HBP	hot bituminous pavement	Meas	measure	Pl	place	Rt	right
HMA	hot mix asphalt	Mdn	median	P&P	plan & profile	R/W	right of way
Hyd	hydrant	MD	median drain	PL	plastic limit	Riv	river
Ph	hydrogen ion content	MC	medium curing	Pl or P _L	plate	Rd	road
		MGS	Midwest Guardrail System	Pt	point	Rdbd	road bed
		MM	mile marker	PE	polyethylene	Rdwy	roadway
Id	identification	MP	mile post	PVC	polyvinyl chloride	RWIS	roadway weather information system
Incl	inclinometer tube	Min	minimum	PCC	Portland Cement concrete	Rk	rock
IMH	inlet manhole	Misc	miscellaneous	PP	power pole	Rt	route
ID	inside diameter	Mon	monument	Preempt	preemption		
Inst	instrument	Mnd	mound	Prefab	prefabricated		
Intchg	interchange	Mtbl	mountable	Prfmd or Pref	preformed		
Intmdt	intermediate	Mtd	mounted	Prep	preperation		
Intscn	intersection	Mtg	mounting	Press.	pressure		
Inv	invert	Mk	muck	PRV	pressure relief valve		
IP	iron pipe			Prestr	prestressed		
				Pvt	private		
				PD	private drive		
Jt	joint	Neop	neoprene	Prod.	production/produce		
Jct	junction	Ntwk	network	Prog	programmed		
		N	North	Prop.	property		
		NE	North East	Prop Ln	property line		
		NW	North West	Ppsd	proposed		
		NB	Northbound	PB	pull box		
		No. or #	number				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions



08/16/22

NDDOT ABBREVIATIONS

D-101-3

Salv	salvage(d)	Tel	telephone
San	sanitary sewer line	Tel B	Telephone Booth
Sec	section	Tel P	telephone pole
SL	section line	Tv	television
Sep	separation	Temp	temperature
Seq	sequence	Temp	temporary
Serv	service	TBM	temporary bench mark
Sht	sheet	T	thinwall tube sample
Shtng	sheeting	Ts	topsoil
Shldr	shoulder	Traf	traffic
Sw or Sdwk	sidewalk	TSCB	traffic signal control box
SD	sight distance	Tr	trail
SN	sign number	Transf	transformer
Sig	signal	Trans	transition
Sgl	single	TT	transmission tower
SRCP	slotted reinforced concrete pipe	TES	traversable end section
SC	slow curing	Trans	transverse
SS	slow setting	Trtd	treated
Sm	small	Trmt	treatment
S	South	Qc	triaxial compression
SE	South East	TERO	tribal employment rights ordinance
SW	South West	Tpl	triple
SB	Southbound	Typ	typical
Sp	spaces		
Spcl	special	Qu	unconfined compressive strength
SA	special assembly	Ugrnd	underground
SP	special provisions	Util	utility
G	specific gravity		
Spk	spike		
SB	split barrel sample	VG	valley gutter
SH	sprinkler head	Vap	vapor
SV	sprinkler valve	Vert	vertical
Sq	square	VCP	vitrified clay pipe
Stk	stake	Vol	volume
Std	standard	VSFS	vehicle speed feedback sign
N	standard penetration test		
Std Specs	standard specifications	Wkwy	walkway
Stm L	steam line	W	water content
SEC	steel encased concrete	WGV	water gate valve
SMA	stone matrix asphalt	WL	water line
SSD	stopping sight distance	WM	water main
SD	storm drain	WMV	water main valve
St	street	W Mtr	water meter
SPP	structural plate pipe	WSV	water service valve
SPPA	structural plate pipe arch	WW	water well
Str	structure	Wrng	wearing
Subd	subdivision	WIM	weigh in motion
Sub	subgrade	W	west
Sub Prep	subgrade preparation	WB	westbound
Ss	subsoil	Wrng	wiring
SS	supplement specification	W/	with
Supp	supplemental	W/o	without
Surf	surfacing	WC	witness corner
Surv	survey		
Sym	symmetrical		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions



08/16/22

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International

T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added - Continued from D-101-3

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

ENGINEER

NORTH DAKOTA

12 18 2020

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM	702 Communications	GT PLNS NAT GAS	Great Plains Natural Gas Company	RED RIV COMM	Red River Rural Communications
ACCENT	Accent Communications	HALS TEL	Halstad Telephone Company	RESVTN TEL	Reservation Telephone
AGASSIZ WU	Agassiz Water Users Incorporated	IDEA1	Idea1	ROBRTS TEL	Roberts Company Telephone
AGC	Associated General Contractors of America	INT-COMM TEL	Inter-Community Telephone Company	R-RIDER ELEC	Roughrider Electric Cooperative
ALL PL	Alliance Pipeline	KANEB PL	Kaneb Pipeline Company	RRVW	Red River Valley & Western Railroad
ALL SEAS WU	All Seasons Water Users Association	KEM ELEC	Kem Electric Cooperative Incorporated	S CENT REG WD	South Central Regional Water District
AMOCO PI	Amoco Pipeline Company	KOCH GATH SYS	Koch Gathering Systems Incorporated	S E W U	South East Water Users Incorporated
AMRDA HESS	Amerada Hess Corporation	LKHD PL	Lakehead Pipeline Company	SCOTT CABLE	Scott Cable Television Dickinson
AT&T	AT&T Corporation	LNGDN RWU	Langdon Rural Water Users Incorporated	SHERDN ELEC	Sheridan Electric Cooperative
B PAW	Bear Paw Energy Incorporated	LWR YELL R ELEC	Lower Yellowstone Rural Electric	SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
BAKER ELEC	Baker Electric	MCKNZ CON	McKenzie Consolidated Telcom	SKYTECH	Skyland Technologies Incorporated
BASIN ELEC	Basin Electric Cooperative Incorporated	MCKNZ ELEC	McKenzie Electric Cooperative	SLOPE ELEC	Slope Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative	MCKNZ WRD	McKenzie County Water Resource District	SOURIS RIV TELCOM	Souris River Telecommunications
BELLE PL	Belle Fourche Pipeline Company	MCLEOD	McLeod USA	ST WAT COMM	State Water Commission
BLM	Bureau of Land Management	MCLN ELEC	McLean Electric Cooperative	STATE LN WATER	State Line Water Cooperative
BNSF	Burlington Northern Santa Fe Railway	MCLN-SHRDN R WAT	McLean-Sheridan Rural Water	STER ENG	Sterling Energy
BOEING	Boeing	MDU	Montana-dakota Utilities	STUT RWU	Stutsman Rural Water Users
BRNS RWD	Barnes Rural Water District	MIDCO	MidContinent Communications	SW PL PRJ	Southwest Pipeline Project
BURK-DIV ELEC	Burke-Divide Electric Cooperative	MIDSTATE TEL	Midstate Telephone Company	T M C	Turtle Mountain Communications
BURL WU	Burleigh Water Users	MINOT CABLE	Minot Cable Television	TCI	TCI of North Dakota
CABLE ONE	Cable One	MINOT TEL	Minot Telephone Company	TESORO GHG PLNS PL	Tesoro High Plains Pipeline
CABLE SERV	Cable Services	MISS VALL COMM	Missouri Valley Communications	TRI-CNTY WU	Tri-County Water Users Incorporated
CAP ELEC	Capital Electric Cooperative Incorporat	MISS W W S	Missouri West Water System	TRL CO RWU	Traill County Rural Water Users
CASS CO ELEC	Cass County Electric Cooperative	MNKOTA PWR	Minnkota Power	UNTD TEL	United Telephone
CASS RWU	Cass Rural Water Users Incorporated	MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative	UPPR SOUR WUA	Upper Souris Water Users Association
CAV ELEC	Cavalier Rural Electric Cooperative	MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative	US SPRINT	U.S. Sprint
CBLCOM	Cablecom Of Fargo	MRE LBTY TEL	Moore & Liberty Telephone	USAF MSL CABLE	U.S.A.F. Missile Cable
CENEX PL	Cenex Pipeline	MUNICIPAL	City Water And Sewer	USFWS	US Fish and Wildlife Service
CENT PL WATER DIST	Central Pipe Line Water District	MUNICIPAL	City Of '.....'	USW COMM	U.S. West Communications
CENT PWR ELEC	Central Power Electric Cooperative	N CENT ELEC	North Central Electric Cooperative	VRNDRY ELEC	Verendrye Electric Cooperative
CENTURYLINK	CenturyLink	N VALL W DIST	North Valley Water District	W RIV TEL	West River Telephone Incorporated
COE	Corps of Engineers	ND PKS & REC	North Dakota Parks And Recreation	WAPA	Western Area Power Administration
CONS TEL	Consolidated Telephone	ND TEL	North Dakota Telephone Company	WAWSA	Western Area Water Supply Authority
CONT RES	Continental Resource Inc	NDDOT	North Dakota Department of Transportation	WEB	W. E. B. Water Development Association
CPR	Canadian Pacific Railway	NDSU SOIL SCI DEPT	NDSU Soil Science Department	WILLI RWA	Williams Rural Water Association
D O E	Department Of Energy	NEMONT TEL	Nemont Telephone	WILSTN BAS PL	Williston Basin Interstate Pipeline Company
DAK CARR	Dakota Carrier Network	NODAK R ELEC	Nodak Rural Electric Cooperative	WLSH RWD	Walsh Water Rural Water District
DAK CENT TEL	Dakota Central Telephone	NOON FRMS TEL	Noonan Farmers Telephone Company	WOLVRTN TEL	Wolverton Telephone
DAK RWD	Dakota Rural Water District	NPR	Northern Plains Railroad	XLENER	Xcel Energy
DGC	Dakota Gasification Company	NSP	Northern States Power	YSVR	Yellowstone Valley Railroad
DICKEY R NET	Dickey Rural Networks	NTH PRAIR RW	Northern Prairie Rural Water Association		
DICKEY RWU	Dickey Rural Water Users Association	NTHN BRDR PL	Northern Border Pipeline		
DICKEY TEL	Dickey Telephone	NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated		
DNRR	Dakota Northern Railroad	NTHWSTRN REF	Northwestern Refinery Company		
DOME PL	Dome Pipeline Company	NW COMM	Northwest Communication Cooperation		
DVELEC	Dakota Valley Electric Cooperative	NWRWD	Northwest Rural Water District		
DVMW	Dakota, Missouri Valley & Western	ONEOK	Oneok gas		
ENBRDG	Enbridge Pipelines Incorporated	OSHA	Occupational Safety and Health Administration		
ENVENTIS	Enventis Telephone	OTTR TL PWR	Otter Tail Power Company		
EQUINOR	Equinor Pipeline	PAAP	Plains All American Pipeline		
FALK MNG	Falkirk Mining Company	P L E M	Prairielands Energy Marketing		
FHWA	Federal Highway Administration	POLAR COM	Polar Communications		
G FKS-TRL WD	Grand Forks-traill Water District	PVT ELEC	Private Electric		
GETTY TRD & TRAN	Getty Trading & Transportation	QWEST	Qwest Communications		
GLDN W ELEC	Golden West Electric Cooperative	R&T W SUPPLY	R & T Water Supply Association		
GRGS CO TEL	Griggs County Telephone				
GTR RAMSEY WD	Greater Ramsey Water District				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-10-20	General Revisions
08-16-22	General Revisions








































08/16/22

LINE STYLES









D-101-20

Existing Topography























	Existing Ground Void
	Existing Cemetary Boundary
	Existing Box Culvert Bridge
	Existing Concrete Surface
	Existing Drainage Structure
	Existing Gravel Surface
	Existing Riprap
	Existing Dirt Surface
	Existing Asphalt Surface
	Existing Tie Point Line
	Existing Railroad Centerline
	Existing Guardrail Cable
	Existing Guardrail Metal
	Existing Edge of Water
	Existing Fence
	Existing Railroad
	Existing Field Line
	Exst Flow
	Existing Curb
	Existing Valley Gutter
	Existing Driveway Gutter
	Existing Curb and Gutter
	Existing Mountable Curb and Gutter

	Existing 3-Cable w Posts
	Site Boundary
	Existing Berm, Dike, Pit, or Earth Dam
	Existing Ditch Block
	Existing Tree Boundary
	Existing Brush or Shrub Boundary
	Existing Retaining Wall
	Existing Planter or Wall
	Existing W-Beam Guardrail with Posts
	Existing Railroad Switch
	Gravel Pit - Borrow Area
	Existing Wet Area-Vegetation Break
	Existing High Tension Cable Guardrail
	Existing High Tension Cable Guardrail with Posts





Proposed Topography

	3-Cable w Posts
	Flow
	Fence
	Remove Line
	Wall
	Retaining Wall (Plan View)
	W-Beam w Posts
	High Tension Cable Guardrail with Posts










Existing Utilities

	Existing Electrical
	Existing Fiber Optic Line
	Existing TV Fiber Optic
	Existing Gas Pipe
	Existing Overhead Utility Line
	Existing Power
	Existing Fuel Pipeline
	Existing Undefined Above Ground Pipe Line
	Existing Sanitary Sewer
	Existing Sanitary Force Main
	Existing Storm Drain
	Existing Storm Drain Force Main
	Existing Culvert
	Existing Telephone Line
	Existing TV Line
	Existing Water or Steam Line
	Existing Under Drain
	Existing Slotted Drain
	Existing Conduit
	Existing Conductor
	Existing Down Guy Wire Down Guy
	Existing Underground Vault or Lift Station




Proposed Utilities


	24 Inch Pipe
	Reinforced Concrete Pipe
	Under Drain
	Edge Drain

Traffic Utilities

	Conductor
	Fiber Optic
	Existing Loop Detector
	Existing Double Micro Loop Detector
	Micro Loop Detector Double
	Existing Micro Loop Detector
	Micro Loop Detector
	Signal Head with Mast Arm
	Existing Signal Head with Mast Arm

Sign Structures














	Existing Overhead Sign Structure
	Existing Overhead Sign Structure Cantilever
	Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		
07-01-14 REVISIONS		
DATE	CHANGE	
09-23-16 12-18-20	Added and Revised Items, Organized by Functional Groups General Revisions	
		12 18 2020










LINE STYLES

D-101-21









Right Of Way

	Easement
	Existing Easement
	Right of Way
	Existing Right of Way
	Existing Right of Way Railroad
	Existing Right of Way Not State Owned
	Existing Government Lot Line
	Existing Adjacent Block Lines
	Existing Adjacent Lot Lines
	Existing Adjacent Property Line
	Existing Adjacent Subdivision Lines
	Sight Distance Triangle Line
	Dimension Leader







Boundary Control



	Existing City Corporate Limits or Reservation Boundary
	Existing State or International Line
	Existing Township
	Existing County
	Existing Section Line
	Existing Quarter Section Line
	Existing Sixteenth Section Line
	Existing Centerline
	Tangent Line

Cross Sections and Typicals



	Existing Ground
	Existing Topsoil (Cross Section View)
	Existing Ground Void (Not Surveyed)
	Existing Concrete
	Existing Aggregate (Cross Section View)
	Existing Curb and Gutter (Cross Section View)
	Existing Asphalt (Cross Section View)
	Existing Reinforcement Rebar

Geotechnical



	Geotextile Fabric Type D
	Geogrid
	Geotextile Fabric Type R
	Geotextile Fabric Type R1
	Geotextile Fabric Type RR
	Geotextile Fabric Type S

	Subgrade Reinforcement
	Failure Line







Countours

	Depression Contours
	Supplemental Contour





Profile

	Subgrade, Subcut or Ditch Grade
	Topsoil Profile










Striping

	Centerline Pavement Marking
	Barrier with Centerline Pavement Marking
	Barrier Pavement Marking
	Stripe 4 IN Dotted Extension White
	Stripe 8 IN Dotted Extension White
	Stripe 8 IN Lane Drop








Pavement Joints

	Doweled Joint
	Tie Bar 30 Inch 4 Foot Center to Center
	Tie Bar 18 Inch 3 Foot Center to Center
	Tie Bar at Random Spacing






Bridge Details

	Small Hidden Object
	Large Hidden Object
	Phantom Object
	Existing Conditions Object
	Centerline Main
	Centerline Secondary
	Excavation Limits
	Proposed Ground
	Sheet Piling

Erosion Control

	Limits of Const Transition Line
	Bale Check
	Rock Check
	Floating Silt Curtain
	Silt Fence
	Excavation Limits
	Fiber Rolls

Environmental

	Wetland Mitigation
	Existing Wetland Easement USFWS
	Existing Wetland Jurisdictional
	Existing Wetland
	Tree Row

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
09-23-16 12-18-20	Added and Revised Items, Organized by Functional Groups General Revisions

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

ENGINEER

NORTH DAKOTA

12 18 2020


SYMBOLS

D-101-30


 North Arrow (Half Scale)


 Alignment Data Point

 Alignment Monument

 Spot Elevation


 Existing Miscellaneous Spot

 Existing Access Control Arrow

 Existing Benchmark

 Reset USGS Marker

 Iron Monument Found





 Iron Pin R/W Monument

 Property Corner




 Iron Pin Reference Monument


   Right of Way Marker (Exst, Ppsd, Reset)

 Existing Federal Reference Corner


    Existing Section Corner (Full, Quarter, Sixteenth, Meander)


 Existing Witness Corner


   Existing Control Point (CP, GPS-RTK, TRI)


 Existing Traverse PI Aerial Panel


 Existing Reference Marker Point NGS

 Existing EFB Misc

 Existing Bush or Shrub


 Existing Large Evergreen Tree


 Existing Small Evergreen Tree


 Existing Large Tree

 Existing Small Tree

 Existing Tree Trunk

 Cairn or Stone Circle


 Existing Artifact


 Existing Satellite Dish

 Existing Weather Station


 Existing Windmill or Tower


 Reinforced Pavement


 Continuous Split Barrel Sample


 Flight Auger Sample

 Split Barrel Sample

 Thinwall Tube Sample

 Standard Penetration Test

 Inclinometer Tube

 Excavation Unit

 Existing Ground Water Well Bore Hole

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



12 18 2020

SYMBOLS

D-101-31

















































































				Flexible Delineator					Highway Sign (Exst, Ppsd)
				Flexible Delineator Type A (Exst, Ppsd)					Mile Post Type A (Exst-Ppsd-Reset)
				Flexible Delineator Type B (Exst, Ppsd)					Mile Post Type B (Exst, Ppsd)
				Flexible Delineator Type C (Exst, Ppsd)					Mile Post Type C (Exst, Ppsd)
				Flexible Delineator Type D (Exst, Ppsd)					Object Marker Type I (Exst, Ppsd)
				Flexible Delineator Type E (Exst, Ppsd)					Object Marker Type II (Exst, Ppsd)
				Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)					Object Marker Type III (Exst, Ppsd)
				Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)					Existing Reference Marker
				Delineator Type C (Exst, Ppsd, Diamond Grade)					Road Closure Gate 18 Ft (Exst, Ppsd)
				Delineator Type D (Exst, Ppsd, Diamond Grade)					Road Closure Gate 28 Ft (Exst, Ppsd)
				Delineator Type E (Exst, Ppsd, Diamond Grade)					Road Closure Gate 40 Ft (Exst, Ppsd)
				Barricade (Type I, Type II, Type III)					Existing Railroad Battery Box
				Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)					Existing RR Profile Spot
				Attenuation Device					Existing Railroad Crossbuck
				Truck Mounted Attenuator					Existing Railroad Frog
				Delineator Drums					Existing Mailbox (Private, Federal)
				Flagger					
				Tubular Marker					
				Traffic Cone					
				Back to Back Vertical Panel Sign					

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 18 2020

SYMBOLS

D-101-32


	Existing Luminaire			High Mast Light Standard 3 Luminaire (Exst, Ppsd)		Existing Traffic Signal Standard			
	Luminaire LED			High Mast Light Standard 4 Luminaire (Exst, Ppsd)				Pull Box (Exst-Ppsd-Undefined)	
	Existing Light Standard Luminaire			High Mast Light Standard 5 Luminaire (Exst, Ppsd)				Intelligent Transportation Pull Box (Exst, Ppsd)	
	Relocate Light Standard			High Mast Light Standard 6 Luminaire (Exst, Ppsd)				Transformer (Exst, Ppsd)	
	Light Standard Light LED Luminaire			High Mast Light Standard 7 Luminaire (Exst, Ppsd)				Power Pole (Exst-Ppsd-with Transformer)	
	Light Standard 35 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 8 Luminaire (Exst, Ppsd)				Wood Pole (Exst, Ppsd)	
	Light Standard 50 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 9 Luminaire (Exst, Ppsd)				Pedestrian Push Button Post (Exst, Ppsd)	
	Light Standard 70 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 10 Luminaire (Exst, Ppsd)				Existing Pole	
	Light Standard 100 Watt High Pressure Sodium Vapor Luminaire			Overhead Sign Structure Load Center (Exst, Ppsd)				Existing Telephone Pole	
	Light Standard 150 Watt High Pressure Sodium Vapor Luminaire			Traffic Signal Controller (Exst, Ppsd)				Existing Post	
	Light Standard 200 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Traffic Signal Controller (Exst, Ppsd)					Connection Conductor (Ground, Neutral, Phase 1, Phase 2)
	Light Standard 250 Watt High Pressure Sodium Vapor Luminaire			Flashing Beacon (Exst, Ppsd)					
	Light Standard 310 Watt High Pressure Sodium Vapor Luminaire			Concrete Foundation (Exst, Ppsd)					
	Light Standard 400 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Flasher (Exst, Ppsd)					
	Light Standard 700 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Feed Point (Exst, Ppsd)					
	Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Feed Point with Pad (Exst, Ppsd)					
	Emergency Vehicle Detector			Pole Mounted Feed Point (Exst, Ppsd)					
	Video Detection Camera			Junction Box (Exst, Ppsd)					
				Existing Pedestrian Head with Number					
				Existing Signal Head					
				Pole Mounted Head					
				Existing Lighting Standard Pole					

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



KIRK J. HOFF
REGISTERED
PROFESSIONAL ENGINEER

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14 REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



12 18 2020

SYMBOLS


D-101-33

			Existing Manhole (Electrical, Gas, Telephone)		Cap or Stub Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water
			Water Manhole (Exst, Exst with Valve)		Existing Pedestal Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined
			Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)		Existing Pipe Vent Gas, Fuel, Sanitary, Storm Drain, Water, Undefined
			Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)		Valve Exst Gas, Exst Water, Ppsd Water, Exst Undefined
			Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)		Pump Sanitary, Storm Drain, Exst Water
			Force Main Storm Drain Manhole (Exst, Exst with Valve)		Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)		Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Existing Water Appurtenance		Existing Utility Marker
			Sprinkler Head (Exst, Ppsd)		Existing Meter
			Fire Hydrant (Exst, Ppsd)		Existing Fuel Dispensers
			Cleanout (Exst Sanitary, Underdrain)		Existing Fuel Filler Pipes
			Existing Catch Basin Inlet (Round, Square)		Existing Fuel Leak Sensors
			Existing Curb Inlet (Round, Square)		
			Existing Slotted Reinforced Concrete Pipe		
			Catch Basin (Riser 30 Inch, Beehive, Type A)		
			Inlet Mountable Curb (Type A, Type B)		
			Inlet Saddle Base (Type 1, Type 2)		
			Inlet Special (Catch Basin, Type 1, Type A)		
			Inlet (Tee, Type 1, Type 2, Type 2 Double)		
			Median Drain		
			Headwall (Exst, Ppsd, Ppsd Single with Vegetation Barrier, Ppsd Double with Vegetation Barrier)		


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 18 2020


EROSION AND SILTATION CONTROLS - SILT FENCE

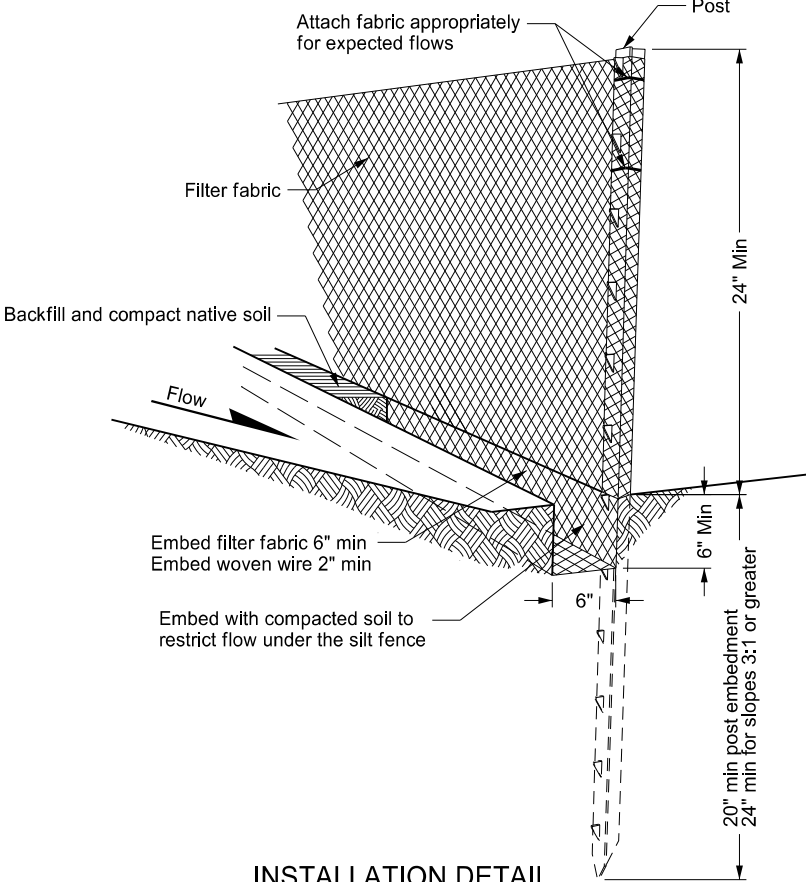


INSTALLATION DETAIL

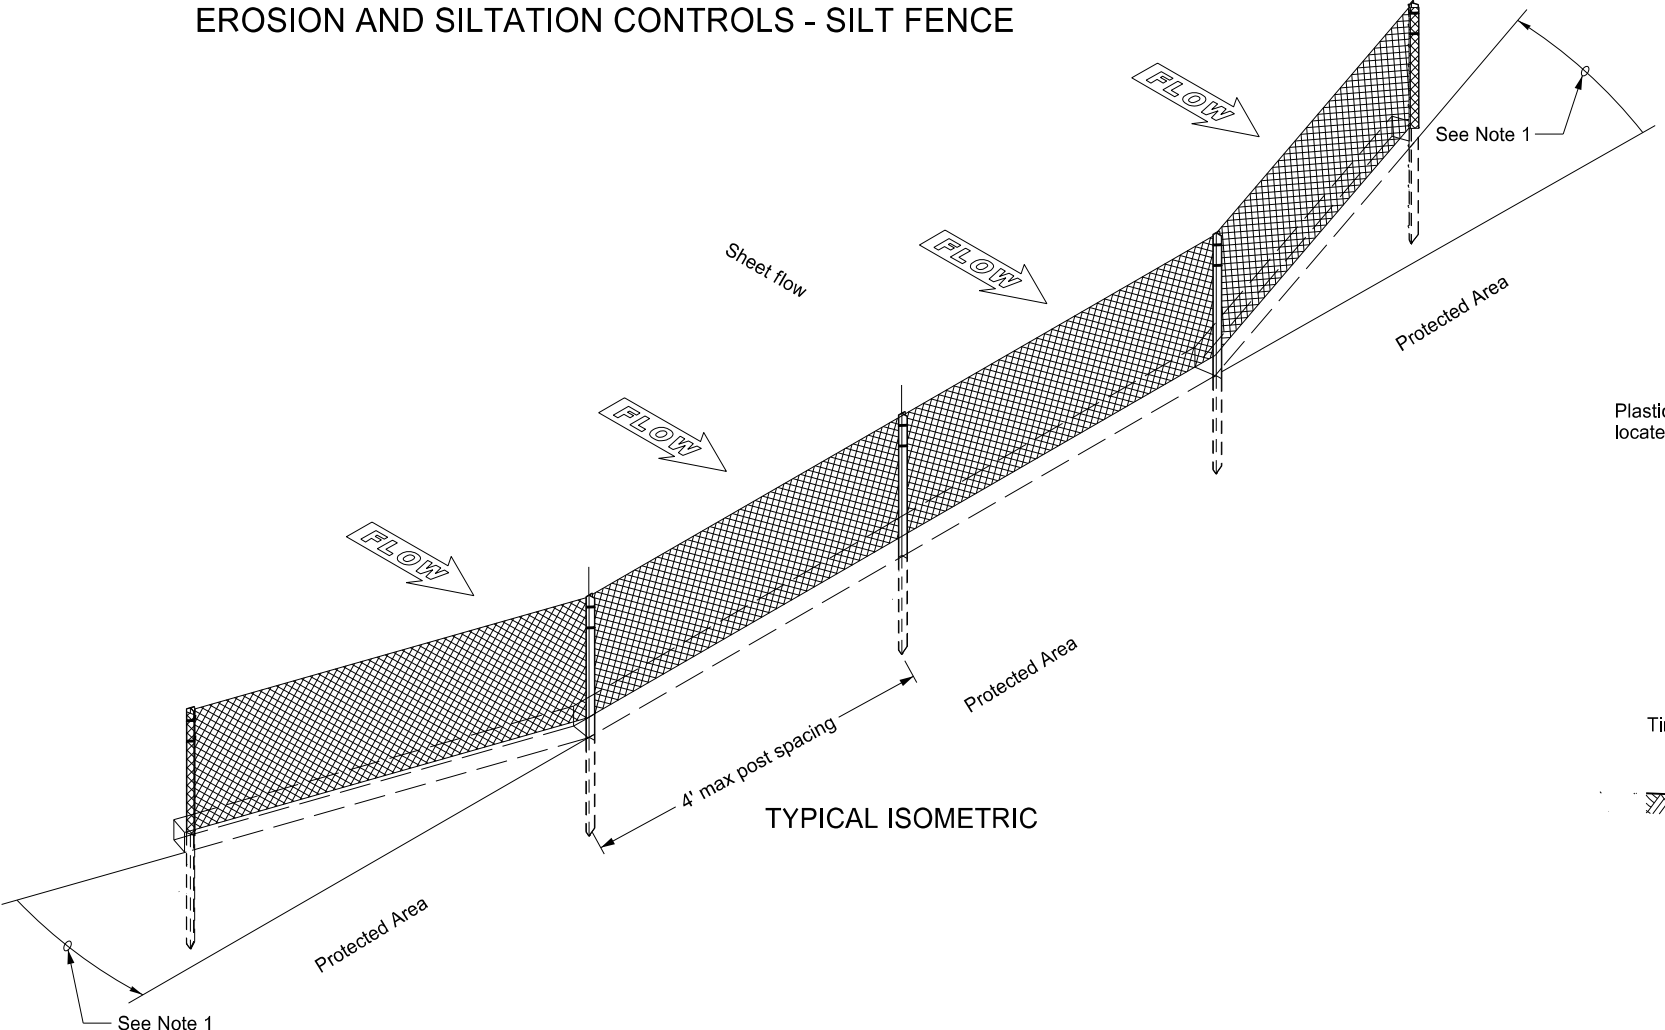


TYPICAL ISOMETRIC

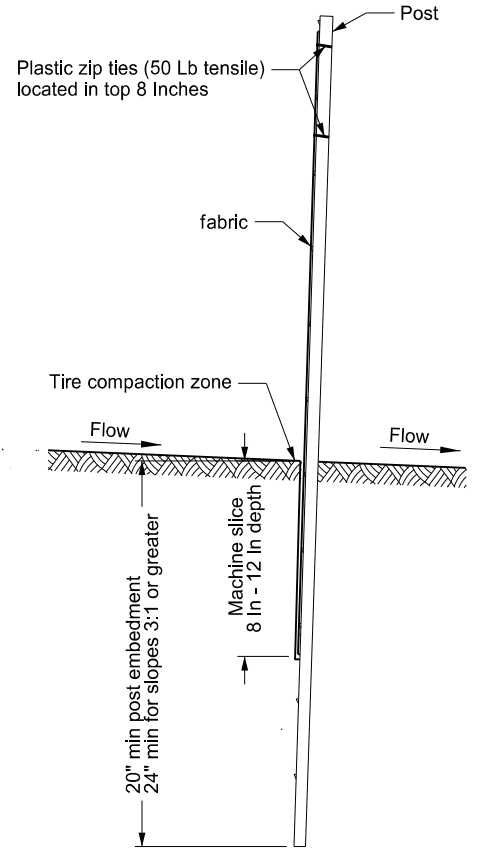

MACHINE SLICED SILT FENCE

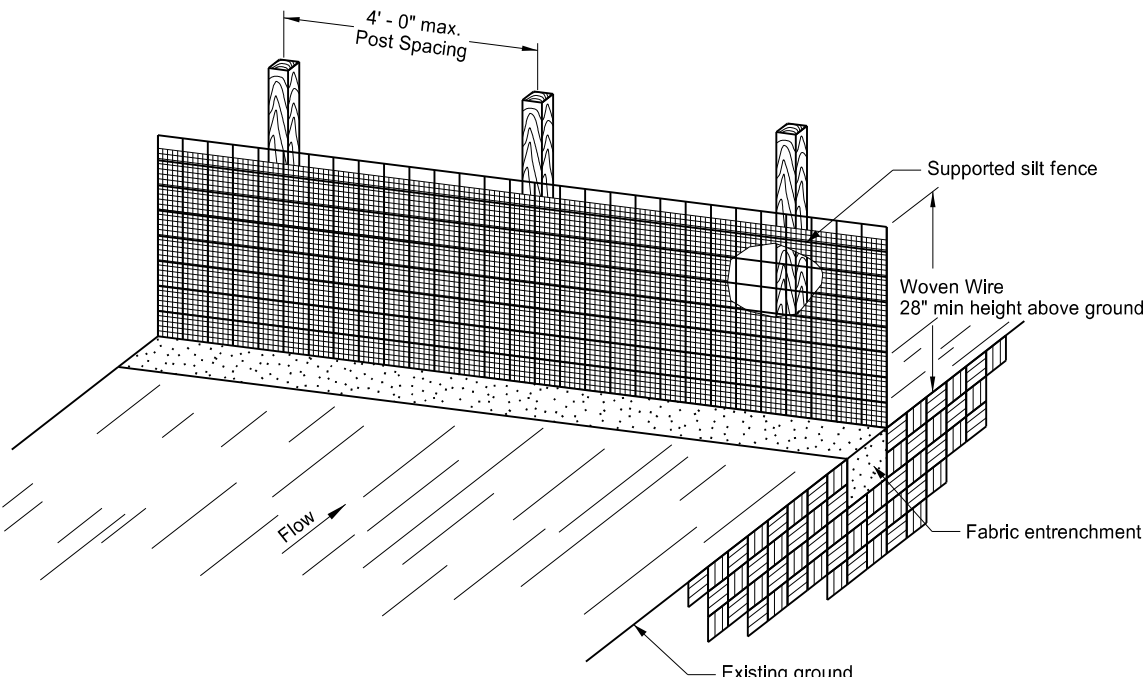

SILT FENCE SUPPORTED

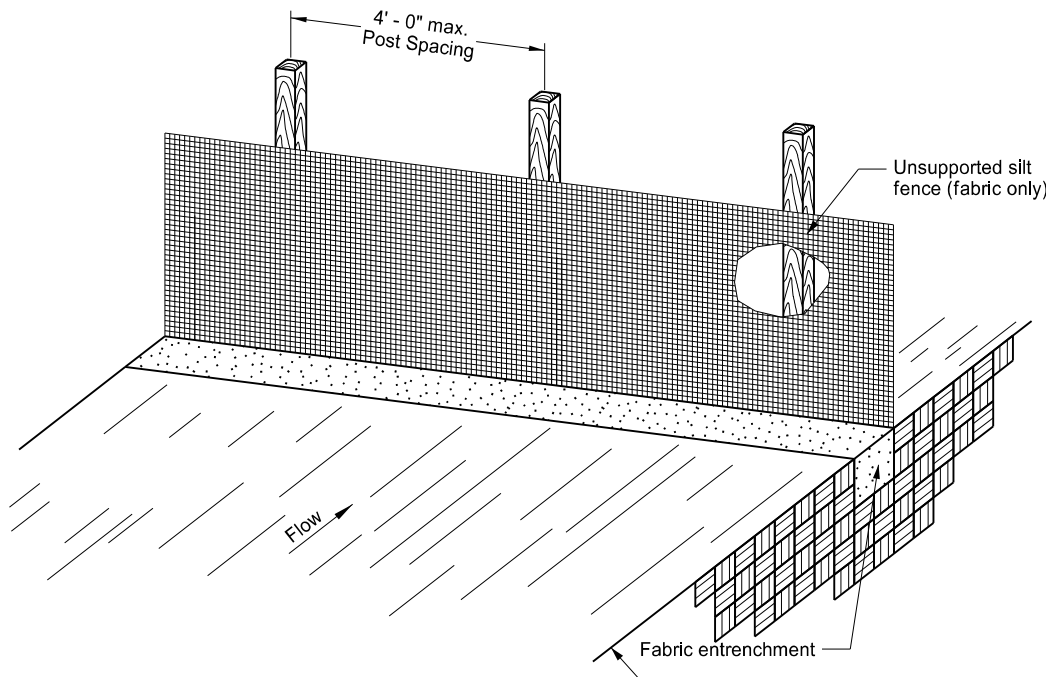

SILT FENCE UNSUPPORTED



- NOTES:
1. Install the ends of the silt fence to point slightly upslope to prevent sediment from flowing around the ends of the fence.
 2. Place splices outside low spots.
 3. Install silt fencing parallel to contour lines.
 4. Do not embed silt fence when placed in standing water.
 5. Silt fence material does not need to reach the top of woven wire support.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Standard drawing resulted from splitting standard D-708-2.
06-27-16 08-27-19	Revised details & added new ones. New Design Engineer PE Stamp.




This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 08/27/19 and the original document is stored at the
North Dakota Department
of Transportation

EROSION CONTROL
FIBER ROLL PLACEMENT DETAILS

D-261-1

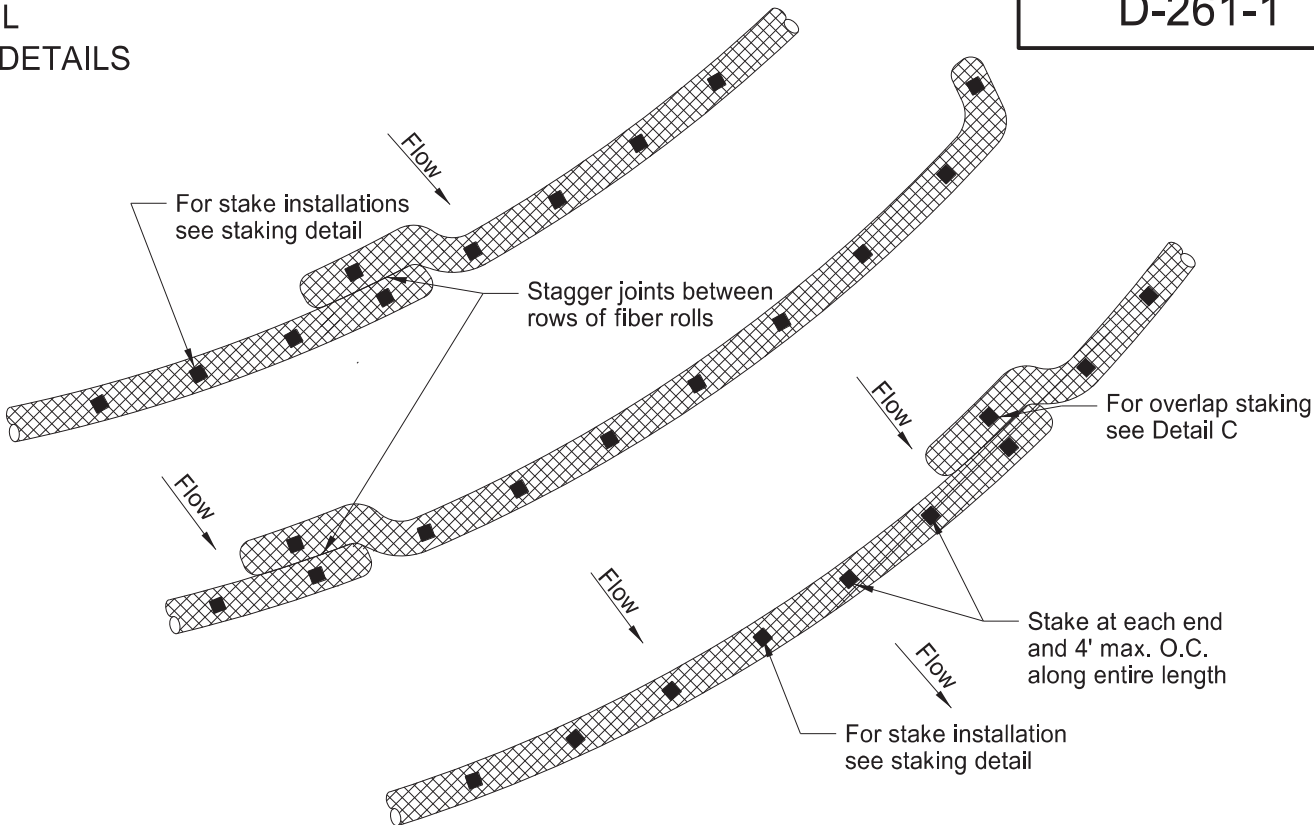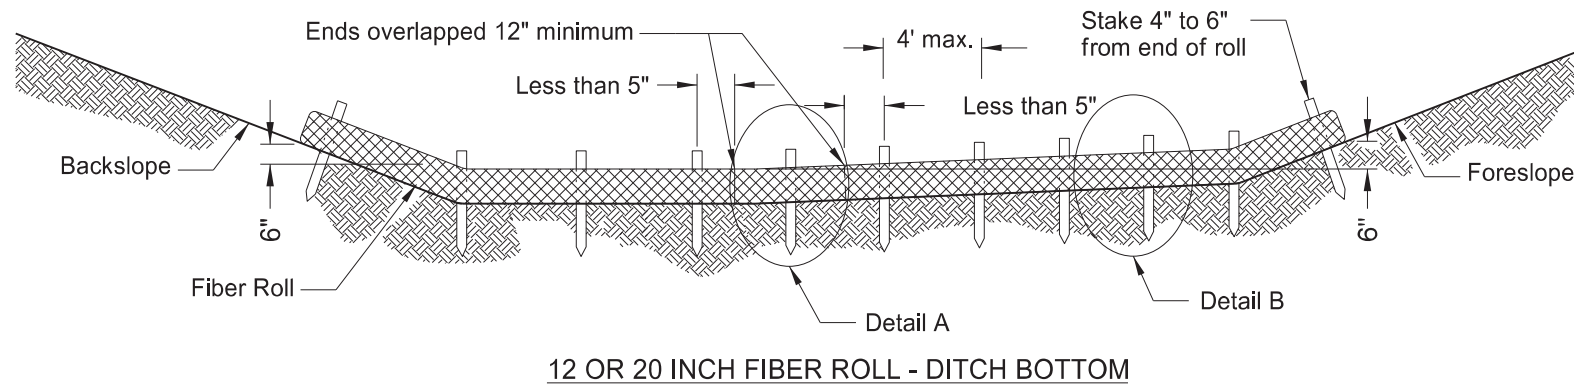

PLAN VIEW FOR SLOPE APPLICATION
Ensure fiber rolls are placed along the contours of the slope.

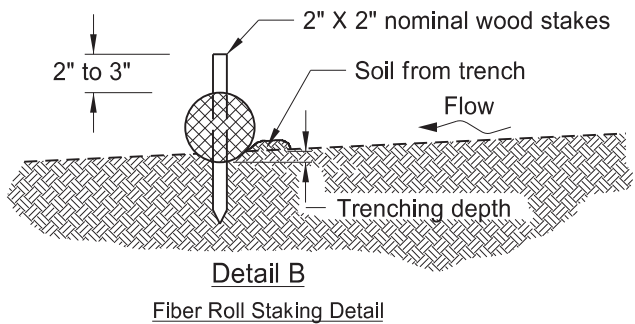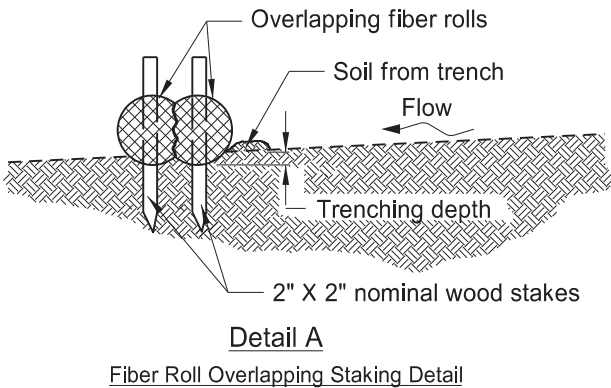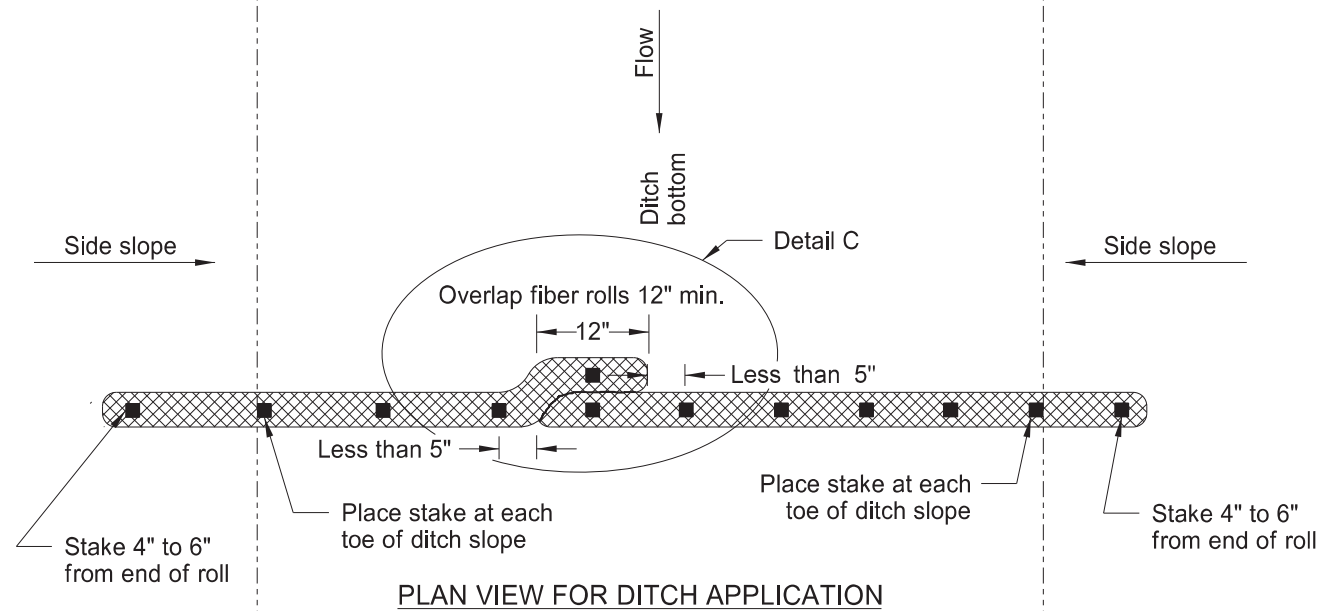

FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	MINIMUM TRENCH DEPTH	MAXIMUM TRENCH DEPTH
6"	2" x 2"	18"	2"	2"
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"

NOTE: Runoff must not be allowed to run under or around roll.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-18-10	
REVISIONS	
DATE	CHANGE
06-10-13	Added plan view for ditch and slope application. Added table with values for stake and trench dimensions.
10-04-13	Revised fiber roll overlap detail.
06-26-14	Changed standard drawing number from D-708-7 to D-261-1.
08-27-19	New Design Engineer PE Stamp
04-22-24	Slope Plan View-Overlap Change.




04/22/24

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-7

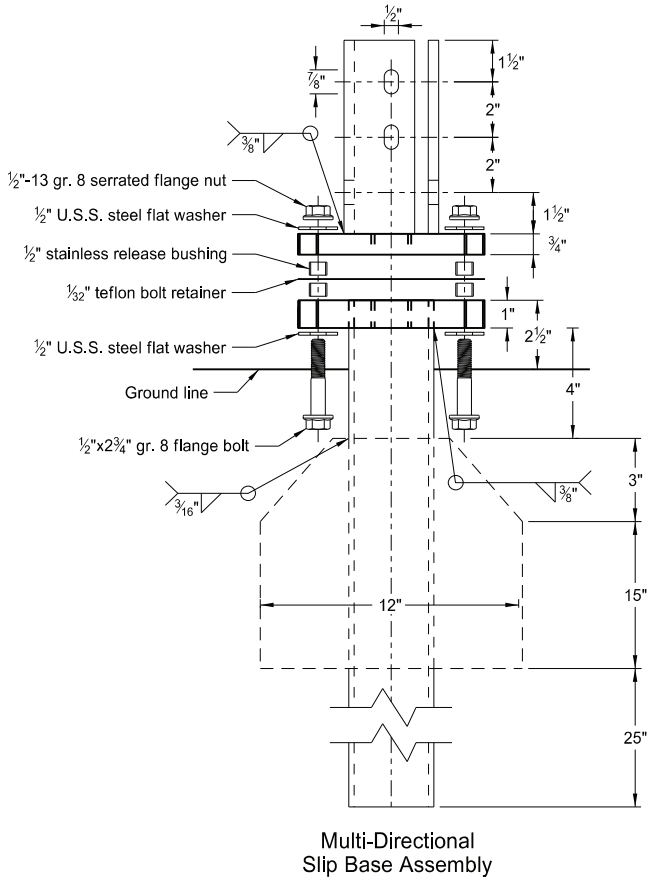

Perforated Tube

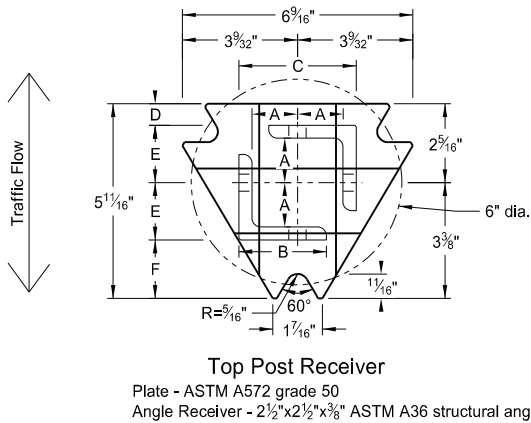

Notes:

1. Torque slip base bolts as specified by manufacturer.
2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
4. In concrete sidewalk, use same anchor without wings.
5. Provide more than 7' between the first and fourth posts of a four post sign.




Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thick-ness Gauge	Sleeve Size in.	Wall Thick-ness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 5/16"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 7/8"
2 1/2"x10 ga.	1 5/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

(A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.

(B) For additional wind load, insert the 2 3/16"x10 ga. into 2 1/2"x10 ga.

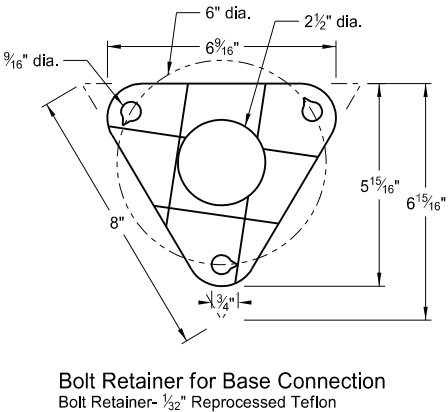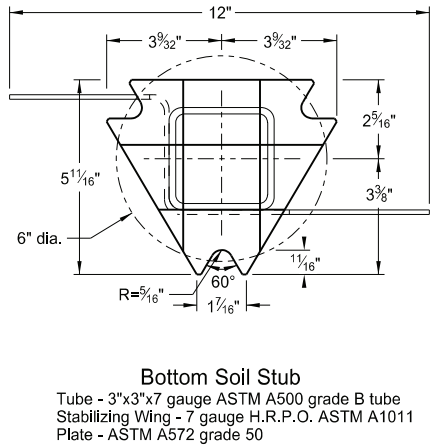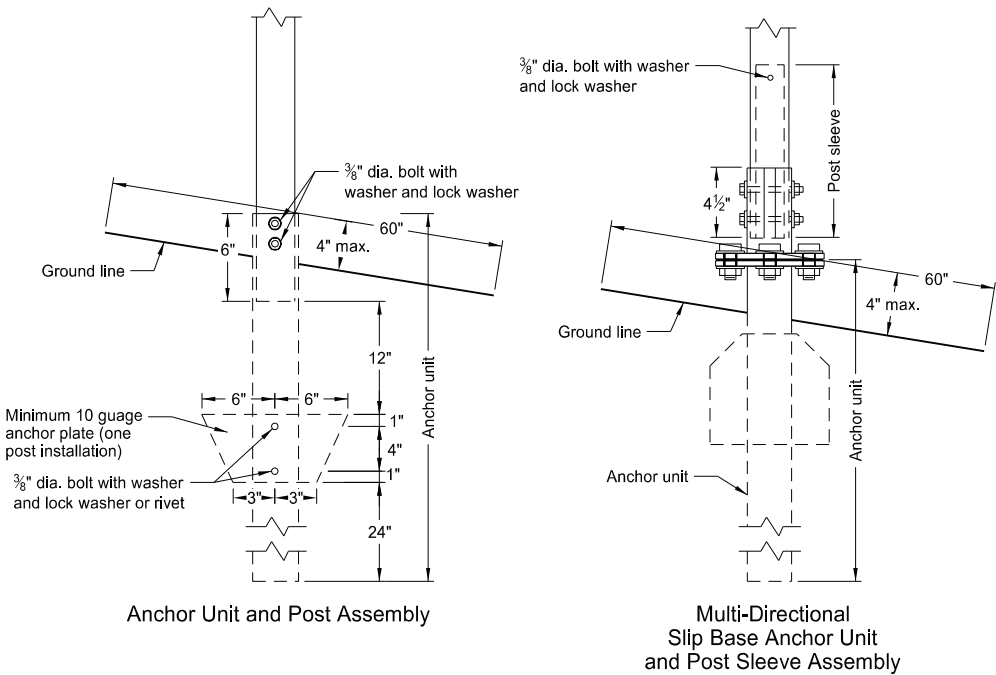

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature





08/01/24



BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8


U-Channel Post

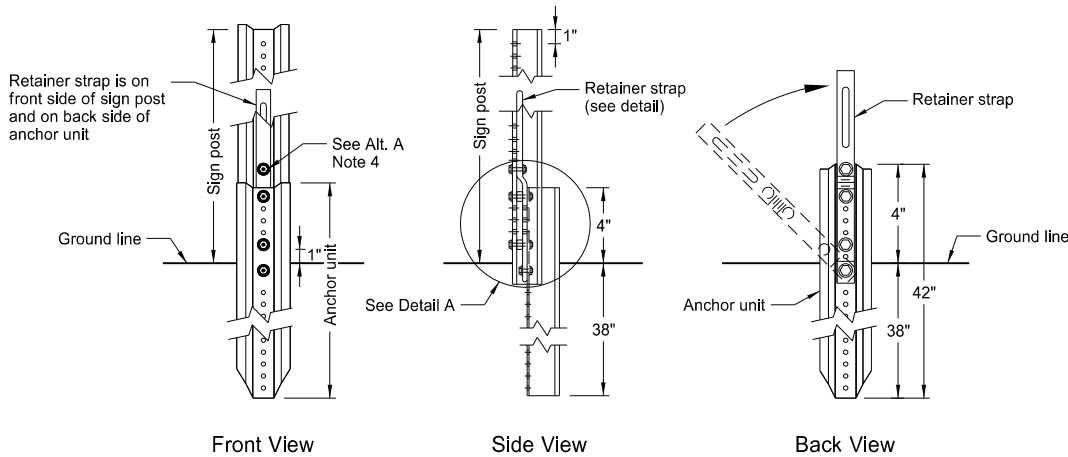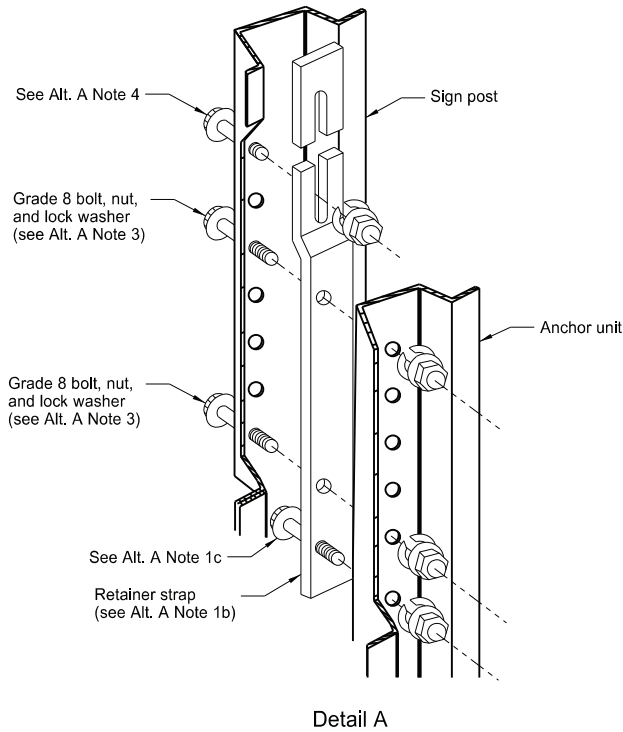

Breakaway U-Channel Detail
Alternate A
Install a maximum of 2 posts within 7'.

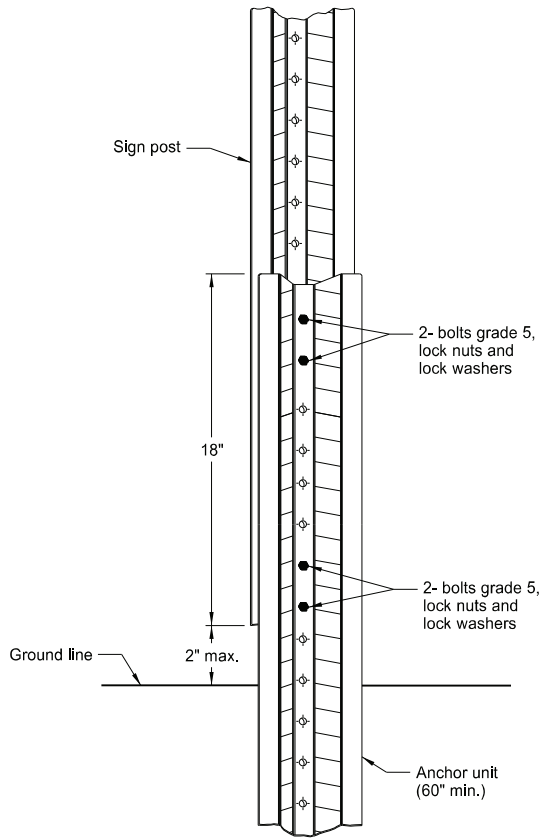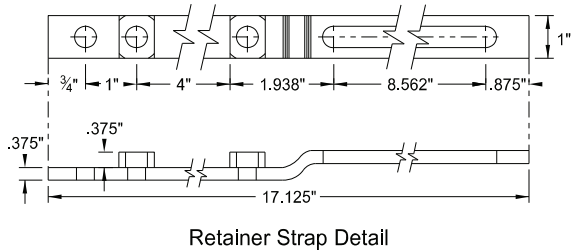

Breakaway U-Channel Splice Detail
Alternate B
(2.5 and 3 lb/ft)
Install a maximum of 3 posts within 7'.

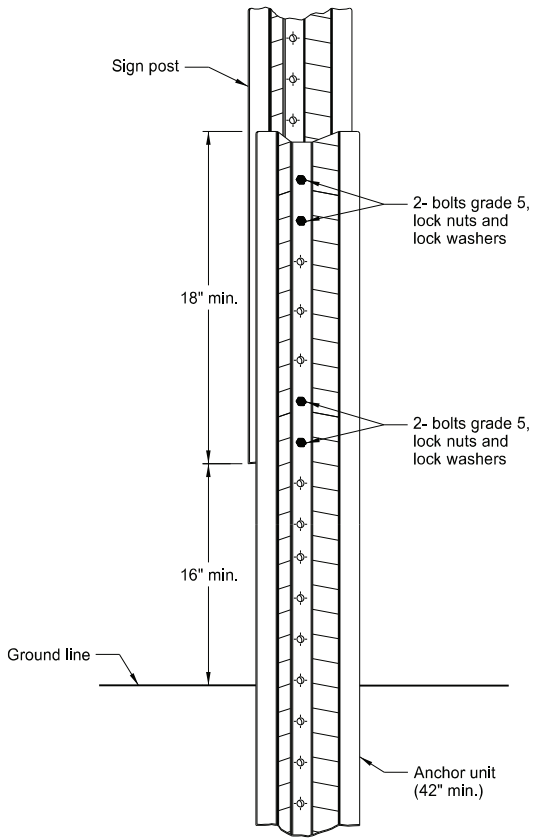

Breakaway U-Channel Splice Detail
Alternate C
(2.5 and 3 lb/ft)
Install a maximum of 3 posts within 7'.

Alternate A Steps of Installation:














- Drive anchor unit to within 12" of ground level.
 - Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
 - Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
 - Rotate strap 90° to left.
- Drive anchor unit to 4" above ground.
 - Rotate strap to vertical position.
- Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
 - Alternately tighten two connector bolts.
- Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
- Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature



08/01/24

D-704-9



ARROW DETAILS

NOTES:

(A) Arrow may be right or left of the legend to indicate construction to the right or left.


NORTH DAKOTA	
DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17 10-03-19 8-01-24	Added sign & background color New Design Engineer PE Stamp Electronic Stamp/Signature




08/01/24

CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS


D-704-10

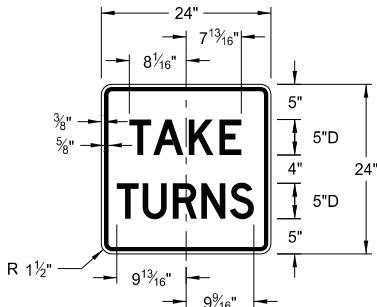


R1-50P-24
Legend: black (non-refl)
Background: white

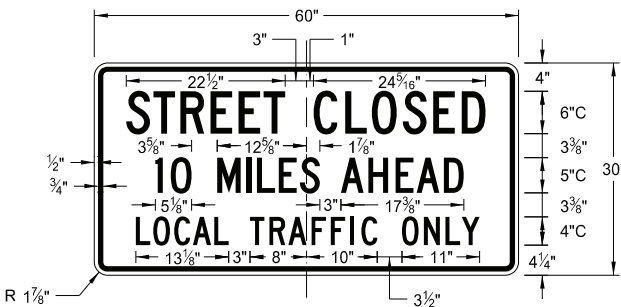


R11-3c-60
Legend: black (non-refl)
Background: white

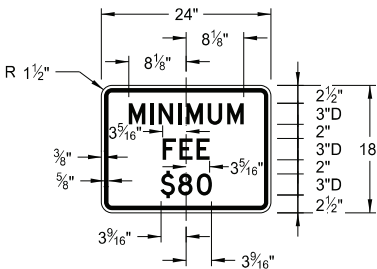

R2-1aP-24
Legend: black (non-refl)
Background: white

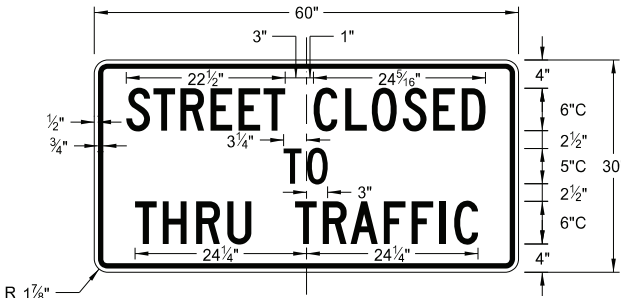

R11-4a-60
Legend: black (non-refl)
Background: white

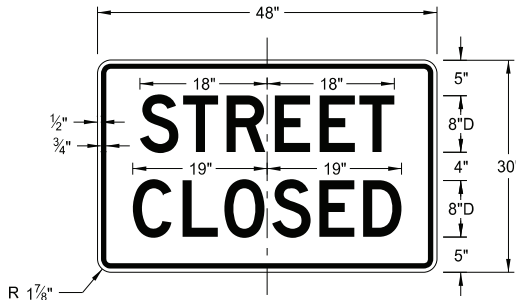

R11-2a-48
Legend: black (non-refl)
Background: white

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Revised sign number
10-03-19	New Design Engineer PE Stamp
8-01-24	Electronic Stamp/Signature




08/01/24


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

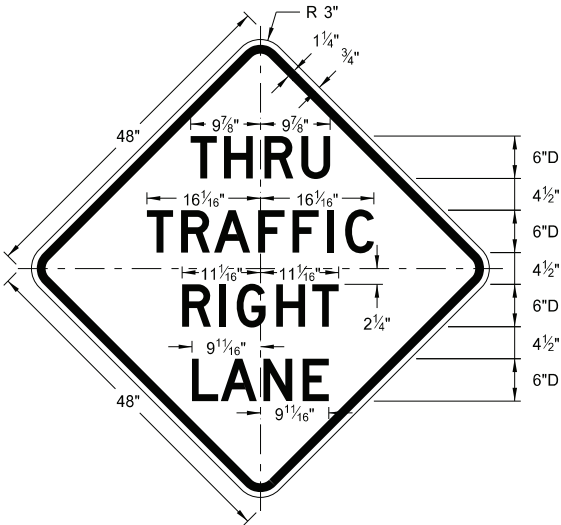


W5-8-48
Legend: black (non-refl)
Background: orange

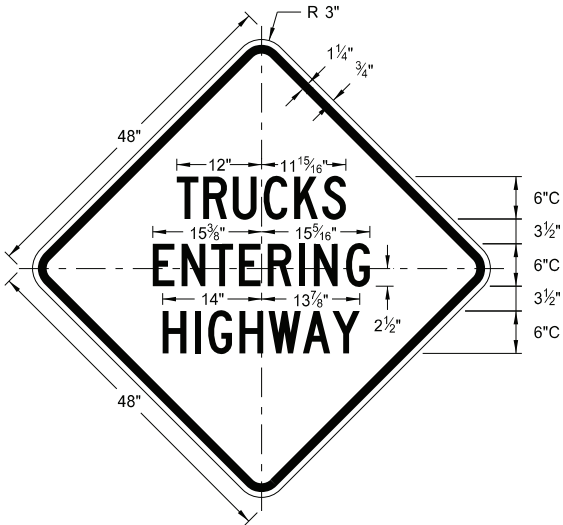


W8-53-48
Legend: black (non-refl)
Background: orange

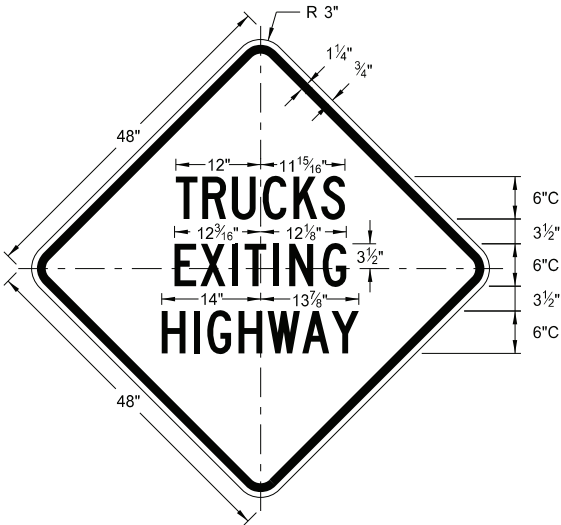


W8-56-48
Legend: black (non-refl)
Background: orange

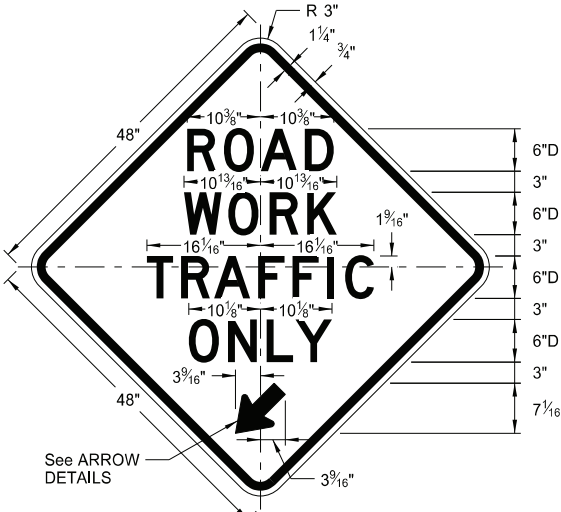


W5-9-48
Legend: black (non-refl)
Background: orange

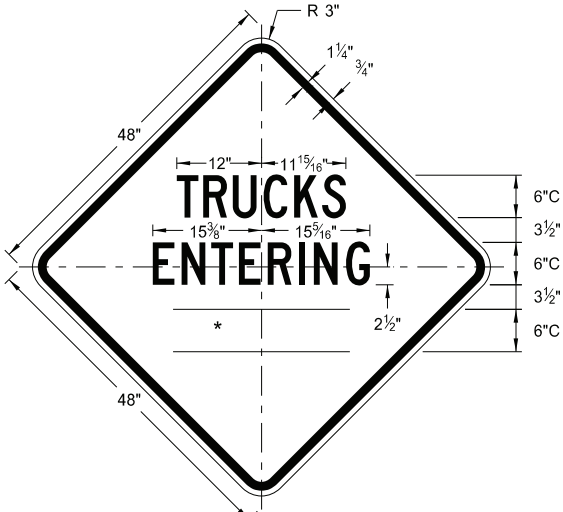


W8-54-48
Legend: black (non-refl)
Background: orange

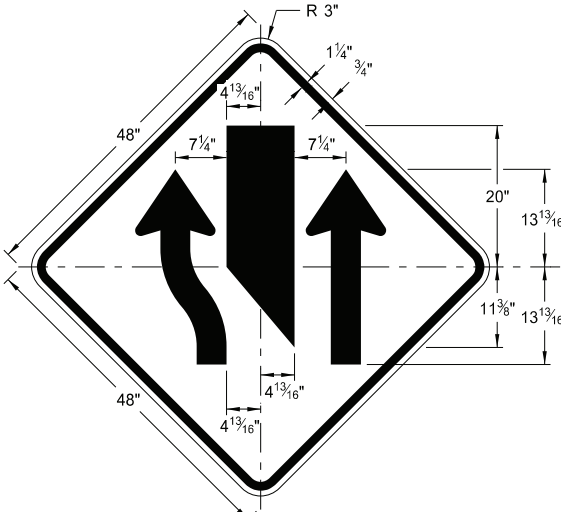

W9-3a-48
Legend: black (non-refl)
Background: orange




W5-9-48

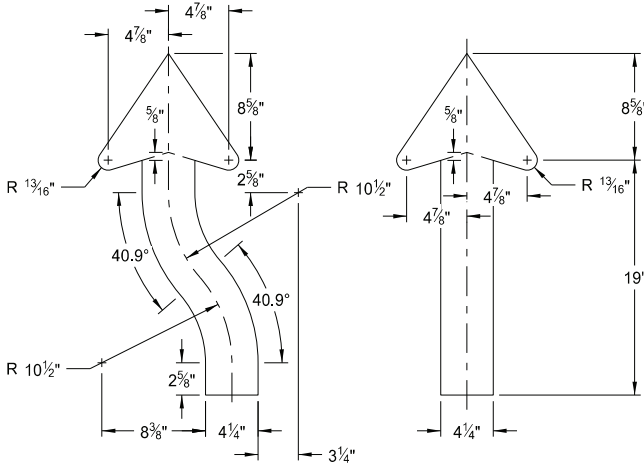


W9-3a-48

ARROW DETAILS

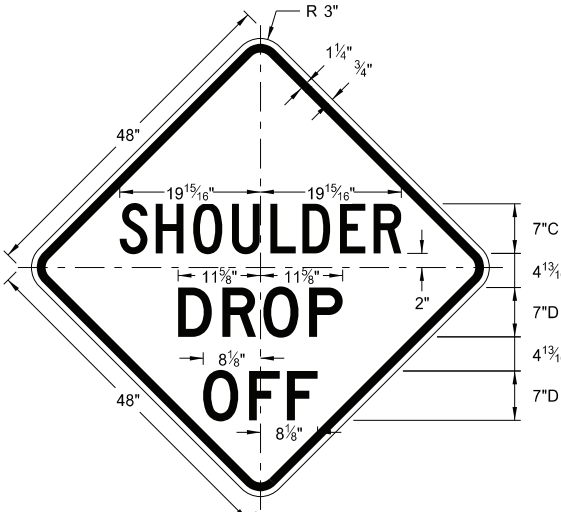

W8-9a-48
Legend: black (non-refl)
Background: orange

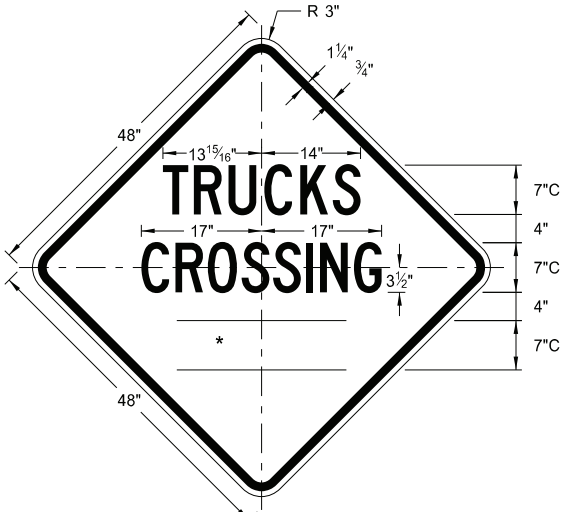


W8-55-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Updated sign number
5-31-18	Revised sign and arrow details
10-03-19	New Design Engineer PE Stamp
8-01-24	Electronic Stamp/Signature




08/01/24


CONSTRUCTION SIGN DETAILS
WARNING SIGNS



W16-7aP-18
Legend: black (non-refl)
Background: orange

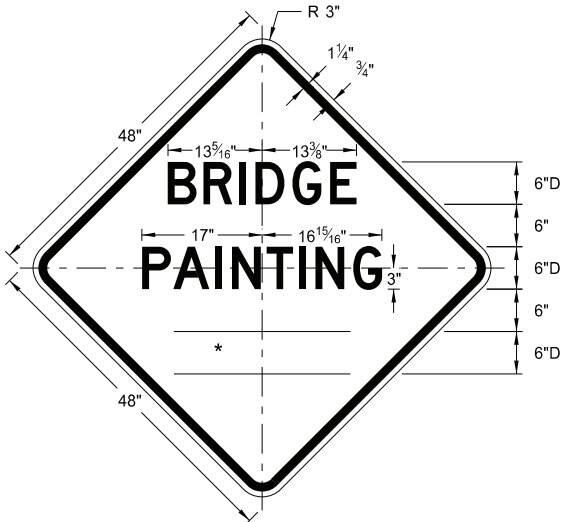


W21-50-48
Legend: black (non-refl)
Background: orange

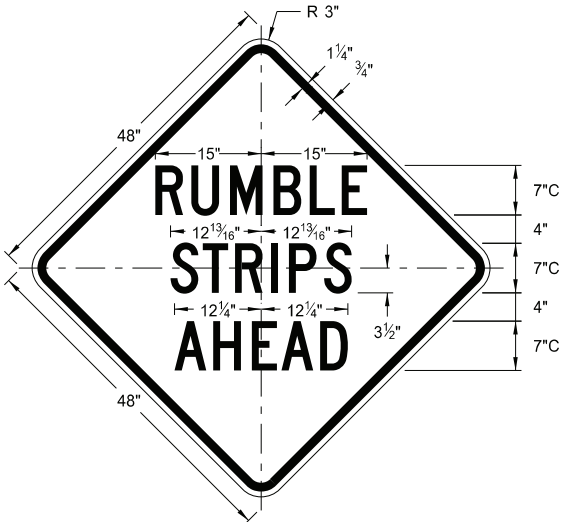


W21-53-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

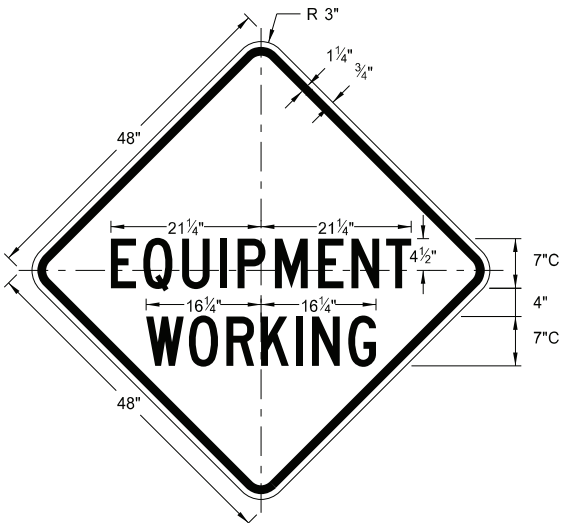


W20-51-48
Legend: black (non-refl)
Background: orange

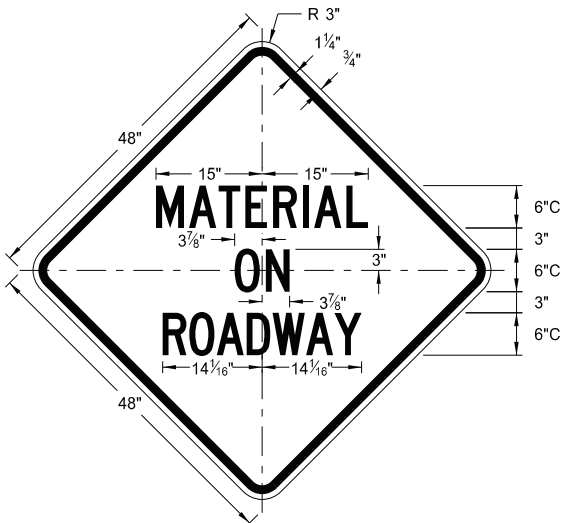


W21-51-48
Legend: black (non-refl)
Background: orange

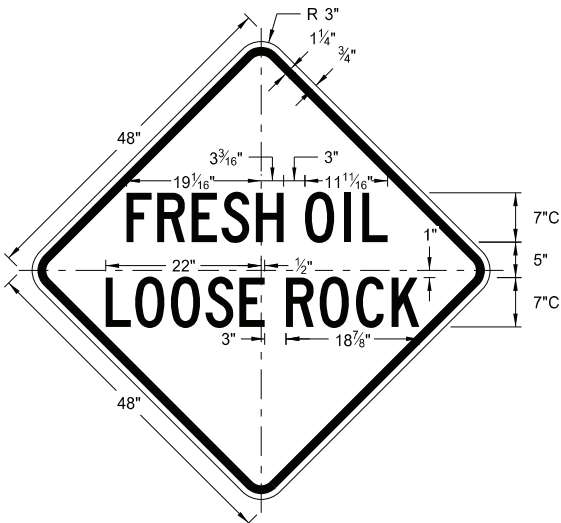


W22-8-48
Legend: black (non-refl)
Background: orange

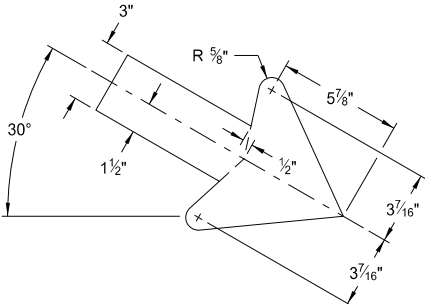

W16-7aP-18

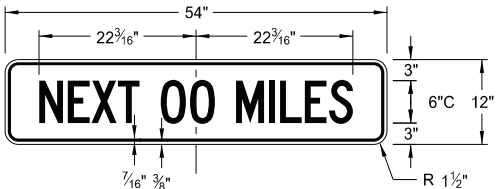

W20-52P-54
Legend: black (non-refl)
Background: orange

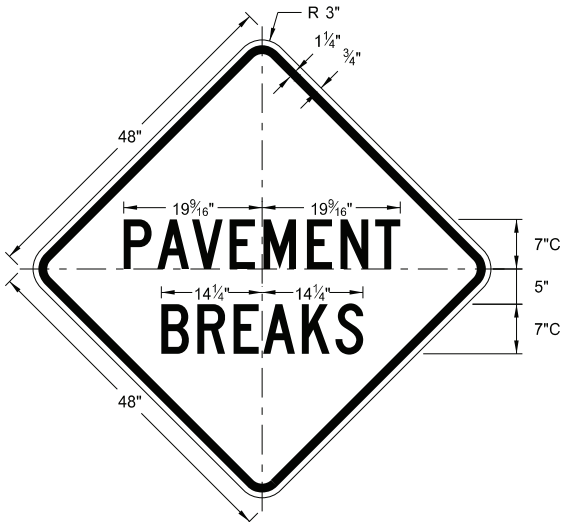


W21-52-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
5-31-18	
REVISIONS	
DATE	CHANGE
11-01-19	Added details for sign W16-7aP-18.
8-01-24	Electronic Stamp/Signature.




08/01/24

BARRICADE AND CHANNELIZING DEVICE DETAILS

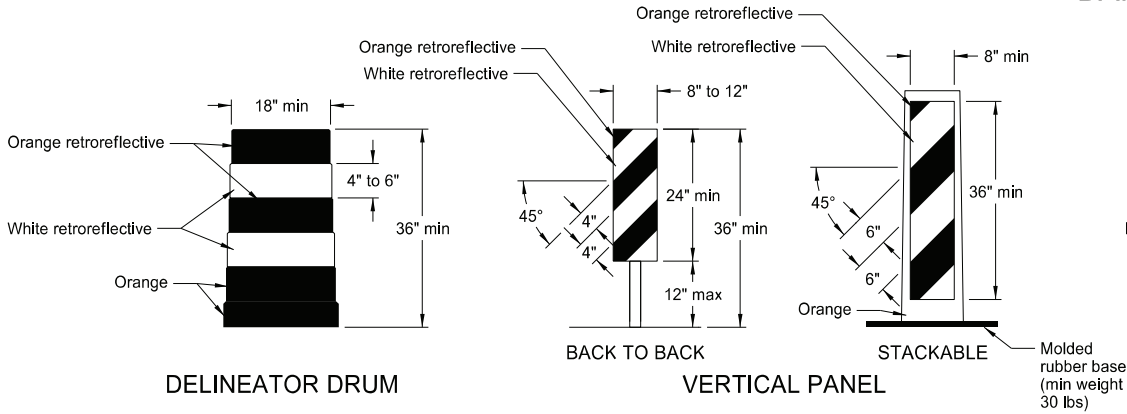


Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectORIZED spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.


Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

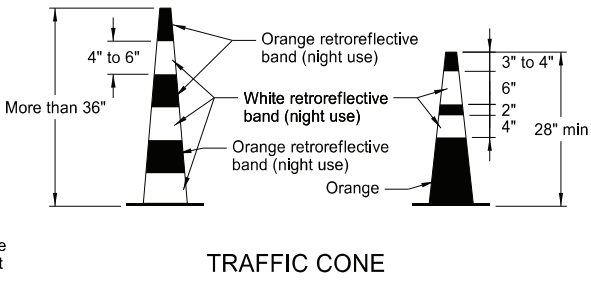


Provide retroreflectORIZATION of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectORIZED space between the orange and white stripes.



Provide retroreflectORIZATION of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

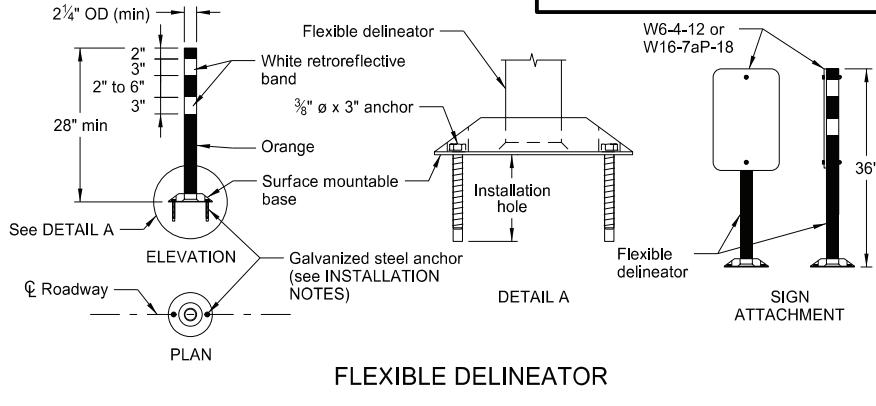

- INSTALLATION NOTES:
1. Drill installation holes to diameter and depth required by manufacturer's specifications.
 2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
 3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

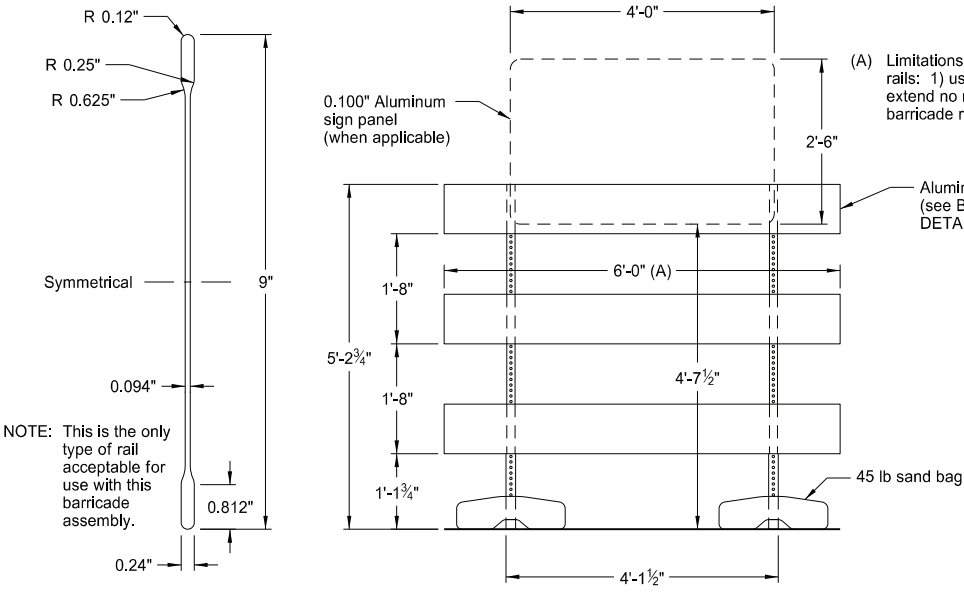


BARRICADE BLADE DETAIL


ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".

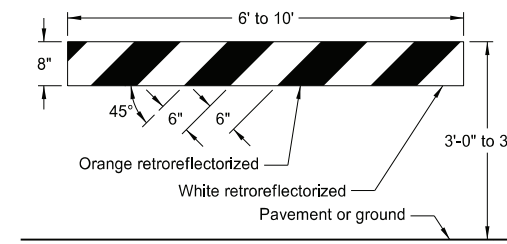


TYPE I BARRICADE

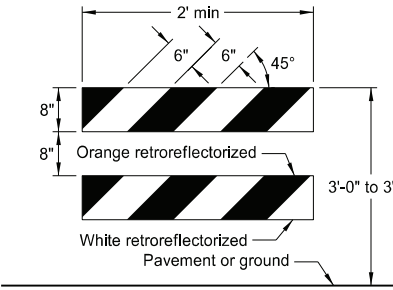


TYPE II BARRICADE

BARRICADE RAIL DETAILS

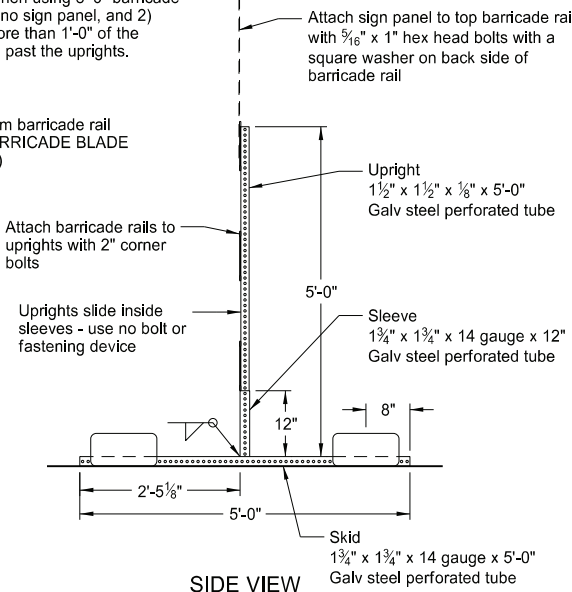


SIDE VIEW

TYPE III BARRICADE

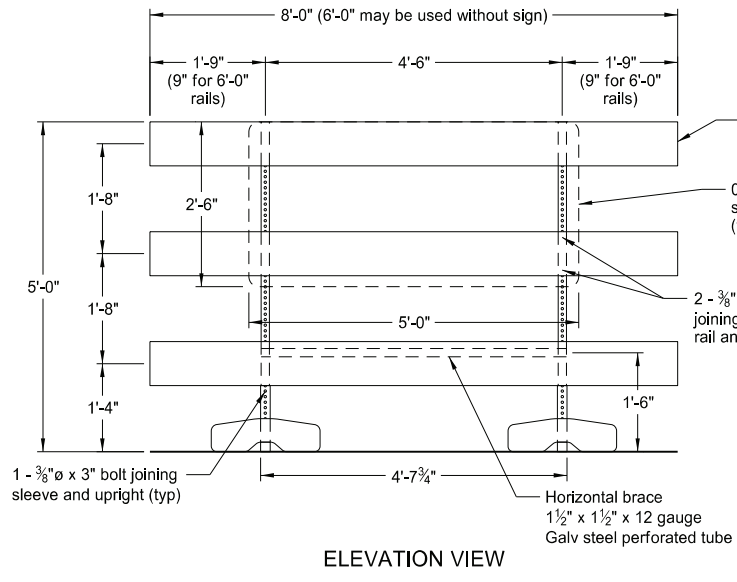

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

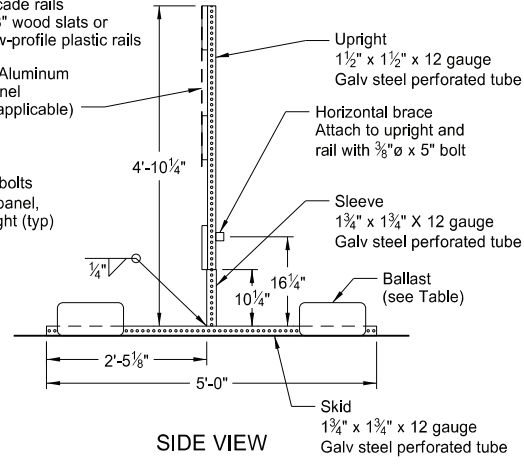


SIDE VIEW

MINIMUM BALLAST (For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags

Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

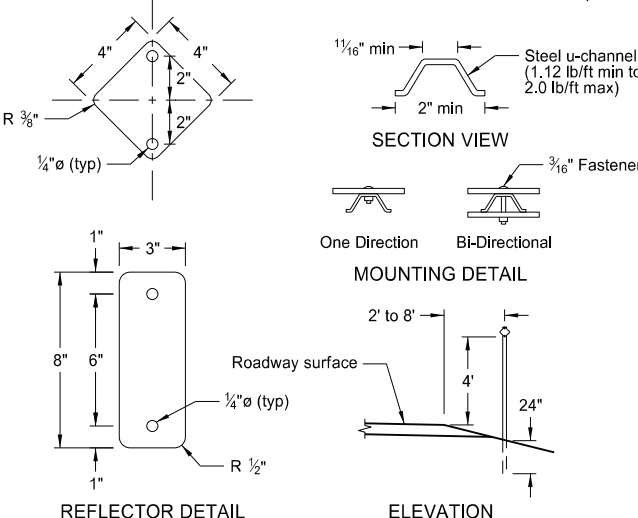

REFLECTOR DETAIL

ELEVATION


DELINEATORS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
11-01-19	Revised details for Flexible Delineator
8-01-24	Electronic Stamp/Signature



CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

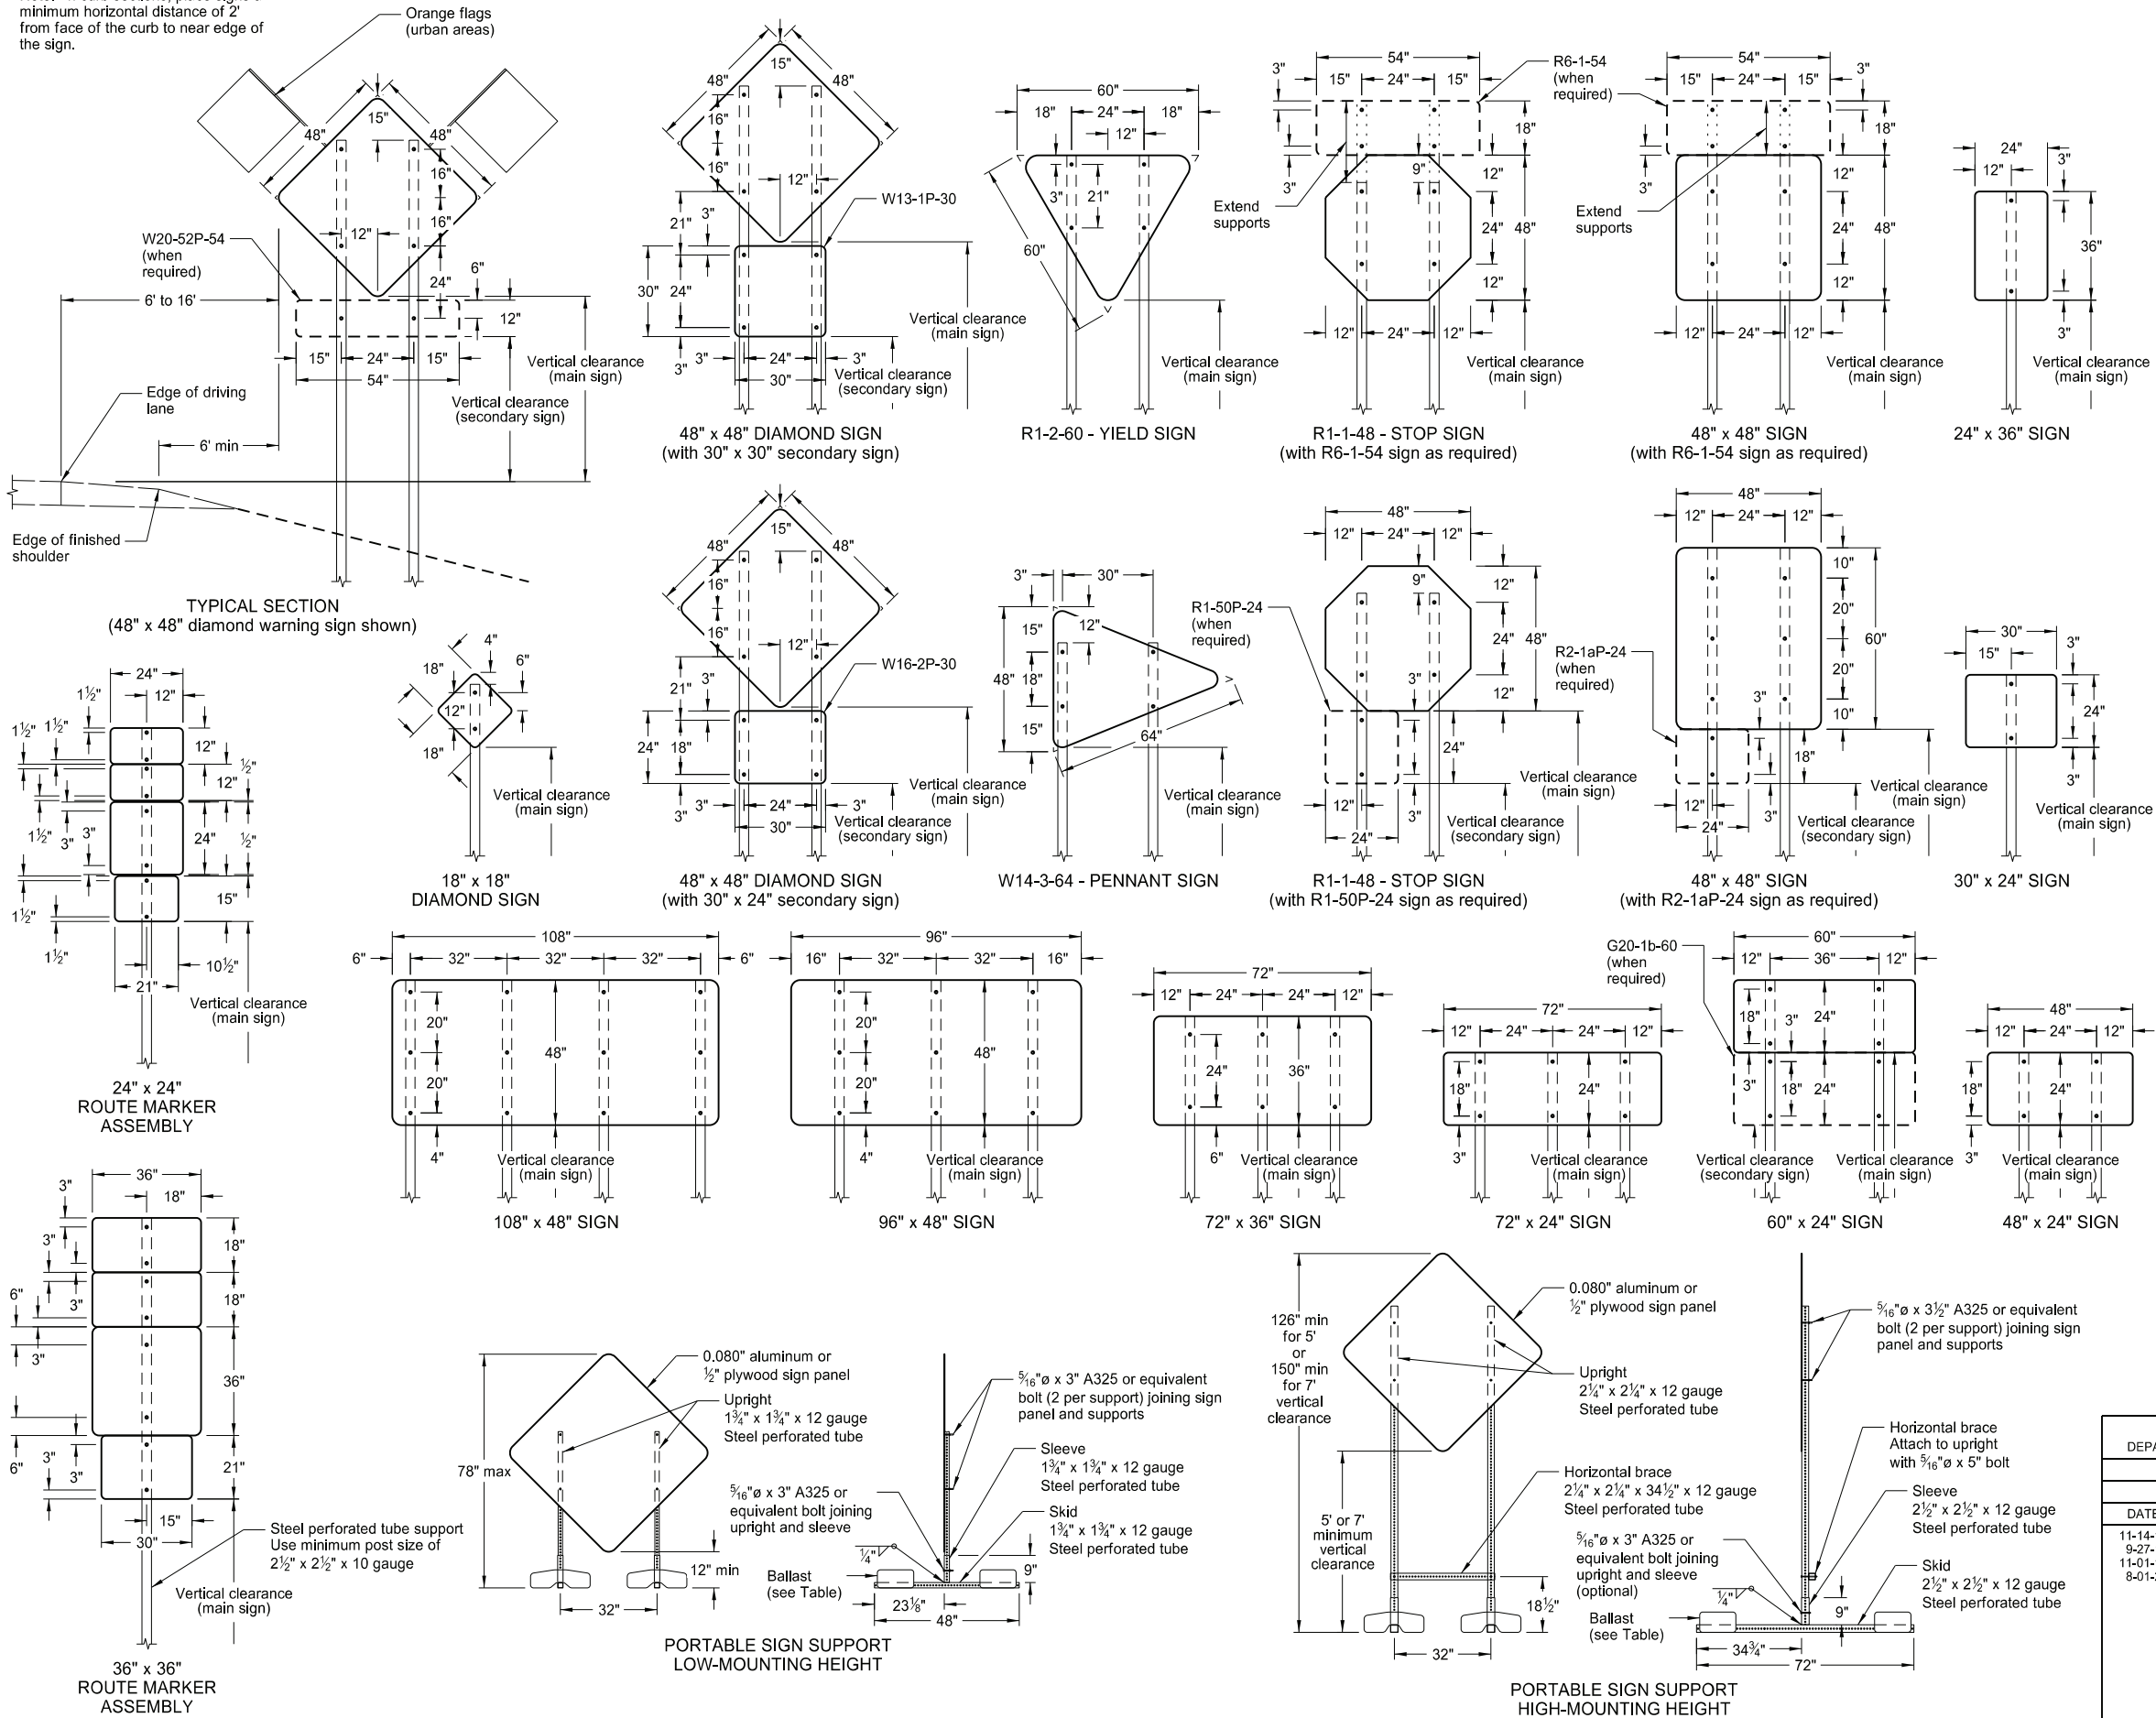

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.
2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅜" bolts.
3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)
4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of sklds.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail
8-01-24	Electronic Stamp/Signature



08/01/24

SIGN LAYOUT FOR ONE LANE CLOSURE TWO LANE ROADWAY

D-704-17

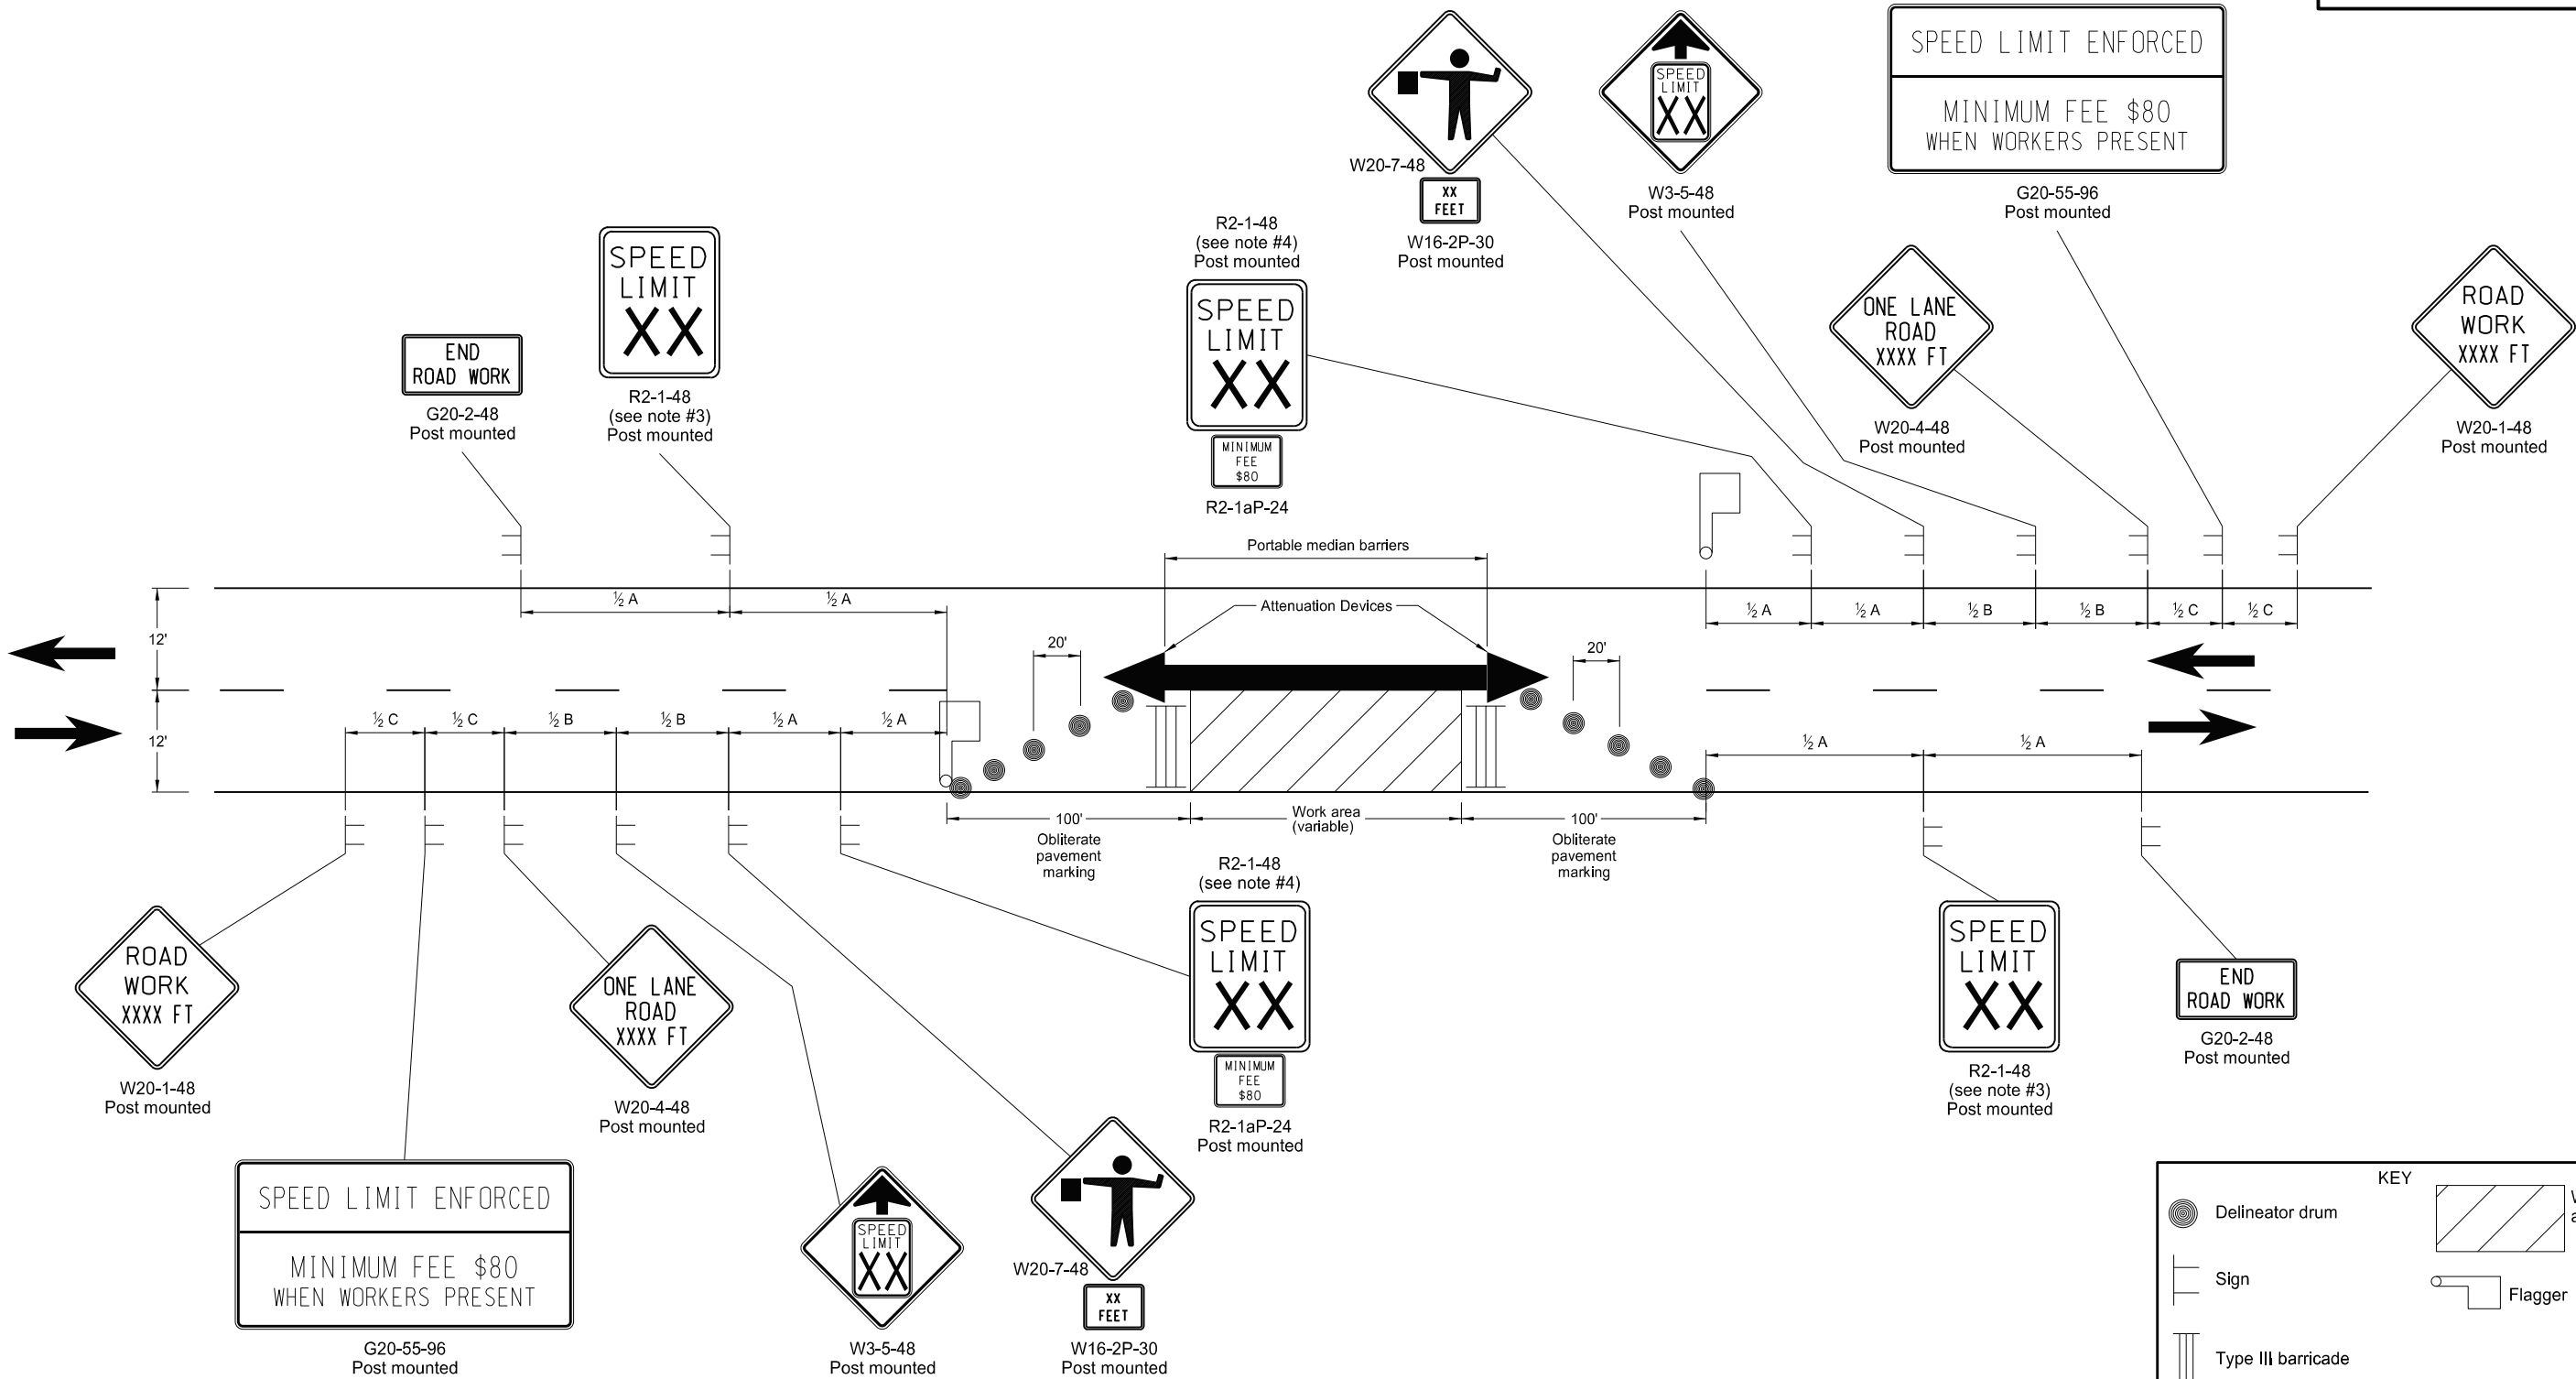

Notes:

1. Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
2. Remove existing striping as required. Use back to back delineators when inslope is 4:1 or flatter and roadway alignment is visible to approaching vehicles. Place back to back vertical panels when roadways have steep slopes and alignment is not visible to approaching traffic.
3. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
4. Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at 1/2B.
5. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
6. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
7. Cover existing speed limit signs within a reduced speed zone.
8. Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or if work is less than 15 days.
9. Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.


ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (65 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Note update & sign numbers
11-01-19	Removed signs & revised note
12-08-21	Switched order of Road Work XXXX and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
08-21-24	Pvmt Mkg Width & Med Barrier.




08/21/24

MISCELLANEOUS SIGN LAYOUTS

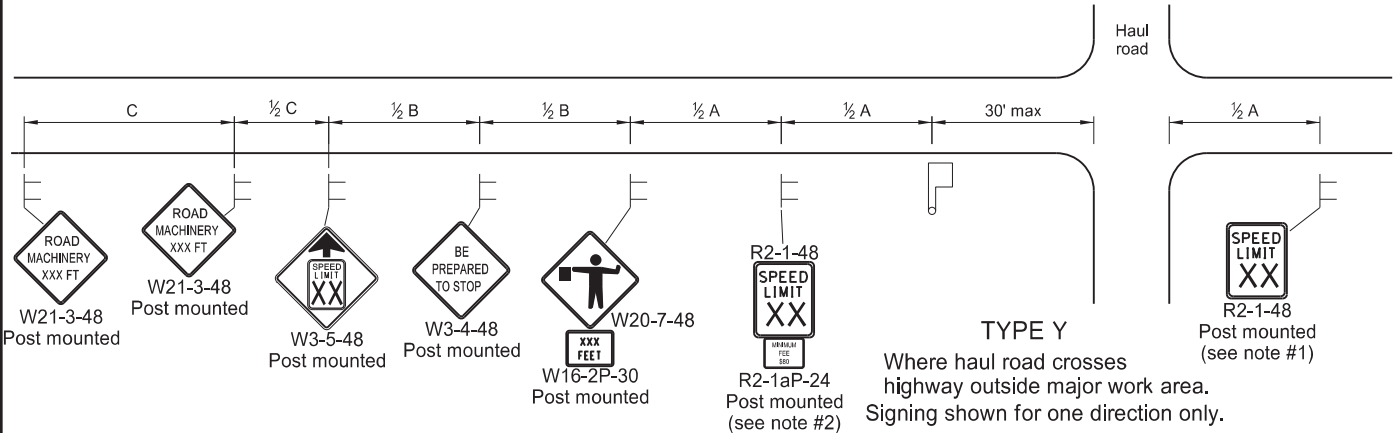


TYPE Y
Where haul road crosses
highway outside major work area.
Signing shown for one direction only.


TYPE Z
Where speed zone is needed
Signing shown for one direction only.

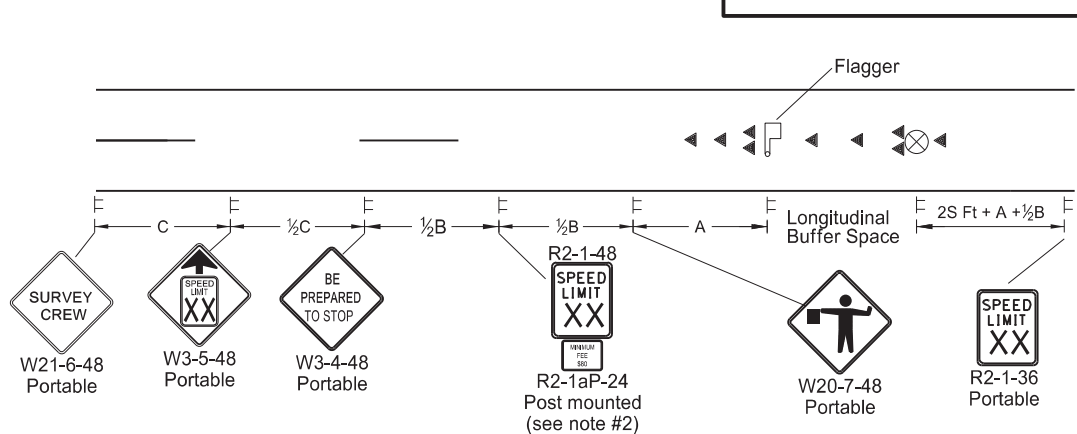


TYPE AA
Where survey crew is used
Signing shown for one direction only.

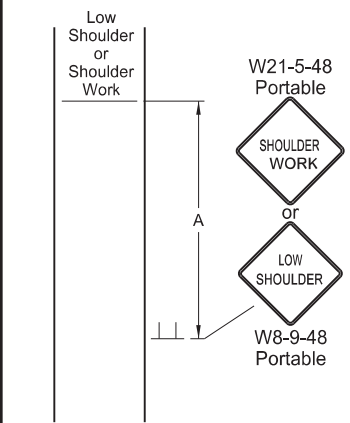


TYPE BB
Within major work area
where sign conditions exist

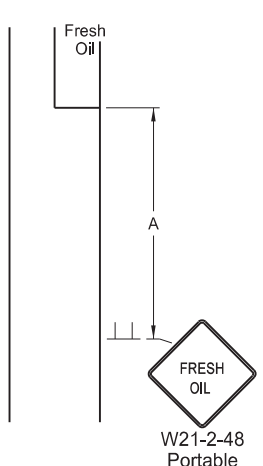


TYPE CC
Where sign conditions exist

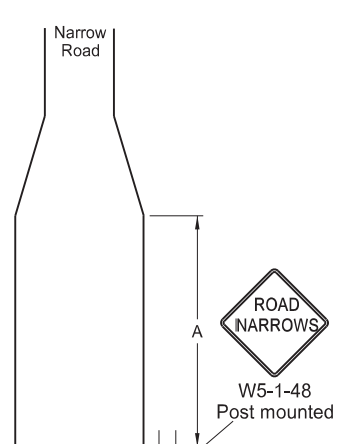


TYPE DD
Where sign conditions exist




TYPE EE
Where sign conditions exist

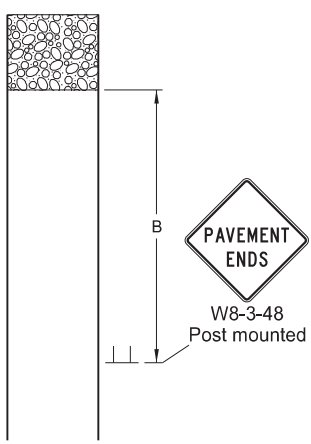

TYPE FF
Where sign conditions exist
Signing shown for one direction only.

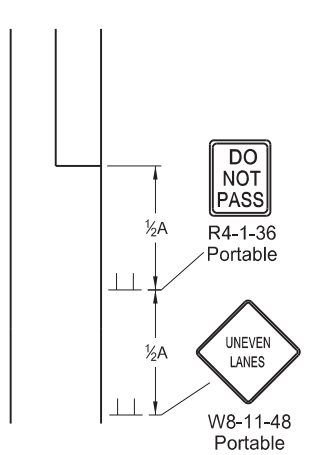

TYPE GG
Where elevation difference
exists between lanes

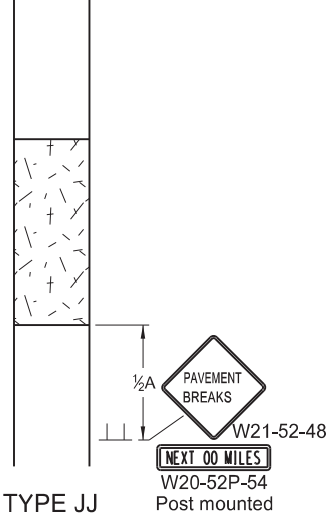

TYPE JJ
For break in pavement.
Install signs when conditions exist
and remove when not applicable.
Signing shown for one direction only.

KEY


Flagger

Sign

Cones

Survey Equipment

S = Numerical value of speed limit or 85th percentile.

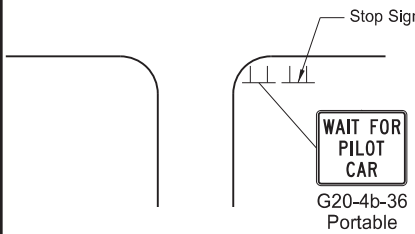

TYPE KK
At major intersections
within pilot car control area

- Notes
1. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
 2. Determine reduced speed limit based on in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
 3. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
 4. Cover existing speed limit signs within reduced speed zones.
 5. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
 6. Sign G20-55-96 is not required if this standard is part of other traffic control layouts, or work is less than 15 days.
 7. When pilot car operation is used, place sign G20-4b-36 "Wait For Pilot Car" at major intersections within pilot car control area.
 8. Recommend 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.
 9. Layouts shown for one direction only.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
8-17-17	Added speed limit signs. Updated notes & sign numbers.
11-01-19	Revised note 5 & sign numbers.
2-23-23	Revised distance & removed signs.



02/23/23

PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

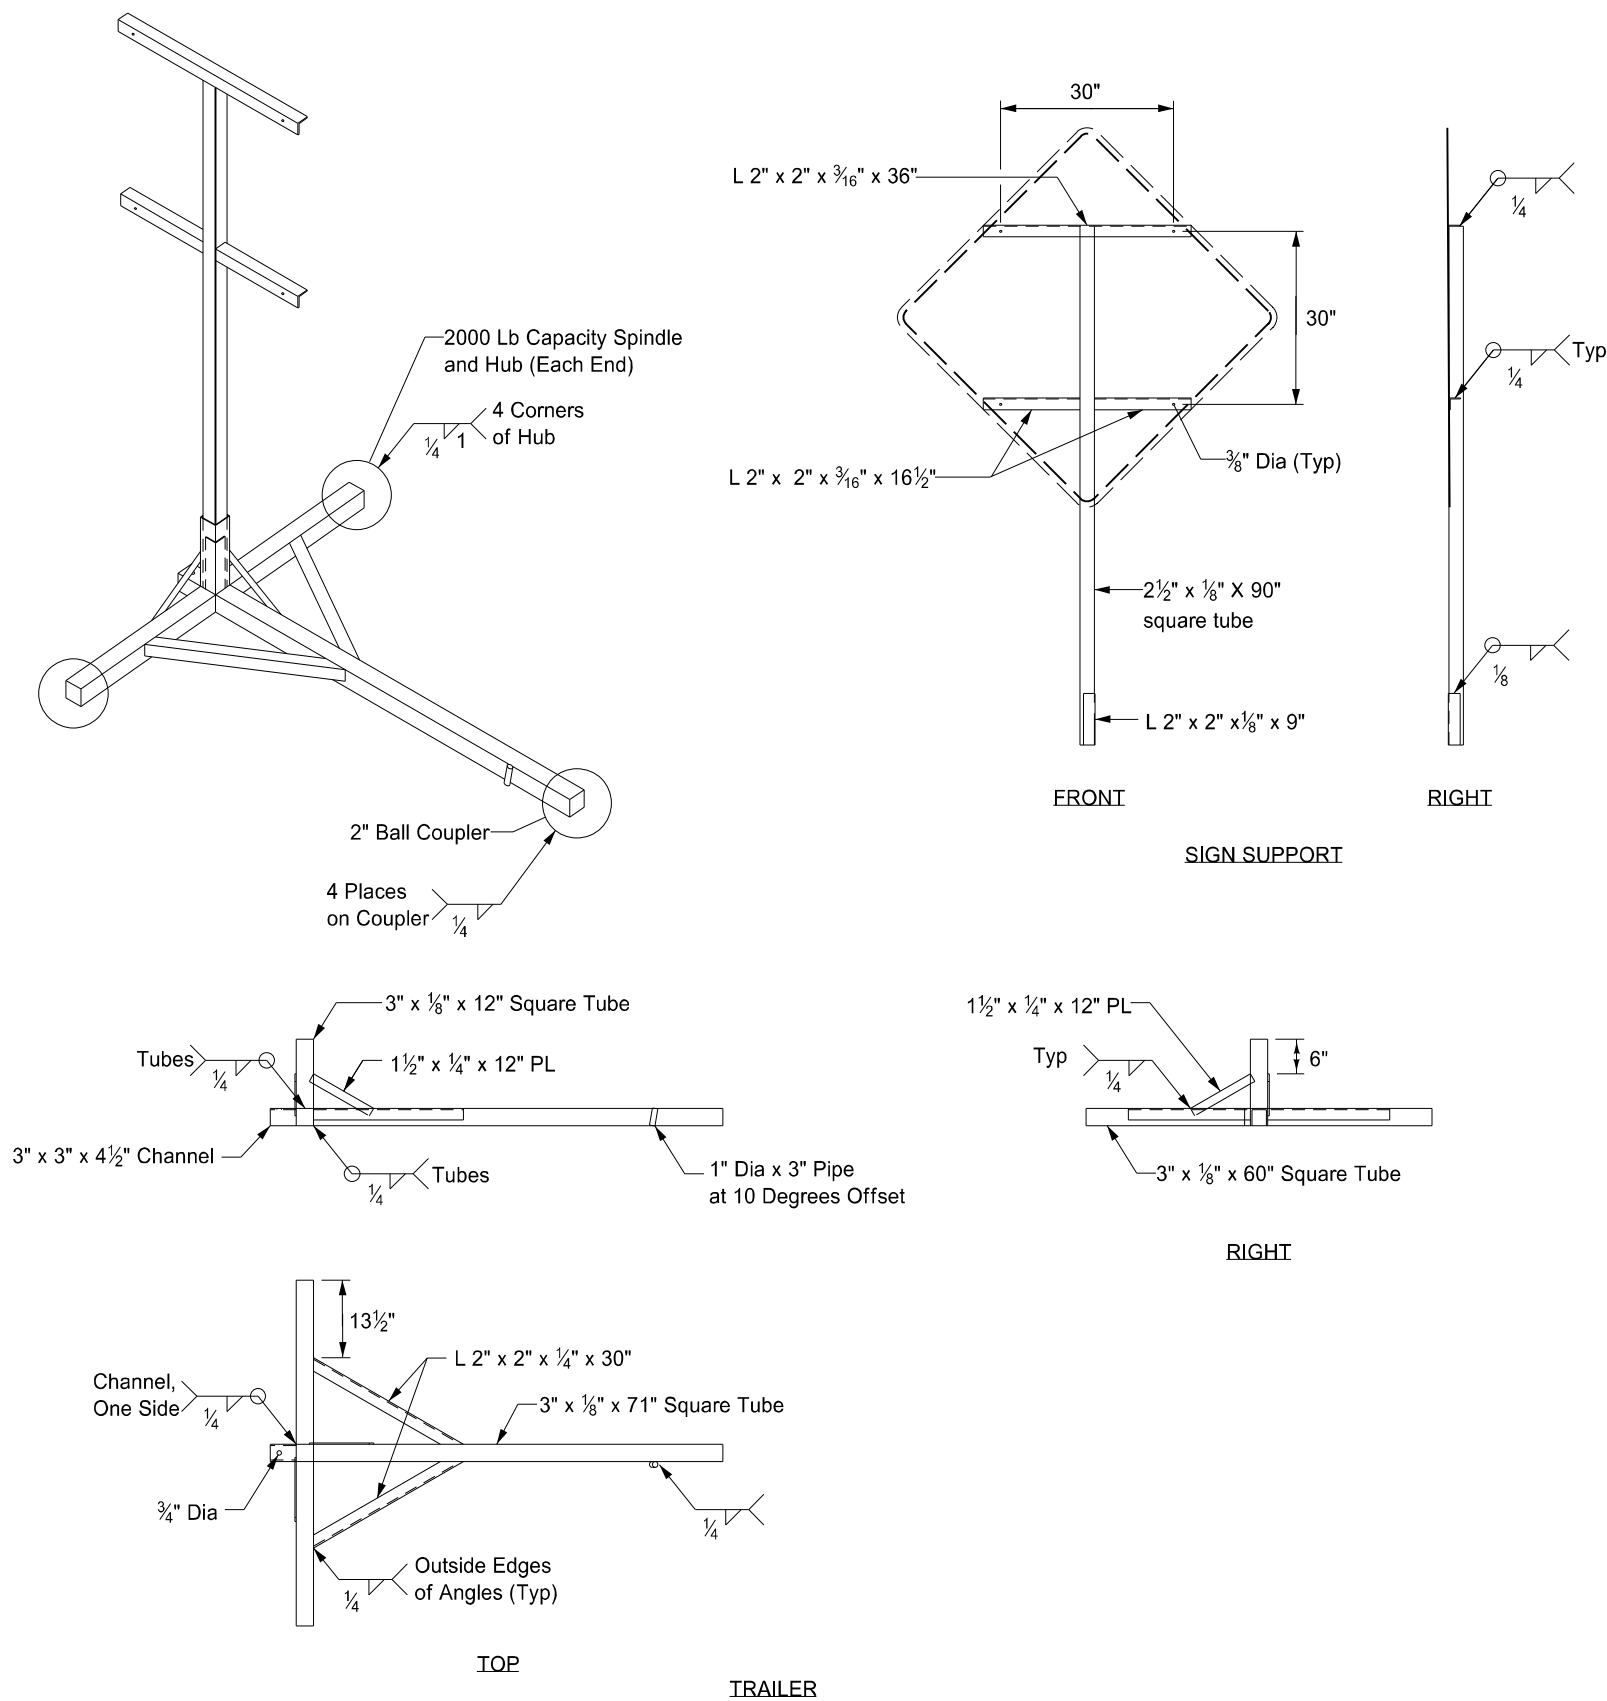


Notes:

- 1. Maximum 250 pound weight of assembly.
- 2. Use a 14" wheel and tire.
- 3. Use no automotive and equipment axle assemblies for trailer-mounted sign supports.
- 4. Other NCHRP 350 or MASH crash tested assemblies are acceptable.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE
12/02/2020	Updated Note to active voice.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 02 2020


EROSION AND SILTATION CONTROLS
MEDIAN OR DITCH INLET PROTECTION

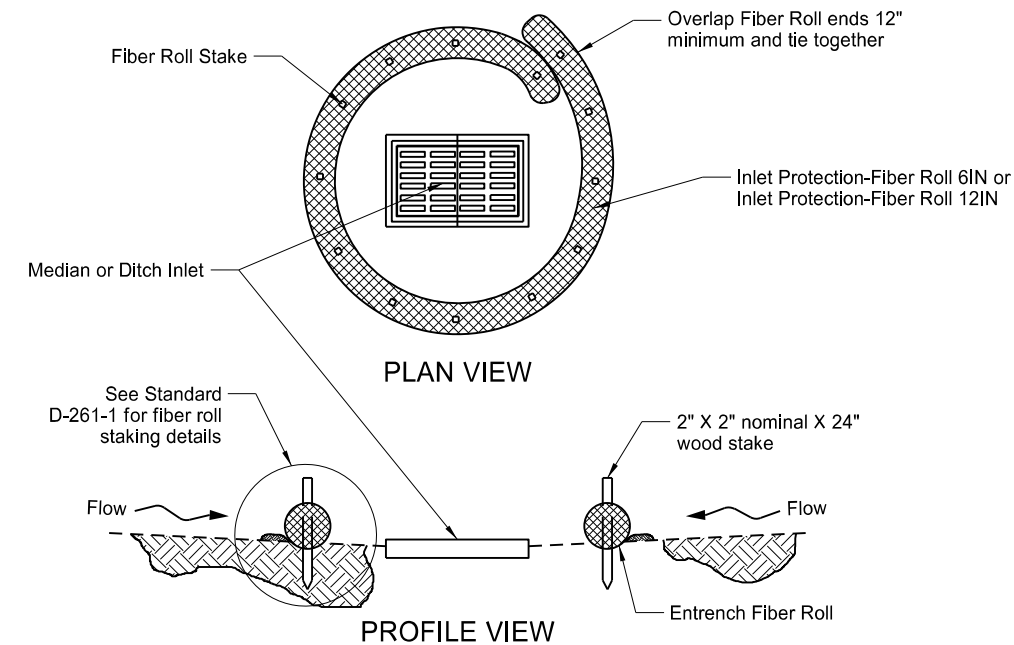


FIBER ROLL PROTECTION
(MEDIAN OR DITCH INLET)

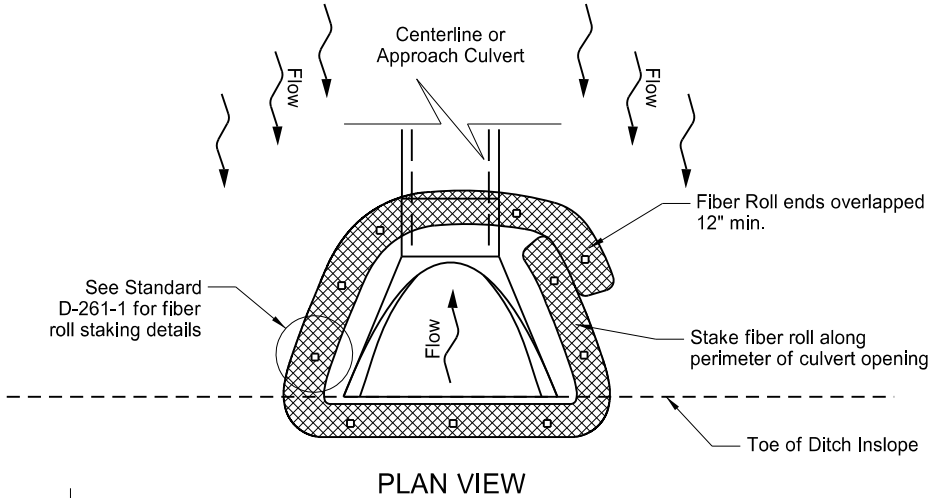


FIBER ROLL PROTECTION
(INLET OF CULVERT)

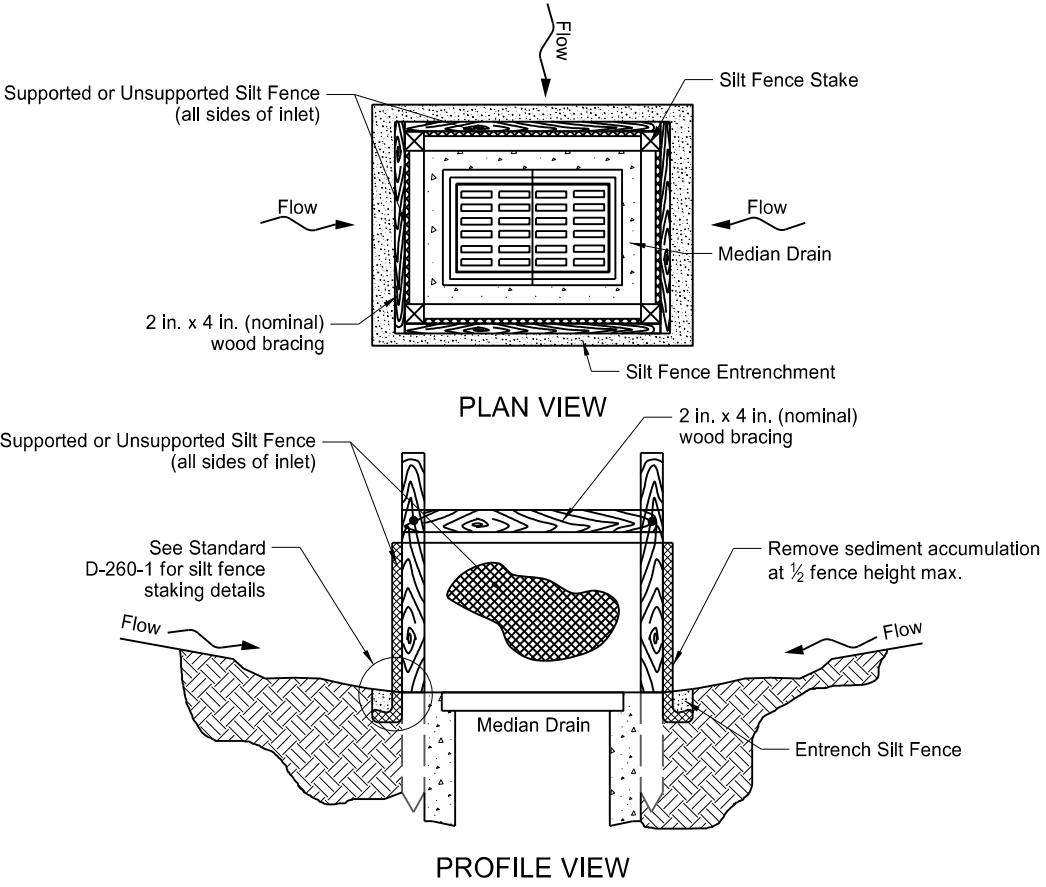


SILT FENCE PROTECTION
(MEDIAN OR DITCH INLET)

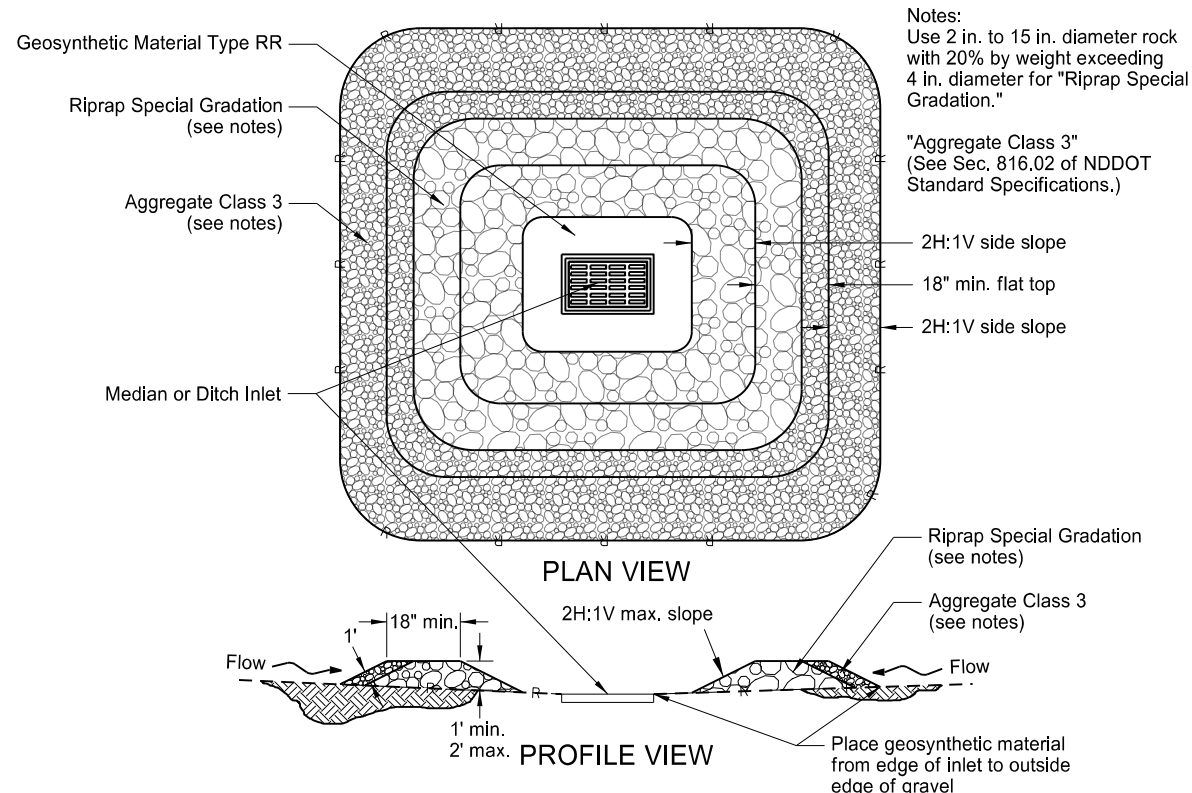

GRAVEL INLET PROTECTION
(MEDIAN OR DITCH INLET)

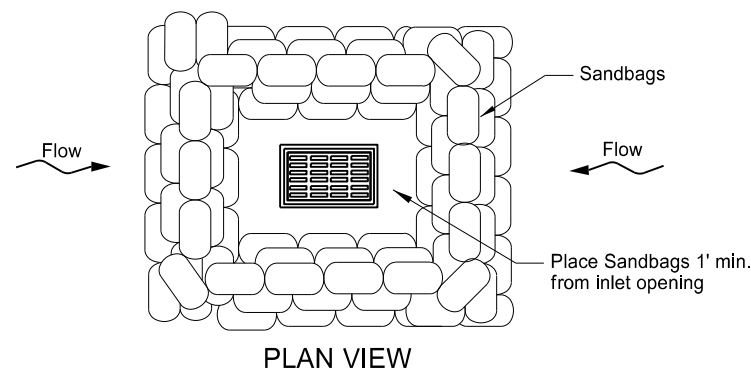

SANDBAG PROTECTION
(LOW POINT)

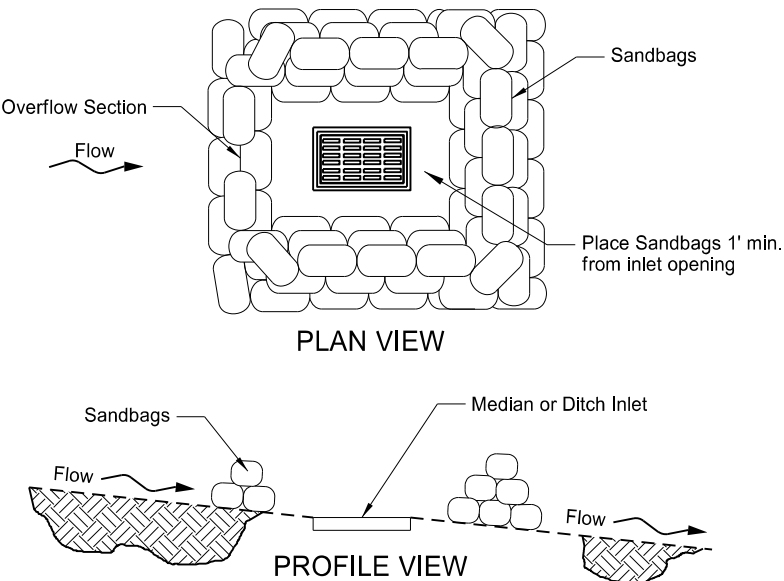


SANDBAG PROTECTION
(ON SLOPE)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Updated reference to standard drawing number for fiber roll staking details.
10-01-14	Updated reference to standard drawing number for silt fence.
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 8-27-19 and the original document is stored at the
North Dakota Department
of Transportation


D-714-4









- * These sizes have 0.109" sides and 0.138" center panels.
- * * Pipe diameter is equal to dimension "D" of end section.

Manufacturers tolerances of above dimensions will be allowed.

Splices to be the lap riveted type.

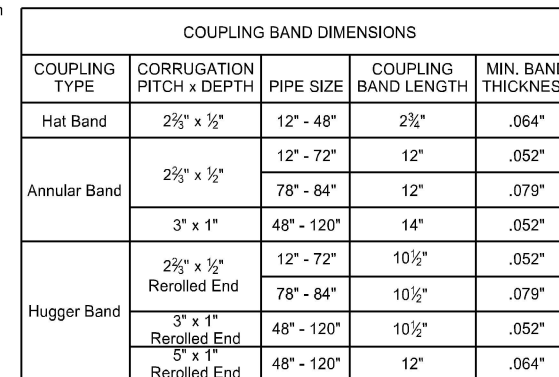


- NOTES:
1. Pipes and connecting bands shall conform to applicable sections of NDDOT Standard Specifications and to AASHTO M-36.
 2. Top edge of all end sections to have rolled edges for reinforcement (see Section A-A). The reinforced edges are to be supplemented with 2" x 2" x 1/4" galv. angle for 60" through 72" dia. and 2 1/2" x 2 1/2" x 1/4" galv. angle for 78" and 84" dia.. Angles to be attached by galv. 3/8" dia. bolts and nuts. Angles are to extend from pipe to the corner wing bend.
 3. Elongated pipes shall be factory preformed so that the vertical diameter shall be 5% greater and the horizontal diameter 5% less than a circular pipe.
 4. Coupling bands shall be two-piece for pipes larger than 36" as shown in Section C-C & D-D details. For pipes 36" and smaller, a one-piece band is acceptable.
 5. 1/2" x 8" bolts may be used as a substitute for the 1/2" x 6" bolts shown in the details.
 6. Coupling bands wider than 14" may be used if a minimum of four 1/2" bolts with maximum spacing of 5 1/2" are used for the connection.
 7. Length of spot welds shall be minimum 1/2".

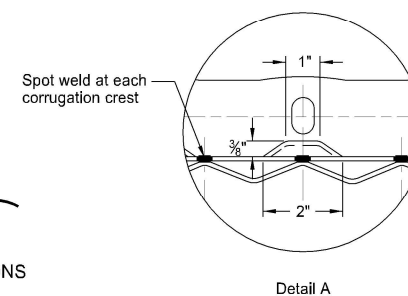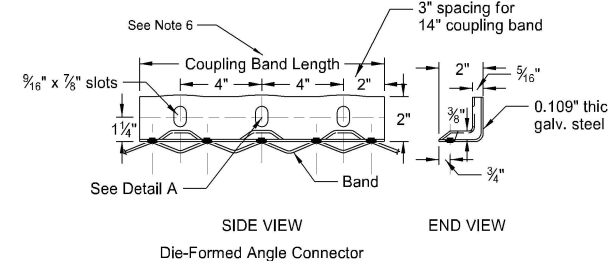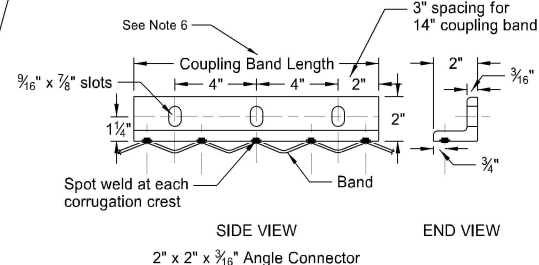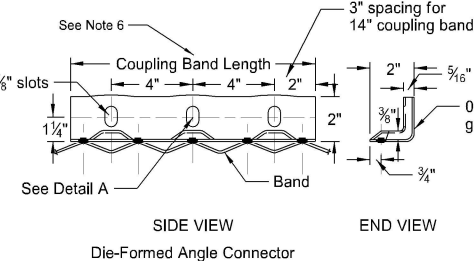


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
08-16-13	
REVISIONS	
DATE	CHANGE
01-07-14	End Section Plan View
02-27-14	3" x 1" Corrugation Detail
09-18-19	Added Perspective View Detail
09-23-22	Galvanized Thickness Table




PIPE INSTALLATION DETAIL FOR LONGITUDINAL MAINLINE PIPE
OR PIPE NOT UNDER THE ROADWAY

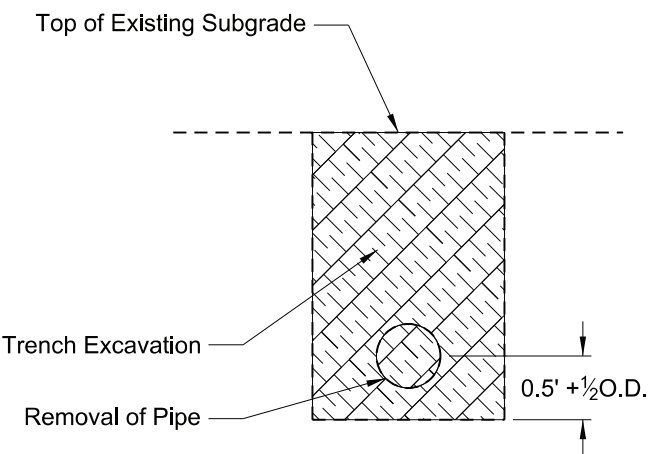


EXCAVATION DETAIL A

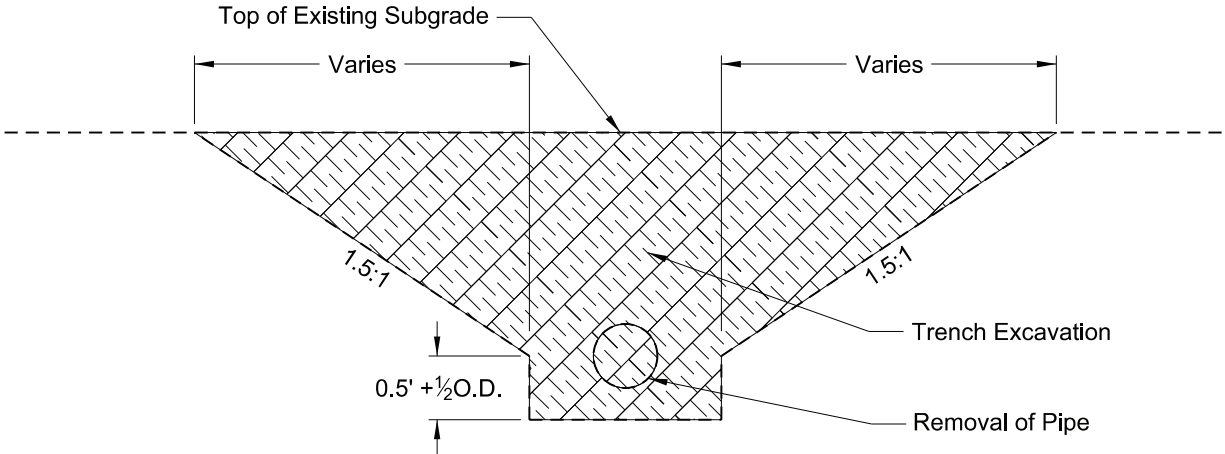

EXCAVATION DETAIL B

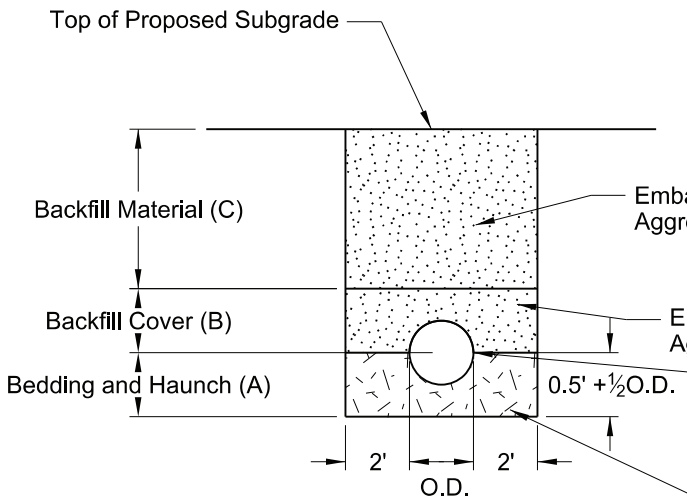

BACKFILL DETAIL A

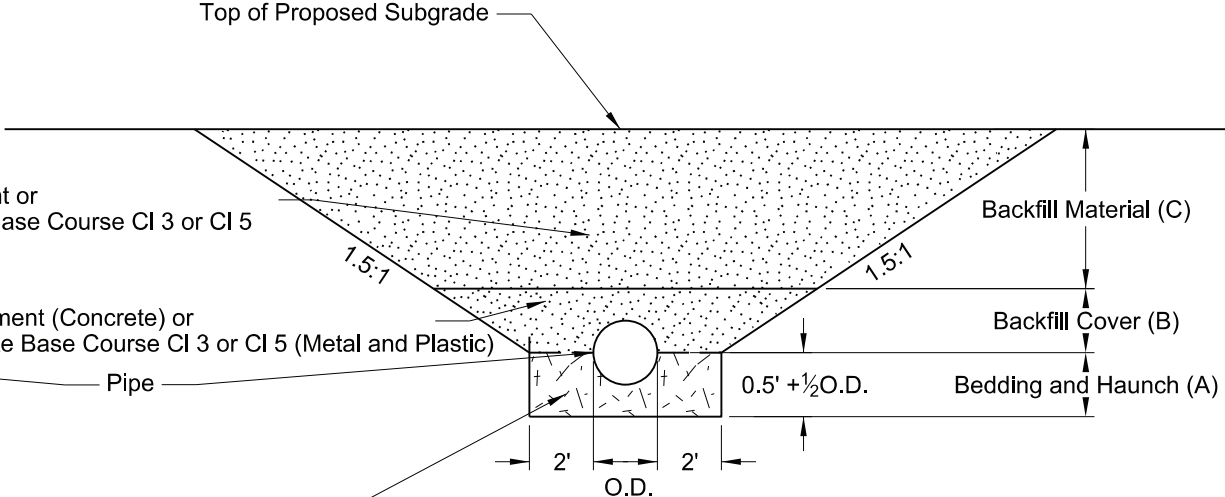

BACKFILL DETAIL B

Pay Items
1) Pipe*
2) Removal of Pipe (if required)

*Included in Pipe Pay Item
1) Pipe
2) Trench excavation
3) Aggregate base course CI 3 or CI 5
4) Embankment

NOTES:
1) This drawing does not apply to pipes in approaches.
2) It is the contractor's option to select Detail A or B.
3) Embankment may be either Borrow Excavation or Common Excavation - Type A

Bedding and Haunch (A)
Pipes Not Under Roadway = 0.5 O.D. + 0.5 Feet
Pipes Under the Roadway = 0.5 O.D. + 0.5 Feet
Backfill Cover (B)
Concrete Pipe = 0.5 O.D.
Metal and Plastic = 0.5 O.D. + 1 Foot
Backfill Material (C)
Top of Pipe 4 Feet or Less Below the Top of Proposed Subgrade = Aggregate Base Course CI3 or CI 5
Top of Pipe Greater than 4 Feet Below the Top of Proposed Subgrade = Common Excavation - Type A
Pipe Not Under Roadway = Common Excavation - Type B

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
7-26-13	
REVISIONS	
DATE	CHANGE
10-15-13	Label Formatting
1-21-15	Nomenclature
12-10-15	Added Plastic Pipe
5-27-20	Changed bedding depth and updated table

