

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	NH-9-999(543)	24559	1	1



NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

NH-9-999(543)

Billings, Bowman, Burke, Dickey, McKenzie,
Wells, Cavalier, Ramsey, and Richland Counties
Statewide
WIM Calibration

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	7/1/24
Supplemental Specifications	NONE

PROJECT NUMBER \ DESCRIPTION NET MILES GROSS MILES

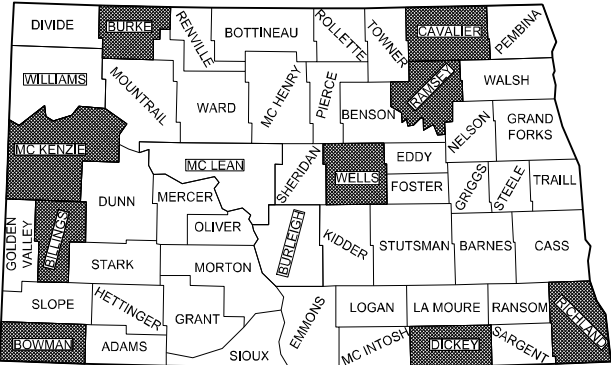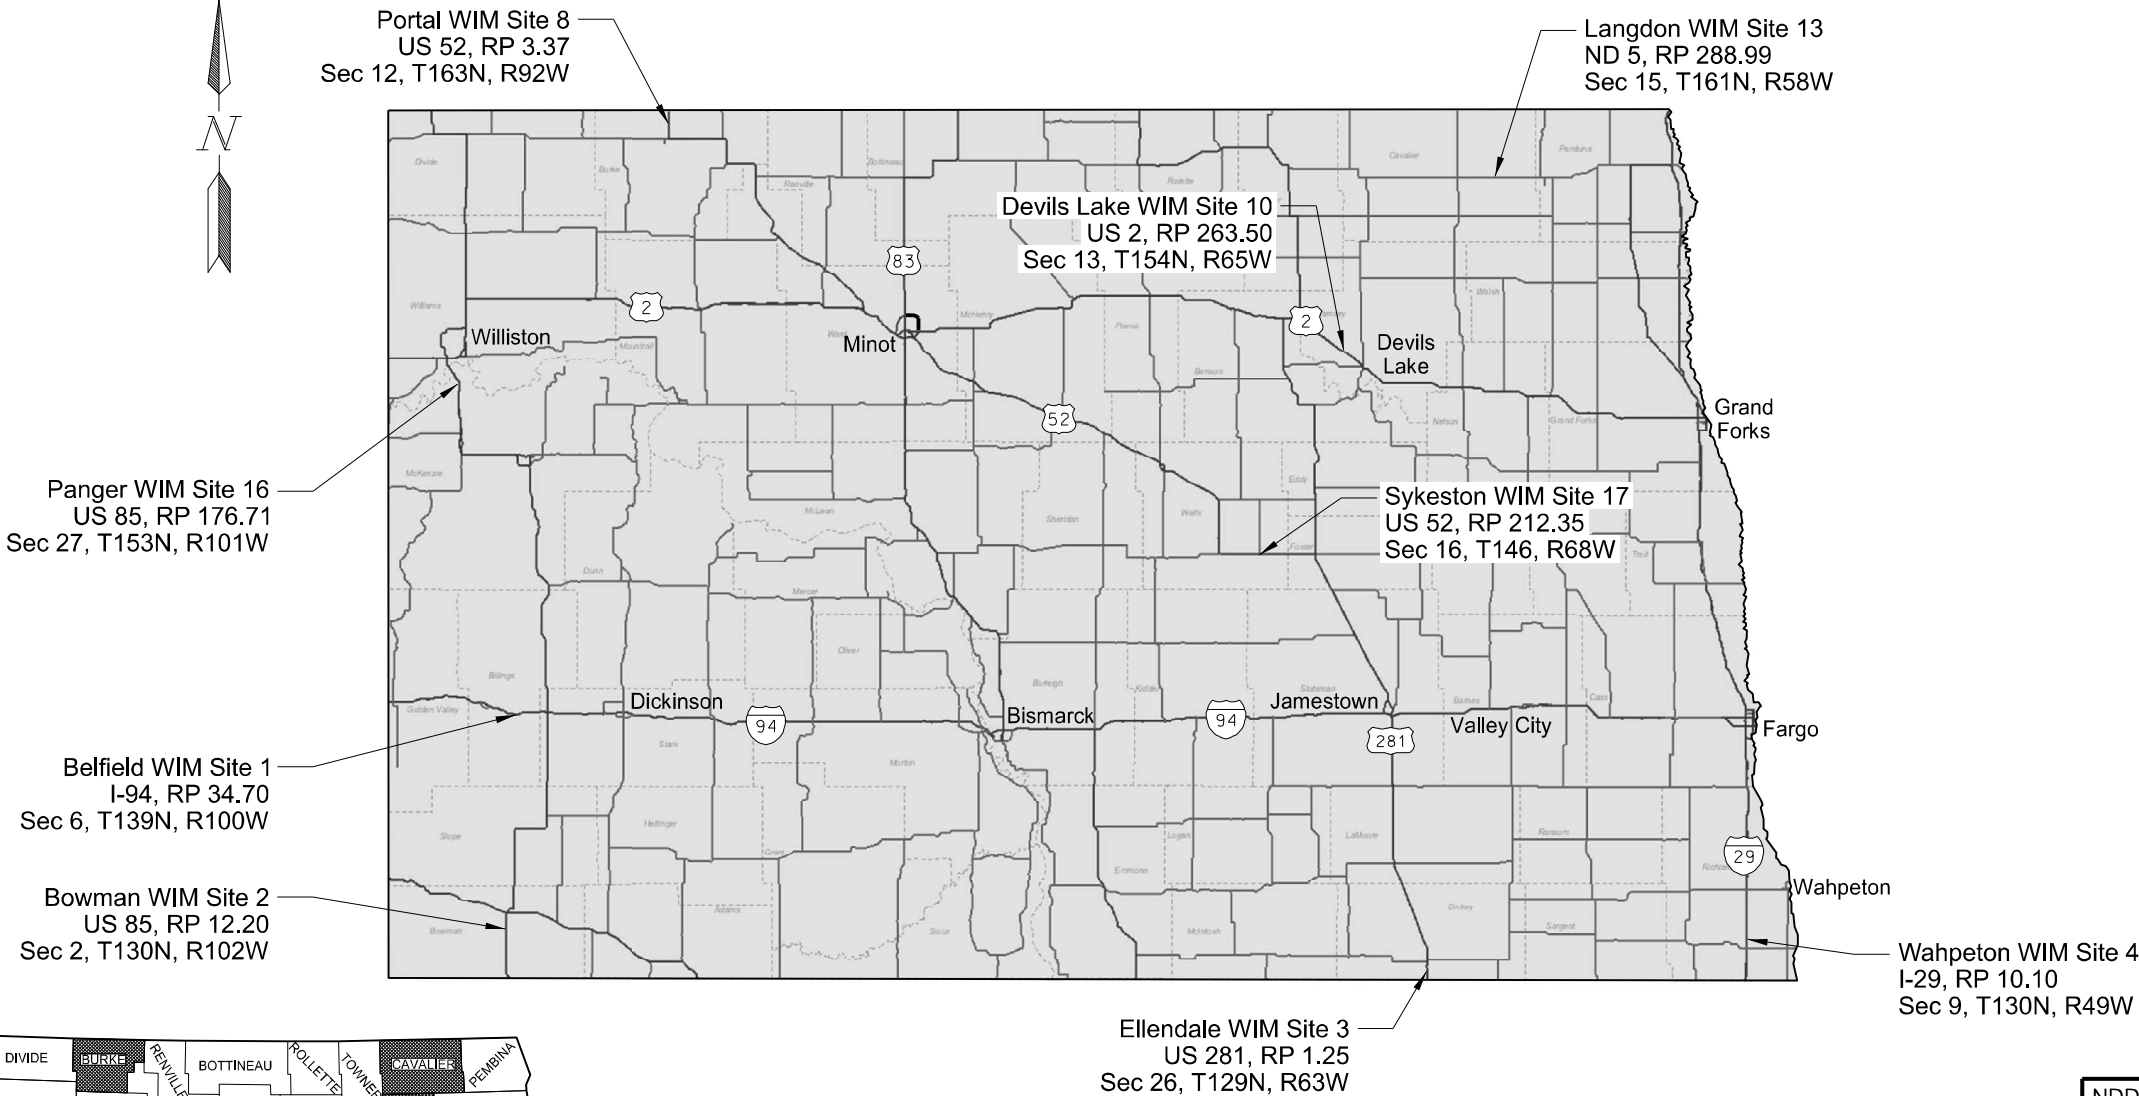

STATE COUNTY MAP

DESIGNER Samantha Hettinger
DESIGNER
DESIGNER

ND DEPARTMENT OF TRANSPORTATION OFFICE OF PROJECT DEVELOPMENT Kirk Hoff 03/14/25	
---	--

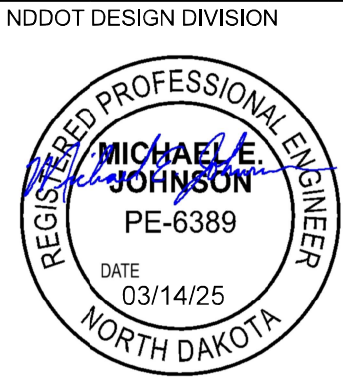


TABLE OF CONTENTS								
						STATE	PROJECT NO.	SECTION NO.
						ND	1	2
PLAN SECTIONS					LIST OF STANDARD DRAWINGS			
Section	Page(s)	Description	Number	Description				
1	1	Title Sheet	D-101-2, 3,4	NDDOT Abbreviations				
2	1	Table of Contents	D-704-7,	Breakaway Systems For Construction Zone Signs - Perforated Tube				
6	1	Notes	8,9,10,13,14,24,50					
8	1	Quantities						
160	1	ITS						

NOTES			STATE	PROJECT NO.	SECTION NO.	SHEET NO.
			ND	NH-9-999(543)	6	1

100-P01

COORDINATION OF PROJECTS: The following projects are planned for the 2025 construction season near the project area:

Project H-3-005(014)256, PCN 24287 is located on ND 5 from JCT 20 to Langdon. The project includes a chip seal for a total length of 21.7 miles and is near Site 13.

Project NH-3-052(059)198, PCN 24504 is located on US 52-W from JCT ND 200 to E JCT 200. The project includes a chip seal for a total length of 23.992 miles and is near Site 17.

772-P01

TRAFFIC CONTROL DEVICES: For all work past the edge of the shoulder, provide advance “Road Work Ahead” signs according to D-704-24 Type S.

If the contractor chooses to park vehicles on the shoulder, provide traffic control according to these layouts at the contractor’s expense:

- D-704-24 Type R shoulder work on two lane roadways,
- D-704-24 Type HH shoulder closure on interstate, concrete barriers are not needed.

Notify DOT District Staff prior to setting up work zone traffic control shoulder closures. Provide notification 24 hours in advance of placing signs and devices.

Include all costs associated with this work in the price bid for “Revise Virtual Weigh in Motion System”.

772-P02

WIM CALIBRATION: Calibrate the Weigh in Motion (WIM) sites according to the following specifications. Before calibration complete the following items:

- Update the iSINC interface modules including LSM, SGSM, KSM, QSM with the latest firmware.
- Test and verify control and sequence of operational interface components for VWS web display if applicable.
- Test response levels and signal levels of in-road instrumentation using iSINC signal capture.

Have the Vendor on site during the calibration of all sites. Identify the Vendor representatives at the preconstruction conference or before starting work.

Weight Testing. Secure and pay expenses to provide the test truck used for calibrating the WIM system.

Provide a tractor unit for the test truck that meets the following:

- Steering axle with a weight between 10,000 lbs and 12,000 lbs,
- Tandem drive wheels with a weight between 32,000 and 34,000 lbs, and
- The remaining weight of 34,000 lbs must be loaded equally all over the entire length of the trailer, and
- The calibration vehicle must be capable of 80,000 lbs gross vehicle weight (GVW).

Supply a trailer that meets the following:

- Trailer manufactured within the last 5 years at time of bid,
- Flat bed, combo front deck, or step trailer. No Lowboy trailers,
- Trailer length of 48 to 53 feet,
- Spacing between the tandem axles is 11 feet (132 inches) or less, and

- Capable of receiving tie downs.

Provide the test truck unit that meets the following:

- Class 9 tractor trailer combination,
- Current DOT Inspection Certification,
- Air ride suspension, and
- Tires that are not cupped, worn, of different tread type or size, out of round or any other defects that will affect the calibration of the sites when loaded. If the tires need to be replaced, replace the tires at no cost to the Department.

Supply the weights for the weight testing. Load the trailer to evenly distribute the load over both the tractor and trailer. Confirm that the load is equally distributed so that the rear axles do not bounce on the roadway. Secure the load to the trailer and confirm that the load will not shift during testing.

Provide a photo of the loaded truck to the Engineer before calibration begins.

Provide the test truck weight ticket from an independently certified scale to the Engineer. Obtain the GVW and individual axle weights. North Dakota Highway Patrol (NDHP) can be available to provide individual axle weights (both left and right sides). The Engineer will need 48-hour notice to have NDHP provide the axle weights.

Drive the test truck 15 times over each WIM lane to calibrate at different speeds as recommended by International Road Dynamics (IRD).

Additional runs are required if the measured weight deviates more than 10% from the mean within a speed range.

Calculate the deviation from the static weight as a percent and determine the new overall accuracy.

Using the test vehicle, verify that accuracy of the system to Table 1 for 95% of the time.

TABLE 1	
Accuracy	Load
± 6.0%	Gross
± 10.0%	Axle Group Load
± 15.0%	Axle Load

Speed Testing. The Engineer or NDHP may check the speed recorded by the system to verify that 90% of the vehicle speeds collected are within ± 1 mph of the actual speed.

Axle Spacing Testing. Conduct the test runs concurrently with the weight testing. Ensure the spacing between axles, recorded by WIM equipment, will be within ± 0.5 ft.

Each site no matter how many lanes or sensors is considered a single site.

REGISTERED PROFESSIONAL ENGINEER

SARA A. CAHLIN

PE-8397

DATE 03/14/25

NORTH DAKOTA



NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-9-999(543)	6	2

After Calibration is completed. Contact Phil Thomas and confirm the site is operational after the calibration is completed.

Phil Thomas
(701) 328-6973
pmthomas@nd.gov

Include all costs associated with this work in the price bid for “Revise Virtual Weigh in Motion System”.

772-P03 QUALIFIED TECHNICIAN: Provide an IRD WIM qualified technician on site to calibrate the system at each location. Ensure the technician is certified for the WIM equipment, calibration, and vehicle verification processes.

After calibration is complete and before leaving the site, ensure that the system is in the proper mode to collect and store the data, the system has been signed out of by the technician according to Quarterhill recommendation, and all components of the system are functioning appropriately.

Ensure all testing results are compiled, bound, and provided in a neat, clean, and orderly file. Electronic versions of all results may also be provided, ensure the information is compatible with Microsoft Excel Software.

Include all costs associated with this work in the price bid for “Revise Virtual Weigh in Motion System”.

772-P04 WARRANTY: Provide a warranty for the calibration and testing for each site. Provide the warranty certifications to the Engineer.

The warranty includes vehicle and weight verification and covers the first 30 calendar days following system acceptance by the Department.

Include all costs associated with this work in the price bid for “Revise Virtual Weigh in Motion System”.



ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-9-999(543)	8	1

SPEC	CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
-----	-----	-----	-----	-----	-----
103	0100	CONTRACT BOND	L SUM	1	1
702	0100	MOBILIZATION	L SUM	1	1
772	9112	REVISE VIRTUAL WEIGH IN MOTION SYSTEM	EA	9	9

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-9-999(529)	160	1

SPEC	CODE	BID ITEM	QTY	UNIT
772	9112	Revise Virtual Weigh In Motion System	9	EA

Quantities (A)					
Hwy	RP	Site Name	Calibration	Unit	Qty.
US 52	3.37	Portal	1 lane eastbound	EA	1
US 85	176.71	Panger	1 lane at Weigh Station	EA	1
US 2	263.50	Devils Lake	4 lanes	EA	1
I-94	34.70	Belfield	2 lanes eastbound	EA	1
US 85	12.20	Bowman	1 lane northbound	EA	1
US 281	1.25	Ellendale	2 lanes	EA	1
US 5	288.99	Langdon	2 lanes	EA	1
US 52	212.35	Sykeston	2 lanes	EA	1
I-29	10.10	Wahpeton	2 lanes northbound	EA	1

Revise Virtual Weigh in Motion System	EA	9
---------------------------------------	----	---

(A) The items shown in the table are for informational purposes only.

WIM Calibration Sites Chart



NDDOT ABBREVIATIONS

D-101-2

Galv	galvanized	Ln	lane	Obsc	obscure(d)	Qty	quantity
Gar	garage	Lg	large	Ocpd	occupied	Qtr	quarter
Gs L	gas line	Lat	latitude	Ocpy	occupy		
G Reg	gas line regulator	Lt	left	O/s	offset		
GMV	gas main valve	Lens	lenses	OC	on center	Rad or R	radius
G Mtr	gas meter	Lvl	level	C	one dimensional consolidation	RR	railroad
GSV	gas service valve	Lvng	leveling	OC	organic content	Rlwy	railway
GVP	gas vent pipe	Lht	light	Orig	original	Rsd	raised
GV	gate valve	LP	light pole	O To O	out to out	RC	rapid curing
Ga	gauge	Ltg	lighting	OD	outside diameter	Rec	record
Gov	government	Liq	liquid	OH	overhead	Rcy	recycle
Grd	graded/grade	LL	liquid limit			RAP	recycled asphalt pavement
Grnd	ground	Loc	location			RPCC	recycled portland cement concrete
GWM	ground water monitor	Long.	longitude	PMT	pad mounted transformer	Ref	reference
Gdrl	guardrail	Lp	loop	Pg	pages	R Mkr	reference marker
Gtr	gutter	LD	loop detector	Pntd	painted	RM	reference monument
		Lum	luminaire	Pr	pair	RP	reference point
				Pnl	panel	Refl	reflectorized
H Plg	H piling			Pk	park	RCB	reinforced concrete box
Hdwl	headwall	Mb	mailbox	PSD	passing sight distance	RCES	reinforced concrete end section
Ht	height	ML	main line	Pvmt	pavement	RCFES	reinforced concrete flared end section
Hel	helical	MH	manhole	Ped	pedestal	RCP	reinforced concrete pipe
HDPE	high density polyethylene	Mkd	marked	Ped	pedestrian	RCPS	reinforced concrete pipe sewer
HM	high mast	Mkr	marker	PPP	pedestrian pushbutton post	RCTES	reinforced concrete traversable end section
HP	high pressure	Mkg	marking	Pen.	penetration	Reinf	reinforcement
HPS	high pressure sodium	MA	mast arm	Perf	perforated	Res	reservation
HTCG	high tension cable guardrail	Matl	material	Per.	perimeter	Res	residence
Hwy	highway	Max	maximum	Perm	permanent	Ret	retaining
Hor	horizontal	MC	meander corner	PL	pipeline	Rev	reverse
HBP	hot bituminous pavement	Meas	measure	Pl	place	Rt	right
HMA	hot mix asphalt	Mdn	median	P&P	plan & profile	R/W	right of way
Hyd	hydrant	MD	median drain	PL	plastic limit	Riv	river
Ph	hydrogen ion content	MC	medium curing	Pl or P _L	plate	Rd	road
		MGS	Midwest Guardrail System	Pt	point	Rdbd	road bed
		MM	mile marker	PE	polyethylene	Rdwy	roadway
Id	identification	MP	mile post	PVC	polyvinyl chloride	RWIS	roadway weather information system
Incl	inclinometer tube	Min	minimum	PCC	Portland Cement concrete	Rk	rock
IMH	inlet manhole	Misc	miscellaneous	PP	power pole	Rt	route
ID	inside diameter	Mon	monument	Preempt	preemption		
Inst	instrument	Mnd	mound	Prefab	prefabricated		
Intchg	interchange	Mtbl	mountable	Prfmd or Pref	preformed		
Intmdt	intermediate	Mtd	mounted	Prep	preperation		
Intscn	intersection	Mtg	mounting	Press.	pressure		
Inv	invert	Mk	muck	PRV	pressure relief valve		
IP	iron pipe			Prestr	prestressed		
				Pvt	private		
				PD	private drive		
Jt	joint	Neop	neoprene	Prod.	production/produce		
Jct	junction	Ntwk	network	Prog	programmed		
		N	North	Prop.	property		
		NE	North East	Prop Ln	property line		
		NW	North West	Ppsd	proposed		
		NB	Northbound	PB	pull box		
		No. or #	number				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions



08/16/22

NDDOT ABBREVIATIONS

D-101-3

Salv	salvage(d)	Tel	telephone
San	sanitary sewer line	Tel B	Telephone Booth
Sec	section	Tel P	telephone pole
SL	section line	Tv	television
Sep	separation	Temp	temperature
Seq	sequence	Temp	temporary
Serv	service	TBM	temporary bench mark
Sht	sheet	T	thinwall tube sample
Shtng	sheeting	Ts	topsoil
Shldr	shoulder	Traf	traffic
Sw or Sdwk	sidewalk	TSCB	traffic signal control box
SD	sight distance	Tr	trail
SN	sign number	Transf	transformer
Sig	signal	Trans	transition
Sgl	single	TT	transmission tower
SRCP	slotted reinforced concrete pipe	TES	traversable end section
SC	slow curing	Trans	transverse
SS	slow setting	Trtd	treated
Sm	small	Trmt	treatment
S	South	Qc	triaxial compression
SE	South East	TERO	tribal employment rights ordinance
SW	South West	Tpl	triple
SB	Southbound	Typ	typical
Sp	spaces		
Spcl	special	Qu	unconfined compressive strength
SA	special assembly	Ugrnd	underground
SP	special provisions	Util	utility
G	specific gravity		
Spk	spike		
SB	split barrel sample	VG	valley gutter
SH	sprinkler head	Vap	vapor
SV	sprinkler valve	Vert	vertical
Sq	square	VCP	vitrified clay pipe
Stk	stake	Vol	volume
Std	standard	VSFS	vehicle speed feedback sign
N	standard penetration test		
Std Specs	standard specifications	Wkwy	walkway
Stm L	steam line	W	water content
SEC	steel encased concrete	WGV	water gate valve
SMA	stone matrix asphalt	WL	water line
SSD	stopping sight distance	WM	water main
SD	storm drain	WMV	water main valve
St	street	W Mtr	water meter
SPP	structural plate pipe	WSV	water service valve
SPPA	structural plate pipe arch	WW	water well
Str	structure	Wrng	wearing
Subd	subdivision	WIM	weigh in motion
Sub	subgrade	W	west
Sub Prep	subgrade preparation	WB	westbound
Ss	subsoil	Wrng	wiring
SS	supplement specification	W/	with
Supp	supplemental	W/o	without
Surf	surfacing	WC	witness corner
Surv	survey		
Sym	symmetrical		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions



08/16/22

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International

T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added - Continued from D-101-3

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683




ENGINEER

NORTH DAKOTA

12 18 2020

Perforated Tube

- Notes:
1. Torque slip base bolts as specified by manufacturer.
 2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
 3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
 4. In concrete sidewalk, use same anchor without wings.
 5. Provide more than 7' between the first and fourth posts of a four post sign.

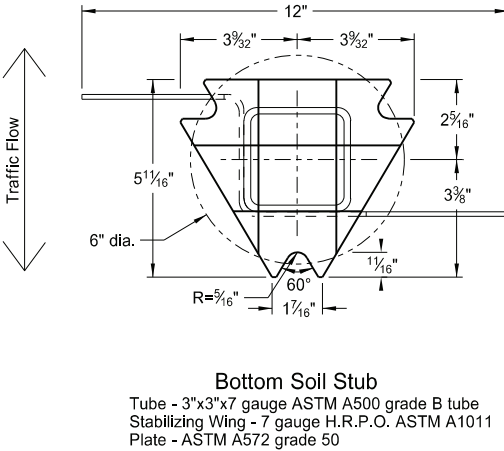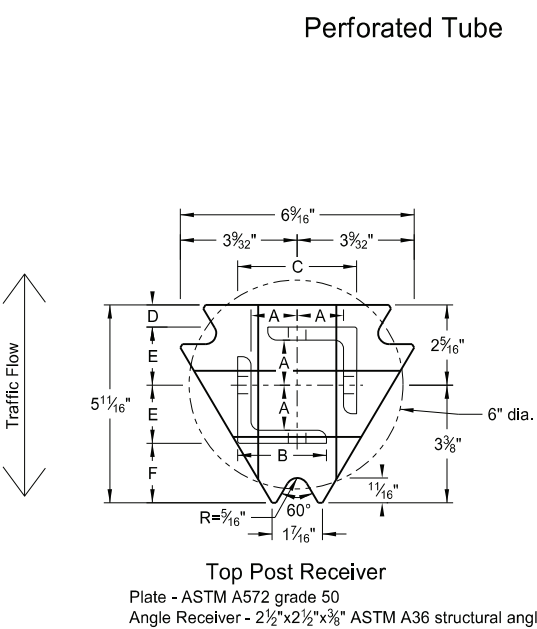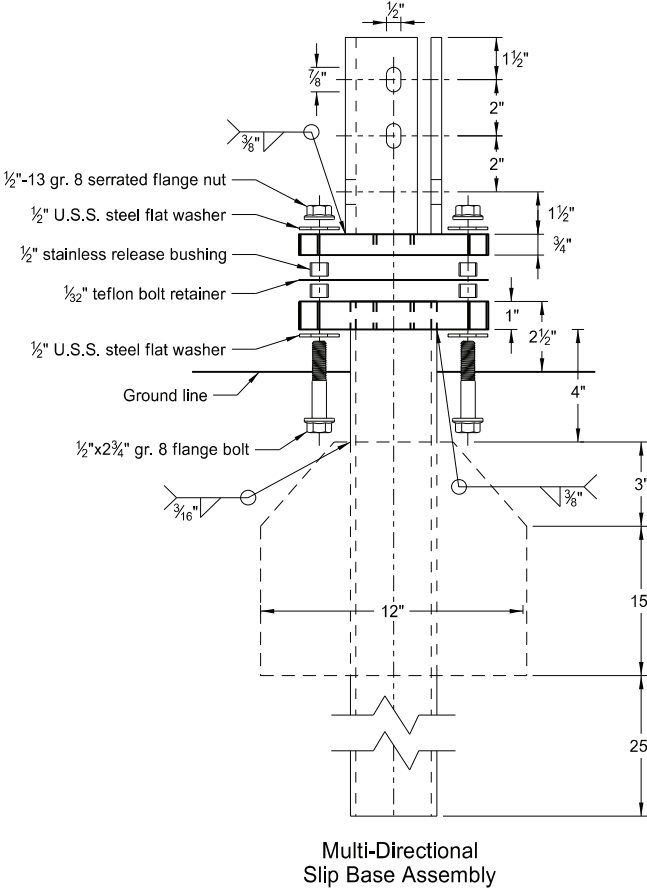


Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thick-ness Gauge	Sleeve Size in.	Wall Thick-ness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/8 x 2 3/8	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 5/16"	2 1/2"	3 1/2"	2 5/32"	1 33/64"	1 7/8"
2 1/2"x10 ga.	1 3/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

- (A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.
- (B) For additional wind load, insert the 2 3/8"x10 ga. into 2 1/2"x10 ga.

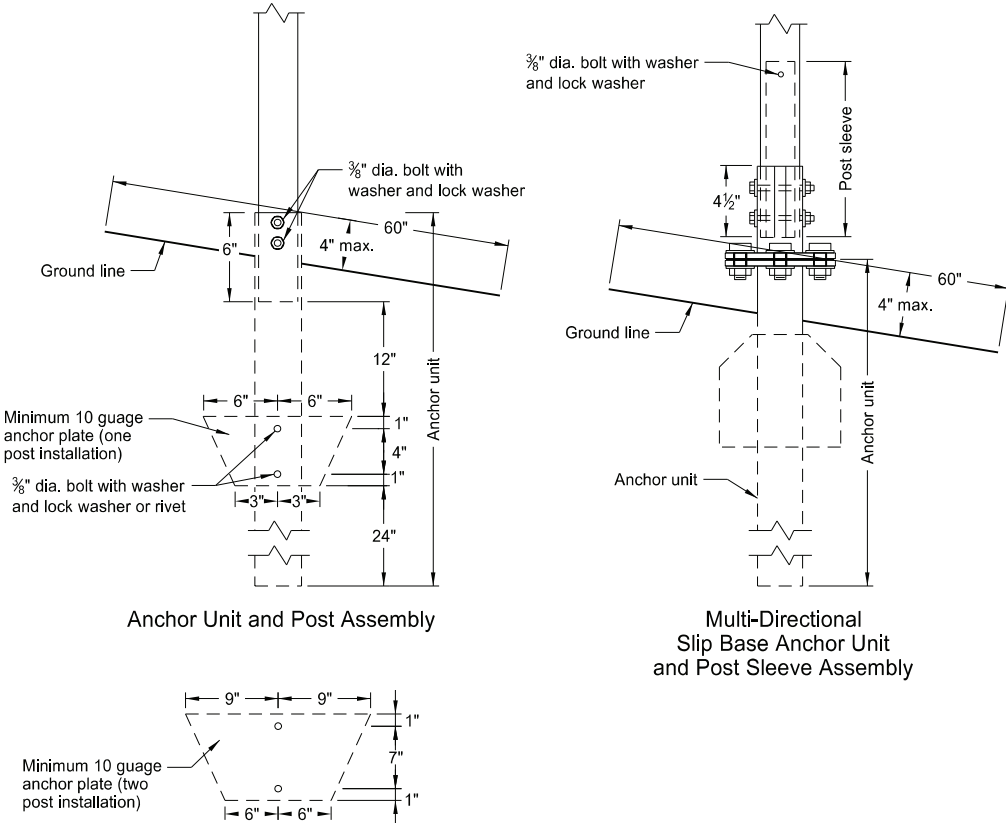

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		This document was originally issued and sealed by Kirk J Hoff, Registration Number PE- 4683, on 10/03/19 and the original document is stored at the North Dakota Department of Transportation
2-28-14		
REVISIONS		
DATE	CHANGE	
9-27-17 10-03-19	Updated to active voice New Design Engr PE Stamp	

See Alt. A Note 4

Sign post

Grade 8 bolt, nut, and lock washer (see Alt. A Note 3)




Anchor unit

Grade 8 bolt, nut, and lock washer (see Alt. A Note 3)

See Alt. A Note 1c

Retainer strap (see Alt. A Note 1b)

Detail A




1.
 - a) Drive anchor unit to within 12" of ground level.
 - b) Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
 - c) Assemble strap to back of anchor unit using $\frac{5}{16}$ "x2" bolt, lock washer and nut.
 - d) Rotate strap 90° to left.
2.
 - a) Drive anchor unit to 4" above ground.
 - b) Rotate strap to vertical position.
3.
 - a) Place $\frac{5}{16}$ "x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
 - b) Alternately tighten two connector bolts.
4. Complete assembly by tightening $\frac{5}{16}$ "x2" bolt (this fastens sign post to retainer strap).
5. Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17 10-03-19	Updated to active voice New Design Engr PE Stamp


This document was originally
issued and sealed by
Kirk J Hoff,
Registration Number
PE-4683,
on 10/03/19 and the original
document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION SIGN DETAILS

TERMINAL AND GUIDE SIGNS

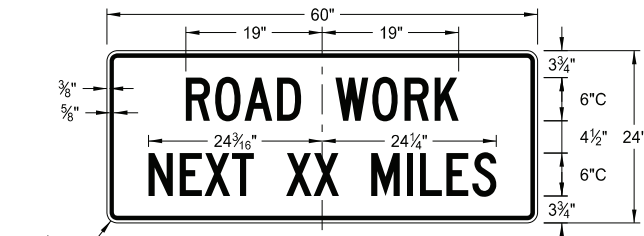


G20-1-60
Legend: black (non-refl)
Background: orange

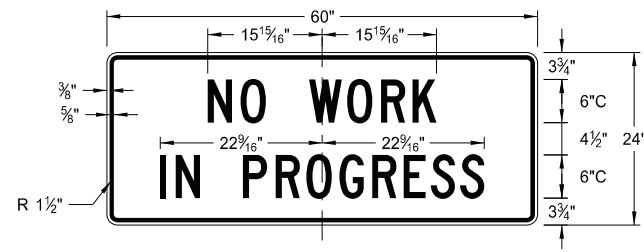


G20-1b-60


Legend: black (non-refl)
Background: orange

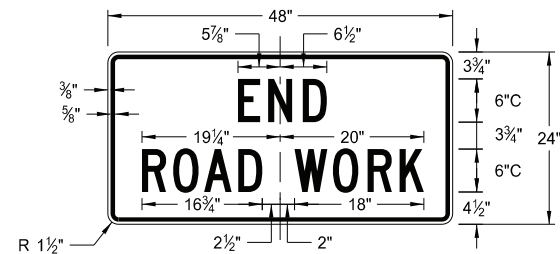


G20-2-48
Legend: black (non-refl)
Background: orange

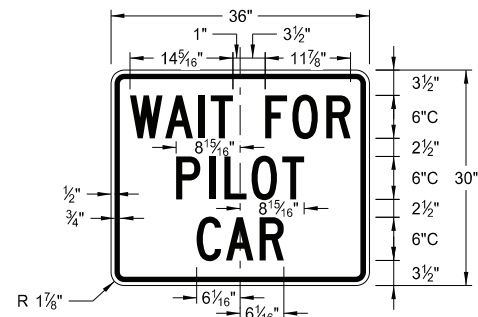

G20-4b-36
Legend: black (non-refl)
Background: orange

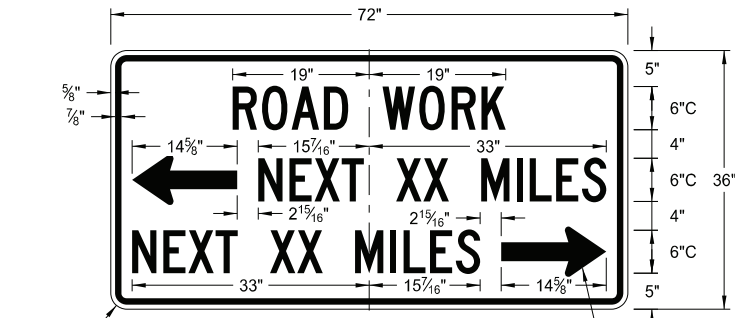


G20-50a-72

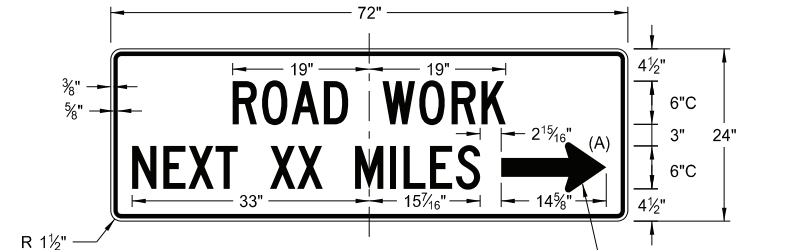


G20-52a-72

Legend: black (non-refl)
Background: orange

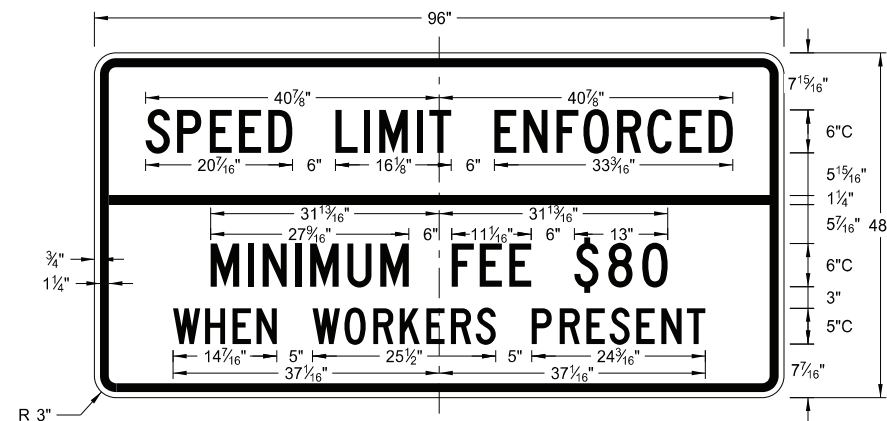


G20-55-96
Legend: black (non-refl)
Background: orange

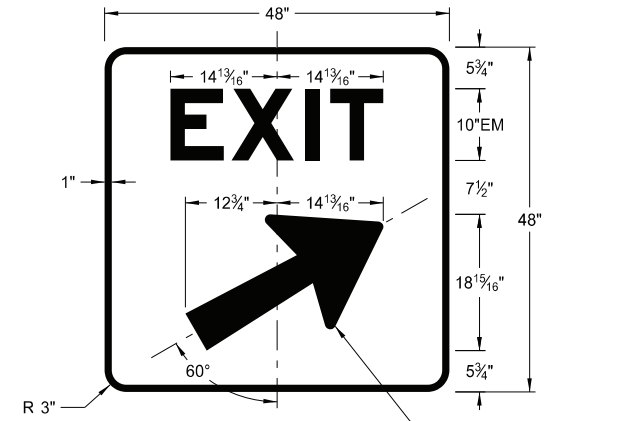


E5-1(L or R)-48

Legend: white
Background: green (orange optional)


See ARROW DETAILS

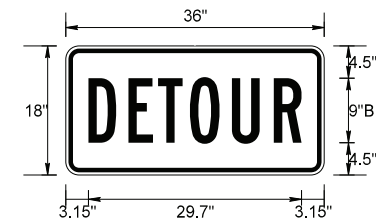


M4-8-36
Legend: black (non-refl)
Background: orange

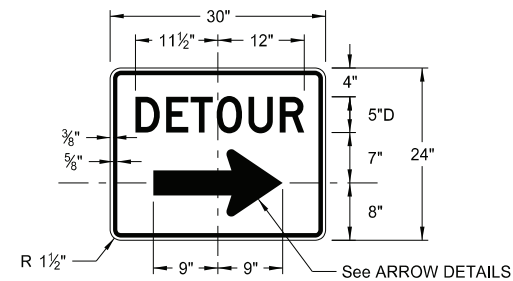


M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange

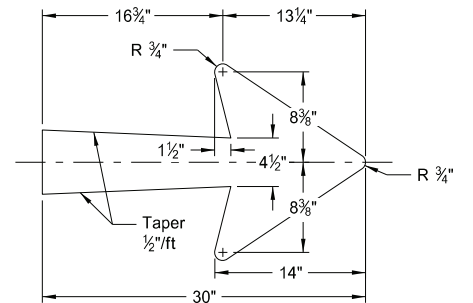


E5-1-48

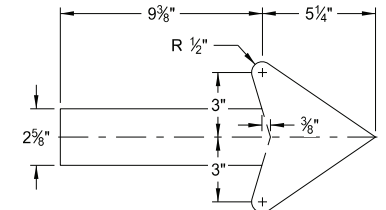


G20-50a-72
G20-52a-72



M4-9(L or R)-30
Right or Left

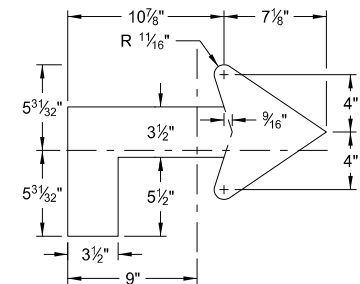

M4-9(L or R)-30
Advanced Right or Left



M4-9-30
Straight






ARROW DETAILS

NOTES:

(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17 10-03-19	Added sign & background color New Design Engineer PE Stamp


This document was originally issued and sealed by
 Kirk J Hoff,
 Registration Number
 PE-4683,
 on 10/03/19 and the original document is stored at the
 North Dakota Department
 of Transportation



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17 10-03-19	Revised sign number New Design Engineer PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683 ,
on 10/03/19 and the original document is stored at the
North Dakota Department
of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

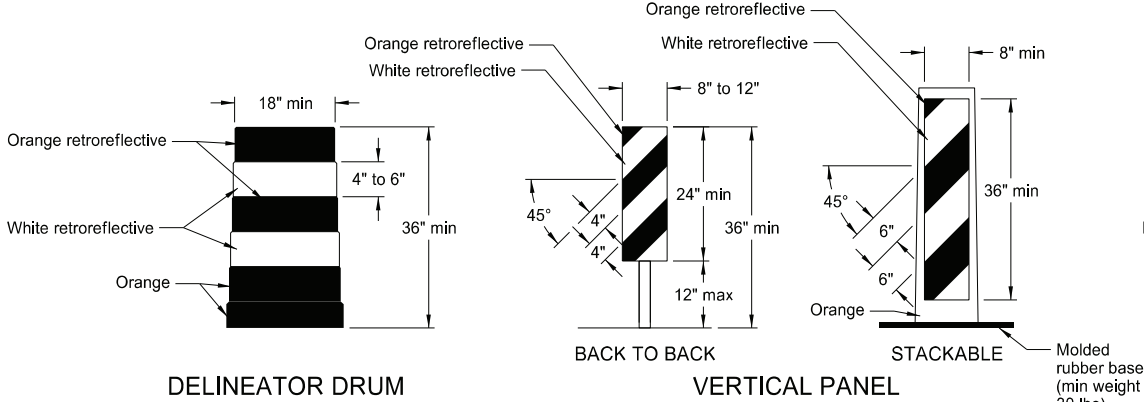


DELINEATOR DRUM

VERTICAL PANEL

STACKABLE
Molded rubber base (min weight 30 lbs)


Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectORIZED spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.

Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

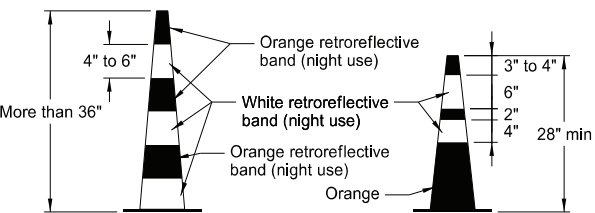


TRAFFIC CONE

Provide retroreflectORIZATION of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectORIZED space between the orange and white stripes.

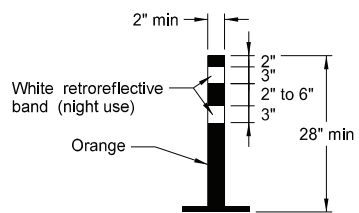

TUBULAR MARKER


Provide retroreflectORIZATION of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

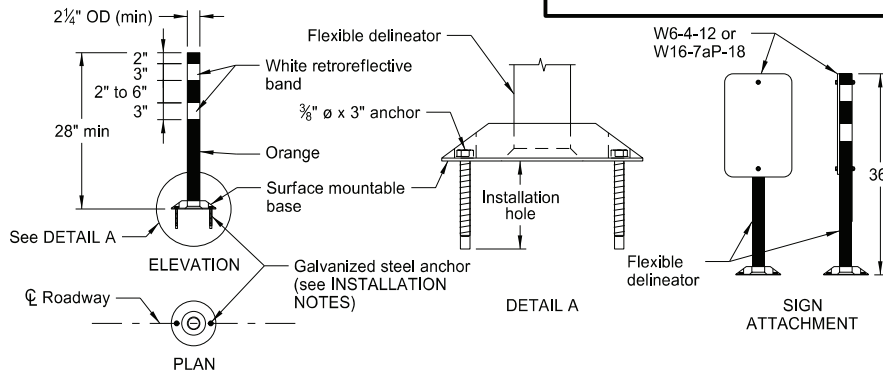

FLEXIBLE DELINEATOR

INSTALLATION NOTES:

1. Drill installation holes to diameter and depth required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

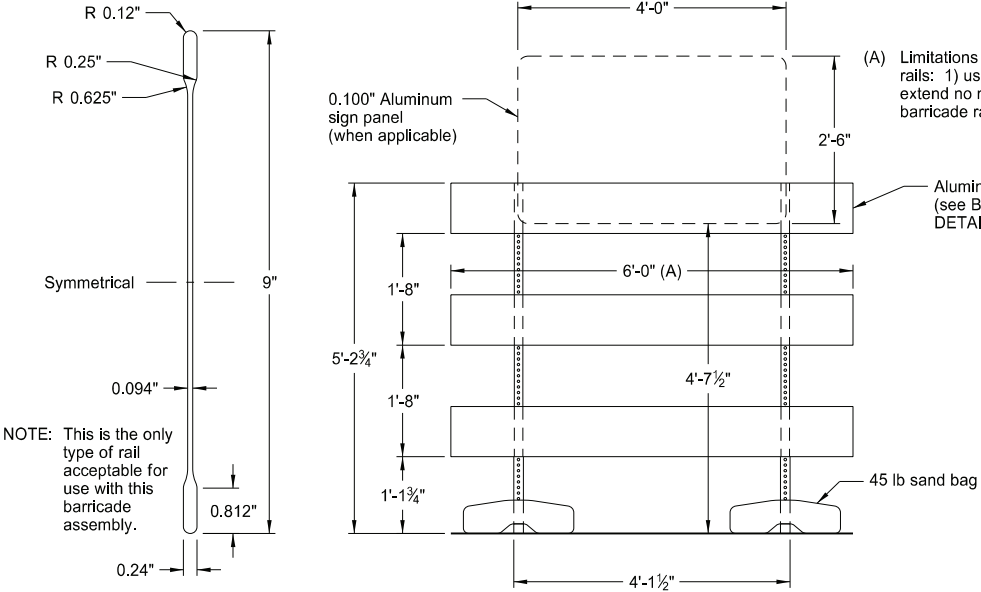


BARRICADE BLADE DETAIL


ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL
(Aluminum Barricade Rails)

NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".

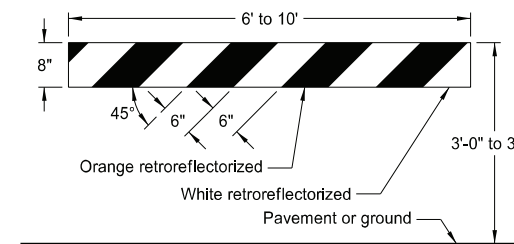


TYPE I BARRICADE

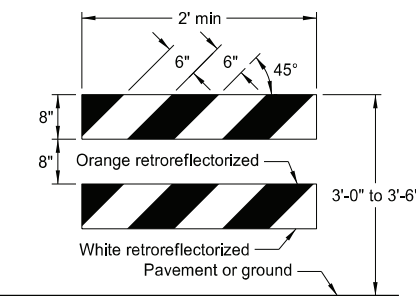


TYPE II BARRICADE


BARRICADE RAIL DETAILS

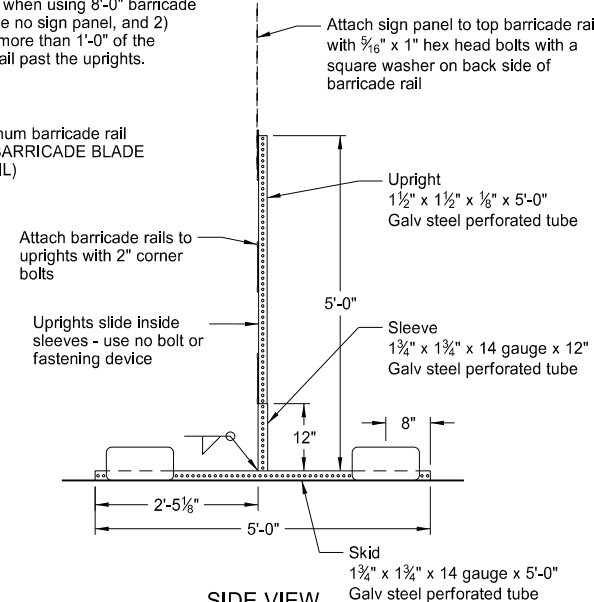

SIDE VIEW

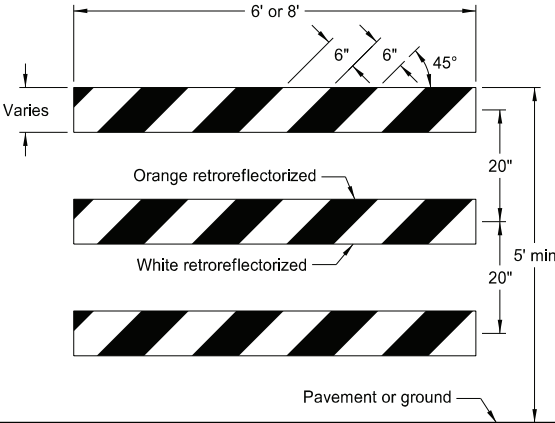


TYPE III BARRICADE

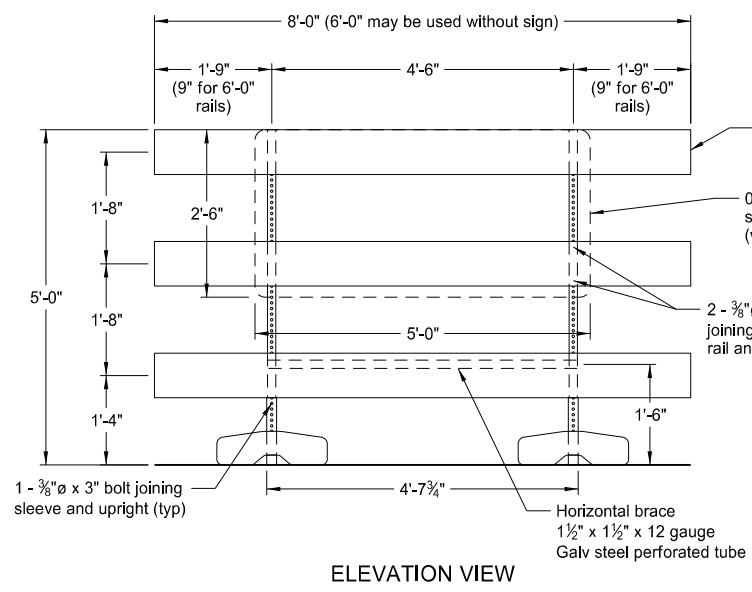

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL
(Wood or Plastic Rails)

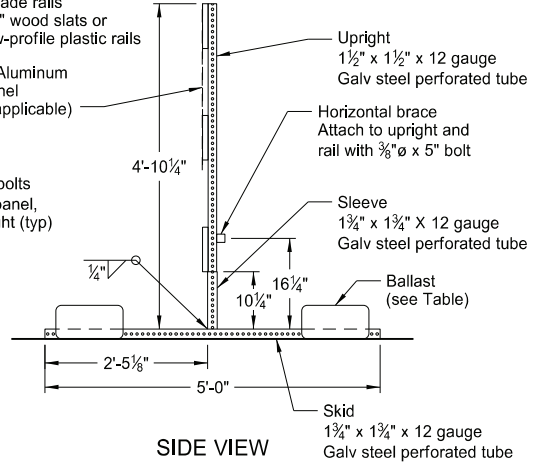


SIDE VIEW

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags

Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

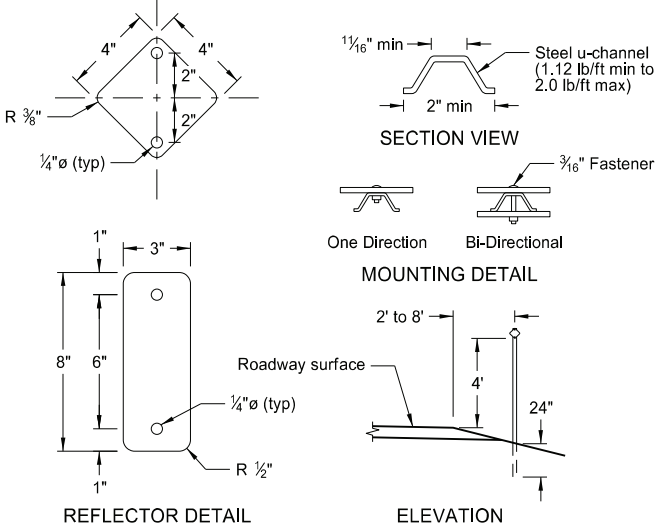

REFLECTOR DETAIL

ELEVATION


DELINEATORS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17 11-01-19	Updated to active voice Revised details for Flexible Delineator


This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 11/1/19 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

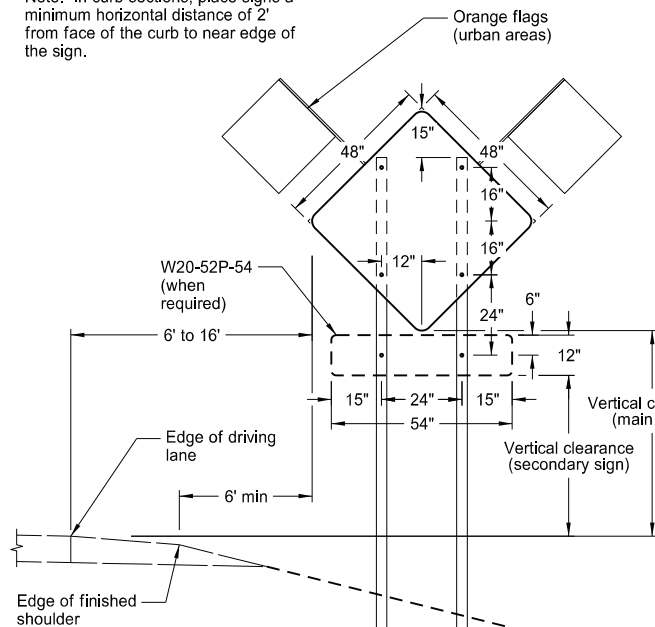


TYPICAL SECTION
(48" x 48" diamond warning sign shown)

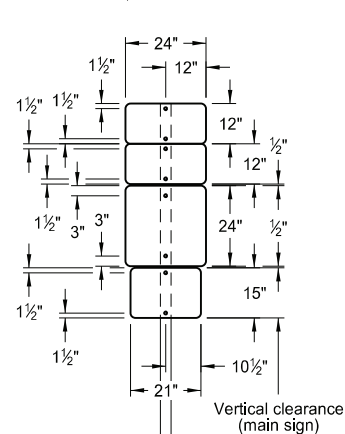


24" x 24"
ROUTE MARKER
ASSEMBLY

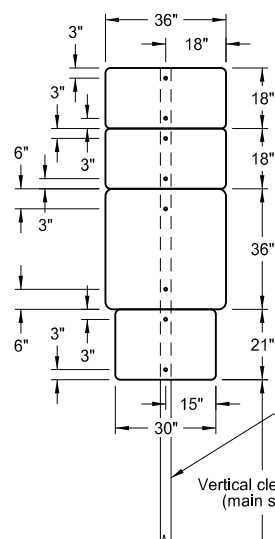


36" x 36"
ROUTE MARKER
ASSEMBLY

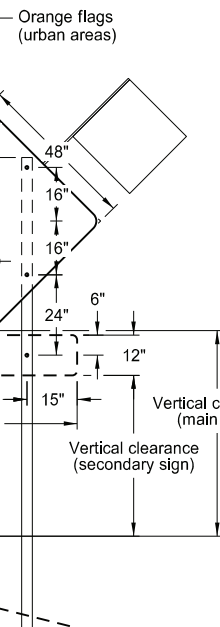


18" x 18"
DIAMOND SIGN

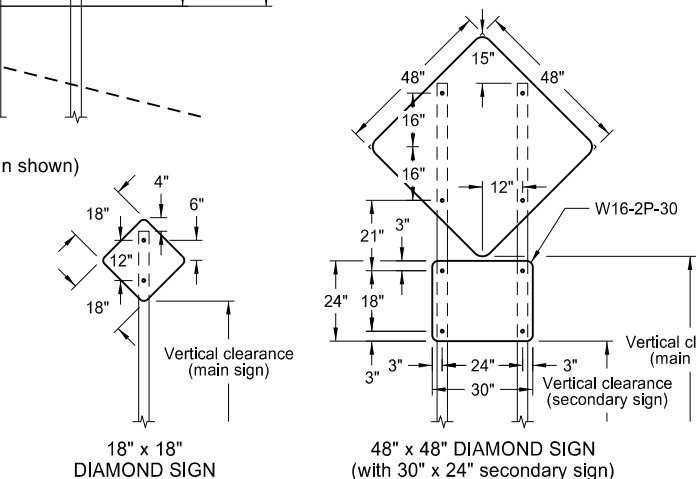


48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)

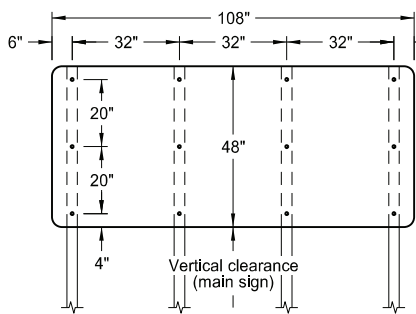


108" x 48" SIGN

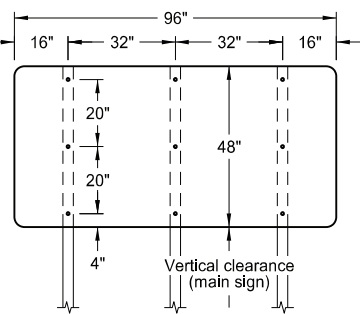


96" x 48" SIGN

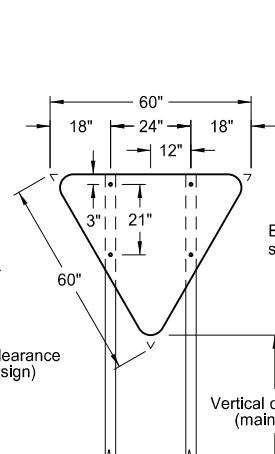


R1-2-60 - YIELD SIGN

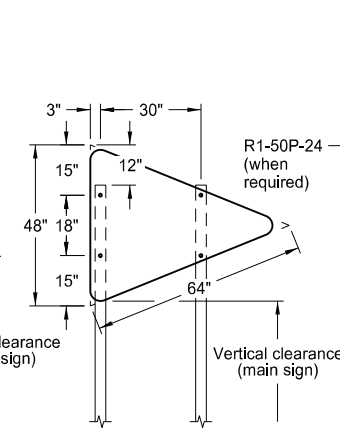


W14-3-64 - PENNANT SIGN




72" x 36" SIGN

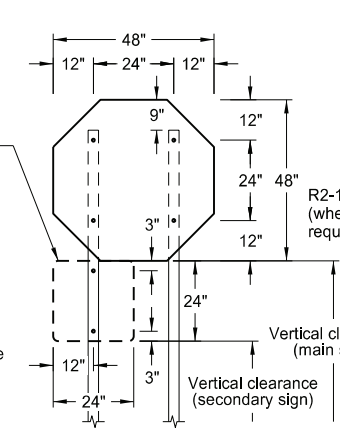


R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)




72" x 24" SIGN

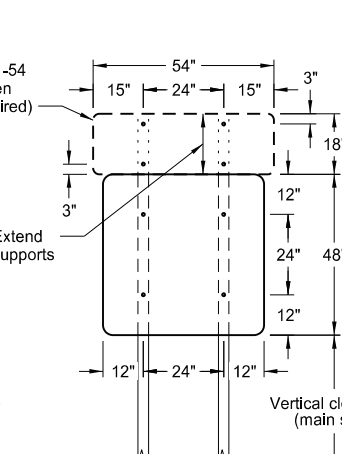


48" x 48" SIGN
(with R6-1-54 sign as required)

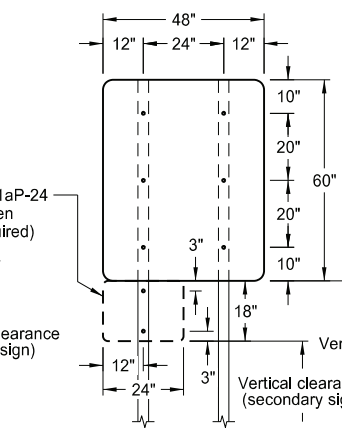


48" x 48" SIGN
(with R2-1aP-24 sign as required)

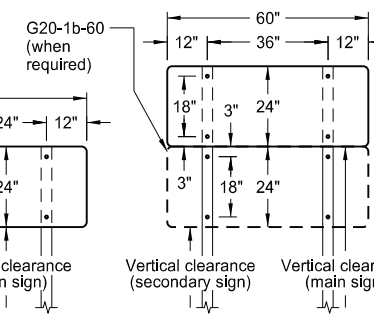


60" x 24" SIGN




24" x 36" SIGN

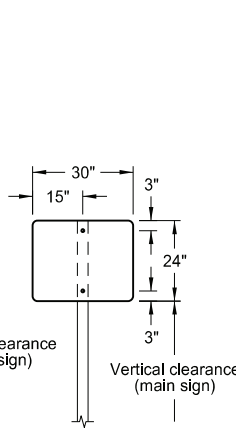


30" x 24" SIGN



48" x 24" SIGN

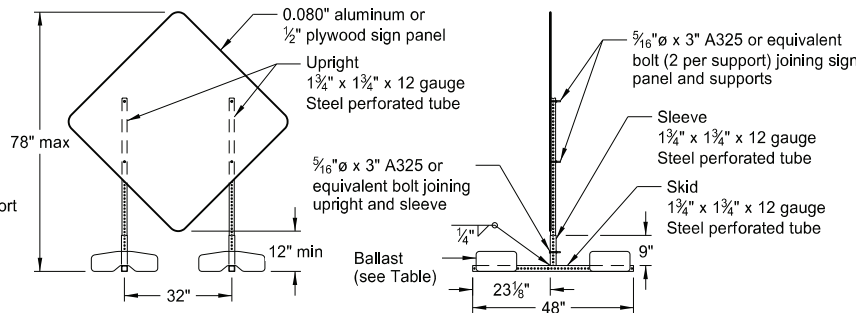

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

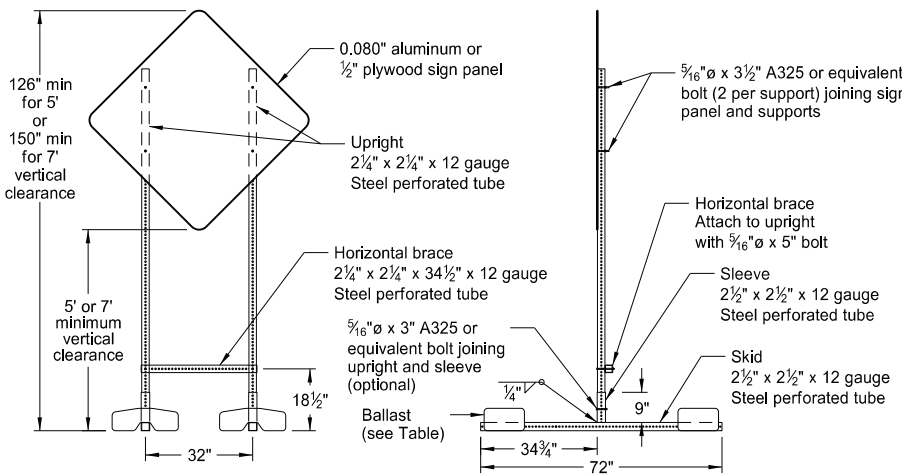

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.
2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅝" bolts.
3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)
4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION). In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10






Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail

This document was originally issued and sealed by



Kirk J Hoff,
Registration Number
PE-4683,
on 11/1/19 and the original document is stored at the North Dakota Department of Transportation

SHOULDER CLOSURES AND BRIDGE PAINTING LAYOUTS

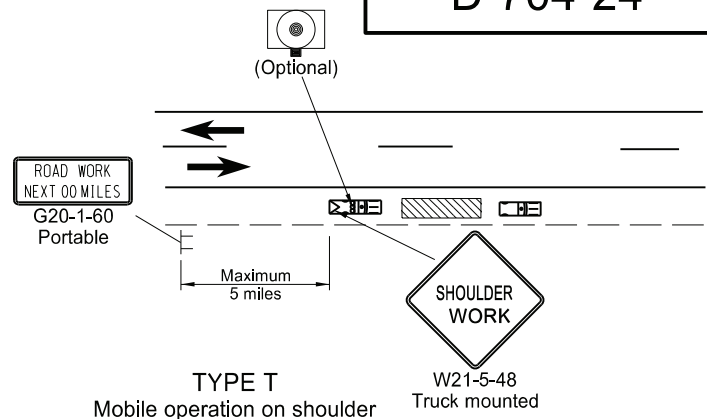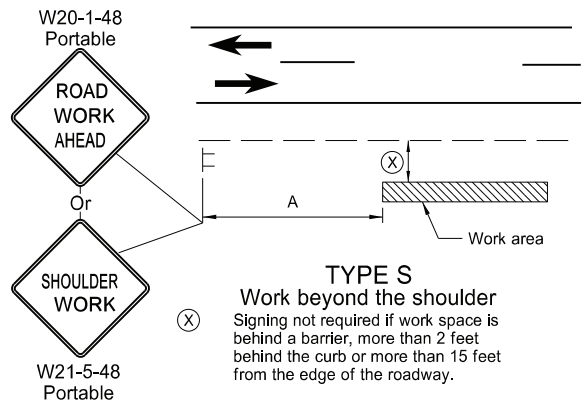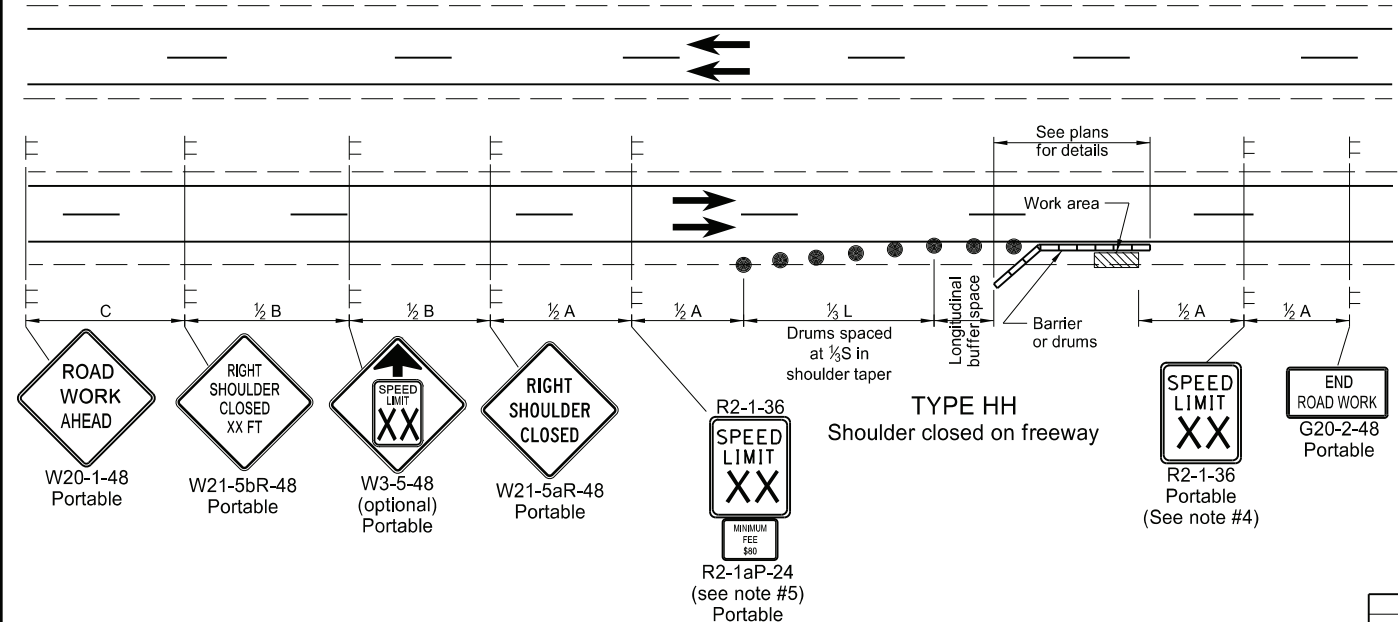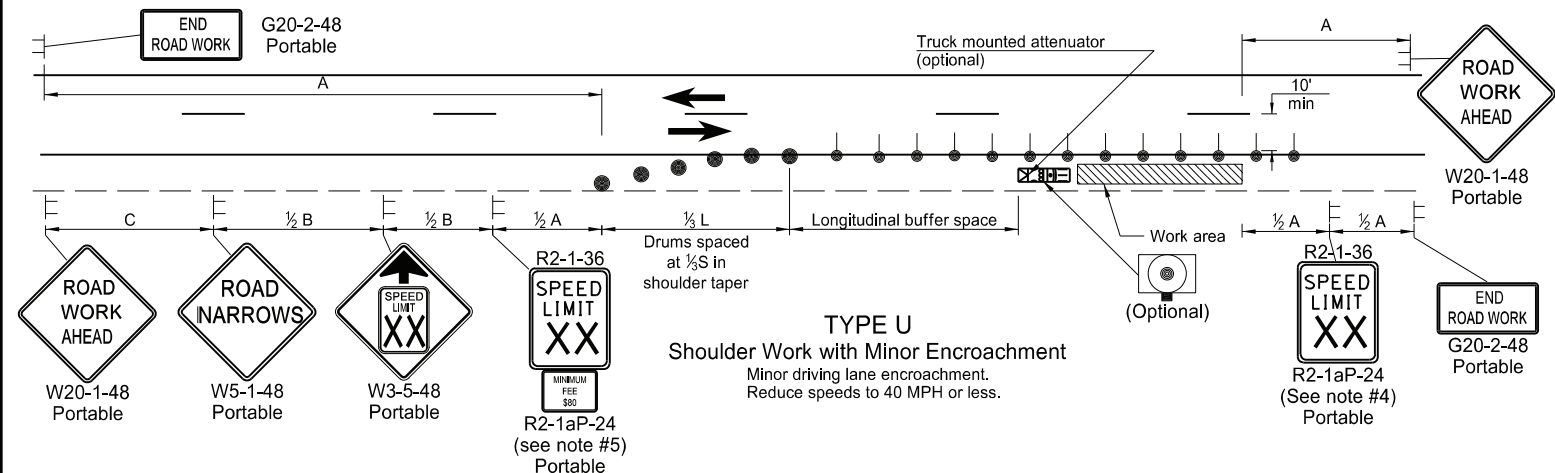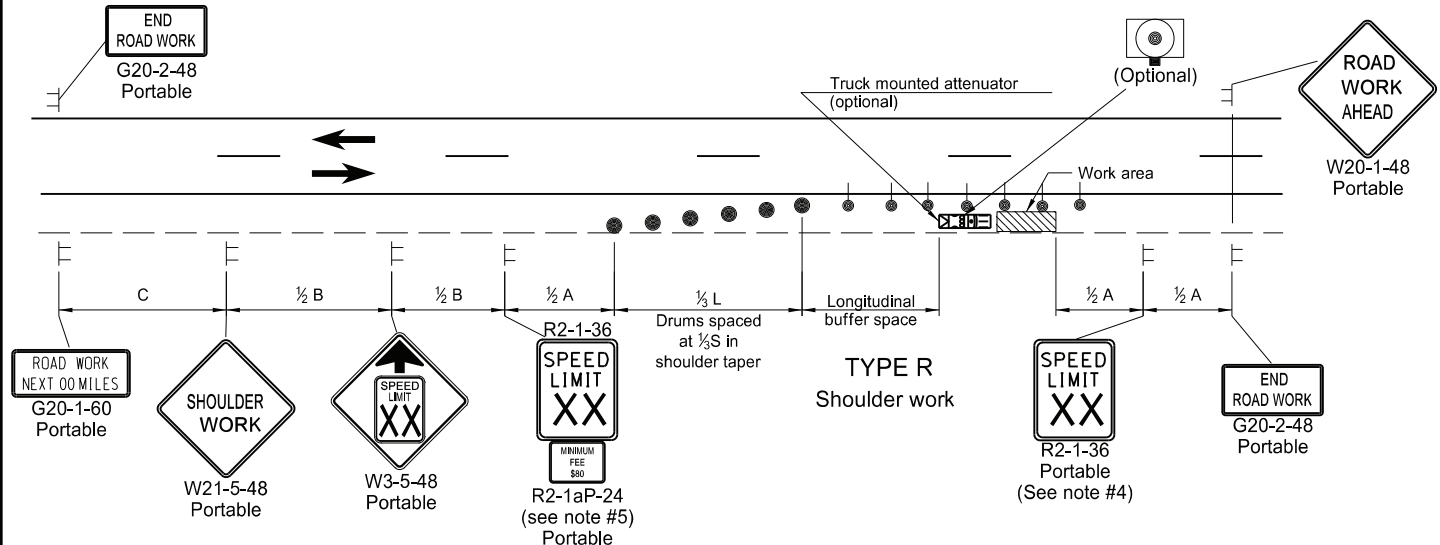

Notes

- Variables
S = Numerical value of speed limit or 85th percentile.
W = The width of the taper in feet.
L = Minimum length of taper, $S \times W$ for freeways, expressways, and all other roads with speeds of 45 mph or greater, or $W \times S^2 / 60$ for urban, residential, and other streets with speeds of 40 mph or less.
2. Space delineator drums for tapering traffic at dimension "S". Space delineator drums or tubular markers for tangents at 2 times "S".
3. Sequencing Arrow Panels
Use Type A on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
Use Type B on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
Use Type C on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
4. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
5. Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
6. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
7. Cover existing speed limit signs within a reduced speed zone.
8. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
9. Recommend 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

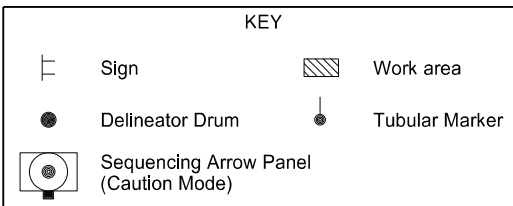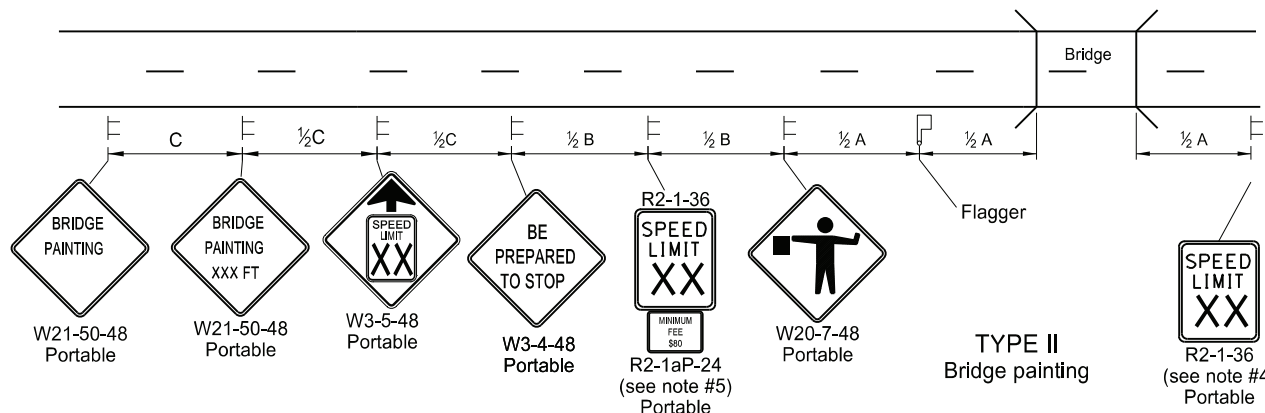

ADVANCE WARNING SIGN SPACING				
Road Type	Distance Between Signs			
	A	B	C	
Urban - Low Speed (30 mph or less)	150	150	150	
Urban - Low Speed (over 30 to 40 mph)	280	280	280	
Urban - High Speed (over 40 mph to 50 mph)	360	360	360	
Rural - High Speed (over 50 mph to 65 mph)	720	720	720	
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200	
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640	
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500	


Longitudinal Buffer Space	
Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
8-17-17 11-01-19	Updated notes & revised signs Revised drum spacing & signs nos.

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 11/1/19 and the original document is stored at the
North Dakota Department
of Transportation

PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

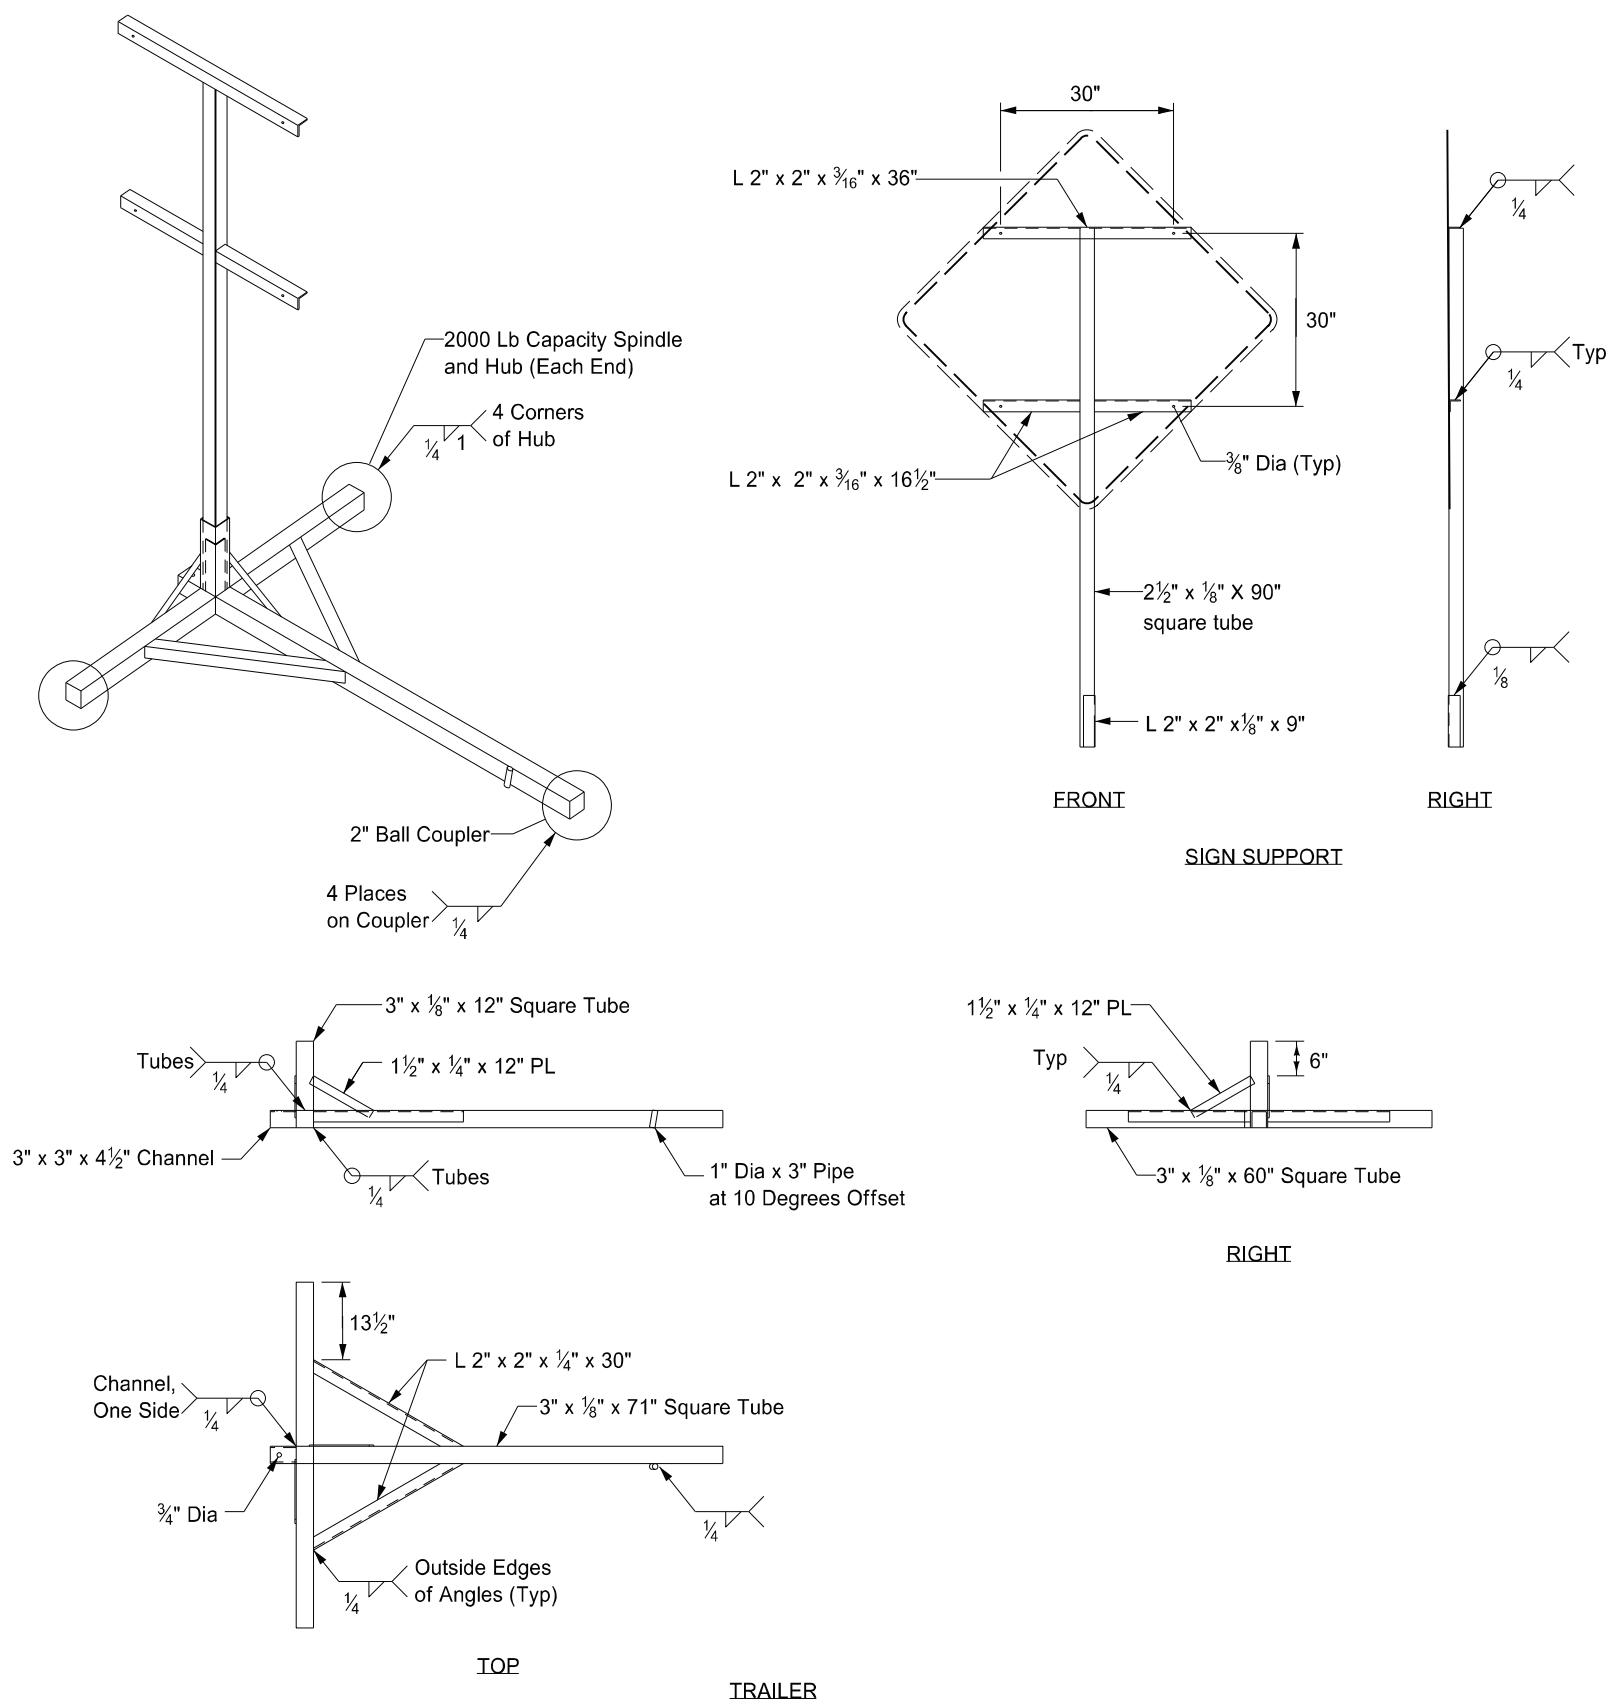

Notes:

- 1. Maximum 250 pound weight of assembly.
- 2. Use a 14" wheel and tire.
- 3. Use no automotive and equipment axle assemblies for trailer-mounted sign supports.
- 4. Other NCHRP 350 or MASH crash tested assemblies are acceptable.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE
12/02/2020	Updated Note to active voice.

