

DESIGN DATA				
Traffic	Average Daily			
Current 2022	Pass: 1445	Trucks: 148	Total: 1593	
Forecast 2042	Pass: 2805	Trucks: 295	Total: 3100	
Clear Zone Distance: _____		Design Speed: 55 MPH		
Minimum Sight Dist. for Stopping: _____		Bridges: 30-164-22.0		
Sight Dist. for No Passing Zone: _____				
Pavement Design Life _ (years)				
Design Accumulated One-way _____ ESALs: 87				

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

SS-1-806(058)057



Morton County
ND 1806
12 mi S of I-94

Field Approach, Structure Removal

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	SS-1-806(058)057	24133	1	1

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	7/1/2024
Supplemental Specifications	NONE

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
SS-1-806(058)057	0.3	0.3

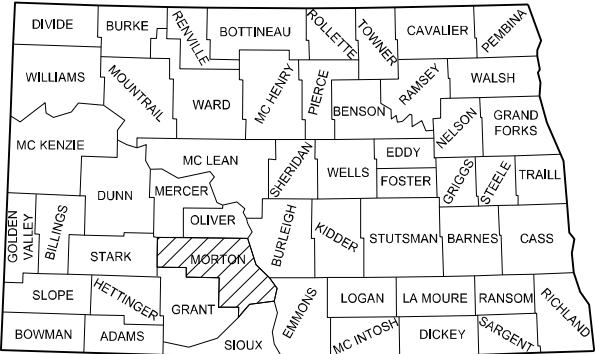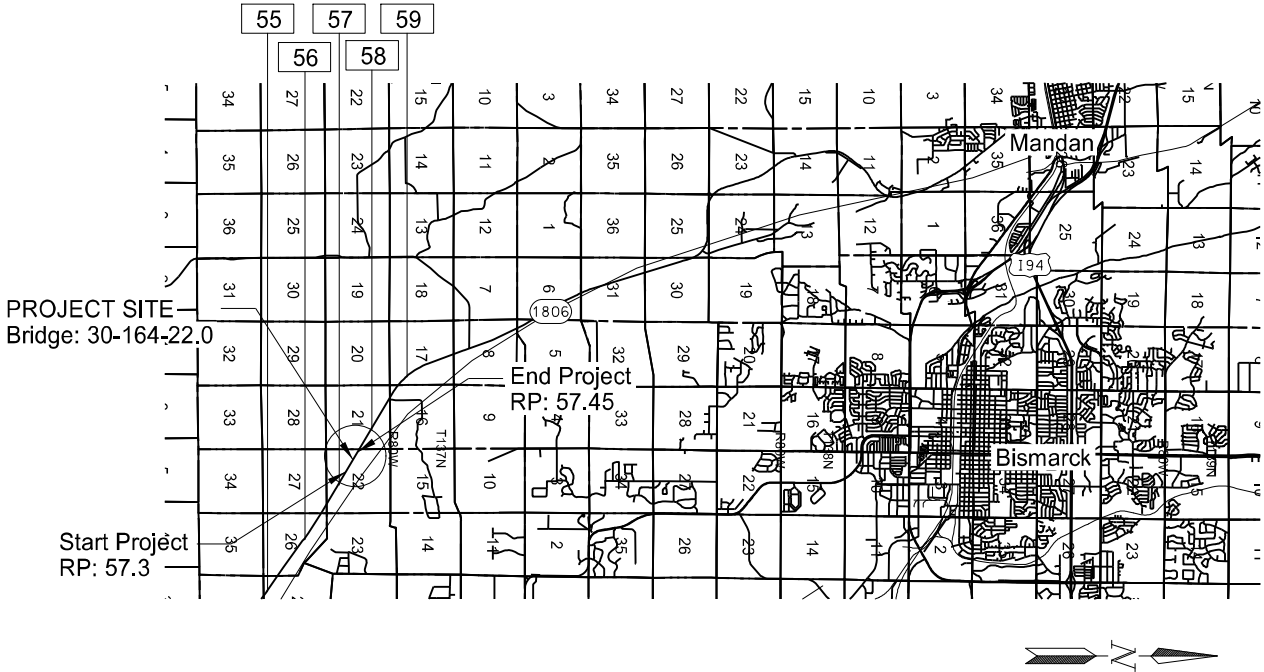

STATE COUNTY MAP

DESIGNER Samantha Hettinger
DESIGNER
DESIGNER

ND DEPARTMENT OF TRANSPORTATION
OFFICE OF PROJECT DEVELOPMENT

Kirk Hoff Kirk Hoff
06/20/25

NDDOT DESIGN DIVISION

REGISTERED PROFESSIONAL ENGINEER

MICHAEL E. JOHNSON

PE-6389

DATE
06/20/25

NORTH DAKOTA

TABLE OF CONTENTS						STATE	PROJECT NO.	SECTION NO.	SHEET NO.
						ND	SS-1-806(058)057	2	1
PLAN SECTIONS					LIST OF STANDARD DRAWINGS				
Section	Page(s)	Description	Number	Description					
1	1	Title Sheet	D-101-1, 2,3,4	NDDOT Abbreviations					
2	1	Table of Contents	D-101-10	NDDOT Utility Company and Organization Abbreviations					
4	1-2	Scope of Work	D-101-20, 21	Line Styles					
6	1	Notes	D-101-30, 31,32,33	Symbols					
6	2	Environmental Notes	D-101-40	Cross Section Legend					
8	1	Quantities	D-203-8	Standard Rural Approaches					
11	1	Data Tables	D-255-2	Erosion And Siltation Control - Erosion Control Blanket Installation					
20	1-2	General Details	D-261-1	Erosion Control - Fiber Roll Placement Details					
40	1	Removals	D-704-7	Breakaway Systems For Construction Zone Signs - Perforated Tube					
51	1	Allowable Pipe List	D-704-8	Breakaway Systems For Construction Zone Signs - U-Channel Post					
60	1	Plan & Profile	D-704-9	Construction Sign Details - Terminal And Guide Signs					
75	1-2	Wetland Impacts	D-704-10	Construction Sign Details - Regulatory Signs					
76	1	Temporary Erosion Control	D-704-11, 11A	Construction Sign Details - Warning Signs					
77	1	Permanent Erosion Control	D-704-13	Barricade And Channelizing Device Details					
100	1-2	Work Zone Traffic Control	D-704-14	Construction Sign Punching And Mounting Details					
200	1	Cross Sections	D-704-20	Terminal And Seal Coat Sign Layouts					
			D-704-22	Construction Truck And Temporary Detour Layouts					
			D-704-24	Shoulder Closures And Bridge Painting Layouts					
			D-704-50	Portable Sign Support Assembly					
			D-708-6	Erosion And Siltation Controls - Median Or Ditch Inlet Protection					
			D-714-1	Reinforced Concrete Pipe Culverts And End Sections (Round Pipe)					
			D-714-4	Round Corrugated Steel Pipe Culverts And End Sections					
			D-714-22	Concrete Pipe, Cattle Pass, or Precast Concrete Box Culvert Ties					
			D-754-83	Object Markers - Culverts					
SPECIAL PROVISIONS									
Number	Description								
SSP 1	Temporary Erosion and Sediment Best Management Practices								
SSP 2	Federal Migratory Bird Treaty Act								
PSP 79(24)	Permits and Environmental Considerations								
SP 597(24)	Utility Coordination								

