

# JOB # 39 NORTH DAKOTA

## DEPARTMENT OF TRANSPORTATION

SS-9-999(366)



Spirit Lake Nation, Fort Berthold - TAT, Standing Rock  
Pavement Marking

STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
ND	SS-9-999(366)	21392	1	1

**GOVERNING SPECIFICATIONS:**

2014 Standard Specifications adopted by the North Dakota Department of Transportation and the Supplemental Specifications effective on the date the project is advertised.

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
SS-9-999(366)		256.844
Spirit Lake Nation	59.410	
Fort Berthold - TAT	100.705	
Standing Rock	96.729	

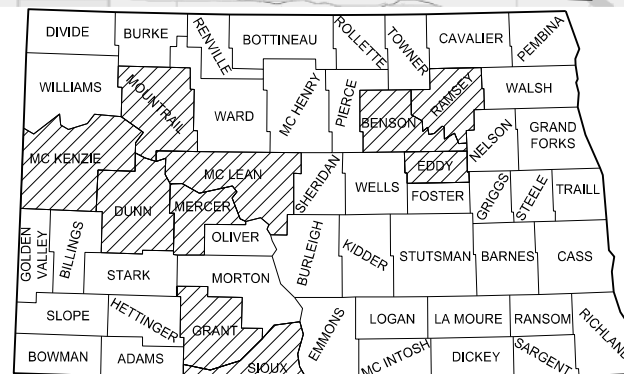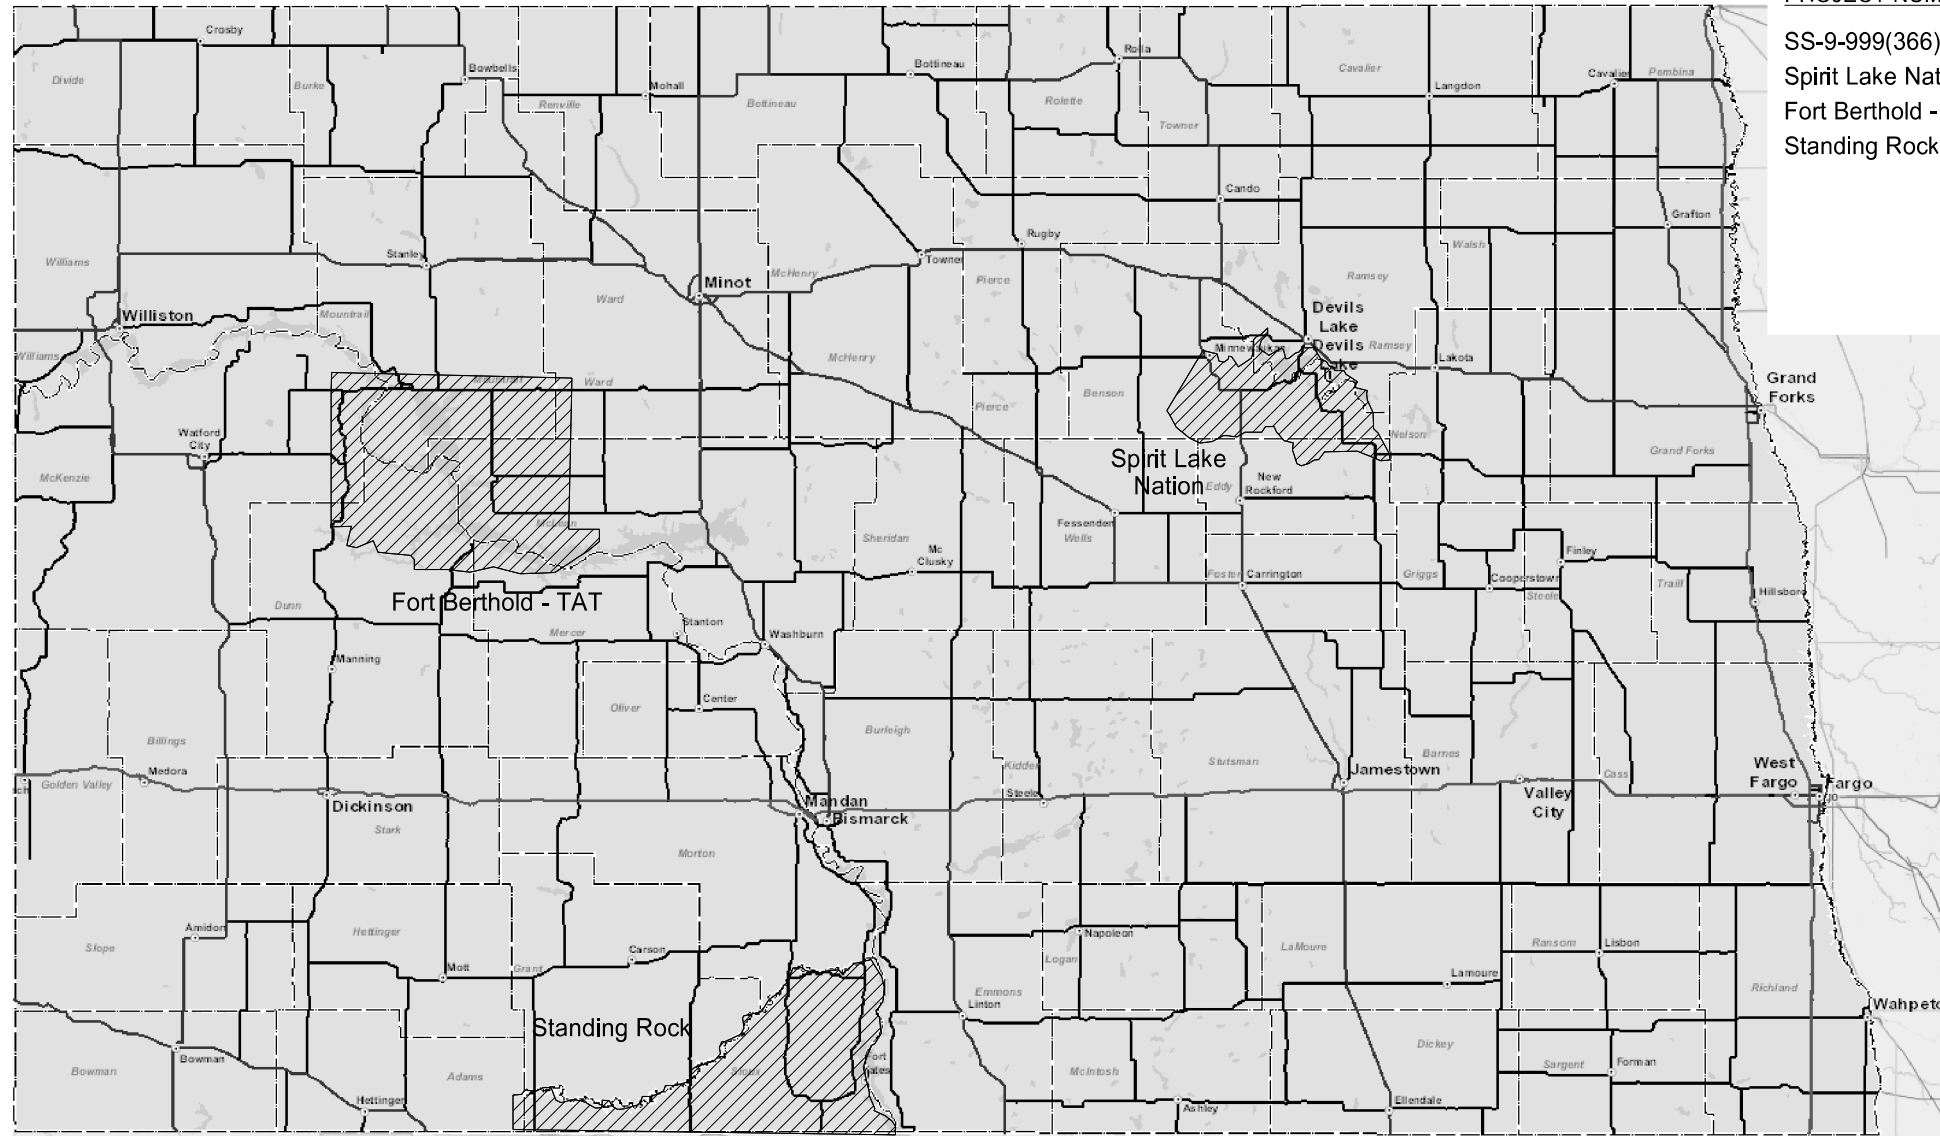

**STATE COUNTY MAP**

**DESIGNERS**

Steeg Nelson /s/

I hereby certify that the attached plans were prepared by me or under my direct supervision and that I am a duly registered professional engineer under the laws of the state of ND.

APPROVED DATE 01/04/2016

Wyatt Hanson /s/

Devils Lake District

APPROVED DATE 01/04/2016

Greg Semenko /s/

DEVILS LAKE DISTRICT ENGINEER  
ND DEPARTMENT OF TRANSPORTATION

This document was originally issued and sealed by  
Wyatt Hanson  
Registration Number  
PE- 6867 ,  
on 01/04/2016 and the original document is stored at the  
North Dakota Department  
of Transportation

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SS-9-999(366)	2	1

TABLE OF CONTENTS

<u>Section No.</u>	<u>Sheet No.</u>	<u>Description</u>
1	1	Title Sheet
2	1	Table of Contents
6	1	Notes
8	1	Quantities
120	1	Pavement Marking Spirit Lake Nation
120	2	Pavement Marking Fort Berthold - TAT
120	3	Pavement Marking Standing Rock

LIST OF SPECIAL PROVISIONS

<u>SP. No.</u>	<u>Description</u>
260(14)	Tribal Employment Rights Ordinance (TERO) - Three Affiliated Tribes
261(14)	Tribal Employment Rights Ordinance (TERO) - Spirit Lake Nation
262(14)	Tribal Employment Rights Ordinance (TERO) - Standing Rock

LIST OF STANDARD DRAWINGS

<u>Standard No.</u>	<u>Description</u>
D-101-1, 2, 3	NDDOT Abbreviations
D-101-10	NDDOT Utility Company Abbreviations
D-101-20, 21	Line styles
D-101-30, 31, 32	Symbols
D-704-9, 10, 11	Construction Sign Details
D-704-13	Barricade and Channelizing Device Details
D-704-14	Construction Sign Punching and Mounting Details
D-704-27	Traffic Control Plan Moving Operations
D-762-1	Pavement Marking Message Details
D-762-3	Pavement Marking Standard 90° Flared Intersection
D-762-4	Pavement Marking

**NOTES**

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SS-9-999(366)	6	1

100-P01 COORDINATION: At least one week before beginning work in each district, contact the applicable District Engineer or Assistant District Engineer to assure that segments of highways are cleared for work. Segments may be removed or added pending additional projects being bid or not being bid.

107-100 LAWS TO BE OBSERVED: All or a portion of this project lies within the exterior boundaries of an Indian Reservation. Review laws and ordinances pertaining to the work contained within the boundaries of the reservation.

107-900 THREE AFFILIATED TRIBES BIA COORDINATION: Coordinate work on lands held in trust by the Bureau of Indian Affairs (BIA), allotted and tribally owned trust land, through the Environmental/Compliance Officer.

Contact:

Jeff Desjarlais

Environmental/Compliance Officer, Ft. Berthold  
(701) 627-4707, ext. 244

Coordinate work regarding materials sources, staging areas, office locations, and other activities that are not expressly detailed in the contract documents.

762-P01 PAVEMENT MARKING INSTALLATION: Include all costs associated with pavement marking painted four inch line in the contract unit price for "PVMT MK INSTALLATION".

The Engineer will not measure the bid item "PVMT MK INSTALLATION" and will pay plan quantity, completed and in-place, and accepted by the Engineer; unless the Engineer makes any changes in the field. Any changes made in the field will be measured and payment will be adjusted accordingly.

This document was originally issued and sealed by Nathan A. Haaland, Registration Number PE-7116, on 01/04/2016 and the original document is stored at the North Dakota Department of Transportation.

# ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
<b>ND</b>	SS-9-999(366)	<b>8</b>	1

SPEC CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
-----	-----	-----	-----	-----
103	0100 CONTRACT BOND	L SUM	1	1
702	0100 MOBILIZATION	L SUM	1	1
762	0103 PVMT MK PAINTED-MESSAGE	SF	1,932	1,932
762	0107 PVMT MK INSTALLATION	MILE	609	609
762	0112 EPOXY PVMT MK MESSAGE	SF	726	726
762	0113 EPOXY PVMT MK 4IN LINE	LF	477,686	477,686
762	0115 EPOXY PVMT MK 8IN LINE	LF	4,226	4,226
762	0117 EPOXY PVMT MK 24IN LINE	LF	92	92
762	1108 PVMT MK PAINTED 8IN LINE	LF	21,803	21,803
762	1124 PVMT MK PAINTED 24IN LINE	LF	758	758

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	SS-9-999(366)	120	1

PAVEMENT MARKING SPIRIT LAKE NATION											
HWY	DISTRICT (#)	HIGHWAY DESCRIPTION	REFERENCE POINT (MILES)			INSTALLATION (MILES)				PAINTED LINE (LF)	
			FROM	TO	TOTAL	EDGE	SKIP	BARRIER	TOTAL	8"	24"
ND 15	3	1 Mile S Jct 20 to E Reservation Line	60.400	63.413	3.013	6.026	0.753	0.176	6.955		
ND 20	3	Jct 15 to S Bridge	69.313	96.734	27.421	54.842	6.432	10.311	71.585		
ND 57	3	Jct 281 to E Fort Totten	0.000	12.264	12.264	24.528	2.462	7.789	34.779	6,289	620
US 281	3	N Bridge @ Sheyenne to N Reservation Line	139.633	156.345	16.712	33.424	3.792	13.358	50.574	644	
		<b>Spirit Lake Nation Total</b>			<b>59.410</b>	<b>118.820</b>	<b>13.439</b>	<b>31.634</b>	<b>164</b>	<b>6,933</b>	<b>620</b>

PAVEMENT MARKING SPIRIT LAKE NATION								
HWY	DISTRICT (#)	HIGHWAY DESCRIPTION	REFERENCE POINT (MILES)			PAINTED MESSAGE		
			FROM	TO	TOTAL	ONLY 22 EA	ARROW 16 EA	TOTAL (SF)
ND 15	3	1 Mile S Jct 20 to East Reservation Line	60.400	63.413	3.013			
ND 20	3	Jct 15 to S Bridge	69.313	96.734	27.421			
ND 57	3	Jct 281 to E Fort Totten	0.000	12.264	12.264		39	624
US 281	3	N Bridge @ Sheyenne to N Reservation Line	139.633	156.345	16.712	3	3	114
		<b>Spirit Lake Nation Total</b>			<b>59.410</b>	<b>3</b>	<b>42</b>	<b>738</b>

This document was originally issued and sealed by Nathan A. Haaland Registration Number PE- 7116, on 01/04/2016 and the original document is stored at the North Dakota Department of Transportation

Pavement Marking  
Spirit Lake Nation

PAVEMENT MARKING FORT BERTHOLD - TAT															
HWY	DISTRICT (#)	HIGHWAY DESCRIPTION	REFERENCE POINT (MILES)			INSTALLATION (MILES)					PAINTED LINE (LF)		EPOXY LINE (LF)		
			FROM	TO	TOTAL	EDGE	SKIP	WHITE SKIP 10' & 2'	BARRIER	TOTAL	8"	24"	4" EDGE	8"	24"
ND 8	5	2 Miles N Jct 1806 to N Reservation Line	124.209	131.268	7.059		1.569		4.886	6.455					
ND 8	7	Jct 23 to N Reservation Line	132.121	133.661	1.540	3.100	1.600		1.5	6.200	825				
ND 22	5	S Reservation Line to Jct 73	126.789	141.099	14.310	28.322	2.366	0.972	15.005	46.664	8,510				
ND 23	7	W Reservation Line to Bakersfield Road	35.504	45.076	9.572	18.060	2.500		13.010	33.570	1,614	98			
ND 23	7	Bakersfield Road to E New Town	45.076	50.757	5.681	8.370	1.180		1.950	11.500	3,117				78
ND 23	7	E New Town to Jct 8	50.757	56.405	5.648		1.190		6.890	8.080			53,275	3,266	
ND 37	4	Jct 23 to Reservation Line near Roseglen	0.000	29.785	29.785	59.570	6.826		15.808	82.204					
ND 73	7	S Reservation Line to Jct 22	7.369	11.332	3.963	7.830	0.880		2.830	11.540	804	12			
ND 1804	4	E Jct 37 to 7 Miles W Jct 37	192.158	213.688	21.530	43.06	4.758		11.101	58.919					
ND 1804	7	Jct 23 to N Reservation Line	247.145	248.531	1.617	0.640			0.640	1.280					
<b>Fort Berthold - TAT Total</b>					<b>100.705</b>	<b>168.952</b>	<b>22.868</b>	<b>0.972</b>	<b>73.620</b>	<b>266</b>	<b>14,870</b>	<b>110</b>	<b>53,275</b>	<b>3,266</b>	<b>78</b>

PAVEMENT MARKING FORT BERTHOLD - TAT											
HWY	DISTRICT (#)	HIGHWAY DESCRIPTION	REFERENCE POINT (MILES)			PAINTED MESSAGE			EPOXY MESSAGE		
			FROM	TO	TOTAL	ARROW 16 EA	DROP ARROW 41 EA	TOTAL (SF)	ARROW 16 EA	MERGE ARROW 41 EA	TOTAL (SF)
ND 8	5	2 Miles N Jct 1806 to N Reservation Line	124.209	131.268	7.059						
ND 8	7	Jct 23 to N Reservation Line	132.121	133.661	1.540	3		48			
ND 22	5	S Reservation Line to Jct 73	126.789	141.099	14.310	30	6	726			
ND 23	7	W Reservation Line to Bakersfield Road	35.504	45.076	9.572	12		192		6	246
ND 23	7	Bakersfield Road to Jct 8	45.076	50.757	5.681				30		480
ND 37	4	Jct 23 to Reservation Line near Roseglen	0.000	29.785	29.785						
ND 73	7	S Reservation Line to Jct 22	7.369	11.332	3.963						
ND 1804	4	E Jct 37 to 7 Miles W Jct 37	192.158	213.688	21.530						
ND 1804	7	Jct 23 to N Reservation Line	247.145	248.531	1.617						
<b>Fort Berthold - TAT Total</b>					<b>95.057</b>	<b>45</b>	<b>6</b>	<b>966</b>	<b>30</b>	<b>6</b>	<b>726</b>

This document was originally issued and sealed by Nathan A. Haaland Registration Number PE- 7116, on 01/04/2016 and the original document is stored at the North Dakota Department of Transportation

Pavement Marking  
Fort Berthold - TAT

**PAVEMENT MARKING  
STANDING ROCK**

HWY	DISTRICT (#)	HIGHWAY DESCRIPTION	REFERENCE POINT (MILES)			INSTALLATION (MILES)				PAINTED LINE 24" (LF)	EPOXY 4" LINE (LF)				EPOXY LINE (LF)	
			FROM	TO	TOTAL	EDGE	SKIP	BARRIER	TOTAL		EDGE	SKIP	BARRIER	TOTAL	8"	24"
ND 6	1	State Line to S Jct 24	0.000	6.104	6.104	12.208	1.467	2.644	16.319							
ND 6	1	S Jct 24 to N Jct 24	6.104	34.894	28.790	57.580	6.468	20.122	84.170							
ND 6	1	N Jct 24 to Reservation Line	34.894	35.233	0.339	0.678	0.064	0.248	0.990							
ND 24	1	Jct 6 to S Fort Yates	0	8.849	8.849						93,445	11,161	22,403	127,009		14
ND 24	1	N Fort Yates to Jct 1806	10.113	29.914	19.801						209,099	23,829	64,474	297,402	960	
ND 24	1	Jct 1806 to Jct 6	29.914	45.046	15.132	30.264	3.290	11.747	45.301	28						
ND 31	1	State Line to Reservation Line	0.000	10.36	10.360	20.72	2.401	6.261	29.382							
ND 49	5	South Dakota Border to N Bridge	0.000	7.354	7.354		1.852	0.830	2.682							
<b>Standing Rock Total</b>					<b>96.729</b>	<b>121.450</b>	<b>15.542</b>	<b>41.852</b>	<b>179</b>	<b>28</b>	<b>302,544</b>	<b>34,990</b>	<b>86,877</b>	<b>424,411</b>	<b>960</b>	<b>14</b>

**PAVEMENT MARKING  
STANDING ROCK**

HWY	DISTRICT (#)	HIGHWAY DESCRIPTION	REFERENCE POINT (MILES)			PAINTED MESSAGE ARROW & ONLY (SF)
			FROM	TO	TOTAL	
ND 24	1	N Fort Yates to Jct 1806	10.113	29.914	19.801	228
<b>Standing Rock Total</b>					<b>19.801</b>	<b>228</b>

This document was originally issued and sealed by Nathan A. Haaland Registration Number PE- 7116, on 02/09/2016 and the original document is stored at the North Dakota Department of Transportation

Pavement Marking  
Standing Rock

NDDOT ABBREVIATIONS

? This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.

Abn abandoned  
 Abut abutment  
 Ac acres  
 Adj adjusted  
 Aggr aggregate  
 Ahd ahead  
 ARV air release valve  
 Align alignment  
 Al alley  
 Alt alternate  
 Alum aluminum  
 ADA Americans with Disabilities Act  
 A ampere  
 & and  
 Appr approach  
 Approx approximate  
 ACP asbestos cement pipe  
 Asph asphalt  
 AC asphalt cement  
 Assmd assumed  
 @ at  
 Atten attenuation  
 ATR automatic traffic recorder  
 Ave Avenue  
 Avg average  
 ADT average daily traffic  
 Az azimuth  
 Bk back  
 BF back face  
 Bs backsight  
 Balc balcony  
 B Wire barbed wire  
 Barr barricade  
 Btry battery  
 Brg bearing  
 BI beehive inlet  
 Beg begin  
 BM bench mark  
 Bkwy bikeway  
 Bit bituminous  
 Blk block  
 Bd Ft board feet  
 BH bore hole  
 BS both sides  
 Bot bottom  
 Blvd Boulevard  
 Bndry boundary  
 BC brass cap  
 Brkwy breakaway  
 Br bridge  
 Bldg building

BV butterfly valve  
 Byp bypass  
 C Gdrl cable guardrail  
 Calc calculate  
 Cd candela  
 CIP cast iron pipe  
 CB catch basin  
 CRS cationic rapid setting  
 C Gd cattle guard  
 C To C center to center  
 Cl or C centerline  
 Cm centimeter  
 Ch chain  
 Chnlk chain-link  
 Ch Blk channel block  
 Ch Ch channel change  
 Chk check  
 Chsld chiseled  
 Cir circle  
 Cl class  
 Cl clay  
 Cl F clay fill  
 Cl Hvy clay heavy  
 Cl Lm clay loam  
 Clnt clean-out  
 Clr clear  
 Cl&gr clearing & grubbing  
 Co S coal slack  
 Comb. combination  
 Coml commercial  
 Compr compression  
 CADD computer aided drafting & design  
 Conc concrete  
 Cond conductor  
 Const construction  
 Cont continuous  
 CSB continuous split barrel sample  
 Contr contraction  
 Contr contractor  
 CP control point  
 Coord coordinate  
 Cor corner  
 Corr corrected  
 CAES corrugated aluminum end section  
 CAP corrugated aluminum pipe  
 CMES corrugated metal end section  
 CMP corrugated metal pipe  
 CPVCP corrugated poly-vinyl chloride pipe  
 CSES corrugated steel end section  
 CSP corrugated steel pipe  
 C coulomb  
 Co County  
 Crse course  
 C Gr course gravel  
 CS course sand

Ct Court  
 Xarm cross arm  
 Xbuck cross buck  
 Xsec cross sections  
 Xing crossing  
 Xrd Crossroad  
 Crn crown  
 CF cubic feet  
 M3 cubic meter  
 M3/s cubic meters per second  
 CY cubic yard  
 Cy/mi cubic yards per mile  
 Culv culvert  
 C&G curb & gutter  
 CI curb inlet  
 CR curb ramp  
 CS curve to spiral  
 C cut  
 Dd Ld dead load  
 Defl deflection  
 Defm deformed  
 Deg or D degree  
 DInt delineate  
 DIntr delineator  
 Depr depression  
 Desc description  
 Det detail  
 DWP detectable warning panel  
 Dtr detour  
 Dia diameter  
 Dir direction  
 Dist distance  
 DM disturbed material  
 DB ditch block  
 DG ditch grade  
 Dbl double  
 Dn down  
 Dwg drawing  
 Dr drive  
 Drwy driveway  
 DI drop inlet  
 D dry density  
 Ea each  
 Esmt easement  
 E East  
 EB Eastbound  
 Elast elastomeric  
 EL electric locker  
 E Mtr electric meter  
 Elec electric/al  
 EDM electronic distance meter  
 Elev or El elevation  
 Ellipt elliptical  
 Emb embankment  
 Emuls emulsion/emulsified

ES end section  
 Engr engineer  
 ESS environmental sensor station  
 Eq equal  
 Eq equation  
 Evgr evergreen  
 Exc excavation  
 Exst existing  
 Exp expansion  
 Expy Expressway  
 E external of curve  
 Extru extruded  
 FOS factor of safety  
 F Fahrenheit  
 FS far side  
 F farad  
 Fed Federal  
 FP feed point  
 Ft feet/foot  
 Fn fence  
 Fn P fence post  
 FO fiber optic  
 FB field book  
 FD field drive  
 F fill  
 FAA fine aggregate angularity  
 FS fine sand  
 FH fire hydrant  
 Fl flange  
 Flrd flared  
 FES flared end section  
 F Bcn flashing beacon  
 FA flight auger sample  
 FL flow line  
 Ftg footing  
 FM force main  
 Fs foresight  
 Fnd found  
 Fdn foundation  
 Frac fractional  
 Frwy freeway  
 Frt front  
 FF front face  
 F Disp fuel dispenser

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation



NDDOT ABBREVIATIONS

D-101-2

FFP	fuel filler pipes	IPn	Iron Pin	MC	medium curing	Ped	pedestal
FLS	fuel leak sensor	IP	iron Pipe	M	mega	Ped	pedestrian
Furn	furnish/ed	Jt	joint	Mer	meridian	PPP	pedestrian pushbutton post
Gal	gallon	J	joule	M	meter	Pen.	penetration
Galv	galvanized	Jct	junction	M/s	meters per second	Perf	perforated
Gar	garage	K	kelvin	M	mid ordinate of curve	Per.	perimeter
Gs L	gas line	Kn	kilo newton	Mi	mile	PL	pipeline
G Reg	gas line regulator	Kpa	kilo pascal	MM	mile marker	PI	place
GMV	gas main valve	Kg	kilogram	MP	mile post	P&P	plan & profile
G Mtr	gas meter	Kg/m3	kilogram per cubic meter	MI	milliliter	PL	plastic limit
GSV	gas service valve	Km	kilometer	Mm	millimeter	PI	plate
GVP	gas vent pipe	K	Kip(s)	Mm/hr	millimeters per hour	Pt	point
GV	gate valve	LS	Land Surveyor (licensed)	Min	minimum	PCC	point of compound curve
Ga	gauge	LSIT	Land Surveyor In Training	Misc	miscellaneous	PC	point of curve
Geod	geodetic	Ln	lane	Mon	monument	PI	point of intersection
GIS	Geographical Information System	Lg	large	Mnd	mound	PRC	point of reverse curvature
G	giga	Lat	latitude	Mtbl	mountable	PT	point of tangent
GPS	Global Positioning System	Lt	left	Mtd	mounted	POC	point on curve
Gov	government	L	length of curve	Mtg	mounting	POT	point on tangent
Grd	graded/grade	Lens	lenses	Mk	muck	PE	polyethylene
Gr	gravel	Lvl	level	Mun	municipal	PVC	polyvinyl chloride
Grnd	ground	LB	level book	N	nano	PCC	Portland Cement concrete
GWM	ground water monitor	Lvng	leveling	NGS	National Geodetic Survey	Lb or #	pounds
Gdrl	guardrail	Lht	light	NS	near side	PP	power pole
Gtr	gutter	LP	light pole	Neop	neoprene	Preempt	preemption
H Plg	H piling	Ltg	lighting	Ntwk	network	Prefab	prefabricated
Hdwl	headwall	Lig Co	lignite coal	N	newton	Prfmd	performed
Ha	hectare	Lig Sl	lignite slack	N	North	Prep	preparation
Ht	height	LF	linear foot	NE	North East	Press.	pressure
HI	height of instrument	Liq	liquid	NW	North West	PRV	pressure relief valve
Hel	helical	LL	liquid limit	NB	Northbound	Prestr	prestressed
H	henry	L	litre	No. or #	number	Pvt	private
HZ	hertz	Lm	loam	Obsc	obscure(d)	PD	private drive
HDPE	high density polyethylene	Loc	location	Obsn	observation	Prod.	production/produce
HM	high mast	LC	long chord	Ocpd	occupied	Prog	programmed
HP	high pressure	Long.	longitude	Ocpy	occupy	Prop.	property
HPS	high pressure sodium	Lp	loop	Off Loc	office location	Prop Ln	property line
Hwy	highway	LD	loop detector	O/s	offset	Ppsd	proposed
Hor	horizontal	Lm	lumen	OC	on center	PB	pull box
HBP	hot bituminous pavement	Lum	luminaire	C	one dimensional consolidation		
HMA	hot mix asphalt	L Sum	lump sum	OC	organic content		
Hr	hour(s)	Lx	lux	Orig	original		
Hyd	hydrant	ML	main line	O To O	out to out		
Ph	hydrogen ion content	M Hr	man hour	OD	outside diameter		
Id	identification	MH	manhole	OH	overhead		
In or "	inch	Mkd	marked	PMT	pad mounted transformer		
Incl	inclinometer tube	Mkr	marker	Pg	pages		
IMH	inlet manhole	Mkg	marking	Pntd	painted		
ID	inside diameter	MA	mast arm	Pr	pair		
Inst	instrument	Matl	material	Pnl	panel		
Intchg	interchange	Max	maximum	Pk	park		
Intmdt	intermediate	MC	meander corner	PK	Parker-Kalon nail		
Intscn	intersection	Meas	measure	Pa	pascal		
Inv	invert	Mdn	median	PSD	passing sight distance		
IM	iron monument	MD	median drain	Pvmt	pavement		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

Qty	quantity	SN	sign number	Tan	tangent	Wb	weber
Qtr	quarter	Sig	signal	T	tangent (semi)	WIM	weigh in motion
Rad or R	radius	Si Cl	silt clay	TS	tangent to spiral	W	west
RR	railroad	Si Cl Lm	silty clay loam	Tel	telephone	WB	westbound
Rlwy	railway	Si Lm	silty loam	Tel B	Telephone Booth	Wrng	wiring
Rsd	raised	Sgl	single	Tel P	telephone pole	W/	with
RTP	random traverse point	SC	slow curing	Tv	television	W/o	without
Rge or R	range	SS	slow setting	Temp	temperature	WC	witness corner
RC	rapid curing	Sm	small	Temp	temporary	WGS	world geodetic system
Rec	record	S	South	TBM	temporary bench mark	Z	zenith
Rcy	recycle	SE	South East	T	tesla		
RAP	recycled asphalt pavement	SW	South West	T	thinwall tube sample		
RPCC	recycled portland cement concrete	SB	Southbound	T/mi	tons per mile		
Ref	reference	Sp	spaces	Ts	topsoil		
R Mkr	reference marker	Spcl	special	Twp or T	township		
RM	reference monument	SA	special assembly	Traf	traffic		
Refl	reflectorized	SP	special provisions	TSCB	traffic signal control box		
RCB	reinforced concrete box	G	specific gravity	Tr	trail		
RCES	reinforced concrete end section	Spk	spike	Transf	transformer		
RCP	reinforced concrete pipe	SC	spiral to curve	TB	transit book		
RCPS	reinforced concrete pipe sewer	ST	spiral to tangent	Trans	transition		
Reinf	reinforcement	SB	split barrel sample	TT	transmission tower		
Res	reservation	SH	sprinkler head	Trans	transverse		
Ret	retaining	SV	sprinkler valve	Trav	traverse		
Rev	reverse	Sq	square	TP	traverse point		
Rt	right	SF	square feet	Trtd	treated		
R/W	right of way	Km2	square kilometer	Trmt	treatment		
Riv	river	M2	square meter	Qc	triaxial compression		
Rd	road	SY	square yard	TERO	tribal employment rights ordinance		
Rdbd	road bed	Stk	stake	Tpl	triple		
Rdwy	roadway	Std	standard	TP	turning point		
RWIS	roadway weather information system	N	standard penetration test	Typ	typical		
Rk	rock	Std Specs	standard specifications	Qu	unconfined compressive strength		
Rt	route	Sta	station	Ugrnd	underground		
Salv	salvage(d)	Sta Yd	station yards	USC&G	US Coast & Geodetic Survey		
Sd	sand	Stm L	steam line	USGS	US Geologic Survey		
Sdy Cl	sandy clay	SEC	steel encased concrete	Util	utility		
Sdy Cl Lm	sandy clay loam	SMA	stone matrix asphalt	VG	valley gutter		
Sdy Fl	sandy fill	SSD	stopping sight distance	Vap	vapor		
Sdy Lm	sandy loam	SD	storm drain	Vert	vertical		
San	sanitary sewer line	St	street	VC	vertical curve		
Sc	scoria	SPP	structural plate pipe	VCP	vitrified clay pipe		
Sec	seconds	SPPA	structural plate pipe arch	V	volt		
Sec	section	Str	structure	Vol	volume		
SL	section line	Subd	subdivision	Wkwy	walkway		
Sep	separation	Sub	subgrade	W	water content		
Seq	sequence	Sub Prep	subgrade preperation	WGV	water gate valve		
Serv	service	Ss	subsoil	WL	water line		
Sh	shale	SE	superelevation	WM	water main		
Sht	sheet	SS	supplement specification	WMV	water main valve		
Shtng	sheeting	Supp	supplemental	W Mtr	water meter		
Shldr	shoulder	Surf	surfacing	WSV	water service valve		
Sw	sidewalk	Surv	survey	WW	water well		
S	siemens	Sym	symmetrical	W	watt		
SD	sight distance	SI	systems international	Wrng	wearing		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 08/03/15 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM 702 Communications  
 ACCENT Accent Communications  
 AGASSIZ WU Agassiz Water Users Incorporated  
 AGC Associated General Contractors of America  
 All PI Alliance Pipeline  
 ALL SEAS WU All Seasons Water Users Association  
 AMOCO PI Amoco Pipeline Company  
 AMRDA HESS Amerada Hess Corporation  
 AT&T AT&T Corporation  
 B PAW Bear Paw Energy Incorporated  
 BAKER ELEC Baker Electric  
 BASIN ELEC Basin Electric Cooperative Incorporated  
 BEK TEL Bek Communications Cooperative  
 BELLE PL Belle Fourche Pipeline Company  
 BLM Bureau of Land Management  
 BNSF Burlington Northern Santa Fe Railway  
 BOEING Boeing  
 BRNS RWD Barnes Rural Water District  
 BURK-DIV ELEC Burke-Divide Electric Cooperative  
 BURL WU Burleigh Water Users  
 Cable One Cable One  
 CABLE SERV Cable Services  
 CAP ELEC Capital Electric Cooperative Incorporat  
 CASS CO ELEC Cass County Electric Cooperative  
 CASS RWU Cass Rural Water Users Incorporated  
 CAV ELEC Cavalier Rural Electric Cooperative  
 CBLCOM Cablecom Of Fargo  
 CENEX PL Cenex Pipeline  
 CENT PL WATER DIST Central Pipe Line Water District  
 CENT PWR ELEC Central Power Electric Cooperative  
 COE Corps of Engineers  
 CONS TEL Consolidated Telephone  
 CONT RES Continental Resource Inc  
 CPR Canadian Pacific Railway  
 D O E Department Of Energy  
 DAK CARR Dakota Carrier Network  
 DAK CENT TEL Dakota Central Telephone  
 DAK RWD Dakota Rural Water District  
 DGC Dakota Gasification Company  
 DICKEY R NET Dickey Rural Networks  
 DICKEY RWU Dickey Rural Water Users Association  
 DICKEY TEL Dickey Telephone  
 DNRR Dakota Northern Railroad  
 DOME PL Dome Pipeline Company  
 DVELEC Dakota Valley Electric Cooperative  
 DVMW Dakota, Missouri Valley & Western  
 ENBRDG Enbridge Pipelines Incorporated  
 ENVENTIS Enventis Telephone  
 FALK MNG Falkirk Mining Company  
 FHWA Federal Highway Administration  
 G FKS-TRL WD Grand Forks-traill Water District  
 GETTY TRD & TRAN Getty Trading & Transportation  
 GLDN W ELEC Golden West Electric Cooperative  
 GRGS CO TEL Griggs County Telephone

GT PLNS NAT GAS Great Plains Natural Gas Company  
 HALS TEL Halstad Telephone Company  
 IDEA1 Idea1  
 INT-COMM TEL Inter-Community Telephone Company  
 KANEB PL Kaneb Pipeline Company  
 KEM ELEC Kem Electric Cooperative Incorporated  
 KOCH GATH SYS Koch Gathering Systems Incorporated  
 LKHD PL Lakehead Pipeline Company  
 LNGDN RWU Langdon Rural Water Users Incorporated  
 LWR YELL R ELEC Lower Yellowstone Rural Electric  
 MCKNZ CON McKenzie Consolidated Telcom  
 MCKENZIE ELEC McKenzie Electric Cooperative  
 MCKNZ WRD McKenzie County Water Resource District  
 MCLEOD McLeod USA  
 MCLN ELEC McLean Electric Cooperative  
 MCLN-SHRDN R WAT McLean-Sheridan Rural Water  
 MDU Montana-dakota Utilities  
 MID-CONT CABLE Mid-Continent Cable  
 MIDSTATE TEL Midstate Telephone Company  
 MINOT CABLE Minot Cable Television  
 MINOT TEL Minot Telephone Company  
 MISS W W S Missouri West Water System  
 MNKOTA PWR Minnkota Power  
 MOR-GRAN-SOU ELEC Mor-gran-sou Electric Cooperative  
 MOUNT-WILLI ELEC Mountrail-williams Electric Cooperative  
 MRE LBTY TEL Moore & Liberty Telephone  
 MUNICIPAL City Water And Sewer  
 MUNICIPAL City Of '.....'  
 N CENT ELEC North Central Electric Cooperative  
 N VALL W DIST North Valley Water District  
 ND PKS & REC North Dakota Parks And Recreation  
 ND TEL North Dakota Telephone Company  
 NDDOT North Dakota Department of Transportation  
 NDSU SOIL SCI DEPT NDSU Soil Science Department  
 NEMONT TEL Nemont Telephone  
 NODAK R ELEC Nodak Rural Electric Cooperative  
 NOON FRMS TEL Noonan Farmers Telephone Company  
 NPR Northern Plains Railroad  
 NSP Northern States Power  
 NTH PRAIR RW Northern Prairie Rural Water Association  
 NTHN BRDR PL Northern Border Pipeline  
 NTHN PLNS ELEC Northern Plains Electric Cooperative Incorporated  
 NTHWSTRN REF Northwestern Refinery Company  
 NW COMM Northwest Communication Cooperation  
 ONEOK Oneok gas  
 OSHA Occupational Safety and Health Administration  
 OTTR TL PWR Otter Tail Power Company  
 P L E M Prairielands Energy Marketing  
 POLAR COM Polar Communications  
 PVT ELEC Private Electric  
 QWEST Qwest Communications  
 R&T W SUPPLY R & T Water Supply Association  
 RAMSEY R SEW Ramsey Rural Sewer Association  
 RAMSEY RW Ramsey Rural Water Association  
 RAMSEY UTIL Ramsey County Rural Utilities

RED RIV TEL Red River Rural Telephone  
 RESVTN TEL Reservation Telephone  
 ROBRTS TEL Roberts Company Telephone  
 R-RIDER ELEC Roughrider Electric Coop  
 RRVW Red River Valley & Western Railroad  
 RSR ELEC R.S.R. Electric Cooperative  
 S E W U South East Water Users Incorporated  
 SCOTT CABLE Scott Cable Television Dickinson  
 SHERDN ELEC Sheridan Electric Cooperative  
 SHEYN VLY ELEC Sheyenne Valley Electric Cooperative  
 SKYTECH Skyland Technologies Incorporated  
 SLOPE ELEC Slope Electric Cooperative Incorporated  
 SOURIS RIV TELCOM Souris River Telecommunications  
 ST WAT COMM State Water Commission  
 STATE LN WATER State Line Water Cooperative  
 STER ENG Sterling Energy  
 STUT RWU Stutsman Rural Water Users  
 SW PL PRJ Southwest Pipeline Project  
 T M C Turtle Mountain Communications  
 TCI TCI of North Dakota  
 TESORO GHG PLNS PL Tesoro High Plains Pipeline  
 TRI-CNTY WU Tri-County Water Users Incorporated  
 TRL CO RWU Traill County Rural Water Users  
 UNTD TEL United Telephone  
 UPPR SOUR WUA Upper Souris Water Users Association  
 US SPRINT U.S. Sprint  
 USAF MSL CABLE U.S.A.F. Missile Cable  
 USFWS US Fish and Wildlife Service  
 USW COMM U.S. West Communications  
 VRNDRY ELEC Verendrye Electric Cooperative  
 W RIV TEL West River Telephone Incorporated  
 WEB W. E. B. Water Development Association  
 WILLI RWA Williams Rural Water Association  
 WILSTN BAS PL Williston Basin Interstate Pipeline Company  
 WLSH RWD Walsh Water Rural Water District  
 WOLVRTN TEL Wolverton Telephone  
 XLENER Xcel Energy  
 YSVR Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation
























































Line Styles

.....	Limits of Const Transition Line	—— s —— s ——	Floating Silt Curtain	—— ——— ———	Existing Aggregate (Cross Section View)	- - - - -	Existing Centerline
.....	Bale Check	—— ——— T ——	Existing Telephone Line	—— ——— ———	Existing Curb and Gutter (Cross Section View)	- - - - -	Supplemental Contour
.....	Rock Check	—— ——— TV ——	Existing TV Line	—— ——— ———	Existing Riprap	—— - - - - -	Right of Way
.....	Sight Distance Triangle Line	Void — void — void — v	Existing Assumed Ground (Not Surveyed)	—— ——— ———	Existing Underground Vault or Lift Station	—— - - - - -	Existing Right of Way
- - - - -	Small Hidden Object	Void — void — void — v	Tentative Ground Line	—— ——— ———	Tangent Line	—— - - - - -	Existing Right of Way Railroad
- - - - -	Dimension Leader	—— ——— w ——	Existing Water or Steam Line	- - - - -	Hidden Object	- - - - -	Failure Line
- - - - -	Existing Ground	=====	Existing Under Drain	—— ——— ———	Existing Dirt Surface	- - - - -	Existing Conditions
- - - - -	Existing Topsoil (Cross Section View)	=====	Under Drain	—— ——— ———	Existing Conduit	- - - - -	Existing Ground (Details)
—— ——— ———	Large Hidden Object	=====	Wall	—— ——— ———	Topsoil Profile	—— - - - - -	Existing Sixteenth Section Line
—— ——— ———	Edge Drain	=====	Existing Slotted Drain	- - - - -	Existing Conductor	- - - - -	Existing Right of Way Not State Owned
—— D —— D ——	Geotextile Fabric Type D	—— + —— + ——	Existing Cemetary Boundary	- - - - -	Conductor	- - - - -	Phantom Object
—— ——— E ——	Existing Electrical	—— ——— ———	Centerline Pavement Marking	- - - - -	Fiber Optic	- - - - -	Centerline Main
—— ——— FO ——	Existing Fiber Optic Line	=====	Barrier with Centerline Pavement Marking	- - - - -	Existing Loop Detector	- . . . .	Existing Guardrail Cable
—— ——— FO ——	Existing TV Fiber Optic	=====	Barrier Pavement Marking	- - - - -	Subgrade, Subcut or Ditch Grade	— . — . — . — .	Existing Guardrail Metal
—— ——— G ——	Existing Gas Pipe	- - - - -	Stripe 4 IN Dotted Extension White	—— ——— ———	Existing Asphalt Surface	—— . ——— . ——— .	Existing Edge of Water
—— ——— <b>Geo</b> —— <b>Geo</b> ——	Geogrid	- - - - -	Stripe 8 IN Dotted Extension White	—— ——— ———	Existing Asphalt (Cross Section View)	- - - - -	Excavation Limits
—— ——— OH ——	Existing Overhead Utility Line	- - - - -	Stripe 8 IN Lane Drop	—— ——— ———	Existing Reinforcement Rebar	—— . . . . .	Existing Government Lot Line
—— ——— P ——	Existing Power	—— ——— ———	Wetland Mitigation	—— ——— ———	Existing Tie Point Line	.....	Existing Adjacent Block Lines
—— ——— PL ——	Existing Fuel Pipeline	- - - - -	Existing Box Culvert Bridge	—— ——— ———	Existing State or International Line	.....	Existing Adjacent Lot Lines
—— ——— <b>PL</b> ——	Existing Undefined Above Ground Pipe Line	- - - - -	Existing Concrete Surface	—— ——— ———	Existing Quarter Section Line	.....	Existing Adjacent Property Line
—— ——— R —— R ——	Geotextile Fabric Type R	- - - - -	Existing Drainage Structure	—— ——— ———	Existing County	.....	Existing Adjacent Subdivision Lines
—— ——— R —— R ——	Geotextile Fabric Type R1	- - - - -	Easement	—— ——— ———	Existing Section Line	.....	
—— REMOVE —— REMOVE ——	Remove Line	- - - - -	Existing Concrete	—— ——— ———	Existing Township	.....	
—— ——— RR —— RR ——	Geotextile Fabric Type RR	- - - - -	Existing Easement	—— ——— ———	Existing Railroad Centerline	.....	
—— ——— S —— S ——	Geotextile Fabric Type S	—— ——— ———	Existing Gravel Surface	—— ——— ———	Centerline	.....	

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Line Styles

	Subgrade Reinforcement		Existing Railroad Switch		Sheet Piling
	Existing Down Guy Wire Down Guy		Overhead Sign Structure Cantilever		W-Beam w Posts
	Existing Fence		24 Inch Pipe		Existing W-Beam Guardrail with Posts
	Existing Railroad		Reinforced Concrete Pipe		Exst Wet Area-Vegetation Break
	Existing Sanitary Sewer		Signal Head with Mast Arm		Existing Wetland Delineated
	Existing Sanitary Force Main		Existing Signal Head with Mast Arm		
	Existing Storm Drain		Tie Bar at Random Spacing		
	Existing Storm Drain Force Main		3-Cable w Posts		
	Fence		Existing 3-Cable w Posts		
	Silt Fence		Site Boundary		
	Existing Field Line		Fiber Rolls		
	Exst Flow		Doweled Joint		
	Flow		Tie Bar 30 Inch 4 Foot Center to Center		
	Existing Culvert		Tie Bar 18 Inch 3 Foot Center to Center		
	Existing Curb		Existing Berm, Dike, Pit, or Earth Dam		
	Existing Valley Gutter		Existing Ditch Block		
	Existing Driveway Gutter		Depression Contours		
	Existing Curb and Gutter		Existing City Corporate Limits or Reservation Boundary		
	Existing Mountable Curb and Gutter		Gravel Pit - Borrow Area		
	Existing Double Micro Loop Detector		Existing Tree Boundary		
	Micro Loop Detector Double		Tree Row		
	Existing Overhead Sign Structure		Existing Brush or Shrub Boundary		
	Existing Micro Loop Detector		Existing Retaining Wall		
	Micro Loop Detector		Existing Planter or Wall		
	Existing Overhead Sign Structure Cantilever		Retaining Wall (Plan View)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation









































Symbols

	North Arrow (Half Scale)		Attenuation Device		Existing Railroad Battery Box		Existing Delineator Type E
	Truck Mounted Attenuator		Diamond Grade Delineator Type A		Existing Bush or Shrub		Existing EFB Misc
	Type I Barricade		Diamond Grade Delineator Type B		Existing Gas Cap or Stub		Existing Flashing Beacon
	Type II Barricade		Diamond Grade Delineator Type C		Existing Sanitary Cap or Stub		Existing Pipe Mounted Flasher
	Type III Barricade		Diamond Grade Delineator Type D		Existing Storm Drain Cap or Stub		Existing Pad Mounted Feed Point
	Catch Basin		Diamond Grade Delineator Type E		Existing Water Cap or Stub		Existing Pipe Mounted Feed Point with Pad
	Cairn or Stone Circle		Flexible Delineator		Existing Sanitary Cleanout		Existing Pole Mounted Feed Point
	Video Detection Camera		Flexible Delineator Type A		Existing Concrete Foundation		Existing Railroad Frog
	Storm Drain Cap or Stub		Flexible Delineator Type B		Existing Traffic Signal Controller		Existing Snow Gate 18
	Corrugated Metal End Section 18 Inch		Flexible Delineator Type C		Existing Pad Mounted Signal Controller		Existing Snow Gate 28
	Corrugated Metal End Section 24 Inch		Flexible Delineator Type D		Existing Sixteenth Section Corner		Existing Snow Gate 40
	Corrugated Metal End Section 30 Inch		Flexible Delineator Type E		Existing Quarter Section Corner		Existing Headwall
	Corrugated Metal End Section 36 Inch		Delineator Type A		Existing Section Corner		Existing Pedestrian Head with Number
	Corrugated Metal End Section 42 Inch		Delineator Type A Reset		Existing Railroad Crossbuck		Existing Signal Head
	Corrugated Metal End Section 48 Inch		Delineator Type B		Existing Satellite Dish		Existing Sprinkler Head
	Concrete Foundation		Delineator Type B Reset		Existing Fuel Dispensers		Existing Fire Hydrant
	Ground Connection Conductor		Delineator Type C		Existing Flexible Delineator Type A		Existing Catch Basin Drop Inlet
	Neutral Connection Conductor		Delineator Type D		Existing Flexible Delineator Type B		Existing Curb Inlet
	Phase 1 Connection Conductor		Delineator Type E		Existing Flexible Delineator Type C		Existing Manhole Inlet
	Phase 2 Connection Conductor		Delineator Drums		Existing Flexible Delineator Type D		Existing Junction Box
	Traffic Cone		Spot Elevation		Existing Flexible Delineator Type E		
	Signal Controller		Existing Access Control Arrow		Existing Delineator Type A		
	Pad Mounted Signal Controller		Existing Artifact		Existing Delineator Type B		
	Alignment Data Point		Existing Flashing Beacon		Existing Delineator Type C		
	Emergency Vehicle Detector		Existing Benchmark		Existing Delineator Type D		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols
































































































	Existing Light Standard		Existing Manhole with Valve Water		Existing Telephone Pole		Existing Undefined Manhole
	Existing High Mast Light Standard 10 Luminaire		Existing Water Manhole		Existing Wood Pole		Existing Undefined Pull Box
	Existing High Mast Light Standard 3 Luminaire		Existing Mile Post Type A		Existing Post		Existing Undefined Pedestal
	Existing High Mast Light Standard 4 Luminaire		Existing Mile Post Type B		Existing Pedestrian Push Button Post		Existing Undefined Valve
	Existing High Mast Light Standard 5 Luminaire		Existing Mile Post Type C		Existing Control Point CP		Existing Undefined Pipe Vent
	Existing High Mast Light Standard 6 Luminaire		Existing Reference Marker		Existing Control Point GPS-RTK		Existing Gas Valve
	Existing High Mast Light Standard 7 Luminaire		Existing RW Marker		Existing Control Point TRI		Existing Water Valve
	Existing High Mast Light Standard 8 Luminaire		Existing Utility Marker		Existing Reference Marker Point NGS		Existing Fuel Pipe Vent
	Existing High Mast Light Standard 9 Luminaire		Iron Monument Found		Existing Pull Box		Existing Gas Pipe Vent
	Existing Overhead Sign Structure Load Center		Iron Pin R/W Monument		Existing Intelligent Transportation Pull Box		Existing Sanitary Pipe Vent
	Existing Luminaire		Existing Object Marker Type I		Existing Water Pump		Existing Storm Drain Pipe Vent
	Existing Light Standard Luminaire		Existing Object Marker Type II		Existing Slotted Reinforced Concrete Pipe		Existing Water Pipe Vent
	Existing Federal Mailbox		Existing Object Marker Type III		Existing RR Profile Spot		Existing Weather Station
	Existing Private Mailbox		Existing Electrical Pedestal		Existing Fuel Leak Sensors		Existing Ground Water Well Bore Hole
	Existing Meander Section Corner		Existing Telephone Pedestal		Existing Highway Sign		Existing Windmill or Tower
	Existing Meter		Existing Fiber Optic Telephone Pedestal		Existing Miscellaneous Spot		Existing Witness Corner
	Existing Electrical Manhole		Existing TV Pedestal		Existing Lighting Standard Pole		Flashing Beacon
	Existing Gas Manhole		Existing Fiber Optic TV Pedestal		Existing Traffic Signal Standard		Flagger
	Existing Sanitary Manhole		Existing Fuel Filler Pipes		Existing Transformer		Pipe Mounted Flasher
	Existing Sanitary Force Main Manhole		Existing Traverse PI Aerial Panel		Existing Large Evergreen Tree		Sanitary Force Main with Valve
	Existing Sanitary Manhole with Valve		Existing Pole		Existing Small Evergreen Tree		
	Existing Storm Drain Manhole		Existing Power Pole		Existing Large Tree		
	Existing Force Main Storm Drain Manhole		Existing Power Pole with Transformer		Existing Small Tree		
	Existing Force Main Storm Drain Manhole with Valve				Existing Tree Trunk		
	Existing Telephone Manhole				Existing Pad Mounted Traffic Signal Control Box		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

# Symbols

D-101-32

 Pad Mounted Feed Point  Pipe Mounted Feed Point with Pad  Pole Mounted Feed Point  Headwall  Double Headwall with Vegetation Barrier  Single Headwall with Vegetation Barrier  Pole Mounted Head  Sprinkler Head  Fire Hydrant  Inlet Type 1  Inlet Type 2  Double Inlet Type 2  Inlet Gate Type 2  Junction Box  High Mast Light Standard 10 Luminaire  High Mast Light Standard 3 Luminaire  High Mast Light Standard 4 Luminaire  High Mast Light Standard 5 Luminaire  High Mast Light Standard 6 Luminaire  High Mast Light Standard 7 Luminaire  High Mast Light Standard 8 Luminaire  High Mast Light Standard 9 Luminaire  Relocate Light Standard  Overhead Sign Structure Load Center  Light Standard 100 Watt High Pressure Sodium Vapor Luminaire	 Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire  Light Standard 150 Watt High Pressure Sodium Vapor Luminaire  Light Standard 175 Watt High Pressure Sodium Vapor Luminaire  Light Standard 200 Watt High Pressure Sodium Vapor Luminaire  Light Standard 250 Watt High Pressure Sodium Vapor Luminaire  Light Standard 310 Watt High Pressure Sodium Vapor Luminaire  Light Standard 35 Watt High Pressure Sodium Vapor Luminaire  Light Standard 400 Watt High Pressure Sodium Vapor Luminaire  Light Standard 50 Watt High Pressure Sodium Vapor Luminaire  Light Standard 70 Watt High Pressure Sodium Vapor Luminaire  Light Standard 700 Watt High Pressure Sodium Vapor Luminaire  Manhole  Manhole 48 Inch  Sanitary Force Main Manhole  Sanitary Sewer Manhole  Storm Drain Manhole  Storm Drain Manhole with Inlet  Reset Mile Post  Mile Post Type A  Mile Post Type B  Mile Post Type C  Right of Way Marker  Tubular Marker  Alignment Monument  Iron Pin Reference Monument	 Object Marker Type I  Object Marker Type II  Object Marker Type III  Caution Mode Arrow Panel  Back to Back Vertical Panel Sign  Double Direction Arrow Panel  Left Directional Arrow Panel  Right Directional Arrow Panel  Sequencing Arrow Panel  Truck Mounted Arrow Panel  Power Pole  Wood Pole  Pedestrian Push Button Post  Property Corner  Pull Box  Intelligent Transportation Pull Box  Sanitary Pump  Storm Drain Pump  Reinforced Pavement  Reinforced Concrete End Section 15 Inch  Reinforced Concrete End Section 18 Inch  Reinforced Concrete End Section 24 Inch  Reinforced Concrete End Section 30 Inch  Reinforced Concrete End Section 36 Inch  Reinforced Concrete End Section 42 Inch	 Reinforced Concrete End Section 48 Inch  Reinforced Concrete End Section 54 Inch  Reset Right of Way Marker  Reset USGS Marker  Right of Way Markers  Riser 30 Inch  Continuous Split Barrel Sample  Flight Auger Sample  Split Barrel Sample  Thinwall Tube Sample  Highway Sign  SNOW GATE 18 FT  SNOW GATE 28 FT  SNOW GATE 40 FT  Standard Penetration Test  Transformer  Inclinometer Tube  Underdrain Cleanout  Excavation Unit  Water Valve
---	--	---	--














NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by  
**Roger Weigel,**  
 Registration Number  
 PE-2930,  
 on 07/01/14 and the original document is stored at the  
 North Dakota Department  
 of Transportation



CONSTRUCTION SIGN DETAILS  
 TERMINAL AND GUIDE SIGNS

D-704-9

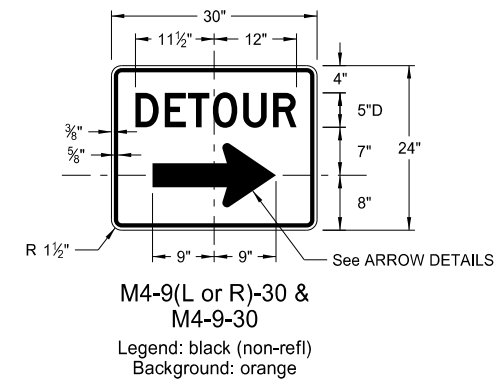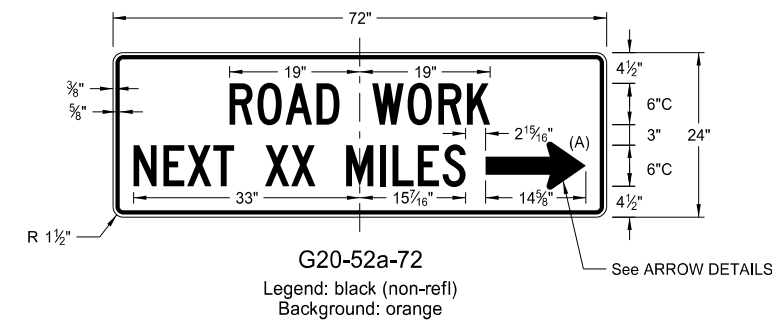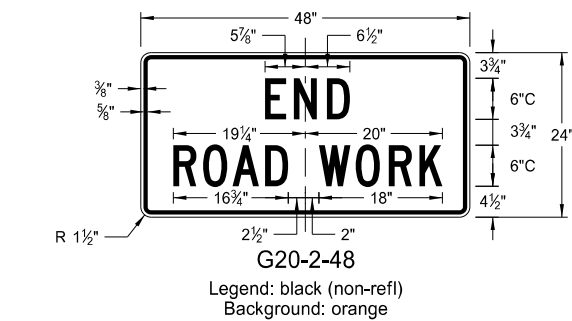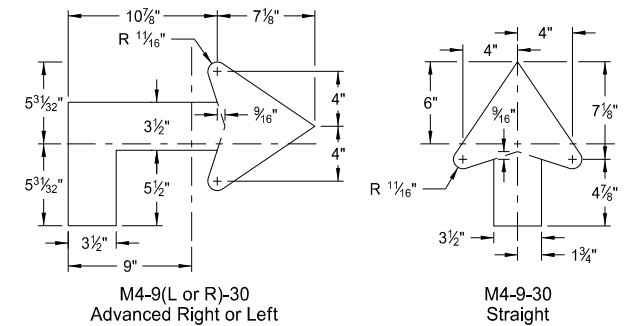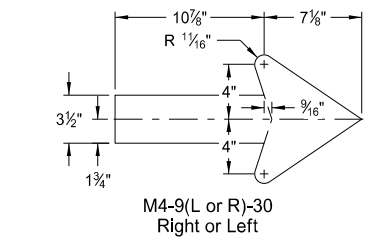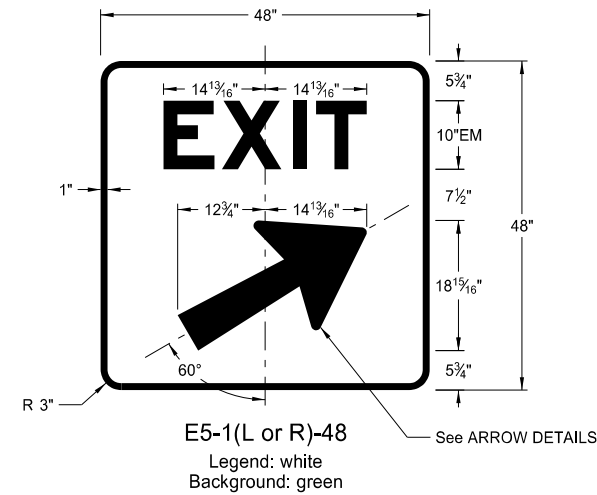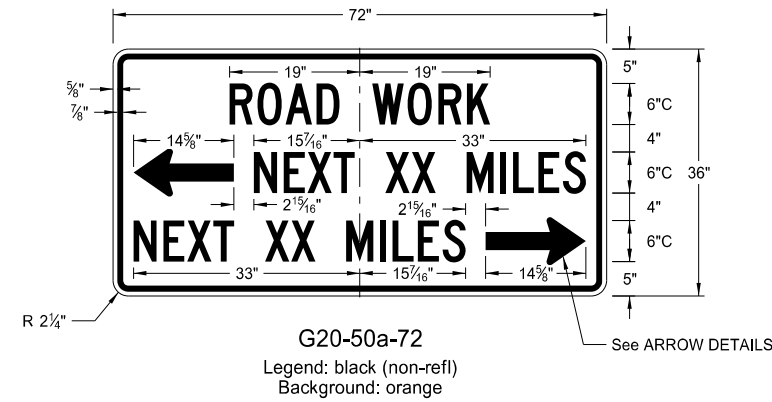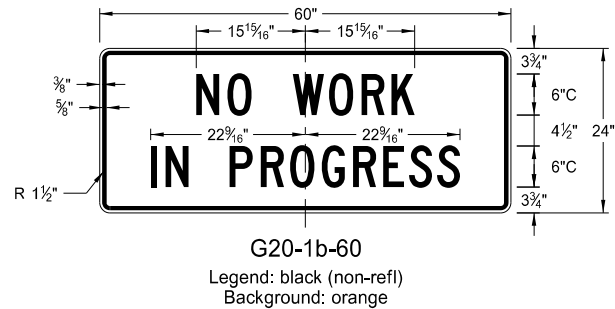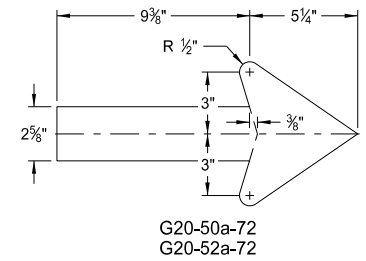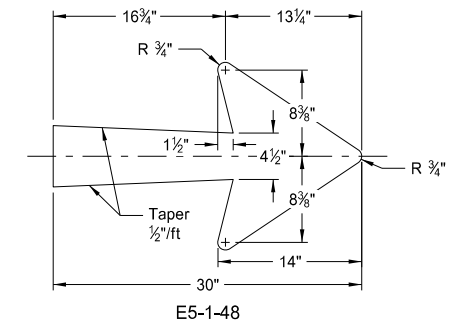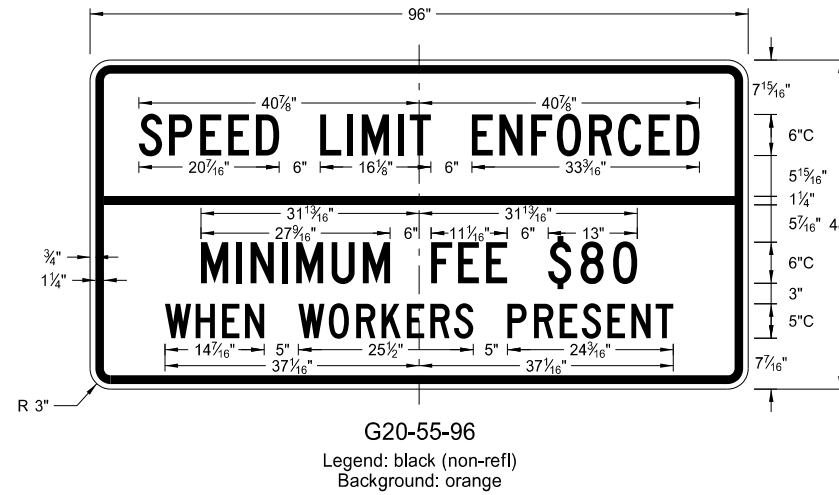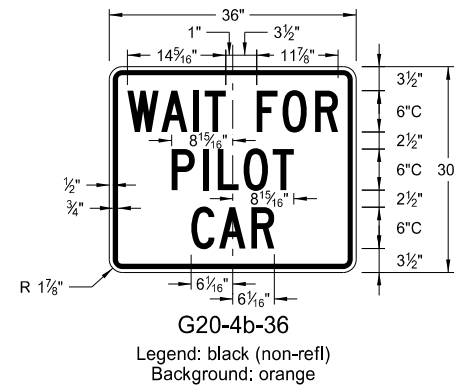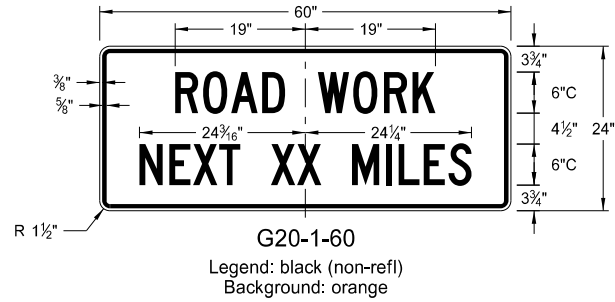

ARROW DETAILS

NOTES:


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS  
REGULATORY SIGNS


D-704-10

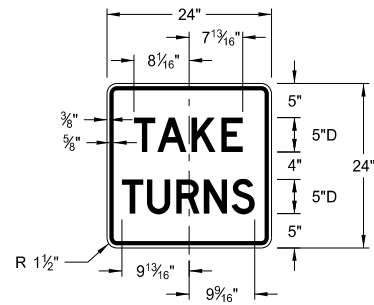


R1-50-24  
Legend: black (non-refl)  
Background: white

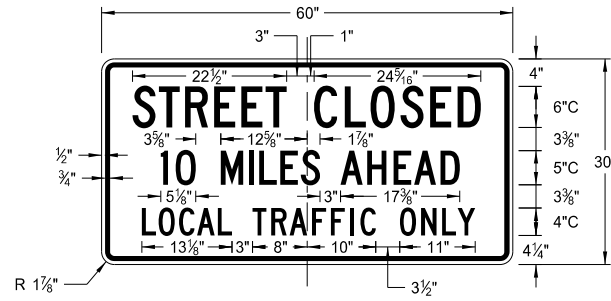


R11-3c-60  
Legend: black (non-refl)  
Background: white

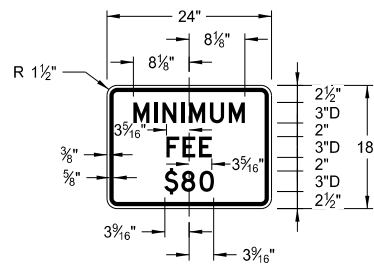

R2-1a-24  
Legend: black (non-refl)  
Background: white

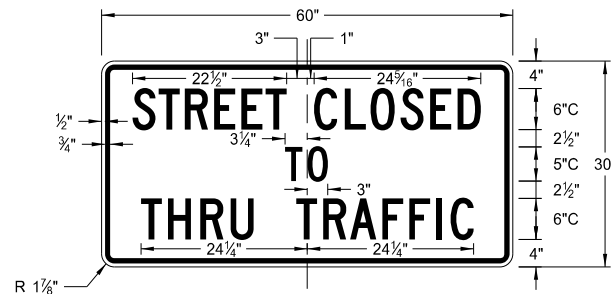

R11-4a-60  
Legend: black (non-refl)  
Background: white

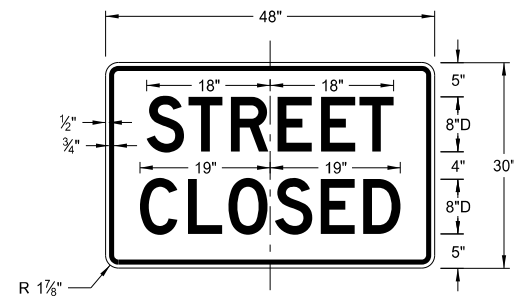

R11-2a-48  
Legend: black (non-refl)  
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS  
WARNING SIGNS

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


\* DISTANCE MESSAGES

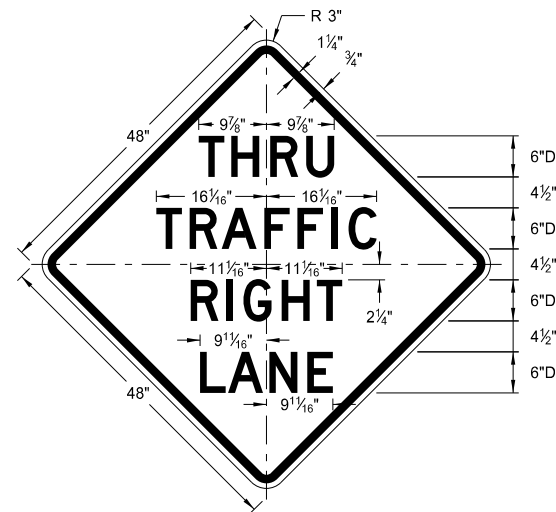


W5-8-48  
Legend: black (non-refl)  
Background: orange

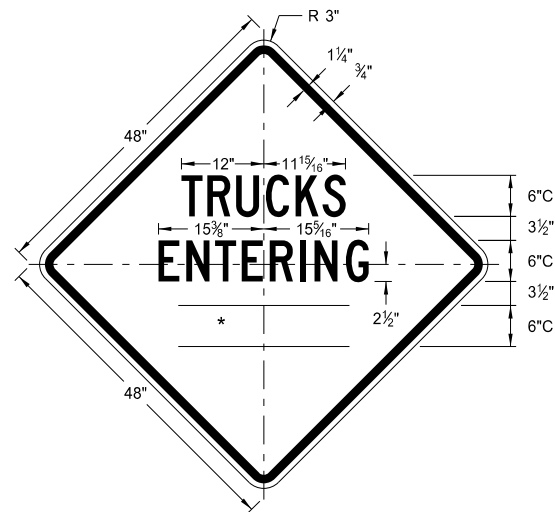


W8-54-48  
Legend: black (non-refl)  
Background: orange

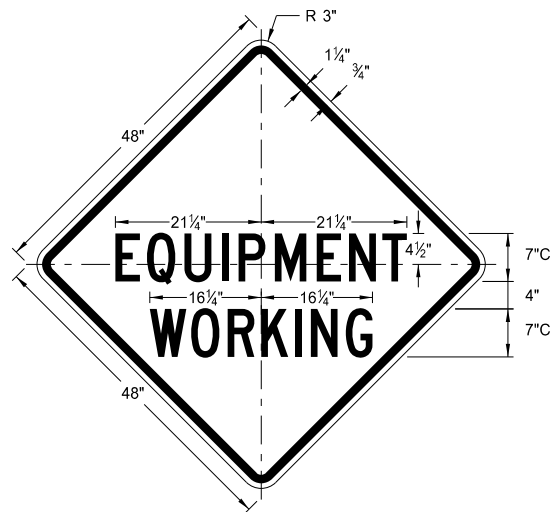


W20-51-48  
Legend: black (non-refl)  
Background: orange

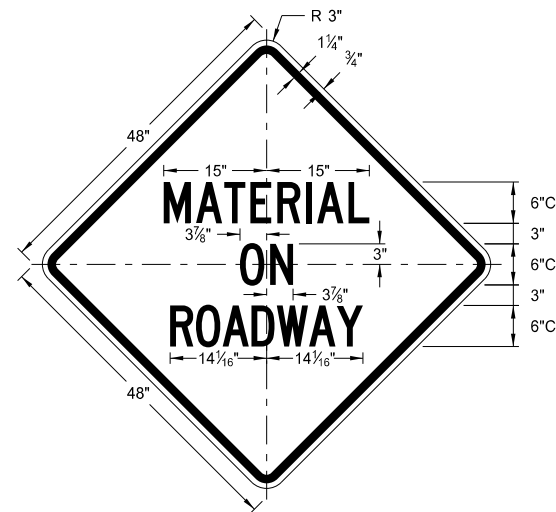


W21-51-48  
Legend: black (non-refl)  
Background: orange

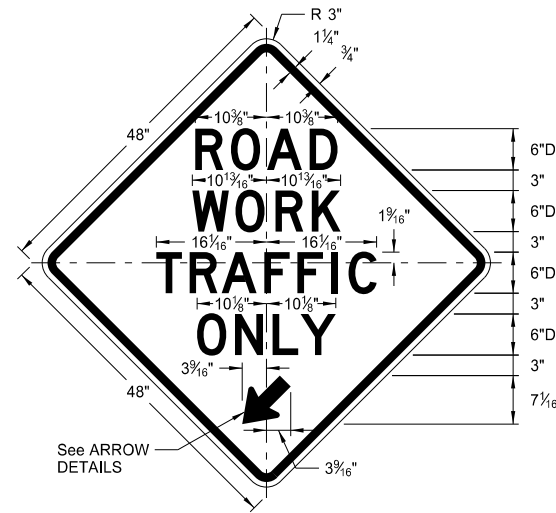


W5-9-48  
Legend: black (non-refl)  
Background: orange

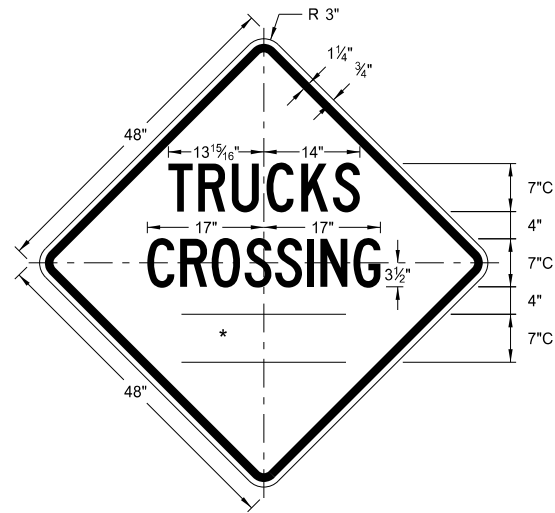


W8-55-48  
Legend: black (non-refl)  
Background: orange

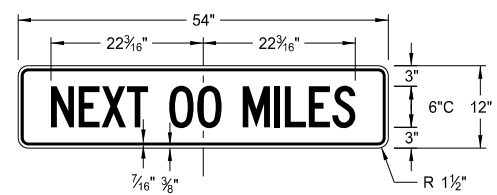


W20-52-54  
Legend: black (non-refl)  
Background: orange

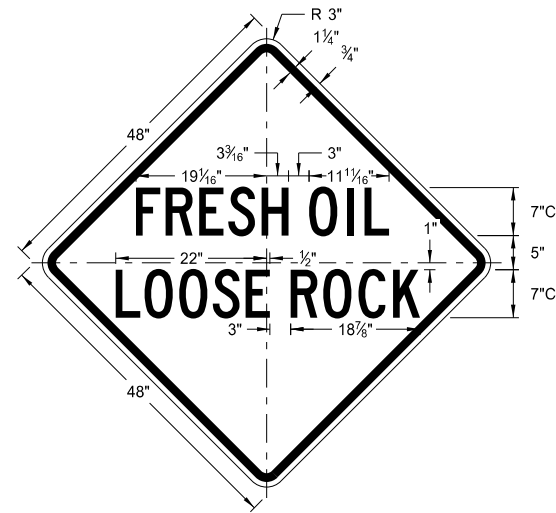


W22-8-48  
Legend: black (non-refl)  
Background: orange




W5-9-48  
ARROW DETAILS

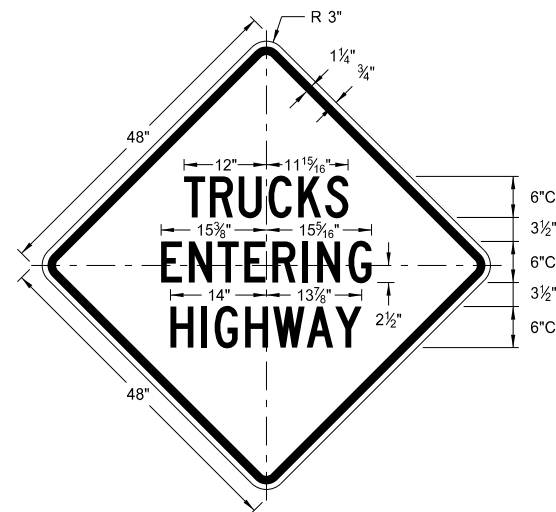

W8-53-48  
Legend: black (non-refl)  
Background: orange

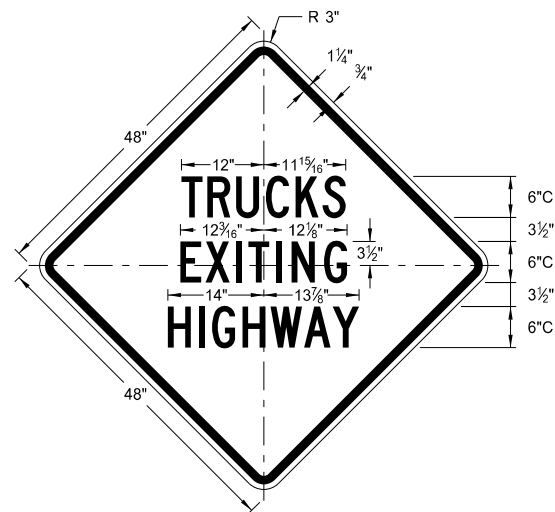

W8-56-48  
Legend: black (non-refl)  
Background: orange

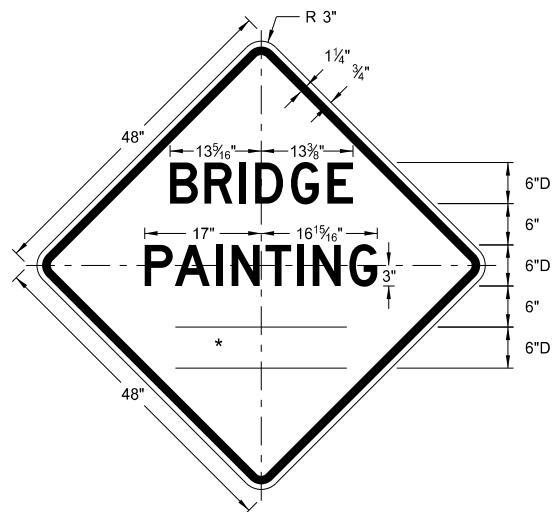


W21-50-48  
Legend: black (non-refl)  
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

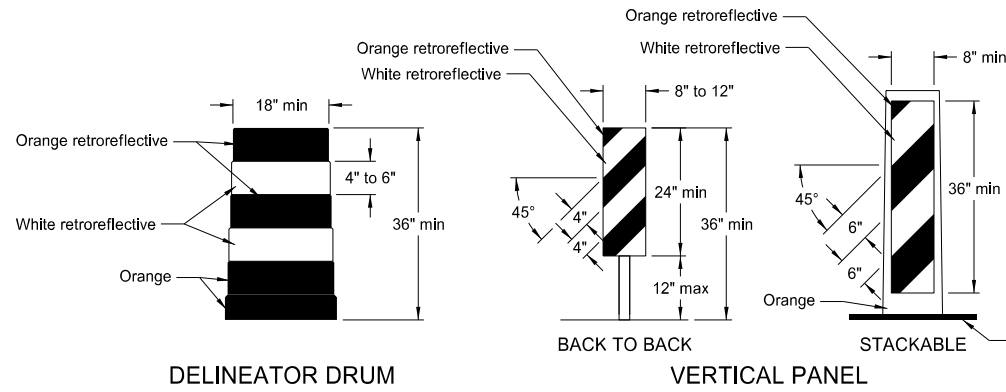


DELINEATOR DRUM

VERTICAL PANEL

The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED spaces between the horizontal orange and white stripes shall not exceed 3" wide. Stripes shall not be placed on ribs or indentations in the drum. Drums shall have closed tops that will not allow collection of construction debris or other debris. Ballast shall not be placed on the top of a drum.

Markings for vertical panels shall be alternating orange and white retroreflective stripes, sloping downward in the direction vehicular traffic is to pass. Retroreflective sheeting shall be placed on both sides of panel and shall have a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.

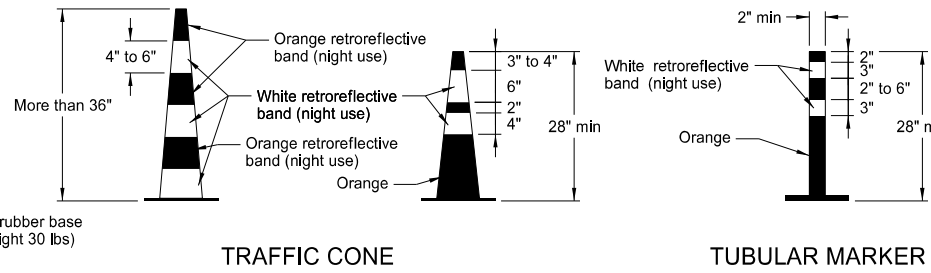


TRAFFIC CONE

TUBULAR MARKER

RetroreflectORIZATION of cones more than 36" in height shall be provided by alternating orange and white retroreflective stripes. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED space between the orange and white stripes shall not exceed 3" wide.


RetroreflectORIZATION of tubular markers more than 42" in height shall be provided by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

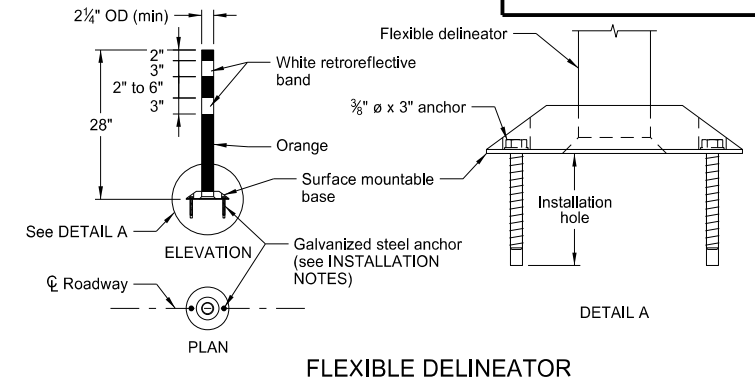

FLEXIBLE DELINEATOR

INSTALLATION NOTES:


1. Drill installation holes to diameter and depth as required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, the contractor may use an 8" x 8" butyl pad or hot melt butyl. Butyl shall be removed as close as possible to pavement surface.

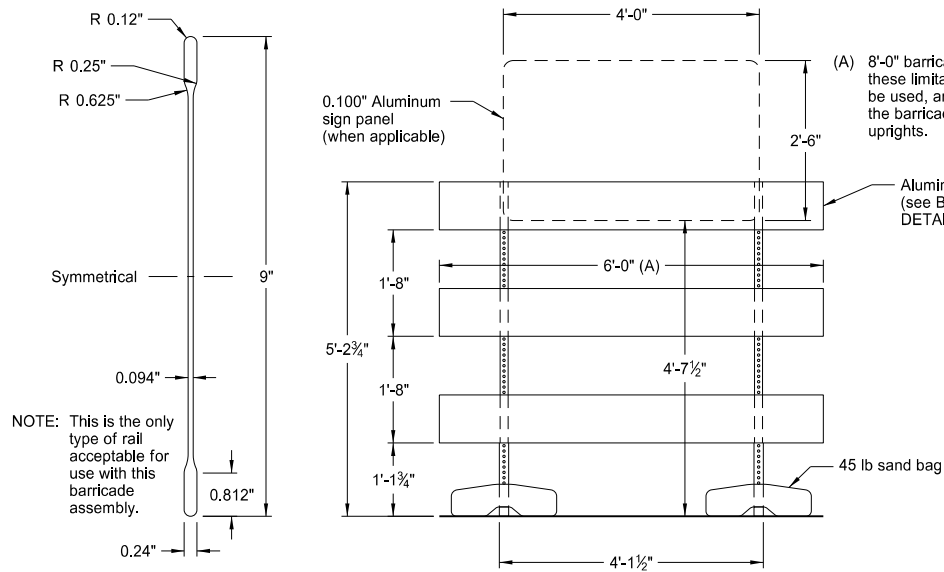

BARRICADE BLADE DETAIL

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

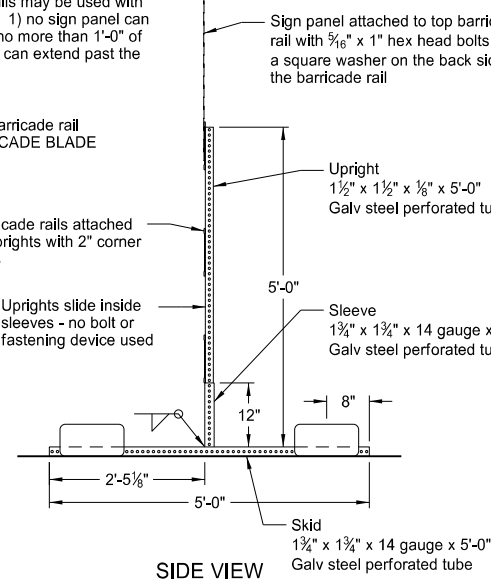


ELEVATION VIEW


BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

SIDE VIEW

NOTE: Markings for barricades shall be alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Retroreflective sheeting shall be placed on both sides of the rails and shall have a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", the rail stripe width shall be 4".

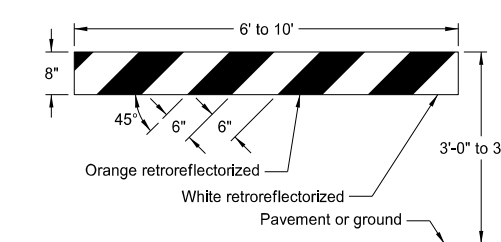


TYPE I BARRICADE

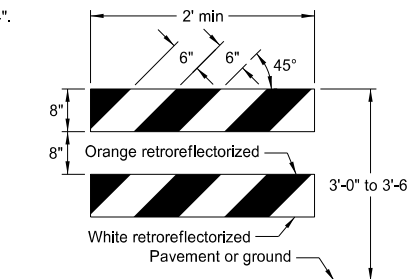


TYPE II BARRICADE

BARRICADE RAIL DETAILS

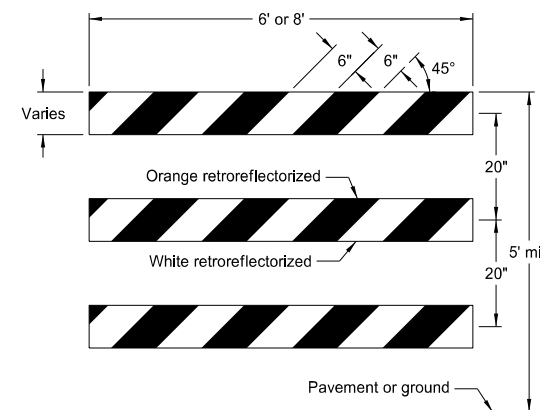

TYPE III BARRICADE

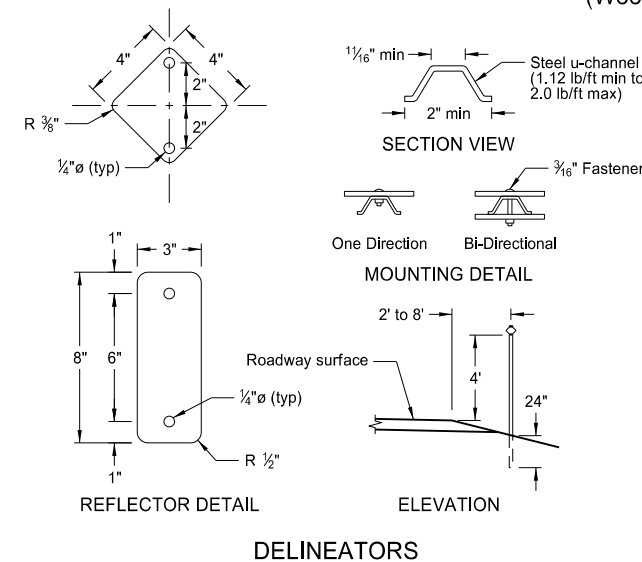

REFLECTOR DETAIL

ELEVATION

DELINEATORS

MINIMUM BALLAST (For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: Signs placed in sections with curb shall have a minimum horizontal clearance of 2' from the face of the curb to the near edge of the sign.

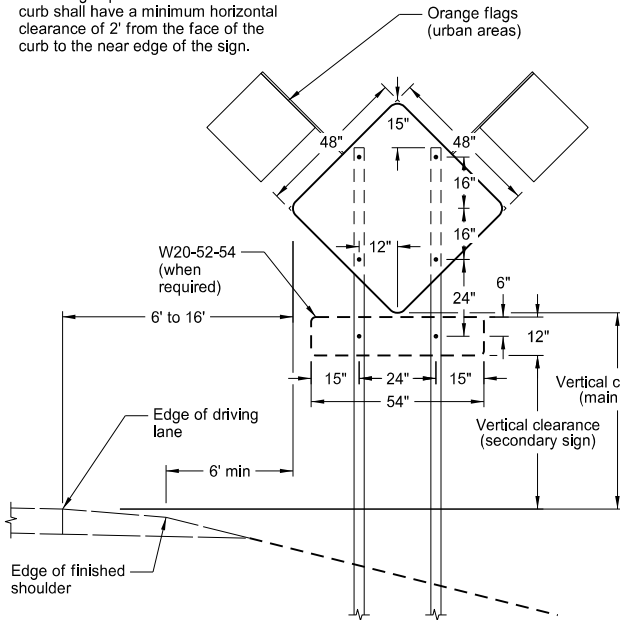


TYPICAL SECTION  
(48" x 48" diamond warning sign shown)

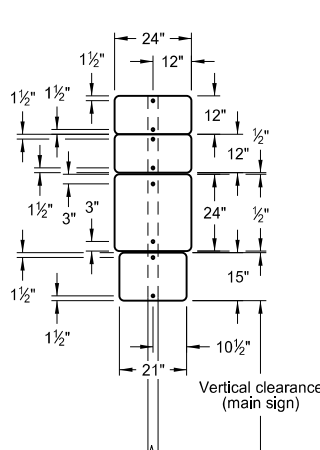


24" x 24" ROUTE MARKER ASSEMBLY

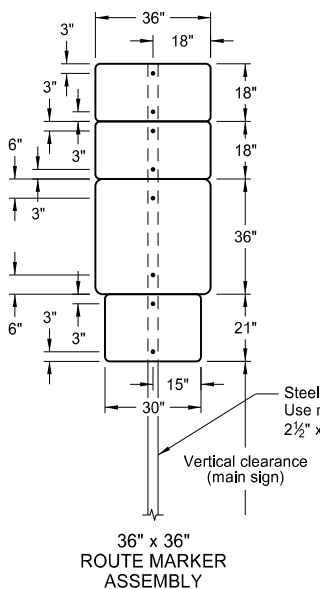


36" x 36" ROUTE MARKER ASSEMBLY

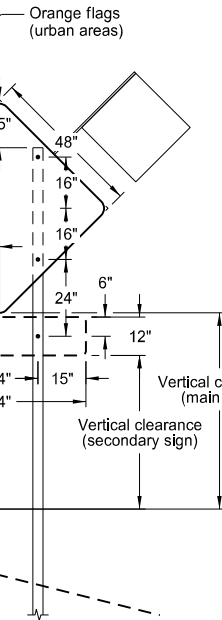


18" x 18" DIAMOND SIGN

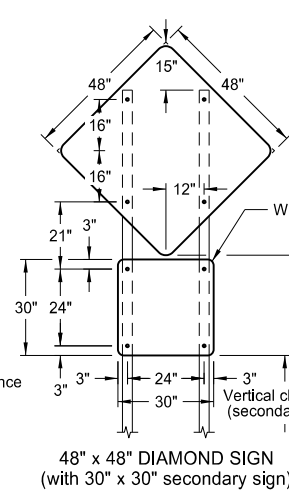


48" x 48" DIAMOND SIGN  
(with 30" x 30" secondary sign)

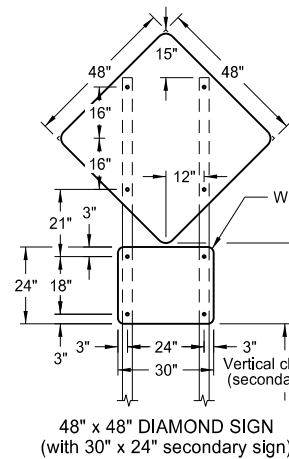


48" x 48" DIAMOND SIGN  
(with 30" x 24" secondary sign)

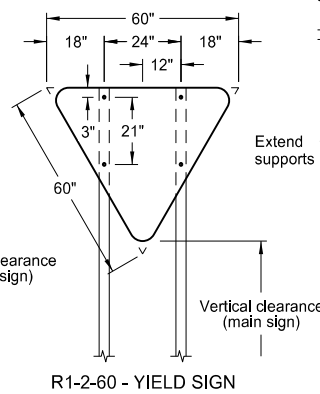


R1-2-60 - YIELD SIGN

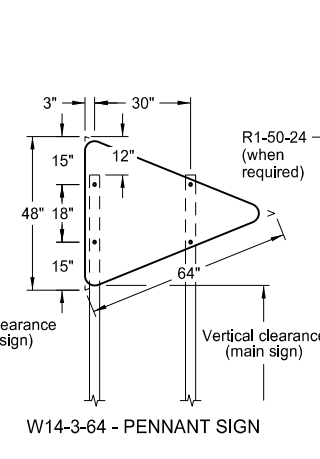


W14-3-64 - PENNANT SIGN

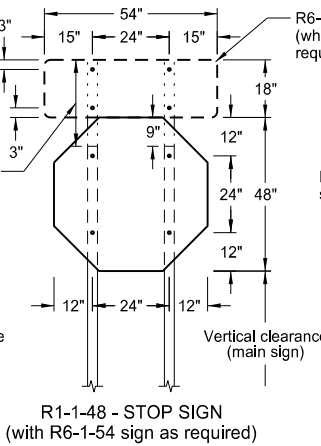


R1-1-48 - STOP SIGN  
(with R6-1-54 sign as required)

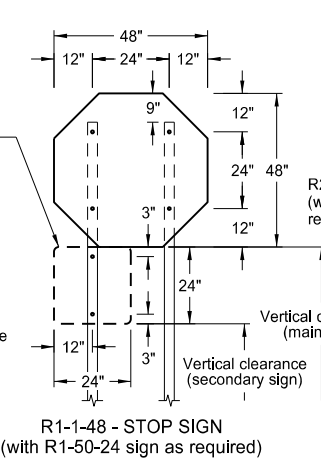


R1-1-48 - STOP SIGN  
(with R1-50-24 sign as required)

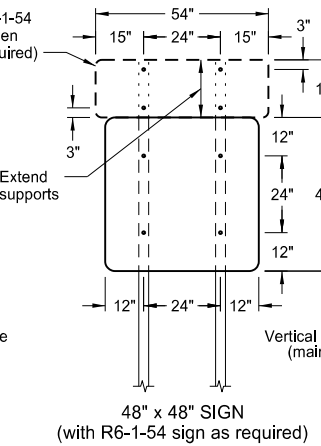


48" x 48" SIGN  
(with R6-1-54 sign as required)

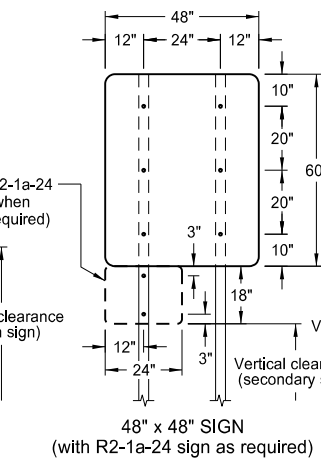


48" x 48" SIGN  
(with R2-1a-24 sign as required)




24" x 36" SIGN

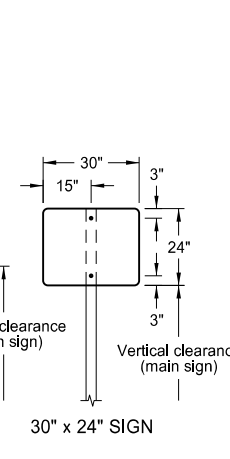


30" x 24" SIGN

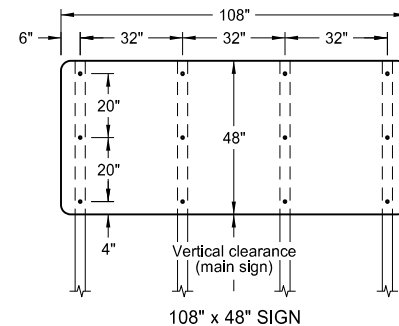


108" x 48" SIGN

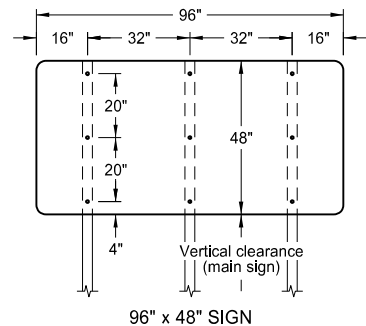


96" x 48" SIGN




72" x 36" SIGN




72" x 24" SIGN




60" x 24" SIGN



48" x 24" SIGN

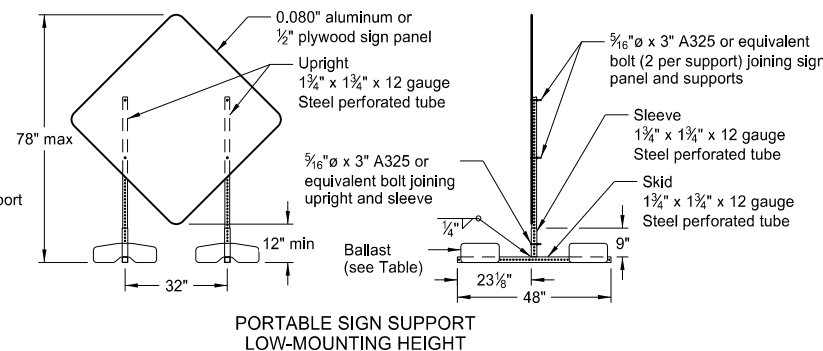

PORTABLE SIGN SUPPORT  
LOW-MOUNTING HEIGHT

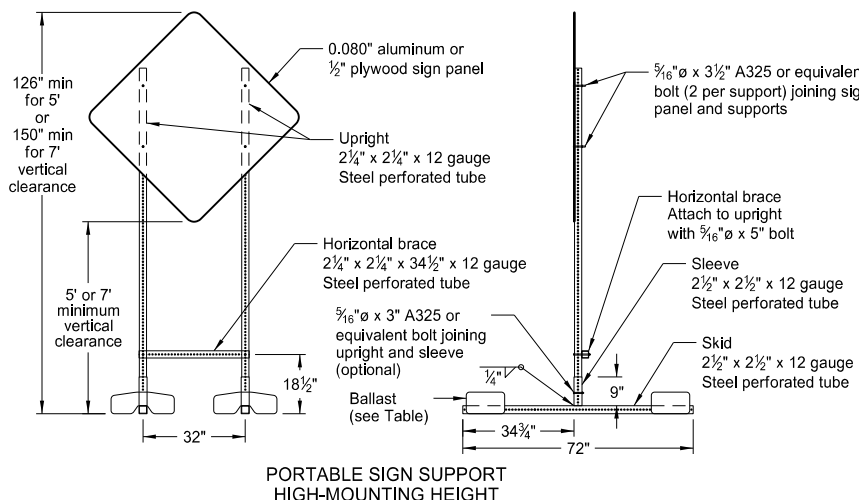

PORTABLE SIGN SUPPORT  
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Supports shall be galvanized or painted. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, the minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes are based on a wind speed of 55 MPH.

Signs over 50 square feet should be installed on 2 1/2" x 2 1/2" perforated tube supports as a minimum.

Guy wires shall not be attached to sign supports. Wind beams may be attached to u-posts behind the sign panels.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, 1/2" plywood, or other approved material, except where noted. All holes to be punched round for 3/8" bolts.

3. Alternate Messages: The signs that have alternate messages may have these alternate messages placed on a reflectorized plate (without a border) and installed and removed as required. (i.e. "Left" and "Right" message on a lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background  
Interstate Business Loop - white legend on green background  
US and State - black legend on white background  
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance as stated above.

Large signs having an area exceeding 50 square feet shall have a minimum clearance of 7'-0" from the ground at the post.

6. Portable Signs: Provide portable signs that meet the vertical clearance as stated above. Use portable signs when it is necessary to place signs within the pavement surface.

When portable signs are used for 5 days or less, low-mounting height (minimum 12" vertical clearance) sign supports may be used as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. The R9-8 through R9-11a series, W1-5 through W1-8 series, M4-10, and E5-1 may be used for longer than 5 days.

Signs mounted to the portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT Details shall have a maximum surface area of 16 square feet.

MINIMUM BALLAST  
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10








Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6.


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/14/13 and the original document is stored at the North Dakota Department of Transportation

# TRAFFIC CONTROL PLAN FOR MOVING OPERATIONS

D-704-27

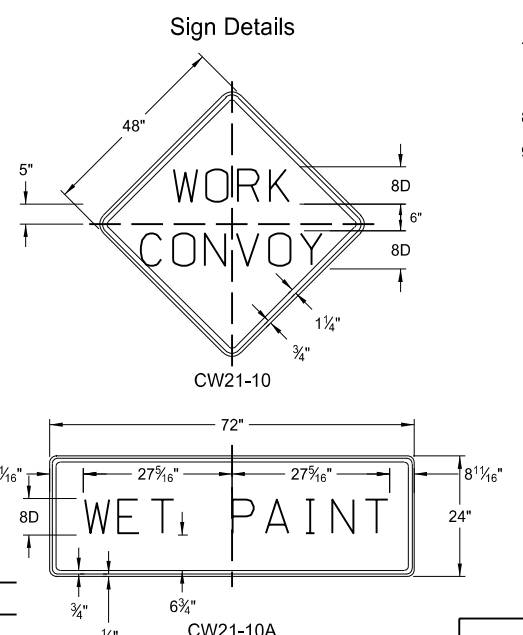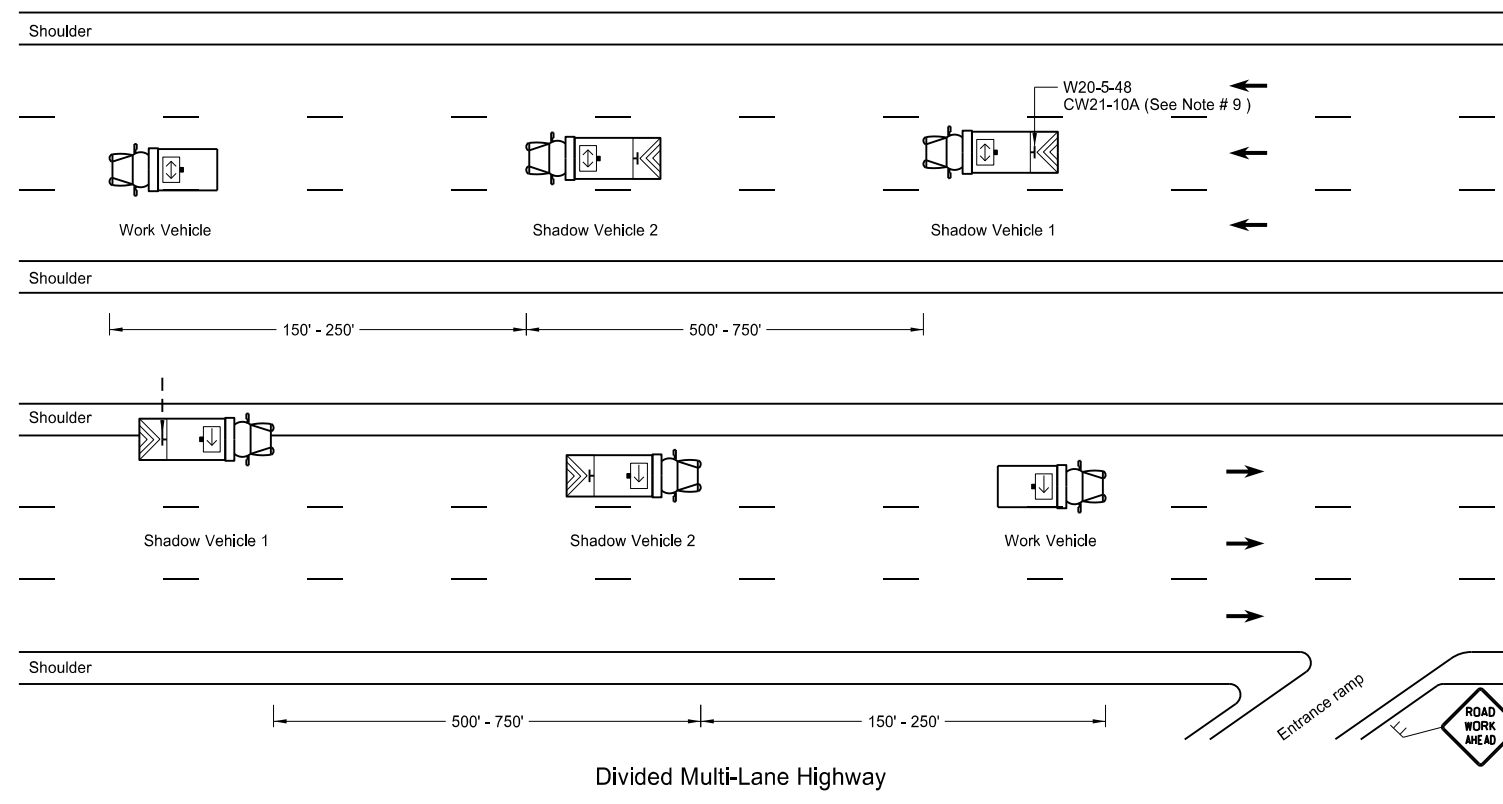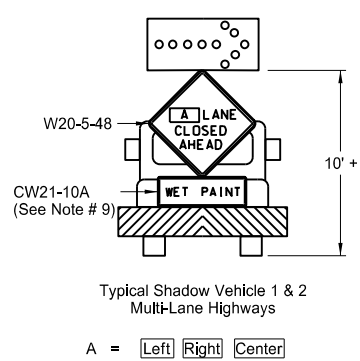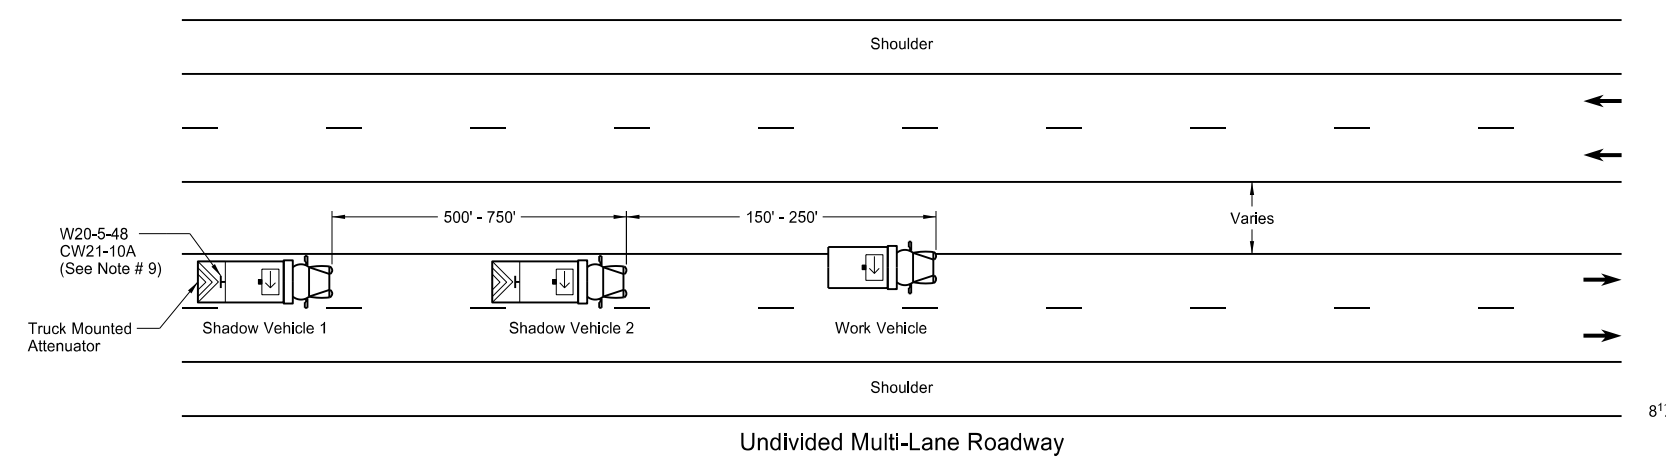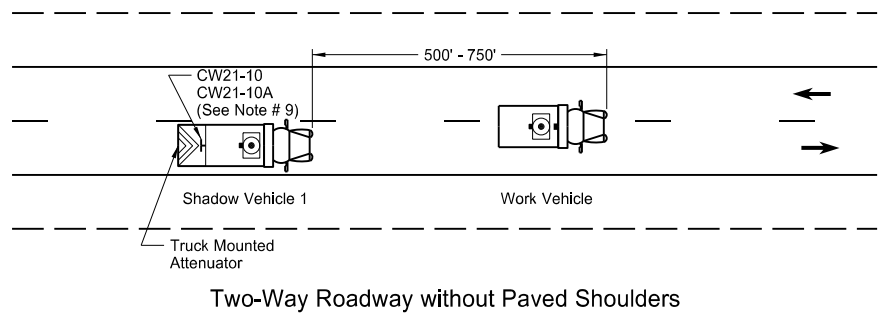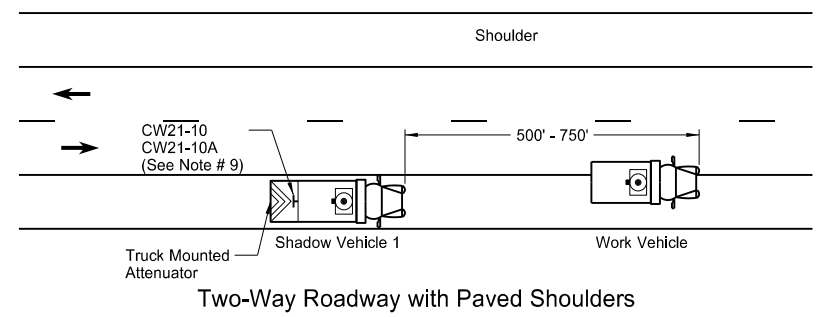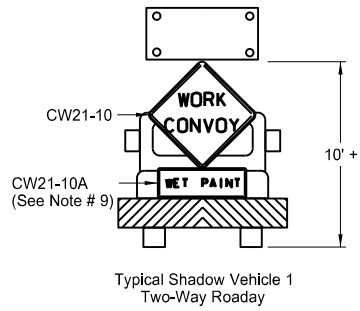

- Notes
- If the contractor chooses to place more vehicles in the convoy than are shown, these vehicles shall have the truck mounted attenuator and shall be at the contractor's expense.
  - Shadow and work vehicles shall display yellow rotating beacons or strobe lights unless otherwise stated elsewhere in the plans.
  - Flashing arrow panels shall be Type B or Type C. The panel operation shall be controlled from inside the vehicle.
  - Each vehicle shall have two-way electronic communication capability.
  - When work convoys must change lanes, shadow vehicle 1 should change lanes first to shadow other convoy vehicles.
  - Vehicle spacing between the shadow vehicle 1 and shadow vehicle 2 will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the trail vehicle in time to slow down and/or change lanes as they approach the shadow vehicle.
  - Sign Colors  
Letters = Black  
Border = Black  
Background = Orange
  - Shadow vehicle 2 may be used as the paint tender vehicle.
  - Sign CW21-10A shall only be used during a painting operation.
  - On two lane - two way roadways, the work and shadow vehicles should pull over periodically to allow motor vehicle traffic to pass.

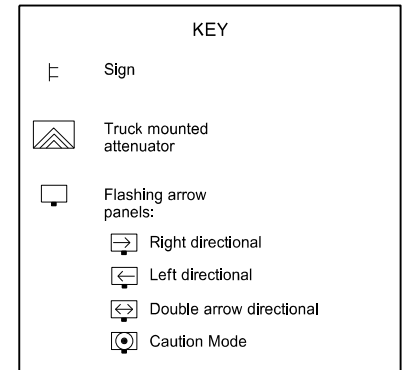


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
6-18-14	Removed shadow vehicle 2 on two lane roadways


This document was originally issued and sealed by  
Roger Weigel  
Registration Number  
PE-2930,  
on 06/18/14 and the original document is stored at the  
North Dakota Department  
of Transportation

# Pavement Marking Message Details


**D-762-1**

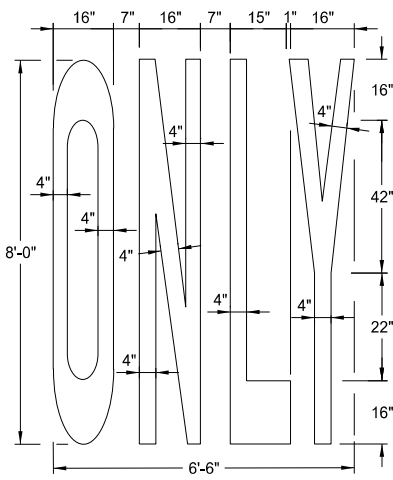


22 S. F.

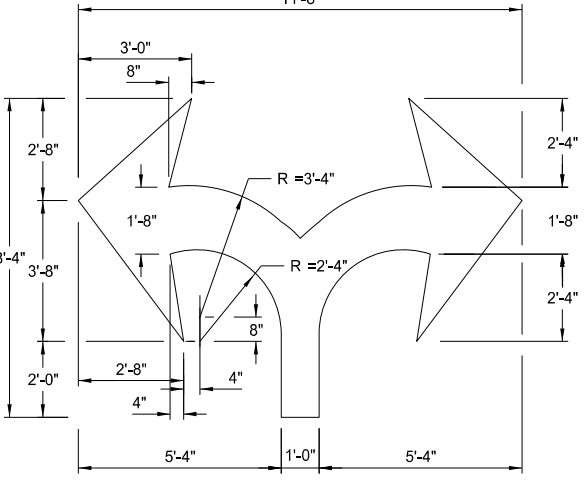


29 S. F.

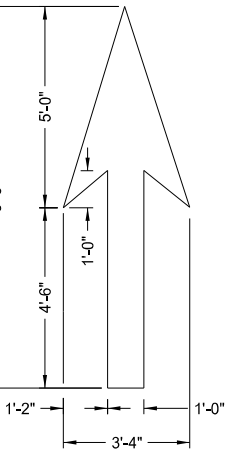


12 S. F.

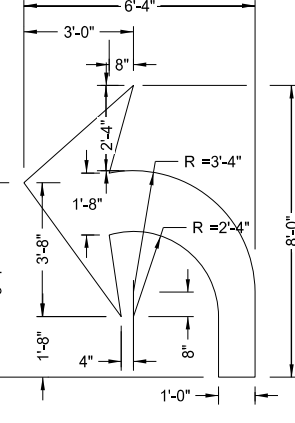

16 S. F.

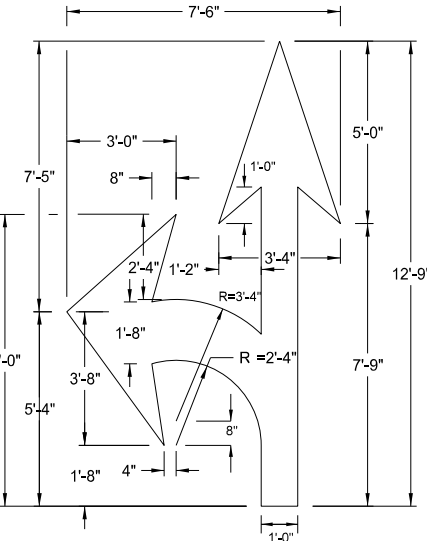

27 S. F.

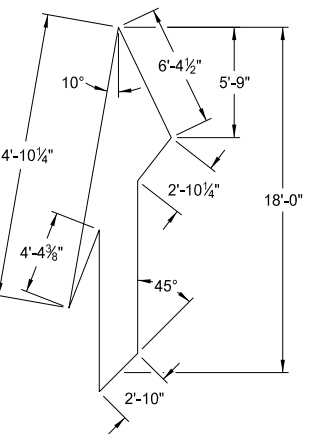


41 S. F.


Note:  
The merge arrow shall be rotated  
20° from the edge of the roadway.

Speed Limit	Chevron Width	Chevron Spacing 45° to Traffic
0-25 mph	8"	5'
30-40 mph	8"	15'
45 mph and above	12"	25'


**Chevron Crosshatching Table**




**Centerline Pavement Marking Skip Spacing Detail**




4 S. F.

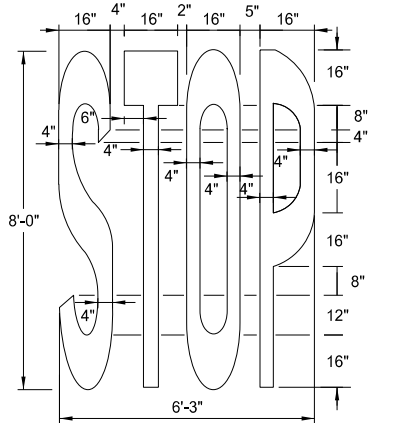

22 S. F.

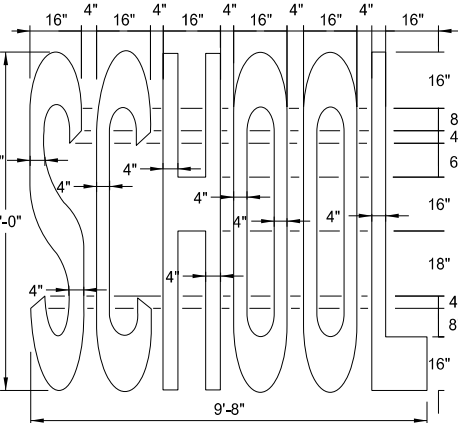



34.5 S. F.

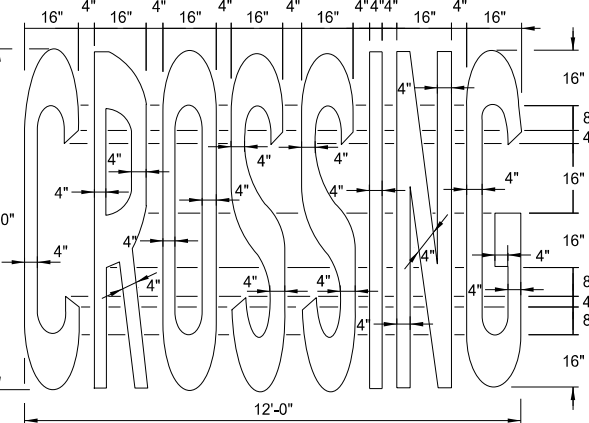


46 S. F.

Posted or 85th Percentile Speed	Advance Distance
20 mph	min. 100 ft
25 mph	min. 100 ft
30 mph	min. 100 ft
35 mph	min. 100 ft
40 mph	125 ft
45 mph	175 ft
50 mph	250 ft
55 mph	325 ft
60 mph	400 ft
65 mph	475 ft
70 mph	550 ft


**Advance Placement Distance for Railroad Warning Signs**

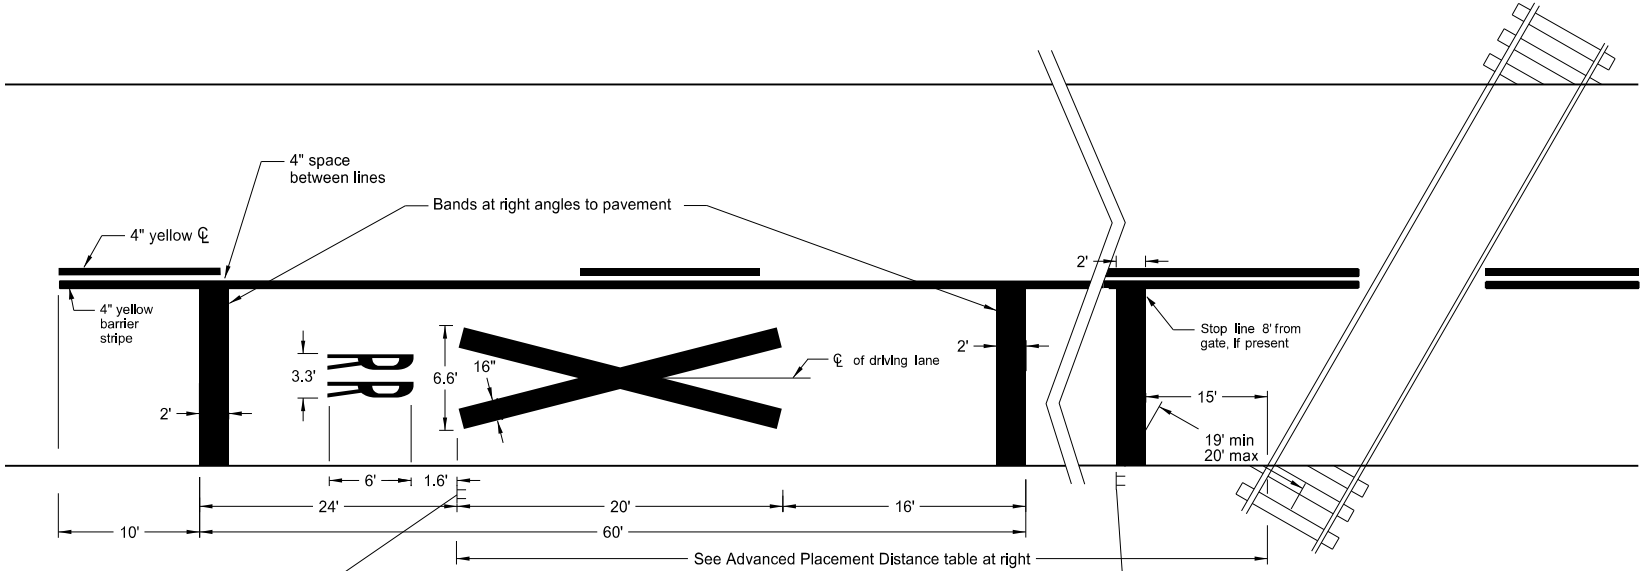

Notes:  
A three lane roadway should be marked with a centerline for two-lane approach operation on the approach to a crossing. On multi-lane roads, the transverse bands should extend across all approach lanes, and individual R X R symbols should be used in each approach lane.  
See plans for correct message. All pavement markings shall be white unless noted otherwise.



Railroad cross & 2 R's 60.5 S.F.  
3 Bands (12' lane) 72 S.F.

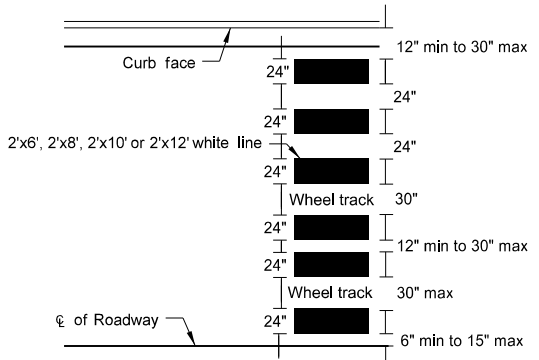

**Continental Crosswalk Detail**

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-6-11	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 12/06/11 and the original document is stored at the North Dakota Department of Transportation


PAVEMENT MARKING FOR STANDARD 90° FLARED INTERSECTION

D-762-3

NOTES


1. The barrier lines have variable distances dependent on the speed limit. The length for the barrier lines shall be obtained from the table which is based on the stopping sight distance.
2. At "T" intersections (3-leg), additionally install 2 left turn pavement marking message arrows.

Length of Barrier Line									
Speed Limit	30	35	40	45	50	55	60	65	70
Min. Length	200'	250'	305'	360'	425'	495'	570'	645'	730'

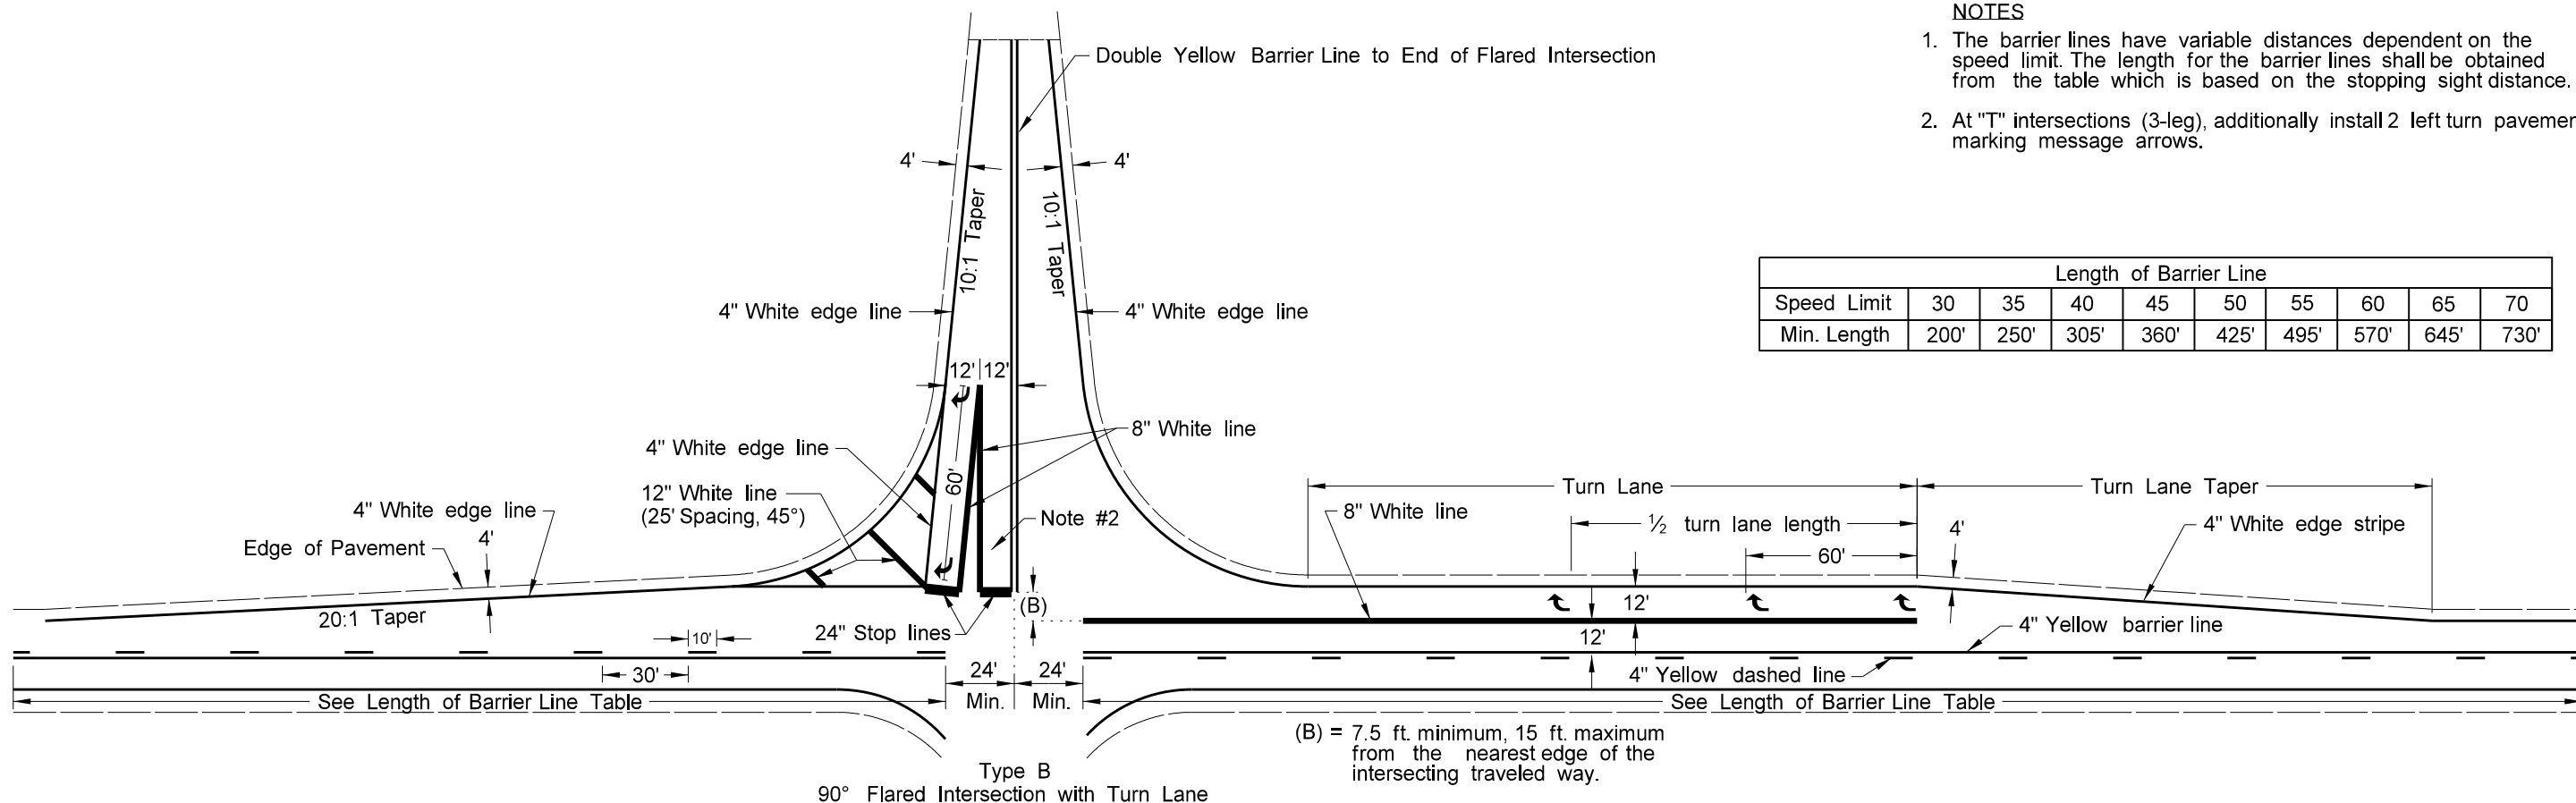

Legend

- 4" Line
- 8" Line
- 12" Line
- 24" Line

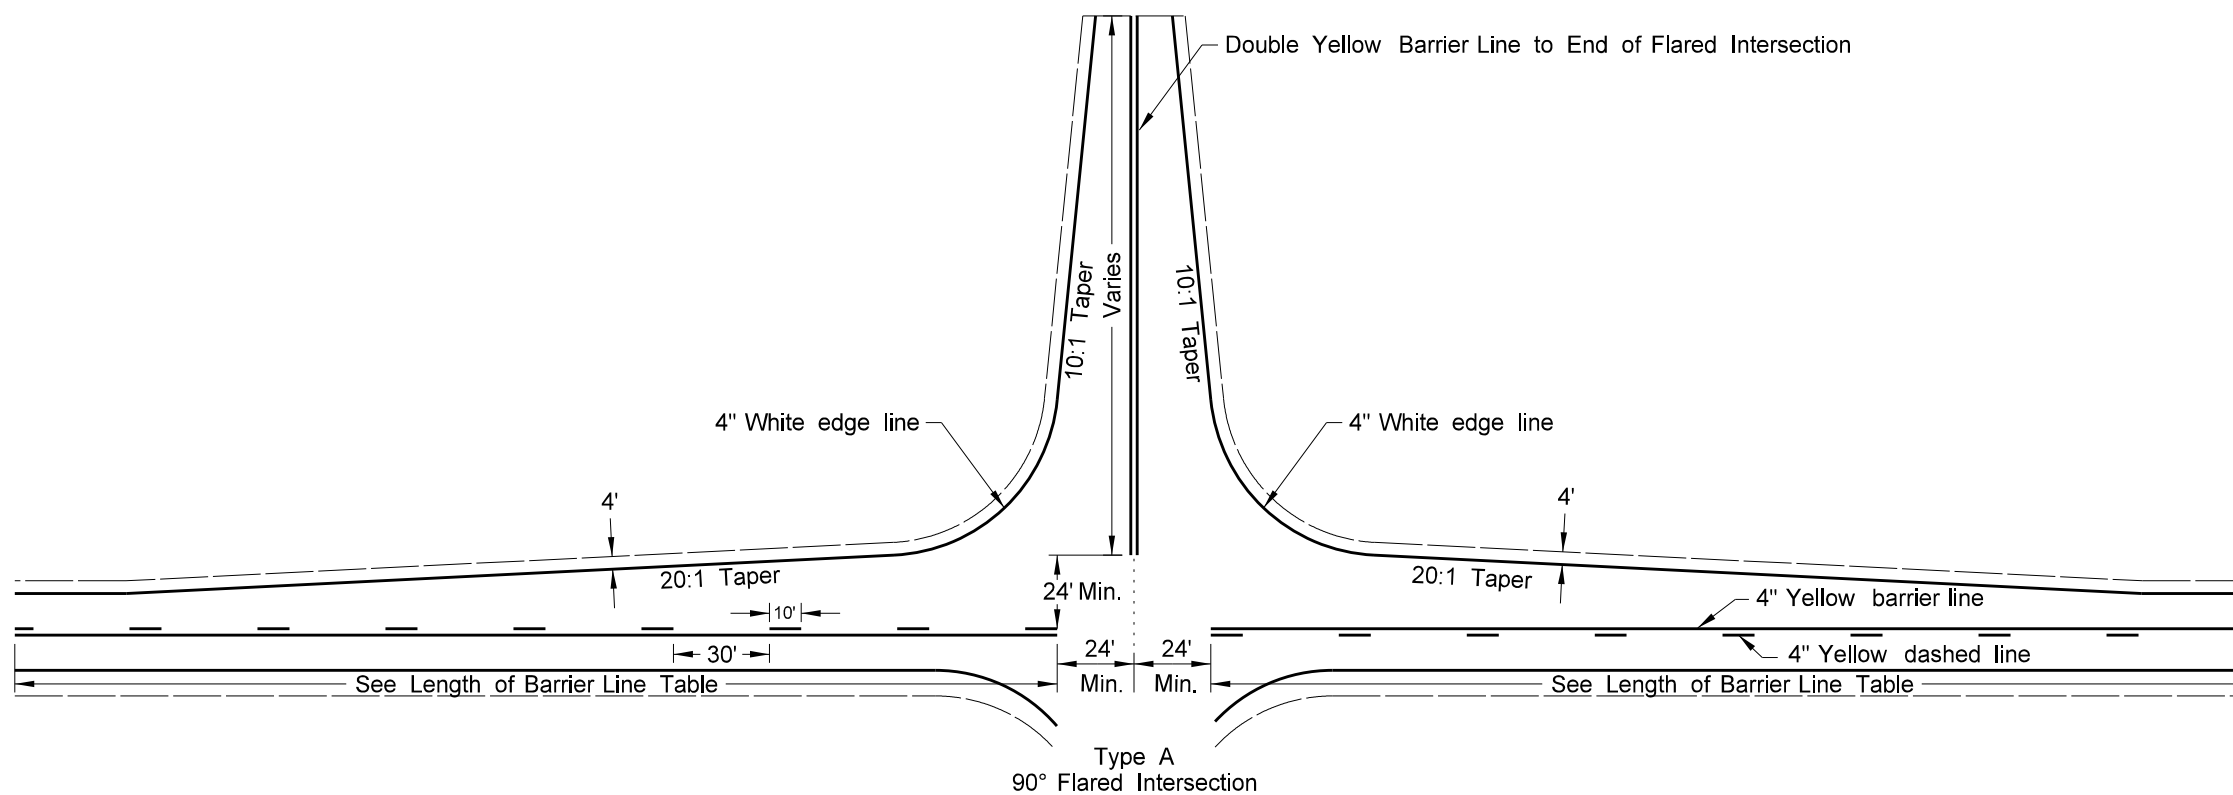


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
6-9-09	
REVISIONS	
DATE	CHANGE
9-24-09	Barrier Stripe Correction
9-21-11	Revised Turn Lane Markings
11-25-13	Revised Type B Layout


This document was originally issued and sealed by  
 Roger Weigel  
 Registration Number  
 PE- 2930 ,  
 on 11/25/2013 and the original document is stored at the  
 North Dakota Department  
 of Transportation




PAVEMENT MARKING

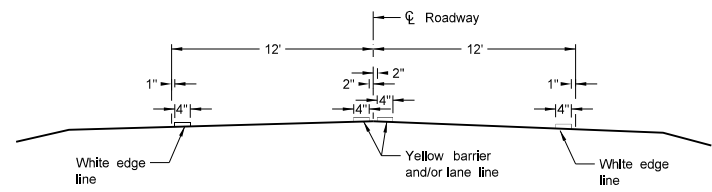


Two Lane Two Way  
RURAL ROADWAY

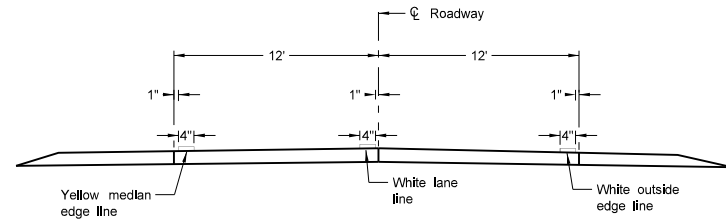


Two Lane Roadway  
INTERSTATE HIGHWAY  
Concrete Section

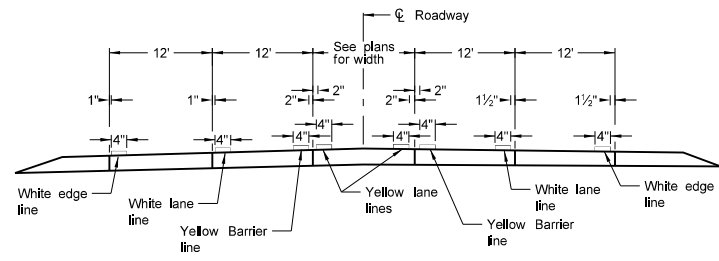


RURAL FIVE LANE ROADWAY  
Concrete Section

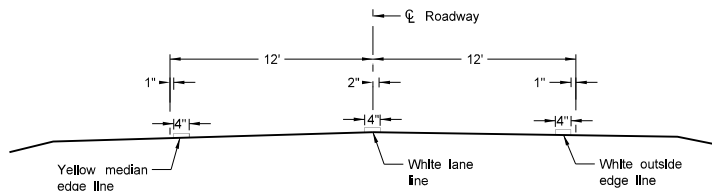


Two Lane Divided  
Rural Roadway  
PRIMARY HIGHWAY  
Asphalt Section

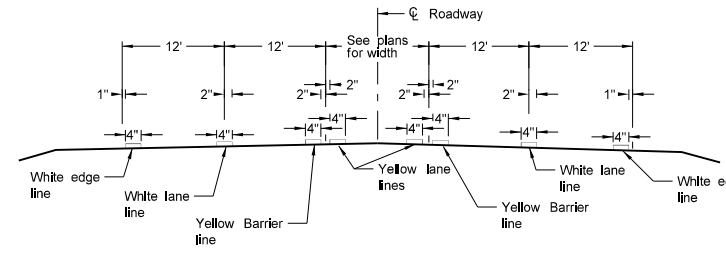


RURAL FIVE LANE ROADWAY  
Asphalt Section

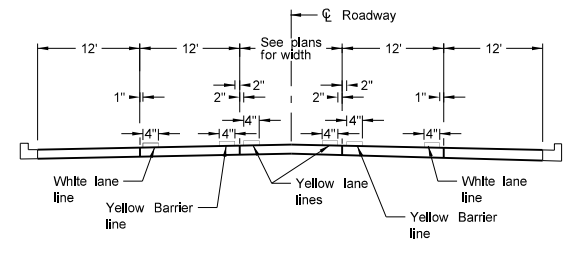


URBAN FIVE LANE SECTION  
Concrete Section

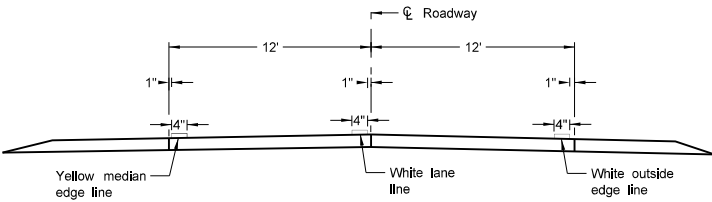


Two Lane Roadway  
PRIMARY HIGHWAY  
Concrete Section

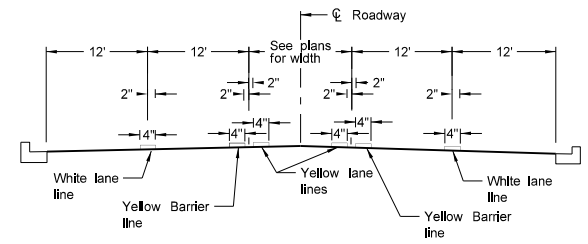


URBAN FIVE LANE SECTION  
Asphalt Section

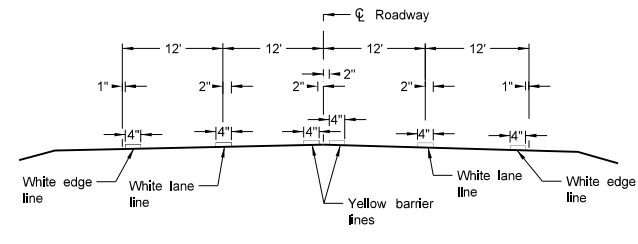


RURAL FOUR LANE ROADWAY  
Asphalt Section

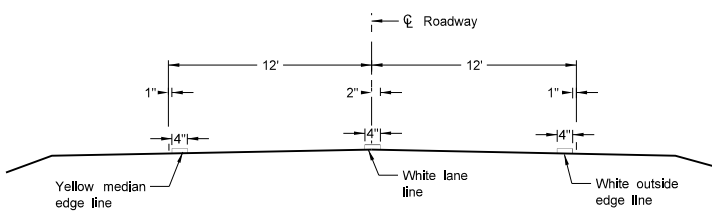


Two Lane Roadway  
INTERSTATE HIGHWAY  
Asphalt Section

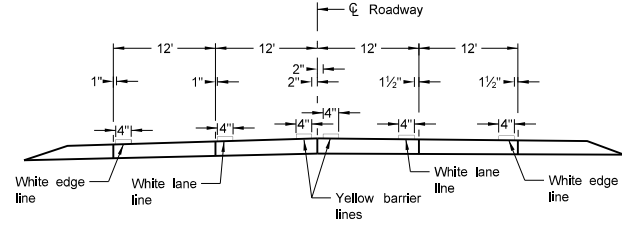


RURAL FOUR LANE ROADWAY  
Concrete Section

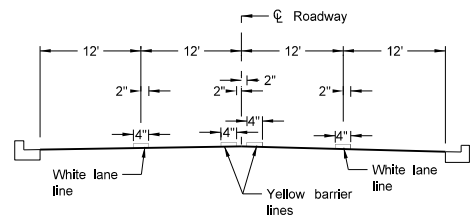

URBAN FOUR LANE SECTION  
Asphalt Section

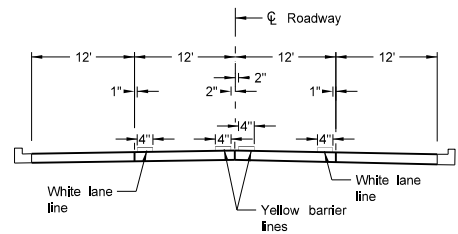

URBAN FOUR LANE SECTION  
Concrete Section



CENTERLINE PAVEMENT MARKING SKIP SPACING DETAIL

NOTES:  
1. Edge lines shall be continued through private drives and field drives and broken for intersections.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 12-1-10 and the original document is stored at the North Dakota Department of Transportation