

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	IM-2-094(197)257	23673	1	1

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION






IM-2-094(197)257

Barnes & Stutsman Counties
Various Locations Valley City District

Structural Steel Painting

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	4/1/2023
Supplemental Specifications	NONE

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
IM-2-094(197)257	N/A	N/A

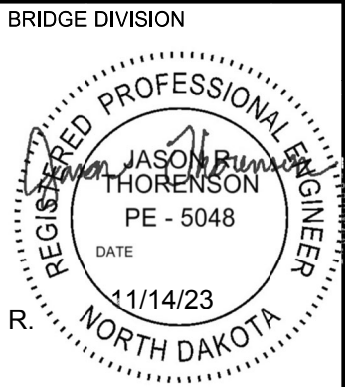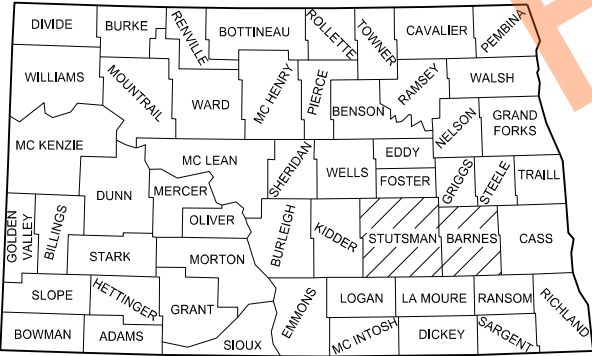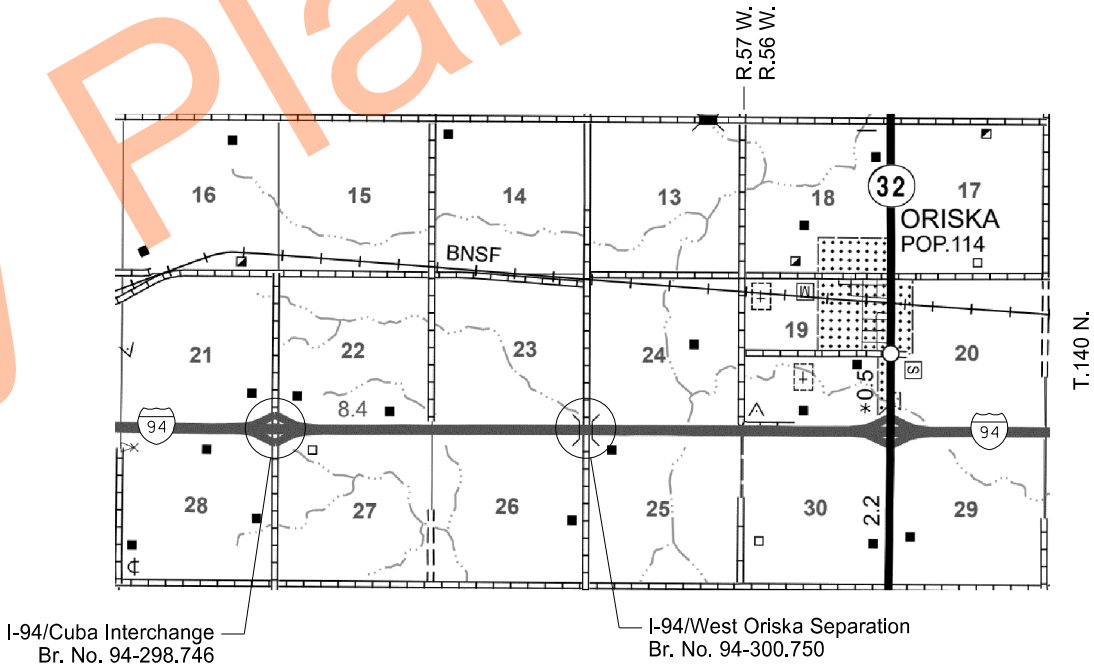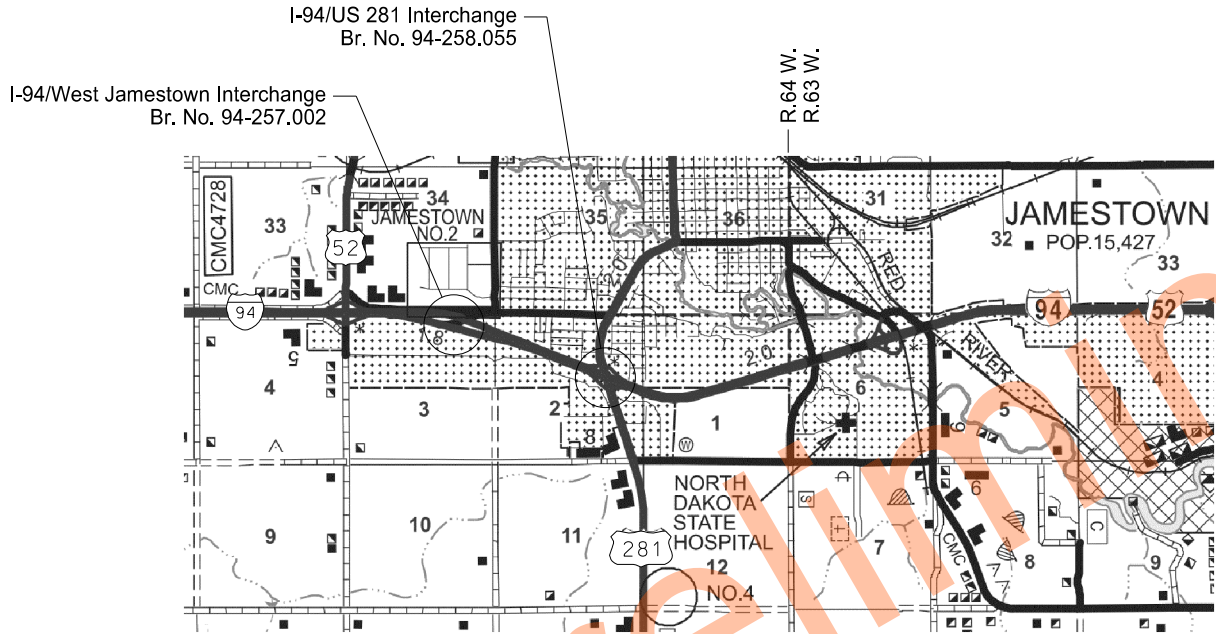

ND DEPARTMENT OF TRANSPORTATION
OFFICE OF PROJECT DEVELOPMENT

Jason Thorenson

Thorenson, Jason R.
11/14/23

TABLE OF CONTENTS						STATE	PROJECT NO.	SECTION NO.	SHEET NO.
						ND	IM-2-094(197)257	2	1
PLAN SECTIONS					LIST OF STANDARD DRAWINGS				
Section	Page(s)	Description	Number	Description					
1	1	Title Sheet	D-101-1, 2,3,4	NDDOT Abbreviations					
2	1	Table of Contents	D-101-10	NDDOT Utility Company and Organization Abbreviations					
6	1	Notes	D-101-20, 21	Line Styles					
6	2	Environmental Notes	D-101-30, 31,32,33	Symbols					
8	1	Quantities	D-704-1	Attenuation Device					
10	1	Basis of Estimate	D-704-7	Breakaway Systems For Construction Zone Signs - Perforated Tube					
100	1	Work Zone Traffic Control	D-704-8	Breakaway Systems For Construction Zone Signs - U-Channel Post					
170	1	Bridges and Box Culverts	D-704-9	Construction Sign Details - Terminal And Guide Signs					
			D-704-10	Construction Sign Details - Regulatory Signs					
			D-704-11, 11A	Construction Sign Details - Warning Signs					
			D-704-12	Shoulder Closure Tapers					
			D-704-13	Barricade And Channelizing Device Details					
			D-704-14	Construction Sign Punching And Mounting Details					
			D-704-18	Sign Layout For Interstate System One Lane Closure					
			D-704-35	Sign Layout For One Lane Closure - Interstate System					
			D-704-50	Portable Sign Support Assembly					
			D-704-51	Portable Precast Concrete Median Barrier (Temporary Usage)					
			D-762-2	Interstate Pavement Marking 4 Lane Divided Highway					
			D-762-4	Pavement Marking					
			D-762-11	Short-Term Pavement Marking					
SPECIAL PROVISIONS									
Number	Description								
SSP 2	Federal Migratory Bird Treaty Act								
SP 274(23)	Bridge Paint: Lead Paint Removal, Containment, and New Paint								

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	IM-2-094(197)257	6	1

NOTES

704-200 STATE FURNISHED MEDIAN BARRIERS: Obtain (140) 2.5' x 10' concrete barriers. They can be picked up and returned to the Casselton yard at 15482 37th St SE in Casselton ND 58012. The hardware can be picked up at the Fargo District yard at 503 38th St S in Fargo ND 58103. Contact the Fargo District office at 701-239-8900 to facilitate the exchanges.

If returning barriers with connection components, coordinate the delivery location for the connecting components with the Engineer. Some 4 inch x 4 inch boards are available at the return location. Provide any additional 4 inch x 4 inch boards necessary to stack barriers. The boards will become property of the Department.

Include all costs associated with median barriers in the contract unit price for “State Furnished Median Barrier”.

704-P01 TRAFFIC CONTROL DEVICES: The traffic control devices list has been developed using the following layouts in the Standard Drawings for traffic control.

1. D-704-18, Sign Layout for Interstate System One Lane Closure:

Devices provided for four one-lane closures at two bridges worked on simultaneously: Cuba Interchange (0094-298.746) and West Oriska Separation (0094-300.750).

The US 281 Interchange (0094-258.055) will require two one-lane closures at a time.

The West Jamestown Crossover (0094-257.022) will only require one lane closure at a time.

A 2,025 LF longitudinal buffer space was provided for the right lane closure regarding the exit ramps at the US 281 Interchange (0094-258.055) and Cuba Interchange (0094-298.746).

2. D-704-35, Sign Layout for One Lane Closure Interstate System:

Devices only provided for 20 delineator drums and two E5-1-48 Exit Gore signs for the exit ramps at the US 281 Interchange (0094-258.055) and Cuba Interchange (0094-298.746).

704-P02 MEDIAN BARRIERS: The quantity of barriers provided is enough for two structures (2 @ 70 EA = 140 EA) to be worked on simultaneously.

Transport needed barriers from Cuba Interchange (0094-298.746) and West Oriska Separation (0094-300.750) to US 281 Interchange (0094-258.055) and West Jamestown Crossover (0094-257.022).

At the Cuba Interchange (0094-298.746) and West Oriska Separation (0094-300.750), place 26 barriers under the structure (work area) and 9 barriers at

15:1 taper (7.25' offset from roadway centerline) in accordance with D-704-18. Position straight line barriers under structure (work area) at a 1.25' Rt. offset from centerline roadway to centerline barrier for right lane closures shown on D-704-18. A quantity of 35 barriers is needed for the westbound lanes and 35 barriers are needed for the eastbound lanes at each structure (70 EA per interchange or separation).

At the US 281 Interchange (0094-258.055), place 31 barriers under the structure (work area) and 9 barriers at 15:1 taper (7.25' offset from roadway centerline) in accordance with D-704-18. Position straight line barriers under structure (work area) at a 1.25' Rt. offset from centerline roadway to centerline barrier for right lane closures shown on D-704-18. A quantity of 40 barriers is needed for the westbound lanes and 40 barriers are needed for the eastbound lanes at this structure (80 EA for this interchange).

At the West Jamestown Crossover (0094-257.022), place 26 barriers under the structure (work area) and 9 barriers at 15:1 taper (7.25' offset from roadway centerline) in accordance with D-704-18. Position straight line barriers under structure (work area) at a 1.25' Rt. offset from centerline roadway to centerline barrier for the right lane closure shown on D-704-18. A quantity of 35 barriers is needed for the westbound lanes at this structure (35 EA for this crossover).

For right lane closures, install interim white edgeline adjacent to the barriers as shown on Standard Drawing D-704-18. Maintain a minimum of 16 feet of open travel lane width at all times.

For left lane closures, move the median barriers placed at a 15:1 taper from the right lane to a 15:1 taper on the left lane. The median barriers placed in a straight line may remain in place. Install interim yellow edgeline adjacent to the barriers as shown on Standard Drawing D-704-18. Maintain a minimum of 16 feet of open travel lane width at all times.



ENVIRONMENTAL NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	IM-2-094(197)257	6	2

EN-1 WETLAND IMPACTS: Based on the NEPA documentation, no additional permits or environmental commitments have been identified beyond what is covered by the NDDOT’s Standard Specifications for Road and Bridge Construction.

Wetland Number	Cowardin Classification	Wetland Type	Wetland Size (acres)	Wetland Feature	USACE Jurisdictional Wetlands	Impacts to Wetlands	
						Temp.	Perm.
There are a number of adjacent wetlands within the project limits, however, no impacts are anticipated within the limits of construction.							
TOTALS:				0.00		0.00	0.00

Preliminary Plans



ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	IM-2-094(197)257	8	1

SPEC CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
103	0100 CONTRACT BOND	L SUM	1	1
630	0100 SAND BLASTING & PAINTING	L SUM	1	1
630	9000 CONTAINMENT SYSTEM	L SUM	1	1
702	0100 MOBILIZATION	L SUM	1	1
704	0100 FLAGGING	MHR	80	80
704	1000 TRAFFIC CONTROL SIGNS	UNIT	2,734	2,734
704	1045 ATTENUATION DEVICE-TYPE B-75	EA	4	4
704	1060 DELINEATOR DRUMS	EA	188	188
704	1087 SEQUENCING ARROW PANEL-TYPE C	EA	4	4
704	1500 OBLITERATION OF PAVEMENT MARKING	SF	1,697	1,697
704	3511 STATE FURNISHED MEDIAN BARRIER	LF	1,400	1,400
762	0420 SHORT TERM 4IN LINE-TYPE R	LF	33,690	33,690
762	1104 PVMT MK PAINTED 4IN LINE	LF	13,480	13,480

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	IM-2-094(197)257	10	1

Obliteration Of Pavement Marking			
Spec	Code	Item	Unit
704	1500	Obliteration of Pavement Marking	SF
Location		Basis	Quantity SF
Br. No. 0094-257.002 (I-94 West Jamestown Crossover WB Rdwy Only)		2205 LF for CL 4" White Skips - 1320 LF/Mile	183
Br. No. 0094-258.055 (I-94 US 281 Interchange, EB Rdwy)		3460 LF for CL 4" White Skips - 1320 LF/Mile	290
Br. No. 0094-258.055 (I-94 US 281 Interchange, WB Rdwy)		3460 LF for CL 4" White Skips - 1320 LF/Mile	290
Br. No. 0094-298.746 (I-94 Cuba Interchange, EB Rdwy)		3410 LF for CL 4" White Skips - 1320 LF/Mile	283
Br. No. 0094-298.746 (I-94 Cuba Interchange, WB Rdwy)		3410 LF for CL 4" White Skips - 1320 LF/Mile	284
Br. No. 0094-300.750 (I-94 West Oriska Interchange, EB Rdwy)		2205 LF for CL 4" White Skips - 1320 LF/Mile	183
Br. No. 0094-300.750 (I-94 West Oriska Interchange, WB Rdwy)		2205 LF for 4" CL White Skips - 1320 LF/Mile	184
TOTAL SF =			1697
Temporary Pavement Marking			
Spec	Code	Item	Unit
762	0420	Short Term 4in Line-Type R	LF
Location		Basis	Quantity LF
Br. No. 0094-257.002 (I-94 West Jamestown Crossover WB Rdwy Only)		2205 LF of 4" White Edge Line	2205
Br. No. 0094-257.002 (I-94 West Jamestown Crossover WB Rdwy Only)		2205 LF of 4" Yellow Edge Line	2205
Br. No. 0094-258.055 (I-94 US 281 Interchange, EB Rdwy)		2910 LF for 4" White Edge Line	2910
Br. No. 0094-258.055 (I-94 US 281 Interchange, WB Rdwy)		2910 LF for 4" White Edge Line	2910
Br. No. 0094-258.055 (I-94 US 281 Interchange, EB Rdwy)		2255 LF for 4" Yellow Edge Line	2255
Br. No. 0094-258.055 (I-94 US 281 Interchange, WB Rdwy)		2255 LF for 4" Yellow Edge Line	2255
Br. No. 0094-298.746 (I-94 Cuba Interchange, EB Rdwy)		2860 LF for 4" White Edge Line	2860
Br. No. 0094-298.746 (I-94 Cuba Interchange, WB Rdwy)		2860 LF for 4" White Edge Line	2860
Br. No. 0094-298.746 (I-94 Cuba Interchange, EB Rdwy)		2205 LF for 4" Yellow Edge Line	2205
Br. No. 0094-298.746 (I-94 Cuba Interchange, WB Rdwy)		2205 LF for 4" Yellow Edge Line	2205
Br. No. 0094-300.750 (I-94 West Oriska Separation, EB Rdwy)		2205 LF for 4" White Edge Line	2205
Br. No. 0094-300.750 (I-94 West Oriska Separation, WB Rdwy)		2205 LF for 4" White Edge Line	2205
Br. No. 0094-300.750 (I-94 West Oriska Separation, EB Rdwy)		2205 LF for 4" Yellow Edge Line	2205
Br. No. 0094-300.750 (I-94 West Oriska Separation, WB Rdwy)		2205 LF for 4" Yellow Edge Line	2205
TOTAL LF =			33690
Permanent Pavement Marking			
Spec	Code	Item	Unit
762	1104	Pvmt MK Painted 4IN Line	LF
Location		Basis	Quantity LF
Br. No. 0094-257.002 (I-94 West Jamestown Crossover WB Rdwy Only)		2205 LF for CL 4" White Skips - 1320 LF/Mile	550
Br. No. 0094-258.055 (I-94 US 281 Interchange, EB Rdwy)		3460 LF for CL 4" White Skips - 1320 LF/Mile	870
Br. No. 0094-258.055 (I-94 US 281 Interchange, WB Rdwy)		3460 LF for CL 4" White Skips - 1320 LF/Mile	870
Br. No. 0094-298.746 (I-94 Cuba Interchange, EB Rdwy)		3410 LF for CL 4" White Skips - 1320 LF/Mile	850
Br. No. 0094-298.746 (I-94 Cuba Interchange, WB Rdwy)		3410 LF for CL 4" White Skips - 1320 LF/Mile	850
Br. No. 0094-300.750 (I-94 West Oriska Interchange, EB Rdwy)		2205 LF for CL 4" White Skips - 1320 LF/Mile	550
Br. No. 0094-300.750 (I-94 West Oriska Interchange, WB Rdwy)		2205 LF for CL 4" White Skips - 1320 LF/Mile	550
Br. No. 0094-257.002 (I-94 West Jamestown Crossover WB Rdwy Only)		585 LF of 4" White Edge Line	585
Br. No. 0094-257.002 (I-94 West Jamestown Crossover WB Rdwy Only)		585 LF of 4" Yellow Edge Line	585
Br. No. 0094-258.055 (I-94 US 281 Interchange, EB Rdwy)		635 LF for 4" White Edge Line	635
Br. No. 0094-258.055 (I-94 US 281 Interchange, EB Rdwy)		635 LF for 4" Yellow Edge Line	635
Br. No. 0094-258.055 (I-94 US 281 Interchange, WB Rdwy)		635 LF for 4" White Edge Line	635
Br. No. 0094-258.055 (I-94 US 281 Interchange, WB Rdwy)		635 LF for 4" Yellow Edge Line	635
Br. No. 0094-298.746 (I-94 Cuba Interchange, EB Rdwy)		585 LF for 4" White Edge Line	585
Br. No. 0094-298.746 (I-94 Cuba Interchange, EB Rdwy)		585 LF for 4" Yellow Edge Line	585
Br. No. 0094-298.746 (I-94 Cuba Interchange, WB Rdwy)		585 LF for 4" White Edge Line	585
Br. No. 0094-298.746 (I-94 Cuba Interchange, WB Rdwy)		585 LF for 4" Yellow Edge Line	585
Br. No. 0094-300.750 (I-94 West Oriska Separation, EB Rdwy)		585 LF for 4" White Edge Line	585
Br. No. 0094-300.750 (I-94 West Oriska Separation, EB Rdwy)		585 LF for 4" Yellow Edge Line	585
Br. No. 0094-300.750 (I-94 West Oriska Separation, WB Rdwy)		585 LF for 4" White Edge Line	585
Br. No. 0094-300.750 (I-94 West Oriska Separation, WB Rdwy)		585 LF for 4" Yellow Edge Line	585
TOTAL LF =			13480

Basis of Estimate
Pavement Marking



I-94 Bridge Painting Various Locations
Valley City District

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	IM-2-094(197)257	100	1

SIGN NUMBER	SIGN SIZE	DESCRIPTION	AMOUNT REQUIRED	UNITS PER AMOUNT	UNITS SUB TOTAL
E5-1-48	48"x48"	EXIT GORE	2	35	70
G20-1-60	60"x24"	ROAD WORK NEXT ____ MILES		28	
G20-1b-60	60"x24"	NO WORK IN PROGRESS (Sign and installation only)		18	
G20-2-48	48"x24"	END ROAD WORK	8	26	208
G20-4-36	36"x18"	PILOT CAR FOLLOW ME (Mounted to back of pilot car)		18	
G20-4b-36	36"x30"	WAIT FOR PILOT CAR		18	
G20-50a-72	72"x36"	ROAD WORK NEXT ____ MILES RT & LT ARROWS		43	
G20-52a-72	72"x24"	ROAD WORK NEXT ____ MILES RT or LT ARROW		36	
G20-55-96	96"x48"	SPEED LIMIT ENFORCED - MINIMUM FEE \$80 WHEN WORKERS PRESENT	8	59	472
M1-1-36	36"x36"	INTERSTATE ROUTE MARKER (Post and installation only)		11	
M1-4-24	24"x24"	U.S. ROUTE MARKER (Post and installation only)		10	
M1-5-24	24"x24"	STATE ROUTE MARKER (Post and installation only)		10	
M3-1-24	24"x12"	NORTH (Mounted on route marker post)		7	
M3-2-24	24"x12"	EAST (Mounted on route marker post)		7	
M3-3-24	24"x12"	SOUTH (Mounted on route marker post)		7	
M3-4-24	24"x12"	WEST (Mounted on route marker post)		7	
M4-8-24	24"x12"	DETOUR (Mounted on route marker post)		7	
M4-9-30	30"x24"	DETOUR ARROW RIGHT or LEFT/AHD AND RT or LT		15	
M4-10-48	48"x18"	DETOUR (INSIDE ARROW) RIGHT or LEFT (Mounted on barricade)		7	
M5-1-21	21"x15"	ADVANCE TURN ARROW RT or LT (Mounted on route marker post)		7	
M5-1-30	30"x21"	ADVANCE TURN ARROW RT or LT (Mounted on route marker post)		9	
M6-1-21	21"x15"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		7	
M6-1-30	30"x21"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		9	
M6-3-21	21"x15"	DIRECTIONAL ARROW UP (Mounted on route marker post)		7	
R1-1-48	48"x48"	STOP		32	
R1-2-60	60"x60"	YIELD		29	
R2-1-36	36"x48"	SPEED LIMIT ____ (Portable only)		30	
R2-1-48	48"x60"	SPEED LIMIT ____	16	39	624
R2-1aP-24	24"x18"	MINIMUM FEE \$80 (Mounted on Speed Limit post)	8	10	80
R3-2-48	48"x48"	NO LEFT TURN		35	
R4-1-48	48"x60"	DO NOT PASS		39	
R4-7-48	48"x60"	KEEP RIGHT		39	
R5-1-48	48"x48"	DO NOT ENTER		35	
R6-1-54	54"x18"	ONE WAY RIGHT or LEFT (Mounted on STOP or DO NOT ENTER post)		14	
R7-1-12	12"x18"	NO PARKING ANY TIME		11	
R10-6-24	24"x36"	STOP HERE ON RED		16	
R11-2-48	48"x30"	ROAD CLOSED (Mounted on barricade)		12	
R11-2a-48	48"x30"	STREET CLOSED (Mounted on barricade)		12	
R11-3a-60	60"x30"	ROAD CLOSED ____ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-3c-60	60"x30"	STREET CLOSED ____ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-4a-60	60"x30"	STREET CLOSED TO THRU TRAFFIC (Mounted on barricade)		15	
W1-3-48	48"x48"	REVERSE TURN RIGHT or LEFT		35	
W1-4-48	48"x48"	REVERSE CURVE RIGHT or LEFT		35	
W1-4b-48	48"x48"	TWO LANE REVERSE CURVE RIGHT or LEFT		35	
W1-6-48	48"x24"	ONE DIRECTION LARGE ARROW		26	
W3-1-48	48"x48"	STOP AHEAD		35	
W3-3-48	48"x48"	SIGNAL AHEAD		35	
W3-4-48	48"x48"	BE PREPARED TO STOP		35	
W3-5-48	48"x48"	SPEED REDUCTION AHEAD	8	35	280
W4-2-48	48"x48"	LANE ENDS RIGHT or LEFT	8	35	280
W5-1-48	48"x48"	ROAD NARROWS		35	
W5-8-48	48"x48"	THRU TRAFFIC RIGHT LANE		35	
W5-9-48	48"x48"	ROAD WORK TRAFFIC ONLY DOWN & LT or RT ARROW		35	
W6-3-48	48"x48"	TWO WAY TRAFFIC		35	
W8-1-48	48"x48"	BUMP		35	
W8-3-48	48"x48"	PAVEMENT ENDS		35	
W8-7-48	48"x48"	LOOSE GRAVEL		35	
W8-11-48	48"x48"	UNEVEN LANES		35	
W8-12-48	48"x48"	NO CENTER LINE		35	
W8-17-48	48"x48"	SHOULDER DROP-OFF SYMBOL		35	
W8-53-48	48"x48"	TRUCKS ENTERING HIGHWAY		35	
W8-54-48	48"x48"	TRUCKS ENTERING AHEAD or ____ FT or ____ MILE		35	
W8-55-48	48"x48"	TRUCKS CROSSING AHEAD or ____ FT or ____ MILE		35	
W8-56-48	48"x48"	TRUCKS EXITING HIGHWAY		35	
W9-3a-48	48"x48"	CENTER LANE CLOSED SYMBOL		35	
W13-1P-30	30"x30"	____ MPH ADVISORY SPEED PLAQUE (Mounted on warning sign post)		14	
W14-3-64	64"x48"	NO PASSING ZONE		28	
W16-2P-30	30"x24"	____ FEET PLAQUE (Mounted on warning sign post)		10	
W20-1-48	48"x48"	ROAD WORK AHEAD or ____ FT or ____ MILE	8	35	280
W20-2-48	48"x48"	DETOUR AHEAD or ____ FT or ____ MILE		35	
W20-3-48	48"x48"	ROAD or STREET CLOSED AHEAD or ____ FT or ____ MILE		35	
W20-4-48	48"x48"	ONE LANE ROAD AHEAD or ____ FT or ____ MILE		35	
W20-5-48	48"x48"	RIGHT or CENTER or LEFT LANE CLOSED AHEAD or ____ FT or ____ MILE	8	35	280
W20-7-48	48"x48"	FLAGGER	4	35	140
W20-8-18	18"x18"	STOP - SLOW PADDLE Back to Back	4	5	20
W20-52P-54	54"x12"	NEXT ____ MILES (Mounted on warning sign post)		12	
W21-1-48	48"x48"	WORKERS		35	
W21-2-48	48"x48"	FRESH OIL		35	
W21-3-48	48"x48"	ROAD MACHINERY AHEAD or ____ FT or ____ MILE		35	
W21-5-48	48"x48"	SHOULDER WORK		35	
W21-5a-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED		35	
W21-5b-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED AHEAD or ____ FT or ____ MILE		35	

[illegible][illegible]

SPEC & CODE			
704-1000	TRAFFIC CONTROL SIGNS	TOTAL UNITS	2734

[illegible]

NOTE:
If additional signs are required, units will be calculated using the formula from Section III-18.06 of the Design Manual.
<http://www.dot.nd.gov/>



Traffic Control Devices List

I-94 Bridge Painting Various Locations

Valley City District

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	IM-2-094(197)257	170	1

NOTES:

- 100SCOPE OF WORK: Sandblast, clean, and paint all exposed structural steel at the four locations.
- 630SANDBLASTING AND PAINTING: Sandblast, clean and paint all structural steel surfaces according to Special Provision 274(23). Paint the finish coat in the colors as shown in the table below, which must meet Aerospace Material Specification Standard 595. The east side of bridge 94-258.055, girder 10 has conduit for lighting. Protect all conduit mounted on the bridge structure during the paint removal process and during the painting process Sand blast the girder with the conduit and bracket in place. Paint the conduit and bracket when painting the girder. Include the cost to paint conduit and bracket in bid item "SAND BLASTING & PAINTING". Lump Sum will be paid for the total area of 44,215 SF as noted in accordance with Special Provision 274(23).
- 630CONTAINMENT SYSTEM: Use a containment system that meets Special Provision 274(23).

SITE	BRIDGE NO.	LOCATION	COLOR	COLOR NUMBER	SPANS	GIRDER LENGTH	TOTAL AREA (SF)
1	94-257.002	I-94/West Jamestown Interchange	Blue	25095	3	172'-0"	6,100
2	94-258.055	I-94/US 281 Interchange	Blue	25184	4	276'-6"	27,155
3	94-298.746	I-94/Cuba Interchange	Blue	25184	4	219'-6"	5,480
4	94-300.750	I-94/West Oriska Separation	Blue	25184	4	219'-6"	5,480
						TOTAL	44,215

BRIDGE BID ITEMS (94-257.002)

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
630	0100	SAND BLASTING & PAINTING	L SUM	0.17
630	9000	CONTAINMENT SYSTEM	L SUM	0.17

BRIDGE BID ITEMS (94-258.055)

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
630	0100	SAND BLASTING & PAINTING	L SUM	0.41
630	9000	CONTAINMENT SYSTEM	L SUM	0.41

BRIDGE BID ITEMS (94-298.746)

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
630	0100	SAND BLASTING & PAINTING	L SUM	0.21
630	9000	CONTAINMENT SYSTEM	L SUM	0.21

BRIDGE BID ITEMS (94-300.750)

SPEC	CODE	ITEM DESCRIPTION	UNIT	QUANTITY
630	0100	SAND BLASTING & PAINTING	L SUM	0.21
630	9000	CONTAINMENT SYSTEM	L SUM	0.21



VARIOUS LOCATIONS IN
VALLEY CITY DISTRICT

STRUCTURAL STEEL PAINTING

ND DEPARTMENT OF TRANSPORTATION
BRIDGE DIVISION
Jason Thorenson
Thorenson, Jason R.
11/20/23

DRAWING NO.

Ⓢ This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.

Abn abandoned
Abut abutment
Adj adjusted
Aggr aggregate
Ahd ahead
ARV air release valve
Align alignment
Al alley
Alt alternate
Alum aluminum
ADA Americans with Disabilities Act
& and
Appr approach
Approx approximate
ACP asbestos cement pipe
Asph asphalt
AC asphalt cement
Assmd assumed
@ at
Atten attenuation
ATR automatic traffic recorder
Ave Avenue
Avg average
ADT average daily traffic

Bk back
BF back face
Balc balcony
B Wire barbed wire
Barr barricade
Btry battery
BI beehive inlet
Beg begin
BG below grade
BM bench mark
Bkwy bikeway
Bit bituminous
Blk block
BH bore hole
Bot bottom
Blvd Boulevard
Bndry boundary
Brkwy breakaway
Br bridge
Bldg building
Bus. business
BV butterfly valve
Byp bypass

C Gdrl cable guardrail
Calc calculate
CIP cast iron pipe
CB catch basin
CRS cationic rapid setting
C Gd cattle guard
C To C center to center
CL or ☐ centerline
Ch chain
Chnlk chain-link
Ch Blk channel block
Ch Ch channel change
Chk check
Chsld chiseled
Cir circle
Cl class
Clnt clean-out
Clr clear
Cl&gr clearing & grubbing
Comb. combination
Coml commercial
Compr compression
CADD computer aided drafting & design
Conc concrete
CECB concrete erosion control blanket
Cond conductor
Const construction
Cont continuous
CSB continuous split barrel sample
Contr contraction
Contr contractor
CP control point
Coord coordinate
Cor corner
Corr corrected
CAES corrugated aluminum end section
CAP corrugated aluminum pipe
CMES corrugated metal end section
CMP corrugated metal pipe
CPVCP corrugated poly-vinyl chloride pipe
CSES corrugated steel end section
CSFES corrugated steel flared end section
CSP corrugated steel pipe
CSTES corrugated steel traversable end section
Co County
Crse course
Ct Court
Xarm cross arm
Xbuck cross buck
Xsec cross sections
Xing crossing
Xrd crossroad
Crm crown

Culv culvert
C&G curb & gutter
CI curb inlet
CR curb ramp
C cut

Dd Ld dead load
Defl deflection
Defm deformed
DInt delineate
DIntr delineator
Depr depression
Desc description
Det detail
DWP detectable warning panel
Dtr detour
Dia or ø diameter
Dir direction
Dist distance
DM disturbed material
DB ditch block
DG ditch grade
Dbl double
Dn down
Dwg drawing
Dr drive
Drwy driveway
DI drop inlet
D dry density

Ea each
Esmt easement
E East
EB Eastbound
Elast elastomeric
EL electric locker
E Mtr electric meter
Elec electric/al
EDM electronic distance meter
Elev or El elevation
Ellipt elliptical
Emb embankment
Emuls emulsion/emulsified
ES end section
Engr engineer
ESS environmental sensor station
Eq equal
Evgr evergreen
Exc excavation
Exst existing
Exp expansion
Expy Expressway
E external of curve
Extru extruded

FOS factor of safety
Fed Federal
FP feed point
Fn fence
Fn P fence post
FO fiber optic
FD field drive
F fill
FAA fine aggregate angularity
FH fire hydrant
Fl flange
Flrd flared
FES flared end section
F Bcn flashing beacon
FA flight auger sample
FL flow line
Ftg footing
FM force main
Fnd found
Fdn foundation
Frac fractional
Frwy freeway
Frt front
FF front face
F Disp fuel dispenser
FFP fuel filler pipes
FLS fuel leak sensor
Furn furnish/ed

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-10-20	General Revisions
08-16-22	General Revisions



NDDOT ABBREVIATIONS

D-101-2

Galv	galvanized	Ln	lane	Obsc	obscure(d)	Qty	quantity
Gar	garage	Lg	large	Ocpd	occupied	Qtr	quarter
Gs L	gas line	Lat	latitude	Ocpy	occupy		
G Reg	gas line regulator	Lt	left	O/s	offset		
GMV	gas main valve	Lens	lenses	OC	on center	Rad or R	radius
G Mtr	gas meter	Lvl	level	C	one dimensional consolidation	RR	railroad
GSV	gas service valve	Lvng	leveling	OC	organic content	Rlwy	railway
GVP	gas vent pipe	Lht	light	Orig	original	Rsd	raised
GV	gate valve	LP	light pole	O To O	out to out	RC	rapid curing
Ga	gauge	Ltg	lighting	OD	outside diameter	Rec	record
Gov	government	Liq	liquid	OH	overhead	Rcy	recycle
Grd	graded/grade	LL	liquid limit			RAP	recycled asphalt pavement
Grnd	ground	Loc	location			RPCC	recycled portland cement concrete
GWM	ground water monitor	Long.	longitude	PMT	pad mounted transformer	Ref	reference
Gdrl	guardrail	Lp	loop	Pg	pages	R Mkr	reference marker
Gtr	gutter	LD	loop detector	Pntd	painted	RM	reference monument
		Lum	luminaire	Pr	pair	RP	reference point
				Pnl	panel	Refl	reflectorized
				Pk	park	RCB	reinforced concrete box
H Plg	H piling			PSD	passing sight distance	RCES	reinforced concrete end section
Hdwl	headwall	Mb	mailbox	Pvmt	pavement	RCFES	reinforced concrete flared end section
Ht	height	ML	main line	Ped	pedestal	RCP	reinforced concrete pipe
Hel	helical	MH	manhole	Ped	pedestrian	RCPS	reinforced concrete pipe sewer
HDPE	high density polyethylene	Mkd	marked	PPP	pedestrian pushbutton post	RCTES	reinforced concrete traversable end section
HM	high mast	Mkr	marker	Pen.	penetration	Reinf	reinforcement
HP	high pressure	Mkg	marking	Perf	perforated	Res	reservation
HPS	high pressure sodium	MA	mast arm	Per.	perimeter	Res	residence
HTCG	high tension cable guardrail	Matl	material	Perm	permanent	Ret	retaining
Hwy	highway	Max	maximum	PL	pipeline	Rev	reverse
Hor	horizontal	MC	meander corner	PI	place	Rt	right
HBP	hot bituminous pavement	Meas	measure	P&P	plan & profile	R/W	right of way
HMA	hot mix asphalt	Mdn	median	PL	plastic limit	Riv	river
Hyd	hydrant	MD	median drain	PI or P _L	plate	Rd	road
Ph	hydrogen ion content	MC	medium curing	Pt	point	Rdbd	road bed
		MGS	Midwest Guardrail System	PE	polyethylene	Rdwy	roadway
		MM	mile marker	PVC	polyvinyl chloride	RWIS	roadway weather information system
Id	identification	MP	mile post	PCC	Portland Cement concrete	Rk	rock
Incl	inclinometer tube	Min	minimum	PP	power pole	Rt	route
IMH	inlet manhole	Misc	miscellaneous	Preempt	preemption		
ID	inside diameter	Mon	monument	Prefab	prefabricated		
Inst	instrument	Mnd	mound	Prfmd or Pref	preformed		
Intchg	interchange	Mtbl	mountable	Prep	preperation		
Intmdt	intermediate	Mtd	mounted	Press.	pressure		
Intscn	intersection	Mtg	mounting	PRV	pressure relief valve		
Inv	invert	Mk	muck	Prestr	prestressed		
IP	iron pipe			Pvt	private		
				PD	private drive		
				Prod.	production/produce		
				Prog	programmed		
				Prop.	property		
				Prop Ln	property line		
				Ppsd	proposed		
				PB	pull box		
Jt	joint	Neop	neoprene				
Jct	junction	Ntwk	network				
		N	North				
		NE	North East				
		NW	North West				
		NB	Northbound				
		No. or #	number				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions



08/16/22

Salv	salvage(d)	Tel	telephone
San	sanitary sewer line	Tel B	Telephone Booth
Sec	section	Tel P	telephone pole
SL	section line	Tv	television
Sep	separation	Temp	temperature
Seq	sequence	Temp	temporary
Serv	service	TBM	temporary bench mark
Sht	sheet	T	thinwall tube sample
Shtng	sheeting	Ts	topsoil
Shldr	shoulder	Traf	traffic
Sw or Sdwk	sidewalk	TSCB	traffic signal control box
SD	sight distance	Tr	trail
SN	sign number	Transf	transformer
Sig	signal	Trans	transition
Sgl	single	TT	transmission tower
SRCP	slotted reinforced concrete pipe	TES	traversable end section
SC	slow curing	Trans	transverse
SS	slow setting	Trtd	treated
Sm	small	Trmt	treatment
S	South	Qc	triaxial compression
SE	South East	TERO	tribal employment rights ordinance
SW	South West	Tpl	triple
SB	Southbound	Typ	typical
Sp	spaces		
Spcl	special	Qu	unconfined compressive strength
SA	special assembly	Ugrnd	underground
SP	special provisions	Util	utility
G	specific gravity		
Spk	spike	VG	valley gutter
SB	split barrel sample	Vap	vapor
SH	sprinkler head	Vert	vertical
SV	sprinkler valve	VCP	vitrified clay pipe
Sq	square	Vol	volume
Stk	stake	VSFS	vehicle speed feedback sign
Std	standard		
N	standard penetration test	Wkwy	walkway
Std Specs	standard specifications	W	water content
Stm L	steam line	WGV	water gate valve
SEC	steel encased concrete	WL	water line
SMA	stone matrix asphalt	WM	water main
SSD	stopping sight distance	WMV	water main valve
SD	storm drain	W Mtr	water meter
St	street	WSV	water service valve
SPP	structural plate pipe	WW	water well
SPPA	structural plate pipe arch	Wrng	wearing
Str	structure	WIM	weigh in motion
Subd	subdivision	W	west
Sub	subgrade	WB	westbound
Sub Prep	subgrade preparation	Wrng	wiring
Ss	subsoil	W/	with
SS	supplement specification	W/o	without
Supp	supplemental	WC	witness corner
Surf	surfacing		
Surv	survey		
Sym	symmetrical		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions

08/16/22

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International

T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added - Continued from D-101-3

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

ENGINEER

NORTH DAKOTA

12 18 2020

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM	702 Communications	GT PLNS NAT GAS	Great Plains Natural Gas Company	RED RIV COMM	Red River Rural Communications
ACCENT	Accent Communications	HALS TEL	Halstad Telephone Company	RESVTN TEL	Reservation Telephone
AGASSIZ WU	Agassiz Water Users Incorporated	IDEA1	Idea1	ROBRTS TEL	Roberts Company Telephone
AGC	Associated General Contractors of America	INT-COMM TEL	Inter-Community Telephone Company	R-RIDER ELEC	Roughrider Electric Cooperative
ALL PL	Alliance Pipeline	KANEB PL	Kaneb Pipeline Company	RRVW	Red River Valley & Western Railroad
ALL SEAS WU	All Seasons Water Users Association	KEM ELEC	Kem Electric Cooperative Incorporated	S CENT REG WD	South Central Regional Water District
AMOCO PI	Amoco Pipeline Company	KOCH GATH SYS	Koch Gathering Systems Incorporated	S E W U	South East Water Users Incorporated
AMRDA HESS	Amerada Hess Corporation	LKHD PL	Lakehead Pipeline Company	SCOTT CABLE	Scott Cable Television Dickinson
AT&T	AT&T Corporation	LNGDN RWU	Langdon Rural Water Users Incorporated	SHERDN ELEC	Sheridan Electric Cooperative
B PAW	Bear Paw Energy Incorporated	LWR YELL R ELEC	Lower Yellowstone Rural Electric	SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
BAKER ELEC	Baker Electric	MCKNZ CON	McKenzie Consolidated Telcom	SKYTECH	Skyland Technologies Incorporated
BASIN ELEC	Basin Electric Cooperative Incorporated	MCKNZ ELEC	McKenzie Electric Cooperative	SLOPE ELEC	Slope Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative	MCKNZ WRD	McKenzie County Water Resource District	SOURIS RIV TELCOM	Souris River Telecommunications
BELLE PL	Belle Fourche Pipeline Company	MCLEOD	McLeod USA	ST WAT COMM	State Water Commission
BLM	Bureau of Land Management	MCLN ELEC	McLean Electric Cooperative	STATE LN WATER	State Line Water Cooperative
BNSF	Burlington Northern Santa Fe Railway	MCLN-SHRDN R WAT	McLean-Sheridan Rural Water	STER ENG	Sterling Energy
BOEING	Boeing	MDU	Montana-dakota Utilities	STUT RWU	Stutsman Rural Water Users
BRNS RWD	Barnes Rural Water District	MIDCO	MidContinent Communications	SW PL PRJ	Southwest Pipeline Project
BURK-DIV ELEC	Burke-Divide Electric Cooperative	MIDSTATE TEL	Midstate Telephone Company	T M C	Turtle Mountain Communications
BURL WU	Burleigh Water Users	MINOT CABLE	Minot Cable Television	TCI	TCI of North Dakota
CABLE ONE	Cable One	MINOT TEL	Minot Telephone Company	TESORO GHG PLNS PL	Tesoro High Plains Pipeline
CABLE SERV	Cable Services	MISS VALL COMM	Missouri Valley Communications	TRI-CNTY WU	Tri-County Water Users Incorporated
CAP ELEC	Capital Electric Cooperative Incorporat	MISS W W S	Missouri West Water System	TRL CO RWU	Traill County Rural Water Users
CASS CO ELEC	Cass County Electric Cooperative	MNKOTA PWR	Minnkota Power	UNTD TEL	United Telephone
CASS RWU	Cass Rural Water Users Incorporated	MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative	UPPR SOUR WUA	Upper Souris Water Users Association
CAV ELEC	Cavalier Rural Electric Cooperative	MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative	US SPRINT	U.S. Sprint
CBLCOM	Cablecom Of Fargo	MRE LBTY TEL	Moore & Liberty Telephone	USAF MSL CABLE	U.S.A.F. Missile Cable
CENEX PL	Cenex Pipeline	MUNICIPAL	City Water And Sewer	USFWS	US Fish and Wildlife Service
CENT PL WATER DIST	Central Pipe Line Water District	MUNICIPAL	City Of '.....'	USW COMM	U.S. West Communications
CENT PWR ELEC	Central Power Electric Cooperative	N CENT ELEC	North Central Electric Cooperative	VRNDRY ELEC	Verendrye Electric Cooperative
CENTURYLINK	CenturyLink	N VALL W DIST	North Valley Water District	W RIV TEL	West River Telephone Incorporated
COE	Corps of Engineers	ND PKS & REC	North Dakota Parks And Recreation	WAPA	Western Area Power Administration
CONS TEL	Consolidated Telephone	ND TEL	North Dakota Telephone Company	WAWSA	Western Area Water Supply Authority
CONT RES	Continental Resource Inc	NDDOT	North Dakota Department of Transportation	WEB	W. E. B. Water Development Association
CPR	Canadian Pacific Railway	NDSU SOIL SCI DEPT	NDSU Soil Science Department	WILLI RWA	Williams Rural Water Association
D O E	Department Of Energy	NEMONT TEL	Nemont Telephone	WILSTN BAS PL	Williston Basin Interstate Pipeline Company
DAK CARR	Dakota Carrier Network	NODAK R ELEC	Nodak Rural Electric Cooperative	WLSH RWD	Walsh Water Rural Water District
DAK CENT TEL	Dakota Central Telephone	NOON FRMS TEL	Noonan Farmers Telephone Company	WOLVRTN TEL	Wolverton Telephone
DAK RWD	Dakota Rural Water District	NPR	Northern Plains Railroad	XLENER	Xcel Energy
DGC	Dakota Gasification Company	NSP	Northern States Power	YSVR	Yellowstone Valley Railroad
DICKEY R NET	Dickey Rural Networks	NTH PRAIR RW	Northern Prairie Rural Water Association		
DICKEY RWU	Dickey Rural Water Users Association	NTHN BRDR PL	Northern Border Pipeline		
DICKEY TEL	Dickey Telephone	NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated		
DNRR	Dakota Northern Railroad	NTHWSTRN REF	Northwestern Refinery Company		
DOME PL	Dome Pipeline Company	NW COMM	Northwest Communication Cooperation		
DVELEC	Dakota Valley Electric Cooperative	NWRWD	Northwest Rural Water District		
DVMW	Dakota, Missouri Valley & Western	ONEOK	Oneok gas		
ENBRDG	Enbridge Pipelines Incorporated	OSHA	Occupational Safety and Health Administration		
ENVENTIS	Enventis Telephone	OTTR TL PWR	Otter Tail Power Company		
EQUINOR	Equinor Pipeline	PAAP	Plains All American Pipeline		
FALK MNG	Falkirk Mining Company	P L E M	Prairielands Energy Marketing		
FHWA	Federal Highway Administration	POLAR COM	Polar Communications		
G FKS-TRL WD	Grand Forks-traill Water District	PVT ELEC	Private Electric		
GETTY TRD & TRAN	Getty Trading & Transportation	QWEST	Qwest Communications		
GLDN W ELEC	Golden West Electric Cooperative	R&T W SUPPLY	R & T Water Supply Association		
GRGS CO TEL	Griggs County Telephone				
GTR RAMSEY WD	Greater Ramsey Water District				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
05-28-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions



08/16/22

LINE STYLES

D-101-20

Existing Topography

	Existing Ground Void
	Existing Cemetery Boundary
	Existing Box Culvert Bridge
	Existing Concrete Surface
	Existing Drainage Structure
	Existing Gravel Surface
	Existing Riprap
	Existing Dirt Surface
	Existing Asphalt Surface
	Existing Tie Point Line
	Existing Railroad Centerline
	Existing Guardrail Cable
	Existing Guardrail Metal
	Existing Edge of Water
	Existing Fence
	Existing Railroad
	Existing Field Line
	Exst Flow
	Existing Curb
	Existing Valley Gutter
	Existing Driveway Gutter
	Existing Curb and Gutter
	Existing Mountable Curb and Gutter

Proposed Topography

	Existing 3-Cable w Posts
	Site Boundary
	Existing Berm, Dike, Pit, or Earth Dam
	Existing Ditch Block
	Existing Tree Boundary
	Existing Brush or Shrub Boundary
	Existing Retaining Wall
	Existing Planter or Wall
	Existing W-Beam Guardrail with Posts
	Existing Railroad Switch
	Gravel Pit - Borrow Area
	Existing Wet Area-Vegetation Break
	Existing High Tension Cable Guardrail
	Existing High Tension Cable Guardrail with Posts
	3-Cable w Posts
	Flow
	Fence
	Remove Line
	Wall
	Retaining Wall (Plan View)
	W-Beam w Posts
	High Tension Cable Guardrail with Posts

Existing Utilities

	Existing Electrical
	Existing Fiber Optic Line
	Existing TV Fiber Optic
	Existing Gas Pipe
	Existing Overhead Utility Line
	Existing Power
	Existing Fuel Pipeline
	Existing Undefined Above Ground Pipe Line
	Existing Sanitary Sewer
	Existing Sanitary Force Main
	Existing Storm Drain
	Existing Storm Drain Force Main
	Existing Culvert
	Existing Telephone Line
	Existing TV Line
	Existing Water or Steam Line
	Existing Under Drain
	Existing Slotted Drain
	Existing Conduit
	Existing Conductor
	Existing Down Guy Wire Down Guy
	Existing Underground Vault or Lift Station

Proposed Utilities

	24 Inch Pipe
	Reinforced Concrete Pipe
	Under Drain
	Edge Drain

Traffic Utilities

	Conductor
	Fiber Optic
	Existing Loop Detector
	Existing Double Micro Loop Detector
	Micro Loop Detector Double
	Existing Micro Loop Detector
	Micro Loop Detector
	Signal Head with Mast Arm
	Existing Signal Head with Mast Arm

Sign Structures

	Existing Overhead Sign Structure
	Existing Overhead Sign Structure Cantilever
	Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups
12-18-20	General Revisions

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

ENGINEER

NORTH DAKOTA

12 18 2020

LINE STYLES

D-101-21

Right Of Way

	Easement
	Existing Easement
	Right of Way
	Existing Right of Way
	Existing Right of Way Railroad
	Existing Right of Way Not State Owned
	Existing Government Lot Line
	Existing Adjacent Block Lines
	Existing Adjacent Lot Lines
	Existing Adjacent Property Line
	Existing Adjacent Subdivision Lines
	Sight Distance Triangle Line
	Dimension Leader

Boundary Control

	Existing City Corporate Limits or Reservation Boundary
	Existing State or International Line
	Existing Township
	Existing County
	Existing Section Line
	Existing Quarter Section Line
	Existing Sixteenth Section Line
	Existing Centerline
	Tangent Line

Cross Sections and Typicals

	Existing Ground
	Existing Topsoil (Cross Section View)
	Existing Ground Void (Not Surveyed)
	Existing Concrete
	Existing Aggregate (Cross Section View)
	Existing Curb and Gutter (Cross Section View)
	Existing Asphalt (Cross Section View)
	Existing Reinforcement Rebar

Geotechnical

	Geotextile Fabric Type D
	Geogrid
	Geotextile Fabric Type R
	Geotextile Fabric Type R1
	Geotextile Fabric Type RR
	Geotextile Fabric Type S

Subgrade Reinforcement

Failure Line

Countours

	Depression Contours
	Supplemental Contour

Profile

	Subgrade, Subcut or Ditch Grade
	Topsoil Profile

Striping

	Centerline Pavement Marking
	Barrier with Centerline Pavement Marking
	Barrier Pavement Marking
	Stripe 4 IN Dotted Extension White
	Stripe 8 IN Dotted Extension White
	Stripe 8 IN Lane Drop

Pavement Joints

	Doweled Joint
	Tie Bar 30 Inch 4 Foot Center to Center
	Tie Bar 18 Inch 3 Foot Center to Center
	Tie Bar at Random Spacing

Bridge Details

	Small Hidden Object
	Large Hidden Object
	Phantom Object
	Existing Conditions Object
	Centerline Main
	Centerline Secondary
	Excavation Limits
	Proposed Ground
	Sheet Piling

Erosion Control

	Limits of Const Transition Line
	Bale Check
	Rock Check
	Floating Silt Curtain
	Silt Fence
	Excavation Limits
	Fiber Rolls

Environmental

	Wetland Mitigation
	Existing Wetland Easement USFWS
	Existing Wetland Jurisdictional
	Existing Wetland
	Tree Row

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups General Revisions
12-18-20	

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

ENGINEER

NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-30

	North Arrow (Half Scale)		Existing Bush or Shrub		Continuous Split Barrel Sample
	Alignment Data Point		Existing Large Evergreen Tree		Flight Auger Sample
	Alignment Monument		Existing Small Evergreen Tree		Split Barrel Sample
	Spot Elevation		Existing Large Tree		Thinwall Tube Sample
	Existing Miscellaneous Spot		Existing Small Tree		Standard Penetration Test
	Existing Access Control Arrow		Existing Tree Trunk		Inclinometer Tube
	Existing Benchmark		Cairn or Stone Circle		Excavation Unit
	Reset USGS Marker		Existing Artifact		Existing Ground Water Well Bore Hole
	Iron Monument Found		Existing Satellite Dish		
	Iron Pin R/W Monument		Existing Weather Station		
	Property Corner		Existing Windmill or Tower		
	Iron Pin Reference Monument		Reinforced Pavement		
	Right of Way Marker (Exst, Ppsd, Reset)				
	Existing Federal Reference Corner				
	Existing Section Corner (Full, Quarter, Sixteenth, Meander)				
	Existing Witness Corner				
	Existing Control Point (CP, GPS-RTK, TRI)				
	Existing Traverse PI Aerial Panel				
	Existing Reference Marker Point NGS				
	Existing EFB Misc				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

ENGINEER

NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-31

				Flexible Delineator				Highway Sign (Exst, Ppsd)
				Flexible Delineator Type A (Exst, Ppsd)				Mile Post Type A (Exst-Ppsd-Reset)
				Flexible Delineator Type B (Exst, Ppsd)				Mile Post Type B (Exst, Ppsd)
				Flexible Delineator Type C (Exst, Ppsd)				Mile Post Type C (Exst, Ppsd)
				Flexible Delineator Type D (Exst, Ppsd)				Object Marker Type I (Exst, Ppsd)
				Flexible Delineator Type E (Exst, Ppsd)				Object Marker Type II (Exst, Ppsd)
				Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)				Object Marker Type III (Exst, Ppsd)
				Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)				Existing Reference Marker
				Delineator Type C (Exst, Ppsd, Diamond Grade)				Road Closure Gate 18 Ft (Exst, Ppsd)
				Delineator Type D (Exst, Ppsd, Diamond Grade)				Road Closure Gate 28 Ft (Exst, Ppsd)
				Delineator Type E (Exst, Ppsd, Diamond Grade)				Road Closure Gate 40 Ft (Exst, Ppsd)
				Barricade (Type I, Type II, Type III)				Existing Railroad Battery Box
				Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)				Existing RR Profile Spot
				Attenuation Device				Existing Railroad Crossbuck
				Truck Mounted Attenuator				Existing Railroad Frog
				Delineator Drums				Existing Mailbox (Private, Federal)
				Flagger				
				Tubular Marker				
				Traffic Cone				
				Back to Back Vertical Panel Sign				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14 REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-32

	Existing Luminaire			High Mast Light Standard 3 Luminaire (Exst, Ppsd)		Existing Traffic Signal Standard			
	Luminaire LED			High Mast Light Standard 4 Luminaire (Exst, Ppsd)				Pull Box (Exst-Ppsd-Undefined)	
	Existing Light Standard Luminaire			High Mast Light Standard 5 Luminaire (Exst, Ppsd)				Intelligent Transportation Pull Box (Exst, Ppsd)	
	Relocate Light Standard			High Mast Light Standard 6 Luminaire (Exst, Ppsd)				Transformer (Exst, Ppsd)	
	Light Standard Light LED Luminaire			High Mast Light Standard 7 Luminaire (Exst, Ppsd)				Power Pole (Exst-Ppsd-with Transformer)	
	Light Standard 35 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 8 Luminaire (Exst, Ppsd)				Wood Pole (Exst, Ppsd)	
	Light Standard 50 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 9 Luminaire (Exst, Ppsd)				Pedestrian Push Button Post (Exst, Ppsd)	
	Light Standard 70 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 10 Luminaire (Exst, Ppsd)				Existing Pole	
	Light Standard 100 Watt High Pressure Sodium Vapor Luminaire			Overhead Sign Structure Load Center (Exst, Ppsd)				Existing Telephone Pole	
	Light Standard 150 Watt High Pressure Sodium Vapor Luminaire			Traffic Signal Controller (Exst, Ppsd)				Existing Post	
	Light Standard 200 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Traffic Signal Controller (Exst, Ppsd)					Connection Conductor (Ground, Neutral, Phase 1, Phase 2)
	Light Standard 250 Watt High Pressure Sodium Vapor Luminaire			Flashing Beacon (Exst, Ppsd)					
	Light Standard 310 Watt High Pressure Sodium Vapor Luminaire			Concrete Foundation (Exst, Ppsd)					
	Light Standard 400 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Flasher (Exst, Ppsd)					
	Light Standard 700 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Feed Point (Exst, Ppsd)					
	Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Feed Point with Pad (Exst, Ppsd)					
	Emergency Vehicle Detector			Pole Mounted Feed Point (Exst, Ppsd)					
	Video Detection Camera			Junction Box (Exst, Ppsd)					
				Existing Pedestrian Head with Number					
				Existing Signal Head					
				Pole Mounted Head					
				Existing Lighting Standard Pole					

NORTH DAKOTA

DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF

REGISTERED



PROFESSIONAL

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



12 18 2020

SYMBOLS

D-101-33



			Existing Manhole (Electrical, Gas, Telephone)		Cap or Stub Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water
			Water Manhole (Exst, Exst with Valve)		Existing Pedestal Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined
			Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)		Existing Pipe Vent Gas, Fuel, Sanitary, Storm Drain, Water, Undefined
			Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)		Valve Exst Gas, Exst Water, Ppsd Water, Exst Undefined
			Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)		Pump Sanitary, Storm Drain, Exst Water
			Force Main Storm Drain Manhole (Exst, Exst with Valve)		Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)		Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Existing Water Appurtenance		Existing Utility Marker
			Sprinkler Head (Exst, Ppsd)		Existing Meter
			Fire Hydrant (Exst, Ppsd)		Existing Fuel Dispensers
			Cleanout (Exst Sanitary, Underdrain)		Existing Fuel Filler Pipes
			Existing Catch Basin Inlet (Round, Square)		Existing Fuel Leak Sensors
			Existing Curb Inlet (Round, Square)		
			Existing Slotted Reinforced Concrete Pipe		
			Catch Basin (Riser 30 Inch, Beehive, Type A)		
			Inlet Mountable Curb (Type A, Type B)		
			Inlet Saddle Base (Type 1, Type 2)		
			Inlet Special (Catch Basin, Type 1, Type A)		
			Inlet (Tee, Type 1, Type 2, Type 2 Double)		
			Median Drain		
			Headwall (Exst, Ppsd, Ppsd Single with Vegetation Barrier, Ppsd Double with Vegetation Barrier)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020


ATTENUATION DEVICE




Outer Containers



Cones



Typical Assembly

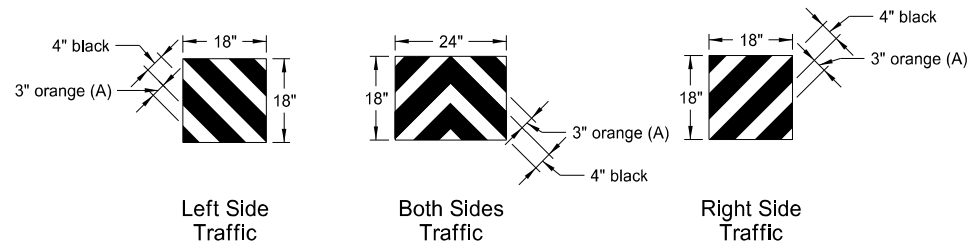


Reflective Sheet Detail

Note:
Apply Type IV reflective sheeting (as specified in the NDDOT Standard Specifications) directly to the outer container of the last attenuation device facing traffic, following the details above.
Or apply the sheet to a metallic sheet and attach it to the container with approved fasteners.


(A) Use 3" orange sheeting for temporary installations, and 3" yellow sheeting for permanent installations.

Fill Chart					
	Module Weights (LBS)				
	200	400	700	1400	2100
Distance from top edge	8½"	5"	4"	3"	0"

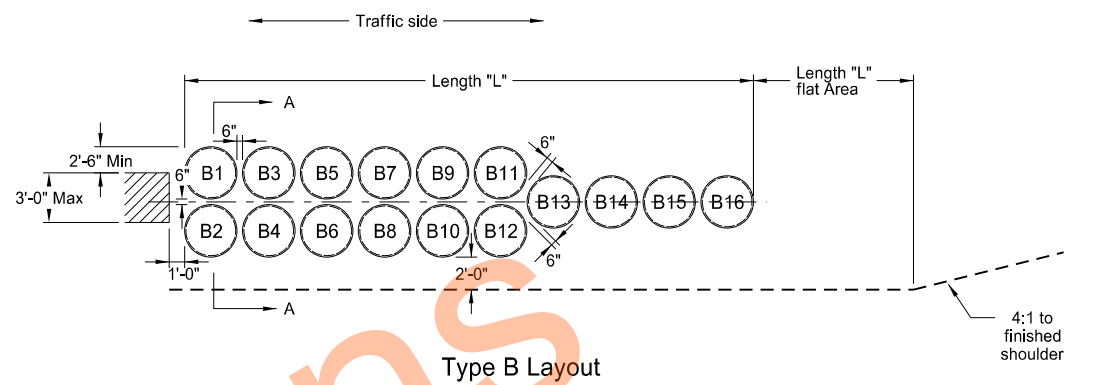

Type B Layout

Note:
Angle attenuation devices 10 degrees towards traffic when placed at piers offset from roadway.

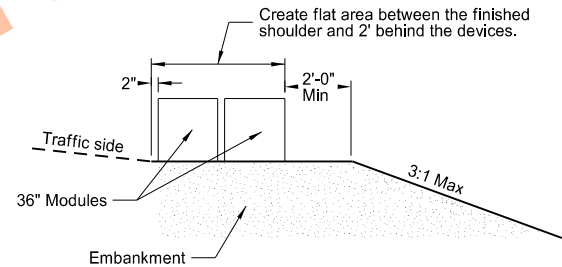

Section A-A
(Type B Layout)

Type B Attenuation Device											
Module Number	Dash Number										
	75	70	65	60	55	50	45	40	35	30	25
	Module Weights (LBS)										
B1	2100										
B2	2100										
B3	2100	2100	2100	2100	2100	2100	2100	2100	2100		
B4	2100	2100	2100	2100	2100	2100	2100	2100	2100		
B5	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B6	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B7	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B8	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
B9	700	700	700	700	700	700	700	700	700	700	700
B10	700	700	700	700	700	700	700	700	700	700	700
B11	700	700	700	700	700	700	700	700	700	700	700
B12	700	700	700	700	700	700	700	700	700	700	700
B13	700	700	700	700	700	700	700	700	700	700	700
B14	400	400	400	400	400	400	400	400	400	400	400
B15	400	400	400	400	400	400	400	400	400	400	400
B16	200	200	200	200	200	200	200	200	200	200	200
Length (L)	34.2'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	30.7'	27.2'	27.2'
Module Weights (LBS)	Replacement Module										
2100	1	1	1	1	1	1	1	1	1		
1400	1	1	1	1	1	1	1	1	1	1	1
700	2	2	2	2	2	2	2	2	2	2	2
400	1	1	1	1	1	1	1	1	1	1	1
200	2	2	2	1	1	1	1	1	1	1	1

Notes:

2. **Materials**
 - A) Use modules manufactured from frangible polyethylene material which shatters upon impact.
 - B) Fill modules with class 43 aggregate meeting NDDOT Standard Specifications aggregate requirements. Use fill with a unit weight of at least 100 pounds per cubic foot. Use fill with a moisture content of 2% or less when left over winter.
3. **Modules**

Provide modules in two sizes containing volumes of either 2, 4, 7, 14, or 21 cubic feet minimum.




 - A) Provide three components for 2, 4, or 7 cubic foot module containers:
 - 1) A 14 C.F., yellow outer container.
 - 2) A black lid securely locking over the top lip of the container.
 - 3) A variable cone-shaped supporting insert capable of supporting 200, 400, or 700 pounds of sand mass to allow for three sizes of modules. Place cone inserts inside the 14 cubic foot container.
 - B) Provide two components for the 14 cubic foot module container:
 - 1) A 14 C.F., yellow outer container.
 - 2) A black lid securely locking over the top lip of the container.
 - C) Provide two components for the 21 cubic foot module container:
 - 1) A 36" height X 36" width yellow outer container.
 - 2) A black lid which locks securely over the top of the container.
4. For temporary installations use Energite or Fitch attenuation barrels manufactured by Energy Absorption Systems of Chicago, IL, TraFFix barrels manufactured by TraFFix Devices, Inc. of San Clemente, CA, or approved equal modules. As an option, place attenuation devices on 3½" maximum thickness pallets to facilitate maintenance.
5. For permanent installations use Barrel Attenuation Device consisting of one-piece outer sand container modules with separate detachable lid. Energite attenuation barrels manufactured by Energy Absorption Systems of Chicago, IL, TraFFix barrels manufactured by TraFFix Devices, Inc. of San Clemente, CA, or approved equal meet these requirements.
6. **The Typical Module Construction Detail and Type B Layout are based on the Energite Crash Cushion manufactured by Energy Absorption. Provide any required layouts and details from other sand filled attenuation module manufacturers which differ from those shown here.**

NORTH DAKOTA	
DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE
7-18-14	Revised sheeting in reflective sheet detail
9-27-17	Update to active voice
10-03-19	New Design Engr PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/03/19 and the original document is stored at the
North Dakota Department
of Transportation

Perforated Tube

- Notes:
1. Torque slip base bolts as specified by manufacturer.
 2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
 3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
 4. In concrete sidewalk, use same anchor without wings.
 5. Provide more than 7' between the first and fourth posts of a four post sign.


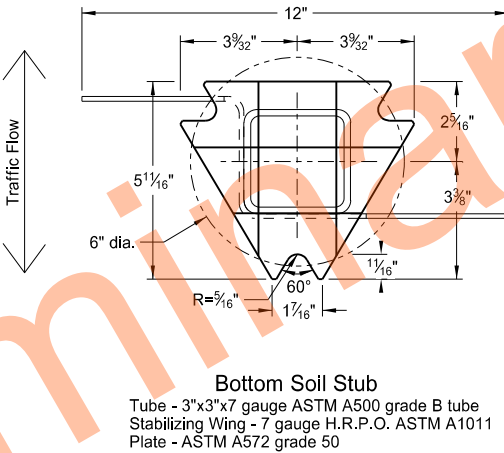
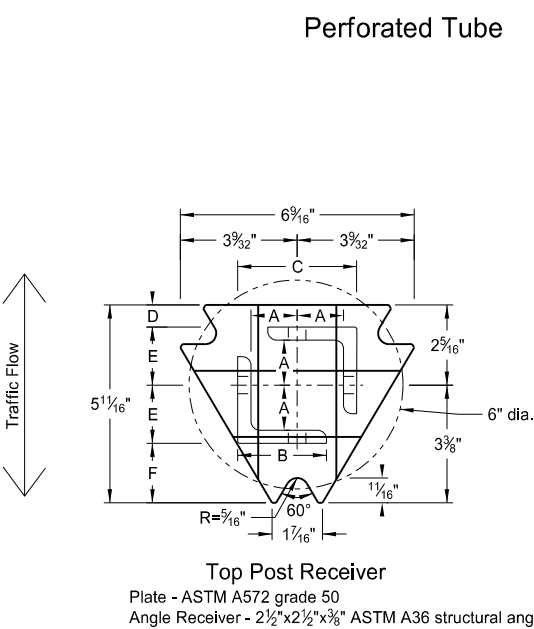
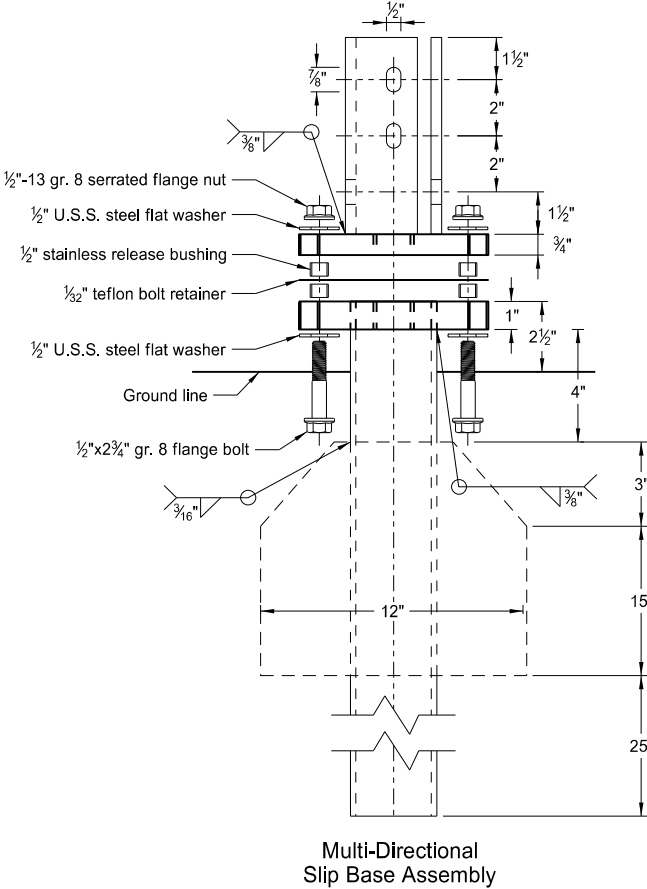


Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/8 x 2 3/8	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785






Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 5/16"	2 1/2"	3 1/2"	2 5/32"	1 33/64"	1 7/8"
2 1/2"x10 ga.	1 3/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

- (A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.
- (B) For additional wind load, insert the 2 3/8"x10 ga. into 2 1/2"x10 ga.

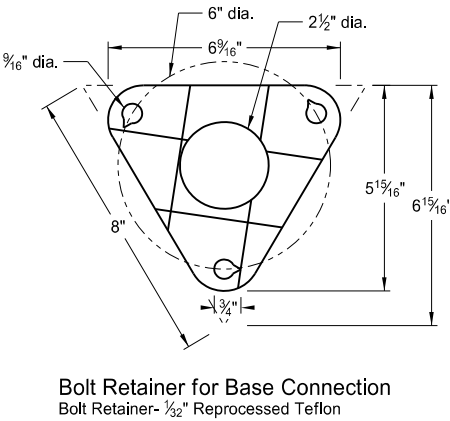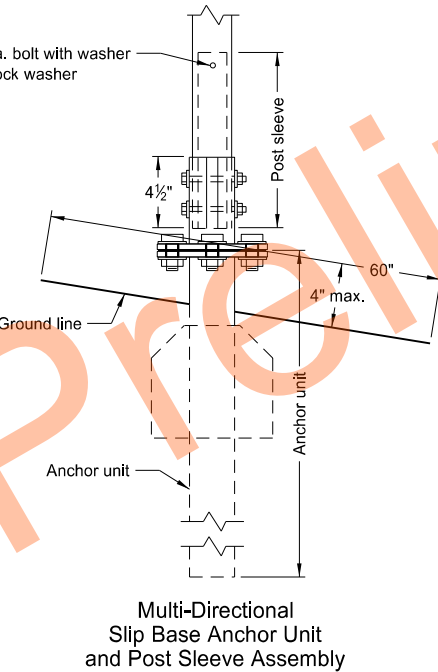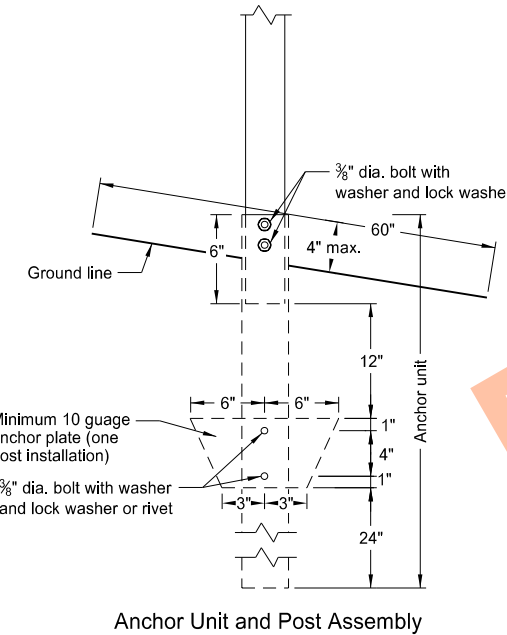

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		This document was originally issued and sealed by Kirk J Hoff, Registration Number PE- 4683, on 10/03/19 and the original document is stored at the North Dakota Department of Transportation
2-28-14		
REVISIONS		
DATE	CHANGE	
9-27-17 10-03-19	Updated to active voice New Design Engr PE Stamp	

U-Channel Post

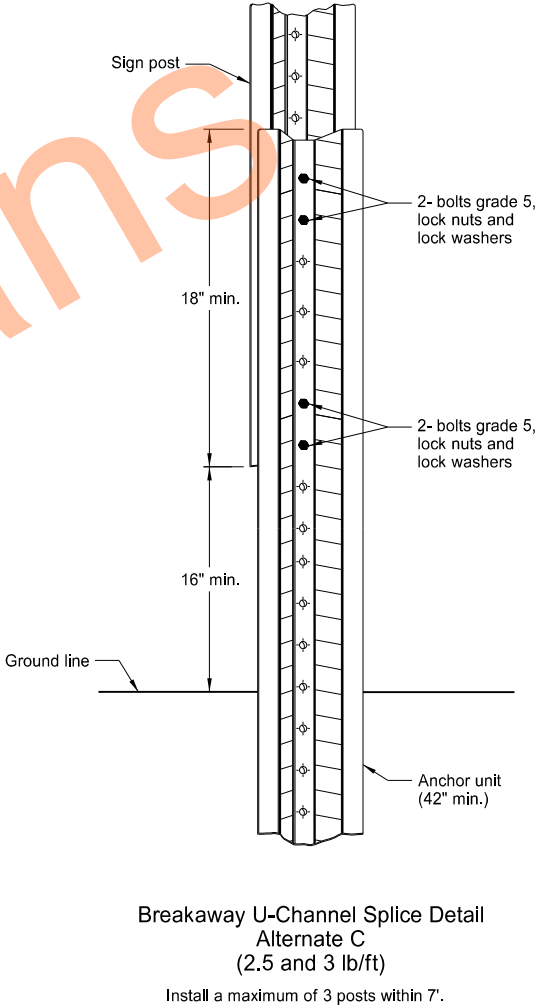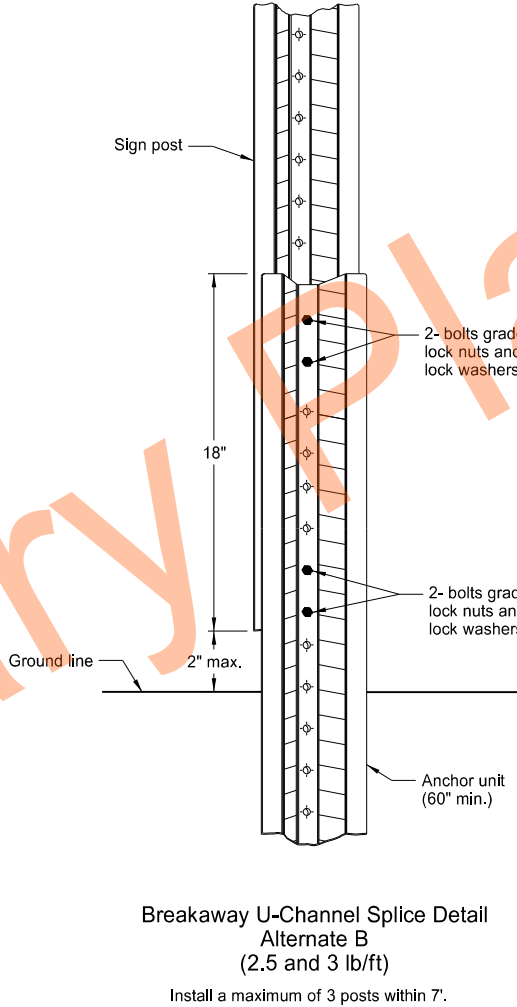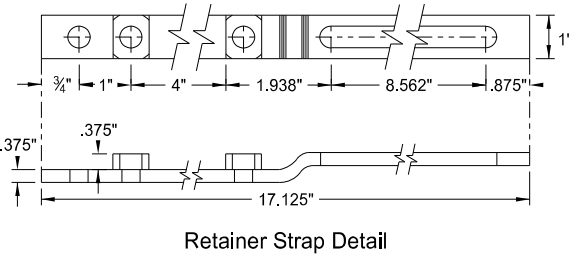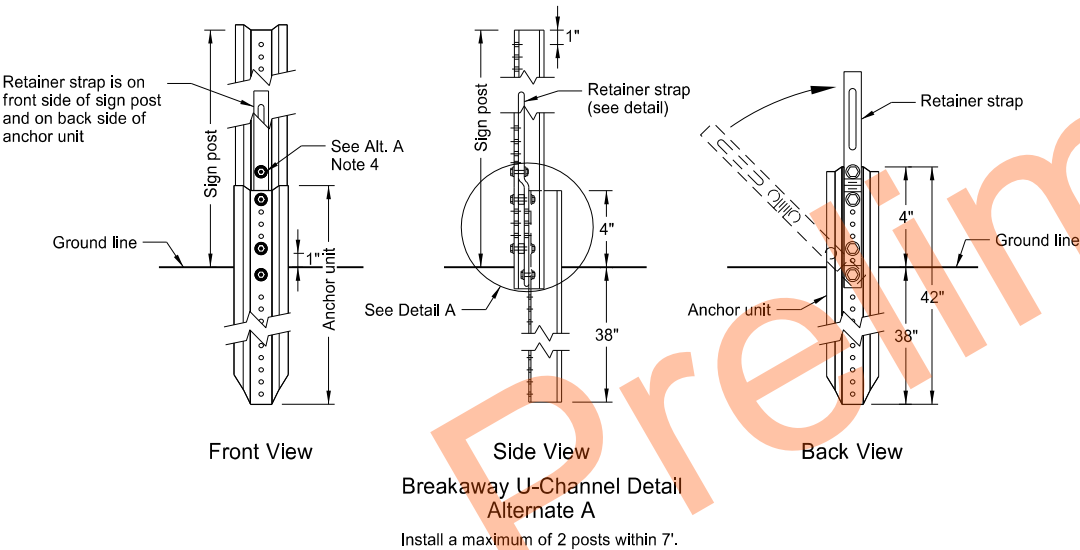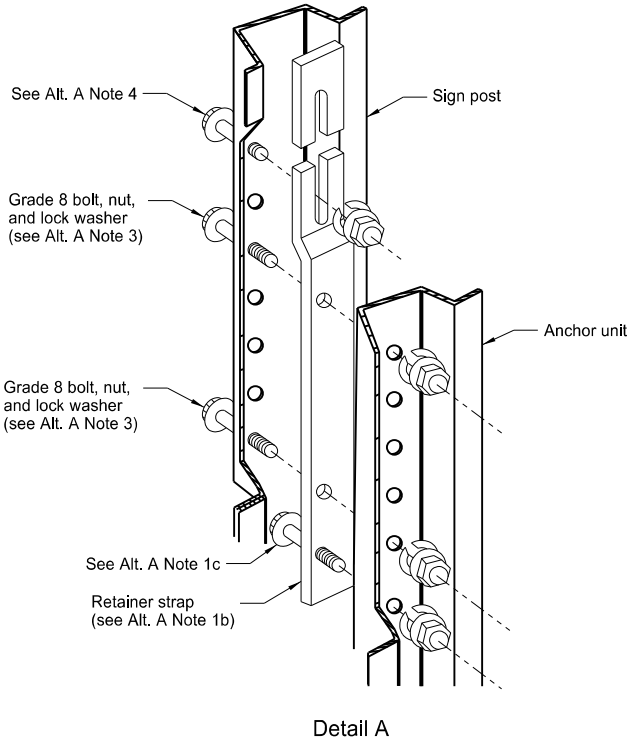

Alternate A Steps of Installation:


- a) Drive anchor unit to within 12" of ground level.
b) Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
d) Rotate strap 90° to left.
- a) Drive anchor unit to 4" above ground.
b) Rotate strap to vertical position.
- a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
b) Alternately tighten two connector bolts.
- Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
- Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17 10-03-19	Updated to active voice New Design Engr PE Stamp


This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/03/19 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS


D-704-9

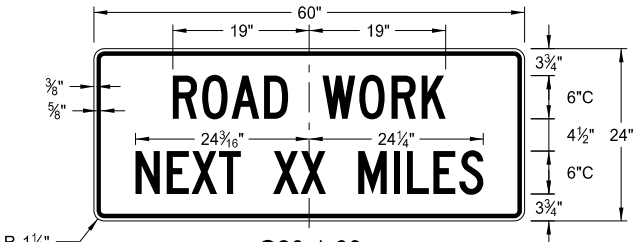


G20-1-60
Legend: black (non-refl)
Background: orange

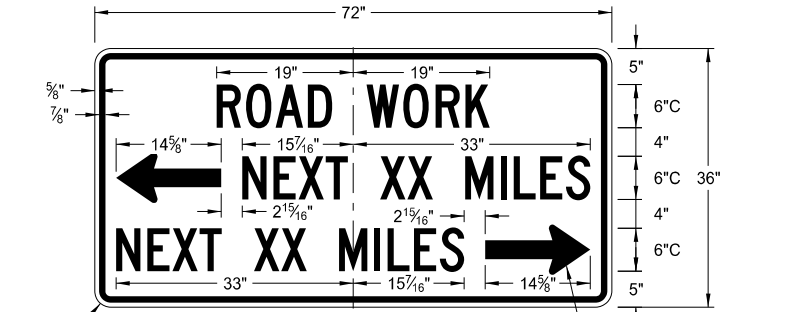


G20-50a-72
Legend: black (non-refl)
Background: orange

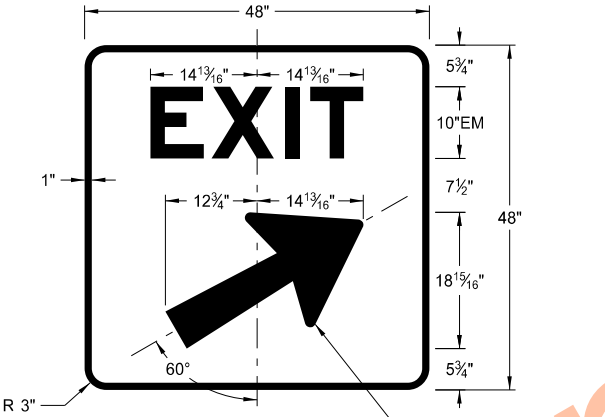


E5-1(L or R)-48
Legend: white
Background: green (orange optional)

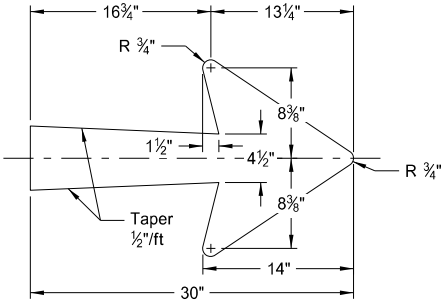


E5-1-48

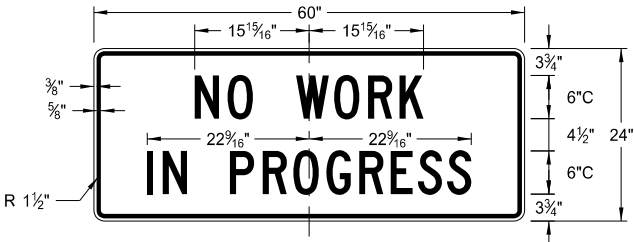


G20-1b-60
Legend: black (non-refl)
Background: orange

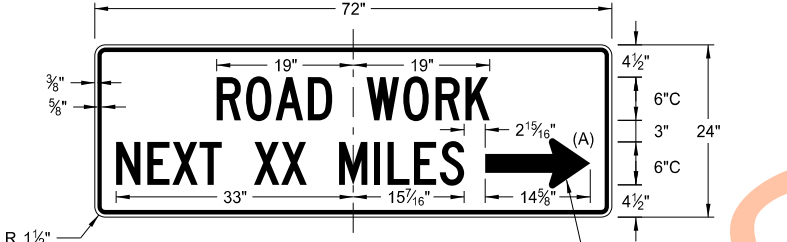


G20-52a-72
Legend: black (non-refl)
Background: orange

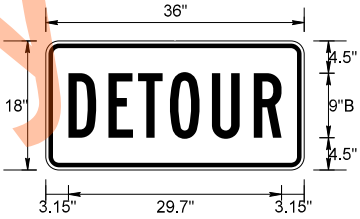


M4-8-36
Legend: black (non-refl)
Background: orange

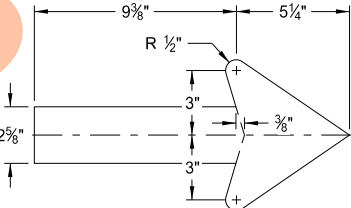


G20-50a-72
G20-52a-72

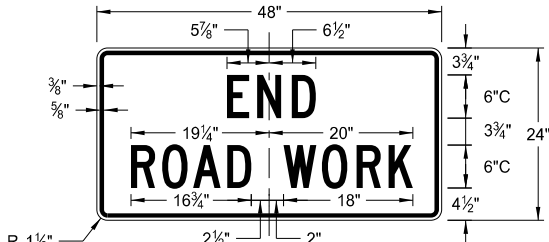


G20-2-48
Legend: black (non-refl)
Background: orange

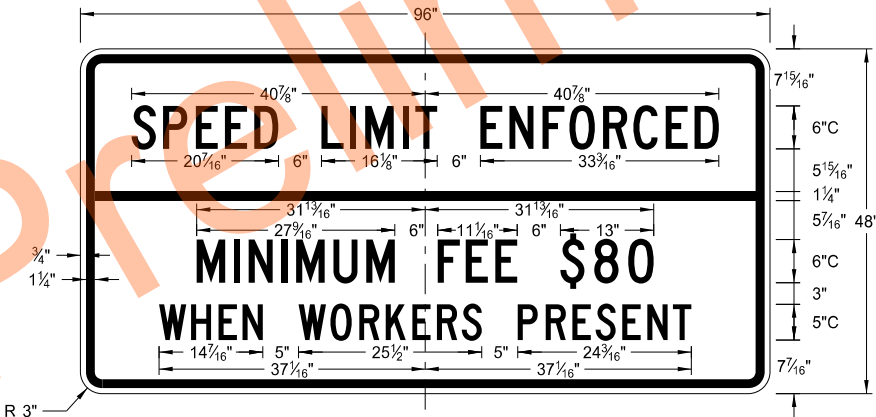


G20-55-96
Legend: black (non-refl)
Background: orange

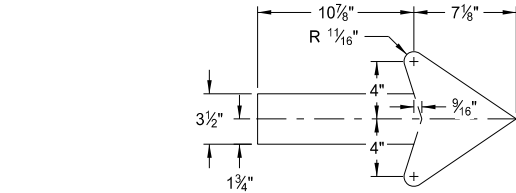

M4-9(L or R)-30
Right or Left



M4-9(L or R)-30
Advanced Right or Left




M4-9-30
Straight

ARROW DETAILS

NOTES:
(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17 10-03-19	Added sign & background color New Design Engineer PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/03/19 and the original document is stored at the
North Dakota Department
of Transportation

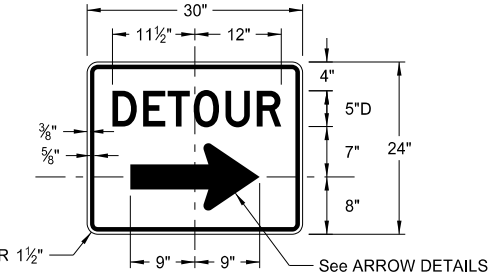


M4-9(L or R)-30 &
M4-9-30


Legend: black (non-refl)
Background: orange

CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS


D-704-10

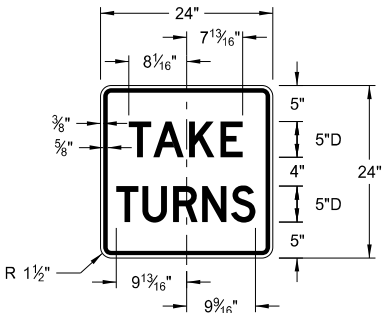


R1-50P-24
Legend: black (non-refl)
Background: white

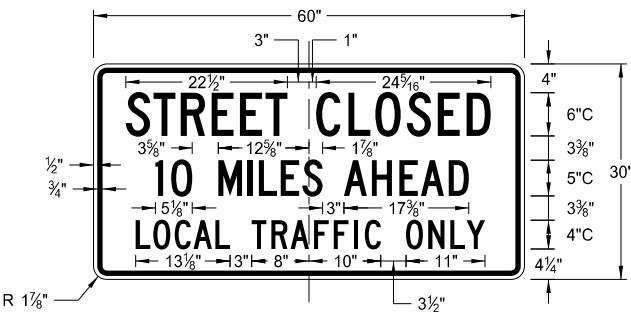

R11-3c-60
Legend: black (non-refl)
Background: white

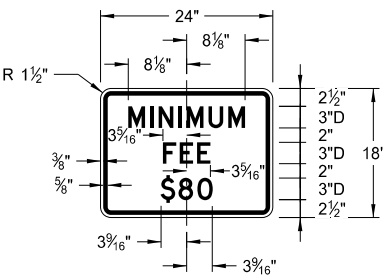

R2-1aP-24
Legend: black (non-refl)
Background: white

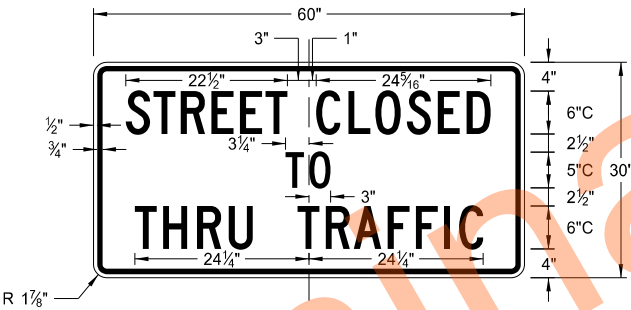

R11-4a-60
Legend: black (non-refl)
Background: white




R11-2a-48
Legend: black (non-refl)
Background: white

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17 10-03-19	Revised sign number New Design Engineer PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/03/19 and the original document is stored at the
North Dakota Department
of Transportation


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

D-704-11

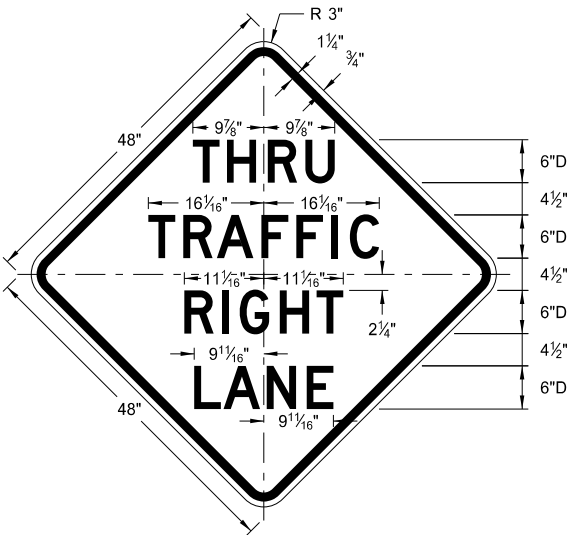


W5-8-48

Legend: black (non-refl)
Background: orange

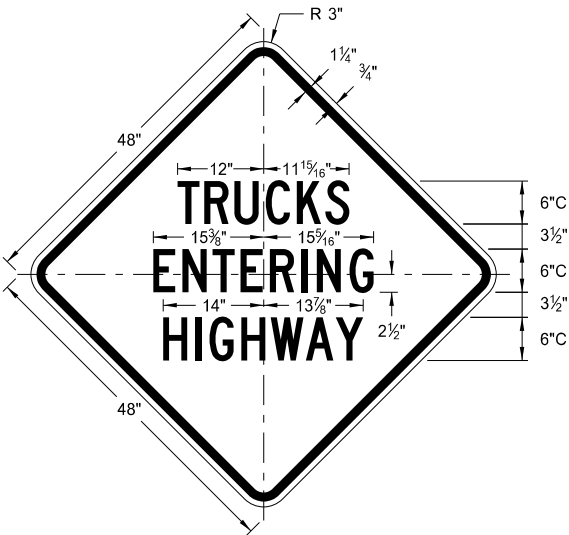


W8-53-48

Legend: black (non-refl)
Background: orange

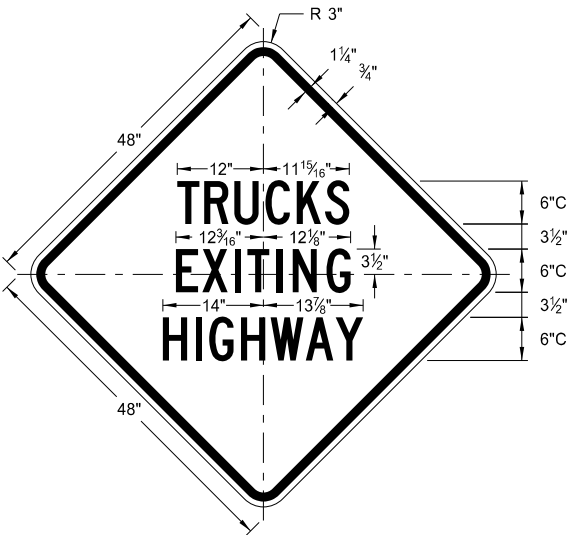


W8-56-48

Legend: black (non-refl)
Background: orange

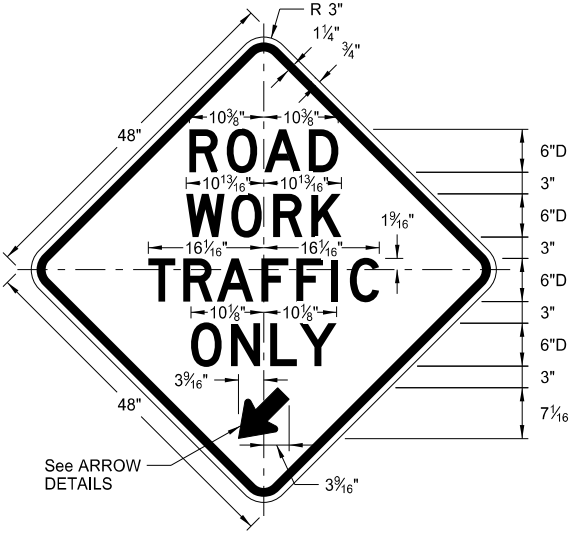


W5-9-48

Legend: black (non-refl)
Background: orange

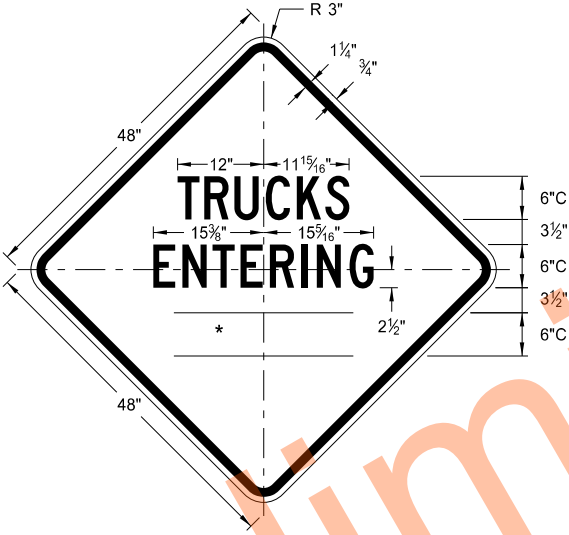


W8-54-48

Legend: black (non-refl)
Background: orange

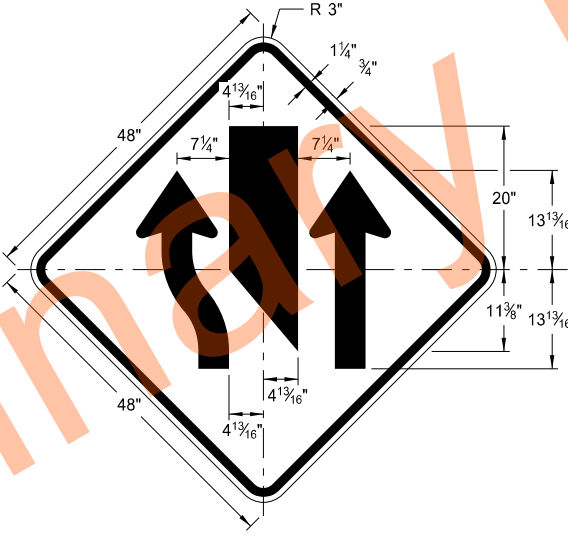


W9-3a-48

Legend: black (non-refl)
Background: orange

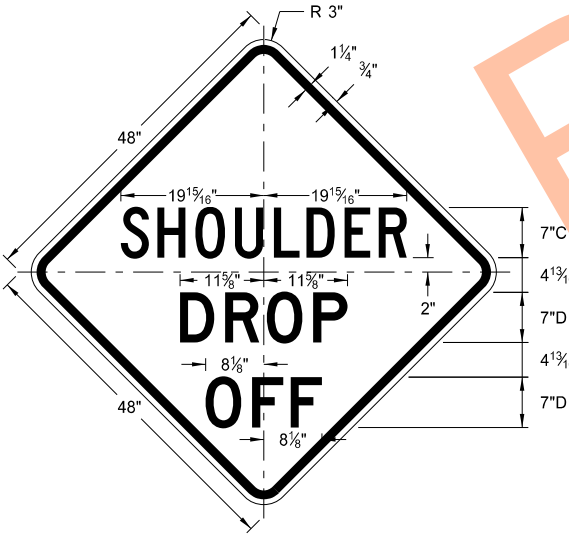

W8-9a-48

Legend: black (non-refl)
Background: orange


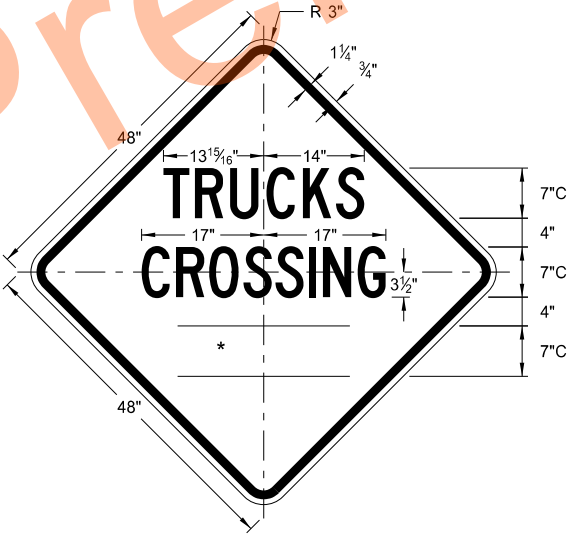


W8-55-48

Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
1/2 MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES

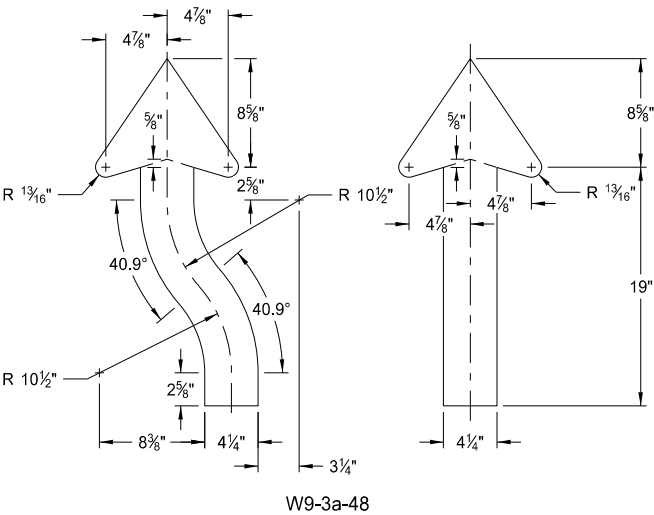

ARROW DETAILS



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Updated sign number
5-31-18	Revised sign and arrow details
10-03-19	New Design Engineer PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/03/19 and the original document is stored at the
North Dakota Department
of Transportation

CONSTRUCTION SIGN DETAILS
WARNING SIGNS


WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES

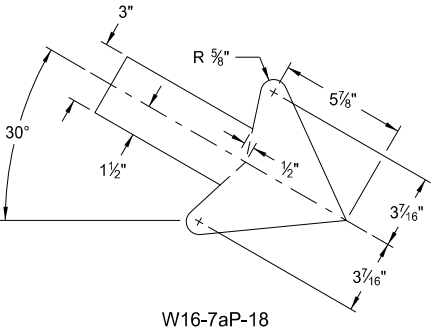


W16-7aP-18

Legend: black (non-refl)
Background: orange

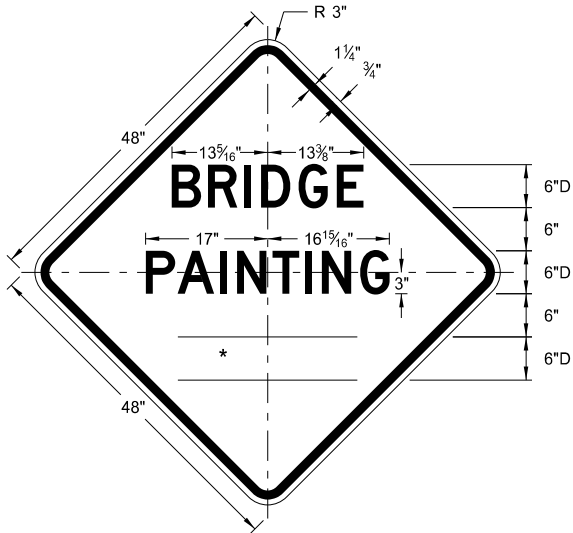


W21-50-48

Legend: black (non-refl)
Background: orange

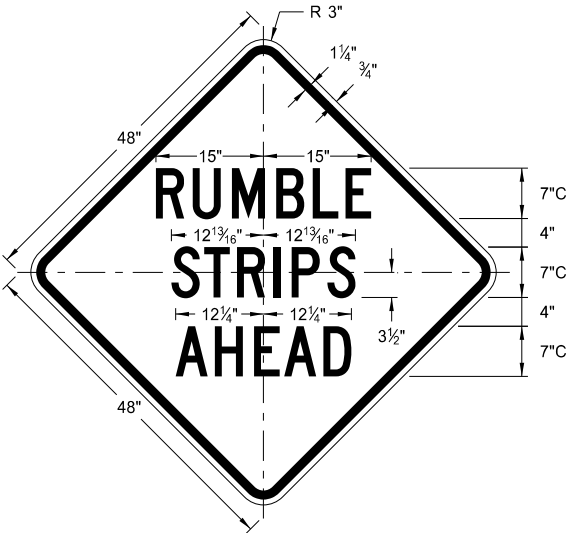


W21-53-48

Legend: black (non-refl)
Background: orange

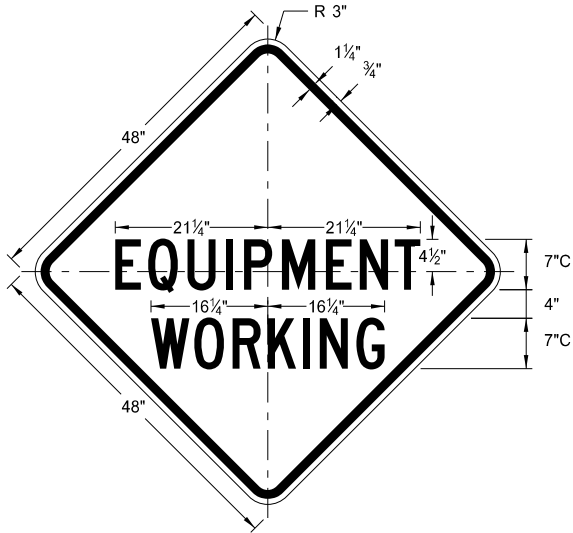


W20-51-48

Legend: black (non-refl)
Background: orange

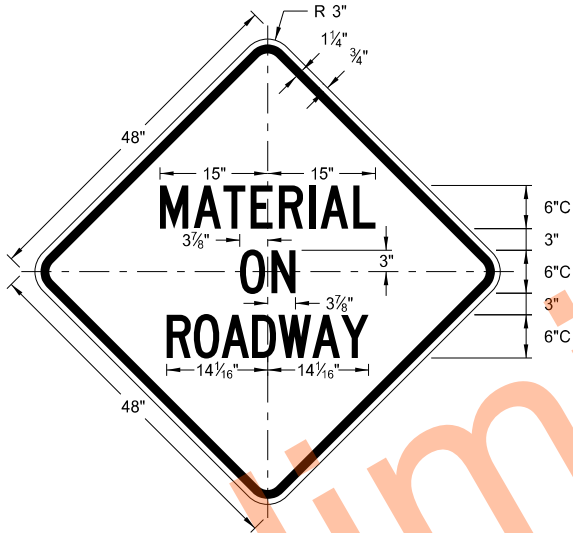


W21-51-48

Legend: black (non-refl)
Background: orange

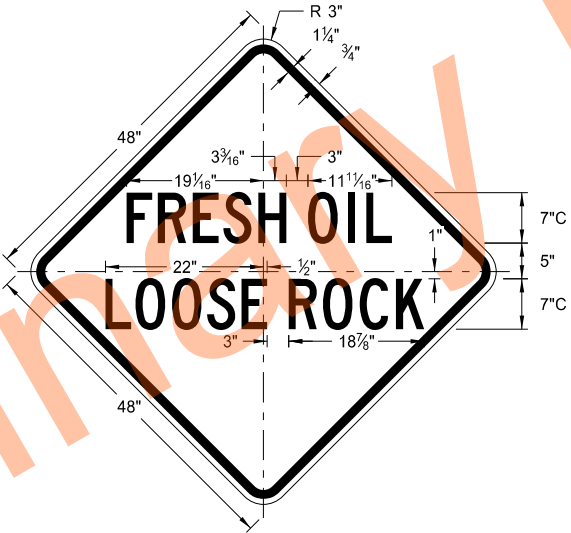


W22-8-48

Legend: black (non-refl)
Background: orange

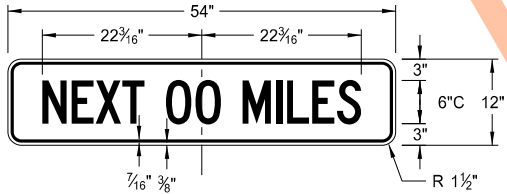

W20-52P-54


Legend: black (non-refl)
Background: orange

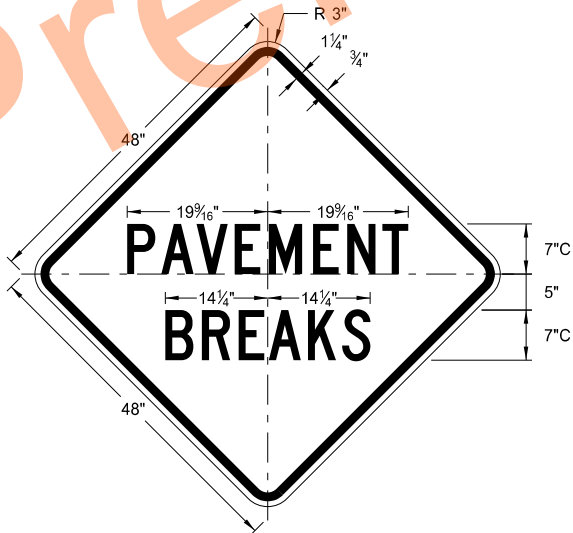


W21-52-48

Legend: black (non-refl)
Background: orange


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		This document was originally issued and sealed by Kirk J Hoff, Registration Number PE-4683, on 11/1/19 and the original document is stored at the North Dakota Department of Transportation
5-31-18		
REVISIONS		
DATE	CHANGE	
11-01-19	Added details for sign W16-7aP-18.	

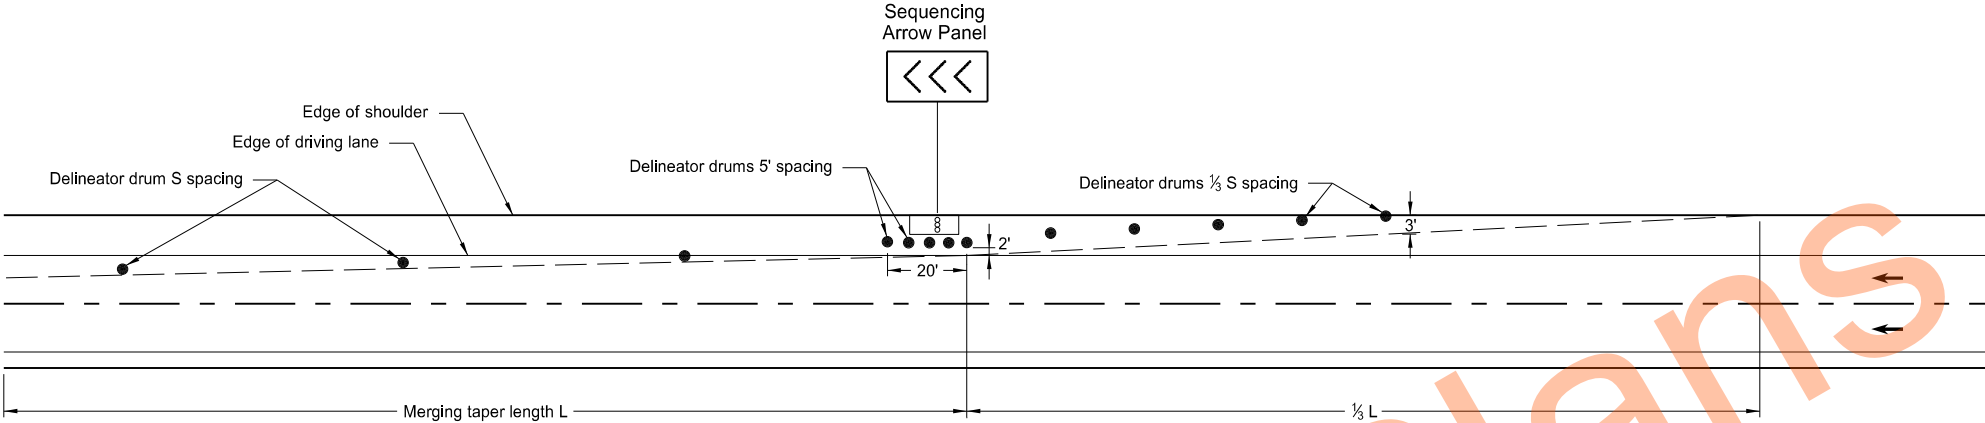

SHOULDER CLOSURE WITH LANE CLOSURE
(when shoulder is 8' or wider)

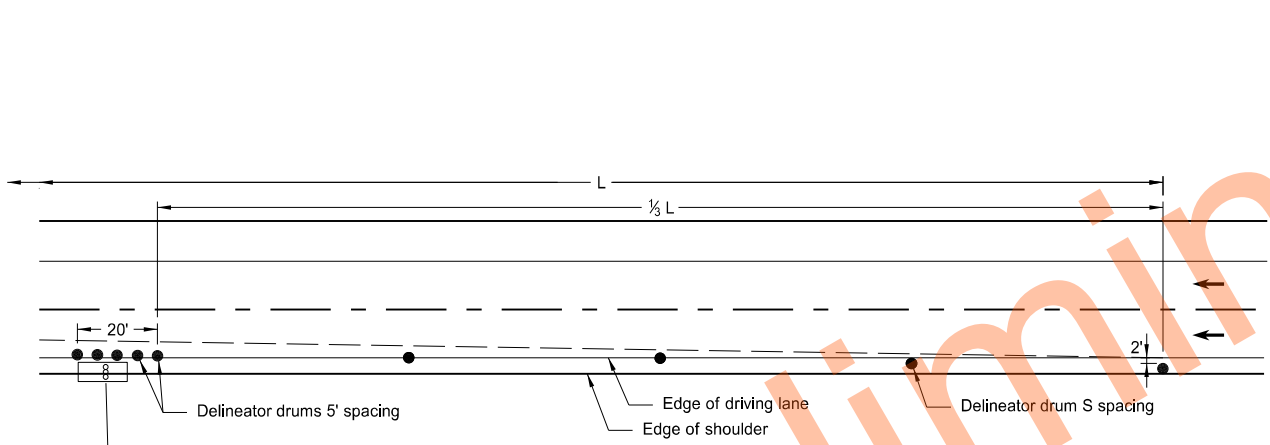

SHOULDER CLOSURE USED WITH LANE CLOSURE
(when shoulder is less than 8' wide)

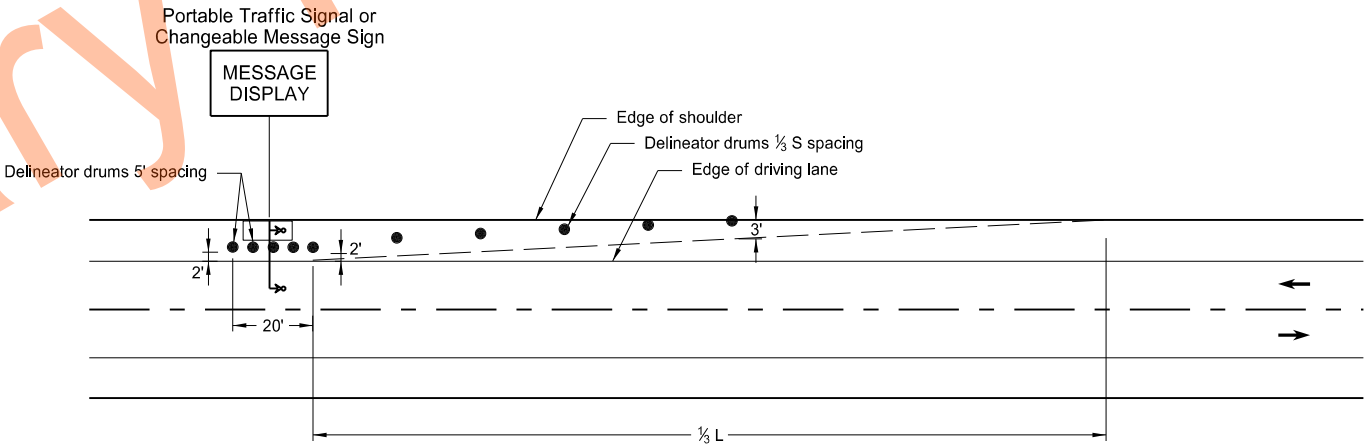

PORTABLE TRAFFIC SIGNAL OR CHANGEABLE MESSAGE SIGN ON SHOULDER

KEY			
●	Delineator Drum	∞	Sequencing Arrow Panel
•	Message Display	↳	Portable Traffic Signal


Notes:

- S = Posted Speed Limit in mph
W = Width of offset in feet
L = Taper length in feet
 $L = WS^2/60$ (40mph or less)
 $L = WS$ (45mph or more)
- If a shoulder taper is used, use a length of approximately $\frac{1}{3}L$. If a shoulder is used as a travel lane, use a normal merging or shifting taper.
- When paved shoulders of 8 foot width or more are closed, use channelizing devices to close shoulder in advance, to delineate beginning of work space, and to direct vehicular traffic to remain within the traveled way.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-25-19	Added L dimension to detail

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 10/25/19 and the original document is stored at the
North Dakota Department
of Transportation


BARRICADE AND CHANNELIZING DEVICE DETAILS

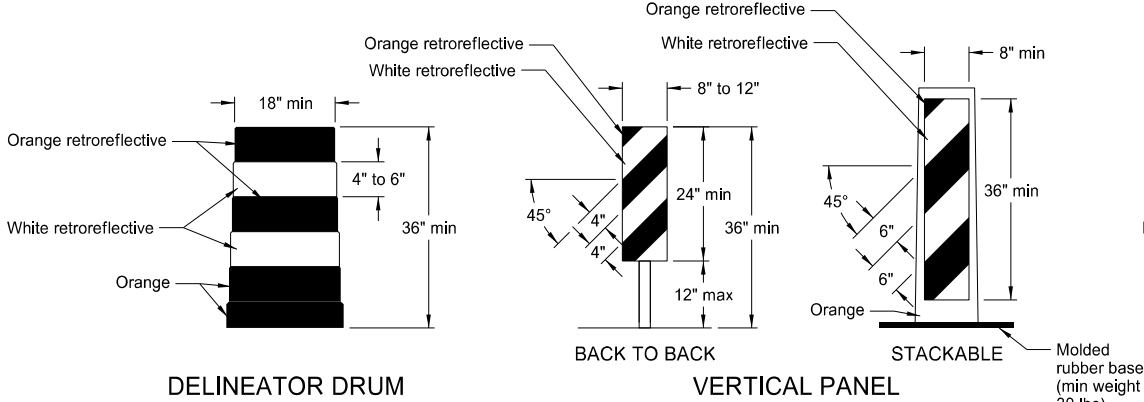


DELINEATOR DRUM

VERTICAL PANEL


STACKABLE

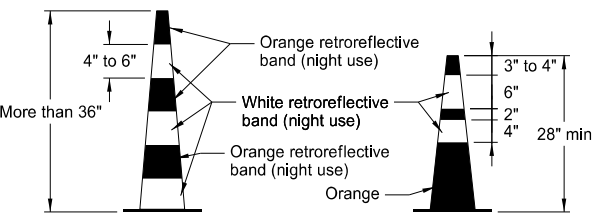

TRAFFIC CONE

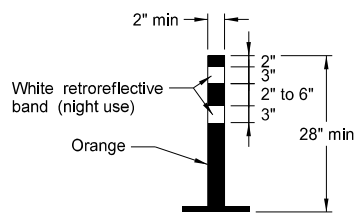

TUBULAR MARKER

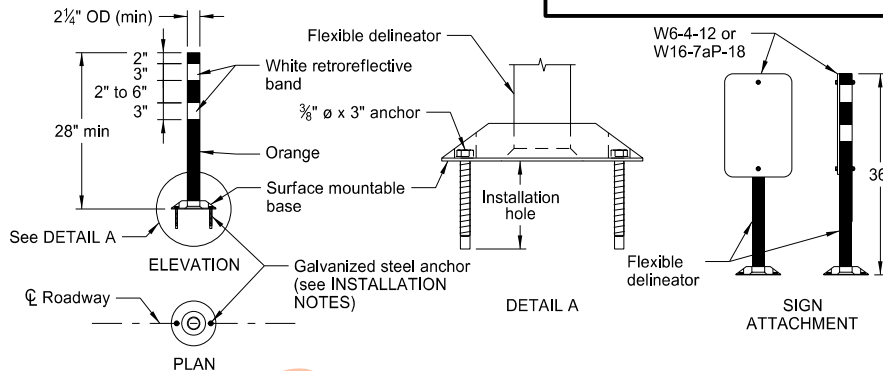

FLEXIBLE DELINEATOR

Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectORIZED spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.


Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

Provide retroreflectORIZATION of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectORIZED space between the orange and white stripes.

Provide retroreflectORIZATION of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

INSTALLATION NOTES:


1. Drill installation holes to diameter and depth required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

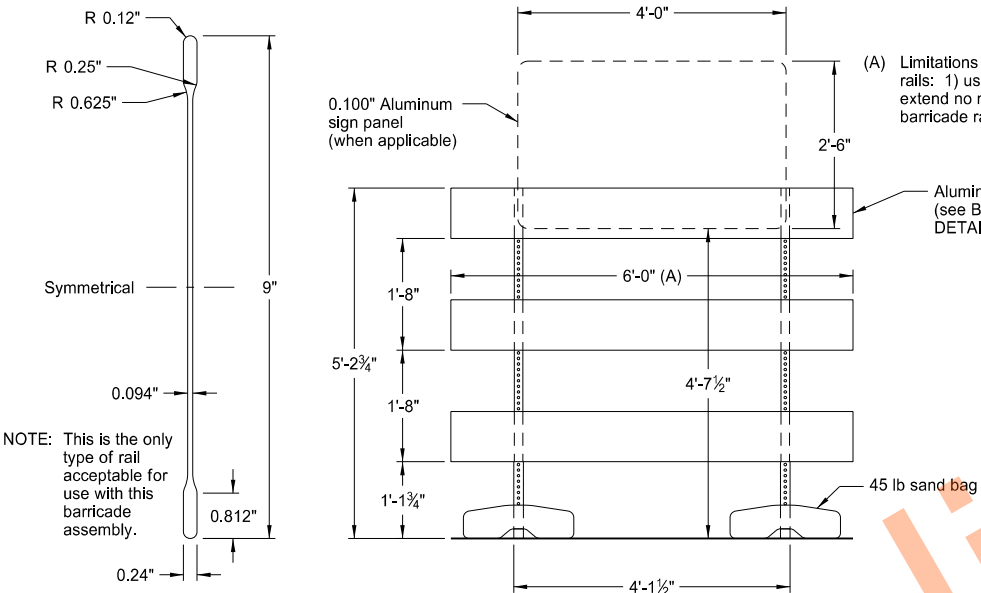


BARRICADE BLADE DETAIL

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

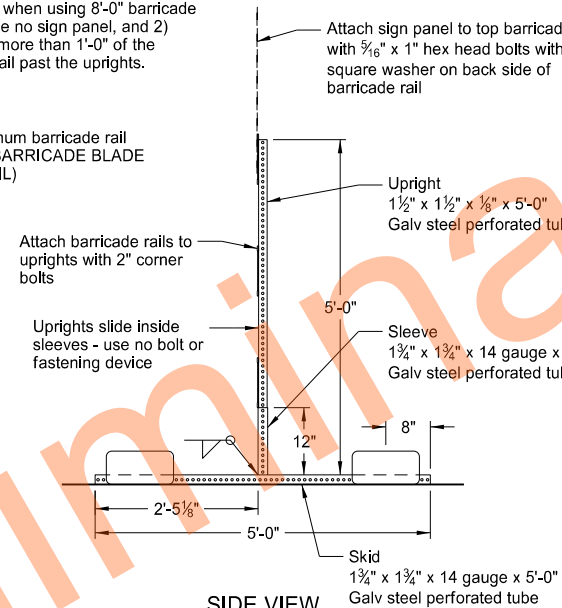


SIDE VIEW

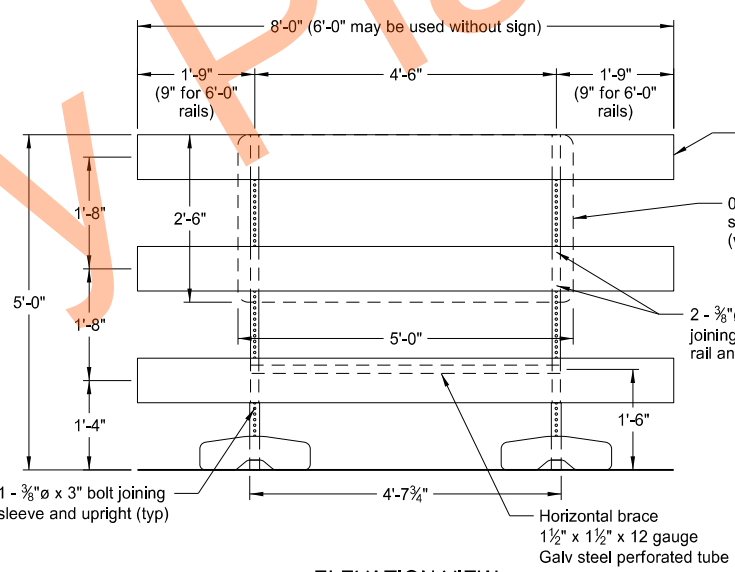


ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

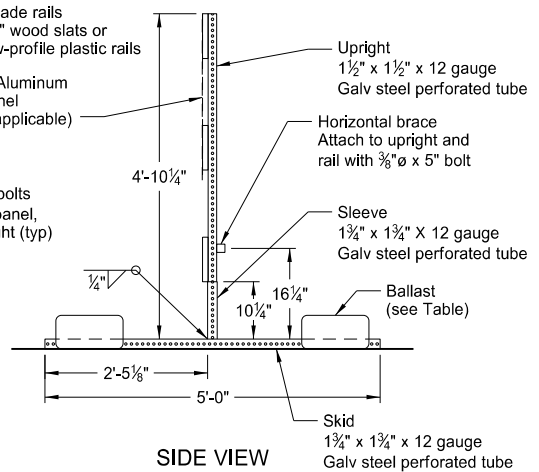

SIDE VIEW


NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".

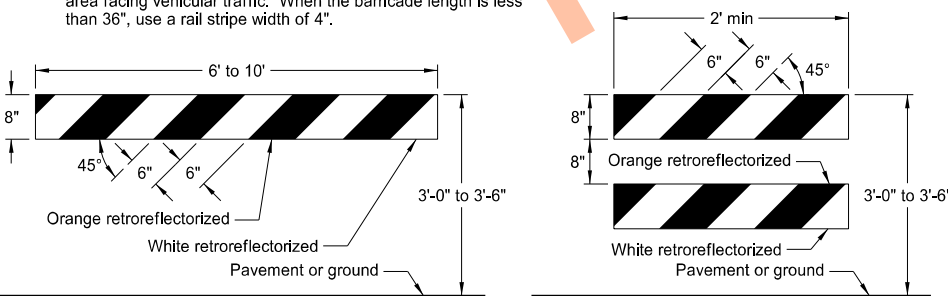


TYPE I BARRICADE

TYPE II BARRICADE

BARRICADE RAIL DETAILS

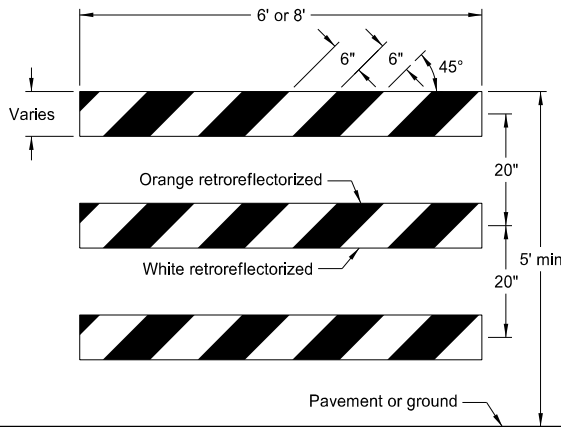

TYPE III BARRICADE

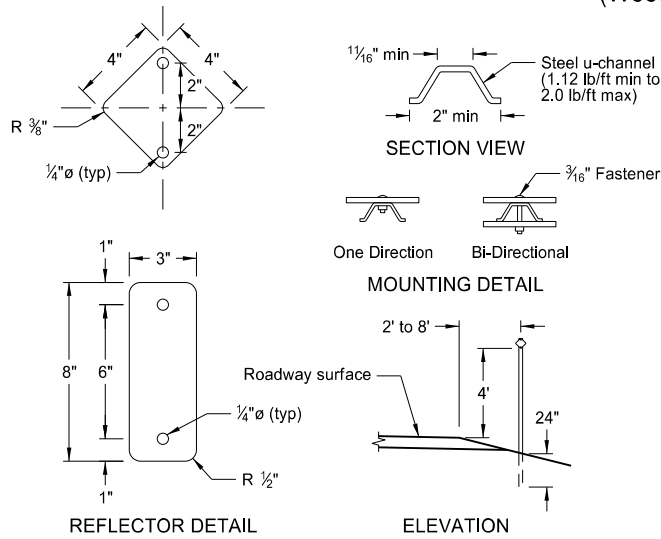

DELINEATORS

MINIMUM BALLAST (For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17 11-01-19	Updated to active voice Revised details for Flexible Delineator


This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 11/1/19 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

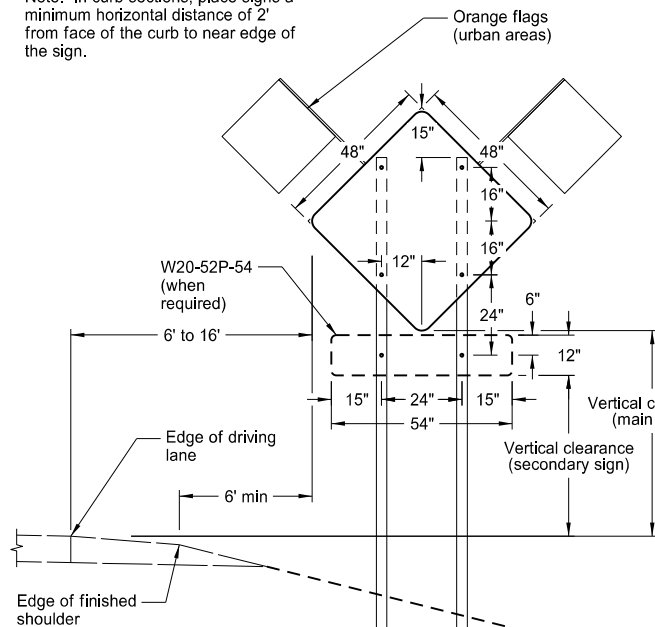


TYPICAL SECTION
(48" x 48" diamond warning sign shown)

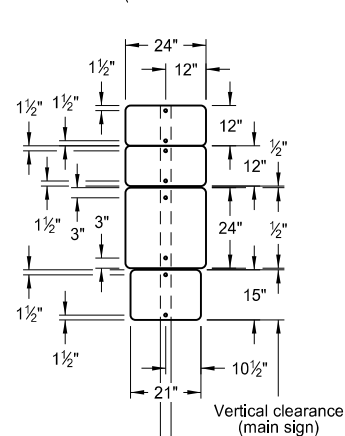


24" x 24"
ROUTE MARKER
ASSEMBLY

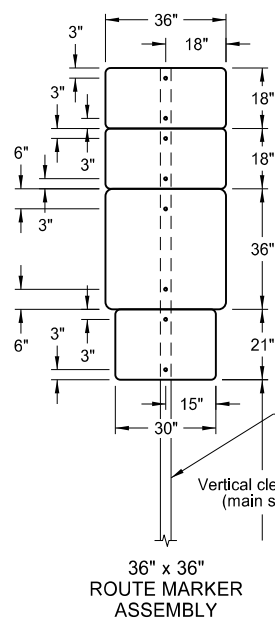


36" x 36"
ROUTE MARKER
ASSEMBLY

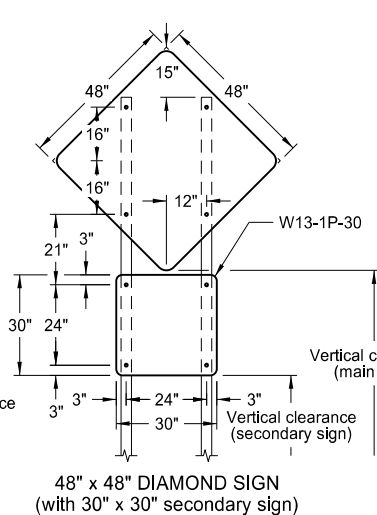


48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)

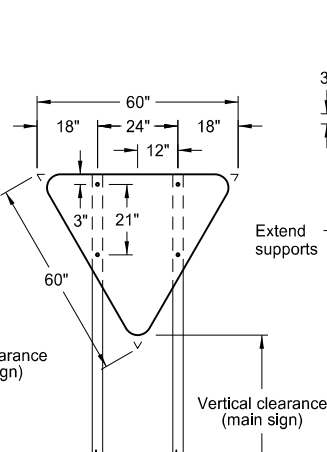


R1-2-60 - YIELD SIGN

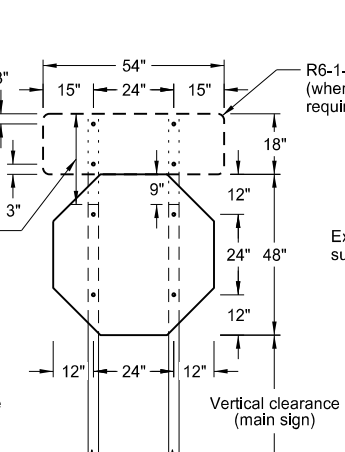


R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)

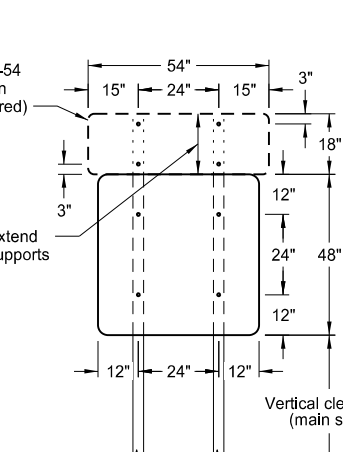


48" x 48" SIGN
(with R6-1-54 sign as required)

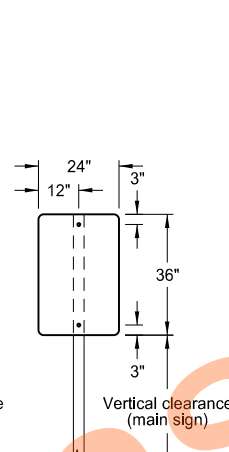


24" x 36" SIGN

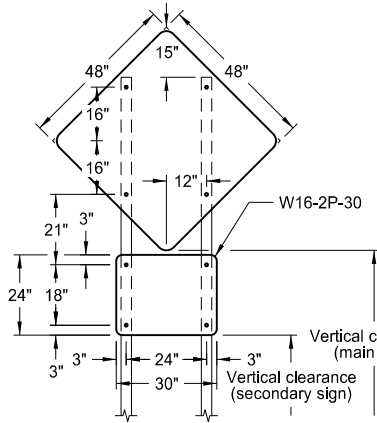


48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)

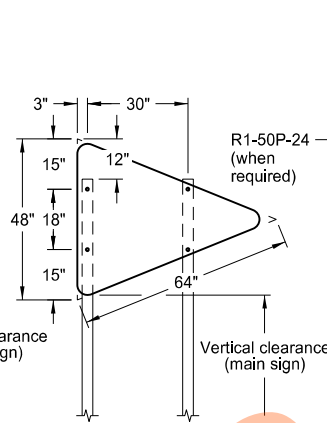


W14-3-64 - PENNANT SIGN

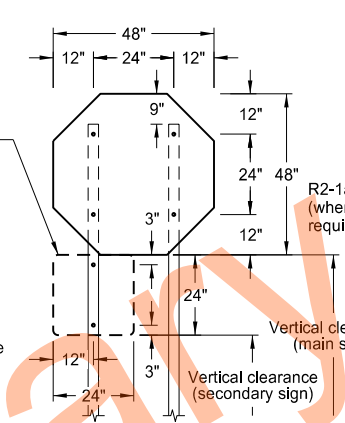


R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)

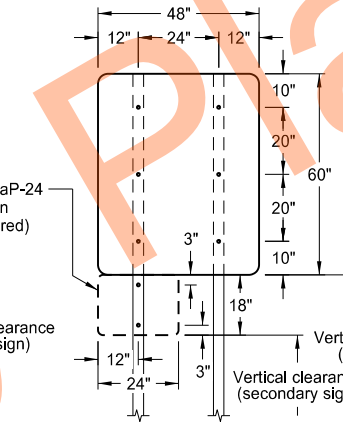


48" x 48" SIGN
(with R2-1aP-24 sign as required)

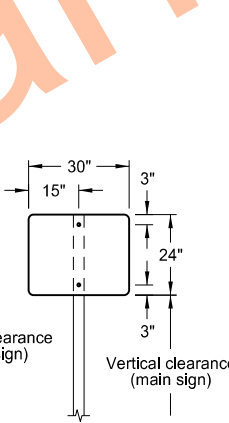


30" x 24" SIGN

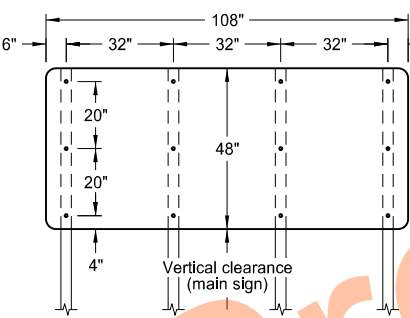


108" x 48" SIGN




96" x 48" SIGN




72" x 36" SIGN




72" x 24" SIGN




60" x 24" SIGN



48" x 24" SIGN

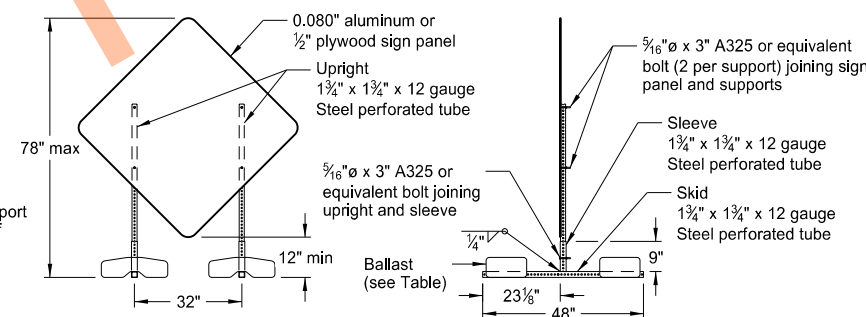

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

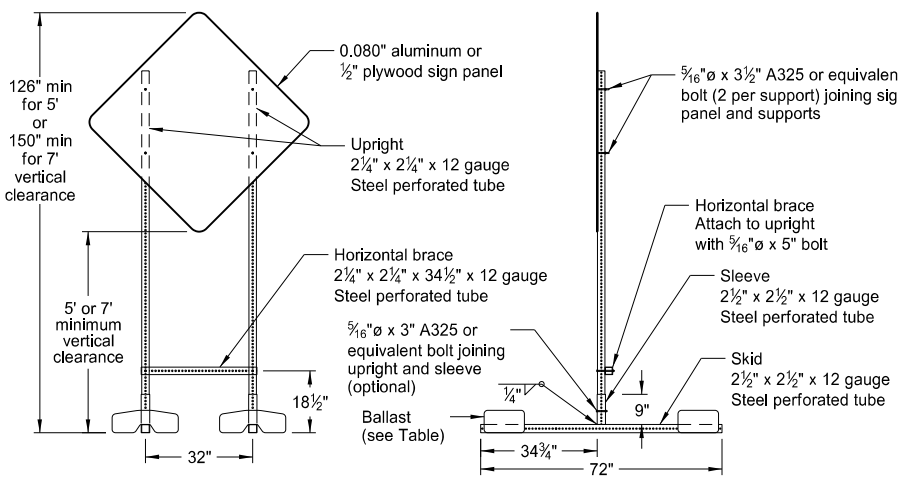

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.
2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅝" bolts.
3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)
4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION). In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail

This document was originally issued and sealed by

Kirk J Hoff,
Registration Number
PE-4683,
on 11/1/19 and the original document is stored at the North Dakota Department of Transportation

SIGN LAYOUT FOR INTERSTATE SYSTEM ONE LANE CLOSURE

D-704-18

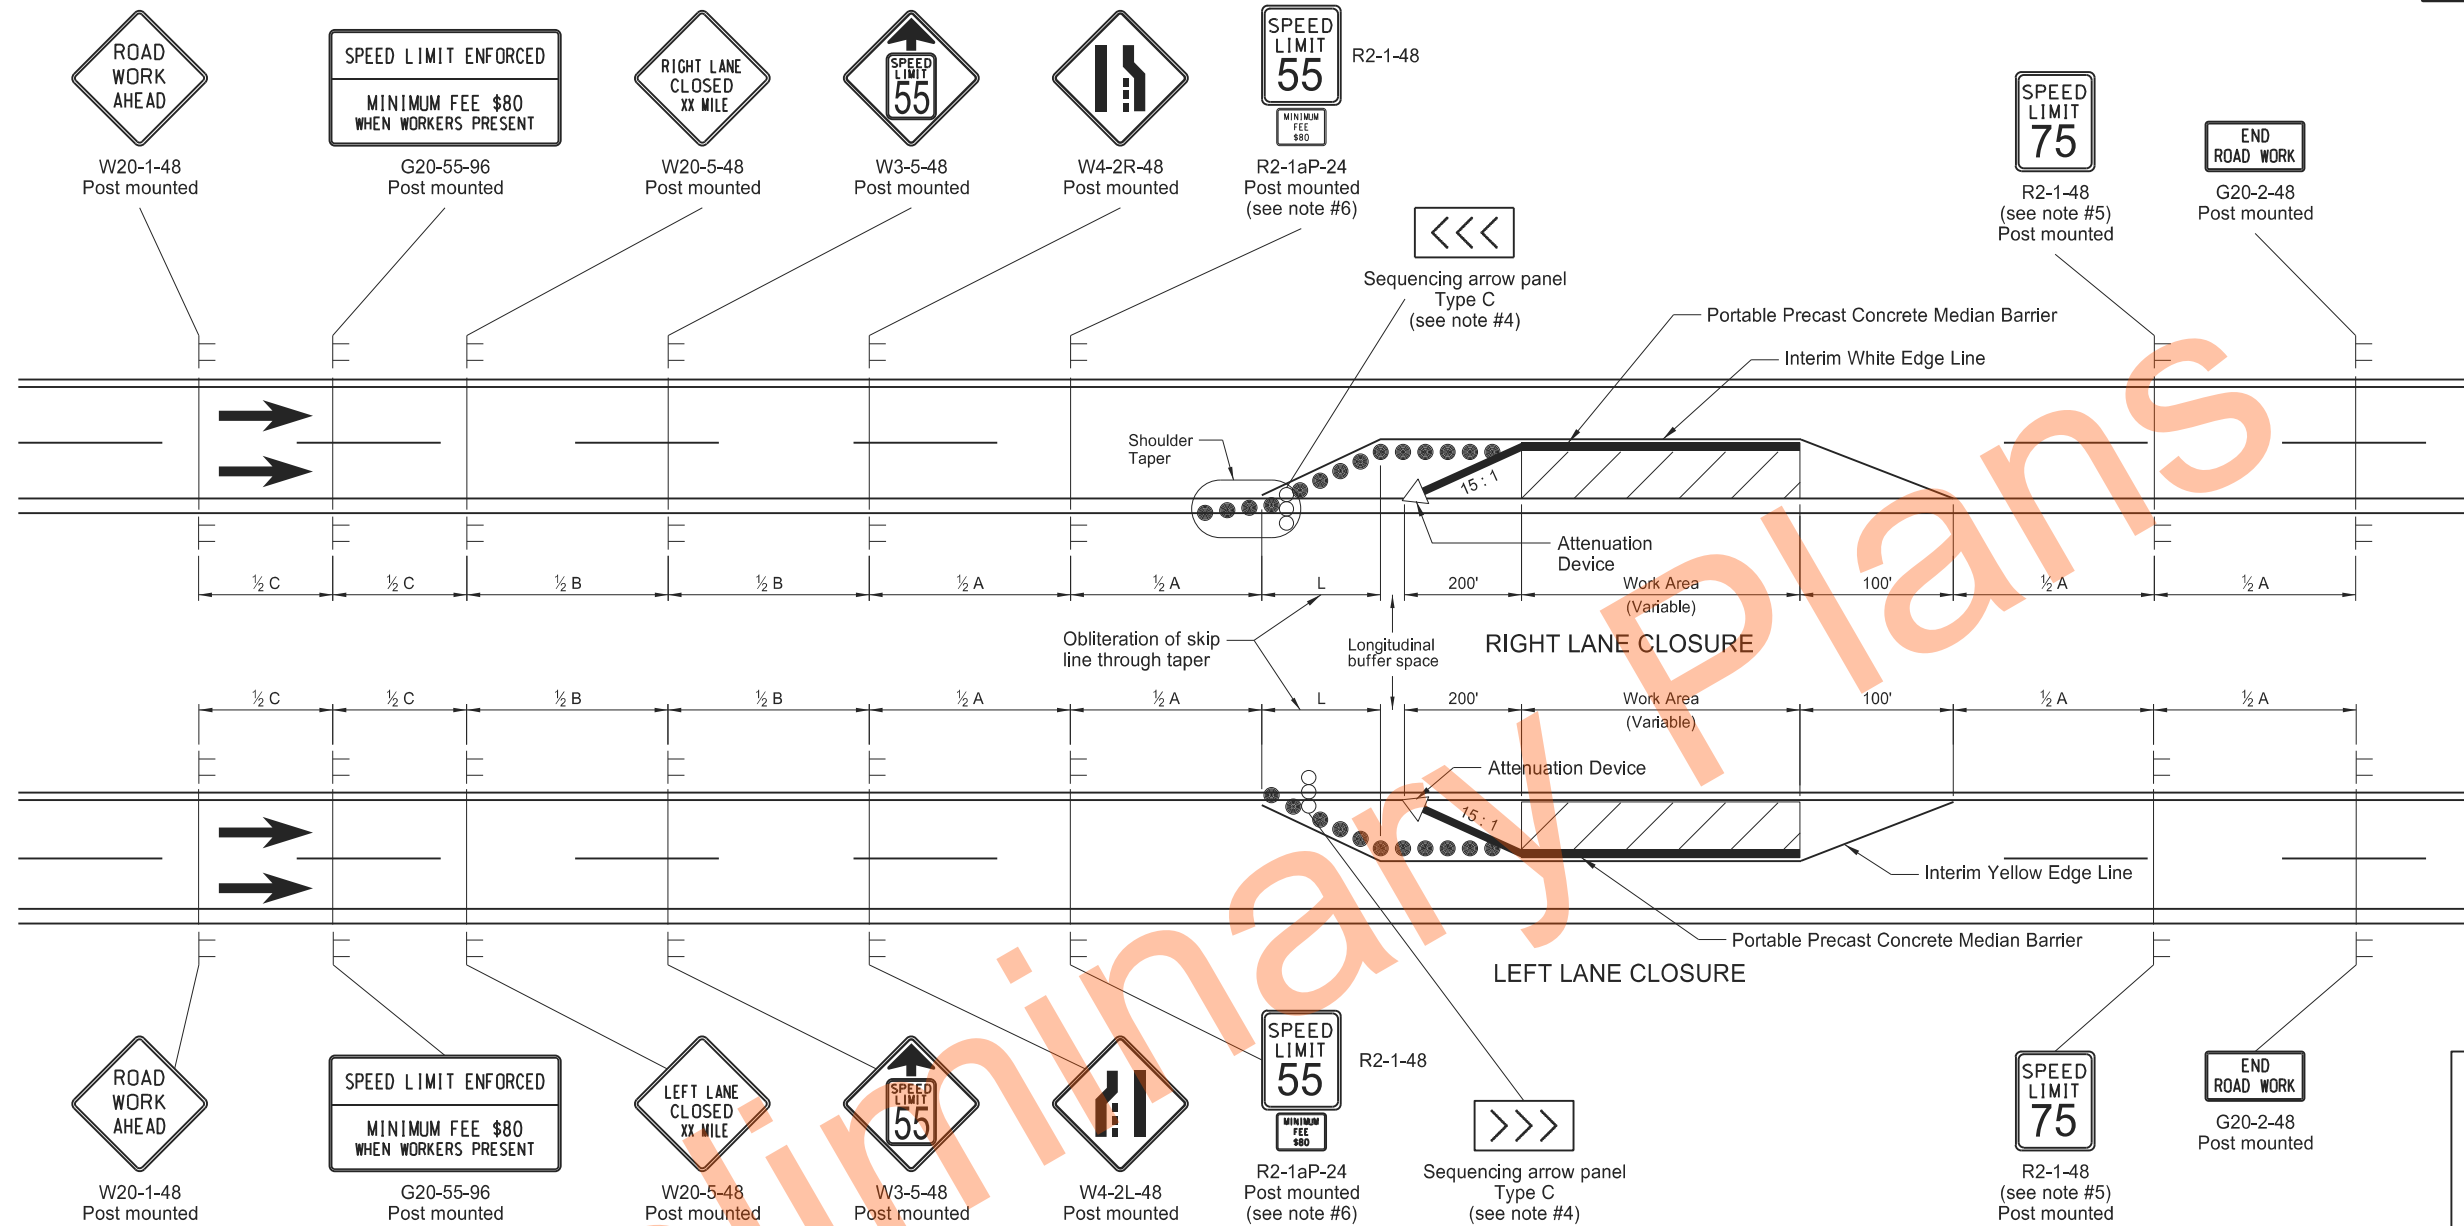

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

Notes:


- Variables
S = Numerical value of posted speed limit, off-peak 85th percentile speed prior to work starting, or anticipated operating speed in MPH.
W = The width of offset in feet.
L = Minimum taper length in feet. $S \times W$ for freeways, expressways, and roads with speeds of 45 mph or greater, or $W \times S^2 / 60$ for urban, residential, and streets with speeds of 40 mph or less.
- Place barricades on moveable assemblies and signs on portable assemblies when located on the roadway.
- Space delineator drums used for tapering traffic and on tangent at dimension "S".
- Place Sequencing Arrow Panels at the beginning of the taper when possible. Where shoulder width does not provide sufficient room, move the panel closer to the work area and place on the roadway surface. See Shoulder Closure Standard Drawing. Use Type C on roadways with high traffic speeds and volumes (over 40 mph or 5000 ADT or greater).
- Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
- Determine the reduced speed limit based on the in place speed limit before construction. Where speed reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at $\frac{1}{2}$ B.
- Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
- Cover existing speed limit signs within a reduced speed zone.
- As an option, use portable sign supports in lieu of post mounted signs in accordance with the Standard D-704-14.
- Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or if work is less than 15 days.
- Reduce speed limit further, if location and conditions dictate.

KEY


- Delineator Drum
- Sign
- Attenuation Device
- Sequencing Arrow Panel
- Work Area

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
01-13-16	Changed to Interim yellow edge line
03-15-16	Removed Do Not Pass signs & updated notes
08-17-17	Updated notes & sign numbers
11-01-19	Note, sign #, & pvmt oblt change
12-08-21	Switched order of Road Work Ahead and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work


KIRK J. HOFFA
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
11/29/22

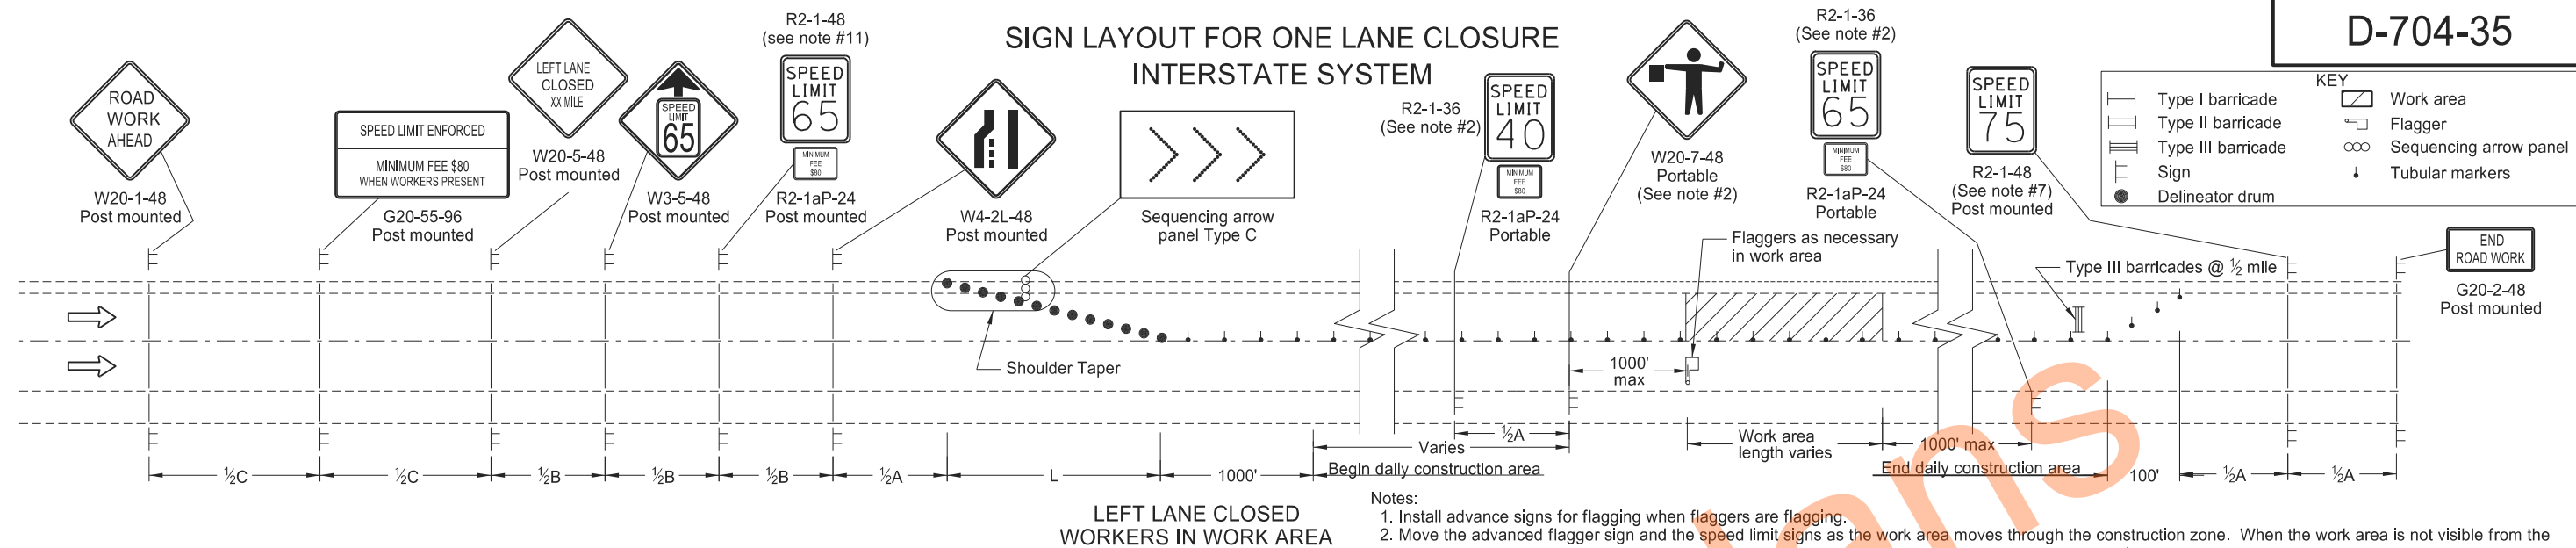

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min (ft)		
	A	B	C
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

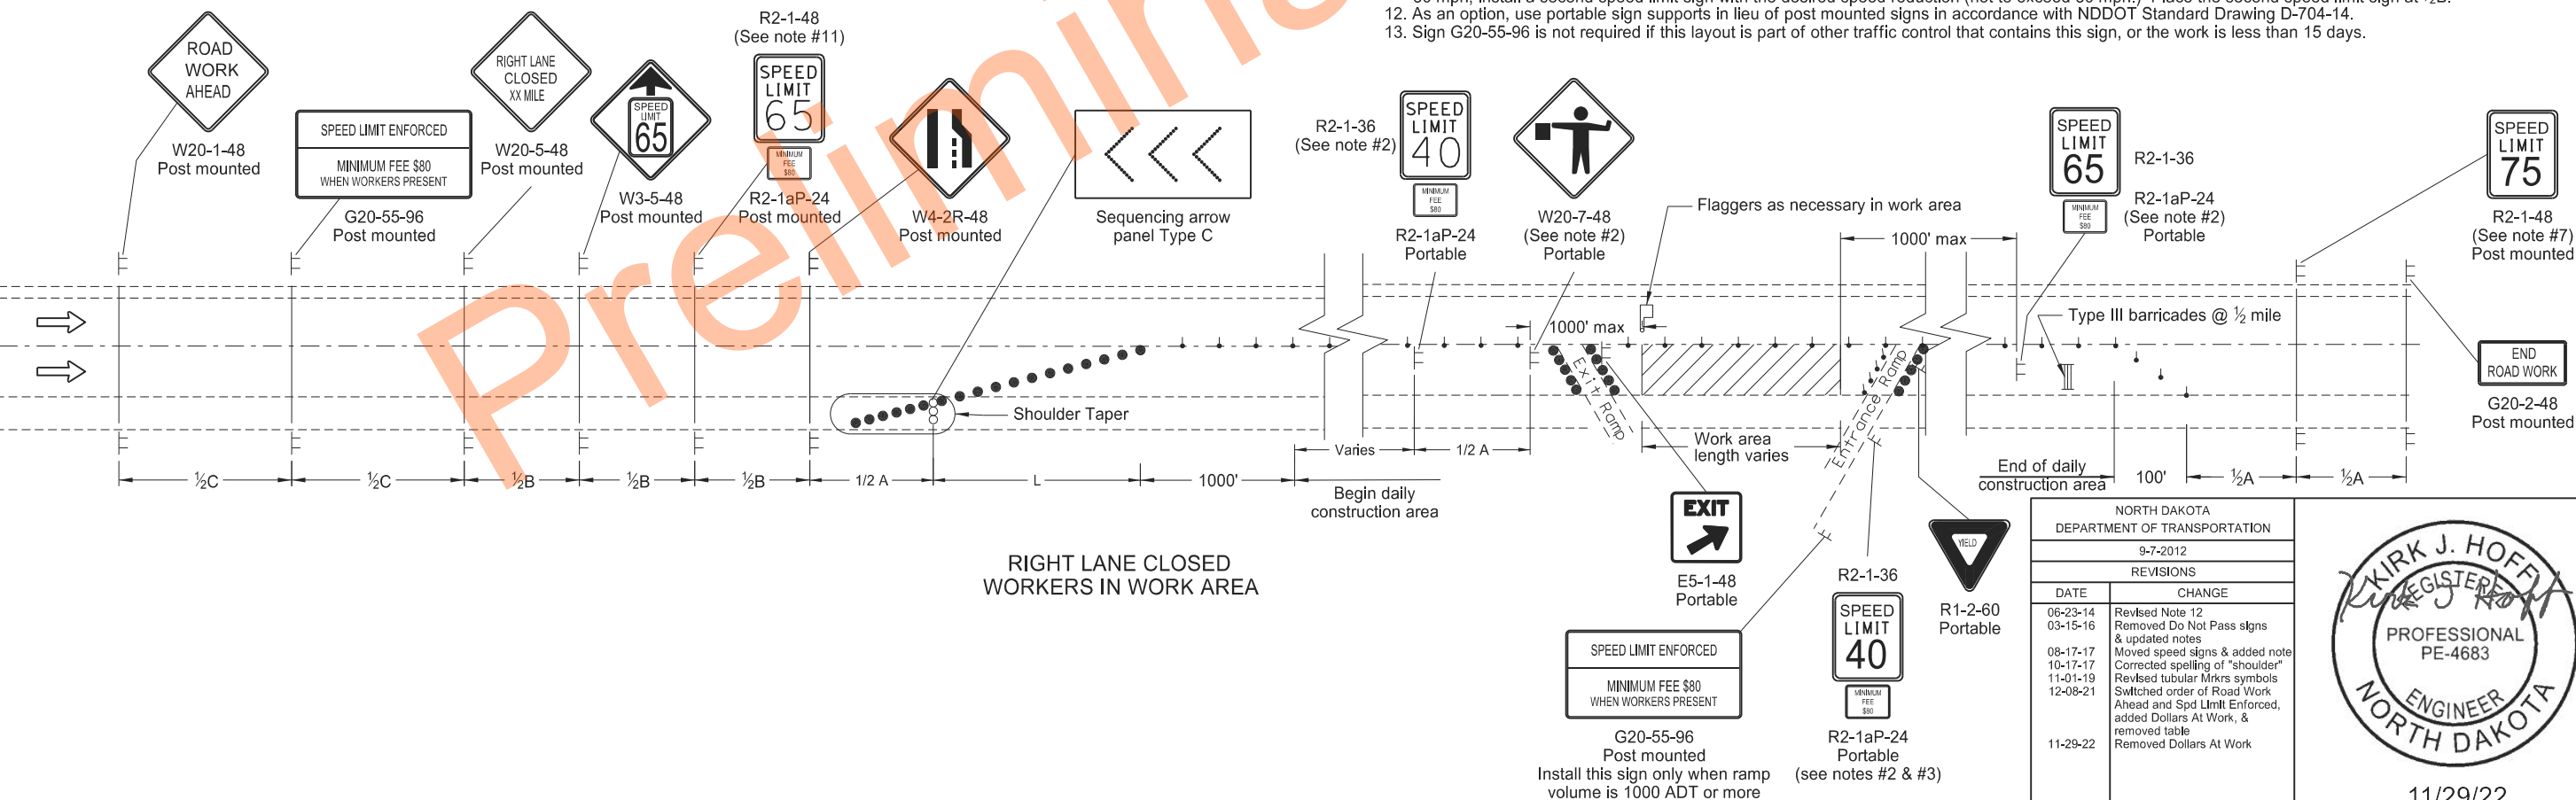


D-704-50




PORTABLE PRECAST CONCRETE MEDIAN BARRIER
(TEMPORARY USAGE)


D-704-51

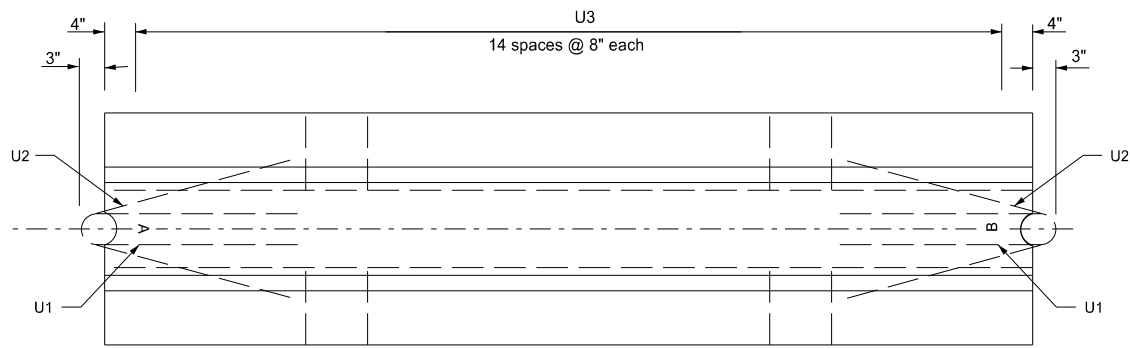


Plan View

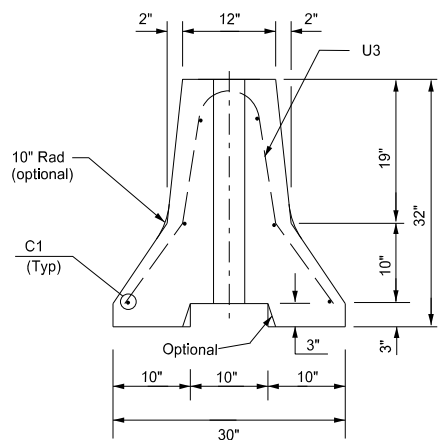


End View

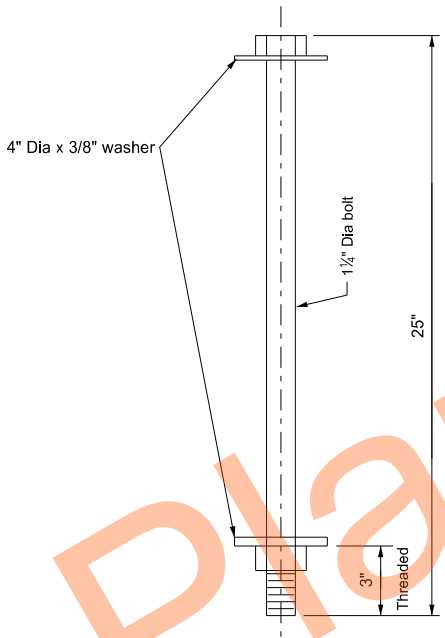


Connecting Bolt Detail
(One per 10 Ft section)

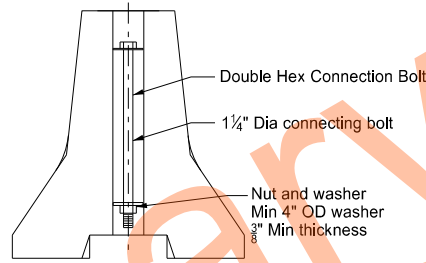

Bolt Connection Detail

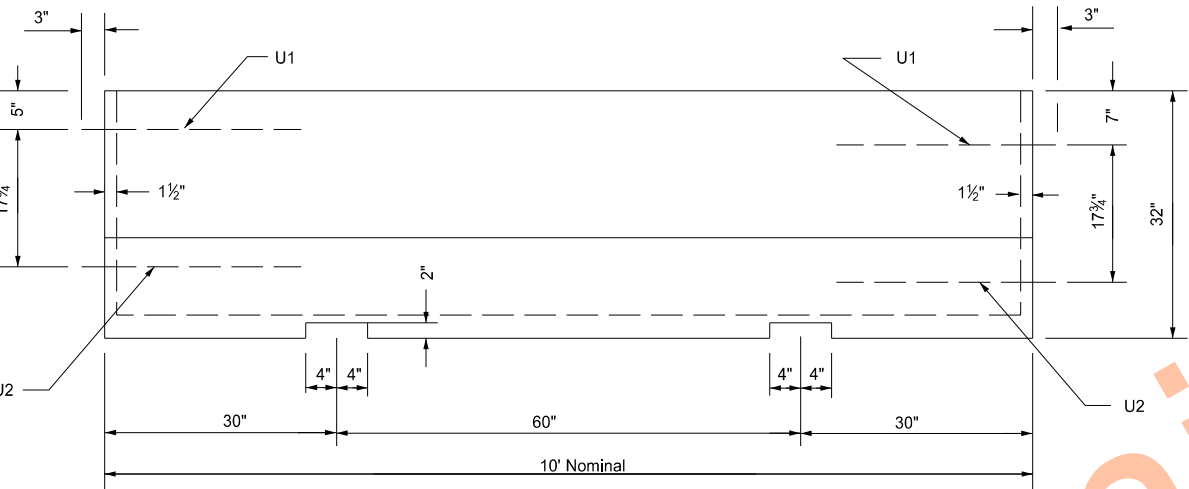

Side View

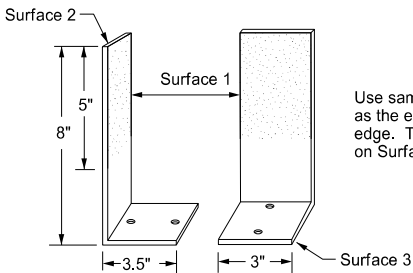

Barrier Marker Detail

Use same color reflective faces as the edge line along barrier edge. Two way reflective on Surface 1 & 2.

Marker Body
Use high impact, weatherable engineering thermo-plastic material conforming to the following:


Property	Result	ASTM Test Method
Thickness (min)	.090"	—
Tensile strength (min psi) @ yield	5,500	D638
Impact strength @ -20°F (ft-lbs/in of notch)	3.2	D256 Method A
Impact strength @ 73°F (ft-lbs/in of notch)	14.0	D256 Method A
Flexural strength, PSI 1/4" @ 73°F	8,000	D790
Flexural modulus, PSI 1/4" @ 73°F	300,000	D790
Elongation @ yield	30%	D638

Reflective Tape
Use retroreflective, acrylic microprism material with acrylic backing, 3" wide, providing the following minimum optical performance with an observation angle of 0.1° measured in candlepower for the reflector:


Entrance Angle	Specific Intensity
Yellow - 4"	136
White - 4"	200

Adhesive
Use factory applied solid butyl rubber 1/8" thick, 2" wide on 2 1/4" wide release paper on surface 3 to temporarily mount markers to portable concrete barrier.


Bar List				
Mark	Size	No.	Length	Shape
C1	4	6	9'- 4"	Straight
U1	4	2	4'- 8"	Bent
U2	4	2	4'- 10 1/4"	Bent
U3	4	15	5'- 4"	Bent




Dap Detail

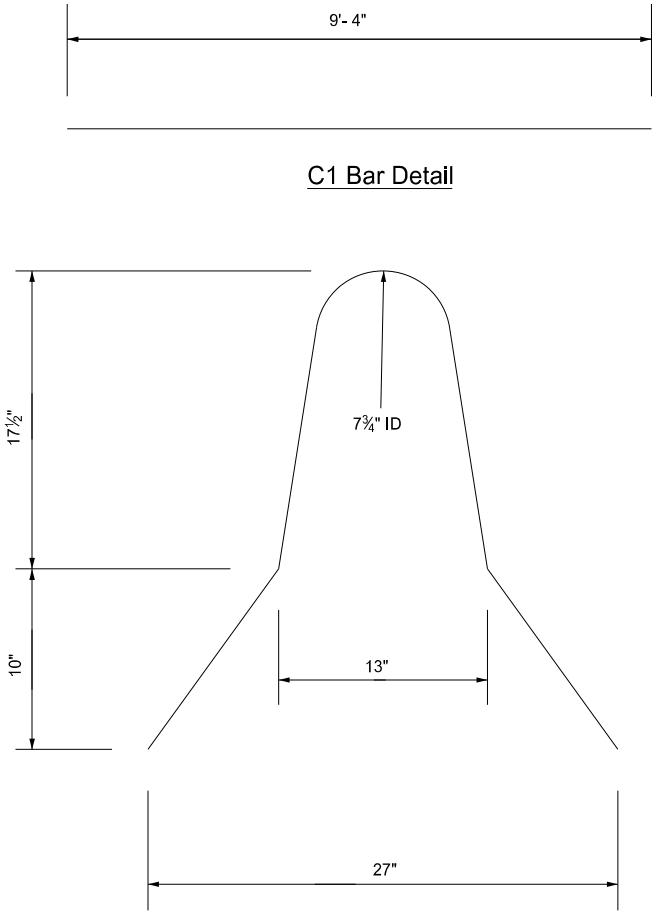

C1 Bar Detail

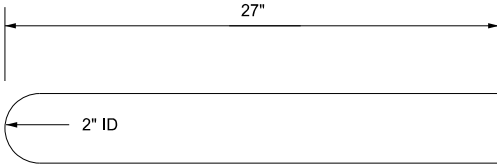

U1 Bar Detail

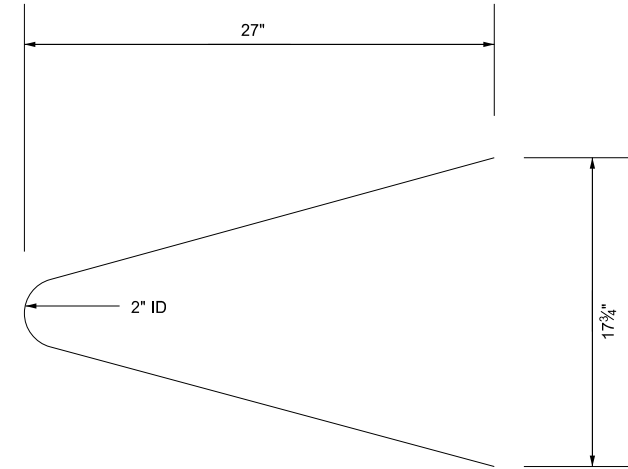

U2 Bar Detail

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-20-12	
REVISIONS	
DATE	CHANGE
9-27-17 11-01-19	Updated to active voice New Design Engr PE Stamp

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 11/1/19 and the original document is stored at the
North Dakota Department
of Transportation

INTERSTATE PAVEMENT MARKING
4 LANE DIVIDED HIGHWAY


D-762-2

NOTE:


- (A) 4" White edge line
(B) 4" Yellow edge line
(C) Assume "varies" equals 790' for purpose of estimate. Place pavement marking from beginning of taper to the 8" line.
(D) Beginning of physical gore to theoretical gore.
(E) If the distance is less than 350' extend the 8" channel line to the theoretical gore, otherwise use 195'.
(F) Use 195' for estimating purposes.
(G) Not required for gravel surface crossroad approaches.
(H) 4' minimum, 15' maximum from nearest edge of intersection traveled way.
(I) Extend dotted line until it touches the edgeline.

BASIS OF ESTIMATE		
LOCATION	ITEM	
Right or Left Side Exit Ramp TAPERED	8" White channel line	580 LF
	24" White stop line	60 LF
	4" White dotted line	148 LF
	4" White edge line	1115 LF
	4" Yellow edge line	1075 LF
Entrance Ramp TAPERED	8" White channel line	390 LF
	4" White dotted line	258 LF
	4" White edge line	1270 LF
	4" Yellow edge line	1075 LF
Right or Left Side Exit Ramp PARALLEL	8" White channel line	396 LF
	24" White stop line	60 LF
	4" White dotted line (C)	258 LF
	4" White edge line	1115 LF
	4" Yellow edge line	1075 LF
Entrance Ramp PARALLEL	8" White channel line	388 LF
	4" White dotted line	283 LF
	4" White edge line	1275 LF
	4" Yellow edge line	1075 LF
Main Line (Both Roadways)	4" White line, 10' line, 30' skip	2640 LF/M
	4" White edge line	10,560 LF/M
	4" Yellow edge line	10,560 LF/M
Cross Road	4" White edge line	2000 LF
	4" Dbl yellow barrier line (4" between)	2000 LF


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-3-11	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice
10-25-19	Replaced 2" Max dim with Note (I)
11-05-21	Revised labels

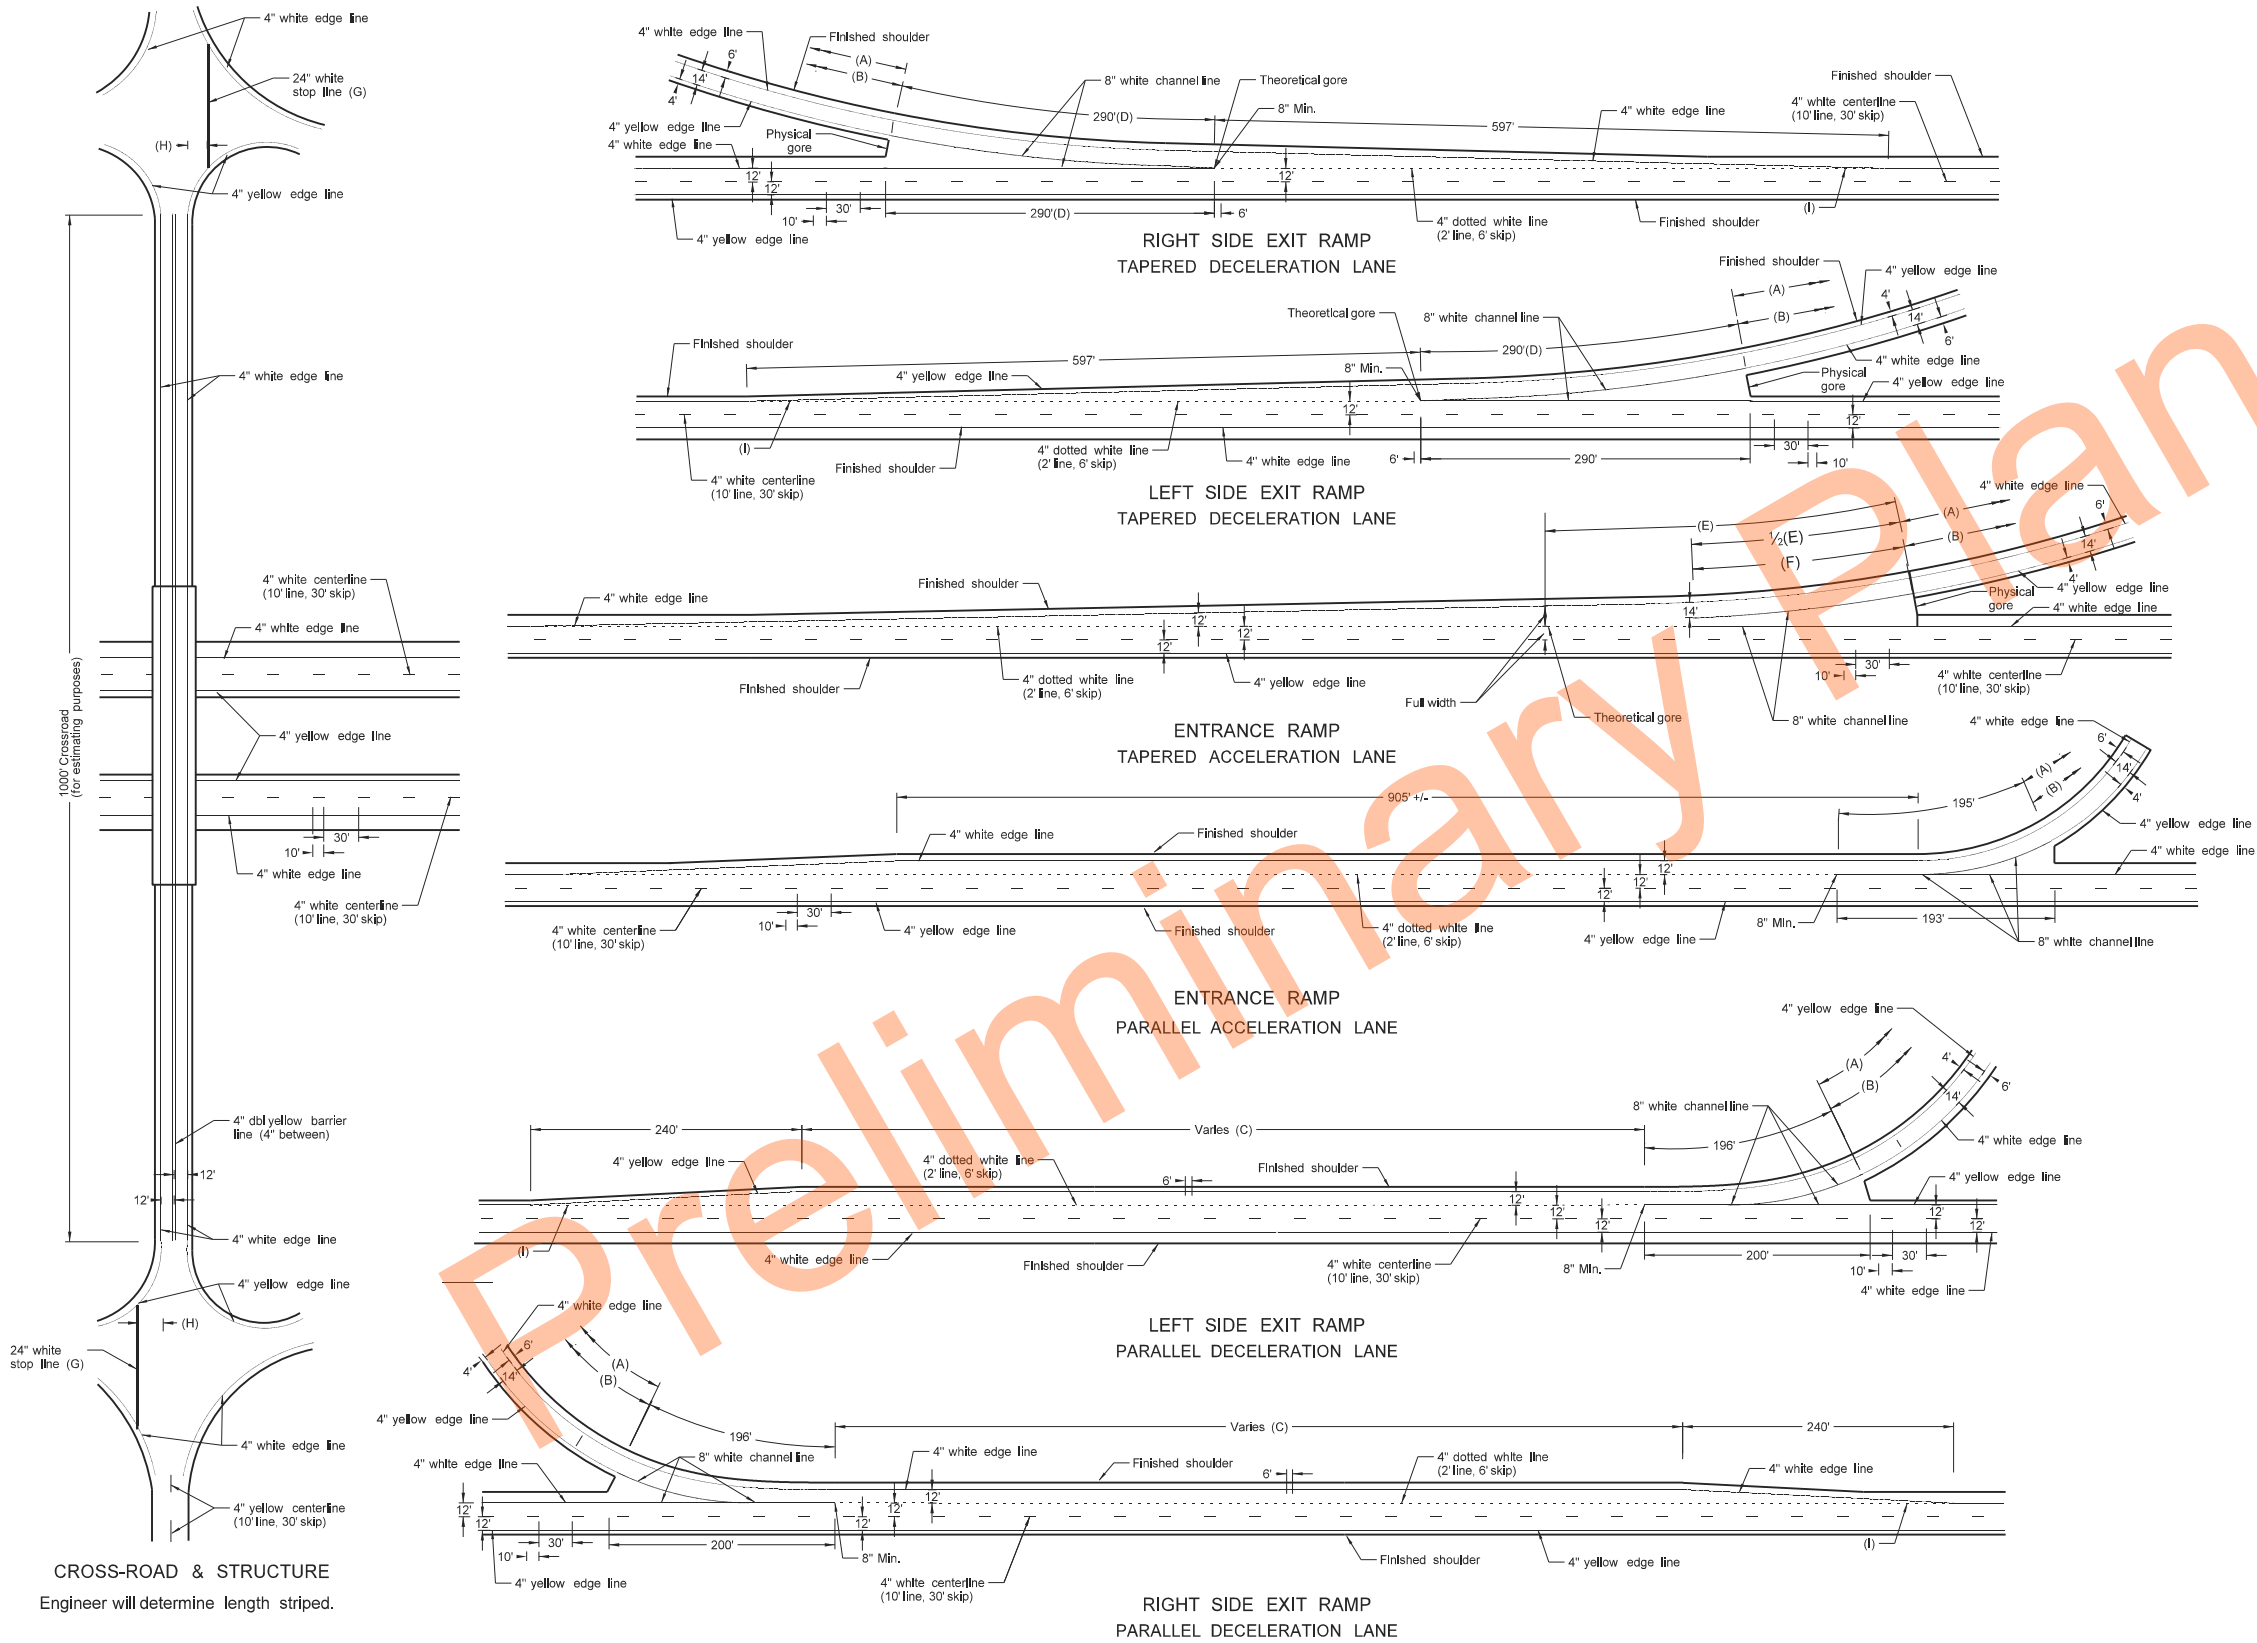


NOTES:
1. Continue edge lines through private drives and field drives. Break edge lines for intersections.

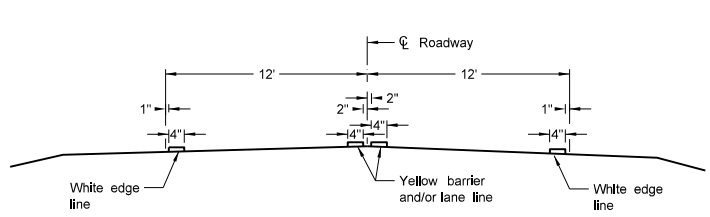


Two Lane Two Way
RURAL ROADWAY

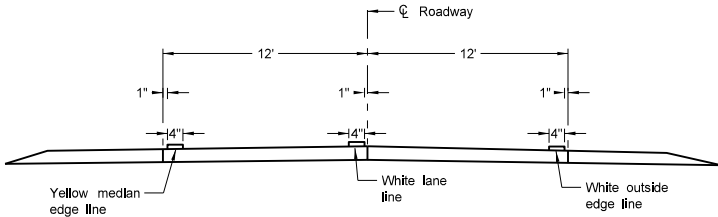


Two Lane Roadway
INTERSTATE HIGHWAY
Concrete Section

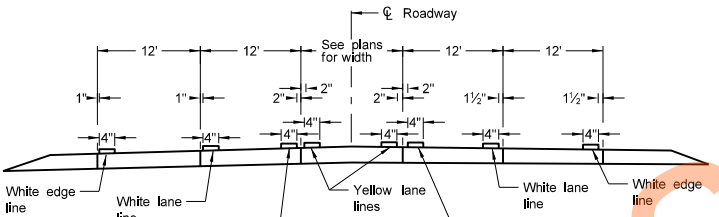


RURAL FIVE LANE ROADWAY
Concrete Section

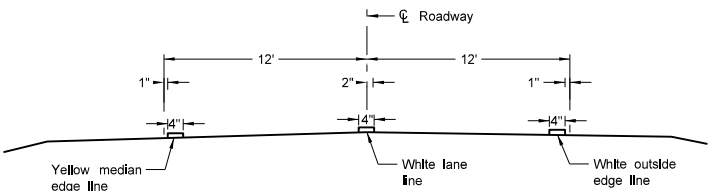


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Asphalt Section

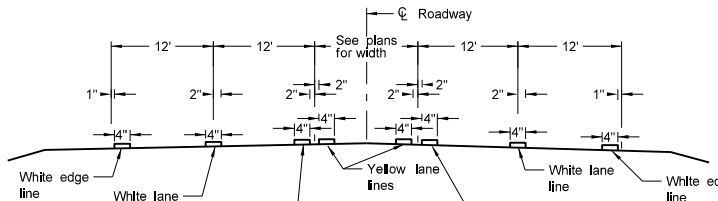


RURAL FIVE LANE ROADWAY
Asphalt Section

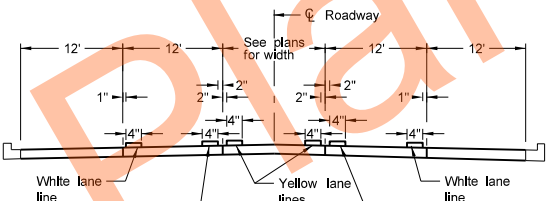


URBAN FIVE LANE SECTION
Concrete Section

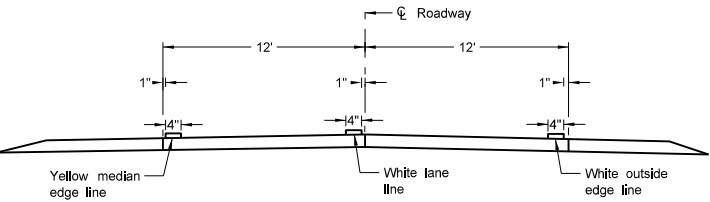


Two Lane Roadway
PRIMARY HIGHWAY
Concrete Section

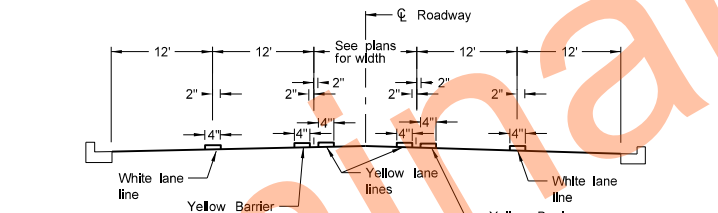


URBAN FIVE LANE SECTION
Asphalt Section

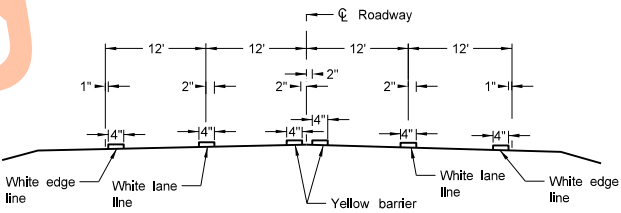


RURAL FOUR LANE ROADWAY
Asphalt Section

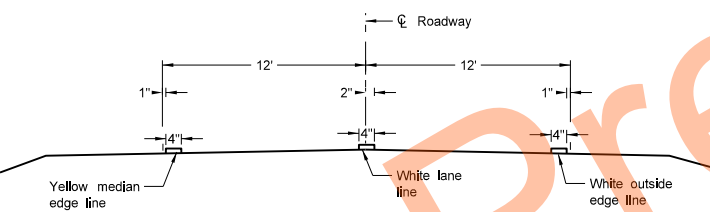


Two Lane Roadway
INTERSTATE HIGHWAY
Asphalt Section

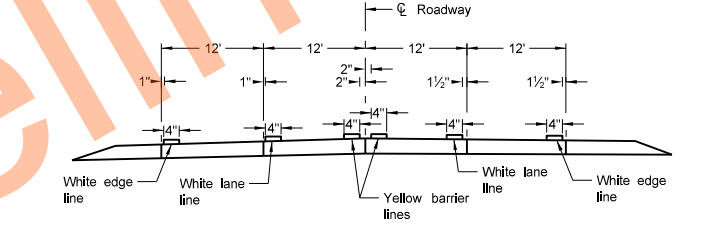


RURAL FOUR LANE ROADWAY
Concrete Section

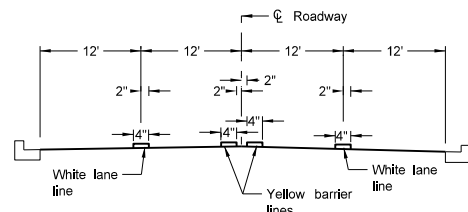

URBAN FOUR LANE SECTION
Asphalt Section

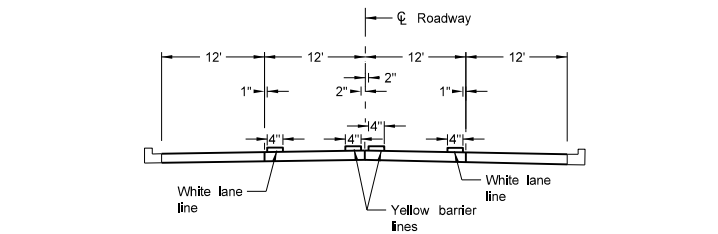

URBAN FOUR LANE SECTION
Concrete Section

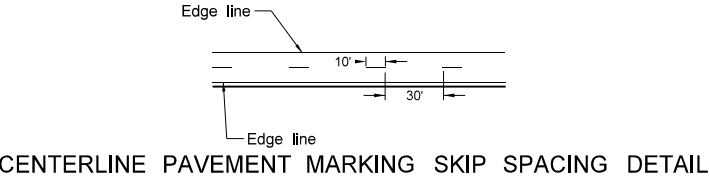


CENTERLINE PAVEMENT MARKING SKIP SPACING DETAIL

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.


This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE-4683,
on 8/27/19 and the original document is stored at the North Dakota Department of Transportation

SHORT-TERM PAVEMENT MARKING

D-762-11

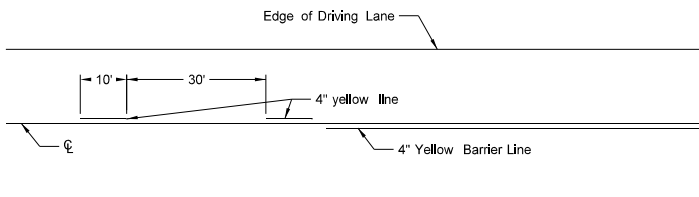


Painted or Tape Lines

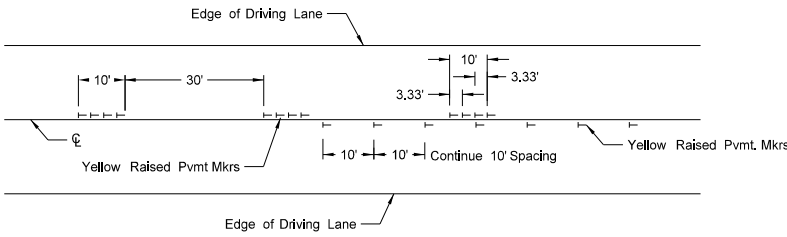


Raised Pavement Markers

TWO-LANE TWO-WAY ROADWAY

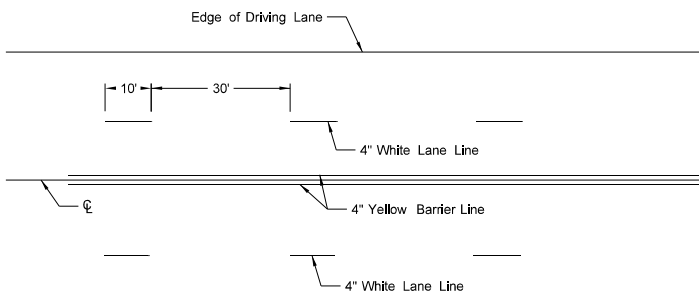


Painted or Tape Lines

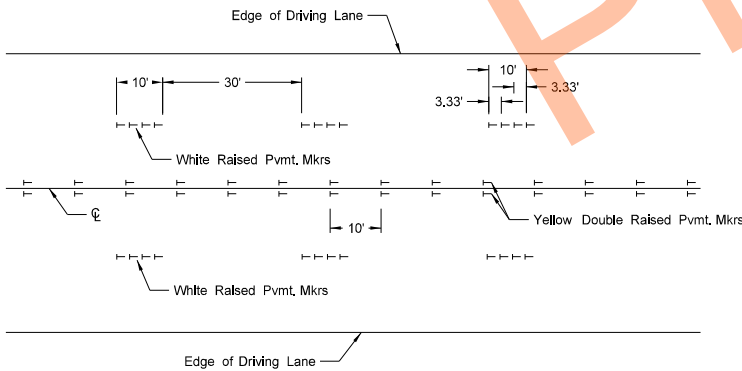


Raised Pavement Markers

FOUR LANE ROADWAY

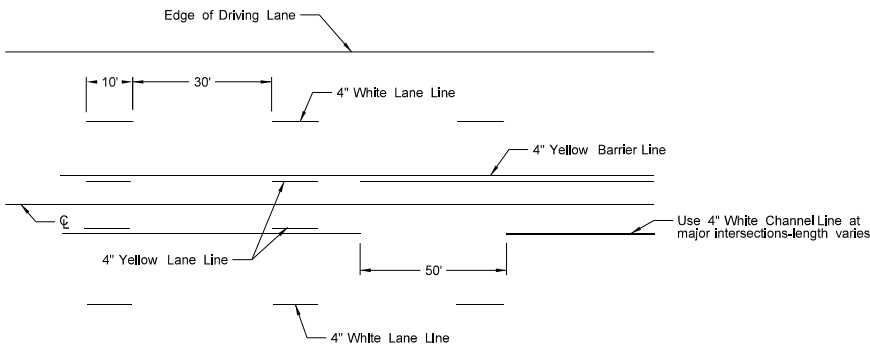


Painted or Tape Lines

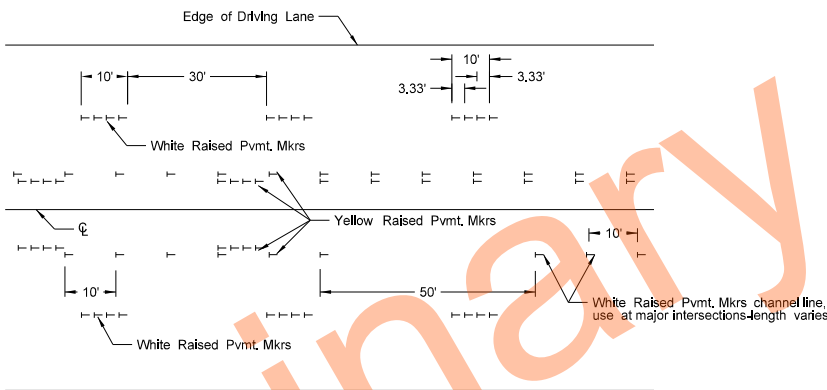


Raised Pavement Markers

FIVE LANE ROADWAY TWO WAY LEFT TURN

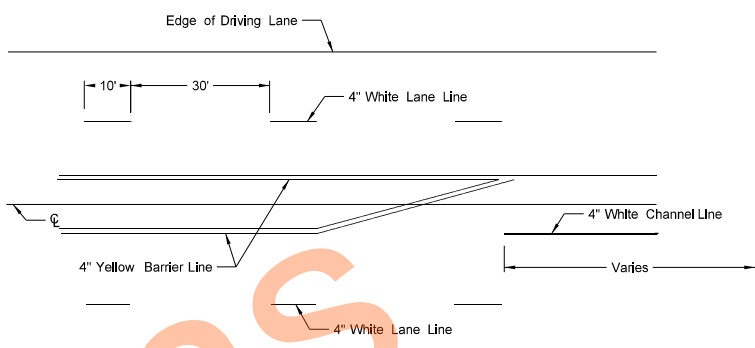

Painted or Tape Lines

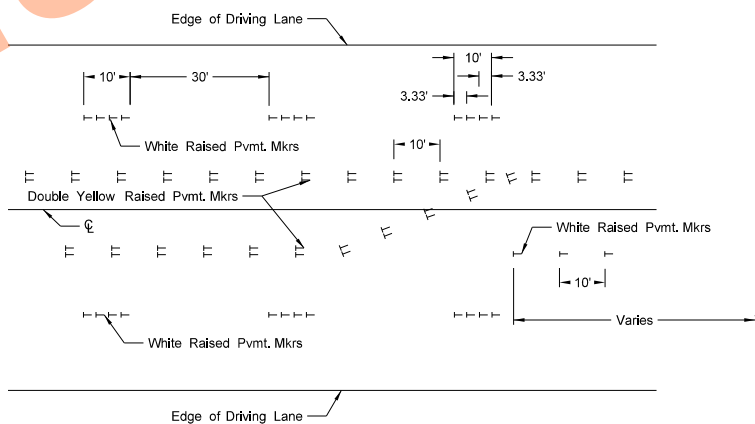

Raised Pavement Markers

FIVE LANE ROADWAY WITH MARKED ISLANDS

- NOTES:
1. Place no passing zones on two-lane two-way roadways as shown. In lieu of short term no passing zone pavement markings, place no passing zone signs. Replace no passing zone signs with short term no passing zone pavement marking within three days.
 2. Place short term center line stripe (paint) on top lift to match exact placement of permanent stripe.
 3. Remove raised markers and tape markings after permanent pavement marking is installed.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
3-29-16	Re-numbered to be D-762-11 (previously was D-762-6)
10-17-17	Updated to active voice.
8-27-19	New Design Engineer PE Stamp.

This document was originally issued and sealed by
Kirk J Hoff,
Registration Number
PE- 4683,
on 8/27/19 and the original document is stored at the
North Dakota Department
of Transportation