

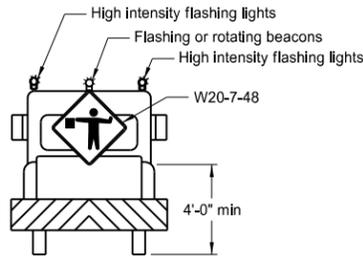
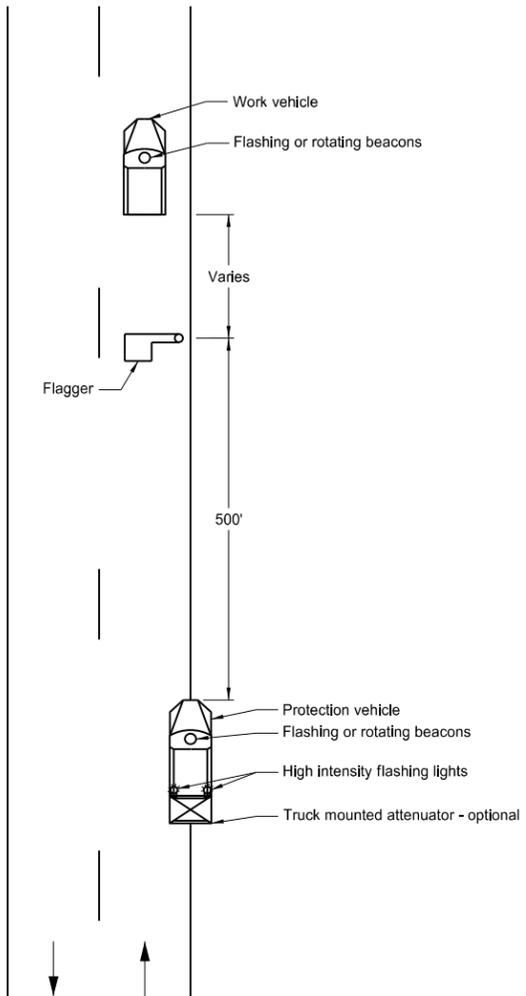


Two Lane, Two Way Roadways



Typical Protection Vehicle

Multilane Roadways

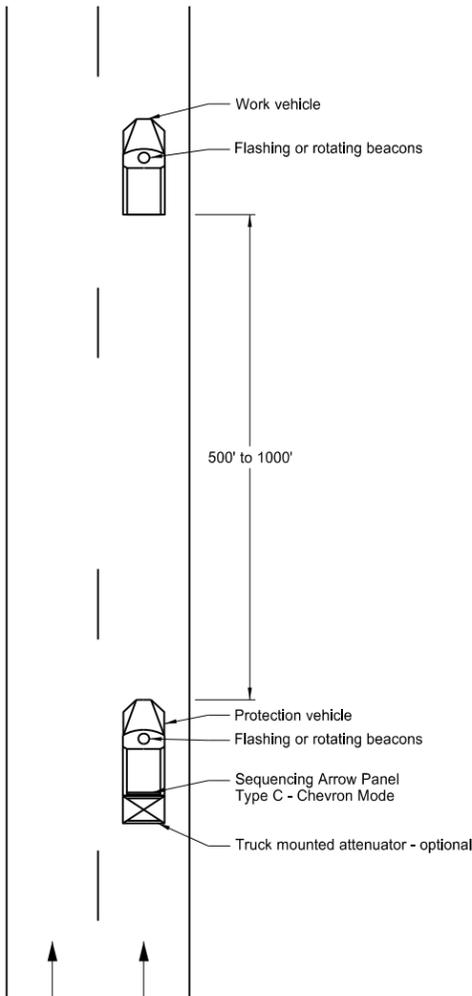

Typical Protection Vehicle

- Notes:
1. The working vehicle shall display a 360 degree rotating, flashing, oscillating or strobe light.
 2. The shadow vehicle shall display a 360 degree rotating, flashing, oscillating or strobe light. The shadow vehicle for Multilane Roadway shall also have a sequencing arrow panel Type C operated in the chevron mode.
 3. This application is for use during daylight hours and in areas of good visibility only.
 4. Two lane, two way roadway, a flagger shall be used to protect the work area and warn oncoming traffic.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 9/25/2012 and the original document is stored at the North Dakota Department of Transportation