

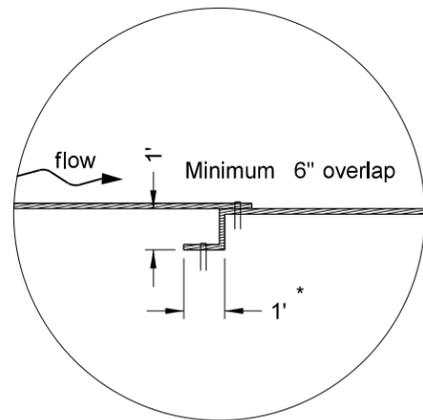
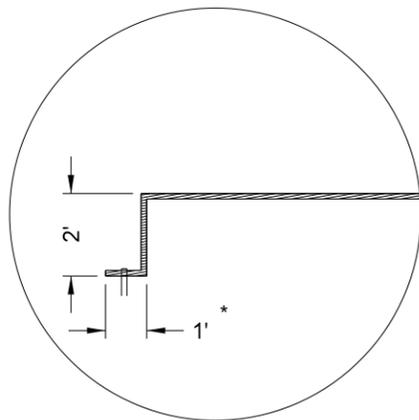
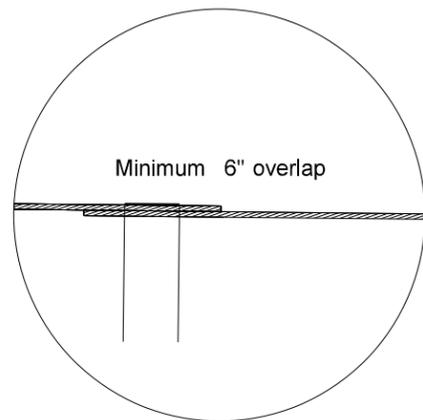
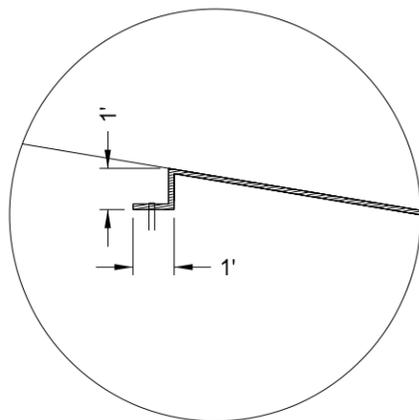


EROSION AND SILTATION CONTROL
EROSION CONTROL BLANKET INSTALLATION

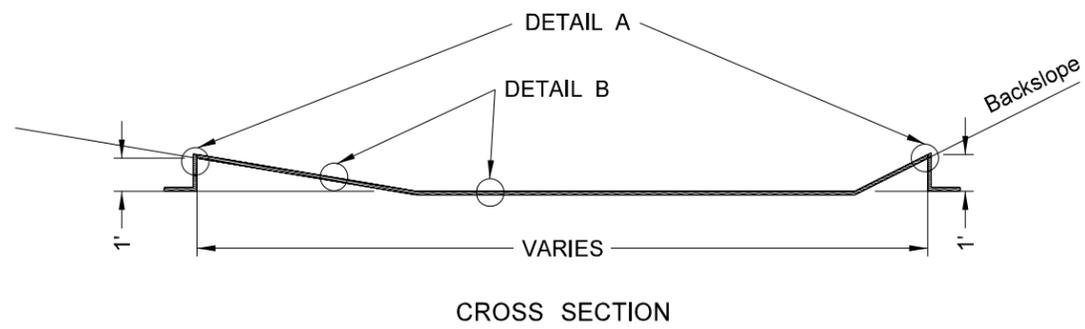



* This tie may be placed ahead or back.

DETAILS
CHANNEL OR SLOPE INSTALLATION

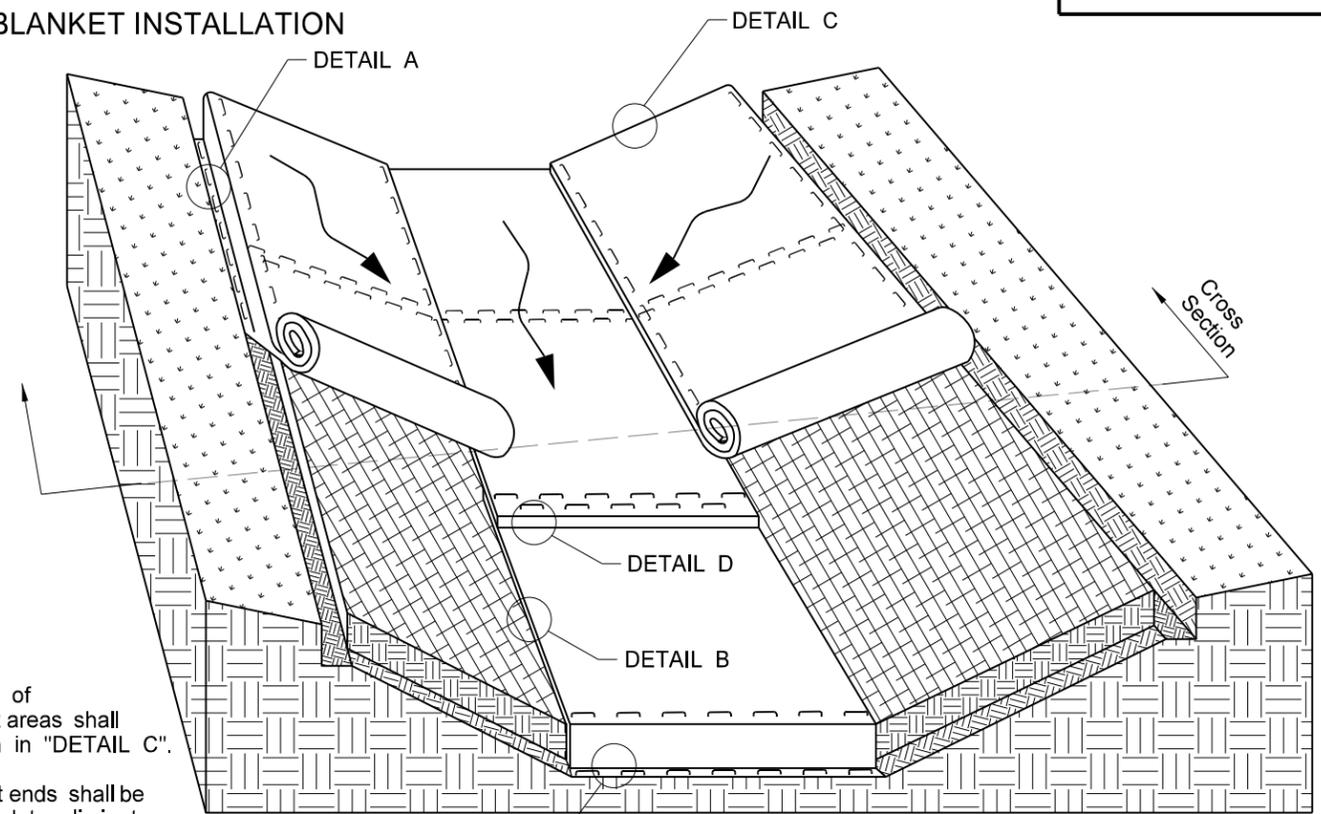


Notes:
Beginning and ending of erosion control blanket areas shall be installed as shown in "DETAIL C".

Erosion control blanket ends shall be entrenched and stapled to eliminate undermining on side slopes.

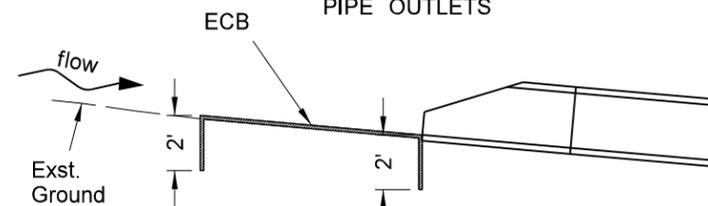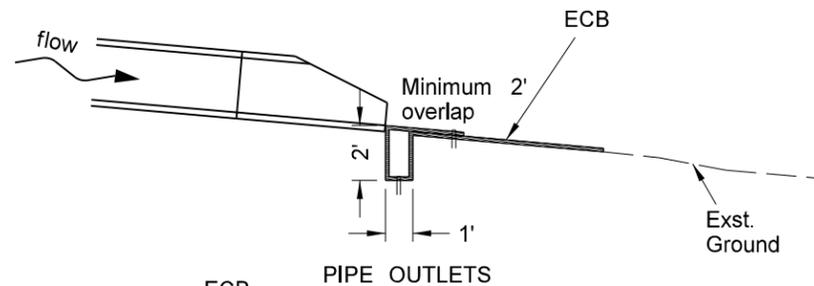

INSTALLATION AT PIPE ENDS

3.8 staples per square yard using 8-inch 11 gauge wire "u" staples.

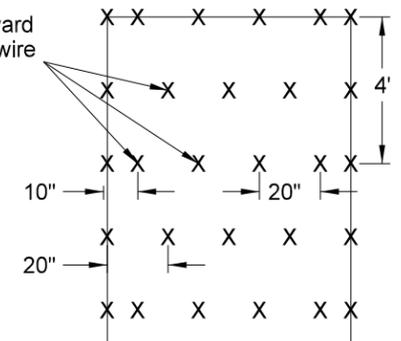

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/03/13 and the original document is stored at the North Dakota Department of Transportation.