


DESIGN DATA				
Traffic	Average Daily			
Current 2024	Pass: 1091	Trucks: 155	Total: 1,246	
Preventive Maintenance				

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION


NH-6-005(056)288
Pembina and Cavalier Counties
End PCC to PAR Road (ND 89)
Chip Seal

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	7/1/2025
Supplemental Specifications	NONE

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
NH-6-005(056)288	11.141	11.141

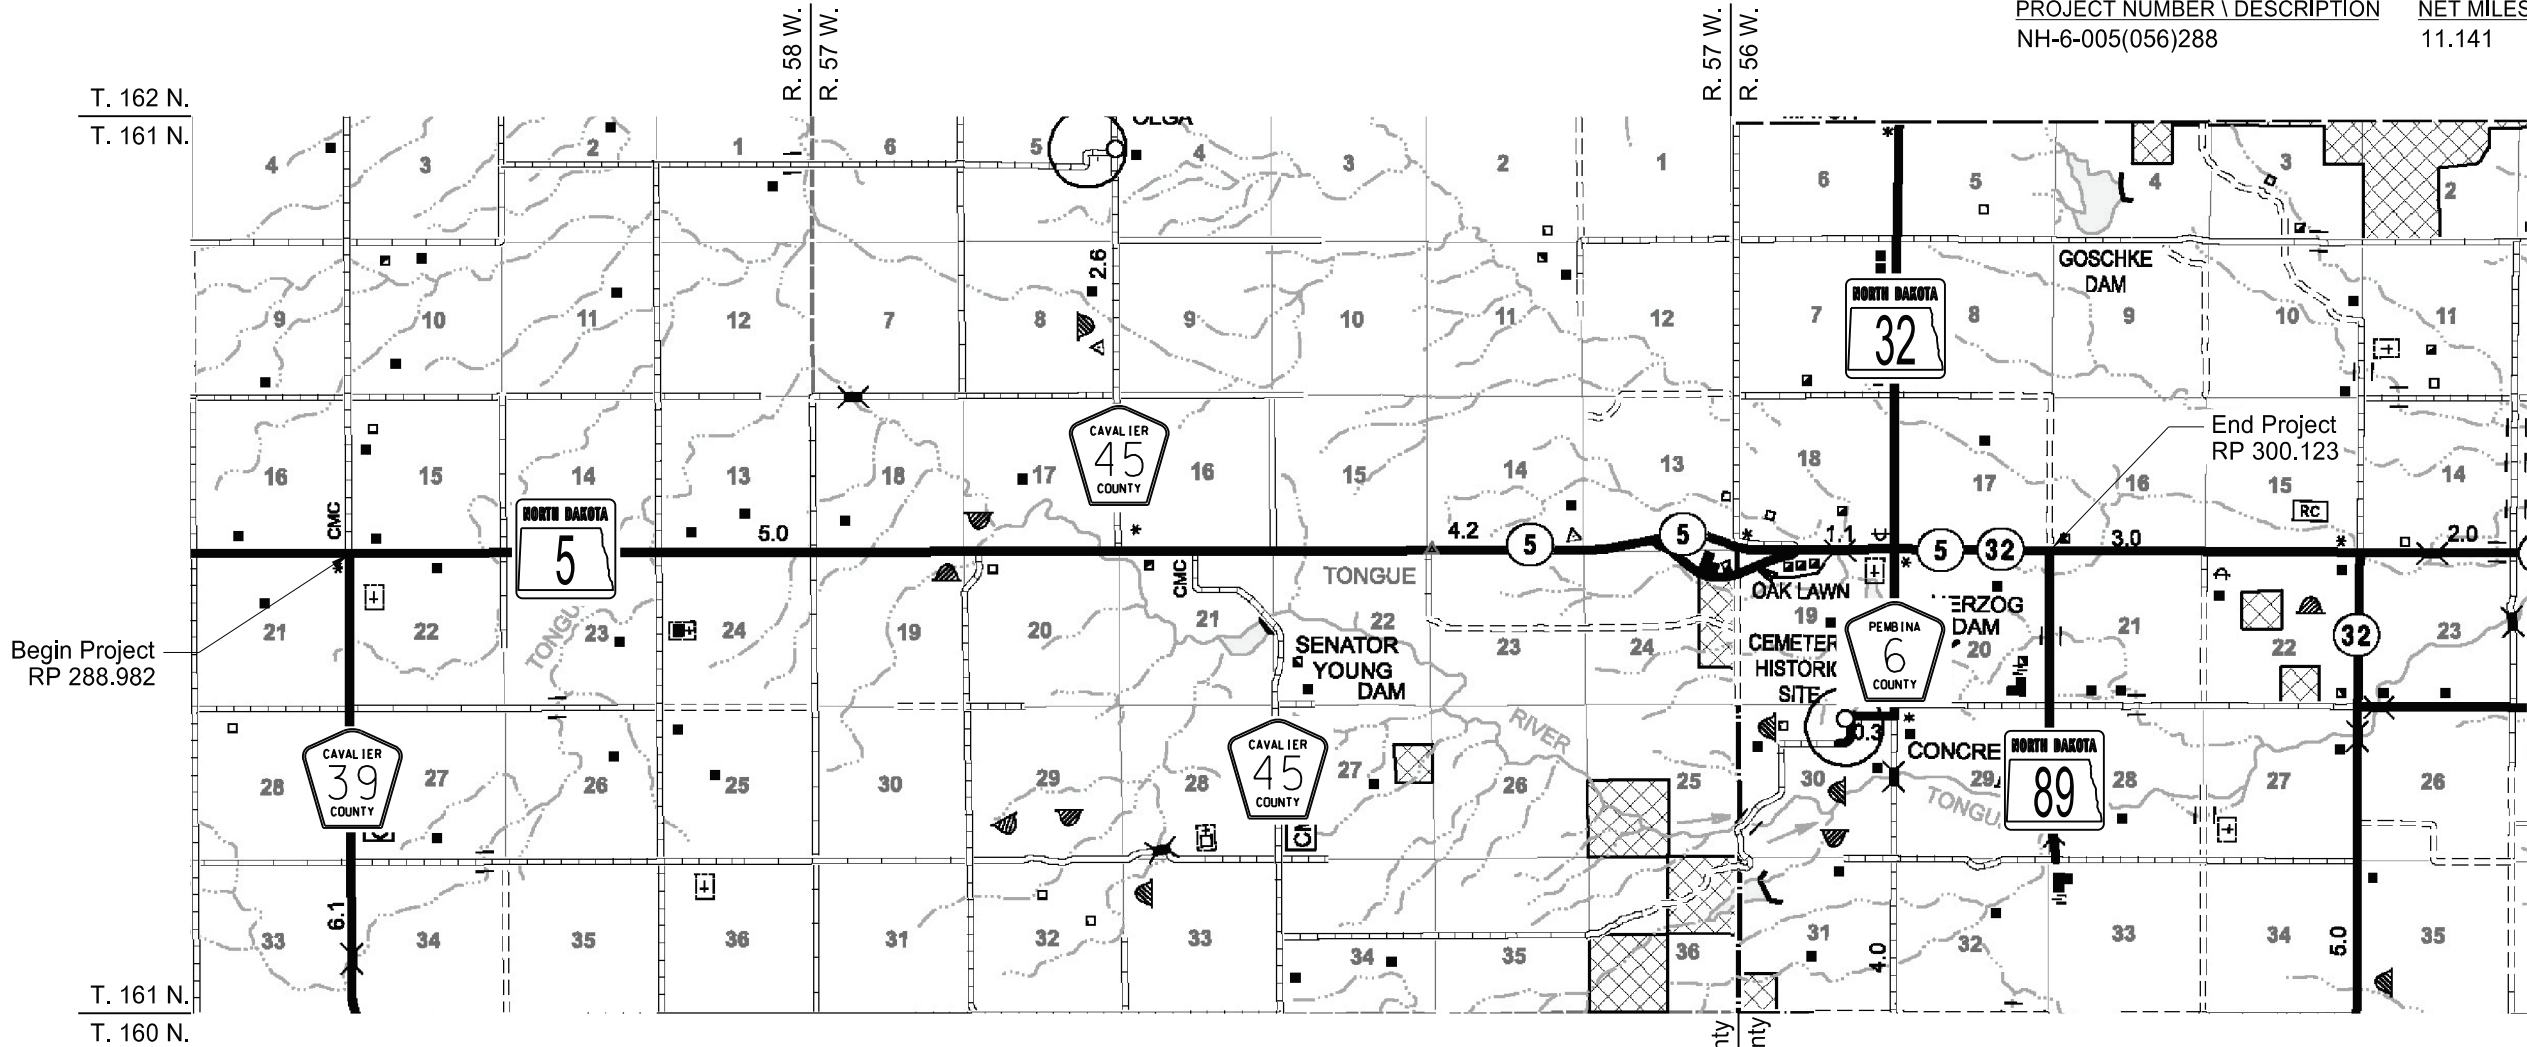

DESIGNER Brian Ward

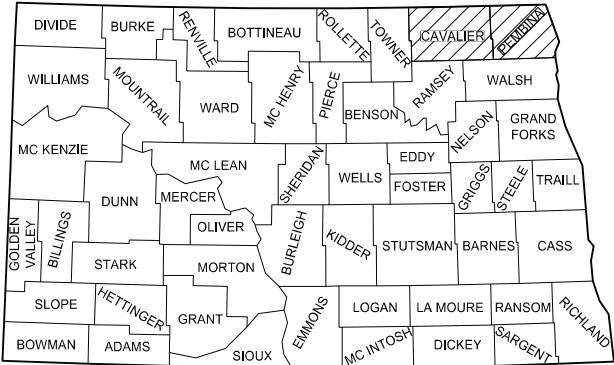

STATE COUNTY MAP

ND DEPARTMENT OF TRANSPORTATION
GRAND FORKS DISTRICT
[Signature] 2/19/25

GRAND FORKS DISTRICT

REGISTERED PROFESSIONAL ENGINEER

DUSTIN LANG


PE-6394

DATE 12/19/25

NORTH DAKOTA

TABLE OF CONTENTS						STATE	PROJECT NO.	SECTION NO.	SHEET NO.
						ND	NH-6-005(056)288	2	1
PLAN SECTIONS					LIST OF STANDARD DRAWINGS				
Section	Page(s)	Description	Number	Description					
1	1	Title Sheet	D-101-1, 2,3,4	NDDOT Abbreviations					
2	1	Table of Contents	D-101-10	NDDOT Utility Company and Organization Abbreviations					
4	1	Scope of Work	D-101-20, 21	Line Styles					
6	1	Notes	D-101-30, 31,32,33	Symbols					
8	1	Quantities	D-704-3	Lane Markers (Spotting Tab For Seal Projects Only)					
10	1 - 2	Basis of Estimate	D-704-7	Breakaway Systems For Construction Zone Signs - Perforated Tube					
30	1	Typical Sections	D-704-8	Breakaway Systems For Construction Zone Signs - U-Channel Post					
90	1 - 3	Paving Layouts	D-704-9	Construction Sign Details - Terminal And Guide Signs					
100	1 - 2	Work Zone Traffic Control	D-704-10	Construction Sign Details - Regulatory Signs					
			D-704-11, 11A	Construction Sign Details - Warning Signs					
			D-704-14	Construction Sign Punching And Mounting Details					
			D-704-15	Road Closure Layouts					
			D-704-20	Terminal And Seal Coat Sign Layouts					
			D-704-22	Construction Truck And Temporary Detour Layouts					
			D-704-27	Mobile Operation (Pavement Marking)					
			D-704-33	Two-Lane Roadway Portable Rumble Strips					
			D-704-50	Portable Sign Support Assembly					
			D-762-1	Pavement Marking Message Details					
			D-762-4	Pavement Marking					
			D-762-11	Short-Term Pavement Marking					
SPECIAL PROVISIONS									
Number	Description								
SP 254(25)	Warranty Chip Seal								

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-005(056)288	4	1

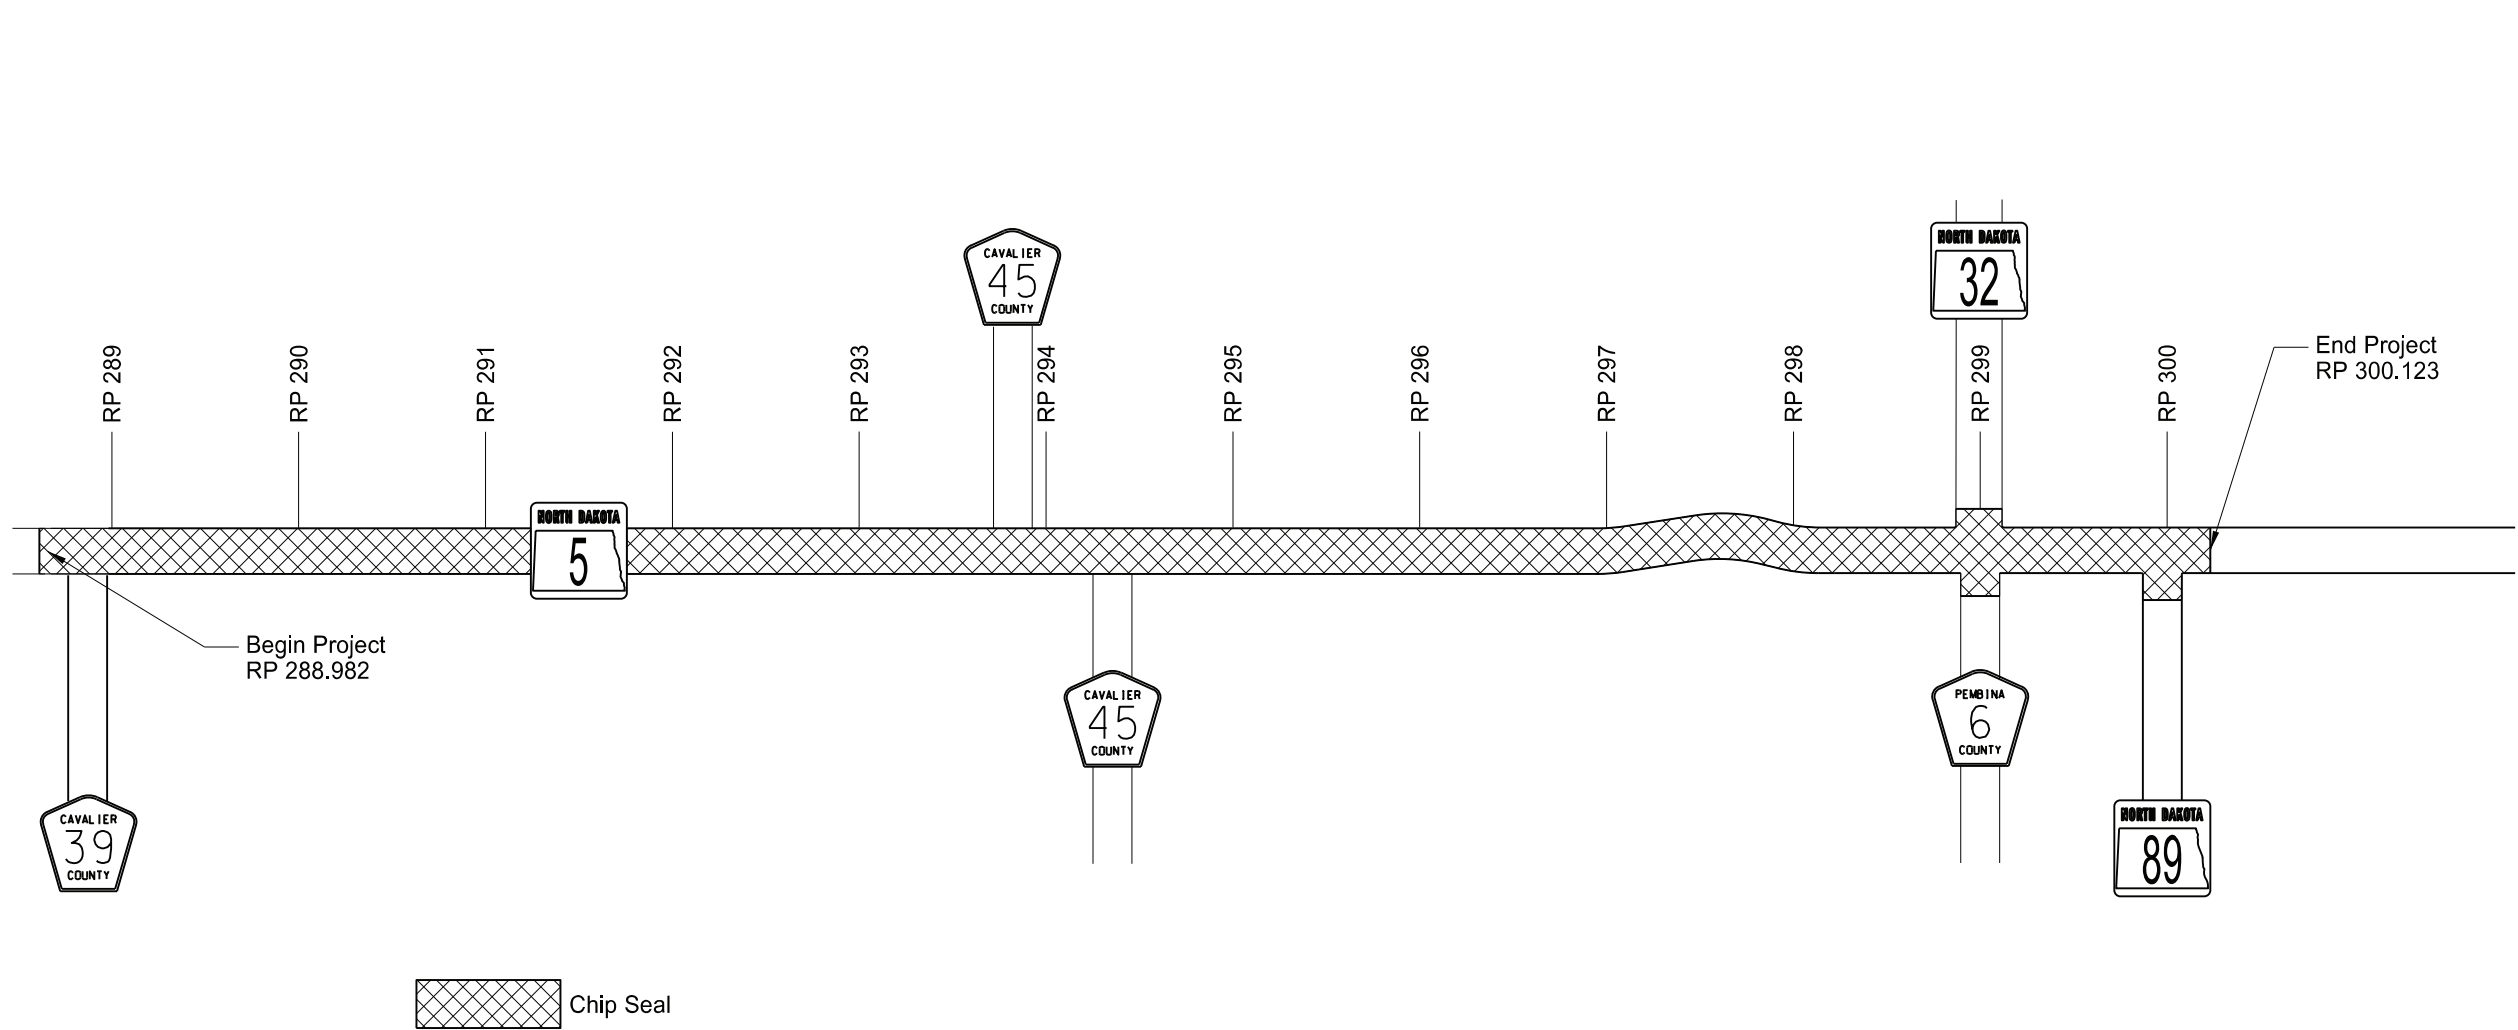

Scope of Work

Chip Seal
End PCC to PAR Road (ND 89)



		STATE	PROJECT NO.	SECTION NO.	SHEET NO.
		ND	NH-6-005(056)288	6	1

NOTES

401-P01

FOG SEAL APPLICATION: Use CSS-1H for Fog Seal. Broom roadway before Fog Seal application. Dilute the Fog Seal Oil 50% (Water) and 50% (CSS-1H). Dilution at the supplier will be required. Complete this work within 5 working days of the mainline seal completion. This is incidental to the seal coat bid item.

Liquidated Damages for failure to complete the fog seal within 5 working days will be charged according to Section 108.07.

420-P01

SEAL COAT: Initial light brooming will be during the cool period of the early morning of the next day after seal coat application. Traffic control will be needed during the brooming operation.

420-P02

SHOULDER SEAL: The Engineer will not measure areas of shoulder seal application, except for those areas requested to be sealed not included in the plans. The Engineer will pay for sealing the areas shown in the plans at plan quantity.

420-P03

CHIP SEAL EXCEPTION AREA: A Weigh in Motion (WIM) site is located on ND 5 at RP 289.025. Within an area of 200 feet before and after the WIM apply a fog seal at the rate of 0.05 gal/SY and do not place aggregate. Ensure the aggregate does not track onto the WIM equipment in the roadway. Prior to working in the area, contact the Project Engineer and the Bismarck District Radio shop at (701) 328-6972.

704-500

PORTABLE RUMBLE STRIPS (PRS): Use PRS made of rubber or engineered polymers.

Install PRS as part of the temporary traffic control when the following signs are also part of the required traffic control set up:

- "Be Prepared to Stop" (W3-4); and
- "Flagger" symbol (W20-7)

Install PRS that meet the following criteria:

- Have no adhesives or fasteners required for placement.
- Have a manufacture's speed rating that meets or exceeds the posted speed limit; and
- Each strip in the array must weigh a minimum of 100 pounds.

Use individual PRS constructed in one of the following manners:

- A single piece.
- Interlocking segments; or
- Two pieces hinged at the midpoint.

An installed array of PRS consists of a minimum of 3 individual strips.

704-P01

TRAFFIC CONTROL FOR CHIP SEAL: Provide traffic control consisting of a temporary lane closure, flagging, and a pilot car.

Traffic control device quantities are based on a day's production and following list:

- Standard D-704-15, layout A, place layout A at both ends of the work zone. Flagging stations located within the work zone require sign W20-7-48 only.
- Standard D-704-20, layout H

Provide additional devices at no cost to the Department.


Place flaggers and traffic control devices as shown on Standard D-704-15, layout A at the following intersections when the lane closure spans across them:

- JCT ND 5 and Cavalier County 39
- JCT ND 5 and Cavalier County 45
- JCT ND 5 and ND 32
- JCT ND 5 and Pembina County 6
- JCT ND 5 and ND 89

762-050

PAVEMENT MARKING: If the Engineer and Contractor agree, plan quantity will be used as the measurement for payment for pavement marking items.

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 12/19/25
NORTH DAKOTA



ESTIMATE OF QUANTITIES


STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-005(056)288	8	1

SPEC CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
103	0100 CONTRACT BOND	L SUM	1	1
420	0405 SEAL COAT	SY	185,640	185,640
420	0605 SHOULDER SEAL	SY	63,013	63,013
702	0100 MOBILIZATION	L SUM	1	1
704	1000 TRAFFIC CONTROL SIGNS	UNIT	2,260	2,260
704	1048 PORTABLE RUMBLE STRIPS	EA	3	3
762	0432 SHORT TERM 6IN LINE-TYPE NR	LF	76,385	76,385
762	1106 PVMT MK PAINTED 6IN LINE	LF	157,323	157,323
762	1124 PVMT MK PAINTED 24IN LINE	LF	180	180

BASIS OF ESTIMATE

Estimated Mainline Quantities			
Description	Unit	Width	Units/Mile
Typical Section 1 (7.133 Miles)			
Seal Coat (Mainline) (28 ft x 5280 LF/Mi ÷ 9 SF/SY = 16427 SY/Mi) • Cover Coat Material CI 41-M @ 25 lb/SY = 206 Ton/Mi • CRS2P Emulsified Asphalt @ 0.40 Gal/SY = 6571 Gal/Mi • Fog Seal @ 0.05 Gal/SY = 822 Gal/Mi	SY	28'	16,427
Shoulder Seal (10 ft x 5280 LF/Mi ÷ 9 SF/SY = 5867 SY/Mi) • CRS2P Emulsified Asphalt @ 0.20 Gal/SY = 1174 Gal/Mi	SY	5' LT 5' RT	5,867
Typical Section 2 (4.008 Miles)			
Seal Coat (Mainline) (28 ft x 5280 LF/Mi ÷ 9 SF/SY = 16427 SY/Mi) • Cover Coat Material CI 41-M @ 25 lb/SY = 206 Ton/Mi • CRS2P Emulsified Asphalt @ 0.40 Gal/SY = 6571 Gal/Mi • Fog Seal @ 0.05 Gal/SY = 822 Gal/Mi	SY	28'	16,427
Shoulder Seal (9 ft x 5280 LF/Mi ÷ 9 SF/SY = 5280 SY/Mi) • CRS2P Emulsified Asphalt @ 0.20 Gal/SY = 1056 Gal/Mi	SY	4.5' LT 4.5' RT	5,280
Additional Quantities			
Description	Unit	Basis	Total
JCT Cavalier Co. 39, ND 32 & Cavalier Co. 6, ND 89			
Seal Coat • Cover Coat Material CI 41-M @ 25 lb/SY = 33 Tons • CRS2P Emulsified Asphalt @ 0.40 Gal/SY = 1051 Gal • Fog Seal @ 0.05 Gal/SY = 132 Gal	SY	See Sec. 90 Sheet 1-3	2,626

• indicates quantities to be included in contract price for Seal Coat



BASIS OF ESTIMATE

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-005(056)288	10	2



Temporary Pavement Marking		
Location	Basis	Quantity
ND 5 - RP 288.982 to 300.123 (2 Applications)		
Short Term 6IN Line-Type NR Yellow Skip Line (10' Line, 30' Skip)	1,320 LF/Mi	29,413 LF
Short Term 6IN Line-Type NR Yellow Single Barrier Line		
Short Term 6IN Line-Type NR Yellow Double Barrier Line	10,560 LF/Mi	3,823 LF
Total		76,385 LF
Permanent Pavement Marking		
Location	Basis	Quantity
ND 5 - RP 288.982 to 300.123		
PVMT MK Painted 6IN Yellow Skip Line (10' Line, 30' Skip)	1,320 LF/Mi	14,707 LF
PVMT MK Painted 6IN White Edge Line		
PVMT MK Painted 6IN Yellow Single Barrier Line	5,280 LF/Mi	21,575 LF
PVMT MK Painted 6IN Yellow Double Barrier Line	10,560 LF/Mi	1,912 LF
Additional Quantities		
JCT ND 32 N		
PVMT MK Painted 6IN White Edge Line	D-762-5	315 LF
PVMT MK Painted 6IN Yellow Double Barrier Line	D-762-5	74 LF
PVMT MK Painted 24IN Line White Stop Bar		60 LF
JCT Cavalier Co. 6 S		
PVMT MK Painted 6IN White Edge Line	D-762-5	225 LF
PVMT MK Painted 6IN Yellow Double Barrier Line	D-762-5	42 LF
PVMT MK Painted 24IN Line White Stop Bar		20 LF
JCT Cavalier Co. 39 S		
PVMT MK Painted 6IN White Edge Line	D-762-5	190 LF
PVMT MK Painted 6IN Yellow Double Barrier Line	D-762-5	42 LF
PVMT MK Painted 24IN Line White Stop Bar		50 LF
JCT ND 89 S		
PVMT MK Painted 6IN White Edge Line	D-762-5	522 LF
PVMT MK Painted 6IN Yellow Double Barrier Line	D-762-5	70 LF
PVMT MK Painted 24IN Line White Stop Bar		50 LF

Total Pavement Marking		
	White	Yellow
Short Term 6IN Line - Type NR	-	76,385 LF
PVMT MK Painted 6IN Line	118,901 LF	38,422 LF
PVMT MK Painted 24IN Line White Stop Bar	180 LF	-

Barrier Striping Locations			
From RP to RP		Single Barrier (Mi)	Double Barrier (Mi)
288.966	289.16	0.194	
292.555	292.664	0.109	
292.664	292.694		0.03
292.694	292.884	0.19	
292.984	293.175	0.191	
293.175	293.275		0.1
293.275	293.803	0.528	
293.803	293.854		0.051
293.854	293.953	0.099	
293.953	294.09	0.137	
294.09	294.326	0.236	
294.326	294.552	0.226	
296.609	296.743	0.134	
296.743	297.02	0.277	
297.325	297.634	0.309	
297.664	297.839	0.175	
298.217	298.344	0.127	
298.358	298.447	0.089	
298.447	298.966	0.519	
298.995	299.254	0.259	
299.806	299.983	0.177	
299.99	300.1	0.11	
ND 5 Totals		4.086	0.181



	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-005(056)288	30	1

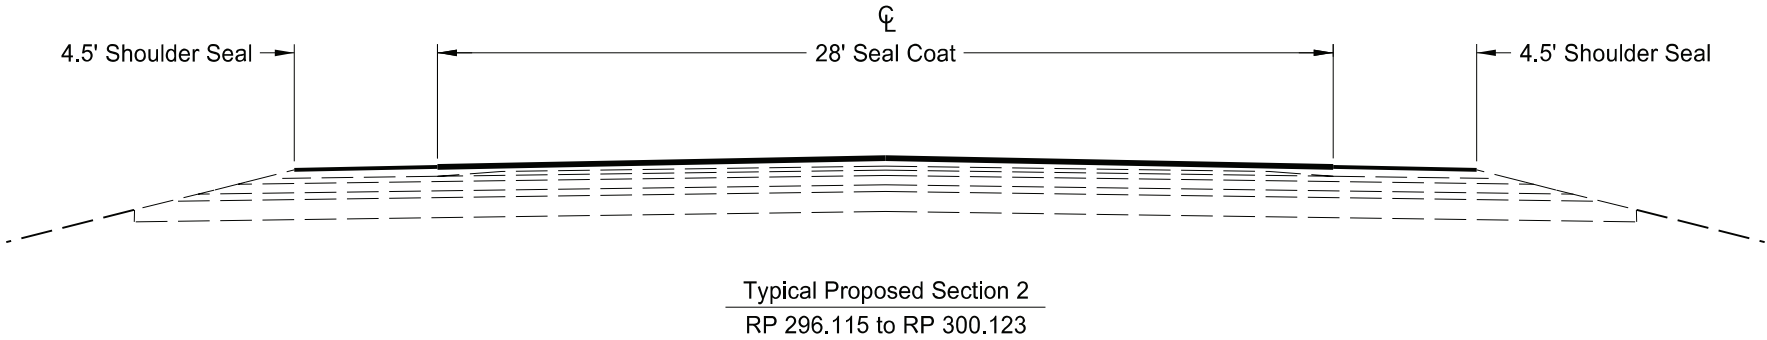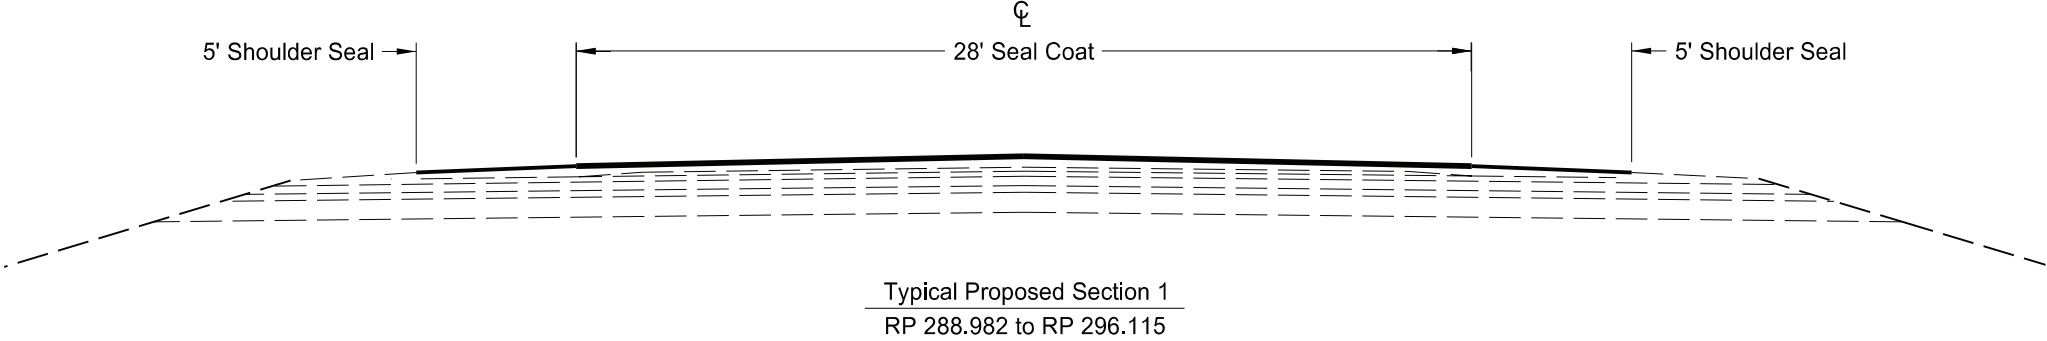


Typical Sections

Chip Seal


End PCC to PAR Road (ND 89)



	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-005(056)288	90	1

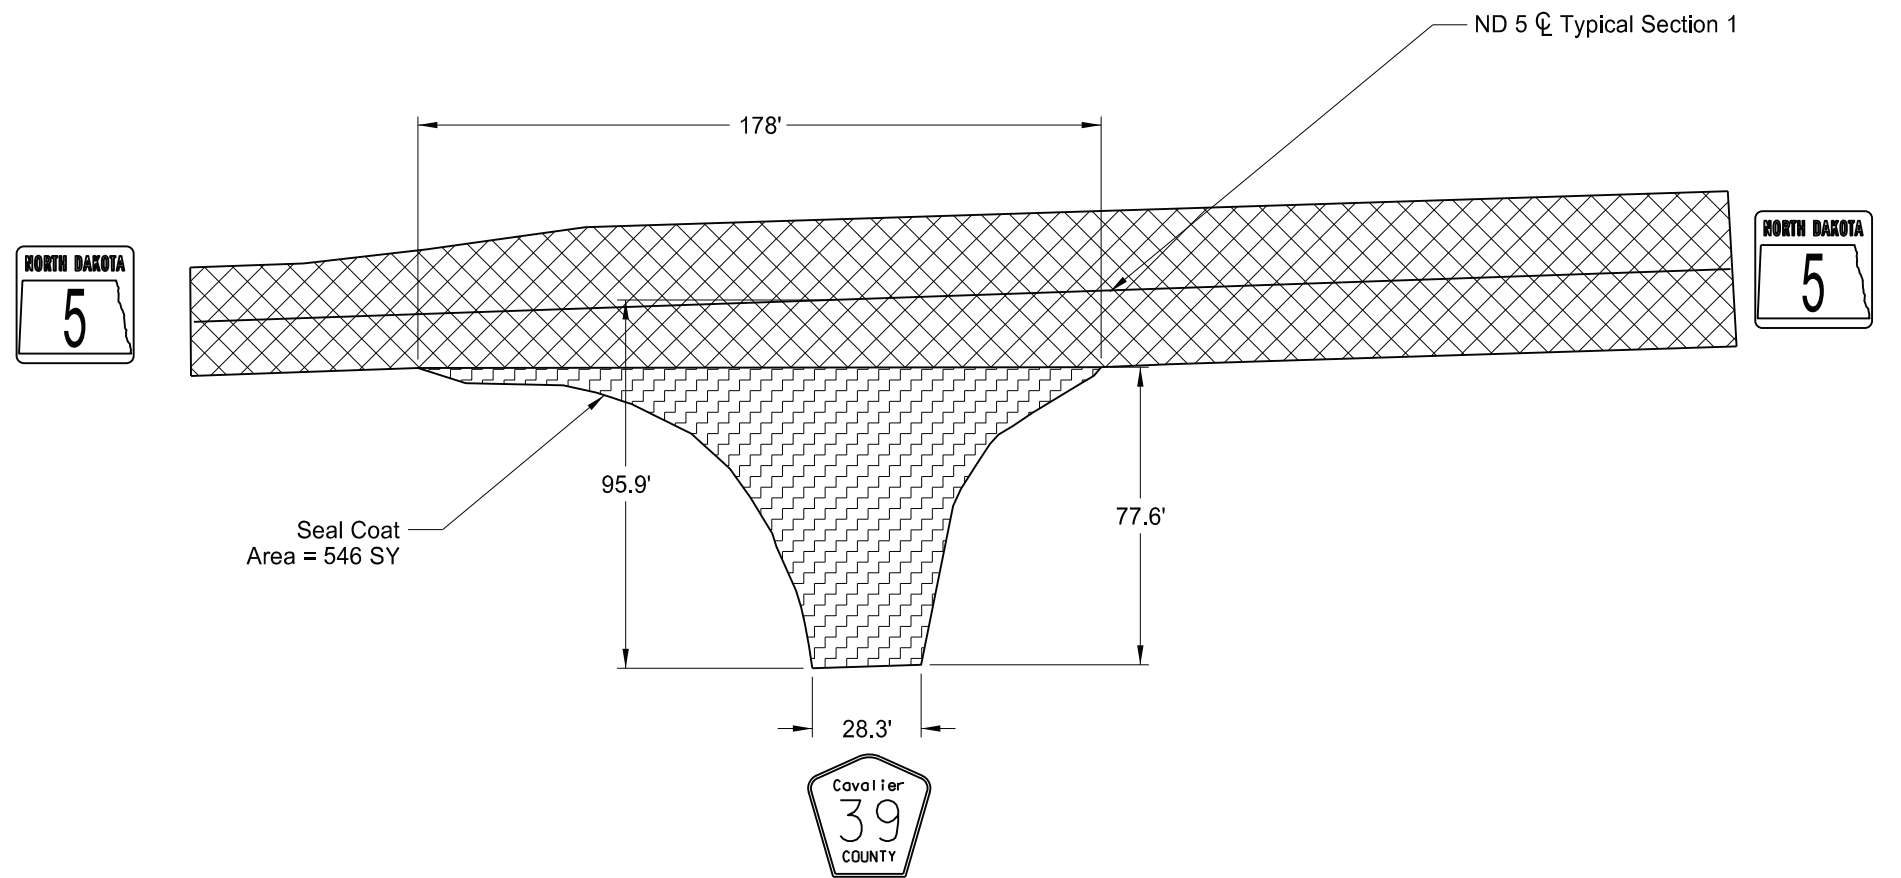

Typical Section 1





Additional Quantities

Estimated Quantities
Seal Coat 546 SY

Seal Coat Layout
Additional Quantities
JCT Cavalier 39
Chip Seal
End PCC to PAR Road (ND 89)





	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-005(056)288	90	2

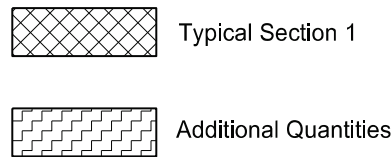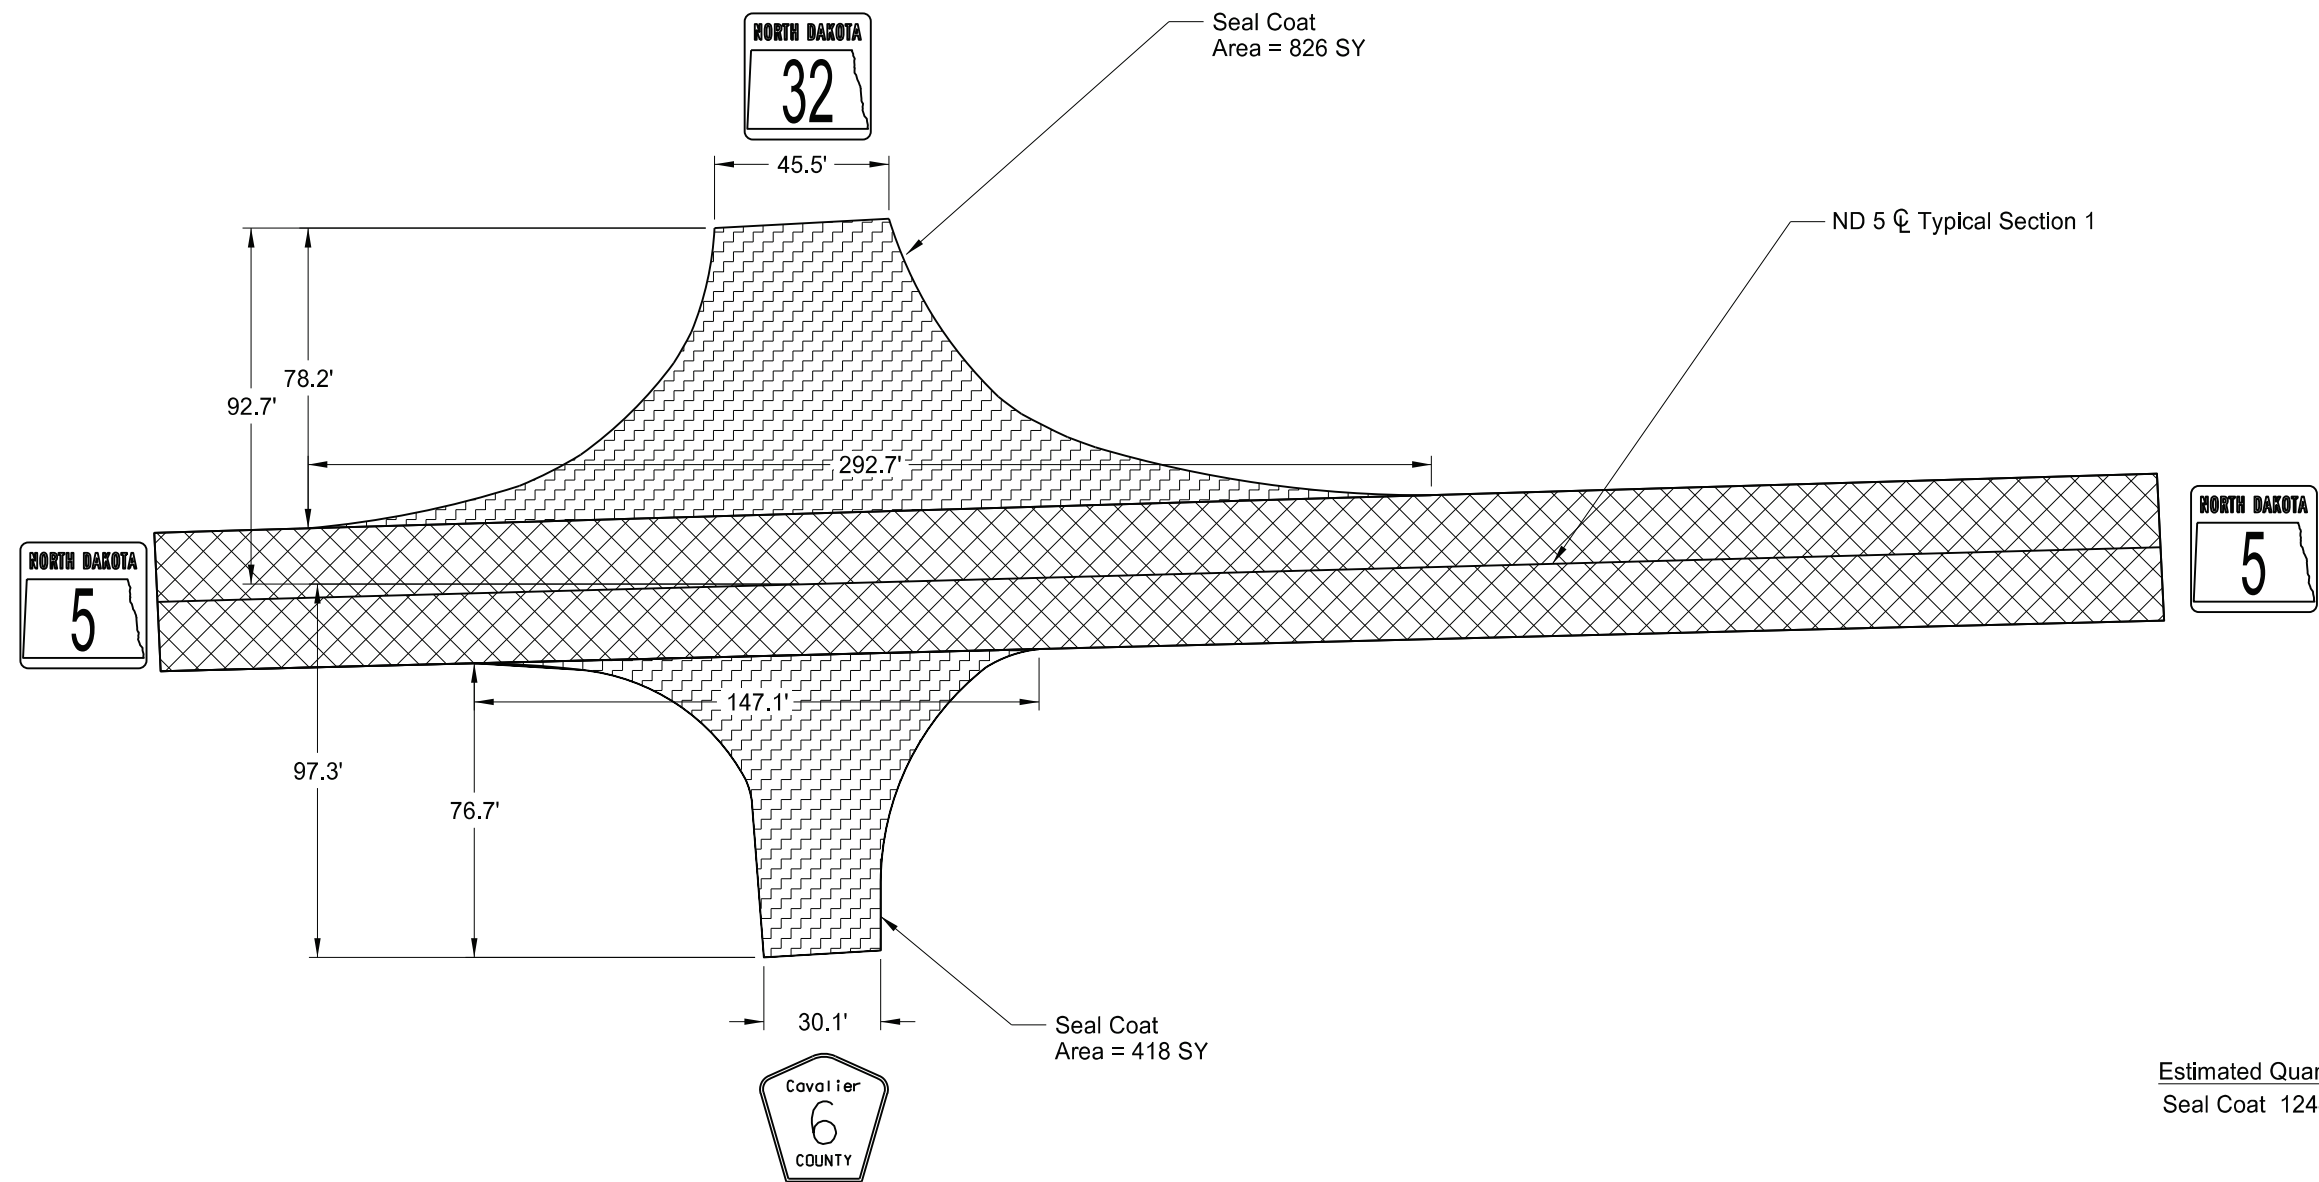



Seal Coat Layout
Additional Quantities
JCT ND 32
Chip Seal
End PCC to PAR Road (ND 89)



	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-005(056)288	90	3

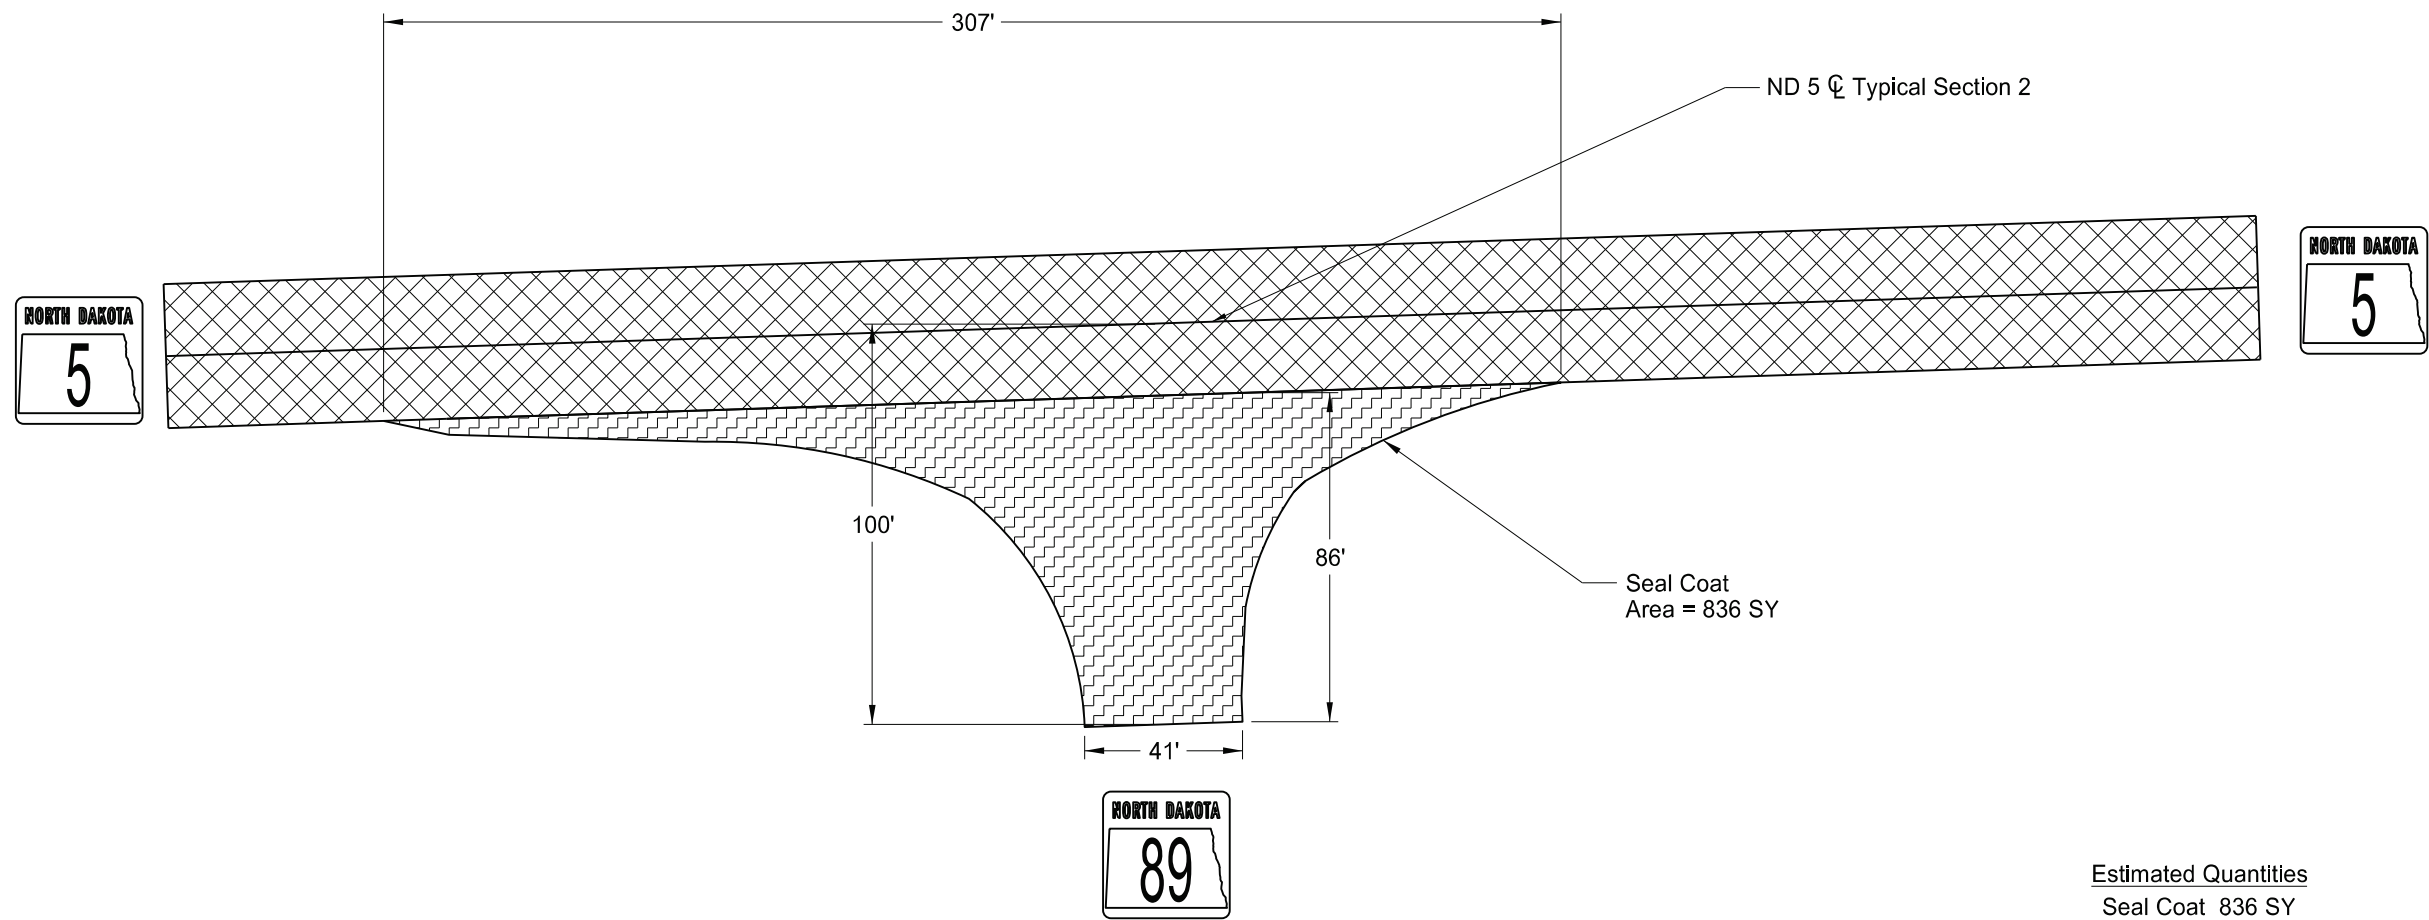


-  Typical Section 2
-  Additional Quantities

Seal Coat Layout
Additional Quantities
JCT ND 89
Chip Seal
End PCC to PAR Road (ND 89)



	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-005(056)288	100	2

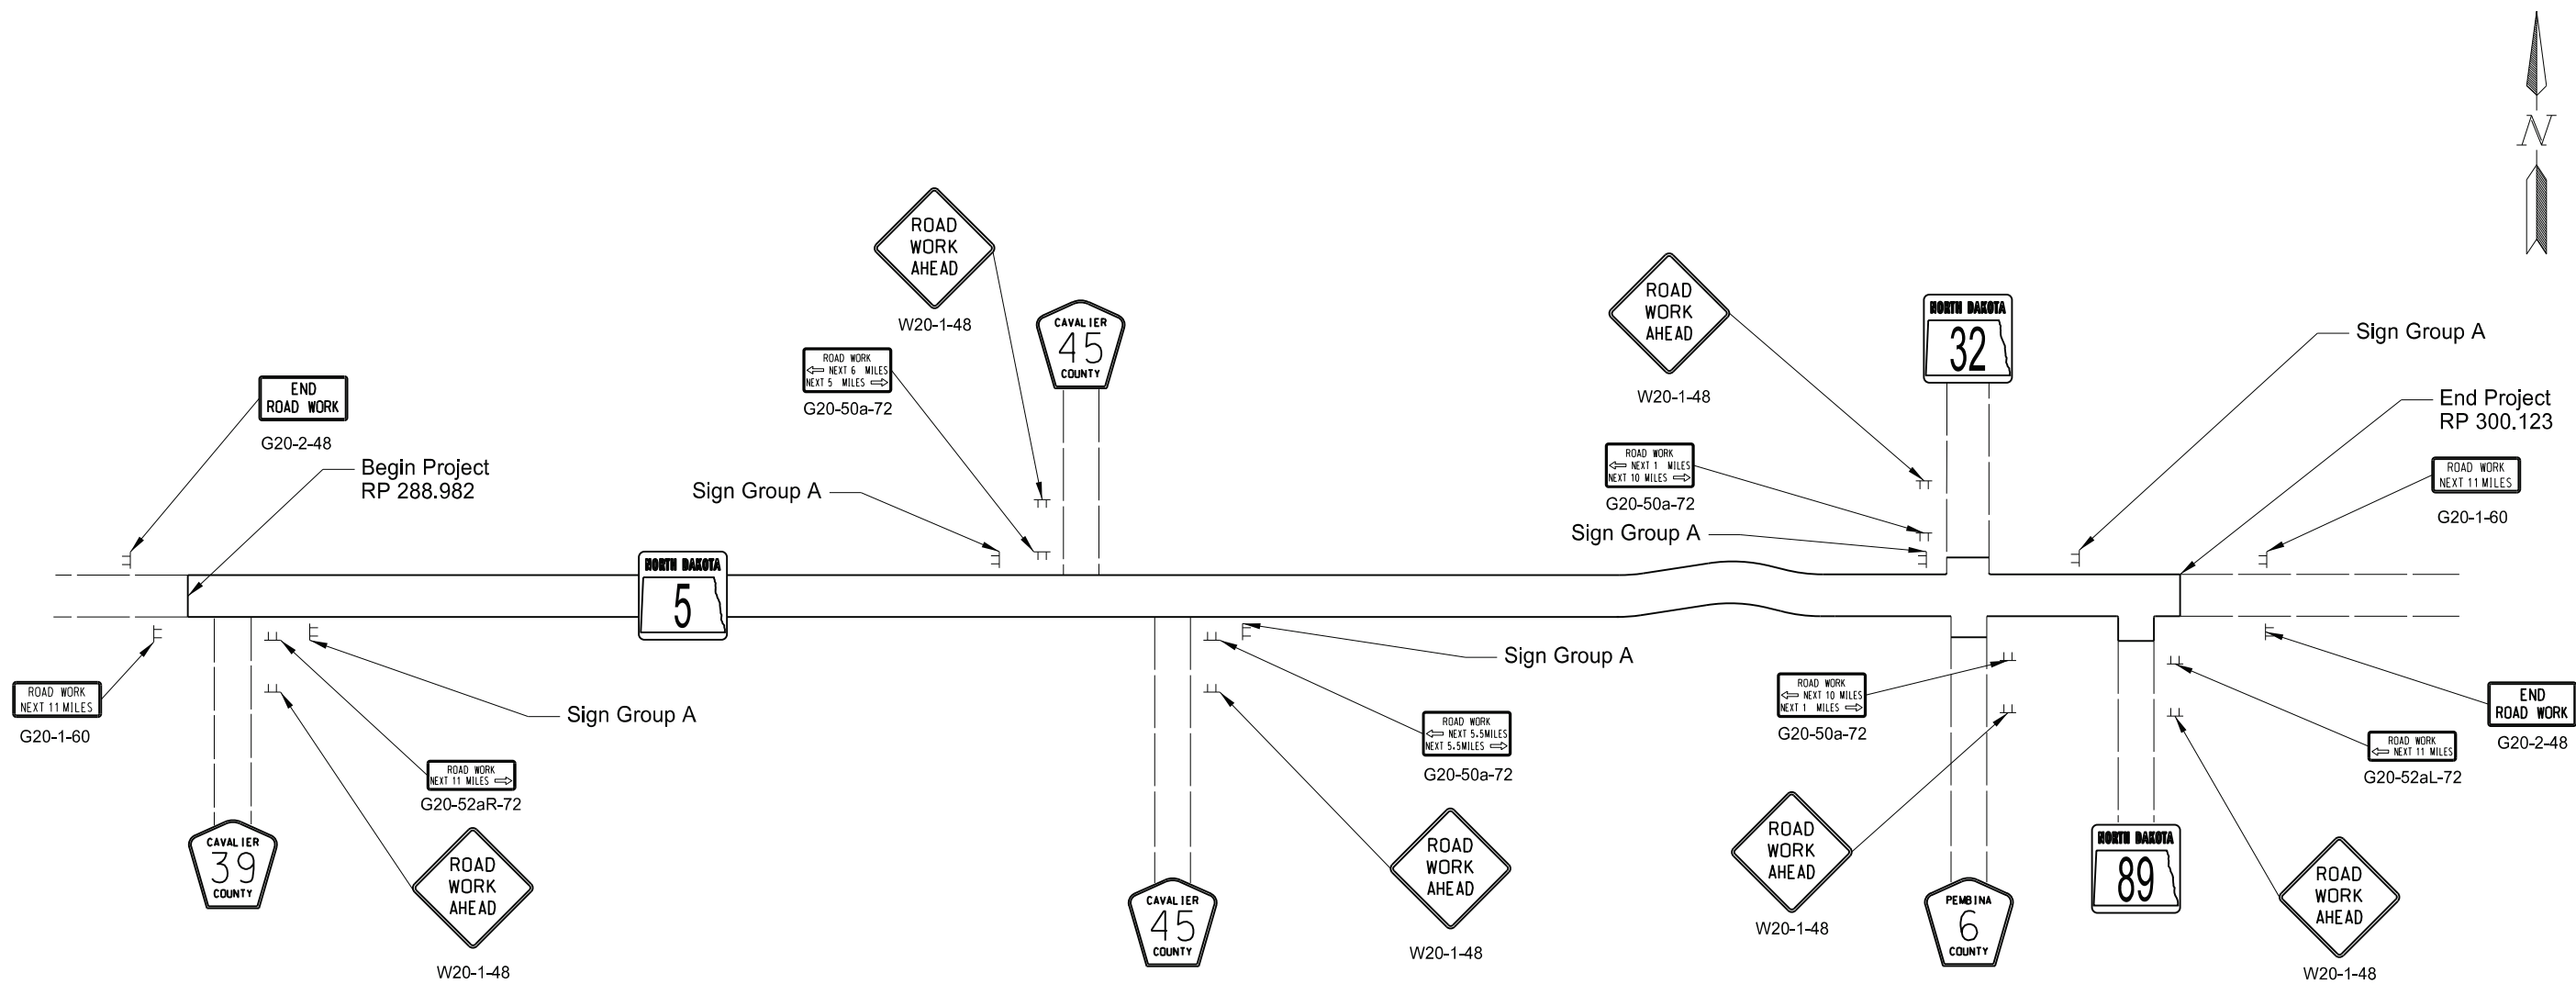

W8-12-48
NO CENTER STRIPE

R4-1-48
DO NOT PASS

R2-1-48
SPEED LIMIT 55
MINIMUM FEE \$150
R2-1aP-24

W22-8-48
FRESH OIL LOOSE ROCK
NEXT 00 MILES
W20-52P-54

Sign Group A
(D-704-20, Type H)

Work Zone Traffic Control

Chip Seal

End PCC to PAR Road (ND 89)

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 12/19/25
NORTH DAKOTA

NDDOT ABBREVIATIONS

D-101-1

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.	C Gdrl	cable guardrail	Culv	culvert	FOS	factor of safety
Abn	abandoned	Calc	calculate	C&G	curb & gutter	Fed	Federal
Abut	abutment	CIP	cast iron pipe	CI	curb inlet	FP	feed point
Adj	adjusted	CB	catch basin	CR	curb ramp	Fn	fence
Aggr	aggregate	CRS	cationic rapid setting	C	cut	Fn P	fence post
Ahd	ahead	C Gd	cattle guard	Dd Ld	dead load	FO	fiber optic
ARV	air release valve	C To C	center to center	Defl	deflection	FD	field drive
Align	alignment	CL or \varnothing	centerline	Defm	deformed	F	fill
Al	alley	Ch	chain	DInt	delineate	FAA	fine aggregate angularity
Alt	alternate	Chnlk	chain-link	DIntr	delineator	FH	fire hydrant
Alum	aluminum	Ch Blk	channel block	Depr	depression	FI	flange
ADA	Americans with Disabilities Act	Ch Ch	channel change	Desc	description	Flrd	flared
&	and	Chk	check	Det	detail	FES	flared end section
Appr	approach	Chsld	chiseled	DWP	detectable warning panel	F Bcn	flashing beacon
Approx	approximate	Cir	circle	Dtr	detour	FA	flight auger sample
ACP	asbestos cement pipe	Cl	class	Dia or \varnothing	diameter	FL	flow line
Asph	asphalt	Clnt	clean-out	Dir	direction	Ftg	footing
AC	asphalt cement	Clr	clear	Dist	distance	FM	force main
Assmd	assumed	Cl&gr	clearing & grubbing	DM	disturbed material	Fnd	found
@	at	Comb.	combination	DB	ditch block	Fdn	foundation
Atten	attenuation	Coml	commercial	DG	ditch grade	Frac	fractional
ATR	automatic traffic recorder	Compr	compression	Dbl	double	Frwy	freeway
Ave	Avenue	CADD	computer aided drafting & design	Dn	down	Frt	front
Avg	average	Conc	concrete	Dwg	drawing	FF	front face
ADT	average daily traffic	CECB	concrete erosion control blanket	Dr	drive	F Disp	fuel dispenser
		Cond	conductor	Drw	driveway	FFP	fuel filler pipes
		Const	construction	DI	drop inlet	FLS	fuel leak sensor
		Cont	continuous	D	dry density	Furn	furnish/ed
		CSB	continuous split barrel sample				
		Contr	contraction				
		Contr	contractor				
Bk	back	CP	control point	Ea	each		
BF	back face	Coord	coordinate	Esmt	easement		
Balc	balcony	Cor	corner	E	East		
B Wire	barbed wire	Corr	corrected	EB	Eastbound		
Barr	barricade	CAES	corrugated aluminum end section	Elast	elastomeric		
Btry	battery	CAP	corrugated aluminum pipe	EL	electric locker		
BI	beehive inlet	CMES	corrugated metal end section	E Mtr	electric meter		
Beg	begin	CMP	corrugated metal pipe	EVSE	electric vehicle supply equipment		
BG	below grade	CPVCP	corrugated poly-vinyl chloride pipe	Elec	electric/al		
BM	bench mark	CSES	corrugated steel end section	EDM	electronic distance meter		
Bkwy	bikeway	CSFES	corrugated steel flared end section	Elev or El	elevation		
Bit	bituminous	CSP	corrugated steel pipe	Ellipt	elliptical		
Blk	block	CSTES	corrugated steel traversable end section	Emb	embankment		
BH	bore hole	Co	County	Emuls	emulsion/emulsified		
Bot	bottom	Crse	course	ES	end section		
Blvd	Boulevard	Ct	Court	Engr	engineer		
Bndry	boundary	Xarm	cross arm	ESS	environmental sensor station		
Brkwy	breakaway	Xbuck	cross buck	Eq	equal		
Br	bridge	Xsec	cross sections	Evgr	evergreen		
Bldg	building	Xing	crossing	Exc	excavation		
Bus.	business	Xrd	crossroad	Exst	existing		
BV	butterfly valve	Crn	crown	Exp	expansion		
Byp	bypass			Expy	Expressway		
				E	external of curve		
				Extru	extruded		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



NDDOT ABBREVIATIONS

Galv	galvanized	Ln	lane	Obsc	obscure(d)	Qty	quantity
Gar	garage	Lg	large	Ocpd	occupied	Qtr	quarter
Gs L	gas line	Lat	latitude	Ocpy	occupy		
G Reg	gas line regulator	Lt	left	O/s	offset		
GMV	gas main valve	Lens	lenses	OC	on center	Rad or R	radius
G Mtr	gas meter	Lvl	level	C	one dimensional consolidation	RR	railroad
GSV	gas service valve	LvIng	leveling	OC	organic content	Rlwy	railway
GVP	gas vent pipe	Lht	light	Orig	original	Rsd	raised
GV	gate valve	LP	light pole	O To O	out to out	RC	rapid curing
Ga	gauge	Ltg	lighting	OD	outside diameter	Rec	record
Gov	government	Liq	liquid	OH	overhead	Rcy	recycle
Grd	graded/grade	LL	liquid limit			RAP	recycled asphalt pavement
Grnd	ground	Loc	location			RPCC	recycled portland cement concrete
GWM	ground water monitor	Long.	longitude	PMT	pad mounted transformer	Ref	reference
Gdrl	guardrail	Lp	loop	Pg	pages	R Mkr	reference marker
Gtr	gutter	LD	loop detector	Pntd	painted	RM	reference monument
		Lum	luminaire	Pr	pair	RP	reference point
				Pnl	panel	Refl	reflectorized
H Plg	H piling			Pk	park	RCB	reinforced concrete box
Hdwl	headwall	Mb	mailbox	PSD	passing sight distance	RCES	reinforced concrete end section
Ht	height	ML	main line	Pvmt	pavement	RCFES	reinforced concrete flared end section
Hel	helical	MH	manhole	Ped	pedestal	RCP	reinforced concrete pipe
HDPE	high density polyethylene	Mkd	marked	Ped	pedestrian	RCPS	reinforced concrete pipe sewer
HM	high mast	Mkr	marker	PPP	pedestrian pushbutton post	RCTES	reinforced concrete traversable end section
HP	high pressure	Mkg	marking	Pen.	penetration	Reinf	reinforcement
HPS	high pressure sodium	MA	mast arm	Perf	perforated	Res	reservation
HTCG	high tension cable guardrail	Matl	material	Per.	perimeter	Res	residence
Hwy	highway	Max	maximum	Perm	permanent	Ret	retaining
Hor	horizontal			PL	pipeline	Rev	reverse
HBP	hot bituminous pavement	Meas	measure	PI	place	Rt	right
HMA	hot mix asphalt	Mdn	median	P&P	plan & profile	R/W	right of way
Hyd	hydrant	MD	median drain	PL	plastic limit	Riv	river
Ph	hydrogen ion content	MC	medium curing	PI or \overline{P}	plate	Rd	road
		MGS	Midwest Guardrail System	Pt	point	Rdbd	road bed
		MM	mile marker	PE	polyethylene	Rdwy	roadway
Id	identification	MP	mile post	PVC	polyvinyl chloride	RWIS	roadway weather information system
Incl	inclinometer tube	Min	minimum	PCC	Portland Cement concrete	Rk	rock
IMH	inlet manhole	Misc	miscellaneous	PP	power pole	Rt	route
ID	inside diameter	Mon	monument	Preempt	preemption		
Inst	instrument	Mnd	mound	Prefab	prefabricated		
Intchg	interchange	Mtbl	mountable	Prfmd or Pref	preformed		
Intmdt	intermediate	Mtd	mounted	Prep	preparation		
Intscn	intersection	Mtg	mounting	Press.	pressure		
Inv	invert	Mk	muck	PRV	pressure relief valve		
IP	iron pipe			Prestr	prestressed		
				Pvt	private		
				PD	private drive		
Jt	joint			Prod.	production/produce		
Jct	junction	Neop	neoprene	Prog	programmed		
		Ntwk	network	Prop.	property		
		N	North	Ppsd	proposed		
		NE	Northeast	PB	pull box		
		NW	Northwest				
		NB	Northbound				
		No. or #	number				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
05-15-22	General Revisions
04-14-25	General Revisions



NDDOT ABBREVIATIONS

D-101-3

Salv	salvage(d)	Tel	telephone
San	sanitary sewer line	Tel B	Telephone Booth
Sec	section	Tel P	telephone pole
SL	section line	Tv	television
Sep	separation	Temp	temperature
Seq	sequence	Temp	temporary
Serv	service	TBM	temporary bench mark
Sht	sheet	T	thinwall tube sample
Shtng	sheeting	Ts	topsoil
Shldr	shoulder	Traf	traffic
Sw or Sdwk	sidewalk	TSCB	traffic signal control box
SD	sight distance	Tr	trail
SN	sign number	Transf	transformer
Sig	signal	Trans	transition
Sgl	single	TT	transmission tower
SRCP	slotted reinforced concrete pipe	TES	traversable end section
SC	slow curing	Trans	transverse
SS	slow setting	Trtd	treated
Sm	small	Trmt	treatment
S	South	Qc	triaxial compression
SE	Southeast	TERO	tribal employment rights ordinance
SW	Southwest	Tpl	triple
SB	Southbound	Typ	typical
Sp	spaces		
Spcl	special	Qu	unconfined compressive strength
SA	special assembly	Ugrnd	underground
SP	special provisions	Util	utility
G	specific gravity		
Spk	spike		
SB	split barrel sample	VG	valley gutter
SH	sprinkler head	Vap	vapor
SV	sprinkler valve	Vert	vertical
Sq	square	VCP	vitrified clay pipe
Stk	stake	Vol	volume
Std	standard	VSFS	vehicle speed feedback sign
N	standard penetration test		
Std Specs	standard specifications	Wkwy	walkway
Stm L	steam line	W	water content
SEC	steel encased concrete	WGV	water gate valve
SMA	stone matrix asphalt	WL	water line
SSD	stopping sight distance	WM	water main
SD	storm drain	WMV	water main valve
St	street	W Mtr	water meter
SPP	structural plate pipe	WSV	water service valve
SPPA	structural plate pipe arch	WW	water well
Str	structure	Wrng	wearing
Subd	subdivision	WIM	weigh in motion
Sub	subgrade	W	west
Sub Prep	subgrade preperation	WB	westbound
Ss	subsoil	Wrng	wiring
SS	supplement specification	W/	with
Supp	supplemental	W/o	without
Surf	surfacing		
Surv	survey		
Sym	symmetrical		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



NDDOT ABBREVIATIONS

D-101-4

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in.	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International

T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CC	closing corner
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
MC	meander corner
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
SC	standard corner
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WC	witness corner
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added - Continued from D-101-3 General Revisions
4-14-25	



NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM
ACCENT
AGASSIZ WU
AGC
ALL PL
ALL SEAS WU
AMOCO PI
AMRDA HESS
AT&T
B PAW
BAKER ELEC
BASIN ELEC
BEK TEL
BELLE PL
BLM
BNSF
BOEING
BRNS RWD
BURK-DIV ELEC
BURL WRD
CABLE ONE
CABLE SERV
CAP ELEC
CASS CO ELEC
CASS RWU
CAV ELEC
CBLCOM
CENEX PL
CENT PL WATER DIST
CENT PWR ELEC
CENTURYLINK
COE
CONS COMM
CONS TELCOM
CONT RES
CPR
D O E
DAK CARR
DAK CENT TEL
DAK RWD
DGC
DICKY R NET
DICKY WRD
DICKY TEL
DNRR
DOME PL
DVELEC
DVMW
E CENT REG WD
ENBRDG
ENVENTIS
EQUINOR
FALK MNG
FHWA
G FKS-TRL WD
GETTY TRD & TRAN
GLDN W ELEC

702 Communications
Accent Communications
Agassiz Water Users District
Associated General Contractors of America
Alliance Pipeline
All Seasons Water Users District
Amoco Pipeline Company
Amerada Hess Corporation
AT&T Corporation
Bear Paw Energy Incorporated
Baker Electric
Basin Electric Cooperative Incorporated
Bek Communications Cooperative
Belle Fourche Pipeline Company
Bureau of Land Management
Burlington Northern Santa Fe Railway
Boeing
Barnes Rural Water District
Burke-Divide Electric Cooperative
Burleigh County Water Resource District
Cable One
Cable Services
Capital Electric Cooperative Incorporated
Cass County Electric Cooperative
Cass Rural Water Users District
Cavalier Rural Electric Cooperative
Cablecom Of Fargo
Cenex Pipeline
Central Pipe Line Water District
Central Power Electric Cooperative
CenturyLink
Corps of Engineers
Consolidated Communications
Consolidated Telcom
Continental Resource Inc
Canadian Pacific Railway
Department Of Energy
Dakota Carrier Network
Dakota Central Telephone
Dakota Rural Water District
Dakota Gasification Company
Dickey Rural Networks
Dickey County Water Resource District
Dickey Telephone
Dakota Northern Railroad
Dome Pipeline Company
Dakota Valley Electric Cooperative
Dakota, Missouri Valley & Western
East Central Water District
Enbridge Pipelines Incorporated
Enventis Telephone
Equinor Pipeline
Falkirk Mining Company
Federal Highway Administration
Grand Forks-traill Water District
Getty Trading & Transportation
Golden West Electric Cooperative

GTR RAMSEY WD
GT PLNS NAT GAS
HALS TEL
IDEA1
INT-COMM TEL
KANEB PL
KEM ELEC
KOCH GATH SYS
LKHD PL
LWR YELL R ELEC
LUMEN
MCKNZ CON
MCKNZ ELEC
MCKNZ WRD
MCLEOD
MCLN ELEC
MCLN-SHRDN R WAT
MDU
MIDCO
MIDSTATE TEL
MINOT CABLE
MINOT TEL
MISS VALL COMM
MISS W W S
MNKOTA PWR
MOR-GRAN-SOU ELEC
MOUNT-WILLI ELEC
MLGC
MUNICIPAL
MUNICIPAL
N CENT ELEC
N PRAIR REG WD
ND PKS & REC
ND TEL
NDDOT
NE REG WD
NDSU SOIL SCI DEPT
NEMONT TEL
NODAK R ELEC
NOON FRMS TEL
NPR
NSP
NTHN BRDR PL
NTHN PLNS ELEC
NTHWSTRN REF
NW COMM
NWRWD
ONEOK
OSHA
OTTR TL PWR
PAAP
P L E M
POLAR COM
PVT ELEC
QWEST
R&T REG WD

Greater Ramsey Water District
Great Plains Natural Gas Company
Halstad Telephone Company
Idea1
Inter-Community Telephone Company
Kaneb Pipeline Company
Kem Electric Cooperative Incorporated
Koch Gathering Systems Incorporated
Lakehead Pipeline Company
Lower Yellowstone Rural Electric
Lumen Technologies Incorporated
McKenzie Consolidated Telcom
McKenzie Electric Cooperative
McKenzie County Water Resource District
McLeod USA
McLean Electric Cooperative
McLean-Sheridan Rural Water District
Montana-dakota Utilities
MidContinent Communications
Midstate Telephone Company
Minot Cable Television
Minot Telephone Company
Missouri Valley Communications Incorporated
Missouri West Water System
Minnkota Power
Mor-gran-sou Electric Cooperative
Mountrail-williams Electric Cooperative
Moore & Liberty - Griggs County
City Water And Sewer
City Of '.....'
North Central Electric Cooperative
North Prairie Regional Water District
North Dakota Parks And Recreation
North Dakota Telephone Company
North Dakota Department of Transportation
Northeast Regional Water District
NDSU Soil Science Department
Nemont Telephone
Nodak Rural Electric Cooperative
Noonan Farmers Telephone Company
Northern Plains Railroad
Northern States Power
Northern Border Pipeline
Northern Plains Electric Cooperative Incorporated
Northwestern Refinery Company
Northwest Communication Cooperation
Northwest Rural Water District
Oneok gas
Occupational Safety and Health Administration
Otter Tail Power Company
Plains All American Pipeline
Praieliands Energy Marketing
Polar Communications
Private Electric
Qwest Communications
R & T Water District

RED RIV COMM
RESVTN TEL
ROBRTS TEL
R-RIDER ELEC
RRVW
S CENT REG WD
SE W U
SCOTT CABLE
SHERDN ELEC
SHEYN VLY ELEC
SKYTECH
SLOPE ELEC
SOURIS RIV TELCOM
ST WAT COMM
STATE LN WATER
STER ENG
STUT RWD
SW PL PRJ
SWWA
SUNOCO
T M C
TCI
TESORO GHG PLNS PL
TRI-CNTY WU
TRL CO WRD
UNTD TEL
UPPR SOUR WD
US SPRINT
USAF MSL CABLE
USFWS
USW COMM
VRNDRY ELEC
W RIV TEL
WAPA
WAWSA
WEB
WILLI WRD
WILSTN BAS PL
WLSH RWD
WOLVRTN TEL
XLENER
YSVR

Red River Communications
Reservation Telephone
Roberts Company Telephone
Roughrider Electric Cooperative
Red River Valley & Western Railroad
South Central Regional Water District
Southeast Water Users Incorporated
Scott Cable Television Dickinson
Sheridan Electric Cooperative
Sheyenne Valley Electric Cooperative
Skyland Technologies Incorporated
Slope Electric Cooperative Incorporated
Souris River Telecommunications
State Water Commission
State Line Water Cooperative
Sterling Energy
Stutsman Rural Water District
Southwest Pipeline Project
Southwest Water Authority
Sunoco LP
Turtle Mountain Communications
TCI of North Dakota
Tesoro High Plains Pipeline
Tri-County Water Users Incorporated
Traill County Water Resource District
United Telephone
Upper Souris Water District
U.S. Sprint
U.S.A.F. Missile Cable
US Fish and Wildlife Service
U.S. West Communications
Verendrye Electric Cooperative
West River Telephone Incorporated
Western Area Power Administration
Western Area Water Supply Authority
W. E. B. Water Development Association
Williams County Water Resource District
Williston Basin Interstate Pipeline Company
Walsh Water Rural Water District
Wolverton Telephone
Xcel Energy
Yellowstone Valley Railroad
























NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

















LINE STYLES









D-101-20

Existing Topography























	Existing Ground Void
	Existing Cemetary Boundary
	Existing Box Culvert Bridge
	Existing Concrete Surface
	Existing Drainage Structure
	Existing Gravel Surface
	Existing Riprap
	Existing Dirt Surface
	Existing Asphalt Surface
	Existing Tie Point Line
	Existing Railroad Centerline
	Existing Guardrail Cable
	Existing Guardrail Metal
	Existing Edge of Water
	Existing Fence
	Existing Railroad
	Existing Field Line
	Exst Flow
	Existing Curb
	Existing Valley Gutter
	Existing Driveway Gutter
	Existing Curb and Gutter
	Existing Mountable Curb and Gutter

	Existing 3-Cable w Posts
	Site Boundary
	Existing Berm, Dike, Pit, or Earth Dam
	Existing Ditch Block
	Existing Tree Boundary
	Existing Brush or Shrub Boundary
	Existing Retaining Wall
	Existing Planter or Wall
	Existing W-Beam Guardrail with Posts
	Existing Railroad Switch
	Gravel Pit - Borrow Area
	Existing Wet Area-Vegetation Break
	Existing High Tension Cable Guardrail
	Existing High Tension Cable Guardrail with Posts





Proposed Topography

	3-Cable w Posts
	Flow
	Fence
	Remove Line
	Wall
	Retaining Wall (Plan View)
	W-Beam w Posts
	High Tension Cable Guardrail with Posts










Existing Utilities

	Existing Electrical
	Existing Fiber Optic Line
	Existing TV Fiber Optic
	Existing Gas Pipe
	Existing Overhead Utility Line
	Existing Power
	Existing Fuel Pipeline
	Existing Undefined Above Ground Pipe Line
	Existing Sanitary Sewer
	Existing Sanitary Force Main
	Existing Storm Drain
	Existing Storm Drain Force Main
	Existing Culvert
	Existing Telephone Line
	Existing TV Line
	Existing Water or Steam Line
	Existing Under Drain
	Existing Slotted Drain
	Existing Conduit
	Existing Conductor
	Existing Down Guy Wire Down Guy
	Existing Underground Vault or Lift Station




Proposed Utilities


	24 Inch Pipe
	Reinforced Concrete Pipe
	Under Drain
	Edge Drain

Traffic Utilities

	Conductor
	Fiber Optic
	Existing Loop Detector
	Existing Double Micro Loop Detector
	Micro Loop Detector Double
	Existing Micro Loop Detector
	Micro Loop Detector
	Signal Head with Mast Arm
	Existing Signal Head with Mast Arm

Sign Structures














	Existing Overhead Sign Structure
	Existing Overhead Sign Structure Cantilever
	Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION			
07-01-14 REVISIONS			
DATE	CHANGE		
09-23-16 12-18-20	Added and Revised Items, Organized by Functional Groups General Revisions		
			12 18 2020










LINE STYLES

D-101-21









Right Of Way

	Easement
	Existing Easement
	Right of Way
	Existing Right of Way
	Existing Right of Way Railroad
	Existing Right of Way Not State Owned
	Existing Government Lot Line
	Existing Adjacent Block Lines
	Existing Adjacent Lot Lines
	Existing Adjacent Property Line
	Existing Adjacent Subdivision Lines
	Sight Distance Triangle Line
	Dimension Leader







Boundary Control



	Existing City Corporate Limits or Reservation Boundary
	Existing State or International Line
	Existing Township
	Existing County
	Existing Section Line
	Existing Quarter Section Line
	Existing Sixteenth Section Line
	Existing Centerline
	Tangent Line

Cross Sections and Typicals



	Existing Ground
	Existing Topsoil (Cross Section View)
	Existing Ground Void (Not Surveyed)
	Existing Concrete
	Existing Aggregate (Cross Section View)
	Existing Curb and Gutter (Cross Section View)
	Existing Asphalt (Cross Section View)
	Existing Reinforcement Rebar

Geotechnical



	Geotextile Fabric Type D
	Geogrid
	Geotextile Fabric Type R
	Geotextile Fabric Type R1
	Geotextile Fabric Type RR
	Geotextile Fabric Type S

	Subgrade Reinforcement
	Failure Line







Countours

	Depression Contours
	Supplemental Contour





Profile

	Subgrade, Subcut or Ditch Grade
	Topsoil Profile










Striping

	Centerline Pavement Marking
	Barrier with Centerline Pavement Marking
	Barrier Pavement Marking
	Stripe 4 IN Dotted Extension White
	Stripe 8 IN Dotted Extension White
	Stripe 8 IN Lane Drop








Pavement Joints

	Doweled Joint
	Tie Bar 30 Inch 4 Foot Center to Center
	Tie Bar 18 Inch 3 Foot Center to Center
	Tie Bar at Random Spacing






Bridge Details

	Small Hidden Object
	Large Hidden Object
	Phantom Object
	Existing Conditions Object
	Centerline Main
	Centerline Secondary
	Excavation Limits
	Proposed Ground
	Sheet Piling

Erosion Control

	Limits of Const Transition Line
	Bale Check
	Rock Check
	Floating Silt Curtain
	Silt Fence
	Excavation Limits
	Fiber Rolls

Environmental

	Wetland Mitigation
	Existing Wetland Easement USFWS
	Existing Wetland Jurisdictional
	Existing Wetland
	Tree Row

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION


07-01-14

REVISIONS

DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups General Revisions
12-18-20	

KIRK J. HOFF

REGISTERED



PROFESSIONAL
PE-4683

ENGINEER
NORTH DAKOTA

12 18 2020


SYMBOLS

D-101-30


 North Arrow (Half Scale)


 Alignment Data Point

 Alignment Monument

 Spot Elevation

 Existing Miscellaneous Spot

 Existing Access Control Arrow

 Existing Benchmark

 Reset USGS Marker

 Iron Monument Found





 Iron Pin R/W Monument

 Property Corner




 Iron Pin Reference Monument


   Right of Way Marker (Exst, Ppsd, Reset)

 Existing Federal Reference Corner


    Existing Section Corner (Full, Quarter, Sixteenth, Meander)


 Existing Witness Corner


   Existing Control Point (CP, GPS-RTK, TRI)


 Existing Traverse PI Aerial Panel


 Existing Reference Marker Point NGS

 Existing EFB Misc

 Existing Bush or Shrub


 Existing Large Evergreen Tree

 Existing Small Evergreen Tree


 Existing Large Tree

 Existing Small Tree

 Existing Tree Trunk

 Cairn or Stone Circle


 Existing Artifact

 Existing Satellite Dish

 Existing Weather Station

 Existing Windmill or Tower


 Reinforced Pavement


 Continuous Split Barrel Sample


 Flight Auger Sample

 Split Barrel Sample

 Thinwall Tube Sample

 Standard Penetration Test

 Inclinometer Tube

 Excavation Unit

 Existing Ground Water Well Bore Hole

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683
























ENGINEER

NORTH DAKOTA


12 18 2020

SYMBOLS

D-101-31

	Flexible Delineator		Highway Sign (Exst, Ppsd)
	Flexible Delineator Type A (Exst, Ppsd)		Mile Post Type A (Exst-Ppsd-Reset)
	Flexible Delineator Type B (Exst, Ppsd)		Mile Post Type B (Exst, Ppsd)
	Flexible Delineator Type C (Exst, Ppsd)		Mile Post Type C (Exst, Ppsd)
	Flexible Delineator Type D (Exst, Ppsd)		Object Marker Type I (Exst, Ppsd)
	Flexible Delineator Type E (Exst, Ppsd)		Object Marker Type II (Exst, Ppsd)
	Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)		Object Marker Type III (Exst, Ppsd)
	Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)		Existing Reference Marker
	Delineator Type C (Exst, Ppsd, Diamond Grade)		Road Closure Gate 18 Ft (Exst, Ppsd)
	Delineator Type D (Exst, Ppsd, Diamond Grade)		Road Closure Gate 28 Ft (Exst, Ppsd)
	Delineator Type E (Exst, Ppsd, Diamond Grade)		Road Closure Gate 40 Ft (Exst, Ppsd)
	Barricade (Type I, Type II, Type III)		Existing Railroad Battery Box
	Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)		Existing RR Profile Spot
	Attenuation Device		Existing Railroad Crossbuck
	Truck Mounted Attenuator		Existing Railroad Frog
	Delineator Drums		Existing Mailbox (Private, Federal)
	Flagger		
	Tubular Marker		
	Traffic Cone		
	Back to Back Vertical Panel Sign		

















































































NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions




12 18 2020

SYMBOLS


D-101-32

	Existing Luminaire			High Mast Light Standard 3 Luminaire (Exst, Ppsd)		Existing Traffic Signal Standard			
	Luminaire LED			High Mast Light Standard 4 Luminaire (Exst, Ppsd)				Pull Box (Exst-Ppsd-Undefined)	
	Existing Light Standard Luminaire			High Mast Light Standard 5 Luminaire (Exst, Ppsd)				Intelligent Transportation Pull Box (Exst, Ppsd)	
	Relocate Light Standard			High Mast Light Standard 6 Luminaire (Exst, Ppsd)				Transformer (Exst, Ppsd)	
	Light Standard Light LED Luminaire			High Mast Light Standard 7 Luminaire (Exst, Ppsd)				Power Pole (Exst-Ppsd-with Transformer)	
	Light Standard 35 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 8 Luminaire (Exst, Ppsd)				Wood Pole (Exst, Ppsd)	
	Light Standard 50 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 9 Luminaire (Exst, Ppsd)				Pedestrian Push Button Post (Exst, Ppsd)	
	Light Standard 70 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 10 Luminaire (Exst, Ppsd)				Existing Pole	
	Light Standard 100 Watt High Pressure Sodium Vapor Luminaire			Overhead Sign Structure Load Center (Exst, Ppsd)				Existing Telephone Pole	
	Light Standard 150 Watt High Pressure Sodium Vapor Luminaire			Traffic Signal Controller (Exst, Ppsd)				Existing Post	
	Light Standard 200 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Traffic Signal Controller (Exst, Ppsd)					Connection Conductor (Ground, Neutral, Phase 1, Phase 2)
	Light Standard 250 Watt High Pressure Sodium Vapor Luminaire			Flashing Beacon (Exst, Ppsd)					
	Light Standard 310 Watt High Pressure Sodium Vapor Luminaire			Concrete Foundation (Exst, Ppsd)					
	Light Standard 400 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Flasher (Exst, Ppsd)					
	Light Standard 700 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Feed Point (Exst, Ppsd)					
	Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Feed Point with Pad (Exst, Ppsd)					
	Emergency Vehicle Detector			Pole Mounted Feed Point (Exst, Ppsd)					
	Video Detection Camera			Junction Box (Exst, Ppsd)					
				Existing Pedestrian Head with Number					
				Existing Signal Head					
				Pole Mounted Head					
				Existing Lighting Standard Pole					

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14 REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



12 18 2020

SYMBOLS

D-101-33

			Existing Manhole (Electrical, Gas, Telephone)		Cap or Stub Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water
			Water Manhole (Exst, Exst with Valve)		Existing Pedestal Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined
			Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)		Existing Pipe Vent Gas, Fuel, Sanitary, Storm Drain, Water, Undefined
			Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)		Valve Exst Gas, Exst Water, Ppsd Water, Exst Undefined
			Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)		Pump Sanitary, Storm Drain, Exst Water
			Force Main Storm Drain Manhole (Exst, Exst with Valve)		Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)		Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Existing Water Appurtenance		Existing Utility Marker
			Sprinkler Head (Exst, Ppsd)		Existing Meter
			Fire Hydrant (Exst, Ppsd)		Existing Fuel Dispensers
			Cleanout (Exst Sanitary, Underdrain)		Existing Fuel Filler Pipes
			Existing Catch Basin Inlet (Round, Square)		Existing Fuel Leak Sensors
			Existing Curb Inlet (Round, Square)		
			Existing Slotted Reinforced Concrete Pipe		
			Catch Basin (Riser 30 Inch, Beehive, Type A)		
			Inlet Mountable Curb (Type A, Type B)		
			Inlet Saddle Base (Type 1, Type 2)		
			Inlet Special (Catch Basin, Type 1, Type A)		
			Inlet (Tee, Type 1, Type 2, Type 2 Double)		
			Median Drain		
			Headwall (Exst, Ppsd, Ppsd Single with Vegetation Barrier, Ppsd Double with Vegetation Barrier)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 18 2020

LANE MARKERS
(Spotting Tab for Seal Projects only)


D-704-3

Notes:

1. Install lane line markers as shown, prior to beginning the seal coat.
2. Attach cover to vertical part of marker so traffic does not cause it to detach, but it can be easily removed manually.
3. Remove protective covers immediately after seal coat is applied.
4. Remove markers after permanent pavement marking is installed.
5. Use marker body and cover manufactured from polyurethane material.
6. Marker types:
Type Y - Yellow body and cover with yellow reflective tape on both sides.
Type W - White body and cover with white reflective tape on one side.
7. Use retroreflective tape with a minimum reflectance of 1200 candle power per foot-candle per square foot, using a .1 degree observation angle and 0 degree entrance angle.
8. Use adhesive conforming to AASHTO M 237.

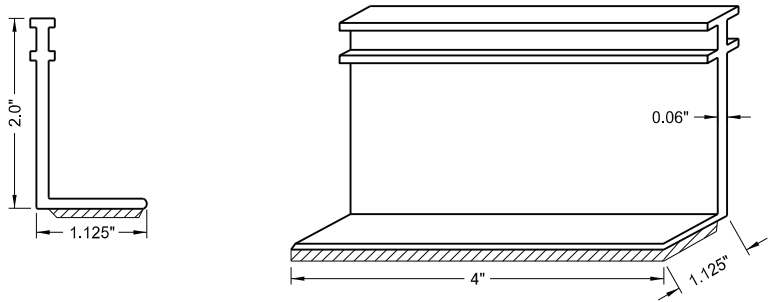

Marker Body

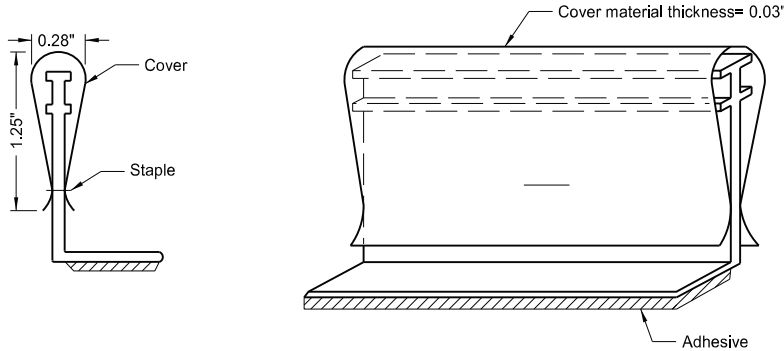


Marker Body with Protective Cover

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature





08/01/24

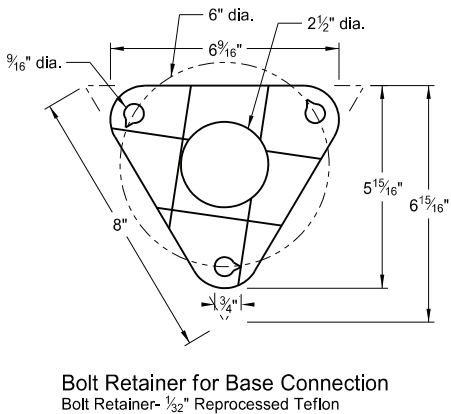


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

U-Channel Post

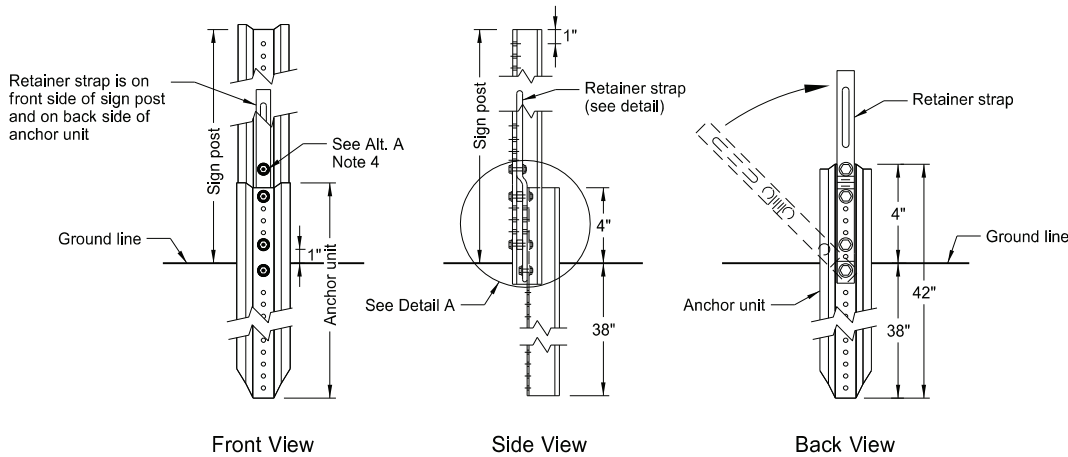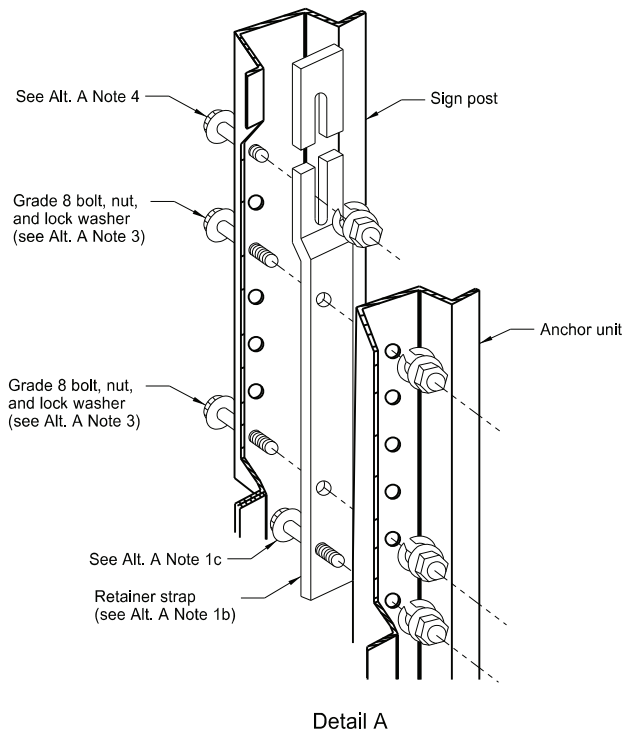


Breakaway U-Channel Detail
Alternate A
Install a maximum of 2 posts within 7'.

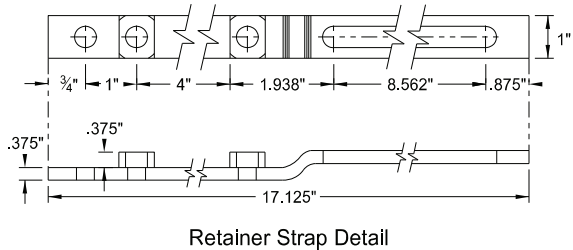


Alternate A Steps of Installation:

- Drive anchor unit to within 12" of ground level.
 - Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
 - Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
 - Rotate strap 90° to left.
- Drive anchor unit to 4" above ground.
 - Rotate strap to vertical position.
- Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
 - Alternately tighten two connector bolts.
- Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
- Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

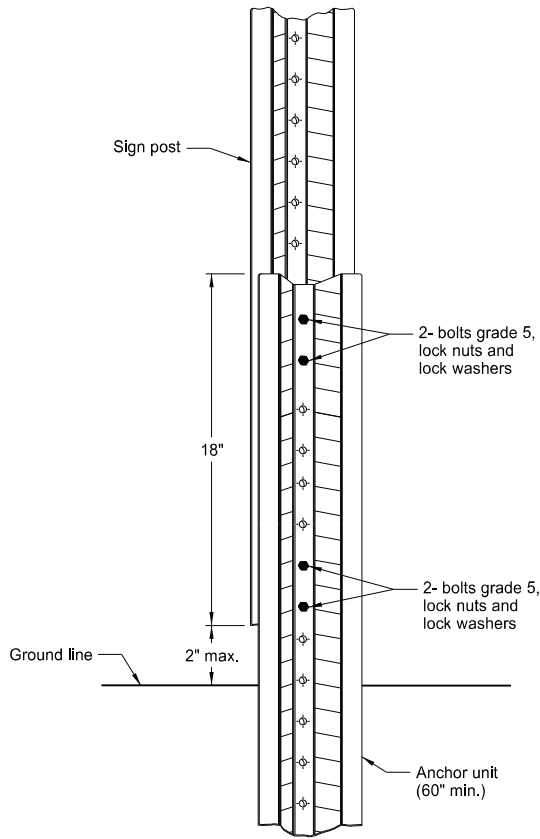

Breakaway U-Channel Splice Detail
Alternate B
(2.5 and 3 lb/ft)
Install a maximum of 3 posts within 7'.

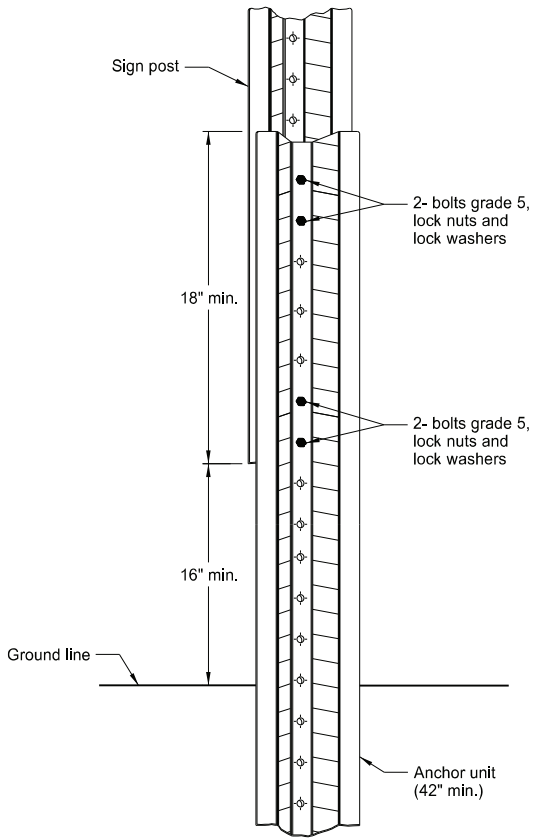

Breakaway U-Channel Splice Detail
Alternate C
(2.5 and 3 lb/ft)
Install a maximum of 3 posts within 7'.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature




08/01/24


CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS



G20-1-60
Legend: black (non-refl)
Background: orange

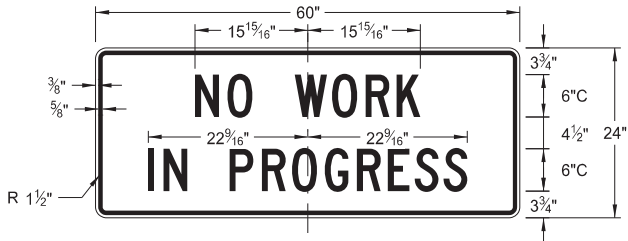


G20-1b-60
Legend: black (non-refl)
Background: orange

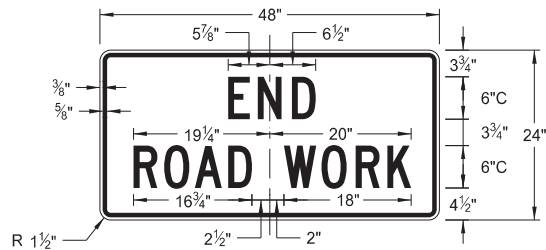


G20-2-48
Legend: black (non-refl)
Background: orange




G20-4b-36
Legend: black (non-refl)
Background: orange

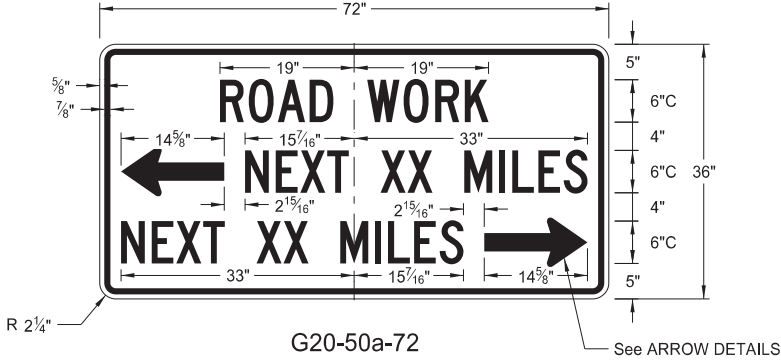


G20-50a-72
Legend: black (non-refl)
Background: orange

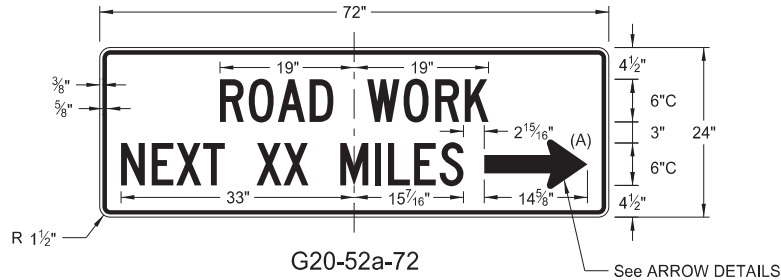

G20-52a-72
Legend: black (non-refl)
Background: orange

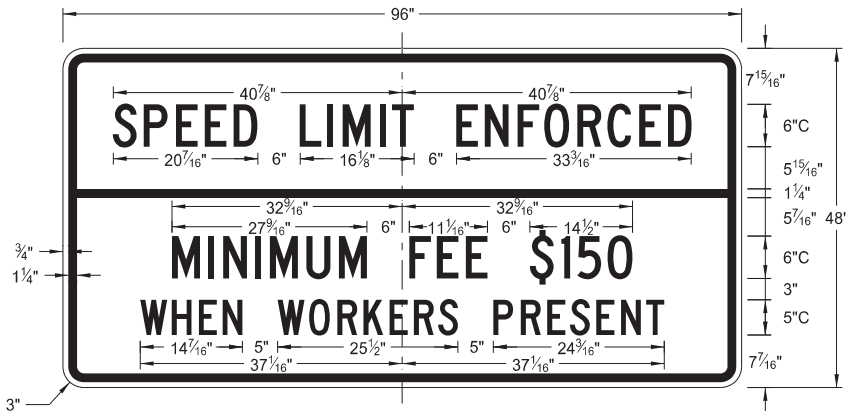


G20-55-96
Legend: black (non-refl)
Background: orange

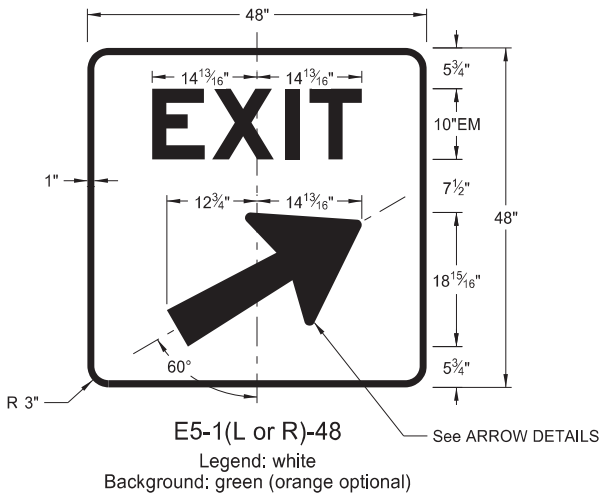


E5-1(L or R)-48

Legend: white
Background: green (orange optional)




M4-8-36

Legend: black (non-refl)
Background: orange

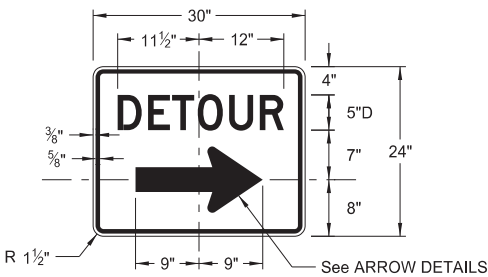


M4-9(L or R)-30 &
M4-9-30


Legend: black (non-refl)
Background: orange

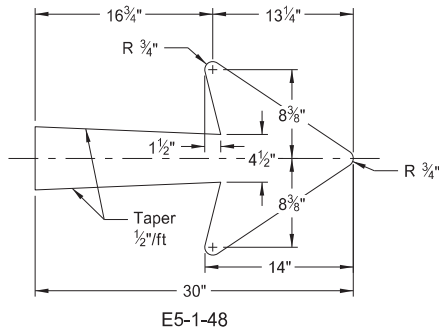


E5-1-48

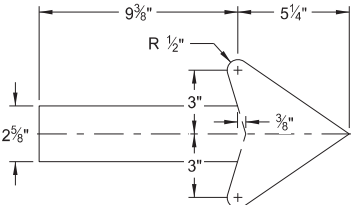


G20-50a-72
G20-52a-72



M4-9(L or R)-30
Right or Left



M4-9(L or R)-30
Advanced Right or Left



M4-9-30
Straight

ARROW DETAILS


NOTES:

(A) Arrow may be right or left of the legend to indicate construction to the right or left.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added sign & background color
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes




CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS

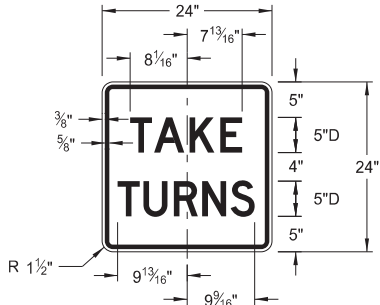


R1-50P-24
Legend: black (non-refl)
Background: white

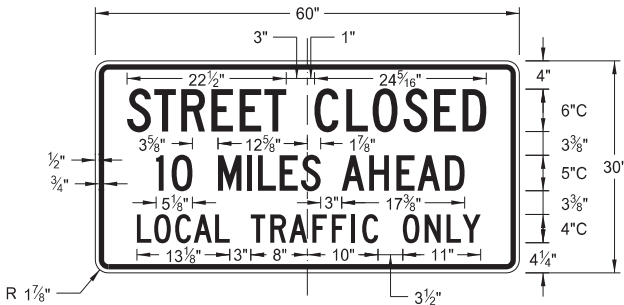


R11-3c-60
Legend: black (non-refl)
Background: white

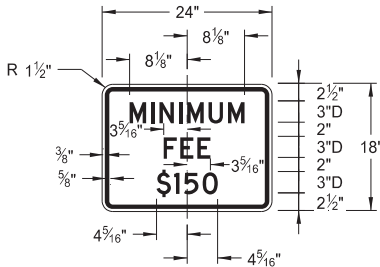

R2-1aP-24
Legend: black (non-refl)
Background: white

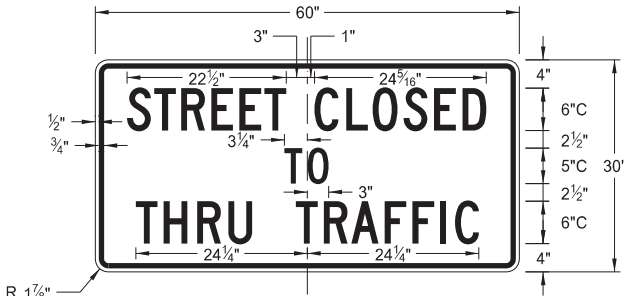

R11-4a-60
Legend: black (non-refl)
Background: white

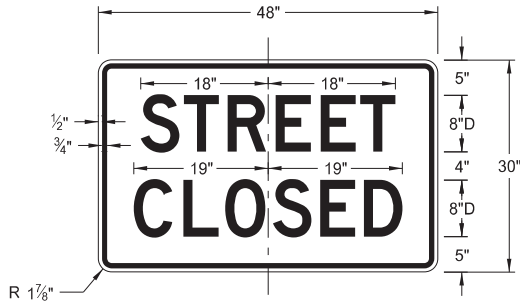

R11-2a-48
Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Revised sign number
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes



CONSTRUCTION SIGN DETAILS
WARNING SIGNS


WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES

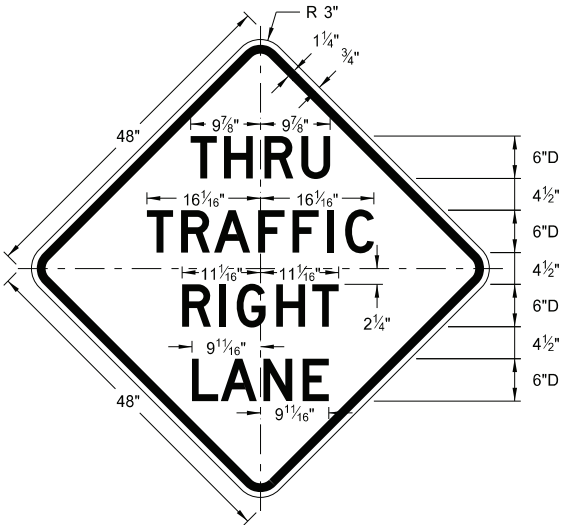


W5-8-48

Legend: black (non-refl)
Background: orange

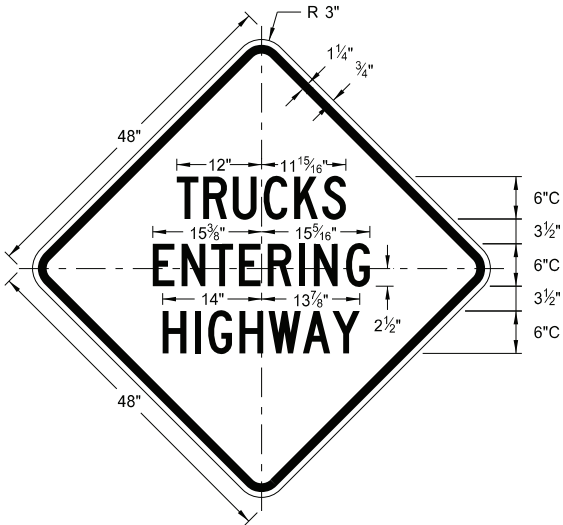


W8-53-48

Legend: black (non-refl)
Background: orange

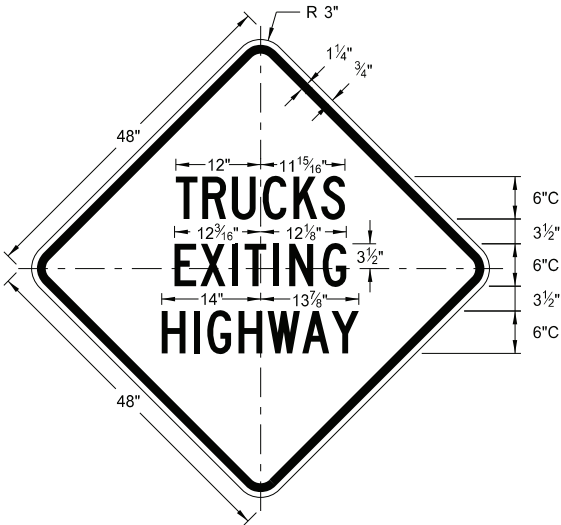


W8-56-48

Legend: black (non-refl)
Background: orange

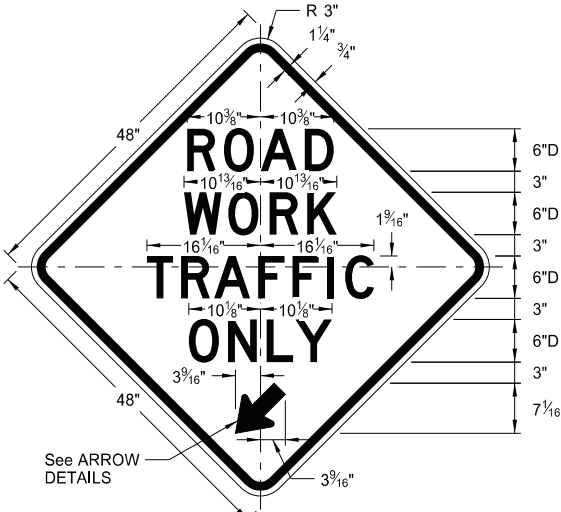


W5-9-48

Legend: black (non-refl)
Background: orange

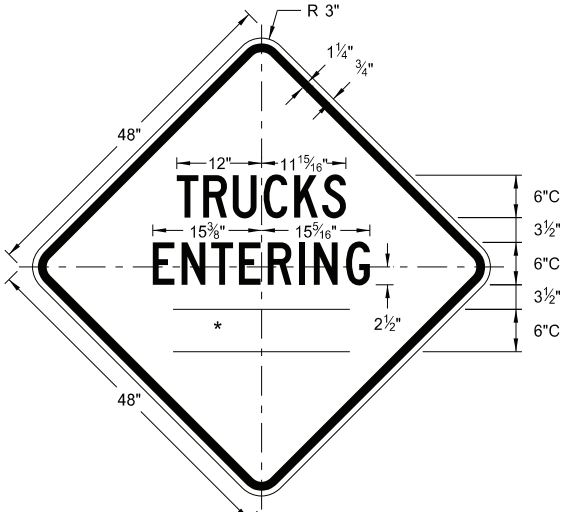


W8-54-48

Legend: black (non-refl)
Background: orange

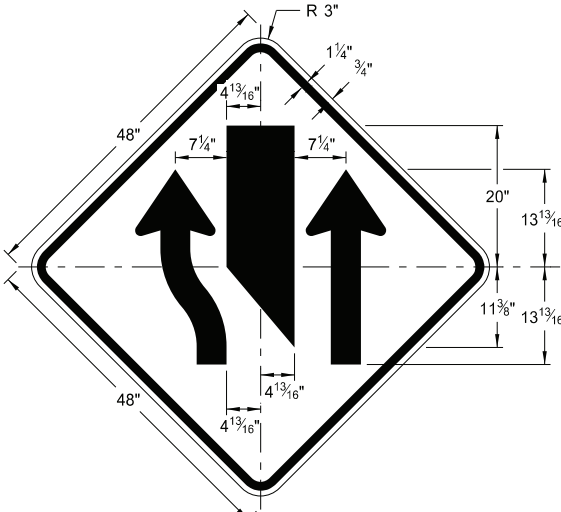


W9-3a-48

Legend: black (non-refl)
Background: orange

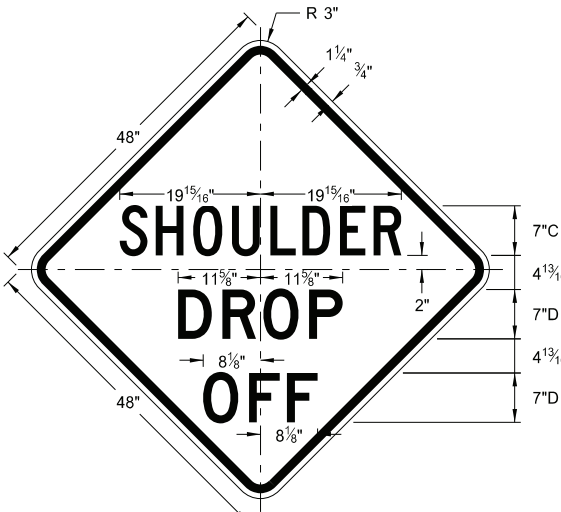


W8-9a-48

Legend: black (non-refl)
Background: orange

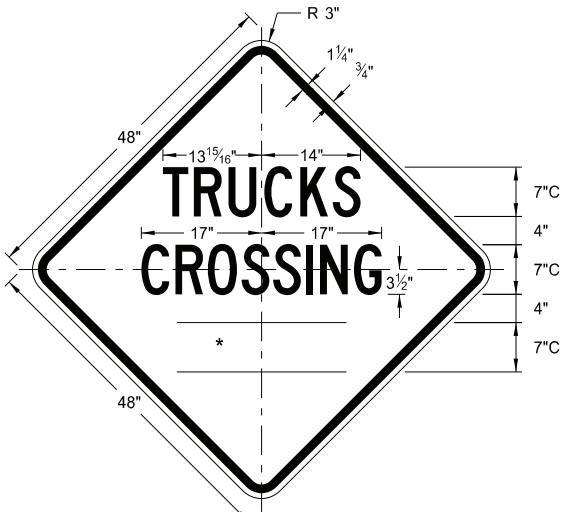


W8-55-48

Legend: black (non-refl)
Background: orange



W5-9-48

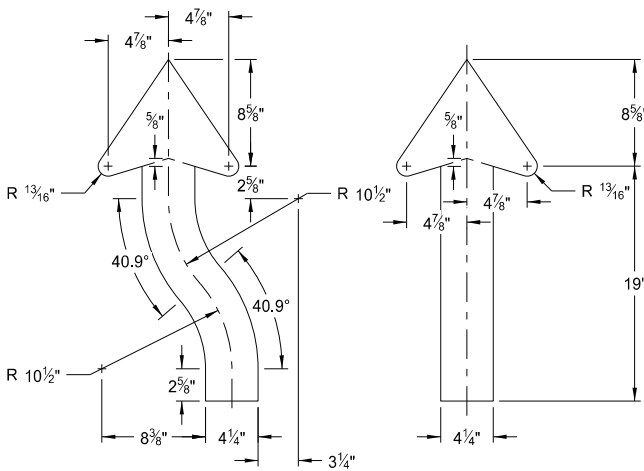

W9-3a-48


ARROW DETAILS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Updated sign number
5-31-18	Revised sign and arrow details
10-03-19	New Design Engineer PE Stamp
8-01-24	Electronic Stamp/Signature




08/01/24


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

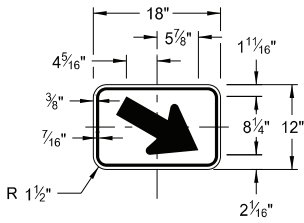

W16-7aP-18
Legend: black (non-refl)
Background: orange

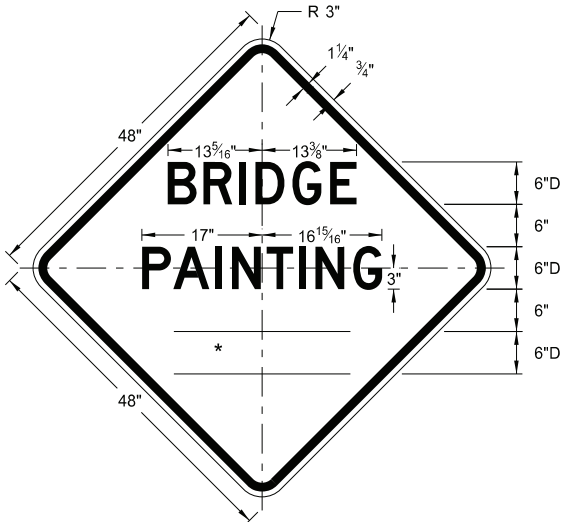


W21-50-48
Legend: black (non-refl)
Background: orange

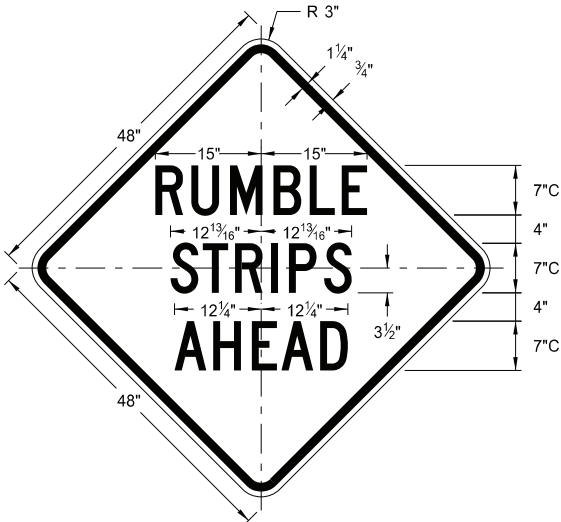


W21-53-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

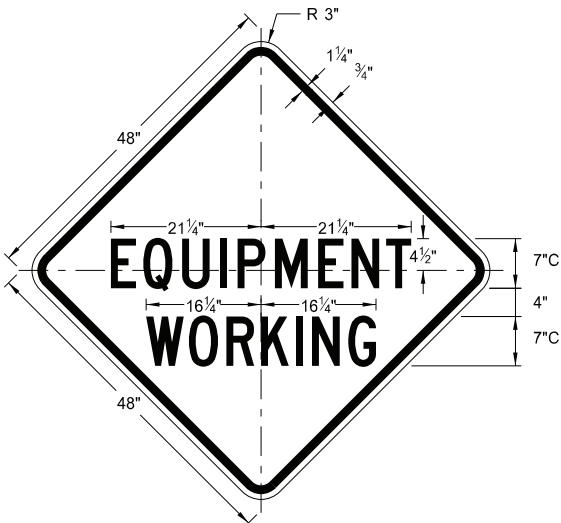


W20-51-48
Legend: black (non-refl)
Background: orange

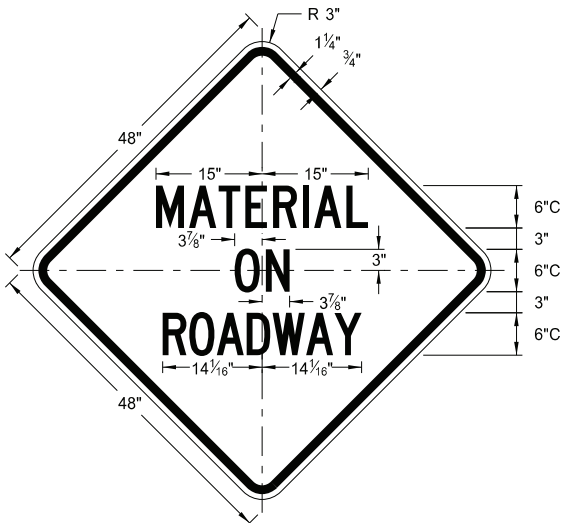


W21-51-48
Legend: black (non-refl)
Background: orange

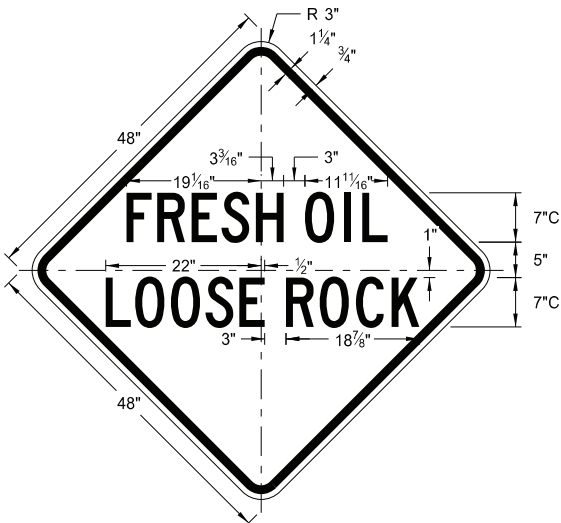


W22-8-48
Legend: black (non-refl)
Background: orange

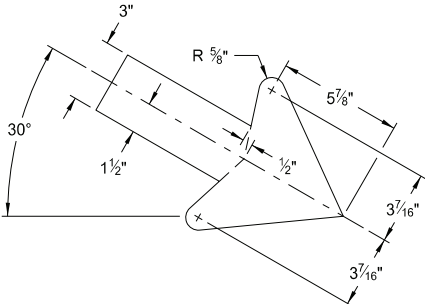

W16-7aP-18

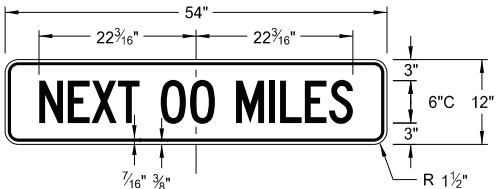

W20-52P-54
Legend: black (non-refl)
Background: orange

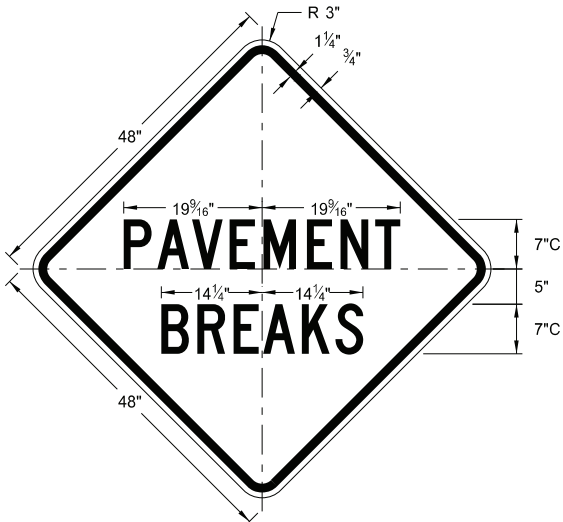

W21-52-48
Legend: black (non-refl)
Background: orange


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
5-31-18	
REVISIONS	
DATE	CHANGE
11-01-19	Added details for sign W16-7aP-18.
8-01-24	Electronic Stamp/Signature.



08/01/24

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

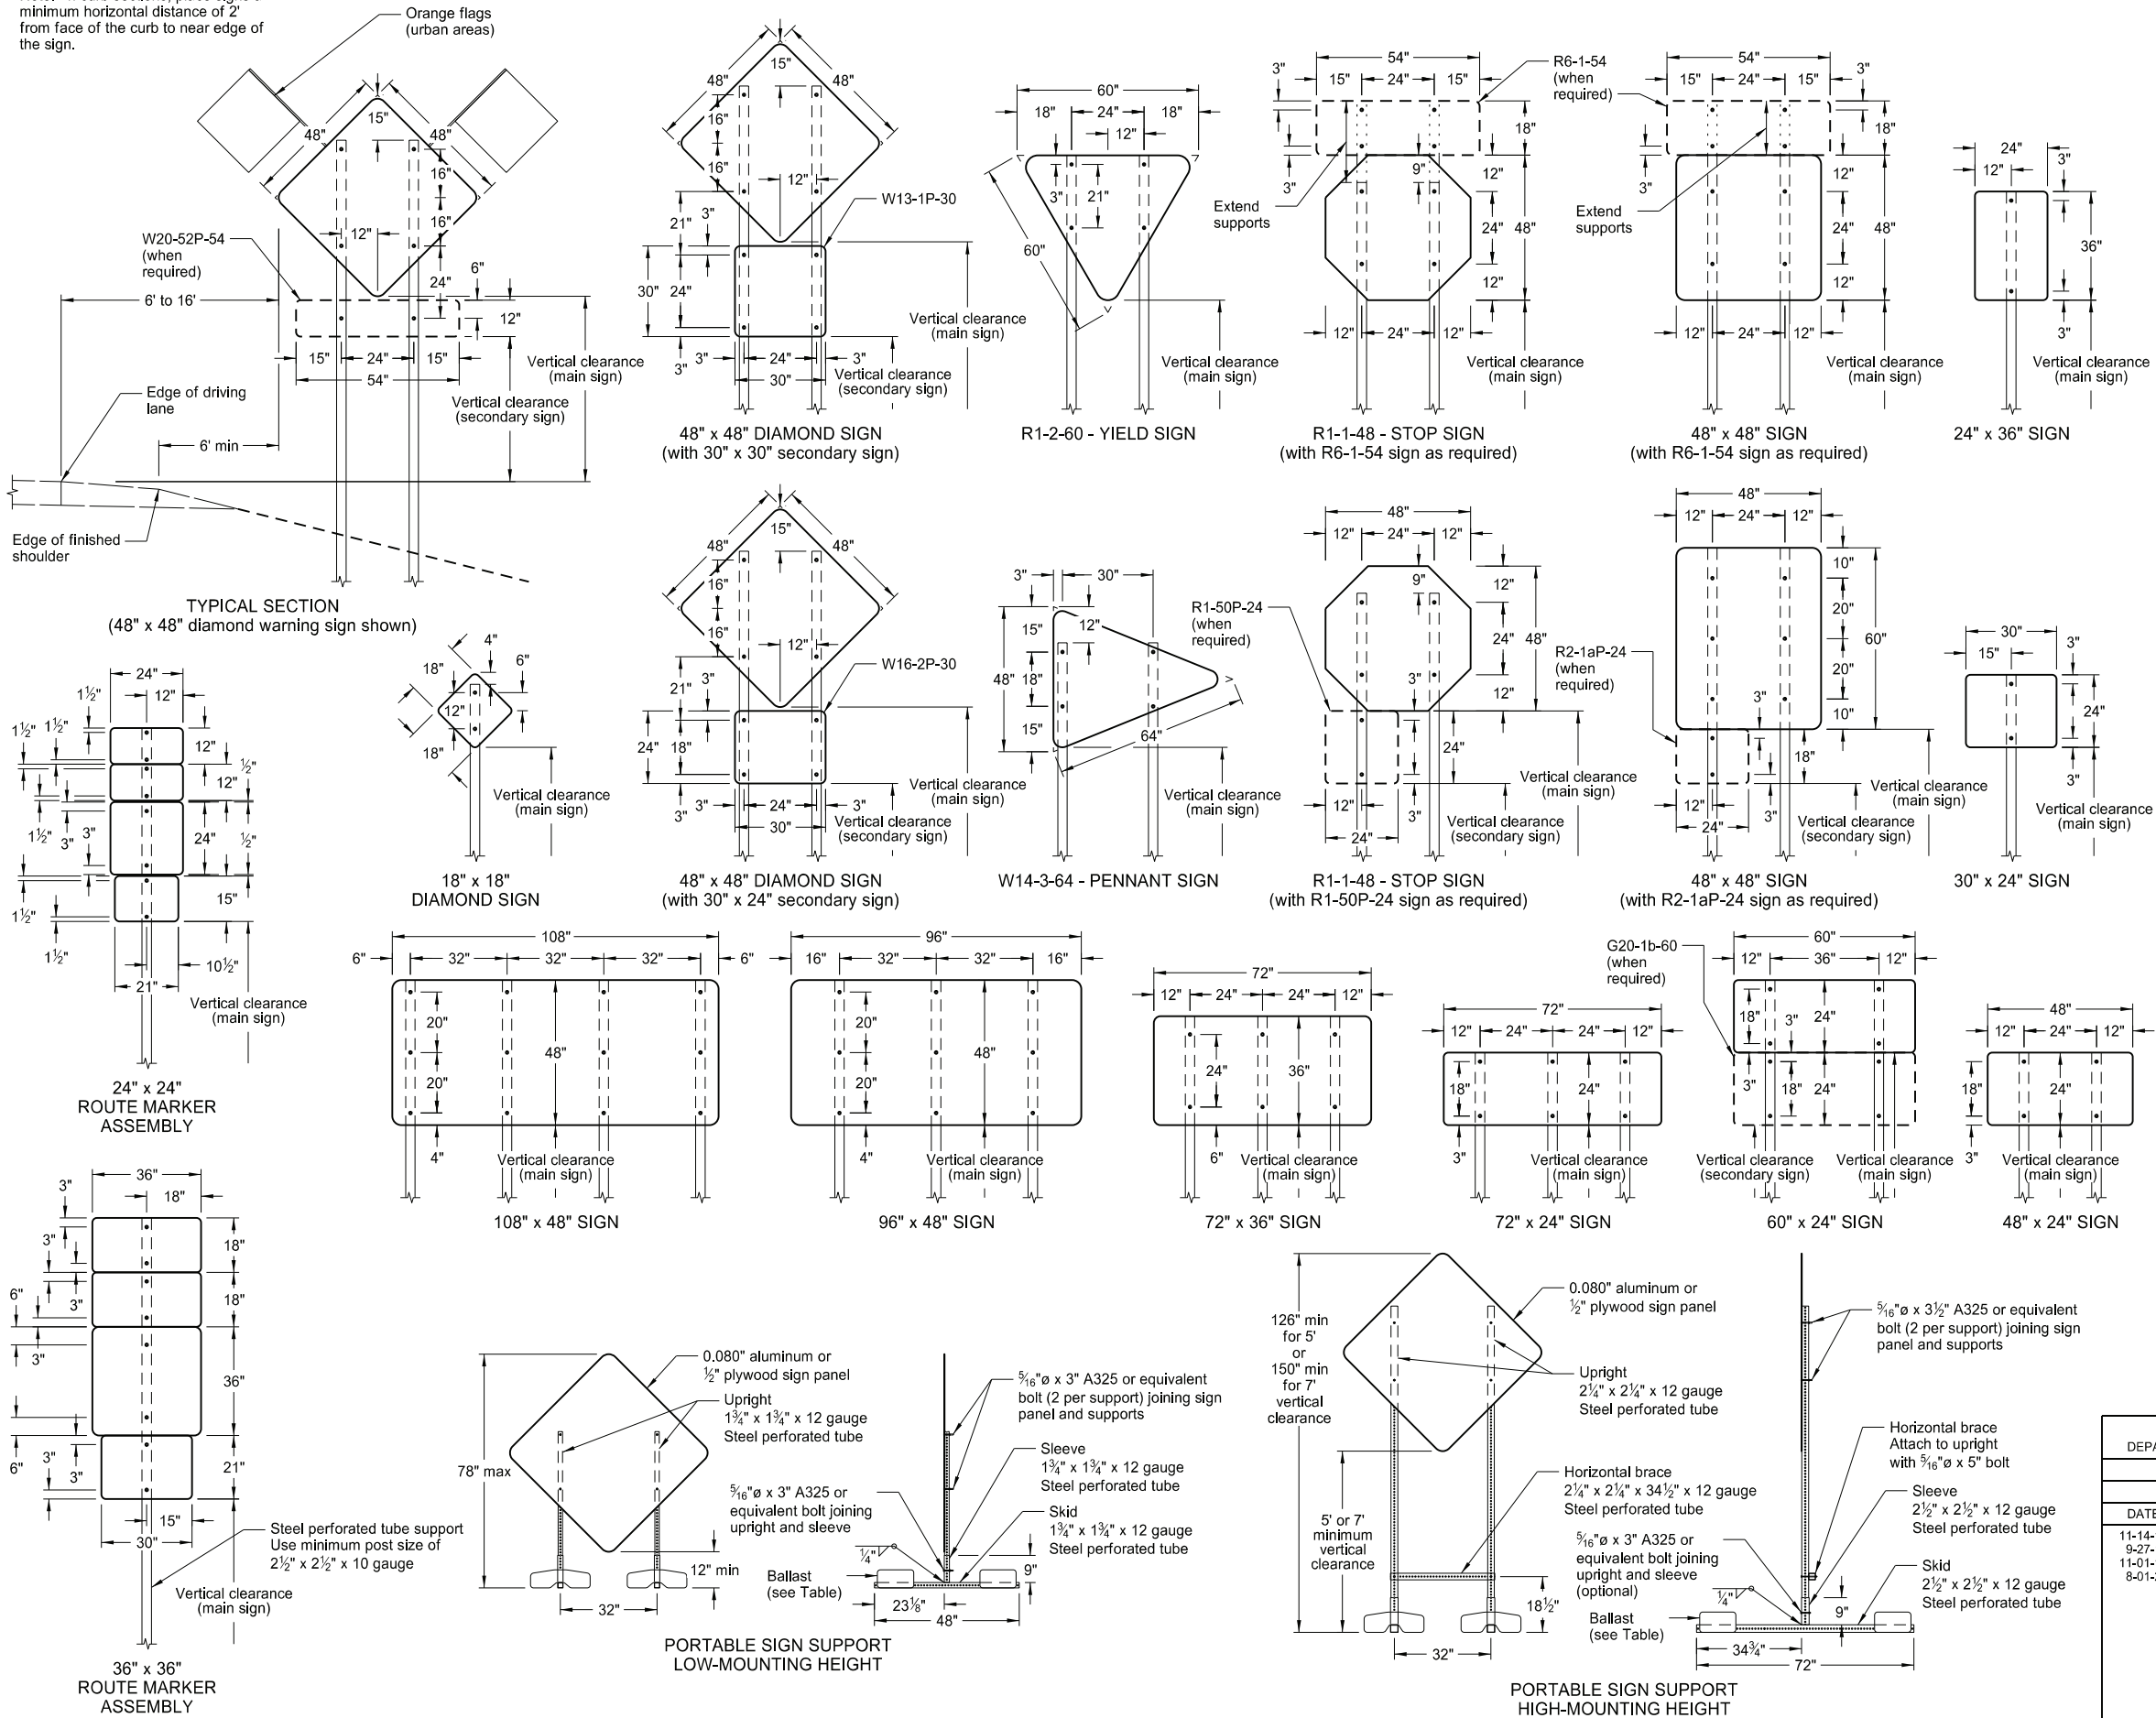

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.
2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅜" bolts.
3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)
4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10


Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail
8-01-24	Electronic Stamp/Signature



08/01/24

ROAD CLOSURE LAYOUTS

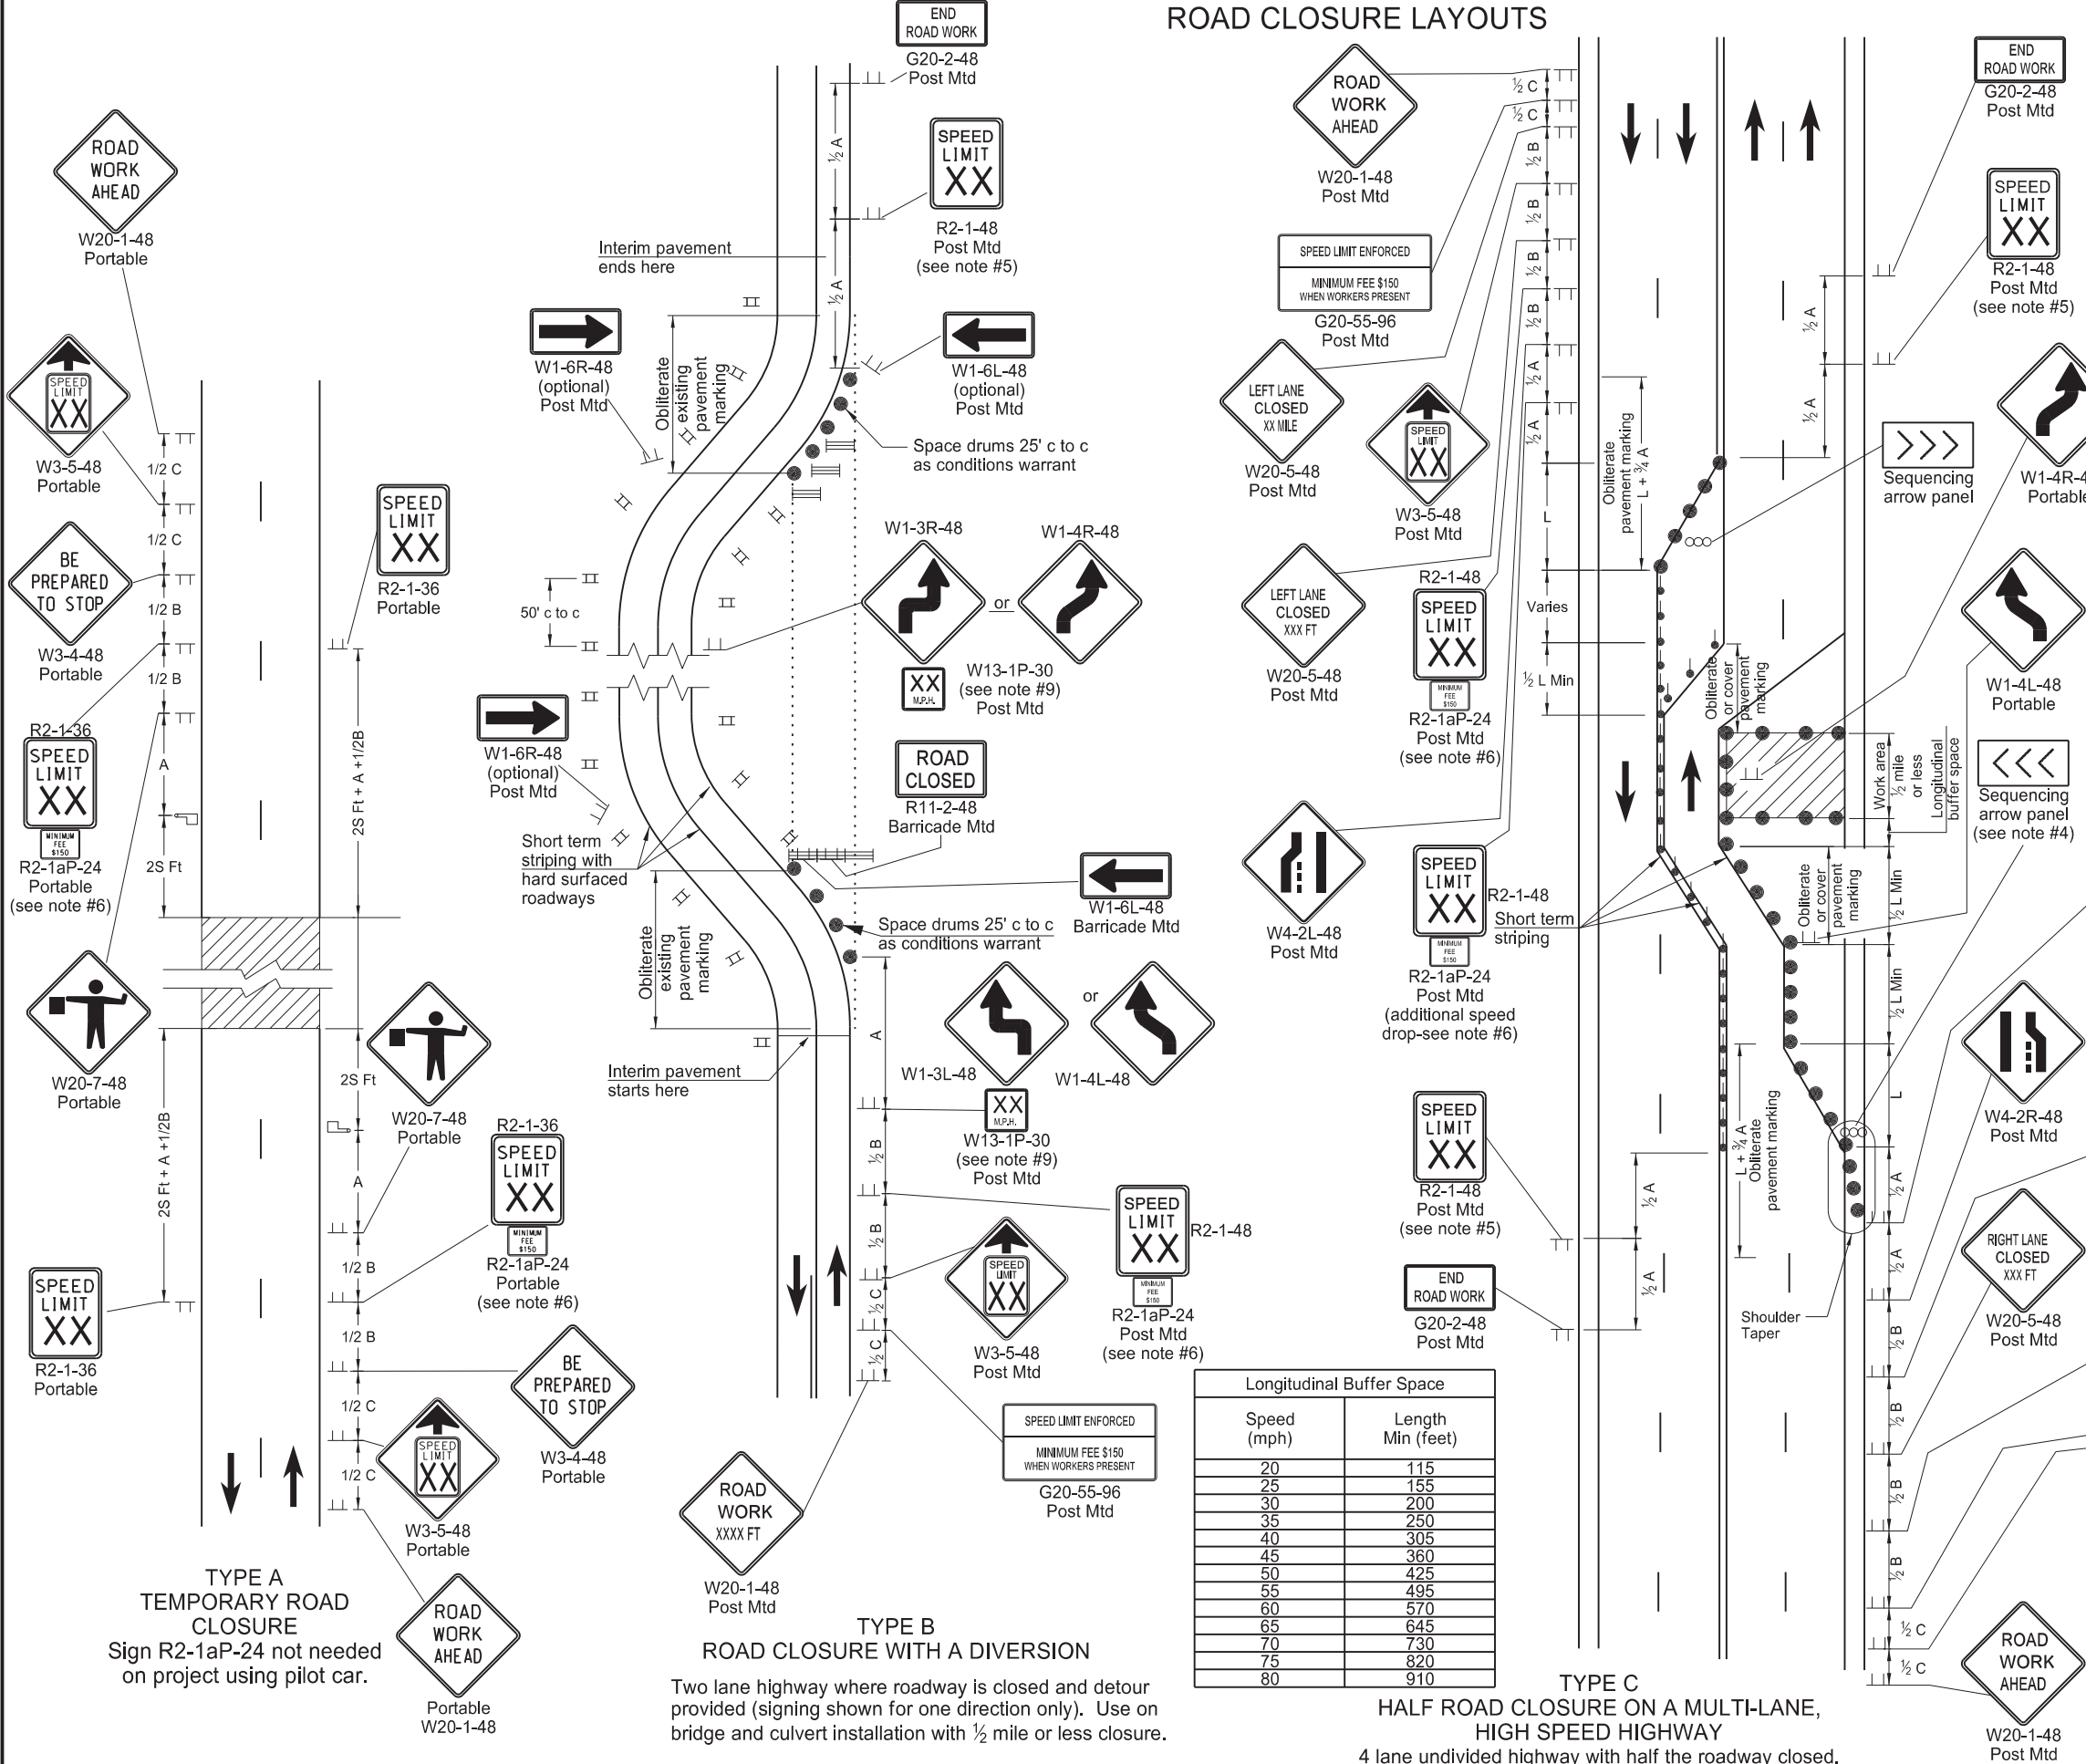

- Notes:
- 1. Variables
 - S = Numerical value of speed limit or 85th percentile.
 - W = The width of taper in feet.
 - L = Minimum length of taper, S x W for freeways, expressways, and other roads with speeds of 45 mph or greater, or W x S²/60 for urban, residential, and other streets with speeds of 40 mph or less.
 - 2. Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
 - 3. Place delineator drums, barricades or cones for tapering traffic at dimension "S" and for tangents space at 2 times dimension "S".
 - 4. Place Sequencing Arrow Panels at the beginning of the taper when possible. Where shoulder width does not provide sufficient room, move the panel closer to the work area and place on roadway surface. See Shoulder Closure Standard Drawing.
 - Use Type A on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
 - Use Type B on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
 - Use Type C on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
 - 5. Re-establish speed. Determine exact speed limit in the field, dependent on location and conditions.
 - 6. Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
 - 7. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
 - 8. Cover existing speed limit signs within reduced speed zones.
 - 9. Where necessary, engineer will determine safe speed.
 - 10. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
 - 11. Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
 - 12. Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500


KEY			
	Type III barricade		Work area
	Sign		Flagger
	Delineator drum		Sequencing arrow panel
	Tubular markers		Vertical panels back to back

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Updated Notes & Spd Limit signs
11-01-19	Sign, Notes, & Pmnt Mk updates
12-08-21	Switched order of Road Work Ahead and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes



TERMINAL AND SEAL COAT SIGN LAYOUTS

D-704-20

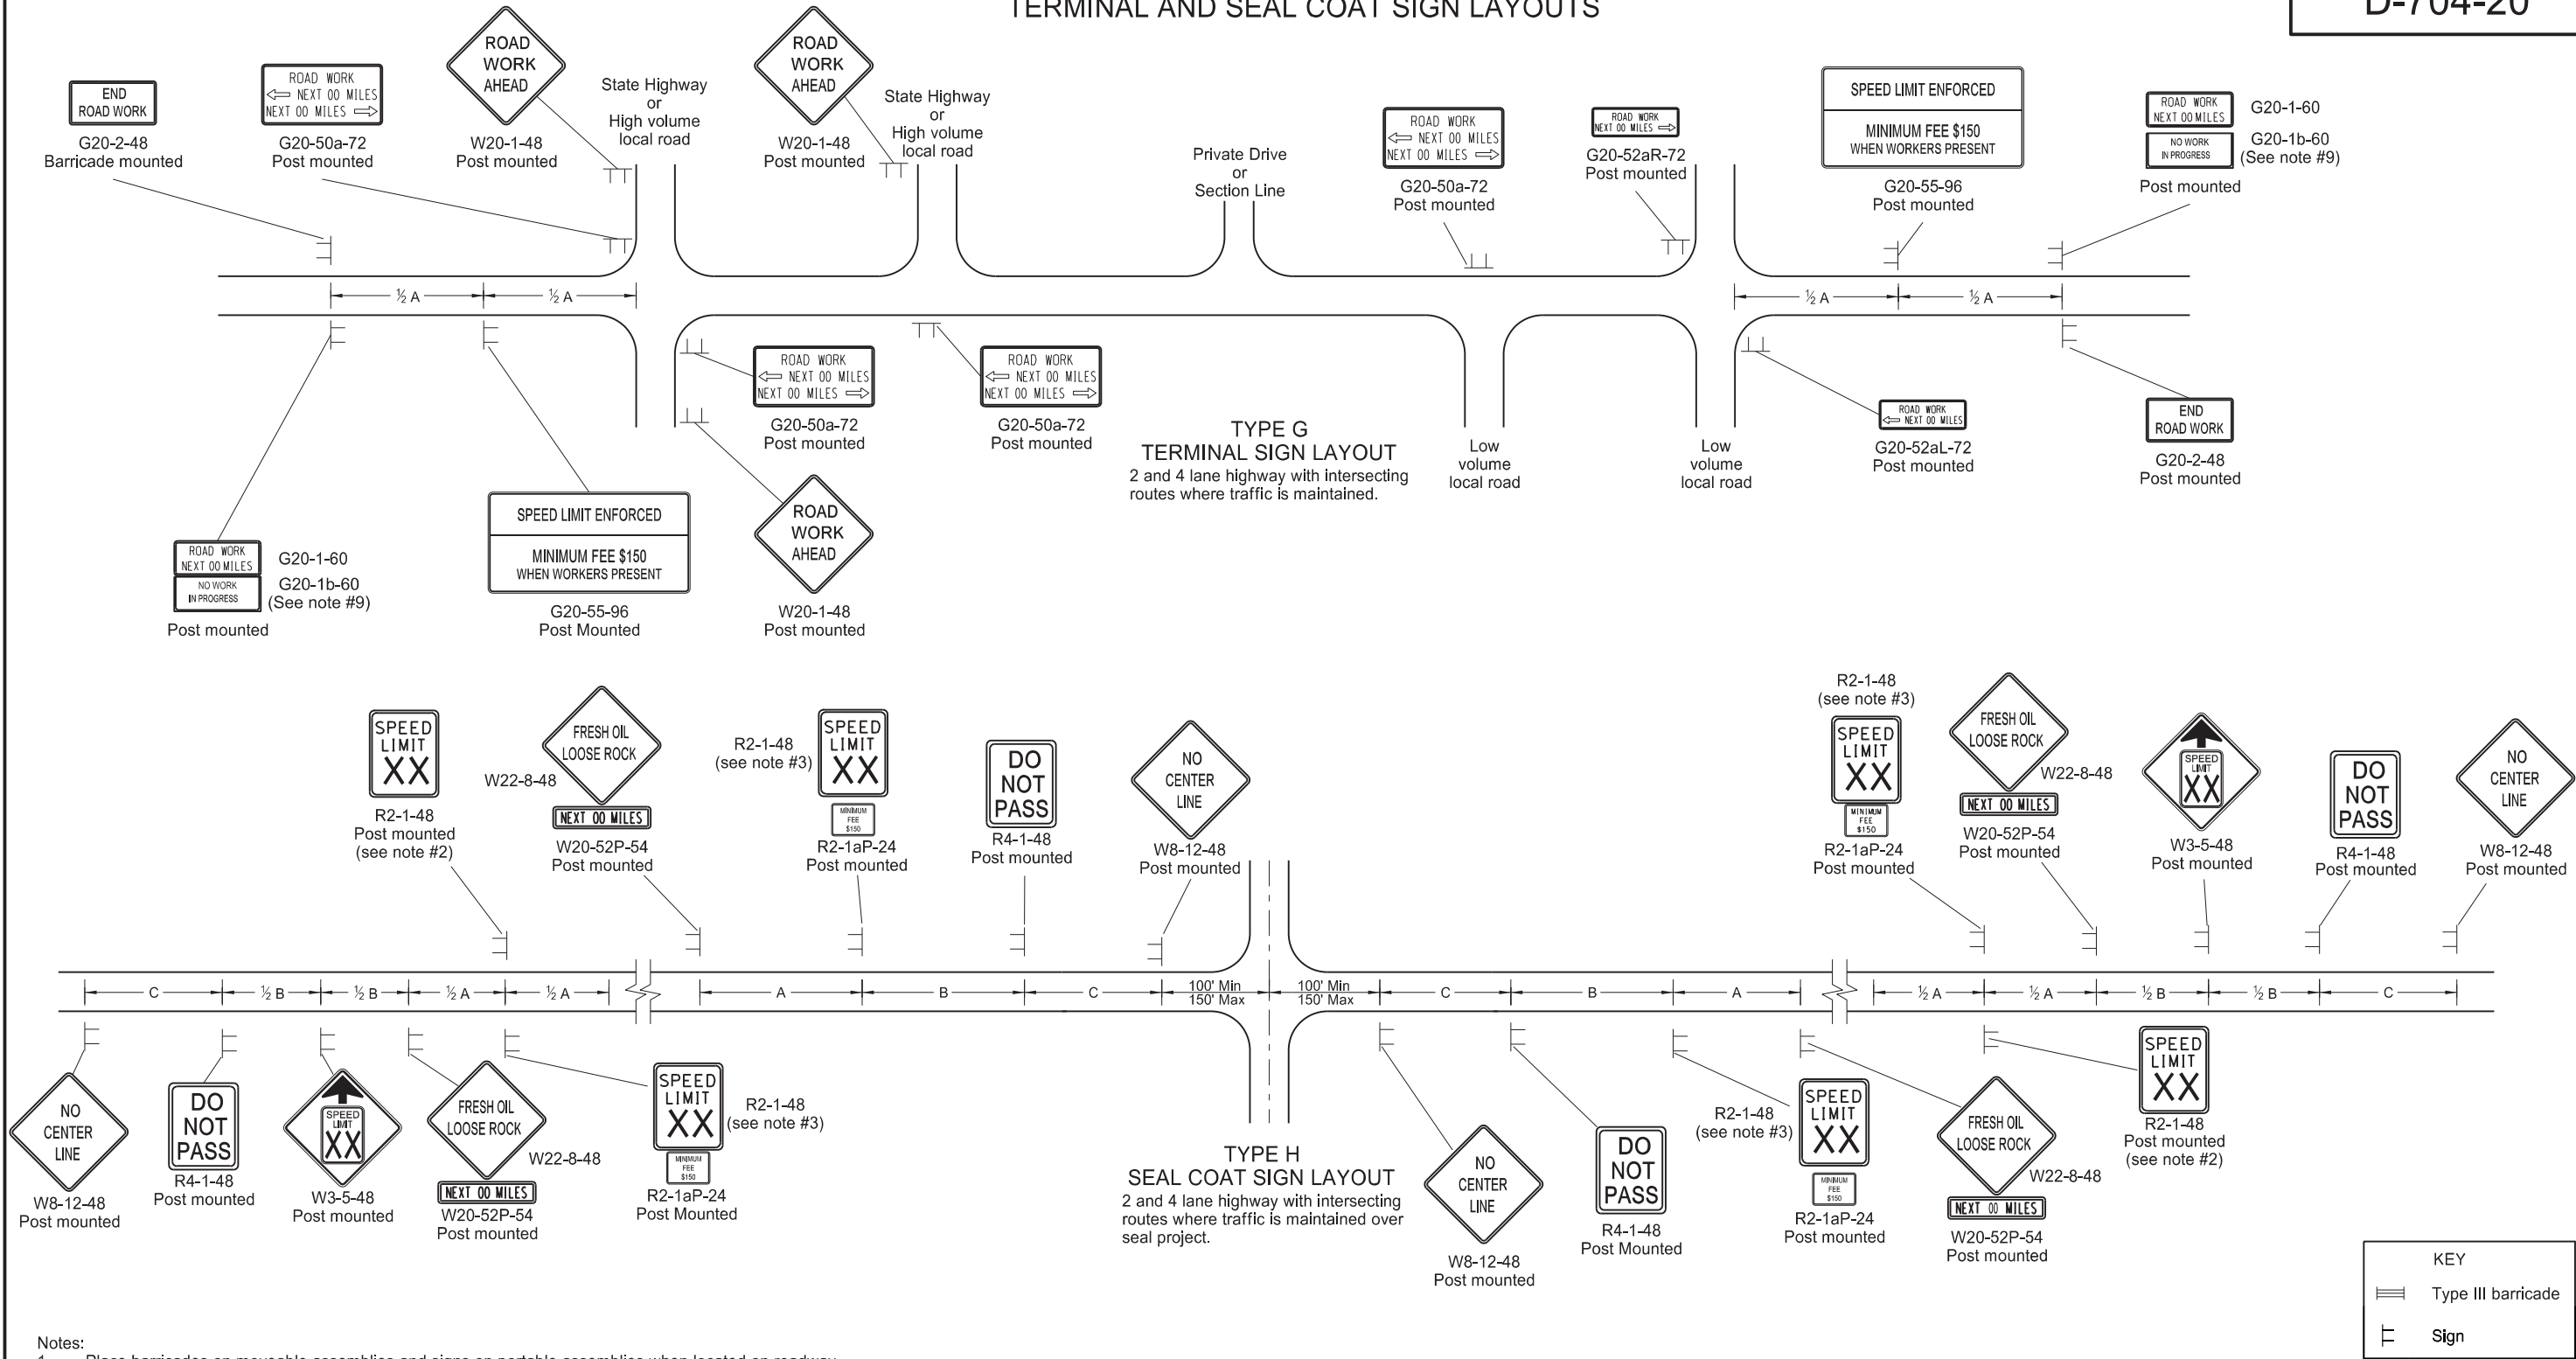

Notes:

- Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
- Determine the exact speed limit in the field, based on location and conditions.
- Determine the reduced speed limit based on the in place speed limit before construction. Where speed limit reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at ½ B.
- Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
- Cover existing speed limit signs within a reduced speed zone.
- On seal coat projects, place signs R2-1-48, R2-1aP-24, R4-1-48, W22-8-48 and W20-52P-54 after all important intersections and at five mile intervals. Place sign W8-12-48 after all important intersections and at 2 mile intervals until short term center line pavement marking is placed.
- As an option, use portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Drawing D-704-14.
- Cover or remove speed limit signs from layout Type H when loose aggregate is removed.
- Install sign G20-1b-60 when work is suspended for winter.
- Use other traffic control layouts in immediate work areas. Place sign R2-1aP-24 below speed limit signs in reduced speed limit work areas.
- Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
- Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.


ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs		
	Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Updated notes & sign numbers
11-01-19	Updated note & sign
12-08-21	Switched order of Road Work and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes



CONSTRUCTION TRUCK AND TEMPORARY DETOUR LAYOUTS

D-704-22

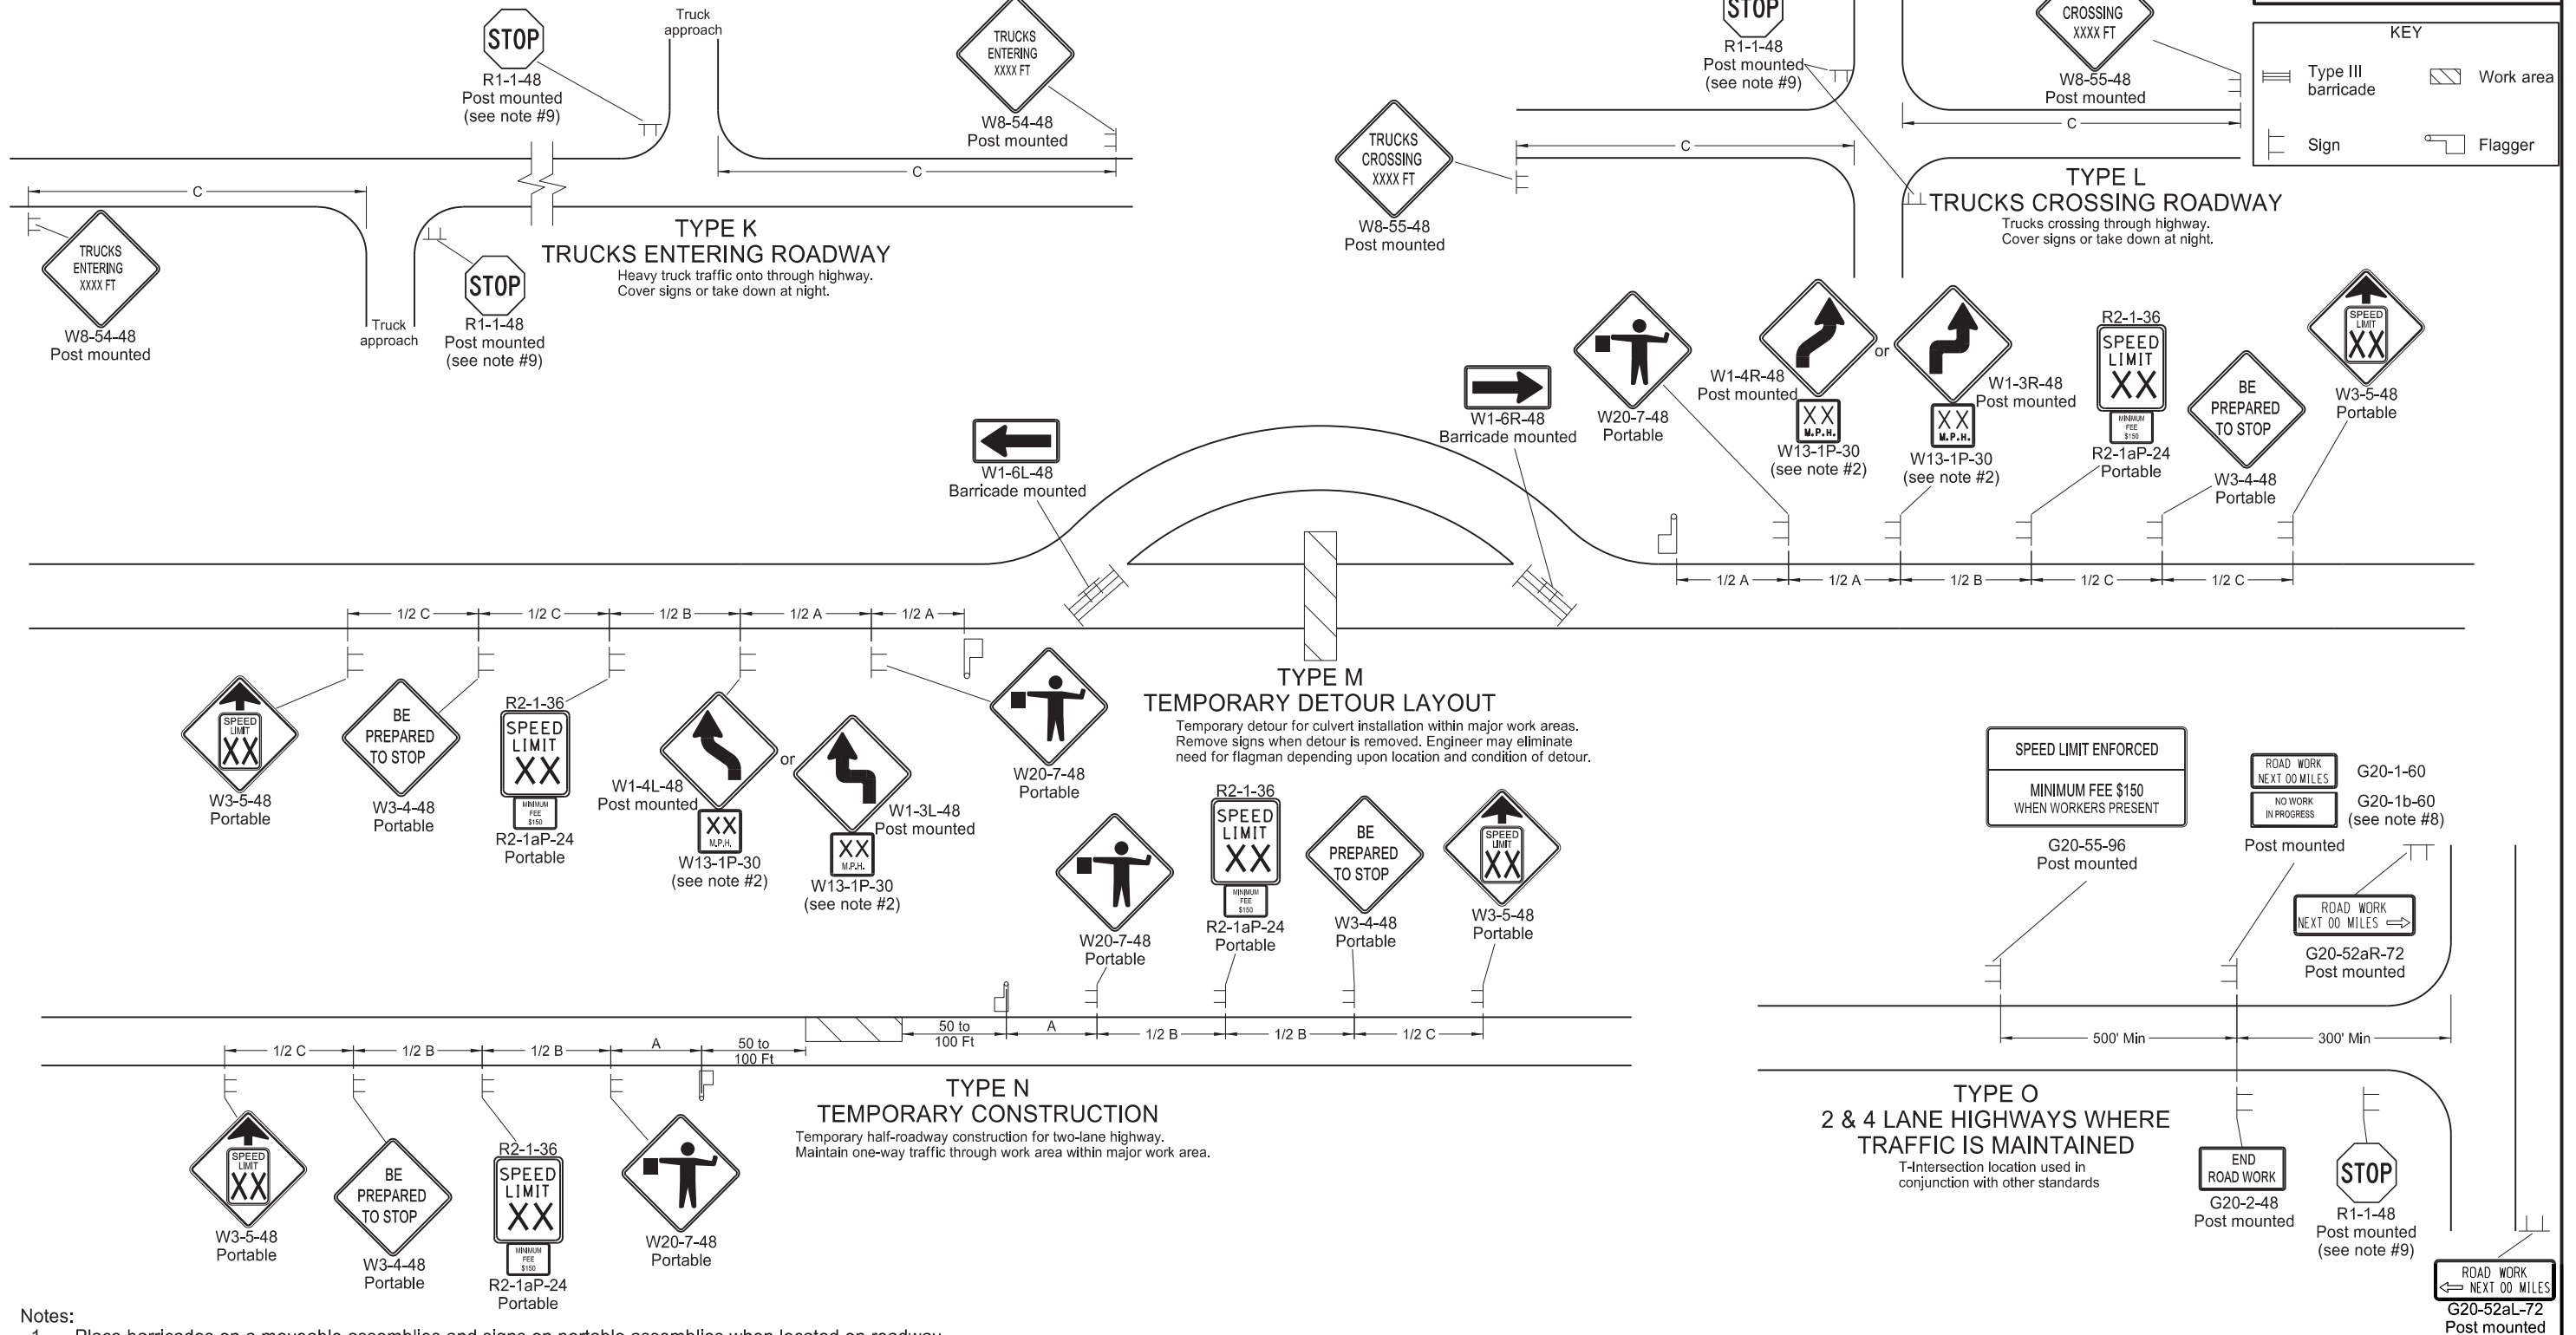

Notes:


1. Place barricades on a moveable assemblies and signs on portable assemblies when located on roadway.
2. Where necessary, safe speed to be determined by the Engineer.
3. Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½ B.
4. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
5. Cover existing speed limit signs within a reduced speed zone.
6. Covered (when approved by engineer) or obliterated pavement marking measured as Obliteration of Pavement Marking.
7. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
8. Install sign G20-1b-60 when work is suspended for winter.
9. If existing stop sign is in place, a 48" stop sign is not required.
10. Sign G20-55-96 is not required if layout is part of other traffic control that contains this sign, or if work is less than 15 days.
11. Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17 11-01-19 12-09-21	Update notes & sign numbers Revised sign numbers & note Added Speed Limit Enforced and Dollars At Work signs
11-29-22 06-30-25	Removed Dollars At Work Legislative Changes




D-704-27

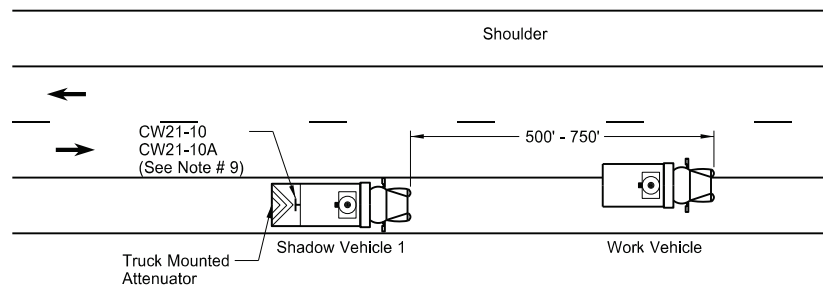


Two-Way Roadway with Paved Shoulders

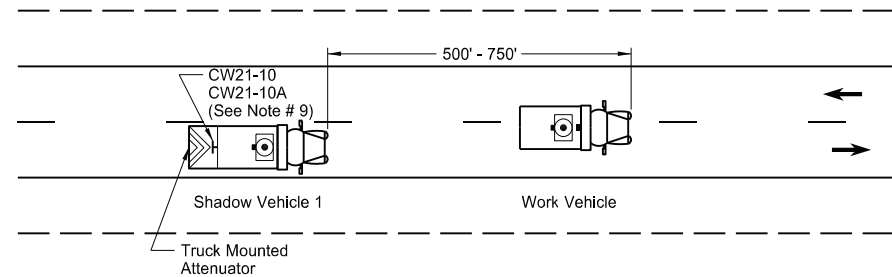


Two-Way Roadway without Paved Shoulders

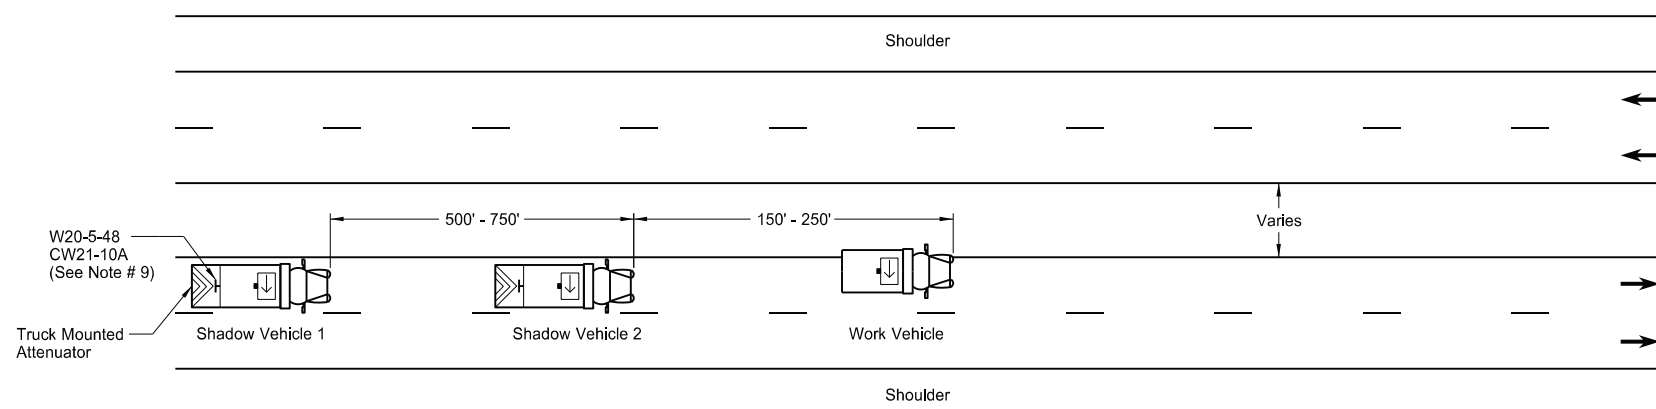



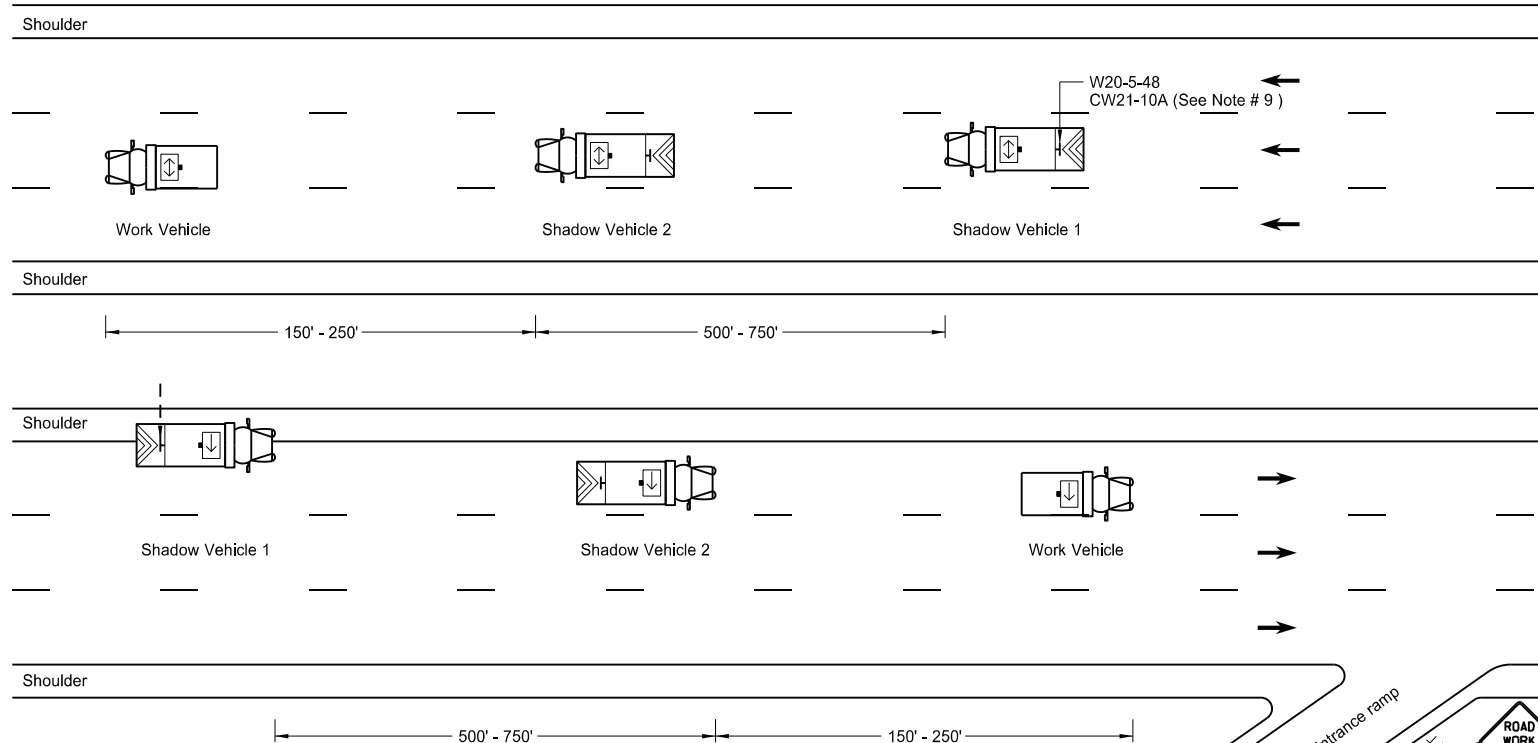

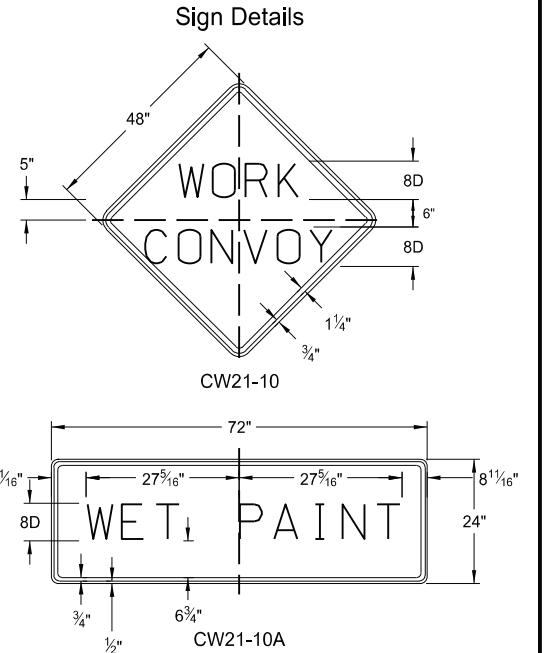


Undivided Multi-Lane Roadway



Divided Multi-Lane Highway



- Notes
1. Use additional vehicles you choose to be in the convoy with truck mounted attenuators, at your own expense.
 2. Display yellow rotating beacons or strobe lights on shadow and work vehicles, unless otherwise stated in the plans.
 3. Use Type B or Type C flashing arrow panels controlled from inside the vehicle.
 4. Provide each vehicle with two-way electronic communication capability.
 5. Move shadow vehicle 1 first to shadow other convoy vehicles when convoy changes lane.
 6. Vary vehicle spacing between shadow vehicle 1 and shadow vehicle 2 based on sight distance restrictions. Motorists approaching the work convoy need to see trail vehicle in time to slow down and/or change lanes as they approach shadow vehicle.
 7. Sign Colors
Letters = Black
Border = Black
Background = Orange
 8. As an option, use shadow vehicle 2 the paint tender vehicle.
 9. Use sign CW21-10A only during painting operation.
 10. Pull over work and shadow vehicles periodically to allow motor vehicle traffic to pass on two lane - two way roadways.

KEY	
	Sign
	Truck mounted attenuator
	Flashing arrow panels:
	Right directional
	Left directional
	Double arrow directional
	Caution Mode

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
6-18-14	Removed shadow vehicle 2 on two lane roadways
9-27-17	Updated to active voice
11-08-19	Changed Standard Heading
8-02-24	Electronic Stamp/Signature.



08/02/24

Two-Lane Roadway Portable Rumble Strips

D-704-33

Work area





Flagger

Sign

KEY


S = Numerical value of speed limit or 85th percentile.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - High Speed (over 45 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720

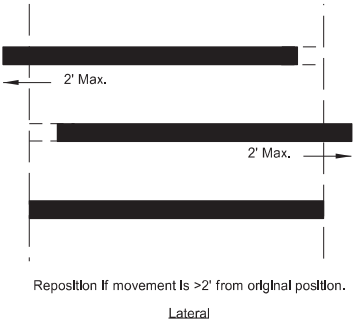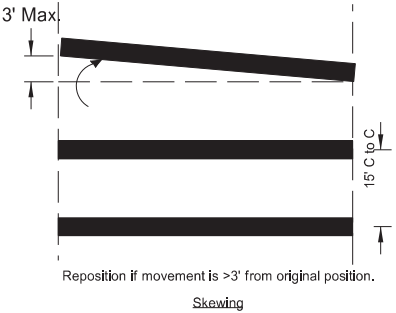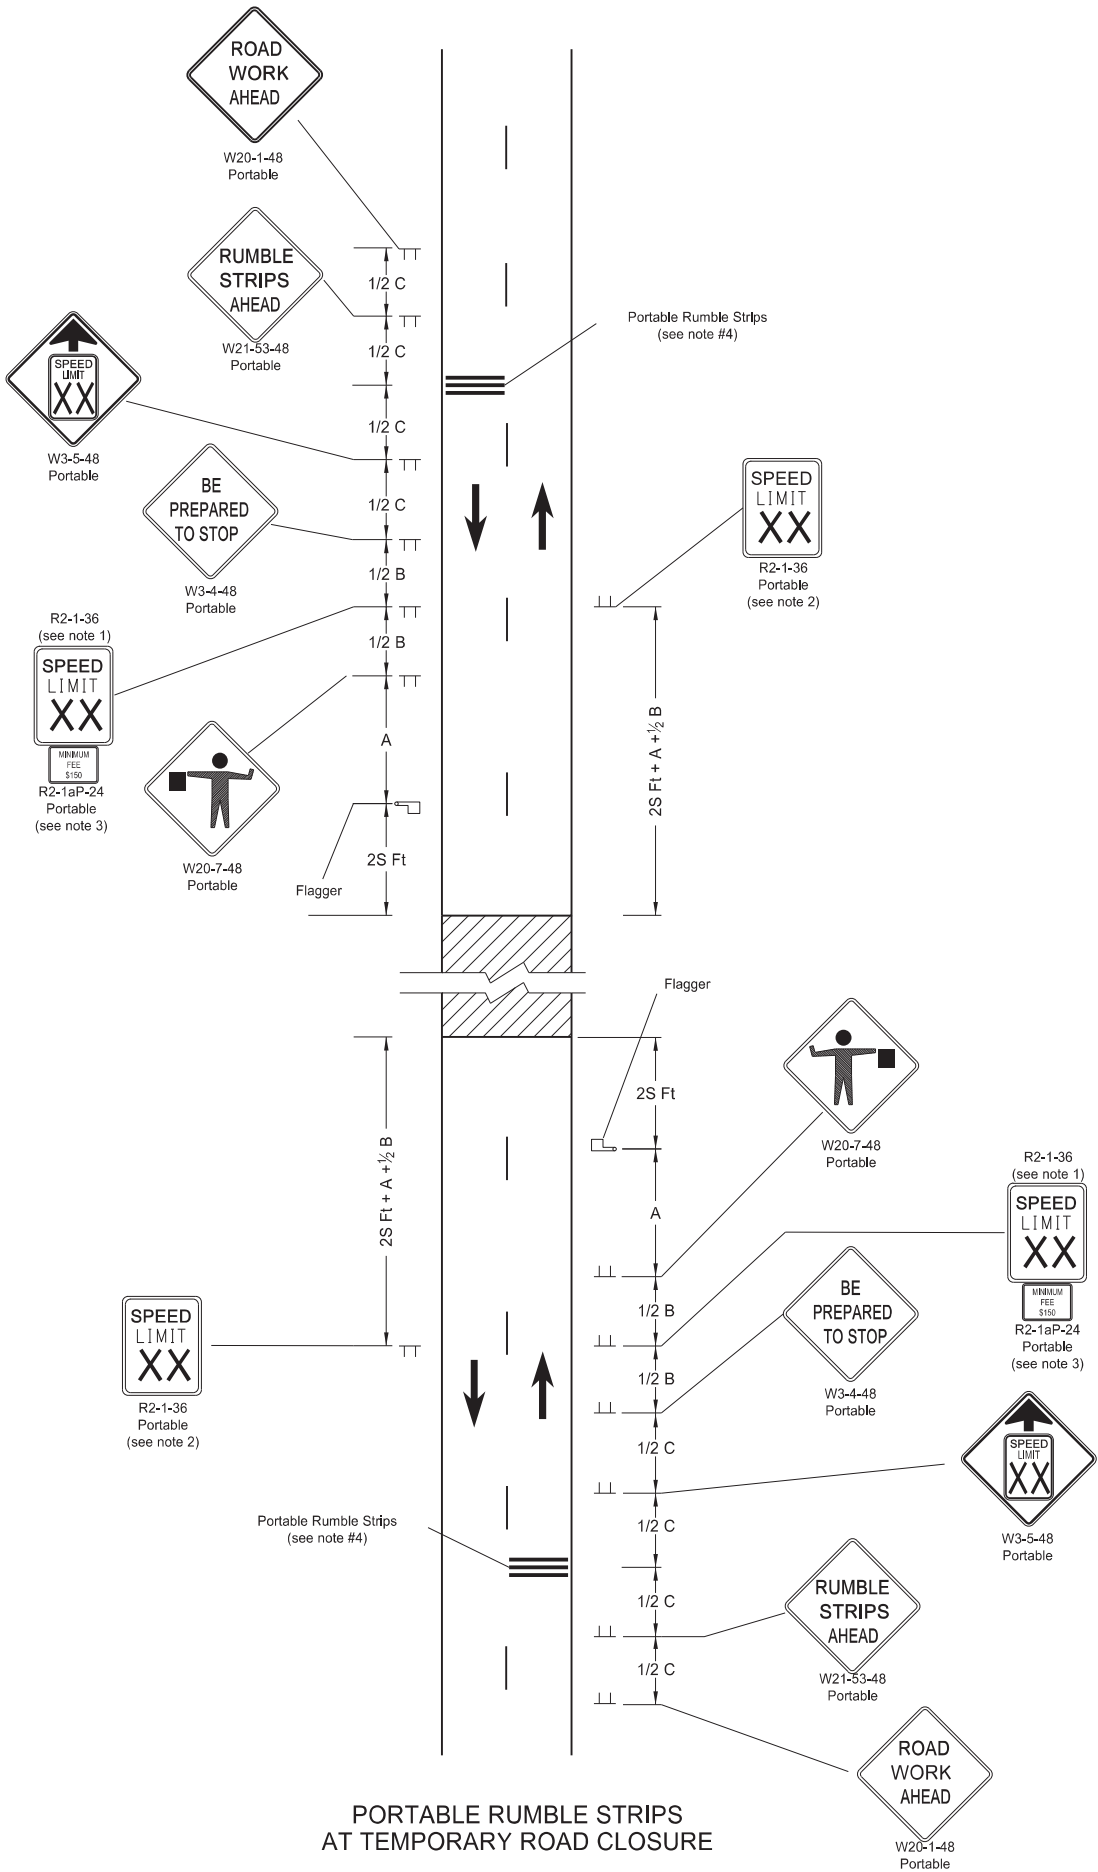

PORTABLE RUMBLE STRIPS ARRAY
TYPES OF MOVEMENT AND MAXIMUM ALLOWANCES

- Notes:
- Determine speed in the field based on location and conditions.
 - Re-establish the speed limit. Determine the exact speed limit in the field, dependent on location and conditions.
 - Sign R2-1aP-24 is not required when pilot car operation is used.
 - Do not use rumble strips on a non paved surface or in a pre-construction speed zone of 45 mph or less.

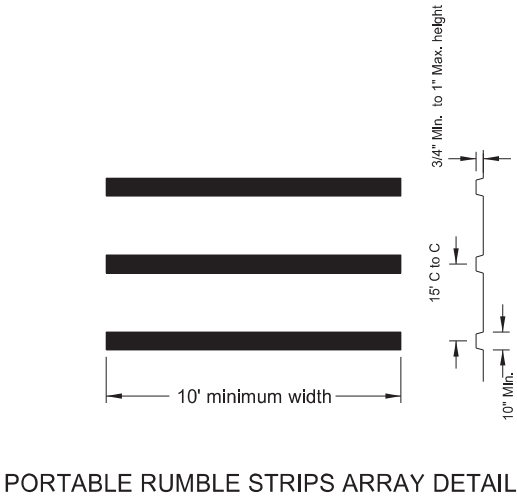


PORTABLE RUMBLE STRIPS
AT TEMPORARY ROAD CLOSURE

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
02-22-22	
REVISIONS	
DATE	CHANGE
03-07-23 06-30-25	Use changed to min 45 mph Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

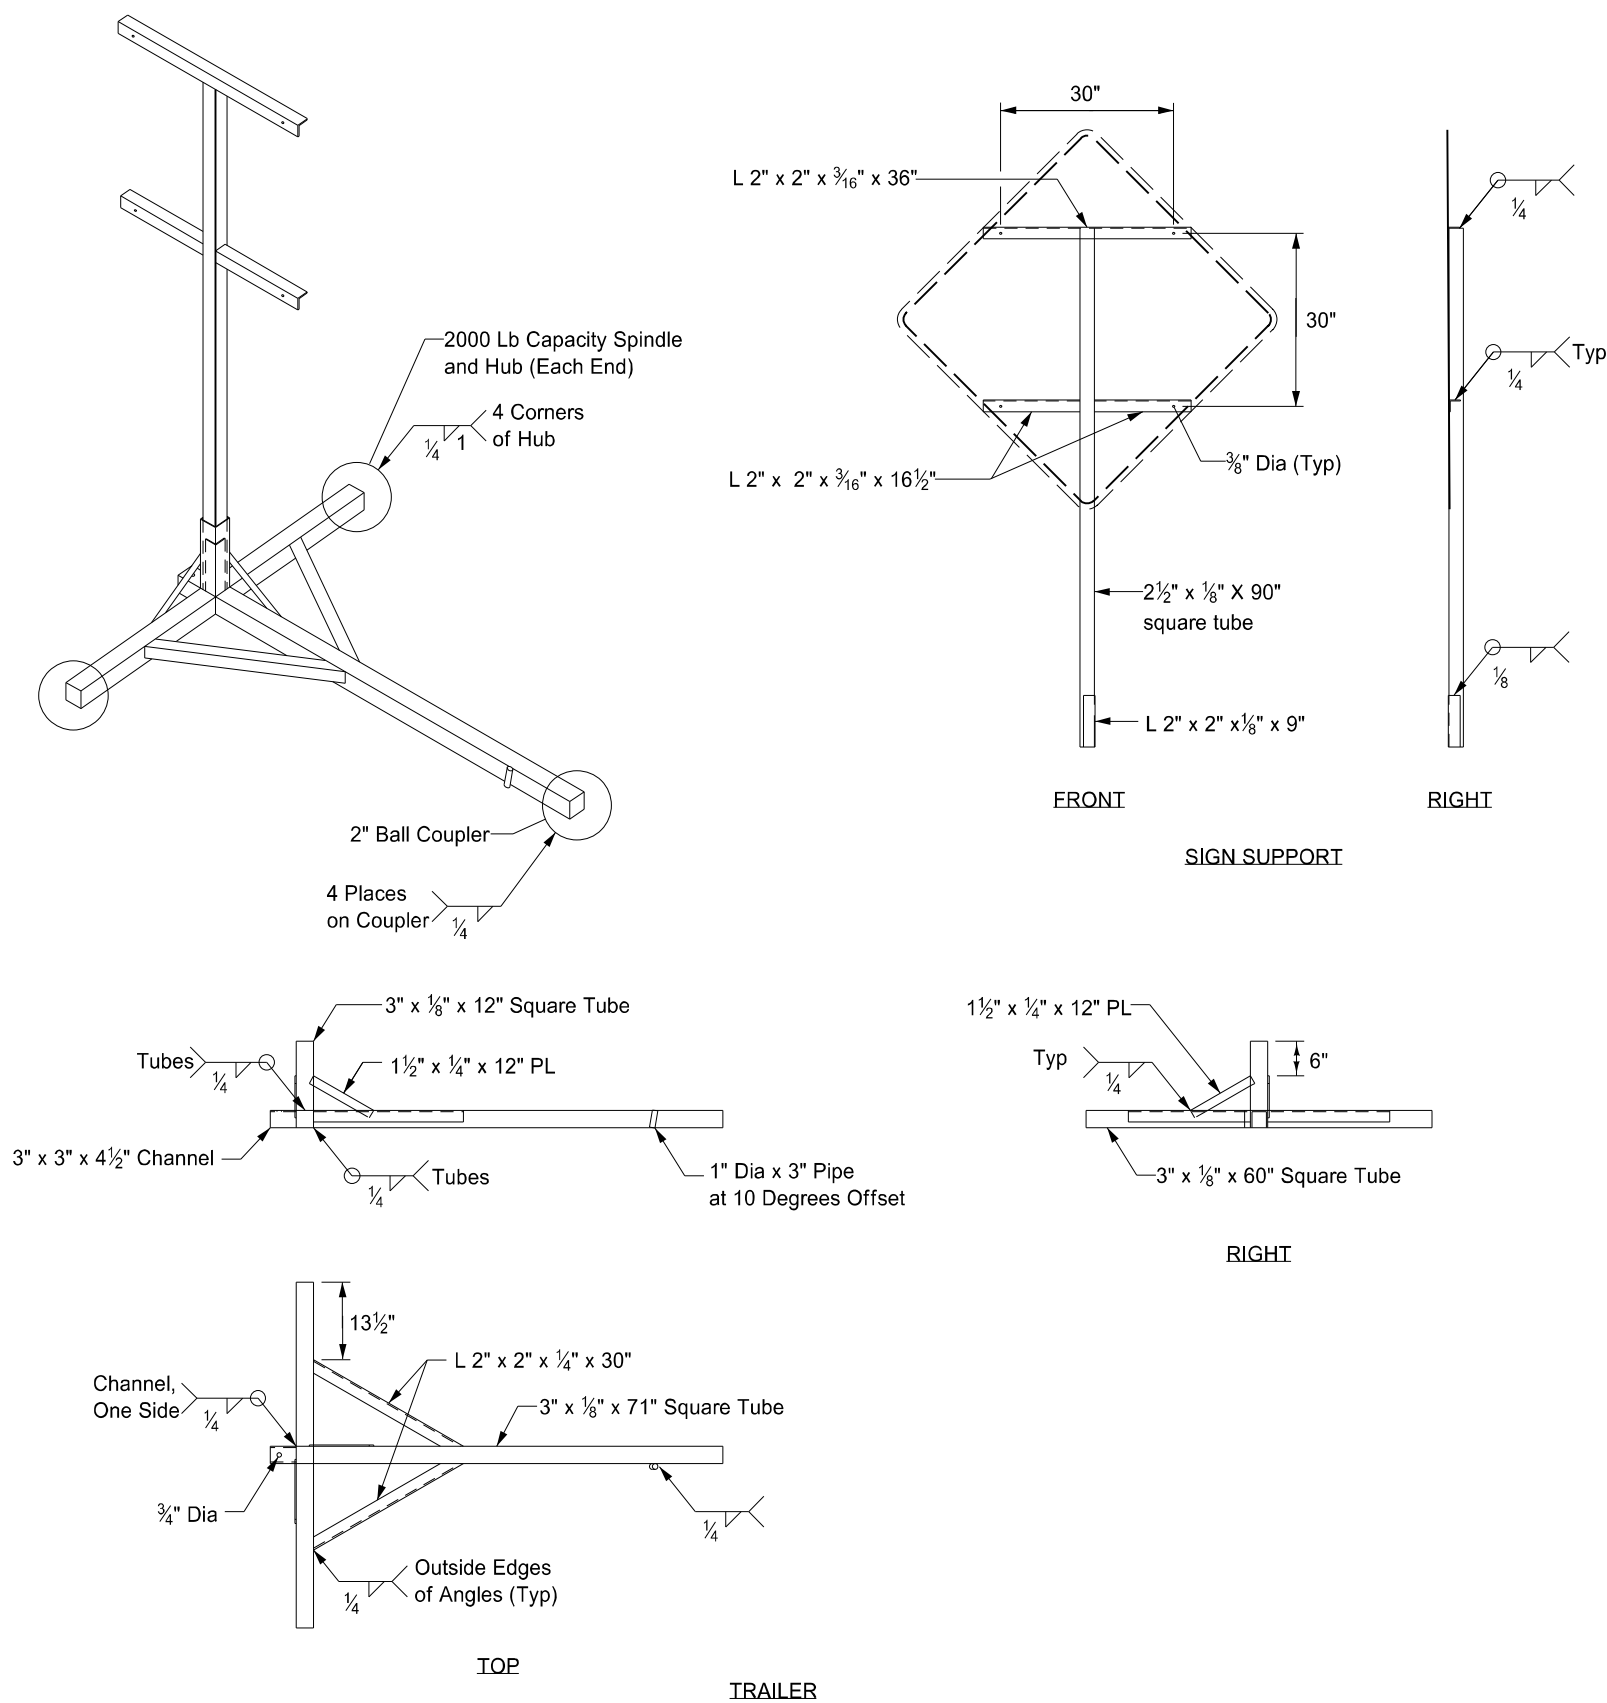


- Notes:
- 1. Maximum 250 pound weight of assembly.
 - 2. Use a 14" wheel and tire.
 - 3. Use no automotive and equipment axle assemblies for trailer-mounted sign supports.
 - 4. Other NCHRP 350 or MASH crash tested assemblies are acceptable.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE
12/02/2020	Updated Note to active voice.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 02 2020

Pavement Marking Message Details


D-762-1

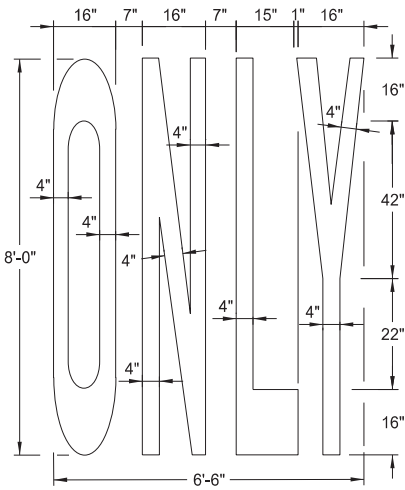


22 S. F.

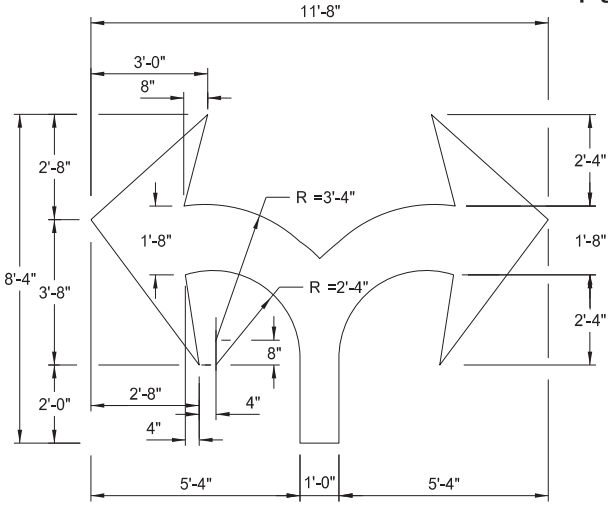


29 S. F.

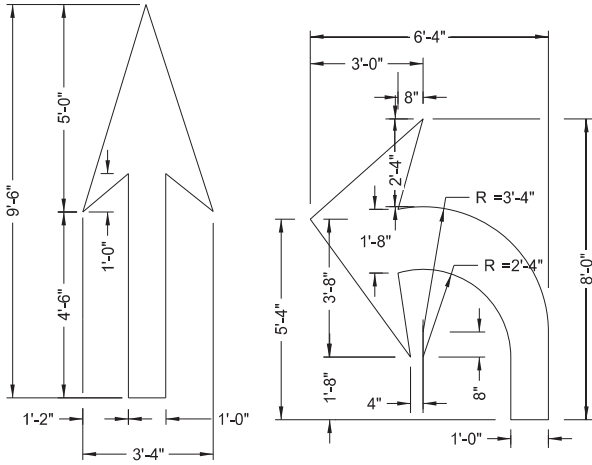


12 S. F.

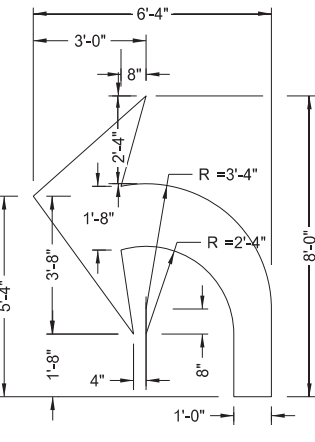

16 S. F.

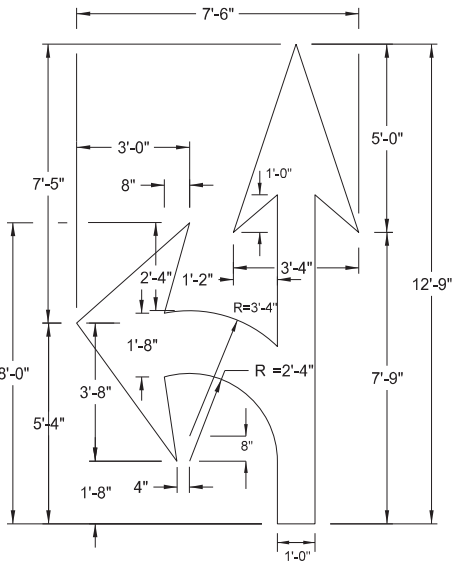

27 S. F.

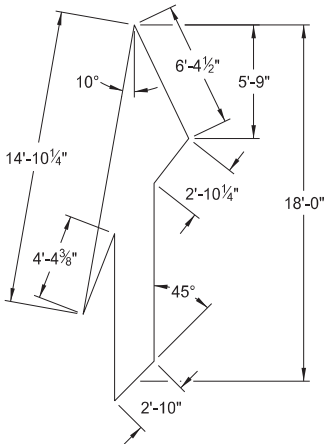


41 S. F.


Note: Rotate merge arrow 20° from edge of roadway.

Speed Limit	Chevron Width	Chevron Spacing 45° to Traffic
0-25 mph	8"	5'
30-40 mph	8"	15'
45 mph and above	12"	25'


Chevron Crosshatching Table




Centerline Pavement Marking Skip Spacing Detail




4 S. F.

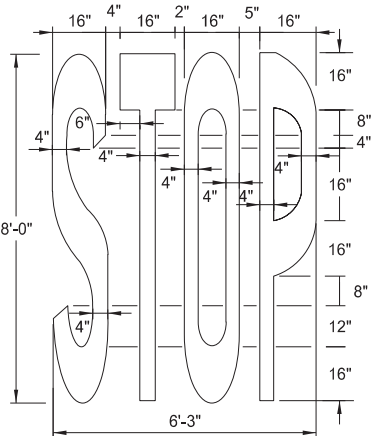



22 S. F.

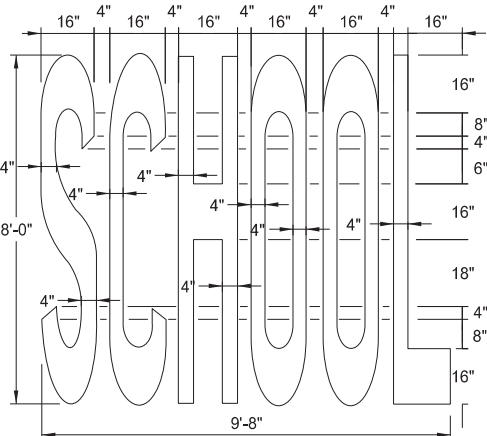

34.5 S. F.

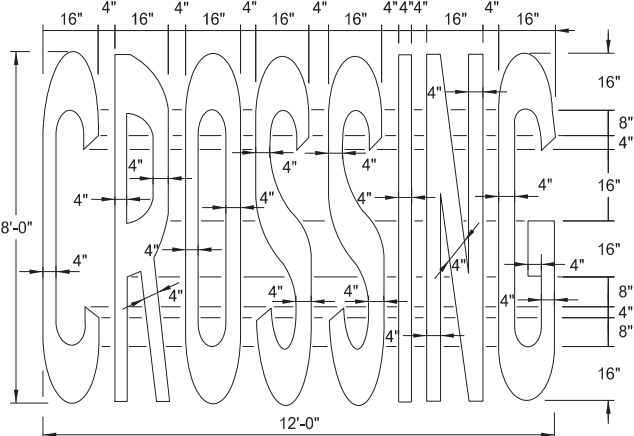


46 S. F.

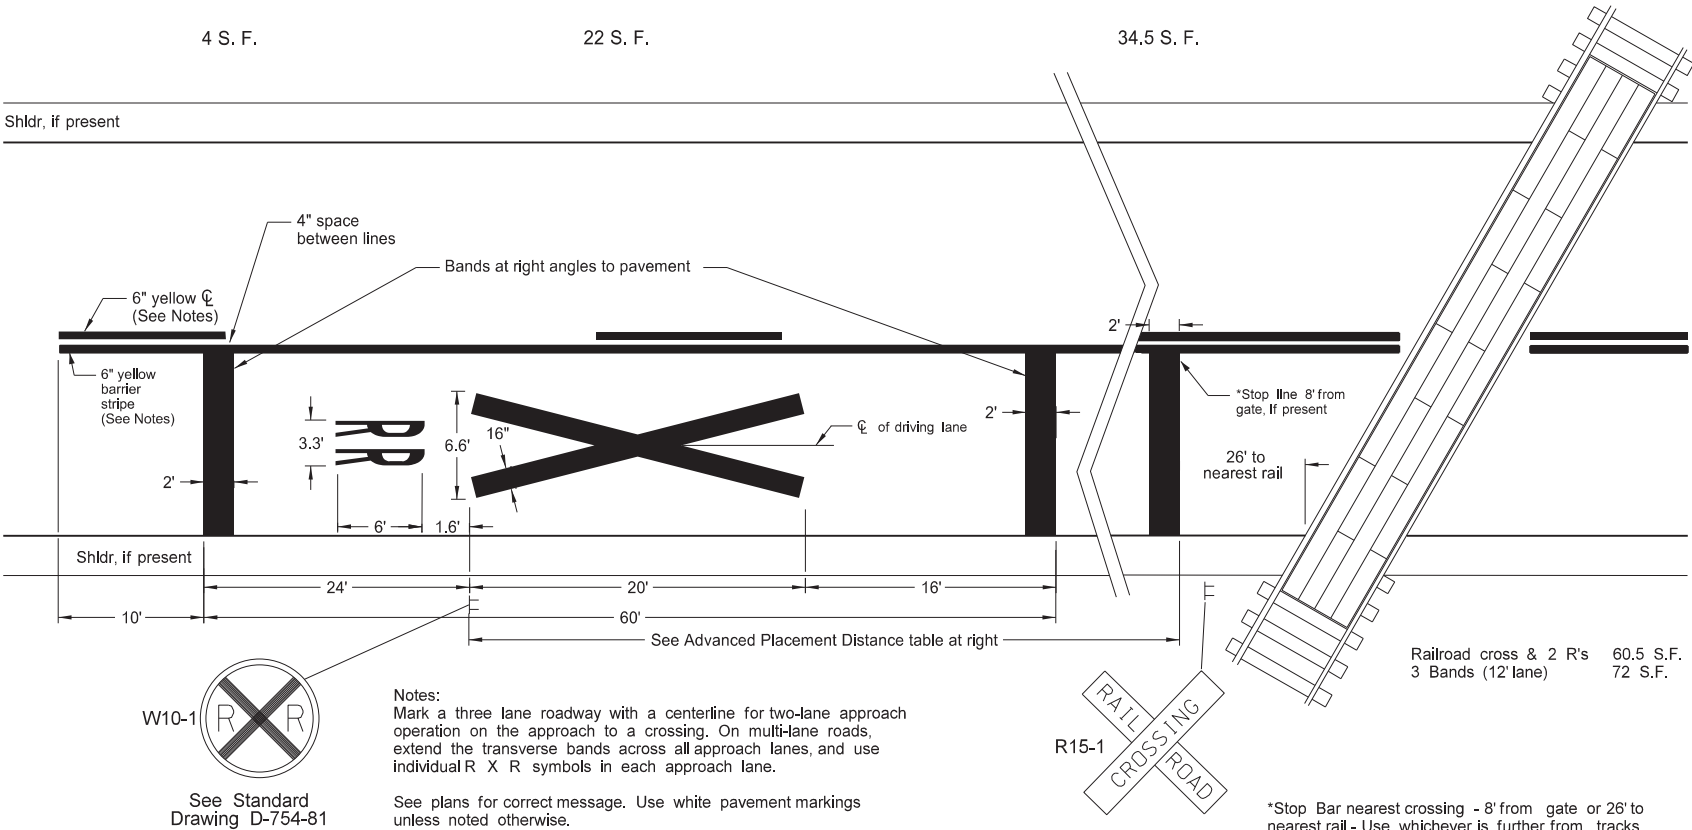

Notes:
Mark a three lane roadway with a centerline for two-lane approach operation on the approach to a crossing. On multi-lane roads, extend the transverse bands across all approach lanes, and use individual R X R symbols in each approach lane.
See plans for correct message. Use white pavement markings unless noted otherwise.

*Stop Bar nearest crossing - 8' from gate or 26' to nearest rail - Use whichever is further from tracks.

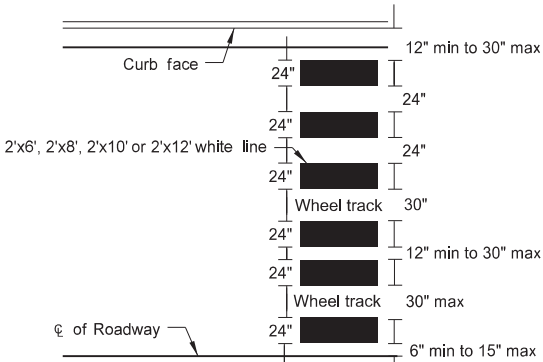

Continental Crosswalk Detail

- NOTES:
1. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
 2. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40 mph.


Advance Placement Distance for Railroad Warning Signs	
Posted or 85th Percentile Speed	Advance Distance
20 mph	min. 100 ft
25 mph	min. 100 ft
30 mph	min. 100 ft
35 mph	min. 100 ft
40 mph	125 ft
45 mph	175 ft
50 mph	250 ft
55 mph	325 ft
60 mph	400 ft
65 mph	475 ft
70 mph	550 ft

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-6-11	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
06-27-19	New Design Engineer PE Stamp.
01-28-2020	Revised min Stop Bar distance to rail.
11-22-2023	Revised pavement marking widths.




PAVEMENT MARKING


D-762-4

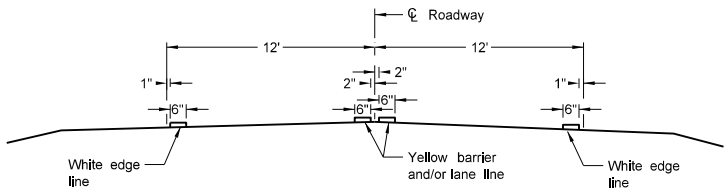


Two Lane Two Way
RURAL ROADWAY

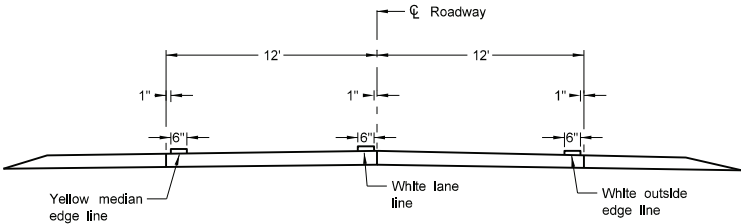


Two Lane Roadway
INTERSTATE HIGHWAY
Concrete Section

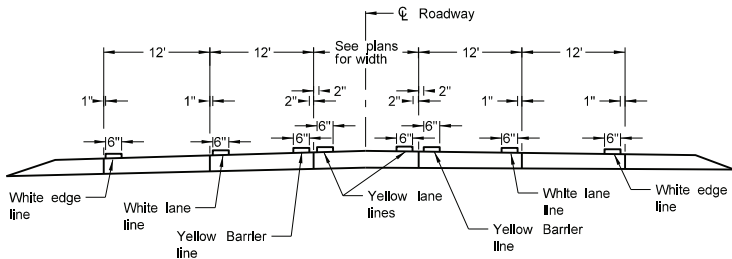


RURAL FIVE LANE ROADWAY
Concrete Section

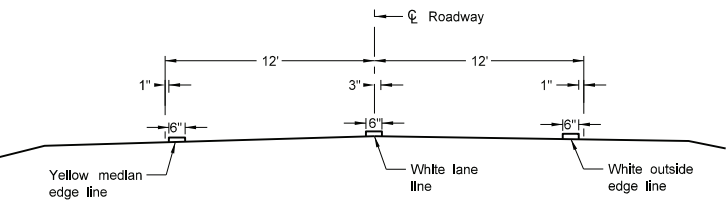


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Asphalt Section

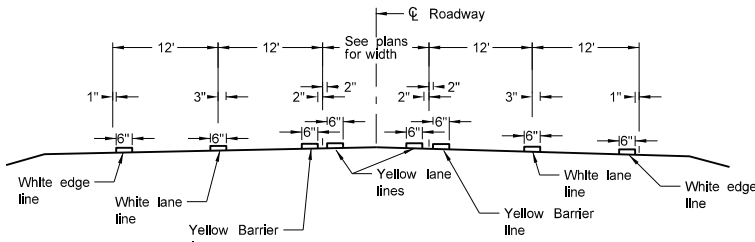


RURAL FIVE LANE ROADWAY
Asphalt Section

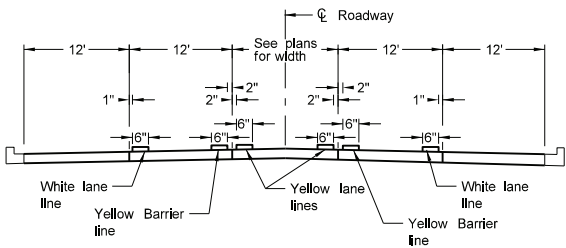


URBAN FIVE LANE SECTION
Concrete Section

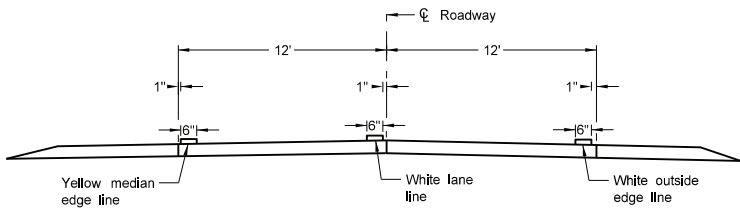


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Concrete Section

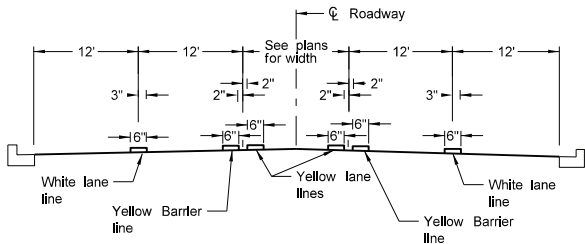


URBAN FIVE LANE SECTION
Asphalt Section

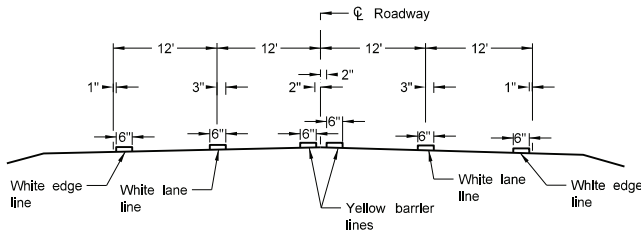


RURAL FOUR LANE ROADWAY
Asphalt Section

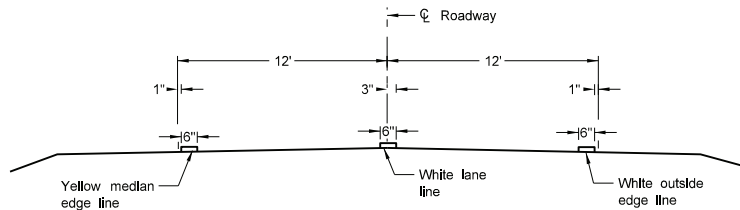


Two Lane Roadway
INTERSTATE HIGHWAY
Asphalt Section

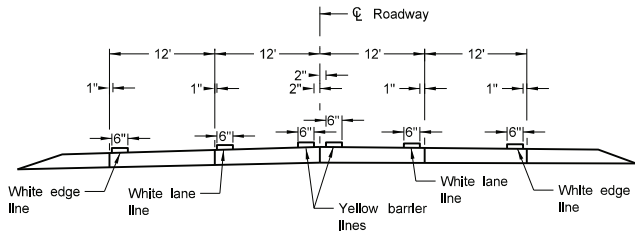


RURAL FOUR LANE ROADWAY
Concrete Section

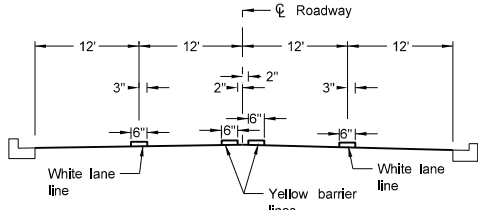

URBAN FOUR LANE SECTION
Asphalt Section

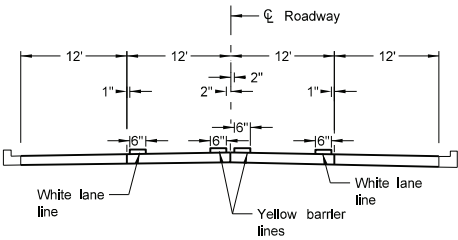

URBAN FOUR LANE SECTION
Concrete Section

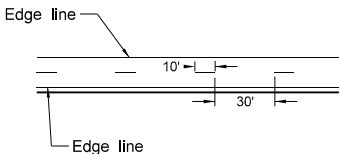

CENTERLINE PAVEMENT MARKING SKIP SPACING DETAIL

- NOTES:
1. Continue edge lines through private drives and field drives. Break edge lines for intersections.


For section lines, county roads, and street approaches, stripe the radii and edge lines of the paved surface within the right of way except where curb and gutter is present.
 2. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
 3. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits < 40 mph.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths.
07-09-24	Modified Note 1.




SHORT-TERM PAVEMENT MARKING


D-762-11

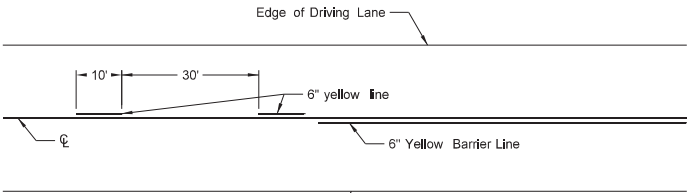


Painted or Tape Lines

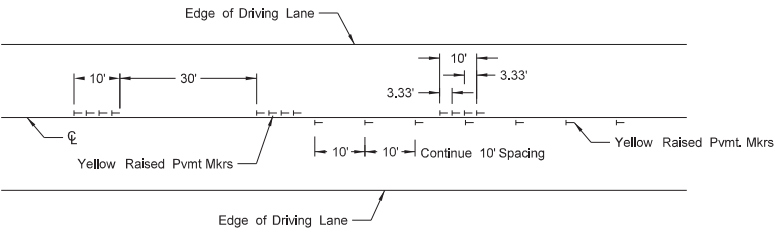


Raised Pavement Markers
TWO-LANE TWO-WAY ROADWAY

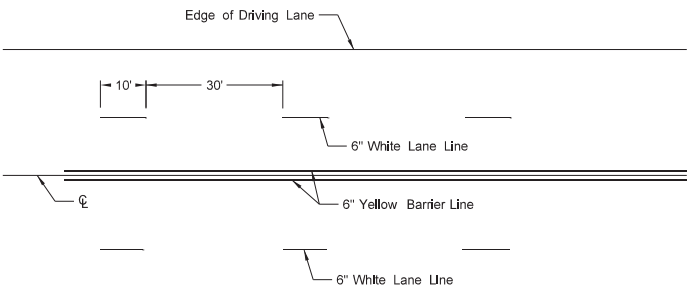


Painted or Tape Lines

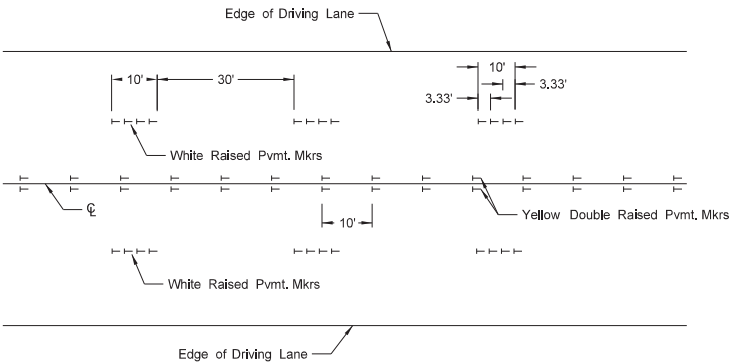


Raised Pavement Markers
FOUR LANE ROADWAY

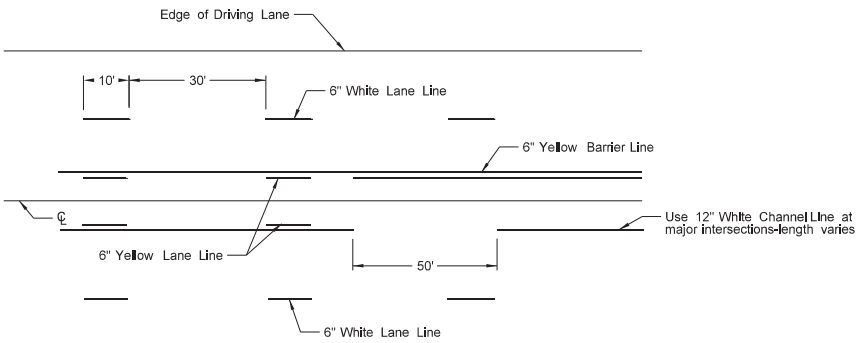


Painted or Tape Lines

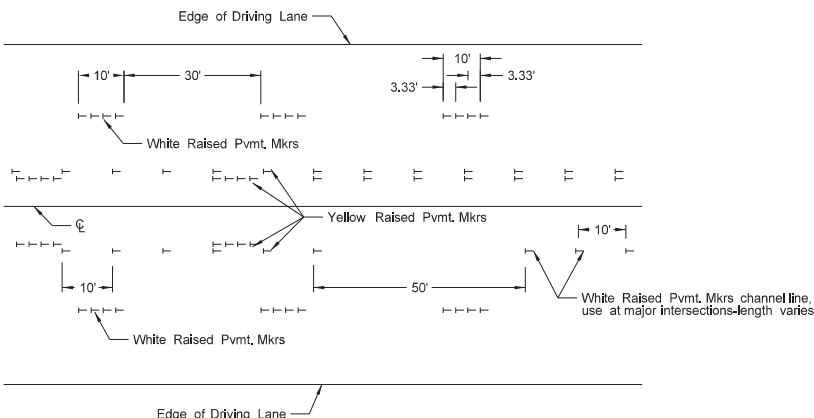

Raised Pavement Markers
FIVE LANE ROADWAY TWO WAY LEFT TURN

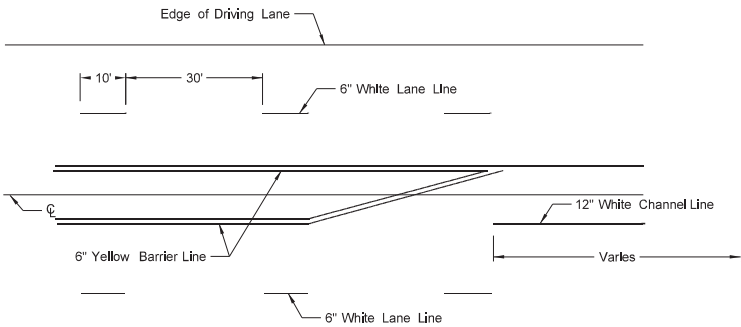

Painted or Tape Lines

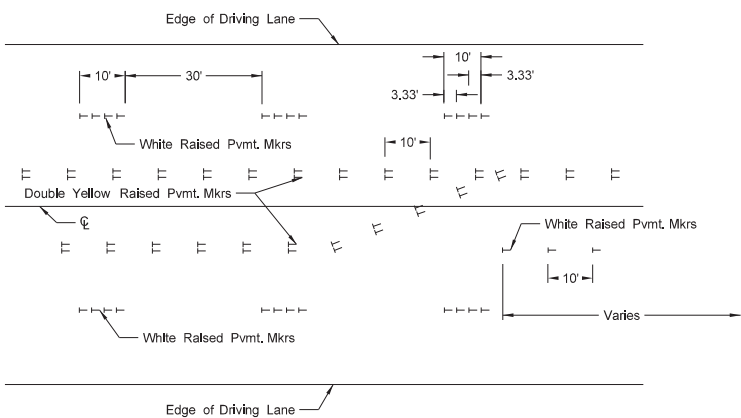

Raised Pavement Markers
FIVE LANE ROADWAY WITH MARKED ISLANDS

- NOTES:
1. Place no passing zones on two-lane two-way roadways as shown. In lieu of short term no passing zone pavement markings, place no passing zone signs. Replace no passing zone signs with short term no passing zone pavement marking within three days.
 2. Place short term center line stripe (paint) on top lift to match exact placement of permanent stripe.
 3. Remove raised markers and tape markings after permanent pavement marking is installed.
 4. Normal width line - 6 inches wide for freeways, expressways, and ramps;
6 inches for all other roadways with speed limits > 40 mph.
 5. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40 mph.
 6. Wide lines - 8 inches wide if 4 inch normal width lines are used and
12 inches wide if 6 inch normal width lines are used.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
3-29-16	Re-numbered to be D-762-11 (previously was D-762-6)
10-17-17	Updated to active voice.
8-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths
1-17-24	Revised wide pvmt marking width.

KIRK J. HOFF

REGISTERED

PROFESSIONAL
PE-4683
01/17/24

ENGINEER
NORTH DAKOTA