

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	HES-5-999(038)	24792	1	1

NORTH DAKOTA



DEPARTMENT OF TRANSPORTATION

HES-5-999(038)

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	7/1/2025
Supplemental Specifications	NONE

Adams, Billings, Bowman, Dunn, Golden Valley,
Hettinger, Mercer, McKenzie, Slope & Stark Counties
Pavement Marking

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
HES-5-999(038) \ PAVEMENT MARKING	N/A	N/A

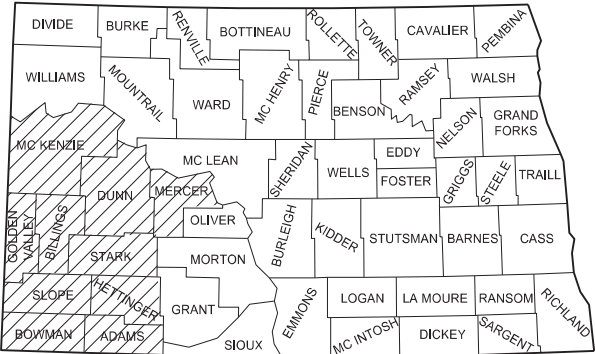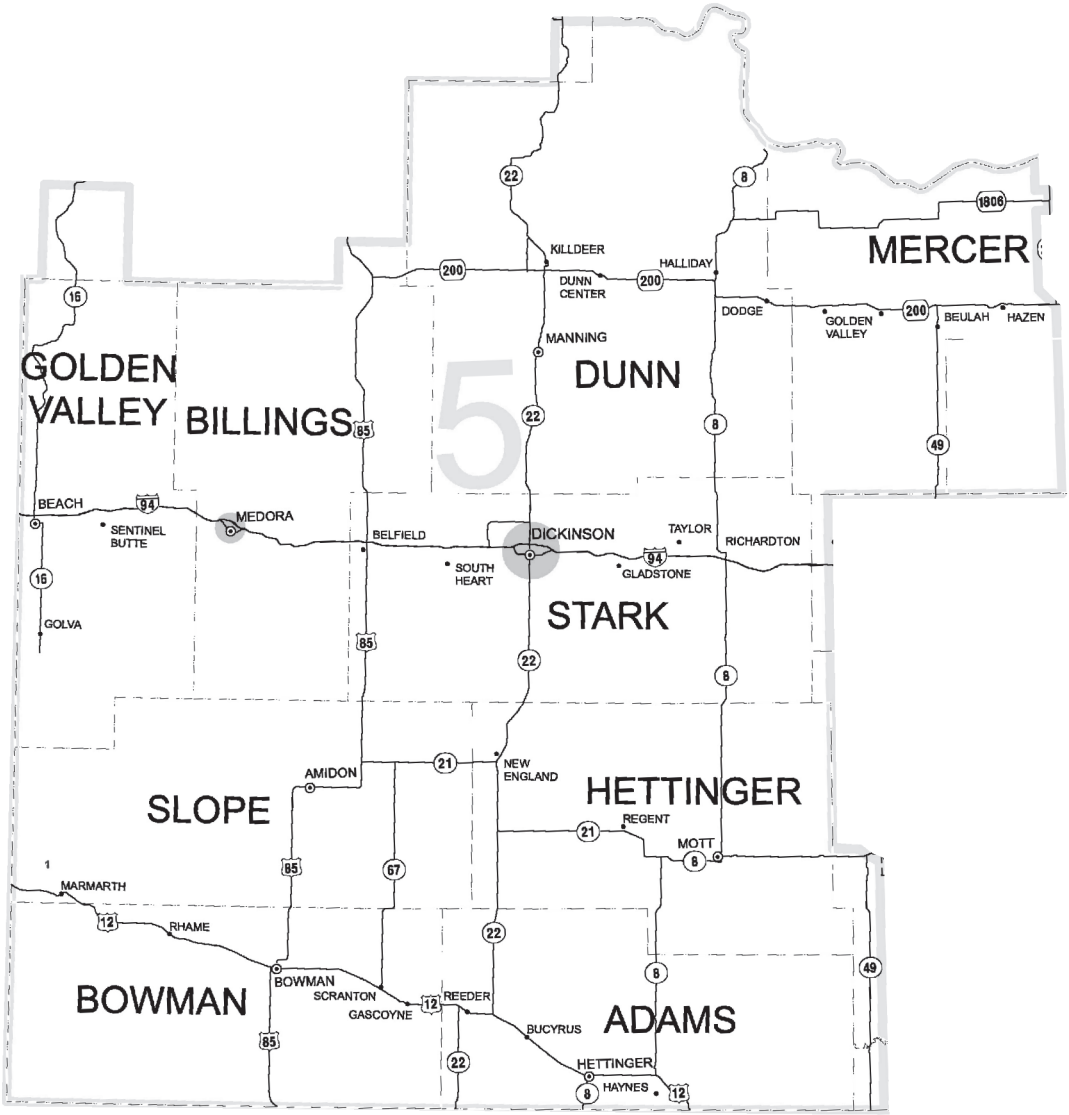

STATE COUNTY MAP

DESIGNER Denis Oyugi
DESIGNER Bonnie Brown
DESIGNER Ben Hanson

ND DEPARTMENT OF TRANSPORTATION DICKINSON DISTRICT	Robert Rayhorn 12/08/25
---	----------------------------

NDDOT DICKINSON DISTRICT

TABLE OF CONTENTS						STATE	PROJECT NO.	SECTION NO.	SHEET NO.
						ND	HES-5-999(038)	2	1
PLAN SECTIONS					LIST OF STANDARD DRAWINGS				
Section	Page(s)	Description	Number	Description					
1	1	Title Sheet	D-101-1, 2, 3, 4	NDDOT Abbreviations					
2	1	Table of Contents	D-101-10	NDDOT Utility Company and Organization Abbreviations					
6	1	Notes	D-101-20, 21	Line Styles					
8	1	Quantities	D-101-30, 31, 32, 33	Symbols					
11	1 - 9	Data Tables	D-704-27	Mobile Operation (Pavement Marking)					
120	1 - 8	Pavement Marking	D-762-1	Pavement Marking Message Details					
			D-762-2	Interstate Pavement Marking 4 Lane Divided Highway					
			D-762-4	Pavement Marking					
			D-762-5	Pavement Marking for Standard 90 Degree Flared Intersection-(No Center Left Turn Lane on Major Road)					
			D-762-6	Pavement Marking for Standard 90 Degree Flared Intersection - (Center Left Turn Lane on Major Road)					

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	HES-5-999(038)	6	1

NOTES

107-P01 RAILROAD COORDINATION: Contractor is to email BNSF a minimum of 7 days prior to working around the RR Crossing. Contractor to retain proof and receipt of email from the RR Company for Records. If Contractor does not receive notice of Receipt from the RR Company, they are to also call and contact the person.

Alexis Jones,
Manager of Public Projects: MN, ND, SD, Manitoba
Alexis.jones@bnsf.com
901-495-3778

107-P02 RAILROAD PROTECTIVE LIABILITY INSURANCE: Include the cost of railroad insurance in the contract to cover the number of crossings for each company identified as follows:

Spec	Code	Unit	Description	Company	# of crossings
107	121	LS	Railway Protection Insurance – COMPANY A	BNSF	5

Upon receiving proof of approval of the policies by the railroad company, the Department will pay the Contractor the lump sum contract unit price.

107-115 RAILROAD PROTECTIVE LIABILITY INSURANCE: This project crosses the BNSF Railway Company at RPs 3.995 on ND 8, 81.030 on ND 8, 74.710 on ND 16, 102.780 on ND 49 and 152.570 on ND 200. The type of work that will be performed within the railroad right of way is pavement markings. Direct inquiries regarding protective liability insurance to:

Rosa Martinez
Marsh USA Inc.
4400 Comerica Bank Tower
1717 Main Street
Dallas, TX 75201-7357, USA
214-303-8519
Rosa.M.Martinez@marsh.com


Obtain information regarding crossing numbers 060460R, 087540M, 394005W, 087813E & 087892T from the Federal Railroad Administration website:
<http://safetydata.fra.dot.gov/Officeofsafety/>

762-P01 PAVEMENT MARKING: Centerline striping through urban areas include but are not limited to these mainline markings; centerline, channel line, crosswalk, stop bar, railroad crossing, and turn arrows. Do not stripe any markings on side streets.

762-P02 PAVEMENT MARKING INSTALLATION: Include the Centerline Skips, Centerline Barriers, 10’ or 2’ Skip lines and Edgelines as shown in Section 120 under the bid item PAVEMENT MK INSTALLATION – 6IN.

762-P03 The engineer will measure and pay for this item in miles.
PAVEMENT MARKING PAINTED 6IN LINE: Include the 6IN Crosswalk lines as shown in Section 120 under the bid item PAVEMENT MK PAINTED 6IN LINE.

762-050 The engineer will measure and pay for this item in linear feet.
PAVEMENT MARKING: If the Engineer and Contractor agree, plan quantity will be used as the measurement for payment for pavement marking items.



ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	HES-5-999(038)	8	1

SPEC CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
-----	-----	----	-----	-----
103	0100 CONTRACT BOND	L SUM	1	1
107	0121 RAILWAY PROTECTION INSURANCE - COMPANY A	L SUM	1	1
107	0140 RAILROAD COORDINATION	L SUM	1	1
702	0100 MOBILIZATION	L SUM	1	1
762	0103 PVMT MK PAINTED-MESSAGE	SF	4,780	4,780
762	0109 PVMT MK INSTALLATION - 6IN	MILE	1,447	1,447
762	1104 PVMT MK PAINTED 4IN LINE	LF	4,457	4,457
762	1106 PVMT MK PAINTED 6IN LINE	LF	339	339
762	1108 PVMT MK PAINTED 8IN LINE	LF	867	867
762	1112 PVMT MK PAINTED 12IN LINE	LF	41,896	41,896
762	1124 PVMT MK PAINTED 24IN LINE	LF	3,818	3,818
762	1140 PVMT MK PAINTED CURB TOP & FACE	LF	54	54

