
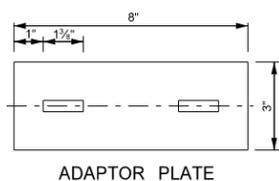
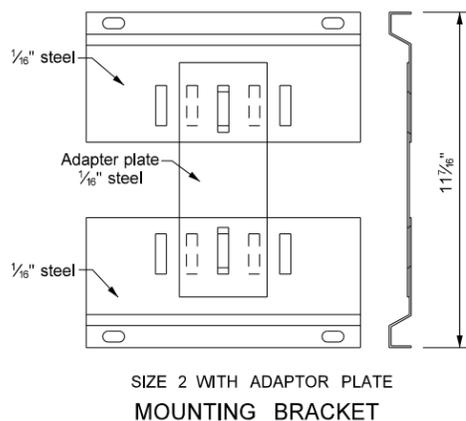
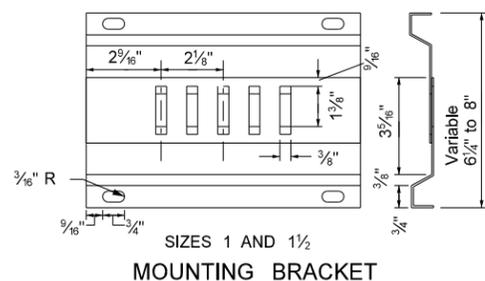
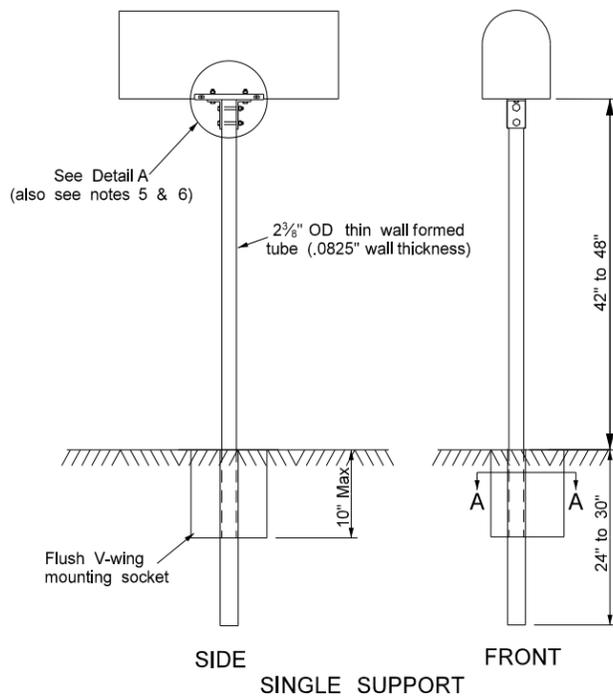
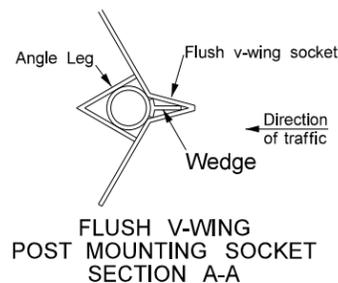
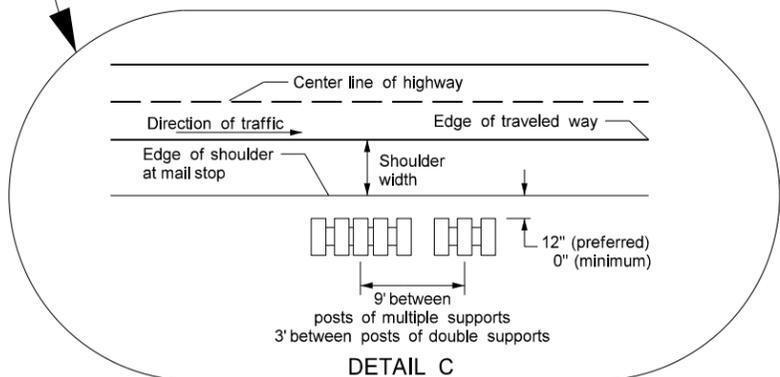
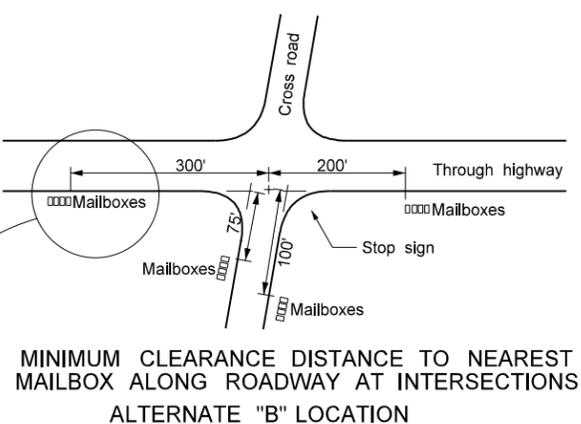


MAILBOX LOCATION DETAILS

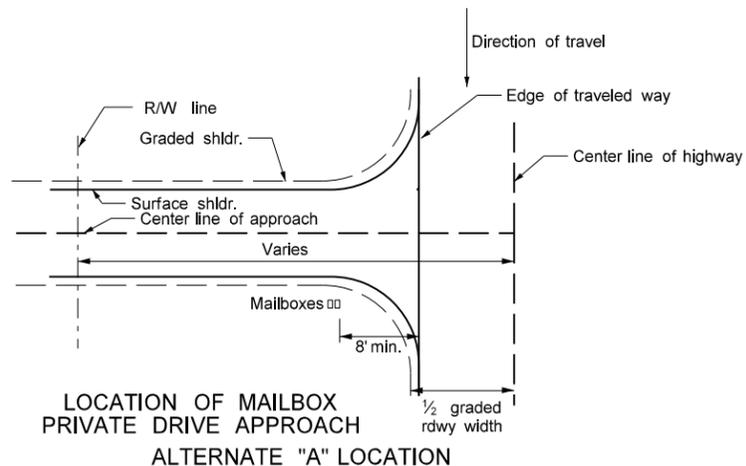

Notes:

- The mailbox support and hardware details shall consist of the "V-Loc Mailbox Support System" manufactured by: Tapco Traffic & Parking Control Co. Inc. Any other equal support system meeting the requirements of NCHRP Report 350, which has been crash tested, and approved by the Federal Highway Administration may be used. Approved alternate mailbox assemblies shall be installed in the manner and arrangement crash tested.
- The preferred location for all mailboxes is the Alternate "A" location. However, the Engineer may approve the Alternate "B" location if warranted by existing field conditions.
- Postal regulations require that mailboxes must be located on the right-hand side of the road in the direction traveled by the carrier. Therefore, the Engineer shall contact the local carrier or postmaster before installing new mailboxes to verify the direction of travel.
- Mailboxes installed on private drive approaches must always be located on the downstream side of the approach.
- Install angle connection parallel to traffic flow for size 2 mailbox mounted on single posts.
- Size 2 mailbox mounted on multiple support requires 2 each, 3/8" by 3/4" bolts with lock washers and nuts to attach the adapter plate to mounting bracket. The unit will then require 4 angle connections to attach to the formed tube support frame. See Detail A.
- Space multiple support frames a minimum of 4 feet apart. Space single support frames a minimum of 3 ft apart. Do not place more than five No. 1 mailboxes, three No. 2 mailboxes, or any combination of four No. 1-A and No. 2 mailboxes on multiple support frames.

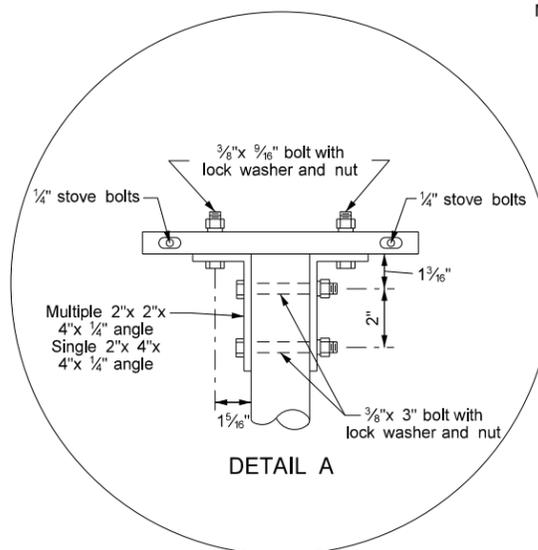
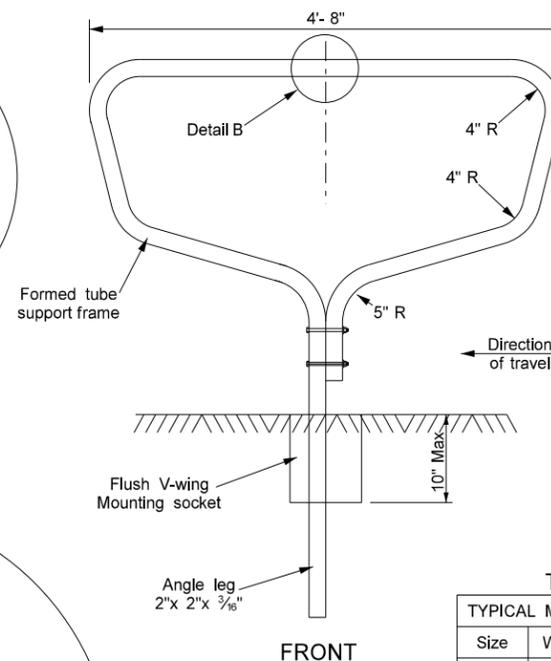
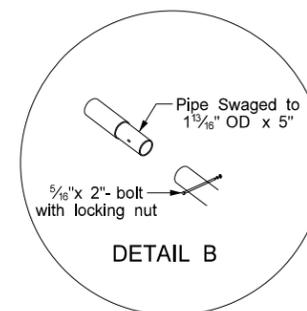


TABLE A
TYPICAL MAILBOX DIMENSIONS

Size	Width	Height	Length
1	6.5"	8.5"	19"
1A	8"	10.5"	21"
2	11.5"	13.5"	23.5"

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
9-15-2010

REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE- 2930 , on 9/15/2010 and the original document is stored at the North Dakota Department of Transportation