CONTRACTOR SIGN DETAIL

D-704-5

SIGN NUMBER	G20-10-108
WIDTH x HEIGHT	9'-0" x 4'-0"
BORDER WIDTH	0.75" (inset 0.5")
CORNER RADIUS	2.25"
MOUNTING	Ground
BACKGROUND	**TYPE:** Diamond Grade
	COLOR: Orange
LEGEND/BORDER	**TYPE:** Non-Refl
	COLOR: Black

SYMBOL	X	Y	WID	HT	ANGLE

STATION(S): **AREA: 36 Sq.Ft.**

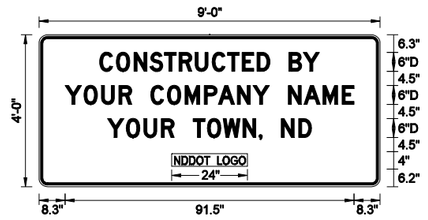

Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITION (X)																		LENGTH	SERIES/SIZE
C	O	N	S	T	R	U	C	T	E	D		B	Y					69.7	D 2000
19.2	24.5	30.1	35.2	39.7	44.4	49.5	54.9	59.7	64.3	69.1	73.8	79.2	83.7						
Y	O	U	R		C	O	M	P	A	N	Y		N	A	M	E		91.5	D 2000
8.3	14.2	19.8	25.3	29.7	35.4	40.7	46.3	52.4	56.8	62.8	67.8	73.2	79	84	90	96.1			
Y	O	U	R		T	O	W	N	,		N	D						64.6	D 2000
21.7	27.7	33.3	38.8	43.2	48.9	53.4	58.4	64.6	69.7	71	76.8	82.3							

Notes:

1. Sign shall be placed a distance of ½A following the End Road Work (G20-2a-48) sign. There shall be a maximum of 2 signs per project.
2. Sign shall be post mounted.
3. Sign required on rural projects with a 30 day or longer duration and it is not required on seal coat projects or other short duration projects.
4. Sign shall not be placed in urban areas or within city limits.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
08-31-06	
REVISIONS	
DATE	CHANGE
01-04-07	Revised sign size

This document was originally issued and sealed by MARK S GAYDOS Registration Number PE- 4518 , on 01/04/07 and the original document is stored at the North Dakota Department of Transportation