

D-762-1



22 S. F.



16 S. F



Note: Rotate merge arrow
20° from edge of roadway.




15 S. F.


NOTES:
See the 2004 standard highway
signs manual for symbol detail

Speed Limit	Chevron Width	Chevron Spacing 45° to Traffic
0-25 mph	8"	5'
30-40 mph	8"	15'
45 mph and above	12"	25'


Chevron Crosshatching Table



Centerline Pavement Marking Skip Spacing Detail

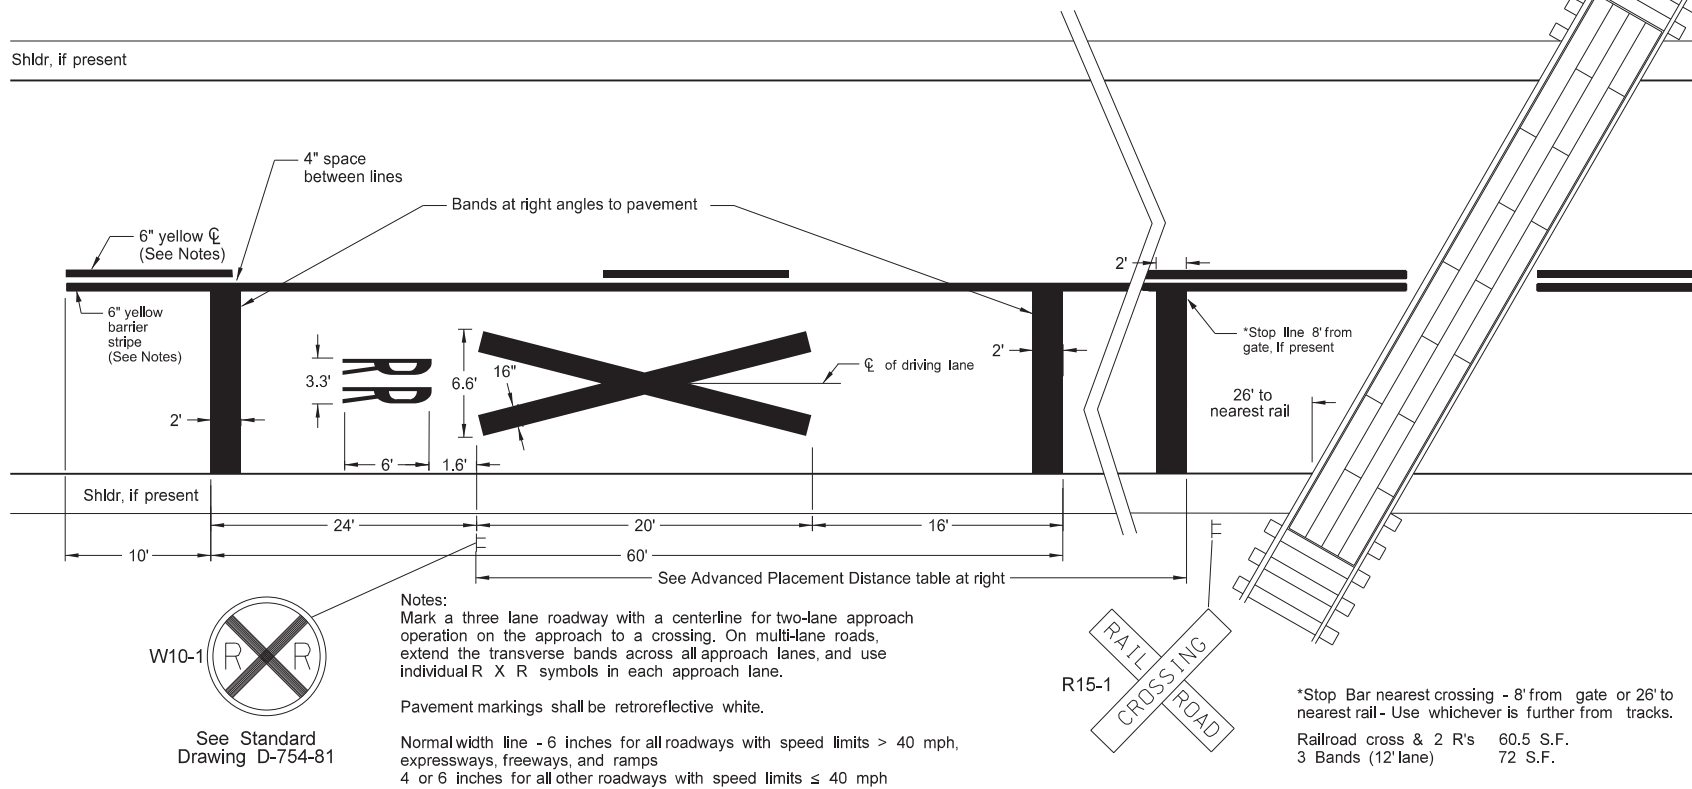

YIELD MARKING



3 S. F. PER TRIANGLE

Advance Placement Distance for Railroad Warning Signs	
Posted or 85th Percentile Speed	Advance Distance
20 mph	115 ft
25 mph	155 ft
30 mph	200 ft
35 mph	250 ft
40 mph	305 ft
45 mph	360 ft
50 mph	425 ft
55 mph	495 ft
60 mph	570 ft
65 mph	645 ft
70 mph	730 ft

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-6-11	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
01-28-20	Revised min Stop Bar distance to rail
11-22-23	Revised pavement marking widths.
10-14-26	Revised to add marking details and update to MUTCD 2023

