




PUNCHING, STRINGER, AND SUPPORT LOCATION DETAILS
FOR REGULATORY, WARNING AND GUIDE BIKE ROUTE SIGNS

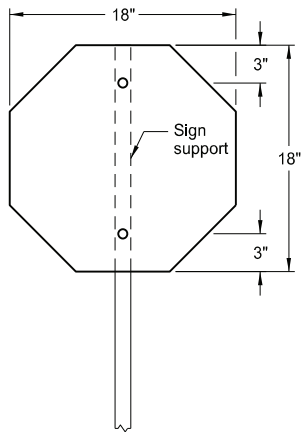


1 Post
Assembly No. 100

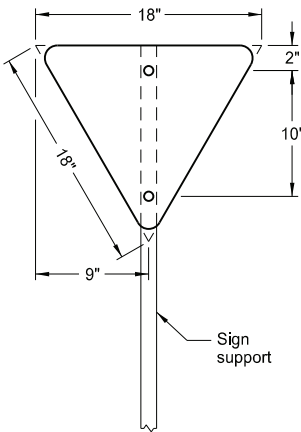


1 Post
Assembly No. 101

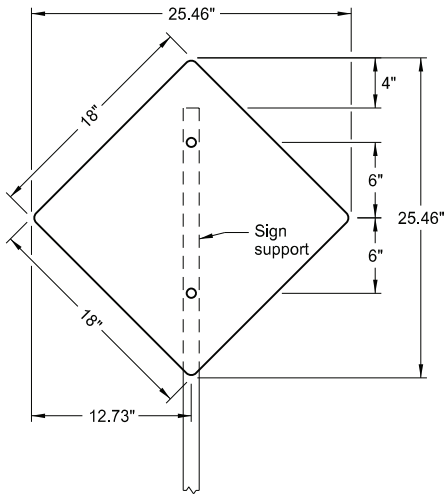



1 Post
Assembly No. 102

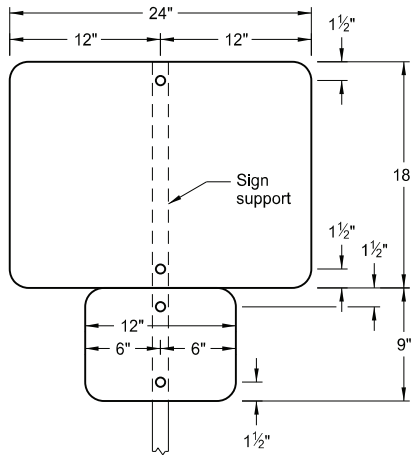


1 Post
Assembly No. 103

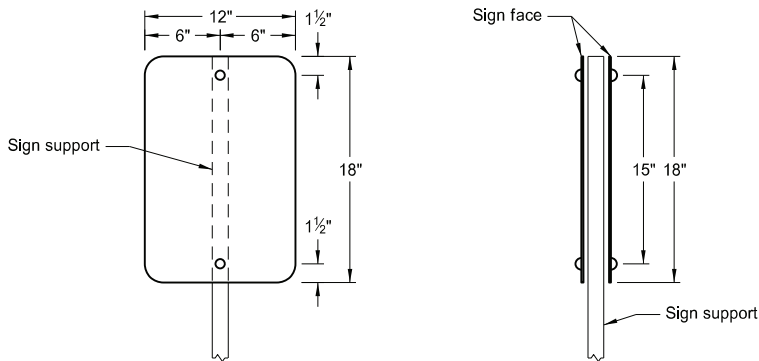



1 Post
back to back
Assembly No. 104

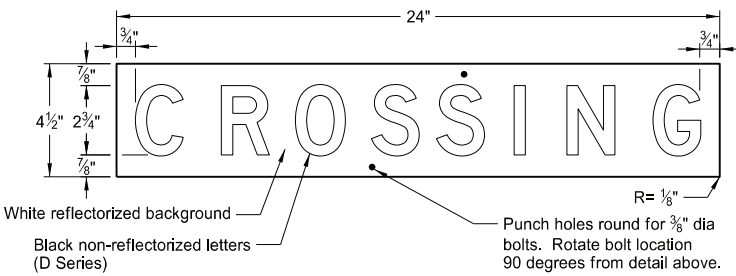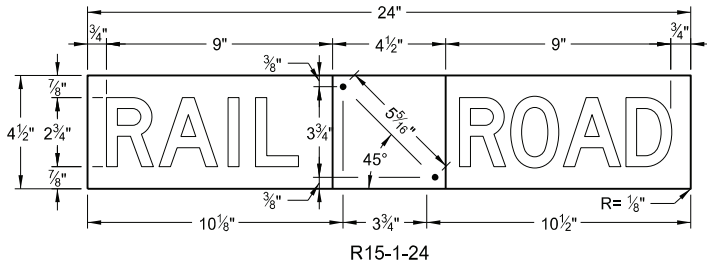


Railroad Crossing Sign Details

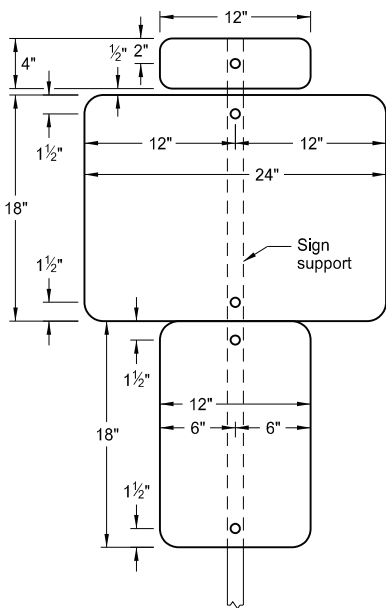



1 Post
back to back
Assembly No. 105

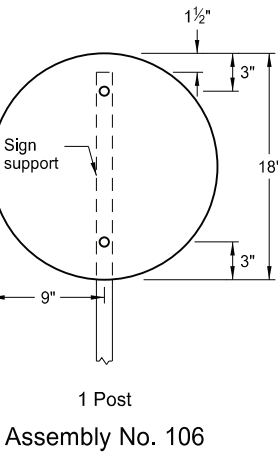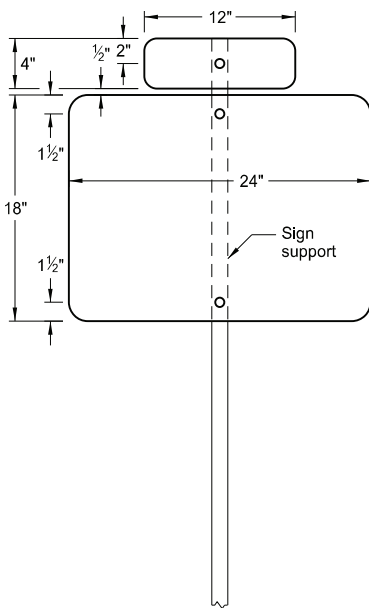

1 Post
Assembly No. 106



1 Post
Assembly No. 107

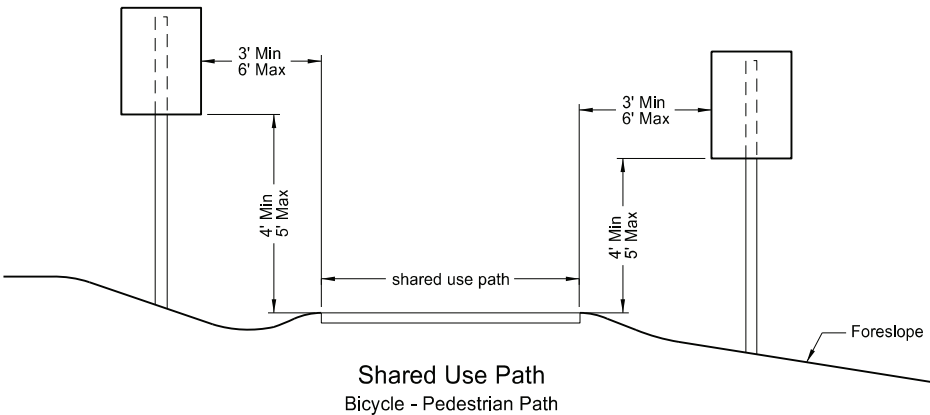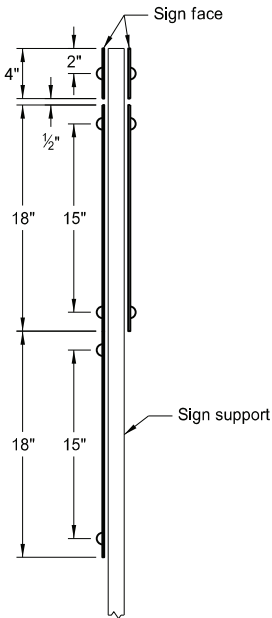

- Notes:
1. Use 0.100 inch minimum thickness sign backing material.
 2. Punch holes round for 3/8 inch bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-22-12	
REVISIONS	
DATE	CHANGE
9-18-15	Revised Title Name.
8-30-18	Updated notes to active voice.
9-04-19	New Design Engineer PE Stamp.
8-07-24	Electronic Stamp/Signature.



08/07/24