NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

MATERIALS AND RESEARCH DIVISION

Experimental Study MR 96-03

Evaluation of the "FiberDowel" Corrosion Proof Dowel Bar System as a Load Transfer Device

Final Report

Project IM-8-029(007)022

September 2001

Preparedby

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION BISMARCK, NORTH DAKOTA www.dot.nd.gov

DIRECTOR

David A. Sprynczynatyk, P.E.

MATERIALS AND RESEARCH DIVISION

Ron Horner, P.E.

Experimental Study MR 96-03

Evaluation of the "FiberDowel" Corrosion Proof Dowel Bar System as aLoad Transfer Device

FINAL REPORT

Project IM-8-029(007)022

September 2001

Writtenby Curtis Dunn Rhaub Walker

Disclaimer

The contents of this report reflect the views of the author or authors who are responsible for the facts and the accuracy of the data presented herein. The contents do not reflect the official views of the North Dakota Department of Transportation or the Federal Highway Administration. This report does not constitute a standard, specification, or regulation.

TABLE OF CONTENTS

| OBJECTIVE 1 | |
|-------------------|---|
| SCOPE 1 | 1 |
| LOCATION | 1 |
| PROJECT HISTORY 2 | 2 |
| Construction | |
| Traffic | |
| DESIGN | |
| CONSTRUCTION | 3 |
| EVALUATION 4 | 1 |
| COST | |
| SUMMARY | 7 |
| RECOMMENDATION | 3 |

Evaluation of the "FiberDowel" Corrosion Proof Dowel Bar System as a Load Transfer Device

Objective

The objective of this study will be to determine if a dowel bar composed of continuous fiberglass filaments and polyester resin will prevent faulting from recurring in jointed concrete pavement as well as serve as a corrosion free device.

<u>Scope</u>

In 1995, the North Dakota Department of Transportation incorporated a test section containing a corrosion proof dowel bar system called "FiberDowel" as a load Transfer Device.

These "FiberDowel" bars are located adjacent to the plain Grade 60 dowel bar test sections. Both of these test sections were incorporated into project IM-8-029(007)022.

The "FiberDowel" bars will be evaluated similar to the steel dowel bars and the results of both test sections will be compared.

Evaluating items such as monitoring of distresses around the dowel bars and nondestructive deflection testing of load transfer across the doweled joints will be evaluated annually. The non-destructive deflection testing will be accomplished with the use of a falling weight deflectometer.

Location

Project IM-8-029(007)022 is located on the I-29 northbound lanes from the Mooreton Interchange to the Christine Interchange. The project length is 22.1 miles. The "FiberDowel" dowel retrofit test sections are located at mile marker 35.

1

Project History

Construction

Table 1 shows the history of the pavement section near mile marker 35 located between ND 13 and the Colfax Separation, northbound.

| Year Constructed | Type of Construction | Depth (in.) | Rdwy Width (ft.) |
|---------------------|-------------------------------|-------------|---------------------|
| 1974 | Grade | - | 48 |
| 1975 | Lime Treated Subgrade | 6 | 48 |
| 1975 | Plant Mix Bit. Base 85-100 | 2 | 41 |
| 1975 | Plain Jointed P.C.C. | 9 | 27 |
| 1975 | 16 Foot Joints | - | |
| 1975 | 75 P.C.C.Shoulders | | 10 |
| 1995 | 1995 Grinding | | 18 |
| 1995 | Concrete Pavement Repair | - | 37 |
| 1996 | 96 DowelBarRetrofit | | - |

Table 1. Project History

Traffic

Traffic estimates for project IM-8-029(007)022, between ND 13 and the Colfax

Separation, northbound are shown in table 2. The ESAL'S annual percent growth rate is 2.5%.

| YEAR | PASS>CAR | TRUCKS | TOTAL | MAXHR | RIGID ESALS |
|------|----------|--------|-------|-------|-------------|
| 1997 | 1,820 | 420 | 2,240 | 280 | 575 |
| 1998 | 1,950 | 550 | 2,500 | 250 | 765 |

Table 2. Traffic Estimates

<u>Design</u>

The design of the "FiberDowel" dowel bar retrofit sections is similar to the original design used for the plain steel dowel bar retrofit sections, except that no bond breaking material is needed.

The patch mix used on this project was a proprietary mix manufactured by FOSROC. This mix was called Patchroc 10-60.

Construction

Installation of the "FiberDowel" dowel bar retrofit sections was performed on 7/16/96. The prime contractor was Highway Services. The installation of the "FiberDowel" bars required no different techniques as compared to the installation of the plain steel dowel bars. Bond breaking materials were needed for the plain steel dowel bars. The "FiberDowel" bars were supplied by RJD Industries, Inc. Twelve samples were supplied of the companies FD1500 bars, 1½ "nominal diameter by 18" long to be used.

Patchroc 10-60 was used as the patch mix material. The material was extended with 40 lbs of Class 43 chips for every 50 pounds of Patchroc 10-60. The material, when placed, registered a slump of approximately 7.5 inches. There were no major difficulties with the installation process.

Prior to construction, the test sections were analyzed with the falling weight deflectometer (FWD) on 06/24/96 to determine a percentage of load transfer with no dowel bars present.

After construction was completed, the same joints were tested on 07/23/96 to determine the percentage of load transfer after the dowel bars were installed. The first five joints north of mile marker 35 were tested which included the two joints containing the "FiberDowel" dowel bars and three joints containing the plain dowel bars for comparison purposes. The results of the FWD analysis for load transfer before and after construction is shown in table 3 on the following page.

| | | PERCENTAGE OF LOAD TRANSFER (%) | | |
|---------|----------------------|---------------------------------------|--------------------------------------|--|
| STATION | TYPE OF DOWEL BAR | BEFORE INSTALLATION (6-24-1996) | AFTER INSTALLATION (7-23-1996) | |
| 35.0007 | Steel | 28 | 100 | |
| 35.0024 | Fiber | 30 | 72 | |
| 35.0042 | Steel | 26 | 89 | |
| 35.0058 | Fiber | 26 | 67 | |
| 35.0072 | Steel | 26 | 85 | |

Table 3. Results from FWD analysis

From the data presented the plain steel dowel bars are exhibiting an average of approximately 20% greater load transfer per joint shortly after construction.

Evaluation

Materials and Research visited the test site on 9/12/01. Photo 1 depicts a view of a typical dowel bar slot where fiber dowels were installed. Notice also in photo 1 the distresses present near the joints. It is believed that the

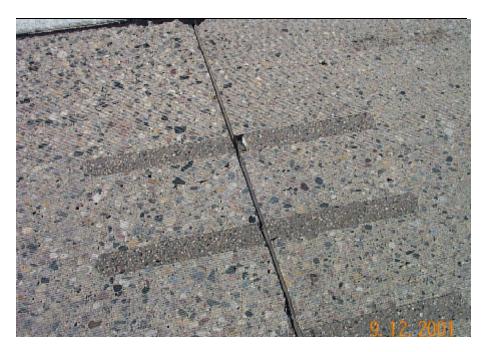


Photo 1. A view of a typical test joint where "Fiberdowel" bars were installed.

distresses present were caused by a possible core board failure.

Photo 2 depicts a view of a typical dowel bar slot where steel dowels were installed. Some raveling and spalling were noted. Again distresses were present near the joint which could be related to a possible core board failure.



Photo 2. A view of a typical test joint where Steel bars were installed.

Visibly, there appeared to be no difference between the steel and fiber dowel bar sections.

Table 4 tabulates 1997,1998 and 2001 FWD analysis which shows load transfer percentages for the "FiberDowel" slots vs. the joints where steel dowel bars are used.

| | | PERCENTAGE OF LOAD TRANSFER (% | | | |
|---------|----------------------|--------------------------------|------|------|------|
| STATION | TYPE OF DOWEL BAR | | | | |
| | | AFTER INSTALLATION | 1997 | 1998 | 2001 |
| 35.0007 | Steel | 100 | 96 | 98 | 98 |
| 35.0024 | Fiber | 72 | 50 | 49 | 42 |
| 35.0042 | Steel | 89 | 95 | 95 | 96 |
| 35.0058 | Fiber | 67 | 59 | 44 | 49 |
| 35.0072 | Steel | 85 | 96 | 96 | 97 |

 Table 4. Load Transfer Data

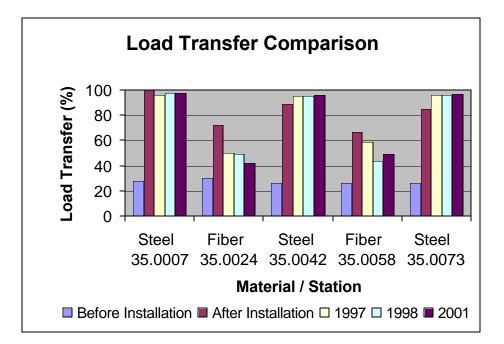


Chart 1. Load Transfer Comparison

FWD analysis shown in Table 4 on the previous page indicates the slots containing "FiberDowel" bars are registering significantly less load transfer percentages when compared to the slots containing regular steel bars. It appears that after the initial drop in load transfer percentages shown in 1997 that the joints containing the "FiberDowel" bars have leveled off. Chart 1 illustrates the load transfer comparison by material.

<u>Cost</u>

2001 price quotes for 1½ "X 18" "FiberDowel" bars are approximately \$6.00 per bar. 2001 price quotes for 1½ "X 18" plain steel dowel bars are approximately \$2.69 per bar. These costs do not reflect shipping or installation costs.

<u>Summary</u>

The retrofitting of "FiberDowel" bars as load transfer devices is similar to that of plain steel dowel bars except for the absence of epoxy coating or bond breaking material.

Post construction FWD analysis showed the joints retrofitted with plain steel dowel bars initially exhibited approximately 20% greater load transfer than the corresponding joints retrofitted with "FiberDowel" bars.

FWD analysis taken during the 1997/1998/2001 seasons indicate the joints retrofitted with plain steel dowel bars are performing well and are registering nearly twice the load transfer percentages than the corresponding joints retrofitted with "FiberDowel" bars.

7

Recommendation

The use of "FiberDowel" bars may prove to be less corrosive over time. However, the loss of load transfer experienced when compared to plain steel dowel bars coupled with significantly higher costs far outweigh any advantages. It is not recommended that "FiberDowel" bars be used as an option on dowel bar retrofit projects.