





D-754-69

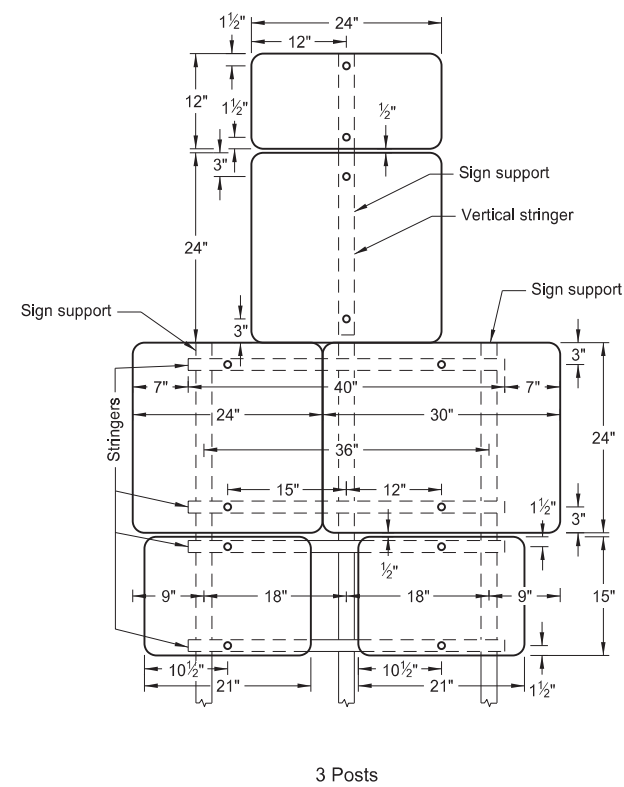


ASSEMBLY NO. 425

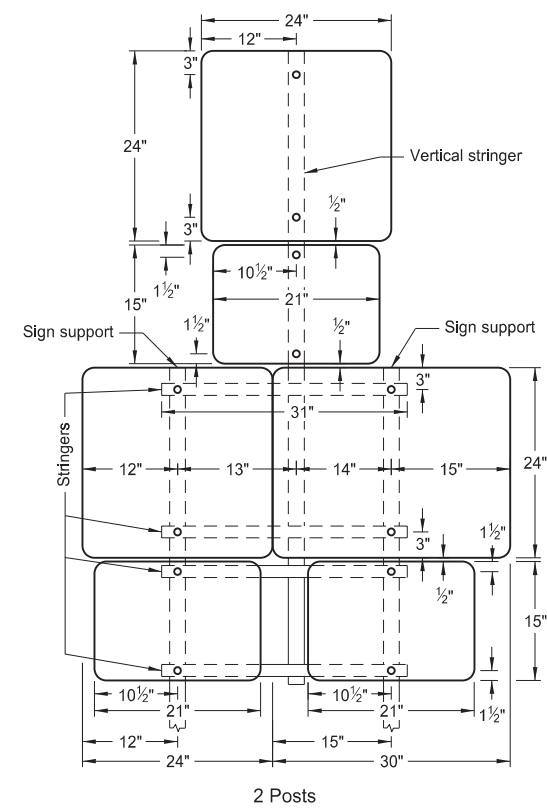

ASSEMBLY NO. 426

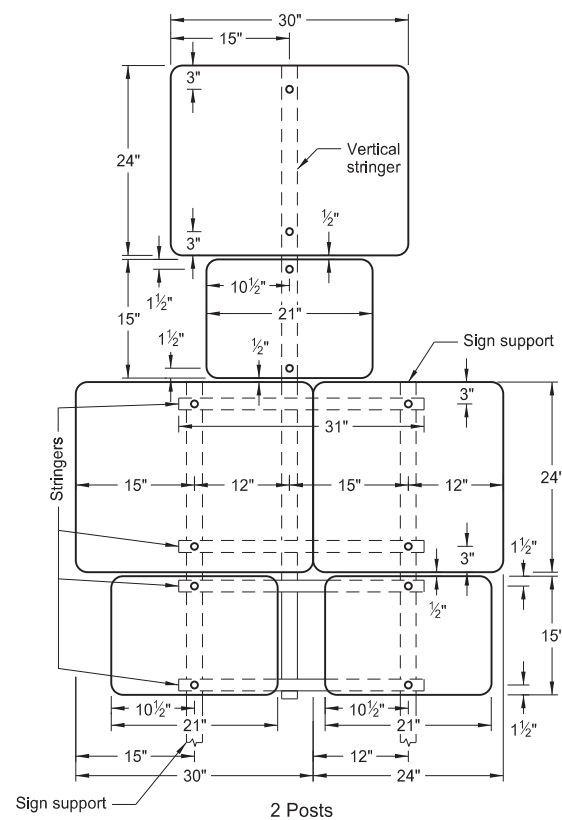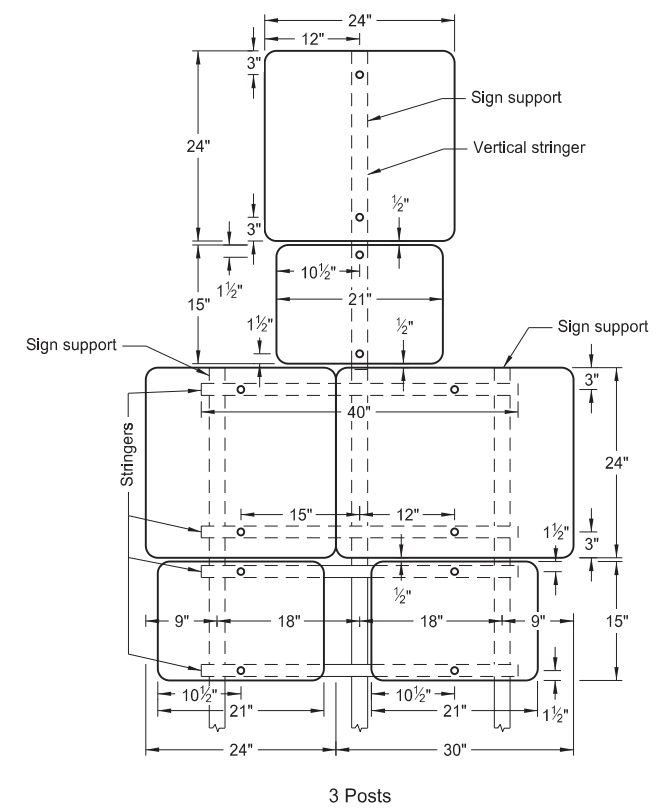

ASSEMBLY NO. 427

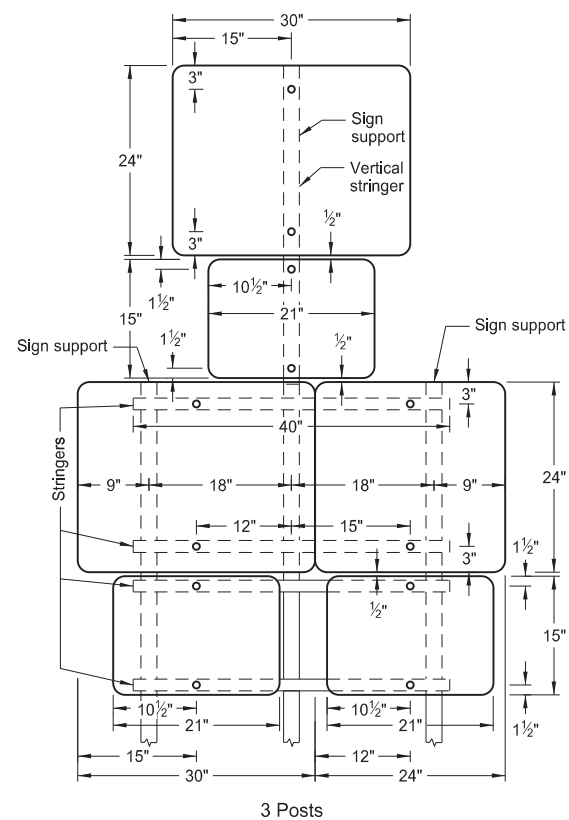

- Notes:
1. Use 0.100 inch minimum thickness sign backing material.
 2. Use 1½"x1½" perforated square tube stringers.
 3. Punch holes round for ⅜" bolt.

NORTH DAKOTA	
DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE
8-30-18	Updated notes to active voice.
10-25-19	Punching/Sign spacing correction,
8-08-24	Electronic Stamp/Signature.



08/08/24