Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.
Abn	abandoned
Abut	abutment
Adj	adjusted
Aggr	aggregate
Ahd	ahead
ARV	air release valve
Align	alignment
Al	alley
Alt	alternate
Alum	aluminum
ADA	Americans with Disabilities Act
&	and
Appr	approach
Approx	approximate
ACP	asbestos cement pipe
Asph	asphalt
AC	asphalt cement
Assmd	assumed
@	at
Atten	attenuation
ATR	automatic traffic recorder
Ave	Avenue
Avg	average
ADT	average daily traffic
Bk	back
BF	back face
Balc	balcony
B Wire	barbed wire
Barr	barricade
Btry	battery
BI	beehive inlet
Beg	begin
BG	below grade
BM	bench mark
Bkwy	bikeway
Bit	bituminous
Blk	block
BH	bore hole
Bot	bottom
Blvd	Boulevard
Bndry	boundary
Brkwy	breakaway
Br	bridge
Bldg	building
Bus.	business
BV	butterfly valve
Byp	bypass
C Gdrl	cable guardrail
Calc	calculate
CIP	cast iron pipe
CB	catch basin
CRS	cationic rapid setting
C Gd	cattle guard
C To C	center to center
CL or ℄	centerline
Ch	chain
Chnlk	chain-link
Ch Blk	channel block
Ch Ch	channel change
Chk	check
Chsld	chiseled
Cir	circle
Cl	class
Clnt	clean-out
Clr	clear
Cl&gr	clearing & grubbing
Comb.	combination
Coml	commercial
Compr	compression
CADD	computer aided drafting & design
Conc	concrete
CECB	concrete erosion control blanket
Cond	conductor
Const	construction
Cont	continuous
CSB	continuous split barrel sample
Contr	contraction
Contr	contractor
CP	control point
Coord	coordinate
Cor	corner
Corr	corrected
CAES	corrugated aluminum end section
CAP	corrugated aluminum pipe
CMES	corrugated metal end section
CMP	corrugated metal pipe
CPVCP	corrugated poly-vinyl chloride pipe
CSES	corrugated steel end section
CSFES	corrugated steel flared end section
CSP	corrugated steel pipe
CSTES	corrugated steel traversable end section
Co	County
Crse	course
Ct	Court
Xarm	cross arm
Xbuck	cross buck
Xsec	cross sections
Xing	crossing
Xrd	crossroad
Crn	crown
Culv	culvert
C&G	curb & gutter
CI	curb inlet
CR	curb ramp
C	cut
Dd Ld	dead load
Defl	deflection
Defm	deformed
Dlnt	delineate
Dlntr	delineator
Depr	depression
Desc	description
Det	detail
DWP	detectable warning panel
Dtr	detour
Dia or ø	diameter
Dir	direction
Dist	distance
DM	disturbed material
DB	ditch block
DG	ditch grade
Dbl	double
Dn	down
Dwg	drawing
Dr	drive
Drwy	driveway
DI	drop inlet
D	dry density
Ea	each
Esmt	easement
E	East
EB	Eastbound
Elast	elastomeric
EL	electric locker
E Mtr	electric meter
EVSE	electric vehicle supply equipment
Elec	electric/al
EDM	electronic distance meter
Elev or El	elevation
Ellipt	elliptical
Emb	embankment
Emuls	emulsion/emulsified
ES	end section
Engr	engineer
ESS	environmental sensor station
Eq	equal
Evgr	evergreen
Exc	excavation
Exst	existing
Exp	expansion
Expy	Expressway
E	external of curve
Extru	extruded
FOS	factor of safety
Fed	Federal
FP	feed point
Fn	fence
Fn P	fence post
FO	fiber optic
FD	field drive
F	fill
FAA	fine aggregate angularity
FH	fire hydrant
Fl	flange
Flrd	flared
FES	flared end section
F Bcn	flashing beacon
FA	flight auger sample
FL	flow line
Ftg	footing
FM	force main
Fnd	found
Fdn	foundation
Frac	fractional
Frwy	freeway
Frt	front
FF	front face
F Disp	fuel dispenser
FFP	fuel filler pipes
FLS	fuel leak sensor
Furn	furnish/ed

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

Galv	galvanized
Gar	garage
Gs L	gas line
G Reg	gas line regulator
GMV	gas main valve
G Mtr	gas meter
GSV	gas service valve
GVP	gas vent pipe
GV	gate valve
Ga	gauge
Gov	government
Grd	graded/grade
Grnd	ground
GWM	ground water monitor
Gdrl	guardrail
Gtr	gutter
H Plg	H piling
Hdwl	headwall
Ht	height
Hel	helical
HDPE	high density polyethylene
HM	high mast
HP	high pressure
HPS	high pressure sodium
HTCG	high tension cable guardrail
Hwy	highway
Hor	horizontal
HBP	hot bituminous pavement
HMA	hot mix asphalt
Hyd	hydrant
Ph	hydrogen ion content
Id	identification
Incl	inclinometer tube
IMH	inlet manhole
ID	inside diameter
Inst	instrument
Intchg	interchange
Intmdt	intermediate
Intscn	intersection
Inv	invert
IP	iron pipe
Jt	joint
Jct	junction
Ln	lane
Lg	large
Lat	latitude
Lt	left
Lens	lenses
Lvl	level
Lvlng	leveling
Lht	light
LP	light pole
Ltg	lighting
Liq	liquid
LL	liquid limit
Loc	location
Long.	longitude
Lp	loop
LD	loop detector
Lum	luminaire
Mb	mailbox
ML	main line
MH	manhole
Mkd	marked
Mkr	marker
Mkg	marking
MA	mast arm
Matl	material
Max	maximum
Meas	measure
Mdn	median
MD	median drain
MC	medium curing
MGS	Midwest Guardrail System
MM	mile marker
MP	mile post
Min	minimum
Misc	miscellaneous
Mon	monument
Mnd	mound
Mtbl	mountable
Mtd	mounted
Mtg	mounting
Mk	muck
Neop	neoprene
Ntwk	network
N	North
NE	Northeast
NW	Northwest
NB	Northbound
No. or #	number
Obsc	obscure(d)
Ocpd	occupied
Ocpy	occupy
O/s	offset
OC	on center
C	one dimensional consolidation
OC	organic content
Orig	original
O To O	out to out
OD	outside diameter
OH	overhead
PMT	pad mounted transformer
Pg	pages
Pntd	painted
Pr	pair
Pnl	panel
Pk	park
PSD	passing sight distance
Pvmt	pavement
Ped	pedestal
Ped	pedestrian
PPP	pedestrian pushbutton post
Pen.	penetration
Perf	perforated
Per.	perimeter
Perm	permanent
PL	pipeline
Pl	place
P&P	plan & profile
PL	plastic limit
Pl or ℄	plate
Pt	point
PE	polyethylene
PVC	polyvinyl chloride
PCC	Portland Cement concrete
PP	power pole
Preempt	preemption
Prefab	prefabricated
Prfmd or Pref	preformed
Prep	preperation
Press.	pressure
PRV	pressure relief valve
Prestr	prestressed
Pvt	private
PD	private drive
Prod.	production/produce
Prog	programmed
Prop.	property
Ppsd	proposed
PB	pull box
Qty	quantity
Qtr	quarter
Rad or R	radius
RR	railroad
Rlwy	railway
Rsd	raised
RC	rapid curing
Rec	record
Rcy	recycle
RAP	recycled asphalt pavement
RPCC	recycled portland cement concrete
Ref	reference
R Mkr	reference marker
RM	reference monument
RP	reference point
Refl	reflectorized
RCB	reinforced concrete box
RCES	reinforced concrete end section
RCFES	reinforced concrete flared end section
RCP	reinforced concrete pipe
RCPS	reinforced concrete pipe sewer
RCTES	reinforced concrete traversable end section
Reinf	reinforcement
Res	reservation
Res	residence
Ret	retaining
Rev	reverse
Rt	right
R/W	right of way
Riv	river
Rd	road
Rdbd	road bed
Rdwy	roadway
RWIS	roadway weather information system
Rk	rock
Rt	route

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

Salv	salvage(d)
San	sanitary sewer line
Sec	section
SL	section line
Sep	separation
Seq	sequence
Serv	service
Sht	sheet
Shtng	sheeting
Shldr	shoulder
Sw or Sdwk	sidewalk
SD	sight distance
SN	sign number
Sig	signal
Sgl	single
SRCP	slotted reinforced concrete pipe
SC	slow curing
SS	slow setting
Sm	small
S	South
SE	Southeast
SW	Southwest
SB	Southbound
Sp	spaces
Spcl	special
SA	special assembly
SP	special provisions
G	specific gravity
Spk	spike
SB	split barrel sample
SH	sprinkler head
SV	sprinkler valve
Sq	square
Stk	stake
Std	standard
N	standard penetration test
Std Specs	standard specifications
Stm L	steam line
SEC	steel encased concrete
SMA	stone matrix asphalt
SSD	stopping sight distance
SD	storm drain
St	street
SPP	structural plate pipe
SPPA	structural plate pipe arch
Str	structure
Subd	subdivision
Sub	subgrade
Sub Prep	subgrade preperation
Ss	subsoil
SS	supplement specification
Supp	supplemental
Surf	surfacing
Surv	survey
Sym	symmetrical

Tel	telephone
Tel B	Telephone Booth
Tel P	telephone pole
Tv	television
Temp	temperature
Temp	temporary
TBM	temporary bench mark
T	thinwall tube sample
Ts	topsoil
Traf	traffic
TSCB	traffic signal control box
Tr	trail
Transf	transformer
Trans	transition
TT	transmission tower
TES	traversable end section
Trans	transverse
Trtd	treated
Trmt	treatment
Qc	triaxial compression
TERO	tribal employment rights ordinance
Tpl	triple
Typ	typical
Qu	unconfined compressive strength
Ugrnd	underground
Util	utility
VG	valley gutter
Vap	vapor
Vert	vertical
VCP	vitrified clay pipe
Vol	volume
VSFS	vehicle speed feedback sign
Wkwy	walkway
W	water content
WGV	water gate valve
WL	water line
WM	water main
WMV	water main valve
W Mtr	water meter
WSV	water service valve
WW	water well
Wrng	wearing
WIM	weigh in motion
W	west
WB	westbound
Wrng	wiring
W/	with
W/o	without

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFFA
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in.	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International
T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CC	closing corner
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
MC	meander corner
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
SC	standard corner
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WC	witness corner
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added - Continued from D-101-3
4-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

LINE STYLES

D-101-20

Existing Topography

- Existing Ground Void
- Existing Cemetary Boundary
- Existing Box Culvert Bridge
- Existing Concrete Surface
- Existing Drainage Structure
- Existing Gravel Surface
- Existing Riprap
- Existing Dirt Surface
- Existing Asphalt Surface
- Existing Tie Point Line
- Existing Railroad Centerline
- Existing Guardrail Cable
- Existing Guardrail Metal
- Existing Edge of Water
- Existing Fence
- Existing Railroad
- Existing Field Line
- Exst Flow
- Existing Curb
- Existing Valley Gutter
- Existing Driveway Gutter
- Existing Curb and Gutter
- Existing Mountable Curb and Gutter

- Existing 3-Cable w Posts
- Site Boundary
- Existing Berm, Dike, Pit, or Earth Dam
- Existing Ditch Block
- Existing Tree Boundary
- Existing Brush or Shrub Boundary
- Existing Retaining Wall
- Existing Planter or Wall
- Existing W-Beam Guardrail with Posts
- Existing Railroad Switch
- Gravel Pit - Borrow Area
- Existing Wet Area-Vegetation Break
- Existing High Tension Cable Guardrail
- Existing High Tension Cable Guardrail with Posts

Proposed Topography

- 3-Cable w Posts
- Flow
- Fence
- Remove Line (REMOVE — REMOVE)
- Wall
- Retaining Wall (Plan View)
- W-Beam w Posts
- High Tension Cable Guardrail with Posts

Existing Utilities

- Existing Electrical (E)
- Existing Fiber Optic Line (FO)
- Existing TV Fiber Optic (FO)
- Existing Gas Pipe (G)
- Existing Overhead Utility Line (OH)
- Existing Power
- Existing Fuel Pipeline (P)
- Existing Undefined Above Ground Pipe Line (PL)
- Existing Sanitary Sewer (SAN)
- Existing Sanitary Force Main (SAN FM)
- Existing Storm Drain (SD)
- Existing Storm Drain Force Main (SD FM)
- Existing Culvert
- Existing Telephone Line (T)
- Existing TV Line (TV)
- Existing Water or Steam Line (W)
- Existing Under Drain
- Existing Slotted Drain
- Existing Conduit
- Existing Conductor
- Existing Down Guy Wire Down Guy
- Existing Underground Vault or Lift Station

Proposed Utilities

- 24 Inch Pipe
- Reinforced Concrete Pipe
- Under Drain
- Edge Drain

Traffic Utilities

- Conductor
- Fiber Optic
- Existing Loop Detector
- Existing Double Micro Loop Detector
- Micro Loop Detector Double
- Existing Micro Loop Detector
- Micro Loop Detector
- Signal Head with Mast Arm
- Existing Signal Head with Mast Arm

Sign Structures

- Existing Overhead Sign Structure
- Existing Overhead Sign Structure Cantilever
- Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

LINE STYLES

D-101-21

Right Of Way

- Easement
- Existing Easement
- Right of Way
- Existing Right of Way
- Existing Right of Way Railroad
- Existing Right of Way Not State Owned
- Existing Government Lot Line
- Existing Adjacent Block Lines
- Existing Adjacent Lot Lines
- Existing Adjacent Property Line
- Existing Adjacent Subdivision Lines
- Sight Distance Triangle Line
- Dimension Leader

Boundary Control

- Existing City Corporate Limits or Reservation Boundary
- Existing State or International Line
- Existing Township
- Existing County
- Existing Section Line
- Existing Quarter Section Line
- Existing Sixteenth Section Line
- Existing Centerline
- Tangent Line

Cross Sections and Typicals

- Existing Ground
- Existing Topsoil (Cross Section View)
- Existing Ground Void (Not Surveyed) (Void — Void — Void — V)
- Existing Concrete
- Existing Aggregate (Cross Section View)
- Existing Curb and Gutter (Cross Section View)
- Existing Asphalt (Cross Section View)
- Existing Reinforcement Rebar

Geotechnical

- Geotextile Fabric Type D (D — D)
- Geogrid (Geo — Geo)
- Geotextile Fabric Type R (R — R)
- Geotextile Fabric Type R1 (R — R)
- Geotextile Fabric Type RR (RR — RR)
- Geotextile Fabric Type S (S — S)
- Subgrade Reinforcement
- Failure Line

Countours

- Depression Contours
- Supplemental Contour

Profile

- Subgrade, Subcut or Ditch Grade
- Topsoil Profile

Striping

- Centerline Pavement Marking
- Barrier with Centerline Pavement Marking
- Barrier Pavement Marking
- Stripe 4 IN Dotted Extension White
- Stripe 8 IN Dotted Extension White
- Stripe 8 IN Lane Drop

Pavement Joints

- Doweled Joint
- Tie Bar 30 Inch 4 Foot Center to Center
- Tie Bar 18 Inch 3 Foot Center to Center
- Tie Bar at Random Spacing

Bridge Details

- Small Hidden Object
- Large Hidden Object
- Phantom Object
- Existing Conditions Object
- Centerline Main
- Centerline Secondary
- Excavation Limits
- Proposed Ground
- Sheet Piling

Erosion Control

- Limits of Const Transition Line
- Bale Check
- Rock Check
- Floating Silt Curtain (S — S)
- Silt Fence (SF — SF)
- Excavation Limits
- Fiber Rolls

Environmental

- Wetland Mitigation
- Existing Wetland Easement USFWS
- Existing Wetland Jurisdictional
- Existing Wetland
- Tree Row

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

SYMBOLS

D-101-30

North Arrow (Half Scale)

Alignment Data Point

Alignment Monument

Spot Elevation

Existing Miscellaneous Spot

Existing Access Control Arrow

Existing Benchmark

Reset USGS Marker

Iron Monument Found

Iron Pin R/W Monument

Property Corner

Iron Pin Reference Monument

Right of Way Marker (Exst, Ppsd, Reset)

Existing Federal Reference Corner

Existing Section Corner (Full, Quarter, Sixteenth, Meander)

Existing Witness Corner

Existing Control Point (CP, GPS-RTK, TRI)

Existing Traverse PI Aerial Panel

Existing Reference Marker Point NGS

Existing EFB Misc

Existing Bush or Shrub

Existing Large Evergreen Tree

Existing Small Evergreen Tree

Existing Large Tree

Existing Small Tree

Existing Tree Trunk

Cairn or Stone Circle

Existing Artifact

Existing Satellite Dish

Existing Weather Station

Existing Windmill or Tower

Reinforced Pavement

CSB Continuous Split Barrel Sample

FA Flight Auger Sample

SB Split Barrel Sample

T Thinwall Tube Sample

N Standard Penetration Test

Incl Inclinometer Tube

Excavation Unit

Existing Ground Water Well Bore Hole

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-31

- Flexible Delineator
- Flexible Delineator Type A (Exst, Ppsd)
- Flexible Delineator Type B (Exst, Ppsd)
- Flexible Delineator Type C (Exst, Ppsd)
- Flexible Delineator Type D (Exst, Ppsd)
- Flexible Delineator Type E (Exst, Ppsd)
- Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type C (Exst, Ppsd, Diamond Grade)
- Delineator Type D (Exst, Ppsd, Diamond Grade)
- Delineator Type E (Exst, Ppsd, Diamond Grade)
- Barricade (Type I, Type II, Type III}
- Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)
- Attenuation Device
- Truck Mounted Attenuator
- Delineator Drums
- Flagger
- Tubular Marker
- Traffic Cone
- Back to Back Vertical Panel Sign

- Highway Sign (Exst, Ppsd)
- Mile Post Type A (Exst-Ppsd-Reset)
- Mile Post Type B (Exst, Ppsd)
- Mile Post Type C (Exst, Ppsd)
- Object Marker Type I (Exst, Ppsd)
- Object Marker Type II (Exst, Ppsd)
- Object Marker Type III (Exst, Ppsd)
- Existing Reference Marker
- Road Closure Gate 18 Ft (Exst, Ppsd)
- Road Closure Gate 28 Ft (Exst, Ppsd)
- Road Closure Gate 40 Ft (Exst, Ppsd)
- Existing Railroad Battery Box
- Existing RR Profile Spot
- Existing Railroad Crossbuck
- Existing Railroad Frog
- Existing Mailbox (Private, Federal)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

SYMBOLS

D-101-32

- Existing Luminaire
- Luminaire LED
- Existing Light Standard Luminaire
- Relocate Light Standard
- Light Standard Light LED Luminaire
- Light Standard 35 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 50 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 70 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 100 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 150 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 200 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 250 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 310 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 400 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 700 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire
- Emergency Vehicle Detector
- Video Detection Camera
- High Mast Light Standard 3 Luminaire (Exst, Ppsd)
- High Mast Light Standard 4 Luminaire (Exst, Ppsd)
- High Mast Light Standard 5 Luminaire (Exst, Ppsd)
- High Mast Light Standard 6 Luminaire (Exst, Ppsd)
- High Mast Light Standard 7 Luminaire (Exst, Ppsd)
- High Mast Light Standard 8 Luminaire (Exst, Ppsd)
- High Mast Light Standard 9 Luminaire (Exst, Ppsd)
- High Mast Light Standard 10 Luminaire (Exst, Ppsd)
- Overhead Sign Structure Load Center (Exst, Ppsd)
- Traffic Signal Controller (Exst, Ppsd)
- Pad Mounted Traffic Signal Controller (Exst, Ppsd)
- Flashing Beacon (Exst, Ppsd)
- Concrete Foundation (Exst, Ppsd)
- Pipe Mounted Flasher (Exst, Ppsd)
- Pad Mounted Feed Point (Exst, Ppsd)
- Pipe Mounted Feed Point with Pad (Exst, Ppsd)
- Pole Mounted Feed Point (Exst, Ppsd)
- Junction Box (Exst, Ppsd)
- Existing Pedestrian Head with Number
- Existing Signal Head
- Pole Mounted Head
- Existing Lighting Standard Pole
- Existing Traffic Signal Standard
- Pull Box (Exst-Ppsd-Undefined)
- Intelligent Transportation Pull Box (Exst, Ppsd)
- Transformer (Exst, Ppsd)
- Power Pole (Exst-Ppsd-with Transformer)
- Wood Pole (Exst, Ppsd)
- Pedestrian Push Button Post (Exst, Ppsd)
- Existing Pole
- Existing Telephone Pole
- Existing Post
- Connection Conductor (Ground, Neutral, Phase 1, Phase 2)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-33

Existing Manhole (Electrical, Gas, Telephone)

Water Manhole (Exst, Exst with Valve)

Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)

Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)

Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)

Force Main Storm Drain Manhole (Exst, Exst with Valve)

Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)

Existing Water Appurtenance

Sprinkler Head (Exst, Ppsd)

Fire Hydrant (Exst, Ppsd)

Cleanout (Exst Sanitary, Underdrain)

Existing Catch Basin Inlet (Round, Square)

Existing Curb Inlet (Round, Square)

Existing Slotted Reinforced Concrete Pipe

Catch Basin (Riser 30 Inch, Beehive, Type A)

Inlet Mountable Curb (Type A, Type B)

Inlet Saddle Base (Type 1, Type 2)

Inlet Special (Catch Basin, Type 1, Type A)

Inlet (Tee, Type 1, Type 2, Type 2 Double)

Median Drain

Headwall (Exst, Ppsd, Ppsd Single with Vegitation Barrier, Ppsd Double with Vegitation Barrier)

Cap or Stub
Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water

Existing Pedestal
Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined

Existing Pipe Vent
Gas, Fuel, Sanitary, Storm Drain, Water, Undefined

Valve
Exst Gas, Exst Water, Ppsd Water, Exst Undefined

Pump
Sanitary, Storm Drain, Exst Water

Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Existing Utility Marker

Existing Meter

Existing Fuel Dispensers

Existing Fuel Filler Pipes

Existing Fuel Leak Sensors

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

Cross Section Legend


D-101-40

Description	Longitudinal Parallel to Roadway	Transverse Perpendicular to Roadway*
Cable Line	CBL1	CBL2
Conduit Line	CDU1	CDU2
Electric Line	E1	E2
Fiber Optic Line	F1	F2
Gas Main Line	GM1	GM2
Gas Service Line	GS1	GS2
Gas Transmission Line	GT1	GT2
Fuel Pipeline	PL1	PL2
Sanitary Sewer Force Main	SSF1	SSF2
Sanitary Sewer	SS1	SS2
Steam Line	STE1	STE2
Storm Drain (Assumed Depth)	SD1	SD2
Telephone Line	T1	T2
TV Line	TV1	TV2
Water Main Line	WM1	WM2
Water Service Line	WS1	WS2

Description	Longitudinal Parallel to Roadway	Transverse Perpendicular to Roadway*
Overhead Power Transmission Line	OHT1	OHT2
Overhead Line	OH1	OH2

Light Standard - Multiple Variations
- Concrete
- Steel
- Wood
- with Traffic Signal

Pole - Multiple Variations
- Utility
- Brace
- Feed Point
- Guy
- Power
- Power Structure
- Power with Light
- Power with Transformer



Manhole - Multiple Variations
- Electric
- Fiber Optic
- Gas
- Inlet
- Sanitary Force Main
- Sanitary
- Sanitary with Valve
- Steam
- Storm
- Storm Force Main
- Storm with Valve
- Telephone
- Water
- Water with Meter
- Water with Valve
- Water with Air Release Valve



Anchor

High Tension Cable Guardrail

* Usually the transverse utilities are shown on a cross section with 2 or more symbols. The utility runs from one symbol to the other, but the connection may not be shown.



Connection to infer that probably will not be displayed

When storm drain invert elevations are NOT used to draw pipe, they will appear as shown to the left. When invert elevations are used to draw pipe, they will be a cross section similar to the graphics shown below.



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-20-18	
REVISIONS	
DATE	CHANGE
6/14/2023	CADD Standards Update


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


06/14/23

Docusign Envelope ID: ED0D8869-DC49-44F1-8322-8B9A550711F3


D-255-2


EROSION AND SILTATION CONTROL
EROSION CONTROL BLANKET INSTALLATION



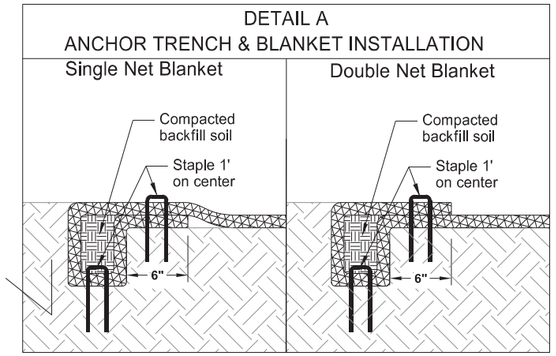



NOTE:
If a Single Net Blanket is used, the side with the netting should be on the top once the blanket is installed.

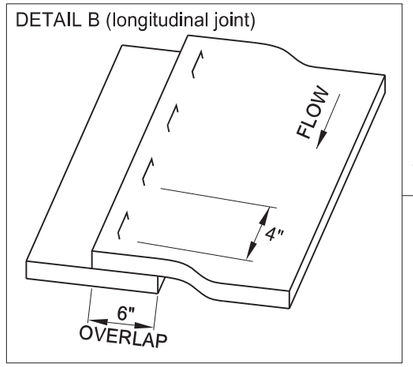

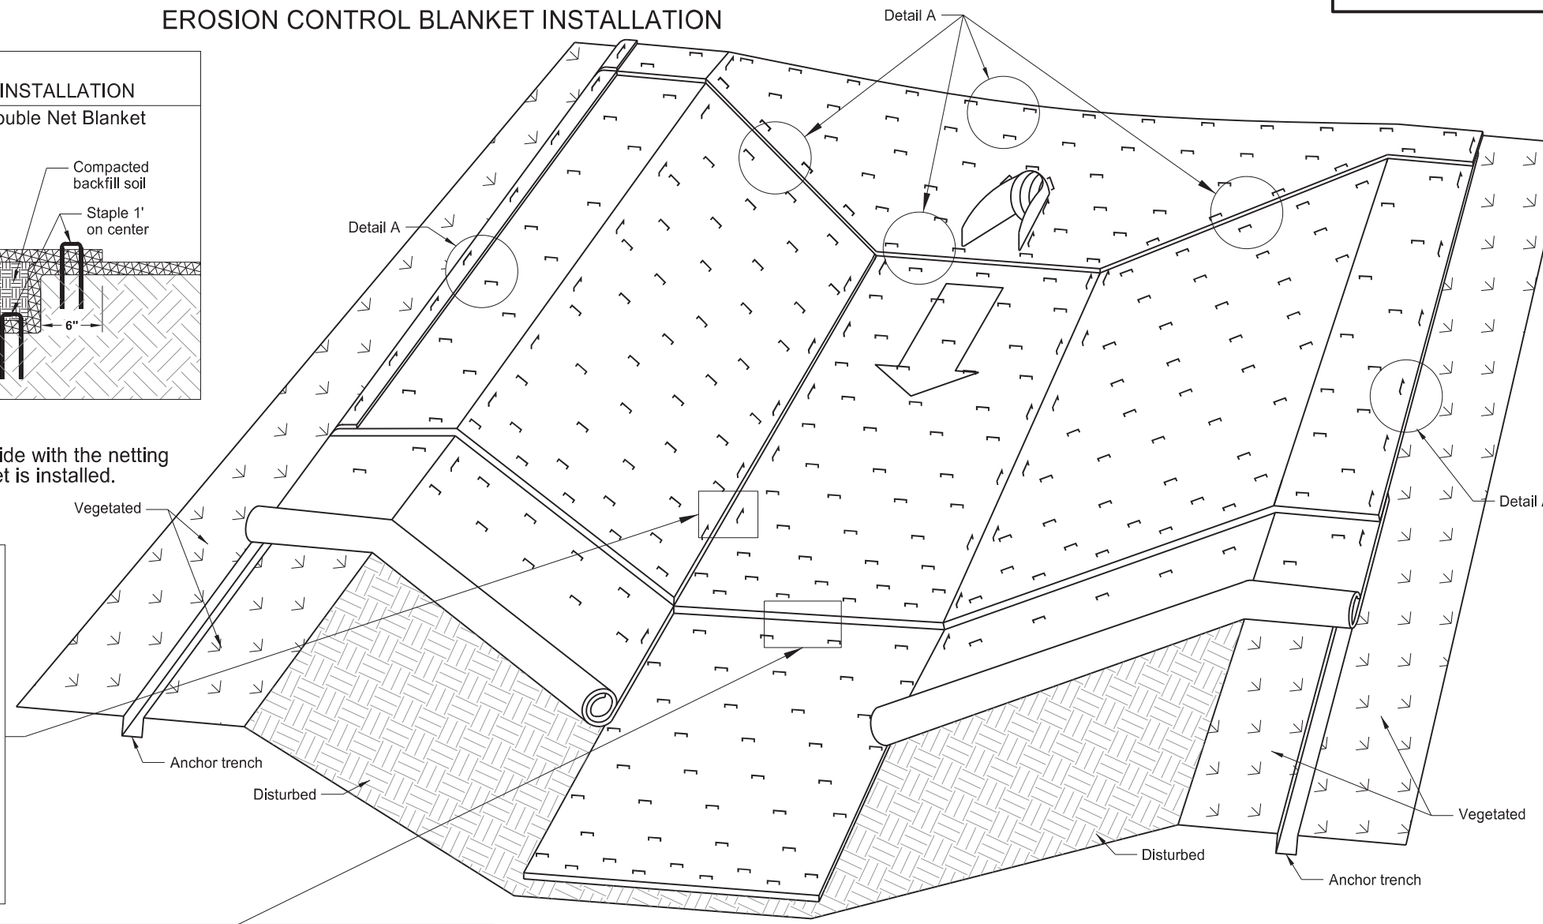


BLANKET LAYOUT
CHANNEL INSTALLATION

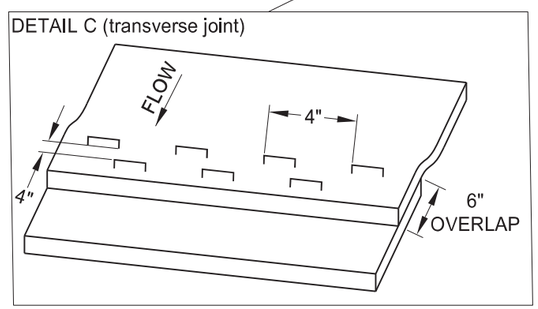




STAPLE PATTERN
(3.8 staples per square yard)



PIPE INLETS



PIPE OUTLETS

INSTALLATION AT PIPE ENDS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Changed standard drawing number from D-708-6 to D-255-2
07-27-15	Changed Installation details such as trench depth and overlap dimensions
08-27-19	New Design Engineer PE Stamp
08-27-25	Revised minor details for clarity


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/27/25


Docusign Envelope ID: 2C12B4C2-AA38-4A01-B483-3D5495EBE37A

EROSION CONTROL
FIBER ROLL PLACEMENT DETAILS


D-261-1

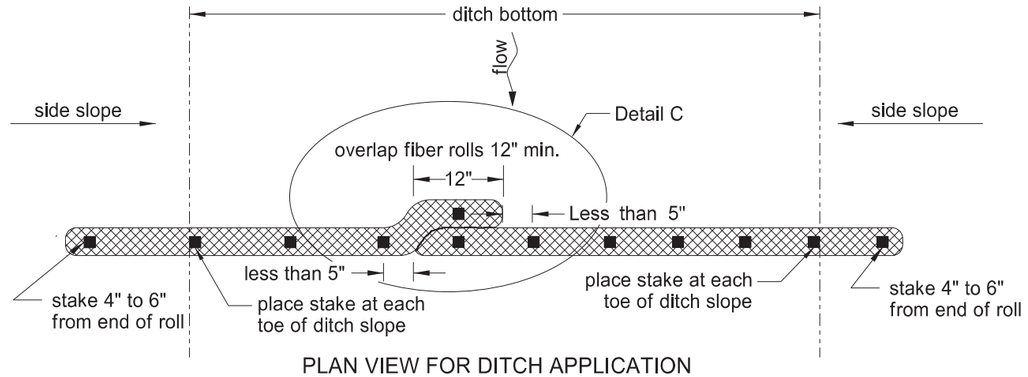

PLAN VIEW FOR DITCH APPLICATION

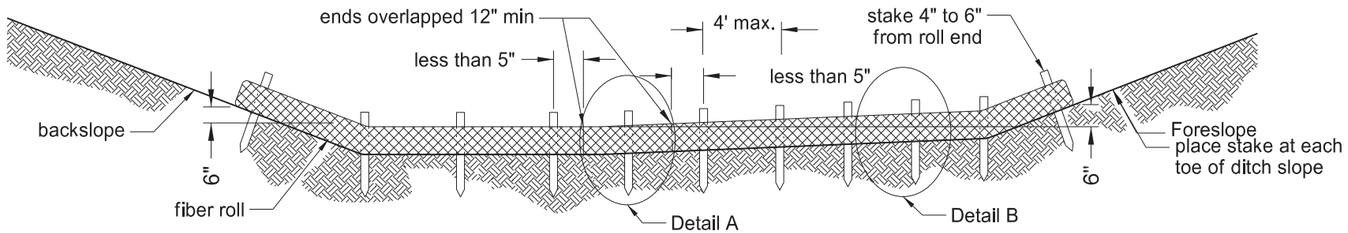


12 OR 20 INCH FIBER ROLL - DITCH BOTTOM

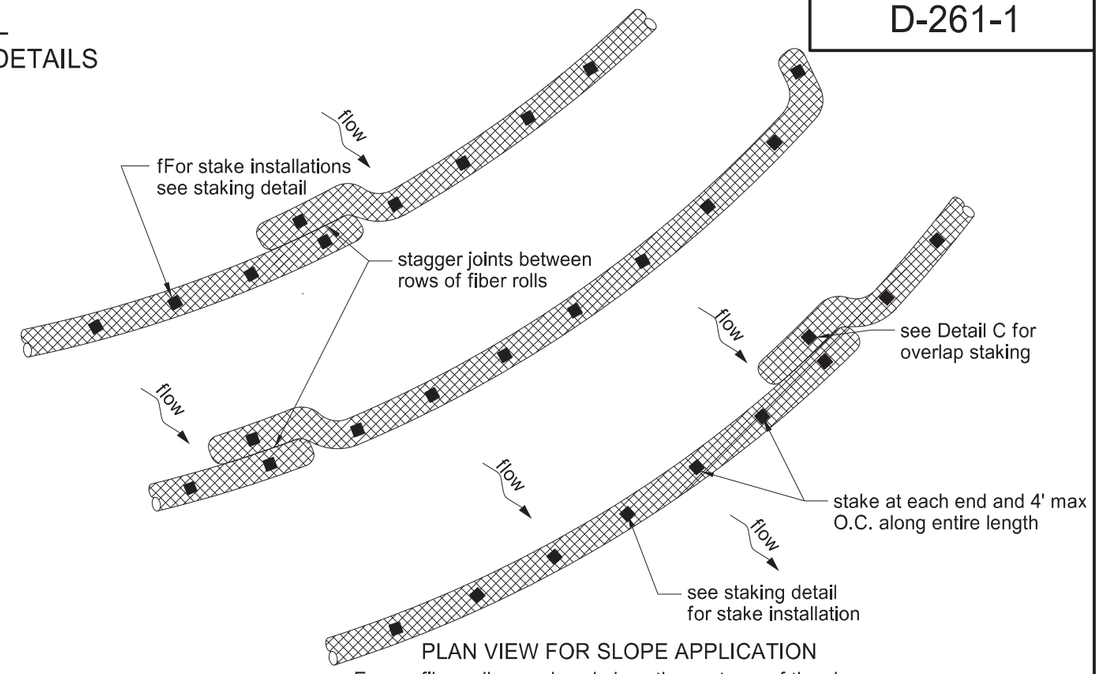


PLAN VIEW FOR SLOPE APPLICATION

Ensure fiber rolls are placed along the contours of the slope.

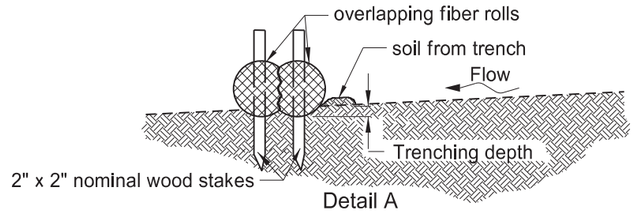

Detail A

FIBER ROLL OVERLAPPING STAKING DETAIL

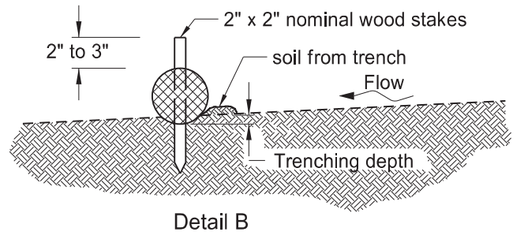


Detail B


FIBER ROLL STAKING DETAIL

NOTE: Do not allow runoff to run under or around roll.

FIBER ROLL DIAMETER	NOMINAL STAKE SIZE	MINIMUM STAKE LENGTH	TRENCH DEPTH	
			MINIMUM	MAXIMUM
12"	2" x 2"	24"	2"	3"
20"	2" x 2"	36"	3"	5"

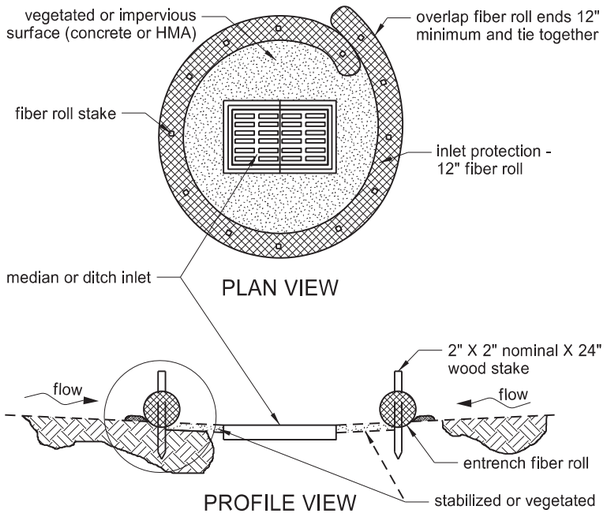


FIBER ROLL PROTECTION (MEDIAN OR DITCH INLET)

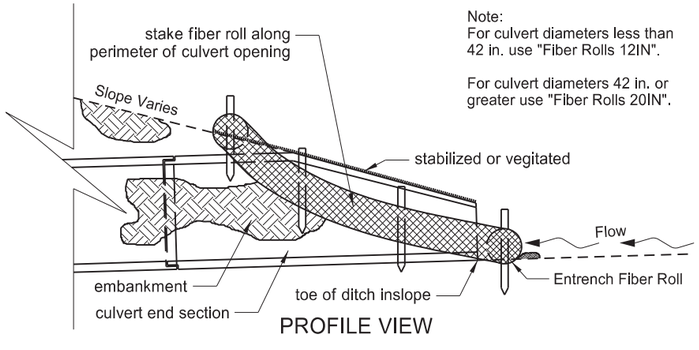

Note:
For culvert diameters less than 42 in. use "Fiber Rolls 12IN".

For culvert diameters 42 in. or greater use "Fiber Rolls 20IN".

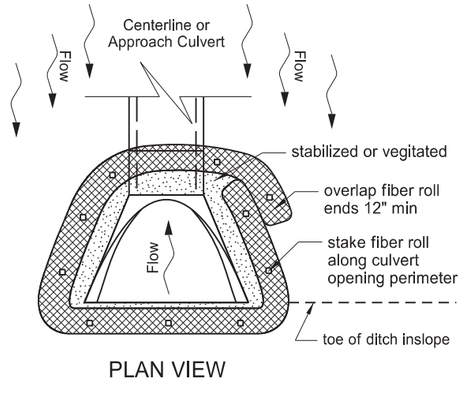

FIBER ROLL PROTECTION (INLET OF CULVERT)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-18-10	
REVISIONS	
DATE	CHANGE
06-10-13	Added plan view for ditch and slope application. Added table with values for stake and trench dimensions
10-04-13	Revised fiber roll overlap detail
06-26-14	Changed standard drawing number from D-708-7 to D-261-1
08-27-19	New Design Engineer PE Stamp
04-22-24	Slope Plan View-overlap change
03-13-25	Added D-708-6 Culvert Inlet detail
09-02-25	Added D-708-6 Inlet detail


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

09/02/25

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-7

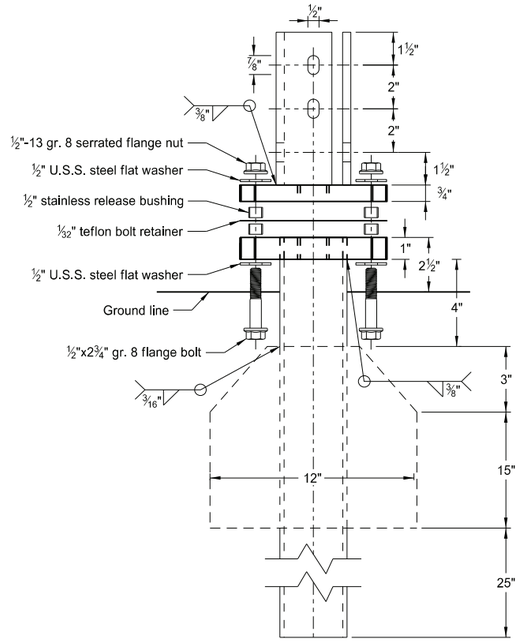


Multi-Directional
Slip Base Assembly


Perforated Tube

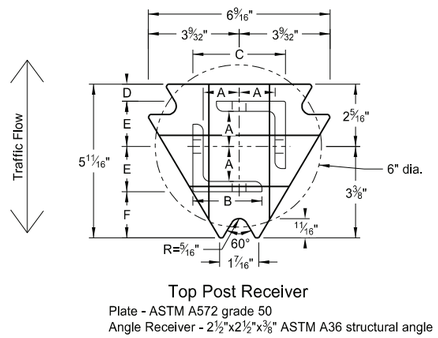


Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2½"x2½"x⅜" ASTM A36 structural angle

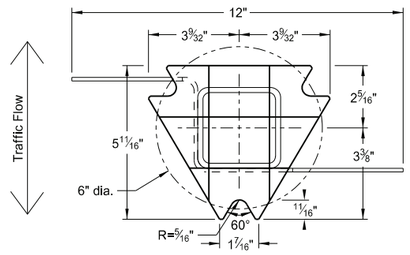


Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50

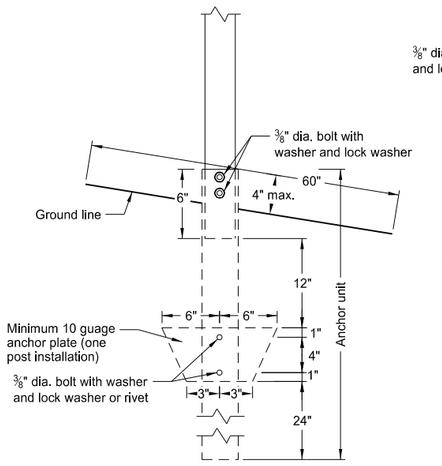


Anchor Unit and Post Assembly

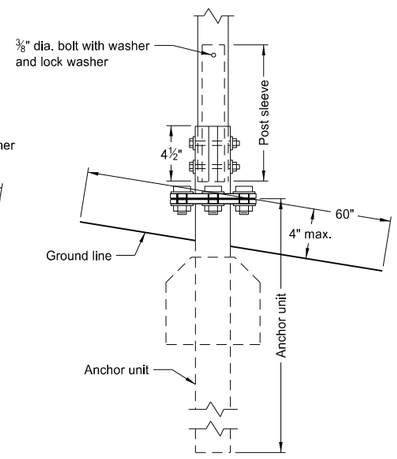

Multi-Directional
Slip Base Anchor Unit
and Post Sleeve Assembly





Bolt Retainer for Base Connection
Bolt Retainer- 1/32" Reprocessed Teflon

Notes:

1. Torque slip base bolts as specified by manufacturer.
2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
4. In concrete sidewalk, use same anchor without wings.
5. Provide more than 7' between the first and fourth posts of a four post sign.

Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thick-ness Gauge	Sleeve Size in.	Wall Thick-ness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2¼
1	2¼	12			No	2½
1	2½	12			(A)	3
1	2½	10			Yes	
1	2¼	12	2	12	Yes	
1	2½	12	2¼	12	Yes	
2	2	12			No	2¼
2	2¼	12			No	2½
2	2½	12			Yes	
2	2½	12			Yes	
2	2¼	10	2	12	Yes	
2	2½	12	2¼	12	Yes	
3 & 4	2½	12			Yes	
3 & 4	2½	10			Yes	
3 & 4	2½	12	2¼	12	Yes	
3 & 4	2¼	12	2	12	Yes	
3 & 4	2½	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in.⁴	Cross Sec. Area in.²	Section Modulus in.³
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 9/64"	2½"	3 1/32"	25/32"	1 33/64"	1 7/8"
2½"x10 ga.	1 9/32"	2½"	3 5/16"	⅝"	1 21/32"	1¾"

(A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.

(B) For additional wind load, insert the 2 3/16"x10 ga. into 2½"x10 ga.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

2-28-14

REVISIONS

DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

U-Channel Post

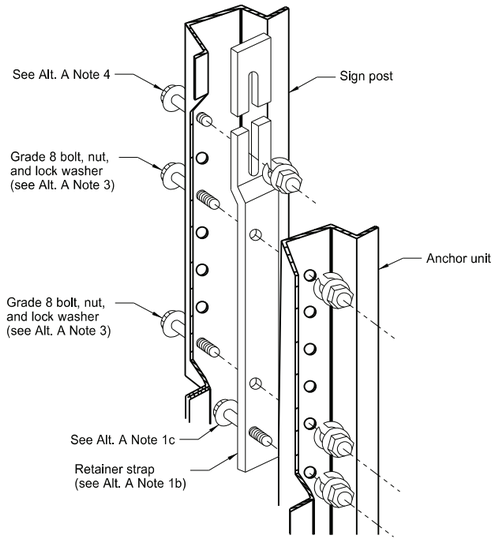


Detail A

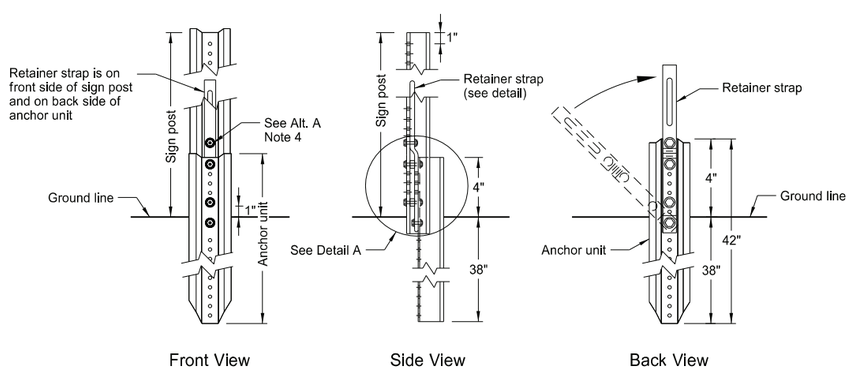


Front View | Side View | Back View

Breakaway U-Channel Detail Alternate A

Install a maximum of 2 posts within 7'.




Retainer Strap Detail

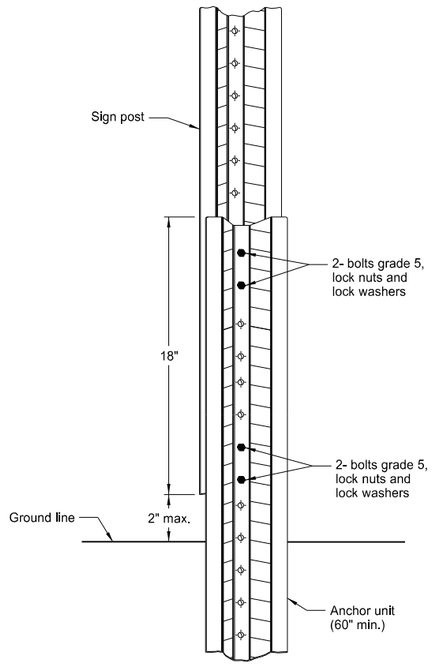

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.

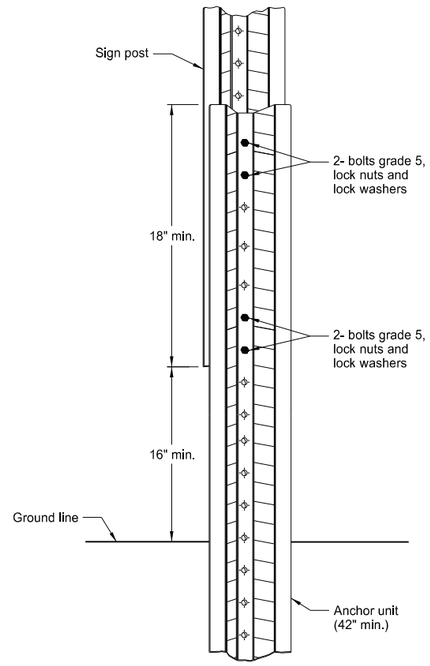

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.

Alternate A Steps of Installation:

1. a) Drive anchor unit to within 12" of ground level.
   b) Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
   c) Assemble strap to back of anchor unit using $\frac{5}{16}$"x2" bolt, lock washer and nut.
   d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
   b) Rotate strap to vertical position.
3. a) Place $\frac{5}{16}$"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
   b) Alternately tighten two connector bolts.
4. Complete assembly by tightening $\frac{5}{16}$"x2" bolt (this fastens sign post to retainer strap).
5. Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 ENGINEER NORTH DAKOTA

08/01/24


Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS


D-704-9

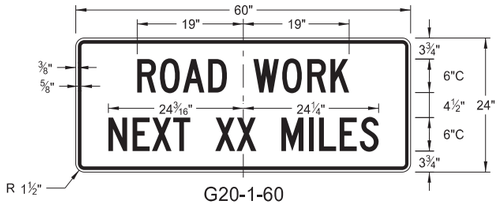

G20-1-60
Legend: black (non-refl)
Background: orange

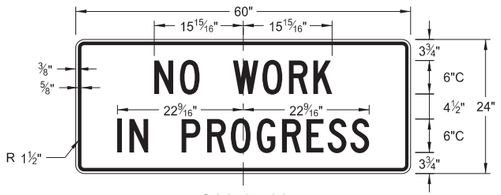


G20-1b-60
Legend: black (non-refl)
Background: orange

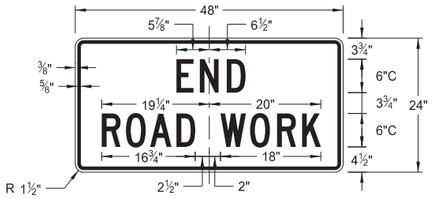

G20-2-48
Legend: black (non-refl)
Background: orange


G20-4b-36
Legend: black (non-refl)
Background: orange

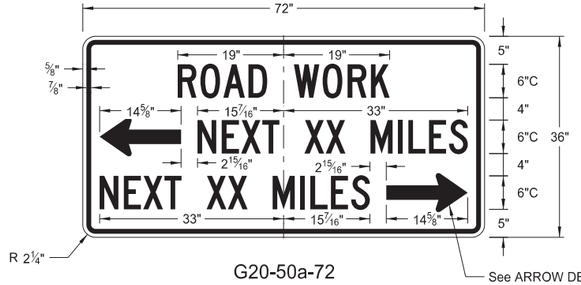


G20-50a-72
Legend: black (non-refl)
Background: orange
See ARROW DETAILS




G20-52a-72
Legend: black (non-refl)
Background: orange
See ARROW DETAILS

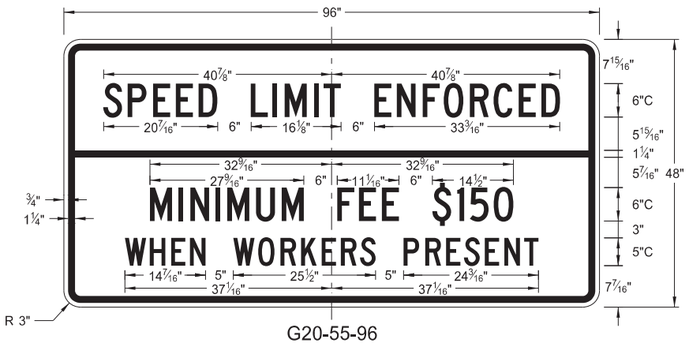


G20-55-96
Legend: black (non-refl)
Background: orange

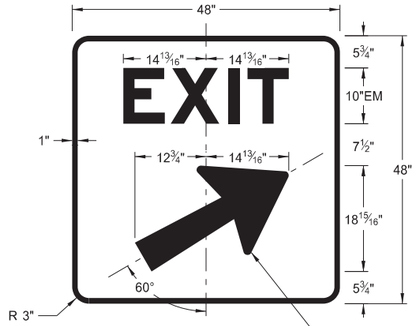


E5-1(L or R)-48
Legend: white
Background: green (orange optional)
See ARROW DETAILS




M4-8-36
Legend: black (non-refl)
Background: orange

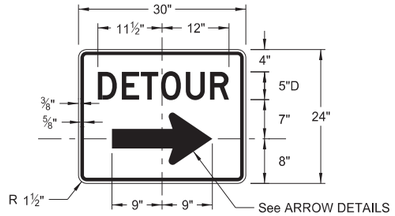


M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange
See ARROW DETAILS




E5-1-48




G20-50a-72
G20-52a-72



M4-9(L or R)-30
Right or Left



M4-9(L or R)-30
Advanced Right or Left



M4-9-30
Straight

ARROW DETAILS

NOTES:

(A) Arrow may be right or left of the legend to Indicate construction to the right or left.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added sign & background color
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

CONSTRUCTION SIGN DETAILS
WARNING SIGNS


D-704-11

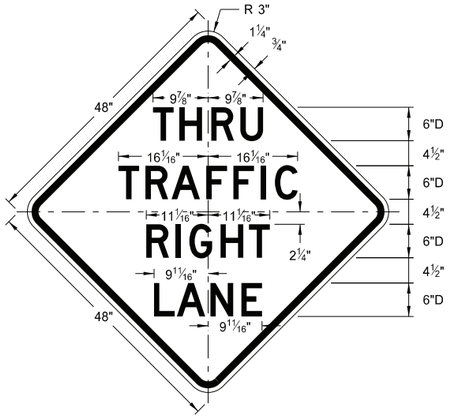

W5-8-48
Legend: black (non-refl)
Background: orange

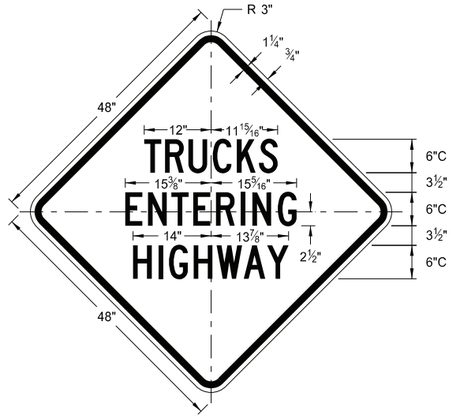


W8-53-48
Legend: black (non-refl)
Background: orange

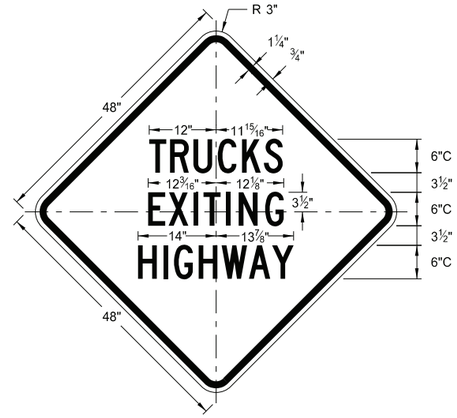


W8-56-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

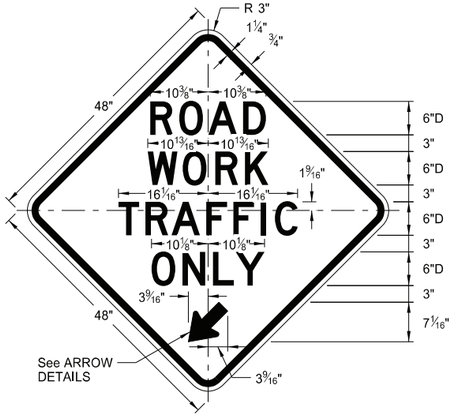

W5-9-48
Legend; black (non-refl)
Background: orange

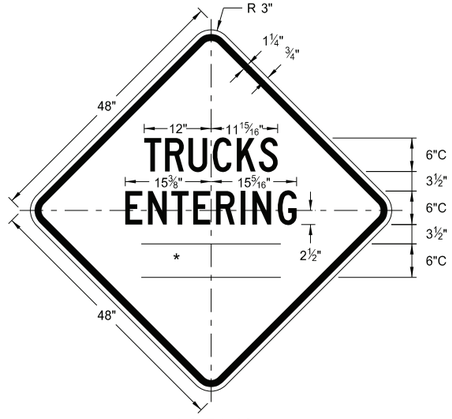


W8-54-48
Legend; black (non-refl)
Background: orange

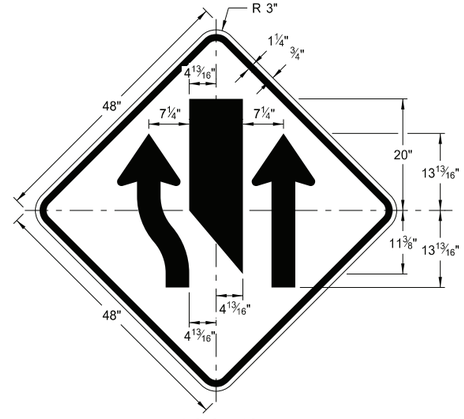


W9-3a-48
Legend; black (non-refl)
Background: orange

W8-9a-48
Legend: black (non-refl)
Background: orange

W8-55-48
Legend: black (non-refl)
Background: orange



W5-9-48

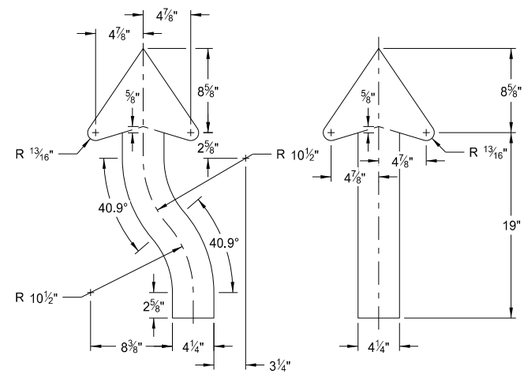

W9-3a-48

ARROW DETAILS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Updated sign number
5-31-18	Revised sign and arrow details
10-03-19	New Design Engineer PE Stamp
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24


DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

CONSTRUCTION SIGN DETAILS
WARNING SIGNS


D-704-11A



W16-7aP-18
Legend: black (non-refl)
Background: orange

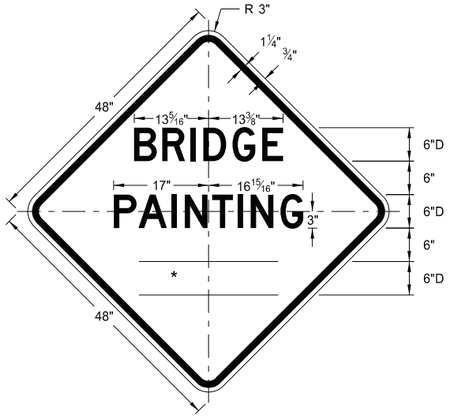


W21-50-48
Legend: black (non-refl)
Background: orange

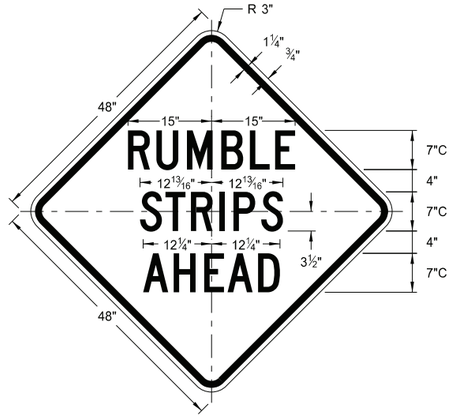


W21-53-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

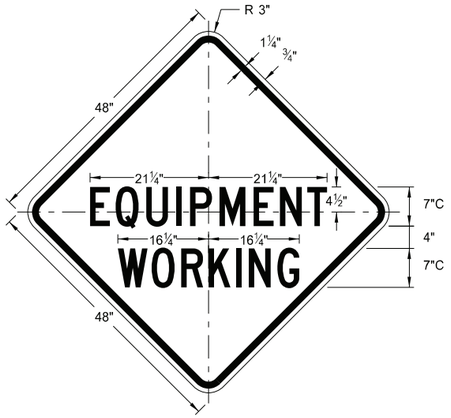


W20-51-48
Legend: black (non-refl)
Background: orange

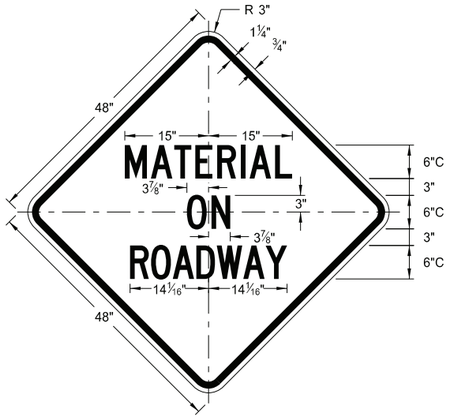


W21-51-48
Legend: black (non-refl)
Background: orange

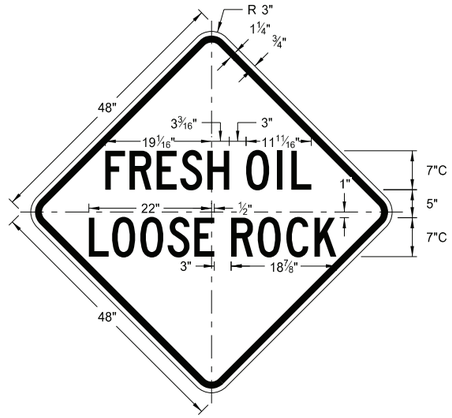


W22-8-48
Legend: black (non-refl)
Background: orange



W20-52P-54
Legend: black (non-refl)
Background: orange

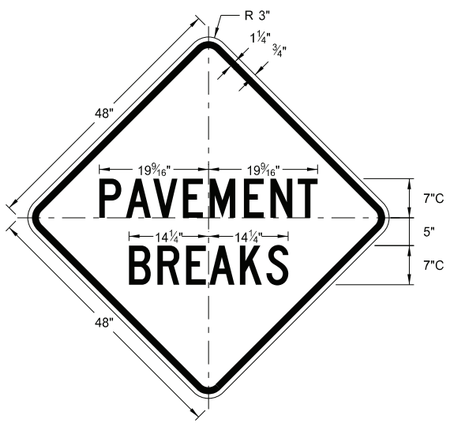

W21-52-48
Legend: black (non-refl)
Background: orange



W16-7aP-18

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
5-31-18	
REVISIONS	
DATE	CHANGE
11-01-19	Added details for sign W16-7aP-18.
8-01-24	Electronic Stamp/Signature.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BARRICADE AND CHANNELIZING DEVICE DETAILS

D-704-13




DELINEATOR DRUM

Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectorized spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.

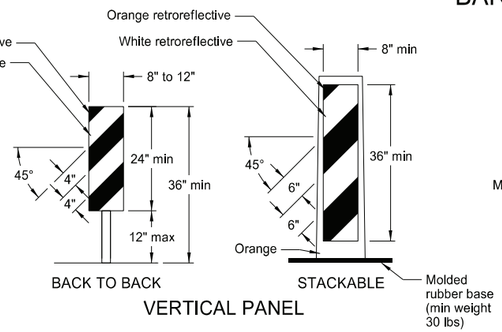


VERTICAL PANEL

Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.




TRAFFIC CONE

Provide retroreflectorization of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectorized space between the orange and white stripes.



TUBULAR MARKER


Provide retroreflectorization of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

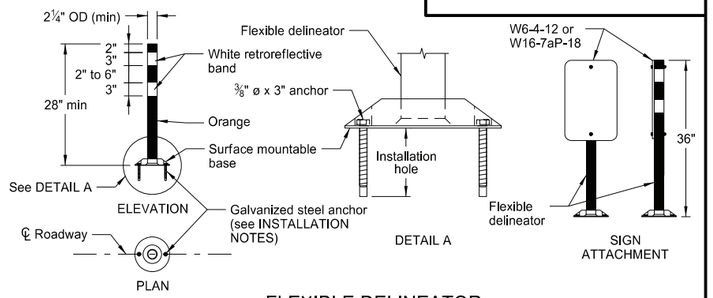

FLEXIBLE DELINEATOR


INSTALLATION NOTES:

1. Drill installation holes to diameter and depth required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.




NOTE: This is the only type of rail acceptable for use with this barricade assembly.

BARRICADE BLADE DETAIL

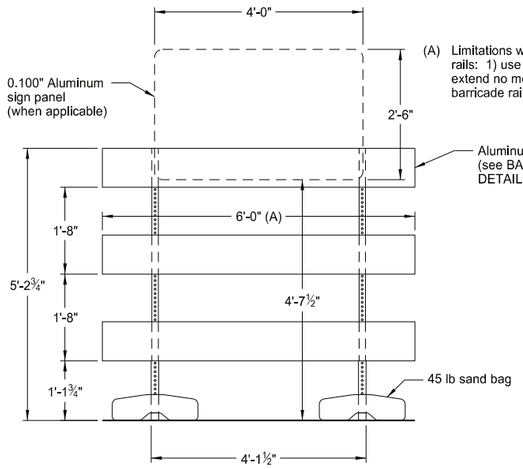


(A) Limitations when using 8'-0" barricade rails: 1) use no sign panel, and 2) extend no more than 1'-0" of the barricade rail past the uprights.

ELEVATION VIEW

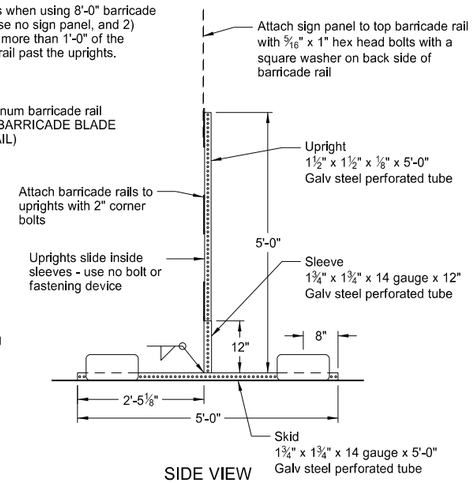


SIDE VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

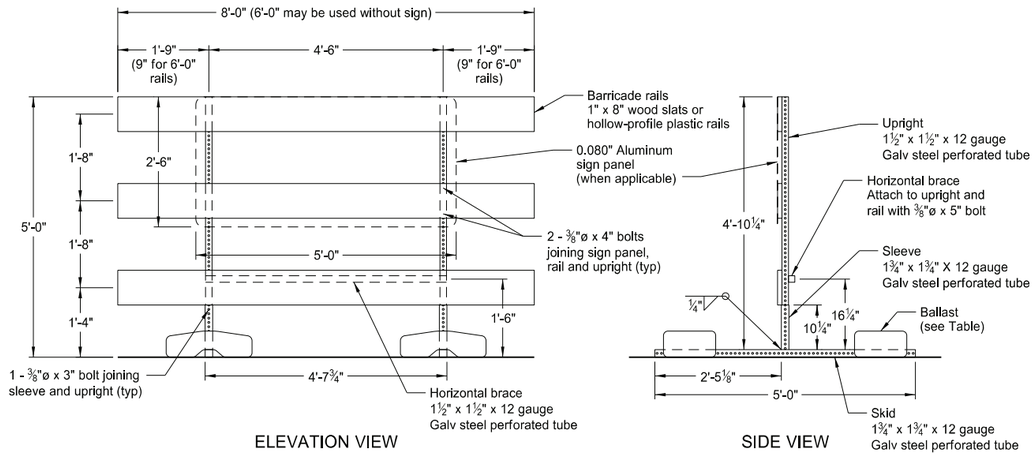


BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)


NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".



TYPE I BARRICADE





TYPE II BARRICADE

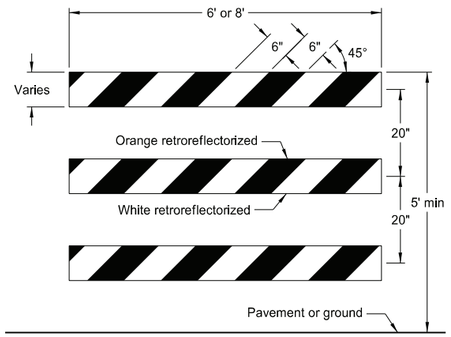



TYPE III BARRICADE

BARRICADE RAIL DETAILS









DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags

Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
11-01-19	Revised details for Flexible Delineator
8-01-24	Electronic Stamp/Signature

KIRK J. HOFFE
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

D-704-14


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

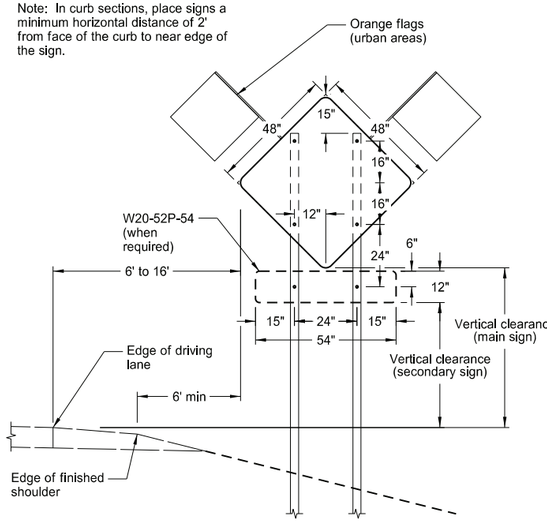


TYPICAL SECTION
(48" x 48" diamond warning sign shown)




48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)




R1-2-60 - YIELD SIGN




R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)




48" x 48" SIGN
(with R6-1-54 sign as required)




24" x 36" SIGN




24" x 24"
ROUTE MARKER
ASSEMBLY




18" x 18"
DIAMOND SIGN




48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)




W14-3-64 - PENNANT SIGN




R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)




48" x 48" SIGN
(with R2-1aP-24 sign as required)




30" x 24" SIGN




108" x 48" SIGN




96" x 48" SIGN




72" x 36" SIGN




72" x 24" SIGN




60" x 24" SIGN




48" x 24" SIGN

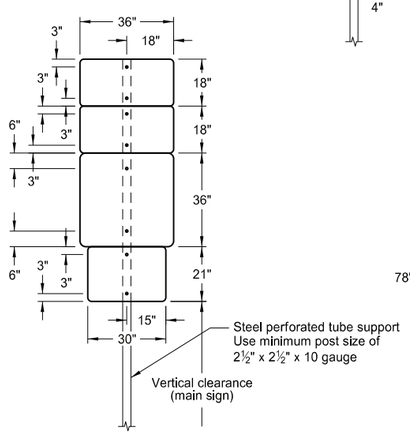

36" x 36"
ROUTE MARKER
ASSEMBLY

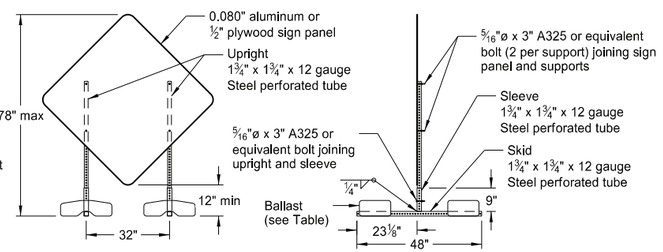

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

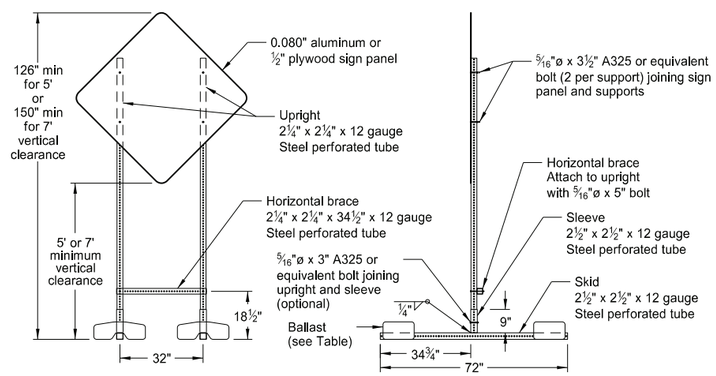

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

   Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

   Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅜" bolts.

3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

   Interstate - white legend on blue background
   Interstate Business Loop - white legend on green background
   US and State - black legend on white background
   County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

   The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

   Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

   Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

   Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

10-4-13

REVISIONS

DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail
8-01-24	Electronic Stamp/Signature


KIRK J. HOFFA
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

TERMINAL AND SEAL COAT SIGN LAYOUTS

D-704-20

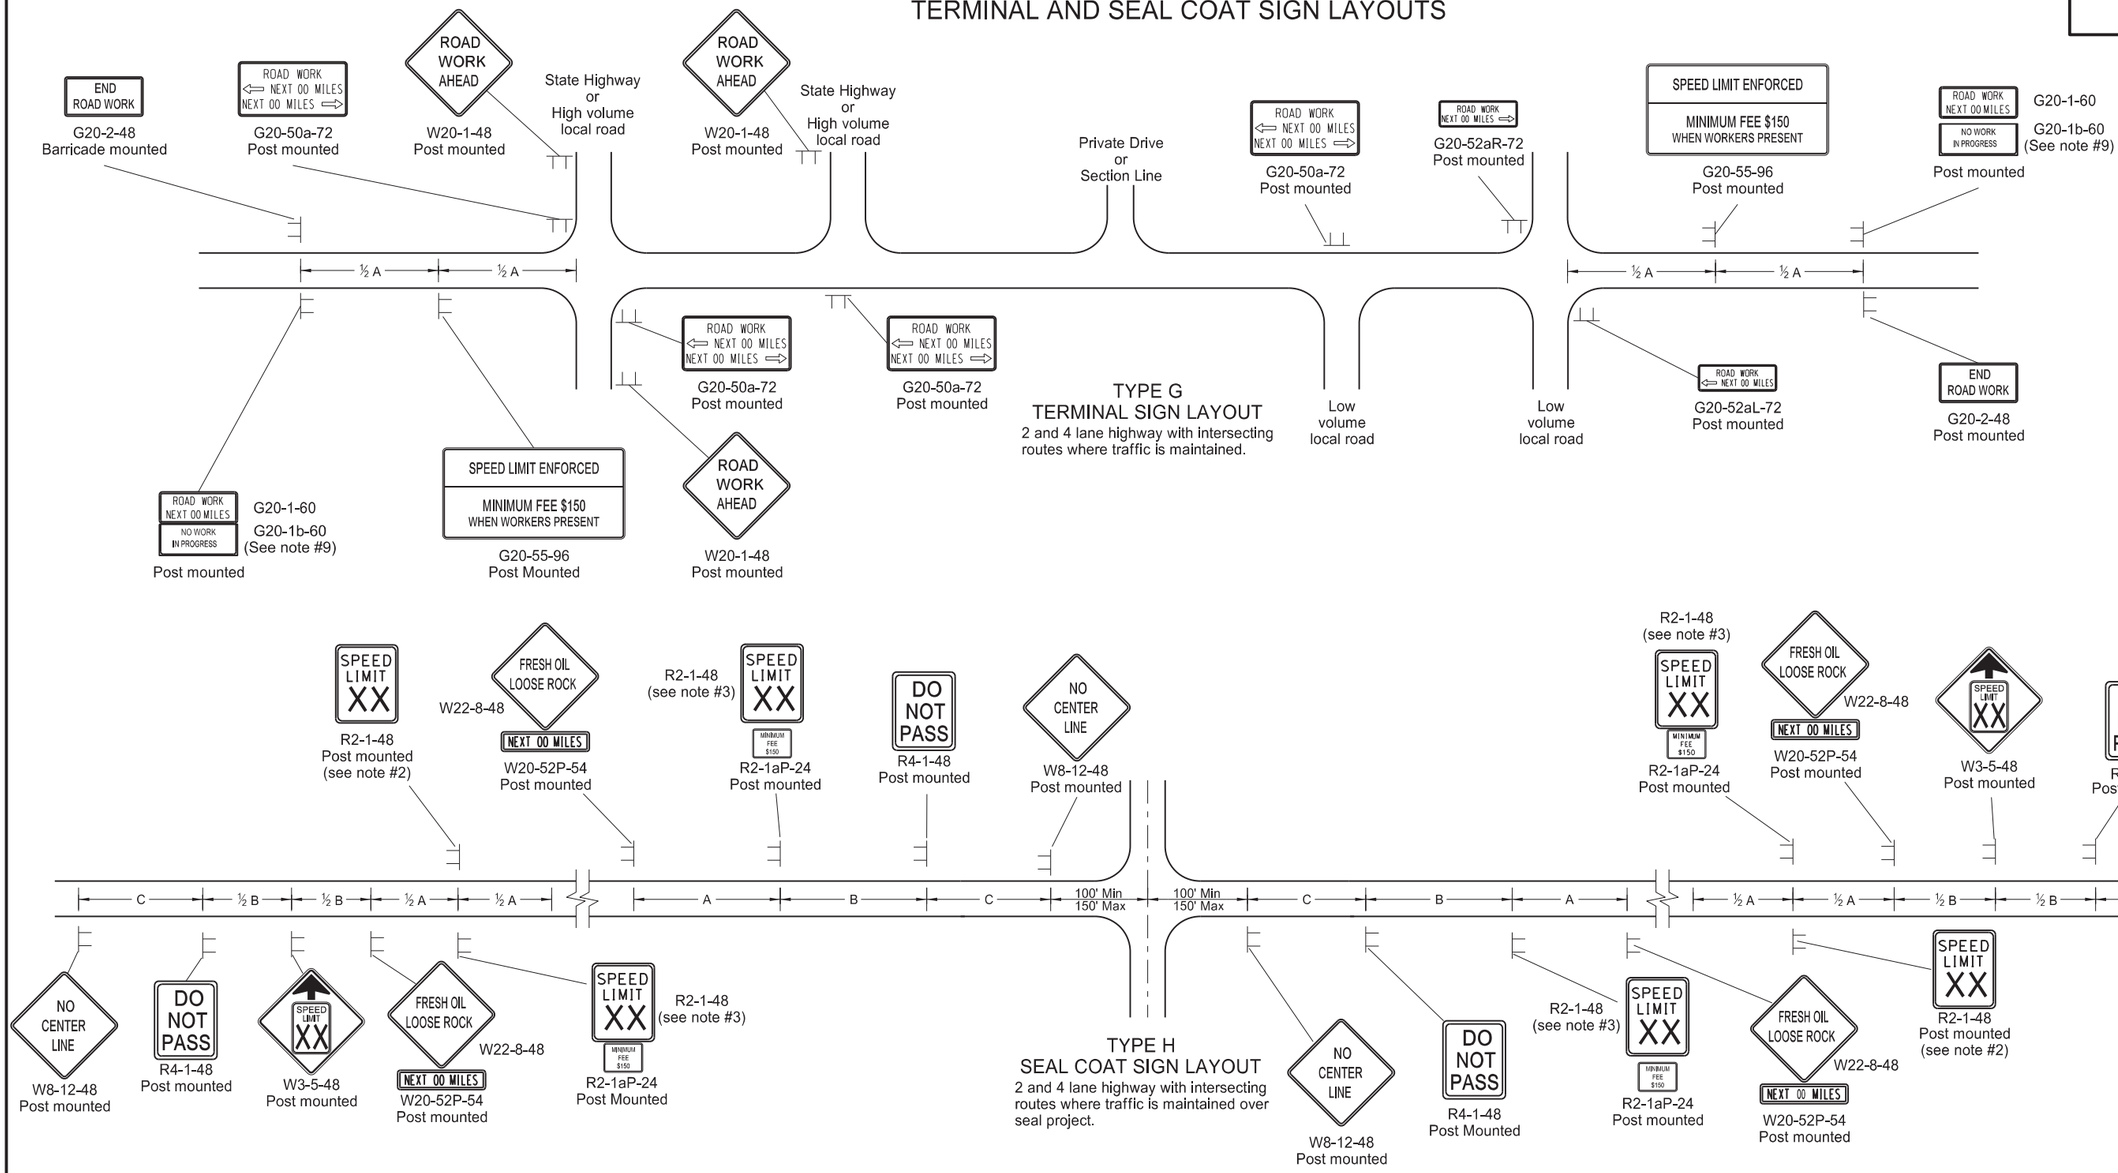

Notes:

1. Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
2. Determine the exact speed limit in the field, based on location and conditions.
3. Determine the reduced speed limit based on the in place speed limit before construction. Where speed limit reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at ½ B.
4. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
5. Cover existing speed limit signs within a reduced speed zone.
6. On seal coat projects, place signs R2-1-48, R2-1aP-24, R4-1-48, W22-8-48 and W20-52P-54 after all important intersections and at five mile intervals. Place sign W8-12-48 after all important intersections and at 2 mile intervals until short term center line pavement marking is placed.
7. As an option, use portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Drawing D-704-14.
8. Cover or remove speed limit signs from layout Type H when loose aggregate is removed.
9. Install sign G20-1b-60 when work is suspended for winter.
10. Use other traffic control layouts in immediate work areas. Place sign R2-1aP-24 below speed limit signs in reduced speed limit work areas.
11. Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
12. Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-27-13


REVISIONS

DATE	CHANGE
08-17-17	Updated notes & sign numbers
11-01-19	Updated note & sign
12-08-21	Switched order of Road Work and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

PRECAST CONCRETE HEADWALL DETAILS

D-714-18

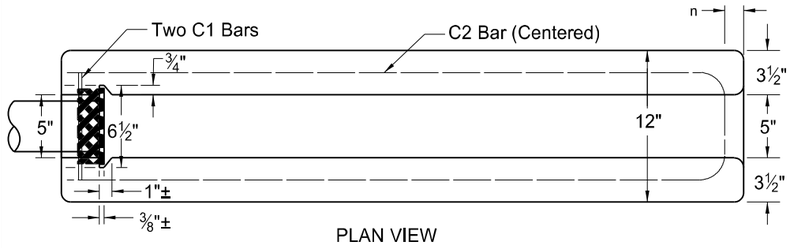



PLAN VIEW

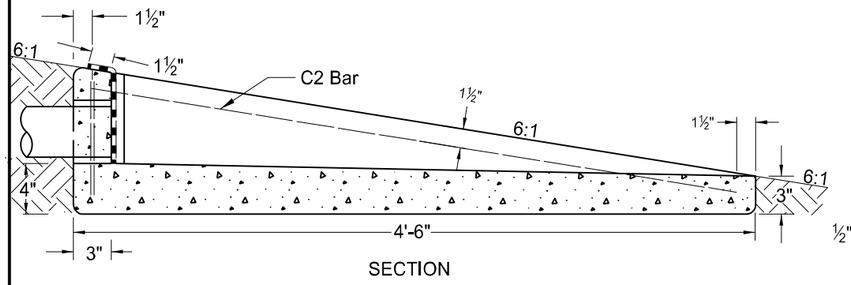

SECTION


PRECAST CONCRETE HEADWALL (6:1 SLOPE)






RODENT SCREEN


Dimensions are approximate to allow bend and a snug fit in headwall slot




C2 (One Required)



C3 (One Required)




C4 (One Required)




C1 (Two Required)

BENT BAR DETAILS

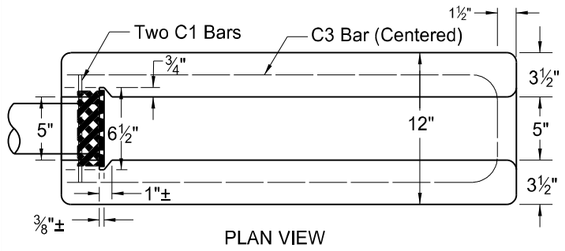



PLAN VIEW

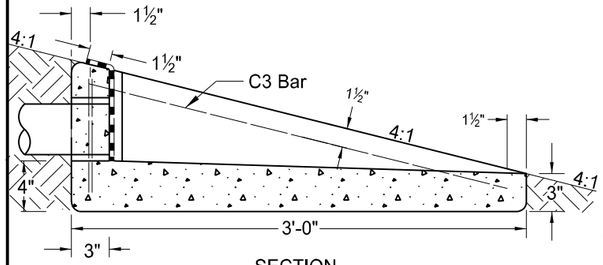


SECTION

PRECAST CONCRETE HEADWALL (4:1 SLOPE)



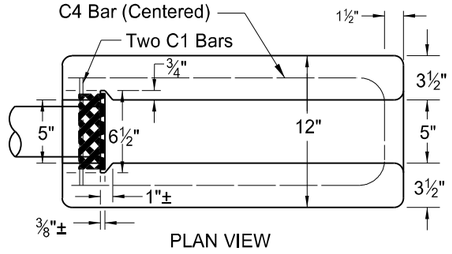


PLAN VIEW

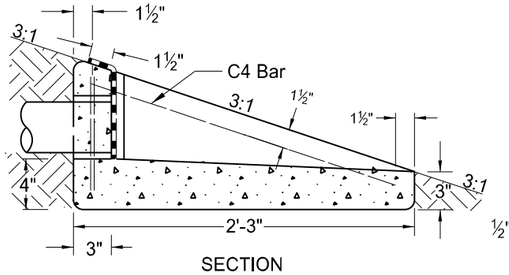

SECTION

PRECAST CONCRETE HEADWALL (3:1 SLOPE)



NOTES:

RODENT SCREEN: Fabricate rodent screen from flattened expanded metal with screen openings of approximately 0.25 square inches. Use 16 ga metal, hot dip galvanized after fabrication, for the screen.

REINFORCING BARS: Use No. 4 deformed steel reinforcing bars.

BENT BARS: Bent bar dimensions given out to out.

SLOPE: Match headwall slope to foreslope.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

10-27-2010

REVISIONS

DATE	CHANGE
12/02/2020	Removed drainable base details Added 4:1 and 3:1 Headwalls


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff


12 02 2020

STANDARD BARBED WIRE FENCE


D-752-1

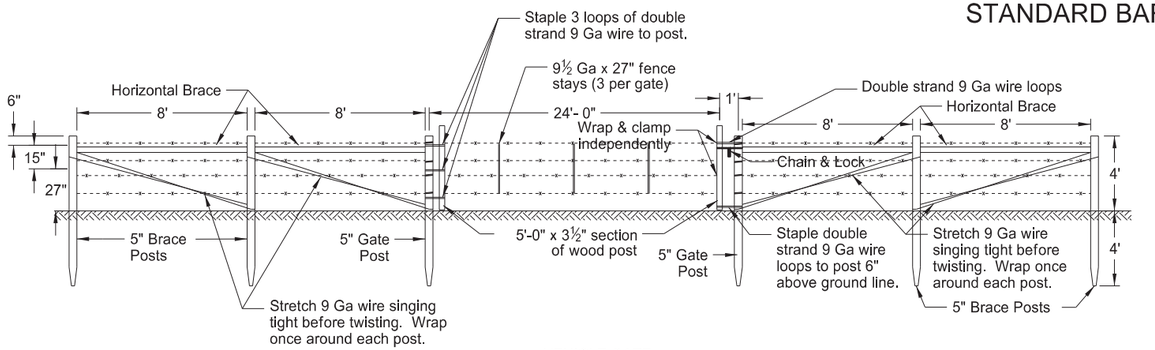

VEHICLE GATE



HORIZONTAL BRACE DETAIL



NOTES

1. No deduction in measured pay length of fence made for gates, corner assemblies, double brace assemblies, fence terminals, or depression fencing. Include all costs for abutment fencing in the price bid for fencing bid items.


2. Install double brace assemblies at locations shown on the plans or established by the Engineer. Place adjacent fence terminals, corner assemblies, or double brace assemblies at a maximum spacing of 1,320 feet.

3. Include all costs of furnishing and installing inserts and eyebolts in the unit price bid for fencing bid items. Use eyebolts galvanized according to AASHTO designation M-30; inserts of corrosion resistant material do not require galvanization. Use concrete inserts capable of developing the full strength of the ⅝" diameter threaded eyebolt, when installed in concrete.


4. Determine post type used, either wood or steel, unless otherwise specified in the plans.

5. Include the cost of bracing at vehicle gates in the price bid for "Vehicle Gate."


POST SIZES					
	TREATED WOOD		STEEL		
USE OF POST	Post dia.	Post length	Post length	Post wt. Lbs/Ft	Anchor wt. Lbs.
Line post	3½"	6'-6"	6'-6"	1.33	0.67
Corner post	8"	8'	7'	4.10	(Conc.)
End post	5"	8'			
Brace post	5"	8'	7'	3.19	(Conc.)
Gate post	5"	8'			
Horizontal brace	4"	8'	As appoved by the Engineer		

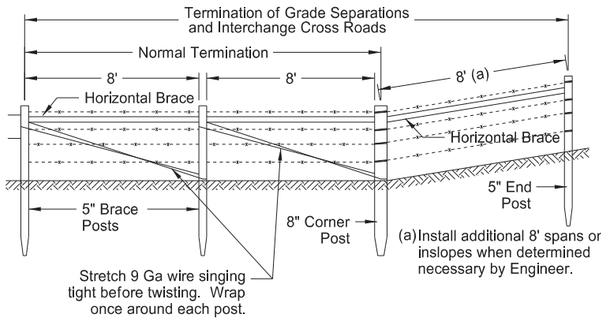


FENCE TERMINAL

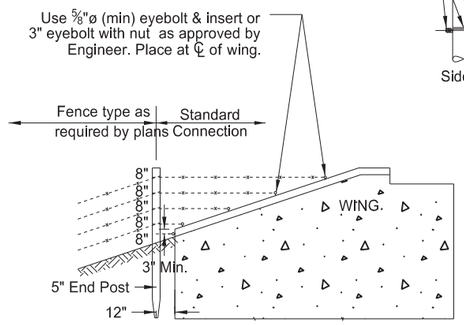


DETAIL FOR TYING FENCE TO WINGS OF ABUTMENTS




WRAP-AROUND DETAIL

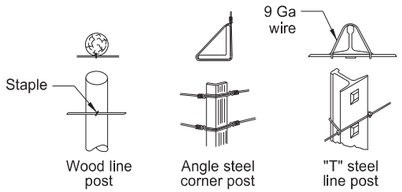


FASTENING TO POSTS

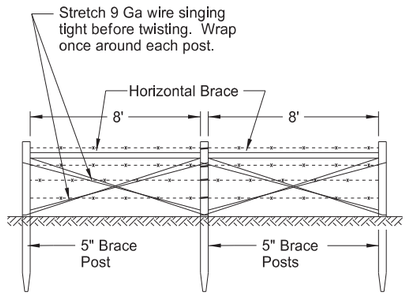


DOUBLE BRACE ASSEMBLY

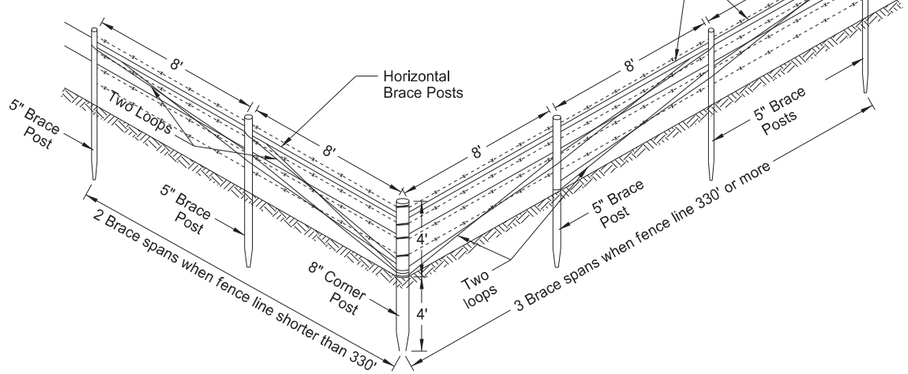

CORNER ASSEMBLY

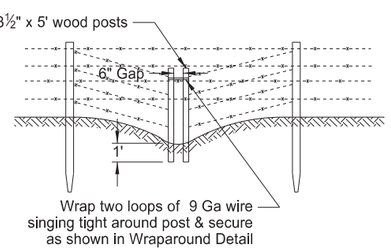


BREAK-AWAY FENCE FOR NARROW DEPRESSIONS SUBJECT TO FLOODING

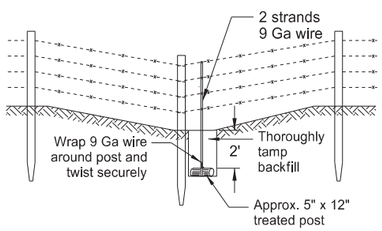


DETAIL FOR ANCHORING FENCES IN DEPRESSIONS*


*Determine locations in the field and include in price bid for fencing. Use other methods of anchoring fence if approved by the Engineer.

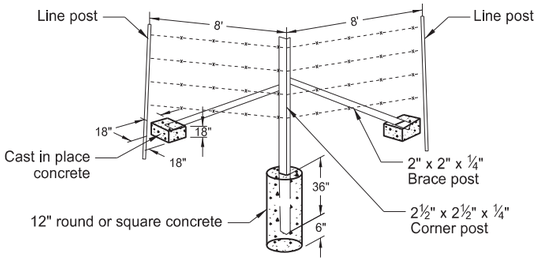

CORNER AND DOUBLE BRACE ASSEMBLY STEEL POSTS



FENCE TERMINAL STEEL POSTS

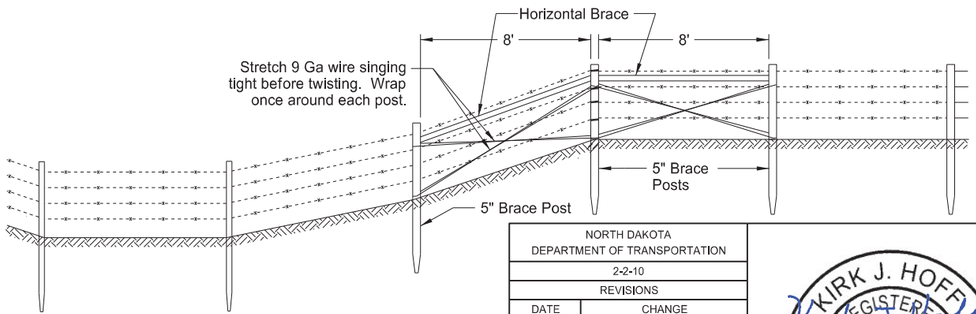

FENCING FOR WIDE DEPRESSIONS

Use double brace installation, as shown, on opposite side of depression.

Decrease line post spacing as needed due to terrain.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-2-10	
REVISIONS	
DATE	CHANGE
10-02-12	Notes, steel assemblies/posts.
11-25-13	Revised Vehicle Gate.
10-17-17	Updated to active voice.
02-23-23	Revised post spacing/brace size.

KIRK J. HOFFMANN
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


02/23/23

REFLECTORIZED DELINEATORS - TWO-LANE TWO-WAY HIGHWAY


D-754-21B

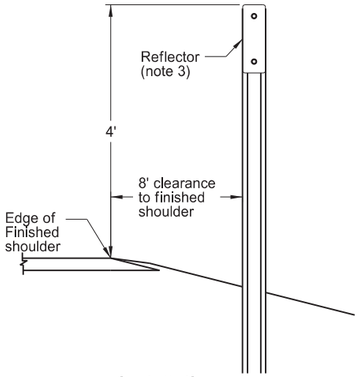

Installation
(Type A and C)



Aluminum Post Detail
Approx. 0.88 lbs/ft



Steel Post Detail
Approx. 2.0 lbs/ft

Delineator Details

Type A and C

Installation: Install posts along the right shoulder line, in the direction of travel, unless shown otherwise on the plans.


Reflectors: Use reflector of the same color as the adjacent pavement marking with a 0.080 inch minimum thickness sign backing material.

(1) Use fasteners that are a minimum ¼" diameter. Use double headed rivet or other non-rust vandal resistant fastener.


(2) Drill only those holes required to attach the number of reflectors on that post, or drill all the posts the same so that any number of reflectors may be added.

(3) Mount reflector facing traffic at an angle of 90° away from oncoming traffic.


(4) Include all costs for materials, labor, and equipment to install double sided type A delineators in the unit price bid for "Delineators-Type A-Double Sided." Include all costs for materials, labor, and equipment to install type C delineators in the unit price bid for "Delineators-Type C."



Delineators-Type A-Double Sided Attachment Detail




Delineators-Type C Attachment Detail




Back to Back reflectors
(Type A delineator)

U-type Post
(Delineators-Type A-Double Sided)



Narrow Bridges
Three reflectors
(Type C delineator)



U-type Post
(Delineators-Type C)


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12/16/22	
REVISIONS	
DATE	CHANGE

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12/16/22

TYPE A REFLECTORIZED DELINEATOR SPACING - TWO-LANE TWO-WAY HIGHWAY

D-754-21C

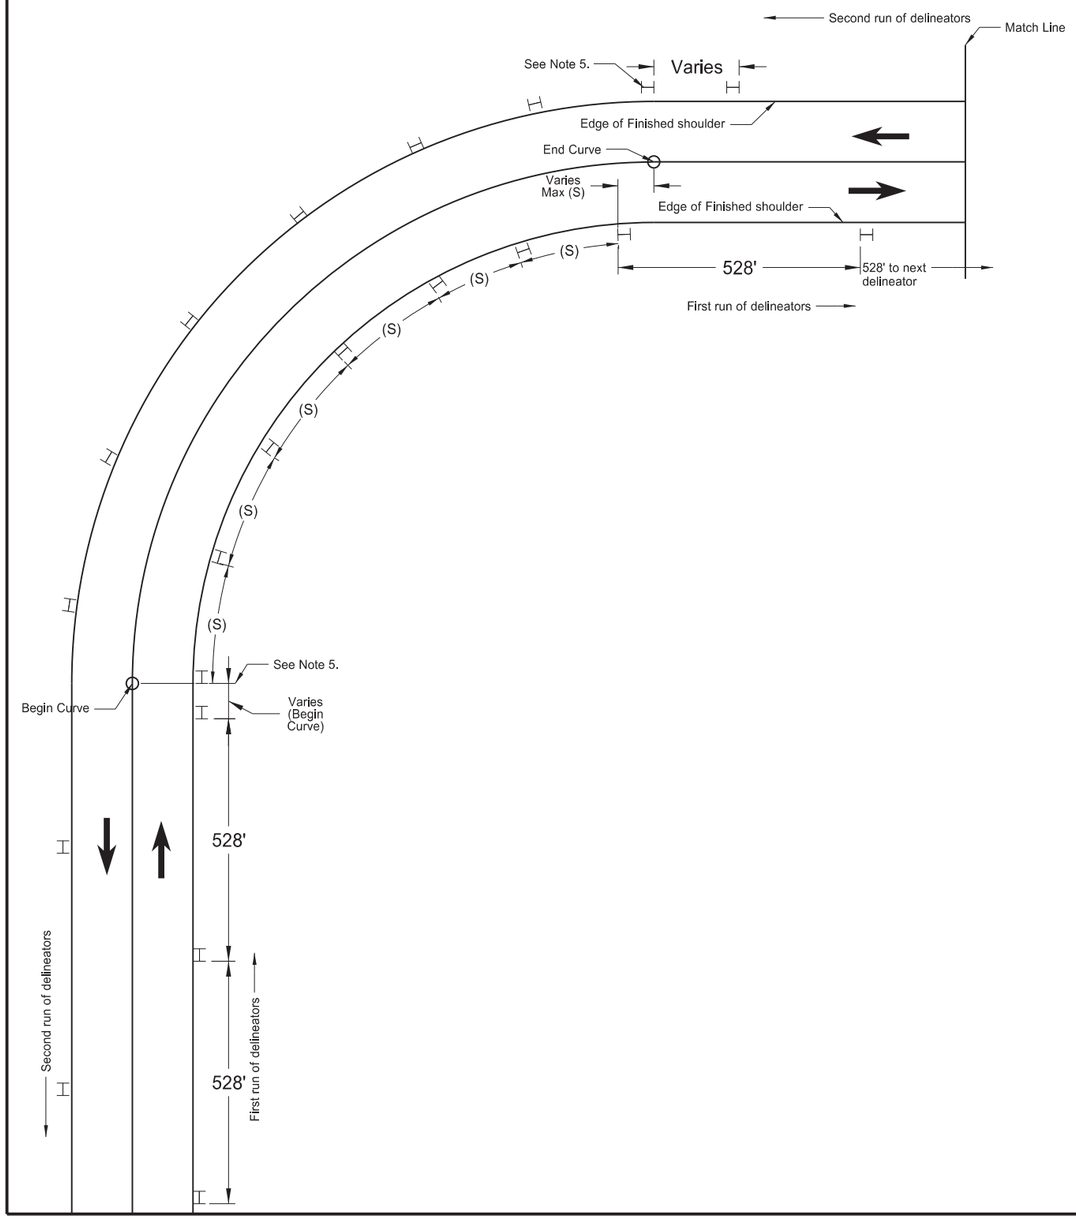


Spacing:

Curve Radius	Spacing (S) on Center
R > 11,500'	528'
11,500' ≥ R > 1,200'	264'
1,200' ≥ R	See table below

Radius (R) of Curve	Approx. Spacing (S) on Curve
1,200' ≥ R > 1,000'	90'
1,000' ≥ R > 800'	80'
800' ≥ R > 500'	65'
500' ≥ R > 300'	50'
300' ≥ R > 180'	35'
180' ≥ R > 50'	20'

Notes:

1. Do not place delineators within 100' of a railroad crossing. Shift delineators in either direction to minimize impact to uniform spacing. Reestablish uniform spacing based on the last delineator location.
2. For delineators that land within approaches, shift delineators in either direction a distance not exceeding ¼ of the uniform spacing. Eliminate delineators that still fall within approaches.
3. Eliminate delineators landing within guardrail. Reestablish uniform spacing based on last delineator.
4. Do not place delineators within ¼ of the uniform spacing of a reference point marker. Adjust the delineators on the opposite side to maintain an even spacing between opposing sides.
5. Install Type A delineators at the start of each curve in the adjacent lane's direction of travel.
6. Place the second run of delineators on the opposite side of the road midpoint between delineators placed during the first run.
7. Discontinue delineators on outside of curve where chevrons exist. Place delineators on inside of curve, at those locations, as provided on basis of estimate.

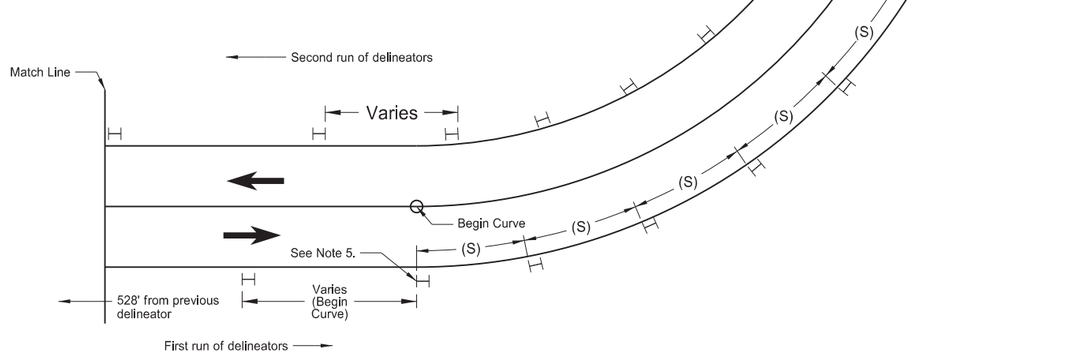

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-16-22	
REVISIONS	
DATE	CHANGE

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12/16/22