Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.
Abn	abandoned
Abut	abutment
Adj	adjusted
Aggr	aggregate
Ahd	ahead
ARV	air release valve
Align	alignment
Al	alley
Alt	alternate
Alum	aluminum
ADA	Americans with Disabilities Act
&	and
Appr	approach
Approx	approximate
ACP	asbestos cement pipe
Asph	asphalt
AC	asphalt cement
Assmd	assumed
@	at
Atten	attenuation
ATR	automatic traffic recorder
Ave	Avenue
Avg	average
ADT	average daily traffic
Bk	back
BF	back face
Balc	balcony
B Wire	barbed wire
Barr	barricade
Btry	battery
BI	beehive inlet
Beg	begin
BG	below grade
BM	bench mark
Bkwy	bikeway
Bit	bituminous
Blk	block
BH	bore hole
Bot	bottom
Blvd	Boulevard
Bndry	boundary
Brkwy	breakaway
Br	bridge
Bldg	building
Bus.	business
BV	butterfly valve
Byp	bypass
C Gdrl	cable guardrail
Calc	calculate
CIP	cast iron pipe
CB	catch basin
CRS	cationic rapid setting
C Gd	cattle guard
C To C	center to center
CL or ℄	centerline
Ch	chain
Chnlk	chain-link
Ch Blk	channel block
Ch Ch	channel change
Chk	check
Chsld	chiseled
Cir	circle
Cl	class
Clnt	clean-out
Clr	clear
Cl&gr	clearing & grubbing
Comb.	combination
Coml	commercial
Compr	compression
CADD	computer aided drafting & design
Conc	concrete
CECB	concrete erosion control blanket
Cond	conductor
Const	construction
Cont	continuous
CSB	continuous split barrel sample
Contr	contraction
Contr	contractor
CP	control point
Coord	coordinate
Cor	corner
Corr	corrected
CAES	corrugated aluminum end section
CAP	corrugated aluminum pipe
CMES	corrugated metal end section
CMP	corrugated metal pipe
CPVCP	corrugated poly-vinyl chloride pipe
CSES	corrugated steel end section
CSFES	corrugated steel flared end section
CSP	corrugated steel pipe
CSTES	corrugated steel traversable end section
Co	County
Crse	course
Ct	Court
Xarm	cross arm
Xbuck	cross buck
Xsec	cross sections
Xing	crossing
Xrd	crossroad
Crn	crown
Culv	culvert
C&G	curb & gutter
CI	curb inlet
CR	curb ramp
C	cut
Dd Ld	dead load
Defl	deflection
Defm	deformed
Dlnt	delineate
Dlntr	delineator
Depr	depression
Desc	description
Det	detail
DWP	detectable warning panel
Dtr	detour
Dia or ø	diameter
Dir	direction
Dist	distance
DM	disturbed material
DB	ditch block
DG	ditch grade
Dbl	double
Dn	down
Dwg	drawing
Dr	drive
Drwy	driveway
DI	drop inlet
D	dry density
Ea	each
Esmt	easement
E	East
EB	Eastbound
Elast	elastomeric
EL	electric locker
E Mtr	electric meter
EVSE	electric vehicle supply equipment
Elec	electric/al
EDM	electronic distance meter
Elev or El	elevation
Ellipt	elliptical
Emb	embankment
Emuls	emulsion/emulsified
ES	end section
Engr	engineer
ESS	environmental sensor station
Eq	equal
Evgr	evergreen
Exc	excavation
Exst	existing
Exp	expansion
Expy	Expressway
E	external of curve
Extru	extruded
FOS	factor of safety
Fed	Federal
FP	feed point
Fn	fence
Fn P	fence post
FO	fiber optic
FD	field drive
F	fill
FAA	fine aggregate angularity
FH	fire hydrant
Fl	flange
Flrd	flared
FES	flared end section
F Bcn	flashing beacon
FA	flight auger sample
FL	flow line
Ftg	footing
FM	force main
Fnd	found
Fdn	foundation
Frac	fractional
Frwy	freeway
Frt	front
FF	front face
F Disp	fuel dispenser
FFP	fuel filler pipes
FLS	fuel leak sensor
Furn	furnish/ed

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

Galv	galvanized
Gar	garage
Gs L	gas line
G Reg	gas line regulator
GMV	gas main valve
G Mtr	gas meter
GSV	gas service valve
GVP	gas vent pipe
GV	gate valve
Ga	gauge
Gov	government
Grd	graded/grade
Grnd	ground
GWM	ground water monitor
Gdrl	guardrail
Gtr	gutter
H Plg	H piling
Hdwl	headwall
Ht	height
Hel	helical
HDPE	high density polyethylene
HM	high mast
HP	high pressure
HPS	high pressure sodium
HTCG	high tension cable guardrail
Hwy	highway
Hor	horizontal
HBP	hot bituminous pavement
HMA	hot mix asphalt
Hyd	hydrant
Ph	hydrogen ion content
Id	identification
Incl	inclinometer tube
IMH	inlet manhole
ID	inside diameter
Inst	instrument
Intchg	interchange
Intmdt	intermediate
Intscn	intersection
Inv	invert
IP	iron pipe
Jt	joint
Jct	junction
Ln	lane
Lg	large
Lat	latitude
Lt	left
Lens	lenses
Lvl	level
Lvlng	leveling
Lht	light
LP	light pole
Ltg	lighting
Liq	liquid
LL	liquid limit
Loc	location
Long.	longitude
Lp	loop
LD	loop detector
Lum	luminaire
Mb	mailbox
ML	main line
MH	manhole
Mkd	marked
Mkr	marker
Mkg	marking
MA	mast arm
Matl	material
Max	maximum
Meas	measure
Mdn	median
MD	median drain
MC	medium curing
MGS	Midwest Guardrail System
MM	mile marker
MP	mile post
Min	minimum
Misc	miscellaneous
Mon	monument
Mnd	mound
Mtbl	mountable
Mtd	mounted
Mtg	mounting
Mk	muck
Neop	neoprene
Ntwk	network
N	North
NE	Northeast
NW	Northwest
NB	Northbound
No. or #	number
Obsc	obscure(d)
Ocpd	occupied
Ocpy	occupy
O/s	offset
OC	on center
C	one dimensional consolidation
OC	organic content
Orig	original
O To O	out to out
OD	outside diameter
OH	overhead
PMT	pad mounted transformer
Pg	pages
Pntd	painted
Pr	pair
Pnl	panel
Pk	park
PSD	passing sight distance
Pvmt	pavement
Ped	pedestal
Ped	pedestrian
PPP	pedestrian pushbutton post
Pen.	penetration
Perf	perforated
Per.	perimeter
Perm	permanent
PL	pipeline
Pl	place
P&P	plan & profile
PL	plastic limit
Pl or ℄	plate
Pt	point
PE	polyethylene
PVC	polyvinyl chloride
PCC	Portland Cement concrete
PP	power pole
Preempt	preemption
Prefab	prefabricated
Prfmd or Pref	preformed
Prep	preperation
Press.	pressure
PRV	pressure relief valve
Prestr	prestressed
Pvt	private
PD	private drive
Prod.	production/produce
Prog	programmed
Prop.	property
Ppsd	proposed
PB	pull box
Qty	quantity
Qtr	quarter
Rad or R	radius
RR	railroad
Rlwy	railway
Rsd	raised
RC	rapid curing
Rec	record
Rcy	recycle
RAP	recycled asphalt pavement
RPCC	recycled portland cement concrete
Ref	reference
R Mkr	reference marker
RM	reference monument
RP	reference point
Refl	reflectorized
RCB	reinforced concrete box
RCES	reinforced concrete end section
RCFES	reinforced concrete flared end section
RCP	reinforced concrete pipe
RCPS	reinforced concrete pipe sewer
RCTES	reinforced concrete traversable end section
Reinf	reinforcement
Res	reservation
Res	residence
Ret	retaining
Rev	reverse
Rt	right
R/W	right of way
Riv	river
Rd	road
Rdbd	road bed
Rdwy	roadway
RWIS	roadway weather information system
Rk	rock
Rt	route

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

Salv	salvage(d)
San	sanitary sewer line
Sec	section
SL	section line
Sep	separation
Seq	sequence
Serv	service
Sht	sheet
Shtng	sheeting
Shldr	shoulder
Sw or Sdwk	sidewalk
SD	sight distance
SN	sign number
Sig	signal
Sgl	single
SRCP	slotted reinforced concrete pipe
SC	slow curing
SS	slow setting
Sm	small
S	South
SE	Southeast
SW	Southwest
SB	Southbound
Sp	spaces
Spcl	special
SA	special assembly
SP	special provisions
G	specific gravity
Spk	spike
SB	split barrel sample
SH	sprinkler head
SV	sprinkler valve
Sq	square
Stk	stake
Std	standard
N	standard penetration test
Std Specs	standard specifications
Stm L	steam line
SEC	steel encased concrete
SMA	stone matrix asphalt
SSD	stopping sight distance
SD	storm drain
St	street
SPP	structural plate pipe
SPPA	structural plate pipe arch
Str	structure
Subd	subdivision
Sub	subgrade
Sub Prep	subgrade preperation
Ss	subsoil
SS	supplement specification
Supp	supplemental
Surf	surfacing
Surv	survey
Sym	symmetrical

Tel	telephone
Tel B	Telephone Booth
Tel P	telephone pole
Tv	television
Temp	temperature
Temp	temporary
TBM	temporary bench mark
T	thinwall tube sample
Ts	topsoil
Traf	traffic
TSCB	traffic signal control box
Tr	trail
Transf	transformer
Trans	transition
TT	transmission tower
TES	traversable end section
Trans	transverse
Trtd	treated
Trmt	treatment
Qc	triaxial compression
TERO	tribal employment rights ordinance
Tpl	triple
Typ	typical
Qu	unconfined compressive strength
Ugrnd	underground
Util	utility
VG	valley gutter
Vap	vapor
Vert	vertical
VCP	vitrified clay pipe
Vol	volume
VSFS	vehicle speed feedback sign
Wkwy	walkway
W	water content
WGV	water gate valve
WL	water line
WM	water main
WMV	water main valve
W Mtr	water meter
WSV	water service valve
WW	water well
Wrng	wearing
WIM	weigh in motion
W	west
WB	westbound
Wrng	wiring
W/	with
W/o	without

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in.	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International
T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CC	closing corner
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
MC	meander corner
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
SC	standard corner
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WC	witness corner
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added - Continued from D-101-3
4-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM	702 Communications
ACCENT	Accent Communications
AGASSIZ WU	Agassiz Water Users District
AGC	Associated General Contractors of America
ALL PL	Alliance Pipeline
ALL SEAS WU	All Seasons Water Users District
AMOCO PI	Amoco Pipeline Company
AMRDA HESS	Amerada Hess Corporation
AT&T	AT&T Corporation
B PAW	Bear Paw Energy Incorporated
BAKER ELEC	Baker Electric
BASIN ELEC	Basin Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative
BELLE PL	Belle Fourche Pipeline Company
BLM	Bureau of Land Management
BNSF	Burlington Northern Santa Fe Railway
BOEING	Boeing
BRNS RWD	Barnes Rural Water District
BURK-DIV ELEC	Burke-Divide Electric Cooperative
BURL WRD	Burleigh County Water Resource District
CABLE ONE	Cable One
CABLE SERV	Cable Services
CAP ELEC	Capital Electric Cooperative Incorporated
CASS CO ELEC	Cass County Electric Cooperative
CASS RWU	Cass Rural Water Users District
CAV ELEC	Cavalier Rural Electric Cooperative
CBLCOM	Cablecom Of Fargo
CENEX PL	Cenex Pipeline
CENT PL WATER DIST	Central Pipe Line Water District
CENT PWR ELEC	Central Power Electric Cooperative
CENTURYLINK	CenturyLink
COE	Corps of Engineers
CONS COMM	Consolidated Communications
CONS TELCOM	Consolidated Telcom
CONT RES	Continental Resource Inc
CPR	Canadian Pacific Railway
D O E	Department Of Energy
DAK CARR	Dakota Carrier Network
DAK CENT TEL	Dakota Central Telephone
DAK RWD	Dakota Rural Water District
DGC	Dakota Gasification Company
DICKEY R NET	Dickey Rural Networks
DICKEY WRD	Dickey County Water Resource District
DICKEY TEL	Dickey Telephone
DNRR	Dakota Northern Railroad
DOME PL	Dome Pipeline Company
DVELEC	Dakota Valley Electric Cooperative
DVMW	Dakota, Missouri Valley & Western
E CENT REG WD	East Central Water District
ENBRDG	Enbridge Pipelines Incorporated
ENVENTIS	Enventis Telephone
EQUINOR	Equinor Pipeline
FALK MNG	Falkirk Mining Company
FHWA	Federal Highway Administration
G FKS-TRL WD	Grand Forks-traill Water District
GETTY TRD & TRAN	Getty Trading & Transportation
GLDN W ELEC	Golden West Electric Cooperative
GTR RAMSEY WD	Greater Ramsey Water District
GT PLNS NAT GAS	Great Plains Natural Gas Company
HALS TEL	Halstad Telephone Company
IDEA1	Idea1
INT-COMM TEL	Inter-Community Telephone Company
KANEB PL	Kaneb Pipeline Company
KEM ELEC	Kem Electric Cooperative Incorporated
KOCH GATH SYS	Koch Gathering Systems Incorporated
LKHD PL	Lakehead Pipeline Company
LWR YELL R ELEC	Lower Yellowstone Rural Electric
LUMEN	Lumen Technologies Incorporated
MCKNZ CON	McKenzie Consolidated Telcom
MCKNZ ELEC	McKenzie Electric Cooperative
MCKNZ WRD	McKenzie County Water Resource District
MCLEOD	McLeod USA
MCLN ELEC	McLean Electric Cooperative
MCLN-SHRDN R WAT	McLean-Sheridan Rural Water District
MDU	Montana-dakota Utilities
MIDCO	MidContinent Communications
MIDSTATE TEL	Midstate Telephone Company
MINOT CABLE	Minot Cable Television
MINOT TEL	Minot Telephone Company
MISS VALL COMM	Missouri Valley Communications Incorporated
MISS W W S	Missouri West Water System
MNKOTA PWR	Minnkota Power
MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative
MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative
MLGC	Moore & Liberty - Griggs County
MUNICIPAL	City Water And Sewer
MUNICIPAL	City Of '.....'
N CENT ELEC	North Central Electric Cooperative
N PRAIR REG WD	North Prairie Regional Water District
ND PKS & REC	North Dakota Parks And Recreation
ND TEL	North Dakota Telephone Company
NDDOT	North Dakota Department of Transportation
NE REG WD	Northeast Regional Water District
NDSU SOIL SCI DEPT	NDSU Soil Science Department
NEMONT TEL	Nemont Telephone
NODAK R ELEC	Nodak Rural Electric Cooperative
NOON FRMS TEL	Noonan Farmers Telephone Company
NPR	Northern Plains Railroad
NSP	Northern States Power
NTHN BRDR PL	Northern Border Pipeline
NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated
NTHWSTRN REF	Northwestern Refinery Company
NW COMM	Northwest Communication Cooperation
NWRWD	Northwest Rural Water District
ONEOK	Oneok gas
OSHA	Occupational Safety and Health Administration
OTTR TL PWR	Otter Tail Power Company
PAAP	Plains All American Pipeline
P L E M	Prairielands Energy Marketing
POLAR COM	Polar Communications
PVT ELEC	Private Electric
QWEST	Qwest Communications
R&T REG WD	R & T Water District
RED RIV COMM	Red River Communications
RESVTN TEL	Reservation Telephone
ROBRTS TEL	Roberts Company Telephone
R-RIDER ELEC	Roughrider Electric Cooperative
RRVW	Red River Valley & Western Railroad
S CENT REG WD	South Central Regional Water District
SE W U	Southeast Water Users Incorporated
SCOTT CABLE	Scott Cable Television Dickinson
SHERDN ELEC	Sheridan Electric Cooperative
SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
SKYTECH	Skyland Technologies Incorporated
SLOPE ELEC	Slope Electric Cooperative Incorporated
SOURIS RIV TELCOM	Souris River Telecommunications
ST WAT COMM	State Water Commission
STATE LN WATER	State Line Water Cooperative
STER ENG	Sterling Energy
STUT RWD	Stutsman Rural Water District
SW PL PRJ	Southwest Pipeline Project
SWWA	Southwest Water Authority
SUNOCO	Sunoco LP
T M C	Turtle Mountain Communications
TCI	TCI of North Dakota
TESORO HGH PLNS PL	Tesoro High Plains Pipeline
TRI-CNTY WU	Tri-County Water Users Incorporated
TRL CO WRD	Traill County Water Resource District
UNTD TEL	United Telephone
UPPR SOUR WD	Upper Souris Water District
US SPRINT	U.S. Sprint
USAF MSL CABLE	U.S.A.F. Missile Cable
USFWS	US Fish and Wildlife Service
USW COMM	U.S. West Communications
VRNDRY ELEC	Verendrye Electric Cooperative
W RIV TEL	West River Telephone Incorporated
WAPA	Western Area Power Administration
WAWSA	Western Area Water Supply Authority
WEB	W. E. B. Water Development Association
WILLI WRD	Williams County Water Resource District
WILSTN BAS PL	Williston Basin Interstate Pipeline Company
WLSH RWD	Walsh Water Rural Water District
WOLVRTN TEL	Wolverton Telephone
XLENER	Xcel Energy
YSVR	Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFFT
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

LINE STYLES

D-101-20

Existing Topography

- Existing Ground Void
- Existing Cemetary Boundary
- Existing Box Culvert Bridge
- Existing Concrete Surface
- Existing Drainage Structure
- Existing Gravel Surface
- Existing Riprap
- Existing Dirt Surface
- Existing Asphalt Surface
- Existing Tie Point Line
- Existing Railroad Centerline
- Existing Guardrail Cable
- Existing Guardrail Metal
- Existing Edge of Water
- Existing Fence
- Existing Railroad
- Existing Field Line
- Exst Flow
- Existing Curb
- Existing Valley Gutter
- Existing Driveway Gutter
- Existing Curb and Gutter
- Existing Mountable Curb and Gutter

- Existing 3-Cable w Posts
- Site Boundary
- Existing Berm, Dike, Pit, or Earth Dam
- Existing Ditch Block
- Existing Tree Boundary
- Existing Brush or Shrub Boundary
- Existing Retaining Wall
- Existing Planter or Wall
- Existing W-Beam Guardrail with Posts
- Existing Railroad Switch
- Gravel Pit - Borrow Area
- Existing Wet Area-Vegetation Break
- Existing High Tension Cable Guardrail
- Existing High Tension Cable Guardrail with Posts

Proposed Topography

- 3-Cable w Posts
- Flow
- Fence
- Remove Line
- Wall
- Retaining Wall (Plan View)
- W-Beam w Posts
- High Tension Cable Guardrail with Posts

Existing Utilities

- Existing Electrical
- Existing Fiber Optic Line
- Existing TV Fiber Optic
- Existing Gas Pipe
- Existing Overhead Utility Line
- Existing Power
- Existing Fuel Pipeline
- Existing Undefined Above Ground Pipe Line
- Existing Sanitary Sewer
- Existing Sanitary Force Main
- Existing Storm Drain
- Existing Storm Drain Force Main
- Existing Culvert
- Existing Telephone Line
- Existing TV Line
- Existing Water or Steam Line
- Existing Under Drain
- Existing Slotted Drain
- Existing Conduit
- Existing Conductor
- Existing Down Guy Wire Down Guy
- Existing Underground Vault or Lift Station

Proposed Utilities

- 24 Inch Pipe
- Reinforced Concrete Pipe
- Under Drain
- Edge Drain

Traffic Utilities

- Conductor
- Fiber Optic
- Existing Loop Detector
- Existing Double Micro Loop Detector
- Micro Loop Detector Double
- Existing Micro Loop Detector
- Micro Loop Detector
- Signal Head with Mast Arm
- Existing Signal Head with Mast Arm

Sign Structures

- Existing Overhead Sign Structure
- Existing Overhead Sign Structure Cantilever
- Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
09-23-16 12-18-20	Added and Revised Items, Organized by Functional Groups General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

LINE STYLES

D-101-21

Right Of Way

- Easement
- Existing Easement
- Right of Way
- Existing Right of Way
- Existing Right of Way Railroad
- Existing Right of Way Not State Owned
- Existing Government Lot Line
- Existing Adjacent Block Lines
- Existing Adjacent Lot Lines
- Existing Adjacent Property Line
- Existing Adjacent Subdivision Lines
- Sight Distance Triangle Line
- Dimension Leader

Boundary Control

- Existing City Corporate Limits or Reservation Boundary
- Existing State or International Line
- Existing Township
- Existing County
- Existing Section Line
- Existing Quarter Section Line
- Existing Sixteenth Section Line
- Existing Centerline
- Tangent Line

Cross Sections and Typicals

- Existing Ground
- Existing Topsoil (Cross Section View)
- Existing Ground Void (Not Surveyed) (void — void — void — v)
- Existing Concrete
- Existing Aggregate (Cross Section View)
- Existing Curb and Gutter (Cross Section View)
- Existing Asphalt (Cross Section View)
- Existing Reinforcement Rebar

Geotechnical

- Geotextile Fabric Type D (D — D)
- Geogrid (Geo — Geo)
- Geotextile Fabric Type R (R — R)
- Geotextile Fabric Type R1 (R — R)
- Geotextile Fabric Type RR (RR — RR)
- Geotextile Fabric Type S (S — S)
- Subgrade Reinforcement
- Failure Line

Countours

- Depression Contours
- Supplemental Contour

Profile

- Subgrade, Subcut or Ditch Grade
- Topsoil Profile

Striping

- Centerline Pavement Marking
- Barrier with Centerline Pavement Marking
- Barrier Pavement Marking
- Stripe 4 IN Dotted Extension White
- Stripe 8 IN Dotted Extension White
- Stripe 8 IN Lane Drop

Pavement Joints

- Doweled Joint
- Tie Bar 30 Inch 4 Foot Center to Center
- Tie Bar 18 Inch 3 Foot Center to Center
- Tie Bar at Random Spacing

Bridge Details

- Small Hidden Object
- Large Hidden Object
- Phantom Object
- Existing Conditions Object
- Centerline Main
- Centerline Secondary
- Excavation Limits
- Proposed Ground
- Sheet Piling

Erosion Control

- Limits of Const Transition Line
- Bale Check
- Rock Check
- Floating Silt Curtain (S — S)
- Silt Fence (SF — SF)
- Excavation Limits
- Fiber Rolls

Environmental

- Wetland Mitigation
- Existing Wetland Easement USFWS
- Existing Wetland Jurisdictional
- Existing Wetland
- Tree Row

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16 12-18-20	Added and Revised Items, Organized by Functional Groups General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

SYMBOLS

D-101-30

North Arrow (Half Scale)

Alignment Data Point

Alignment Monument

Spot Elevation

Existing Miscellaneous Spot

Existing Access Control Arrow

Existing Benchmark

Reset USGS Marker

Iron Monument Found

Iron Pin R/W Monument

Property Corner

Iron Pin Reference Monument

Right of Way Marker (Exst, Ppsd, Reset)

Existing Federal Reference Corner

Existing Section Corner (Full, Quarter, Sixteenth, Meander)

Existing Witness Corner

Existing Control Point (CP, GPS-RTK, TRI)

Existing Traverse PI Aerial Panel

Existing Reference Marker Point NGS

Existing EFB Misc

Existing Bush or Shrub

Existing Large Evergreen Tree

Existing Small Evergreen Tree

Existing Large Tree

Existing Small Tree

Existing Tree Trunk

Cairn or Stone Circle

Existing Artifact

Existing Satellite Dish

Existing Weather Station

Existing Windmill or Tower

Reinforced Pavement

CSB Continuous Split Barrel Sample

FA Flight Auger Sample

SB Split Barrel Sample

T Thinwall Tube Sample

N Standard Penetration Test

Incl Inclinometer Tube

Excavation Unit

Existing Ground Water Well Bore Hole

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

SYMBOLS

D-101-31

- Flexible Delineator
- Flexible Delineator Type A (Exst, Ppsd)
- Flexible Delineator Type B (Exst, Ppsd)
- Flexible Delineator Type C (Exst, Ppsd)
- Flexible Delineator Type D (Exst, Ppsd)
- Flexible Delineator Type E (Exst, Ppsd)
- Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type C (Exst, Ppsd, Diamond Grade)
- Delineator Type D (Exst, Ppsd, Diamond Grade)
- Delineator Type E (Exst, Ppsd, Diamond Grade)
- Barricade (Type I, Type II, Type III}
- Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)
- Attenuation Device
- Truck Mounted Attenuator
- Delineator Drums
- Flagger
- Tubular Marker
- Traffic Cone
- Back to Back Vertical Panel Sign

- Highway Sign (Exst, Ppsd)
- Mile Post Type A (Exst-Ppsd-Reset)
- Mile Post Type B (Exst, Ppsd)
- Mile Post Type C (Exst, Ppsd)
- Object Marker Type I (Exst, Ppsd)
- Object Marker Type II (Exst, Ppsd)
- Object Marker Type III (Exst, Ppsd)
- Existing Reference Marker
- Road Closure Gate 18 Ft (Exst, Ppsd)
- Road Closure Gate 28 Ft (Exst, Ppsd)
- Road Closure Gate 40 Ft (Exst, Ppsd)
- Existing Railroad Battery Box
- Existing RR Profile Spot
- Existing Railroad Crossbuck
- Existing Railroad Frog
- Existing Mailbox (Private, Federal)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

SYMBOLS

D-101-32

- Existing Luminaire
- Luminaire LED
- Existing Light Standard Luminaire
- Relocate Light Standard
- Light Standard Light LED Luminaire
- Light Standard 35 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 50 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 70 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 100 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 150 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 200 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 250 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 310 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 400 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 700 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire
- Emergency Vehicle Detector
- Video Detection Camera

- High Mast Light Standard 3 Luminaire (Exst, Ppsd)
- High Mast Light Standard 4 Luminaire (Exst, Ppsd)
- High Mast Light Standard 5 Luminaire (Exst, Ppsd)
- High Mast Light Standard 6 Luminaire (Exst, Ppsd)
- High Mast Light Standard 7 Luminaire (Exst, Ppsd)
- High Mast Light Standard 8 Luminaire (Exst, Ppsd)
- High Mast Light Standard 9 Luminaire (Exst, Ppsd)
- High Mast Light Standard 10 Luminaire (Exst, Ppsd)
- Overhead Sign Structure Load Center (Exst, Ppsd)
- Traffic Signal Controller (Exst, Ppsd)
- Pad Mounted Traffic Signal Controller (Exst, Ppsd)
- Flashing Beacon (Exst, Ppsd)
- Concrete Foundation (Exst, Ppsd)
- Pipe Mounted Flasher (Exst, Ppsd)
- Pad Mounted Feed Point (Exst, Ppsd)
- Pipe Mounted Feed Point with Pad (Exst, Ppsd)
- Pole Mounted Feed Point (Exst, Ppsd)
- Junction Box (Exst, Ppsd)
- Existing Pedestrian Head with Number
- Existing Signal Head
- Pole Mounted Head
- Existing Lighting Standard Pole

- Existing Traffic Signal Standard
- Pull Box (Exst-Ppsd-Undefined)
- Intelligent Transportation Pull Box (Exst, Ppsd)
- Transformer (Exst, Ppsd)
- Power Pole (Exst-Ppsd-with Transformer)
- Wood Pole (Exst, Ppsd)
- Pedestrian Push Button Post (Exst, Ppsd)
- Existing Pole
- Existing Telephone Pole
- Existing Post
- Connection Conductor (Ground, Neutral, Phase 1, Phase 2)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-33

Existing Manhole (Electrical, Gas, Telephone)

Water Manhole (Exst, Exst with Valve)

Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)

Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)

Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)

Force Main Storm Drain Manhole (Exst, Exst with Valve)

Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)

Existing Water Appurtenance

Sprinkler Head (Exst, Ppsd)

Fire Hydrant (Exst, Ppsd)

Cleanout (Exst Sanitary, Underdrain)

Existing Catch Basin Inlet (Round, Square)

Existing Curb Inlet (Round, Square)

Existing Slotted Reinforced Concrete Pipe

Catch Basin (Riser 30 Inch, Beehive, Type A)

Inlet Mountable Curb (Type A, Type B)

Inlet Saddle Base (Type 1, Type 2)

Inlet Special (Catch Basin, Type 1, Type A)

Inlet (Tee, Type 1, Type 2, Type 2 Double)

Median Drain

Headwall (Exst, Ppsd, Ppsd Single with Vegitation Barrier, Ppsd Double with Vegitation Barrier)

Cap or Stub
Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water

Existing Pedestal
Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined

Existing Pipe Vent
Gas, Fuel, Sanitary, Storm Drain, Water, Undefined

Valve
Exst Gas, Exst Water, Ppsd Water, Exst Undefined

Pump
Sanitary, Storm Drain, Exst Water

Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Existing Utility Marker

Existing Meter

Existing Fuel Dispensers

Existing Fuel Filler Pipes

Existing Fuel Leak Sensors

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

Cross Section Legend


D-101-40

Description	Longitudinal Parallel to Roadway	Transverse Perpendicular to Roadway*
Cable Line	CBL1	CBL2
Conduit Line	CDU1	CDU2
Electric Line	E1	E2
Fiber Optic Line	F1	F2
Gas Main Line	GM1	GM2
Gas Service Line	GS1	GS2
Gas Transmission Line	GT1	GT2
Fuel Pipeline	PL1	PL2
Sanitary Sewer Force Main	SSF1	SSF2
Sanitary Sewer	SS1	SS2
Steam Line	STE1	STE2
Storm Drain (Assumed Depth)	SD1	SD2
Telephone Line	T1	T2
TV Line	TV1	TV2
Water Main Line	WM1	WM2
Water Service Line	WS1	WS2

Description	Longitudinal Parallel to Roadway	Transverse Perpendicular to Roadway*
Overhead Power Transmission Line	OHT1	OHT2
Overhead Line	OH1	OH2

Light Standard - Multiple Variations
- Concrete
- Steel
- Wood
- with Traffic Signal

Pole - Multiple Variations
- Utility
- Brace
- Feed Point
- Guy
- Power
- Power Structure
- Power with Light
- Power with Transformer



Manhole - Multiple Variations
- Electric
- Fiber Optic
- Gas
- Inlet
- Sanitary Force Main
- Sanitary
- Sanitary with Valve
- Steam
- Storm
- Storm Force Main
- Storm with Valve
- Telephone
- Water
- Water with Meter
- Water with Valve
- Water with Air Release Valve



Anchor

High Tension Cable Guardrail

* Usually the transverse utilities are shown on a cross section with 2 or more symbols. The utility runs from one symbol to the other, but the connection may not be shown.



Connection to infer that probably will not be displayed

When storm drain invert elevations are NOT used to draw pipe, they will appear as shown to the left. When invert elevations are used to draw pipe, they will be a cross section similar to the graphics shown below.



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-20-18	
REVISIONS	
DATE	CHANGE
6/14/2023	CADD Standards Update


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

06/14/23


Docusign Envelope ID: 2C12B4C2-AA38-4A01-B483-3D5495EBE37A

EROSION AND SILTATION CONTROLS


D-256-1

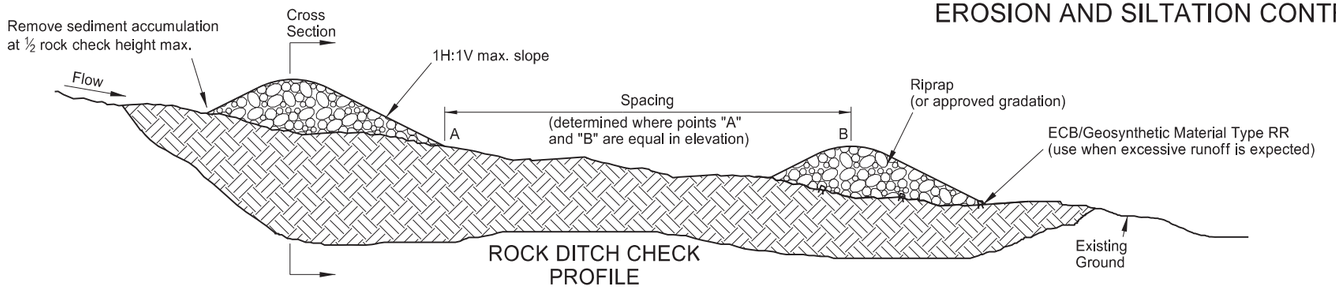


ROCK DITCH CHECK
PROFILE

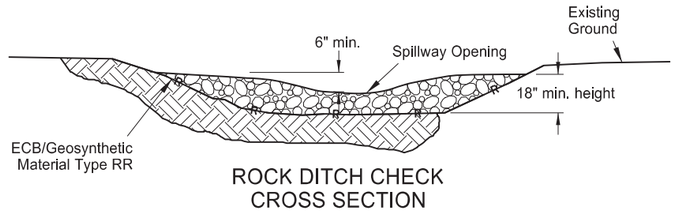

ROCK DITCH CHECK
CROSS SECTION

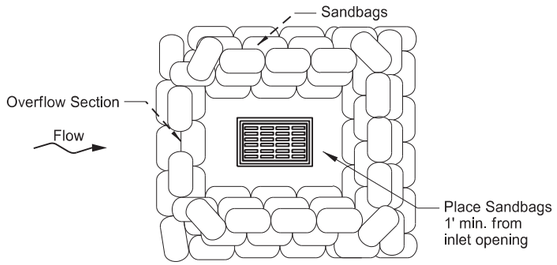


PLAN VIEW




PROFILE VIEW

SANDBAG PROTECTION
(ON SLOPE)

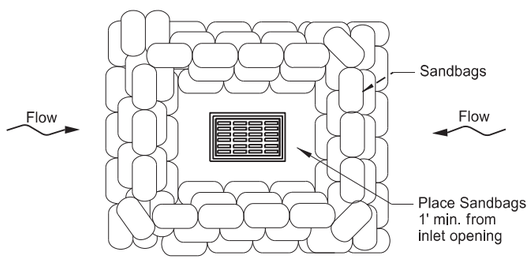


PLAN VIEW




PROFILE VIEW

SANDBAG PROTECTION
(LOW POINT)

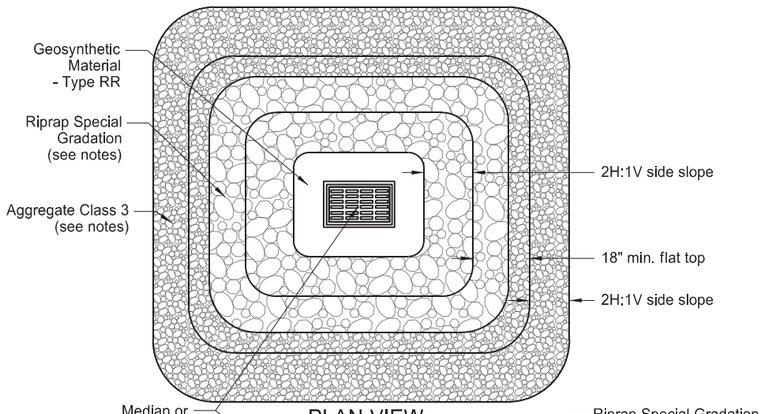

PLAN VIEW




PROFILE VIEW


GRAVEL INLET PROTECTION
(MEDIAN OR DITCH INLET)

Notes:
Use 2 in. to 15 in. diameter rock with 20% by weight exceeding 4 in. diameter for "Riprap Special Gradation."


"Aggregate Class 3" (See Sec. 816.02 of NDDOT Standard Specifications.)

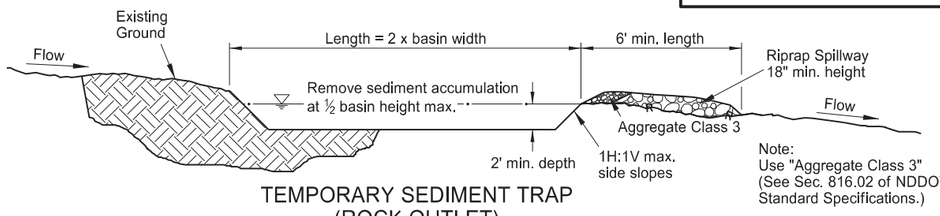


TEMPORARY SEDIMENT TRAP
(ROCK OUTLET)
PROFILE

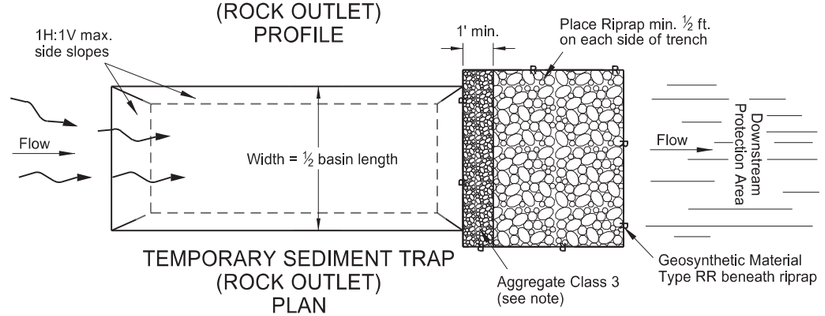

TEMPORARY SEDIMENT TRAP
(ROCK OUTLET)
PLAN

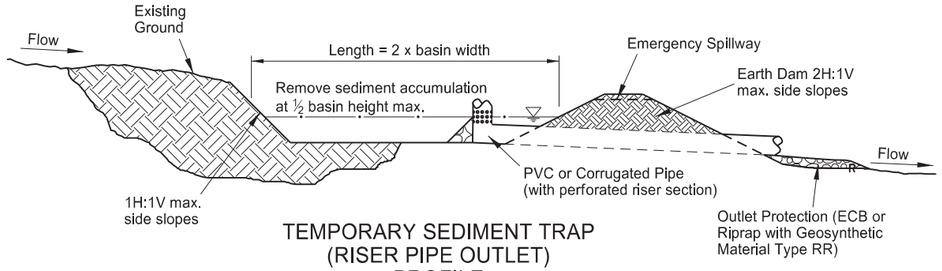

TEMPORARY SEDIMENT TRAP
(RISER PIPE OUTLET)
PROFILE

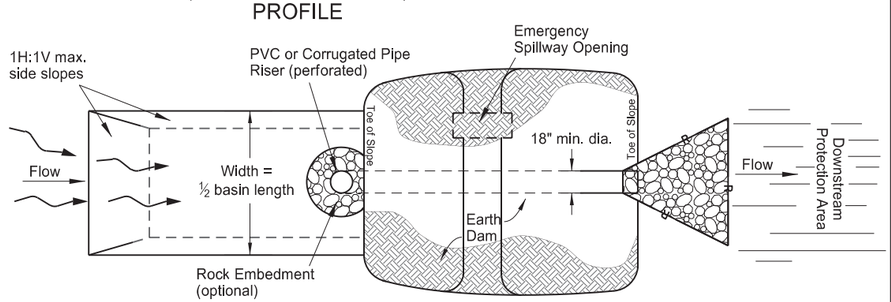

TEMPORARY SEDIMENT TRAP
(RISER PIPE OUTLET)
PLAN

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Changed standard drawing number from D-708-2 to D-256-1 Deleted silt fence details
10-17-17	Updated to active voice
08-27-19	New Design Engineer PE Stamp
09-02-25	Added Median Drain Protection


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

09/02/25

Docusign Envelope ID: EA48955F-7A49-4808-A1CB-C9D2375F54CB


EROSION AND SILTATION CONTROLS - SILT FENCE

D-260-1

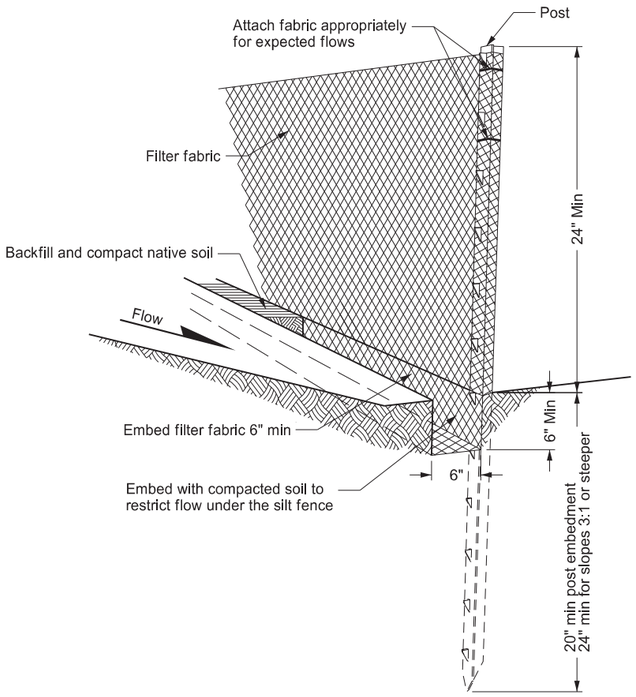


HAND PLACED INSTALLATION DETAIL


Minimize disturbance of ground around trench and smooth surface after excavation to avoid concentrating flows. Compact to prevent undercutting flows.

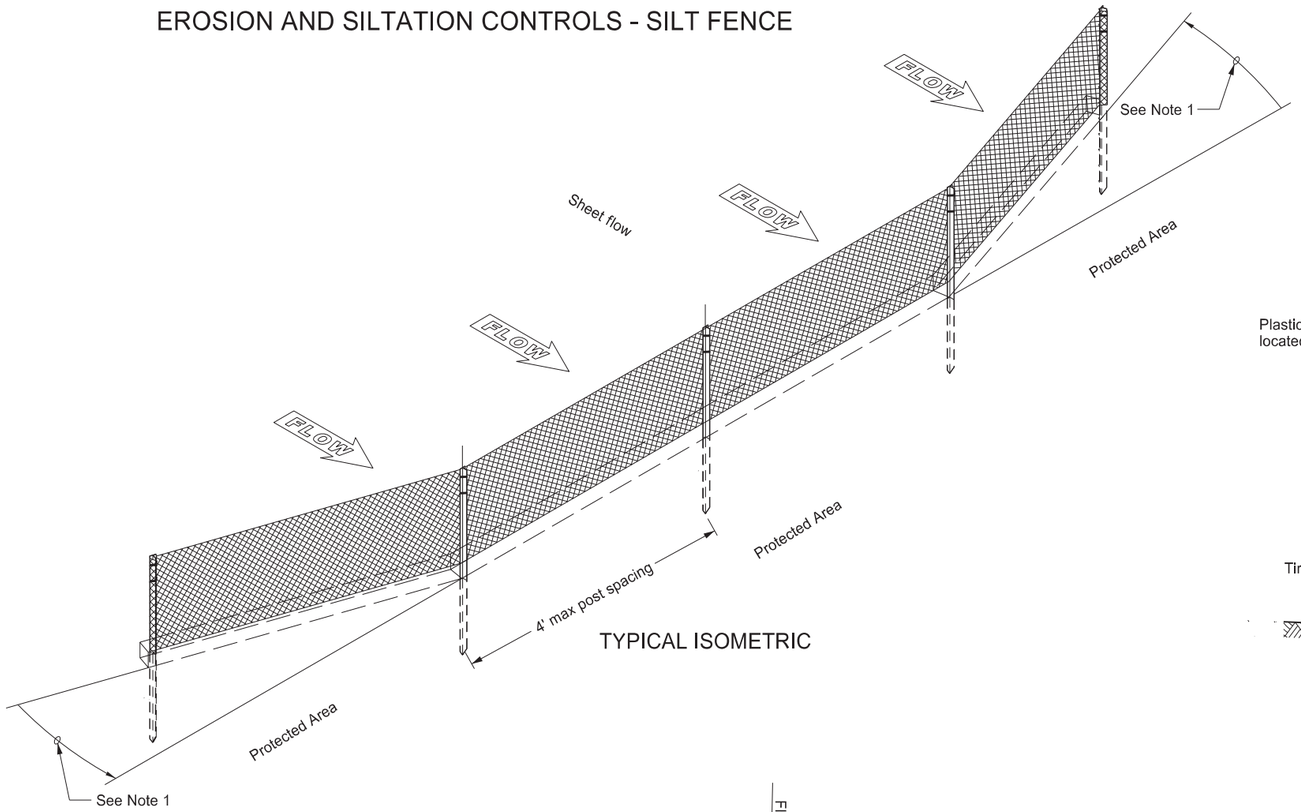


TYPICAL ISOMETRIC

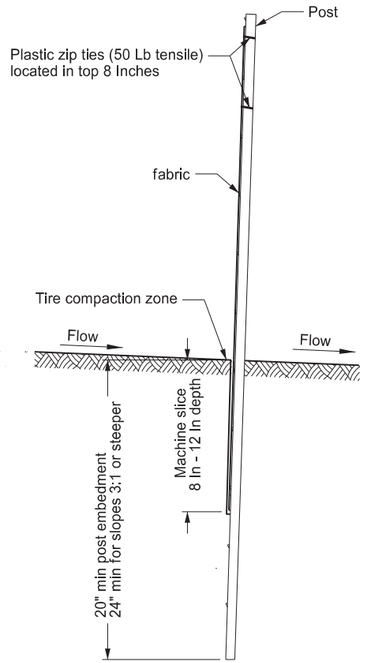

MACHINE SLICED INSTALLATION DETAIL

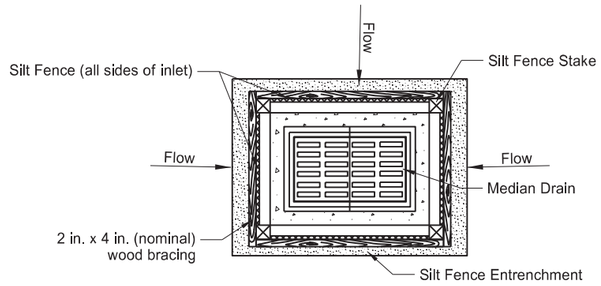


PLAN VIEW

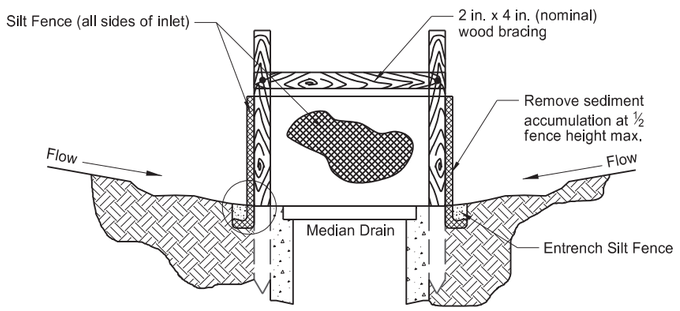

PROFILE VIEW

SILT FENCE PROTECTION (MEDIAN OR DITCH INLET)

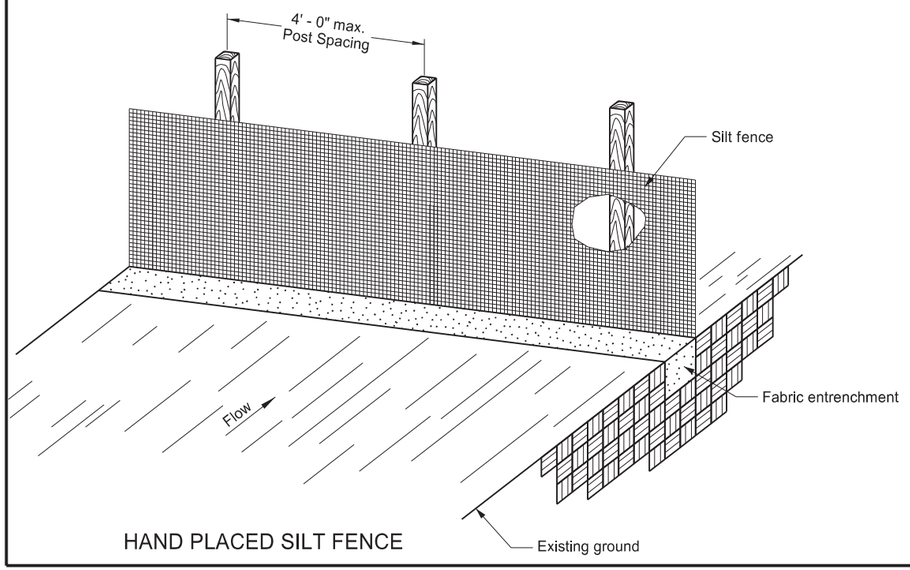

HAND PLACED SILT FENCE

NOTES:
1. Install the ends of the silt fence to point slightly upslope to prevent sediment from flowing around the ends of the fence.
2. Place splices outside low spots.
3. Do not embed silt fence placed in standing water.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
06-26-14	Standard drawing resulted from splitting standard D-708-2
06-27-16	Revised details & added new ones
08-27-19	New Design Engineer PE Stamp
07-22-25	Matched revised silt fence specs
09-04-25	Added median-ditch inlet protection


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

09/04/25

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-7

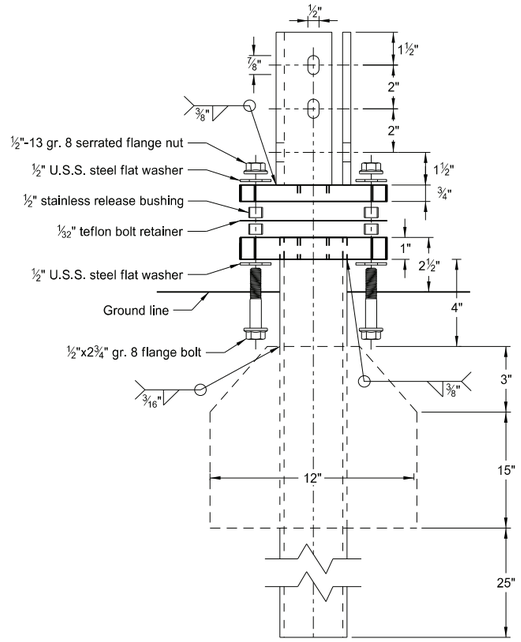


Multi-Directional
Slip Base Assembly


Perforated Tube

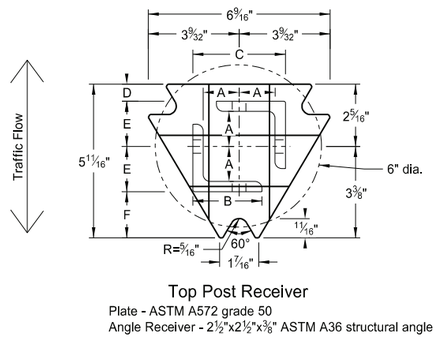


Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2½"x2½"x⅜" ASTM A36 structural angle

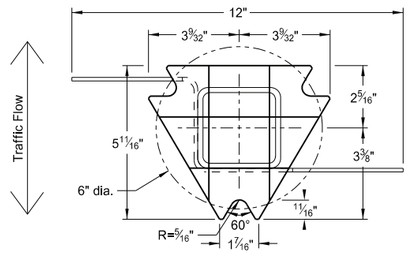


Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50

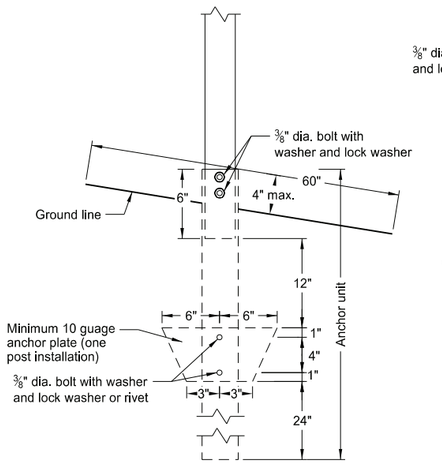


Anchor Unit and Post Assembly

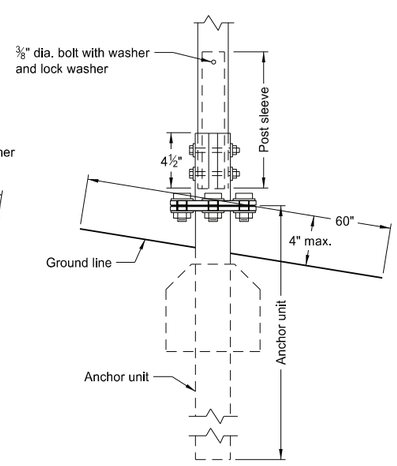

Multi-Directional
Slip Base Anchor Unit
and Post Sleeve Assembly



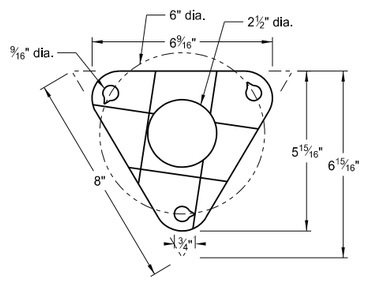

Bolt Retainer for Base Connection
Bolt Retainer- 1/32" Reprocessed Teflon

Notes:

1. Torque slip base bolts as specified by manufacturer.
2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
4. In concrete sidewalk, use same anchor without wings.
5. Provide more than 7' between the first and fourth posts of a four post sign.

Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thick-ness Gauge	Sleeve Size in.	Wall Thick-ness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2¼
1	2¼	12			No	2½
1	2½	12			(A)	3
1	2½	10			Yes	
1	2¼	12	2	12	Yes	
1	2½	12	2¼	12	Yes	
2	2	12			No	2¼
2	2¼	12			No	2½
2	2½	12			Yes	
2	2½	12			Yes	
2	2¼	10	2	12	Yes	
2	2½	12	2¼	12	Yes	
3 & 4	2½	12			Yes	
3 & 4	2½	10			Yes	
3 & 4	2½	12	2¼	12	Yes	
3 & 4	2¼	12	2	12	Yes	
3 & 4	2½	10	2 3/16	10	Yes	

(A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.

(B) For additional wind load, insert the 2 3/16"x10 ga. into 2½"x10 ga.

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia $in.^4$	Cross Sec. Area $in.^2$	Section Modulus $in.^3$
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 9/64"	2½"	3 1/32"	25/32"	1 33/64"	1 7/8"
2½"x10 ga.	1 9/32"	2½"	3 5/16"	⅝"	1 21/32"	1¾"

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

U-Channel Post

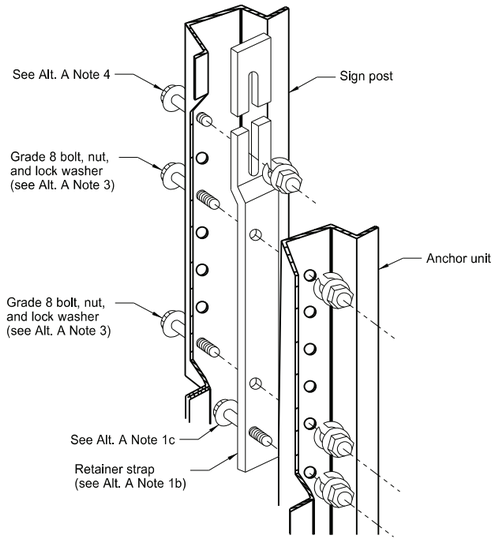


Detail A

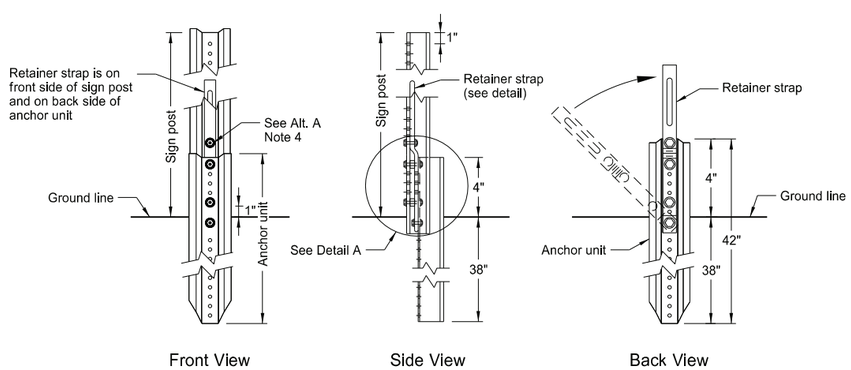


Front View | Side View | Back View

Breakaway U-Channel Detail Alternate A

Install a maximum of 2 posts within 7'.




Retainer Strap Detail

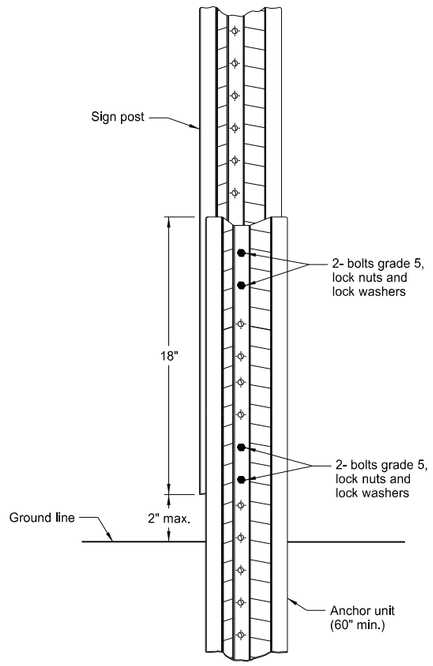

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.

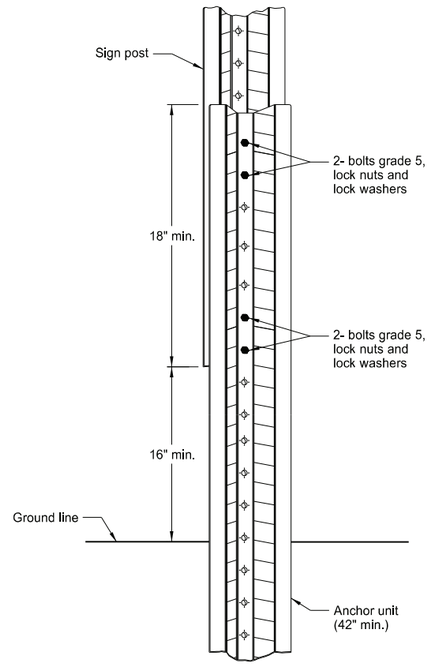

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.

Alternate A Steps of Installation:

1. a) Drive anchor unit to within 12" of ground level.
   b) Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
   c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
   d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
   b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
   b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 ENGINEER NORTH DAKOTA

08/01/24


Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS


D-704-9

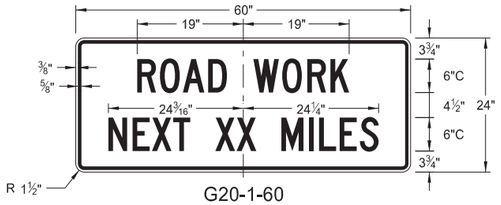


G20-1-60
Legend: black (non-refl)
Background: orange

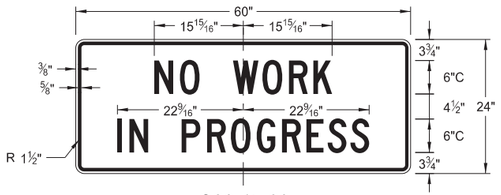


G20-1b-60
Legend: black (non-refl)
Background: orange

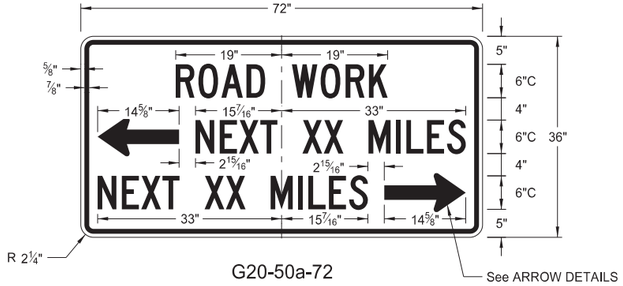


G20-50a-72
Legend: black (non-refl)
Background: orange

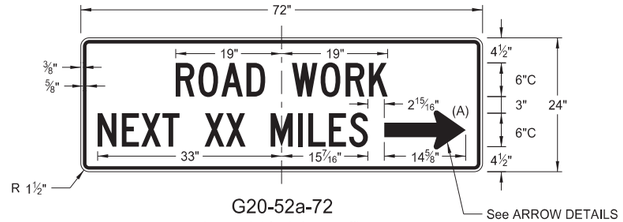


G20-52a-72
Legend: black (non-refl)
Background: orange

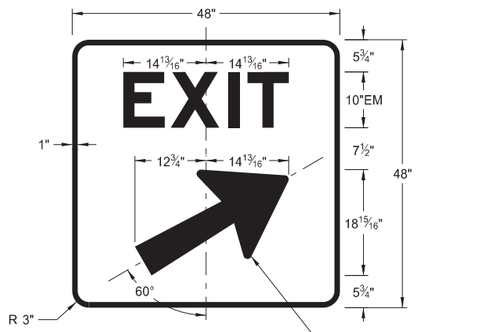


E5-1(L or R)-48
Legend: white
Background: green (orange optional)




E5-1-48




G20-50a-72
G20-52a-72




M4-8-36
Legend: black (non-refl)
Background: orange




M4-9(L or R)-30
Right or Left




M4-9(L or R)-30
Advanced Right or Left



M4-9-30
Straight




G20-2-48
Legend: black (non-refl)
Background: orange

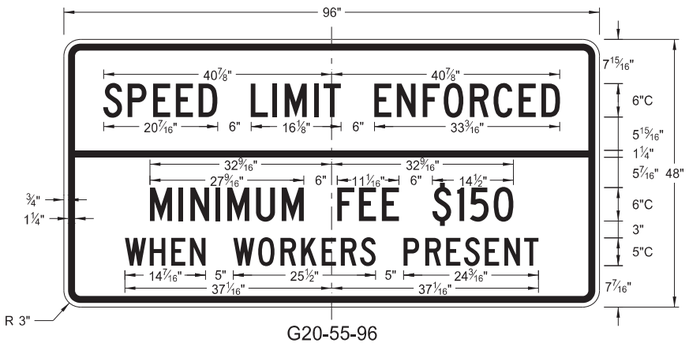

G20-55-96
Legend: black (non-refl)
Background: orange



G20-4b-36
Legend: black (non-refl)
Background: orange



M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange

ARROW DETAILS

NOTES:


(A) Arrow may be right or left of the legend to Indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added sign & background color
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB


CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS




R1-50P-24
Legend: black (non-refl)
Background: white

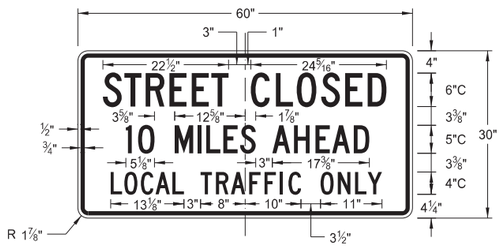

R11-3c-60
Legend: black (non-refl)
Background: white



R2-1aP-24
Legend: black (non-refl)
Background: white

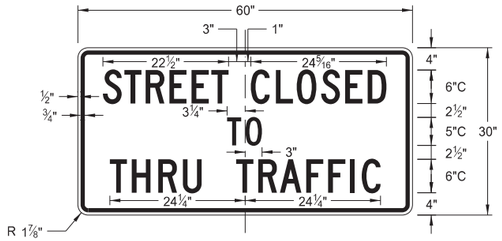

R11-4a-60
Legend: black (non-refl)
Background: white



R11-2a-48
Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Revised sign number
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

SHOULDER CLOSURE TAPERS


D-704-12

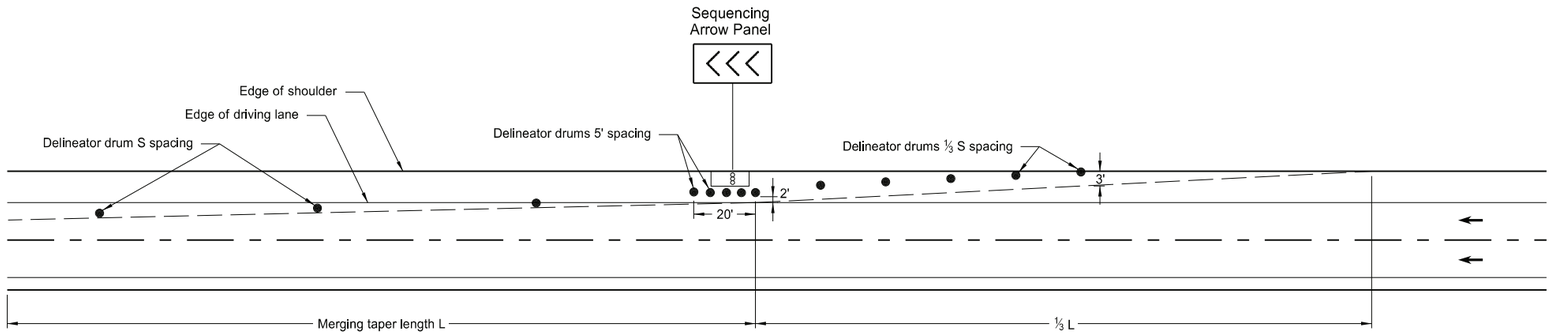

SHOULDER CLOSURE WITH LANE CLOSURE
(when shoulder is 8' or wider)

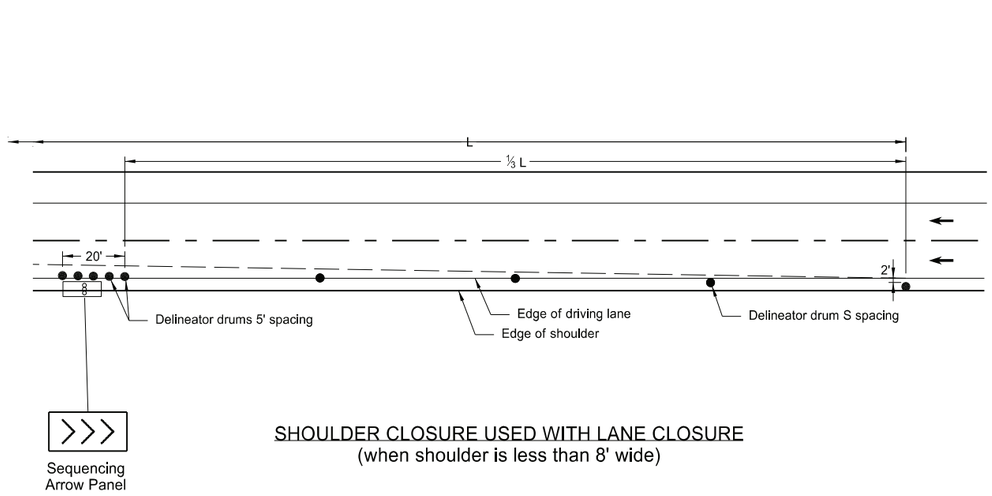

SHOULDER CLOSURE USED WITH LANE CLOSURE
(when shoulder is less than 8' wide)

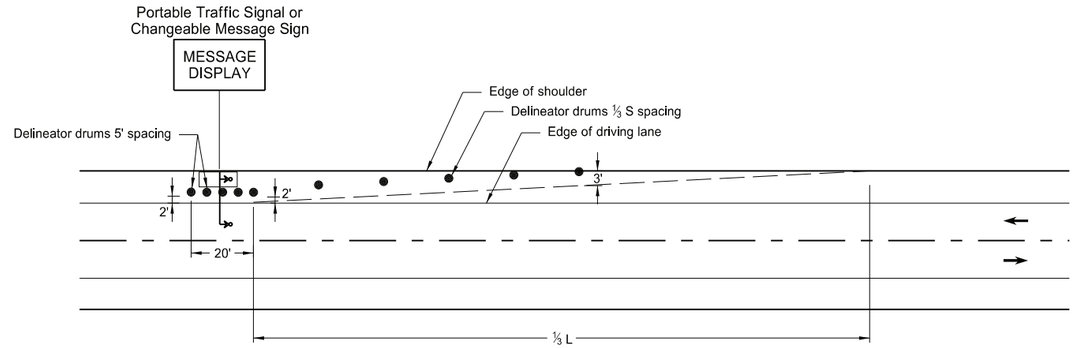

PORTABLE TRAFFIC SIGNAL OR CHANGEABLE MESSAGE SIGN ON SHOULDER

KEY

● Delineator Drum	∞ Sequencing Arrow Panel
° Message Display	Portable Traffic Signal

Notes:

1. S = Posted Speed Limit in mph
   W = Width of offset in feet
   L = Taper length in feet
   $L = WS^2/60$ (40mph or less)
   L = WS (45mph or more)
2. If a shoulder taper is used, use a length of approximately ⅓L. If a shoulder is used as a travel lane, use a normal merging or shifting taper.
3. When paved shoulders of 8 foot width or more are closed, use channelizing devices to close shoulder in advance, to delineate beginning of work space, and to direct vehicular traffic to remain within the traveled way.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active volce
10-25-19	Added L dimension to detail
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BARRICADE AND CHANNELIZING DEVICE DETAILS

D-704-13

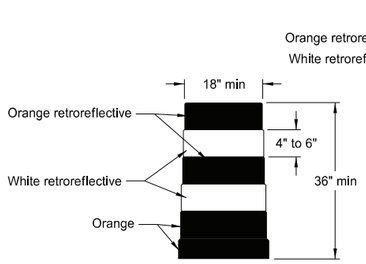


DELINEATOR DRUM

Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectorized spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.

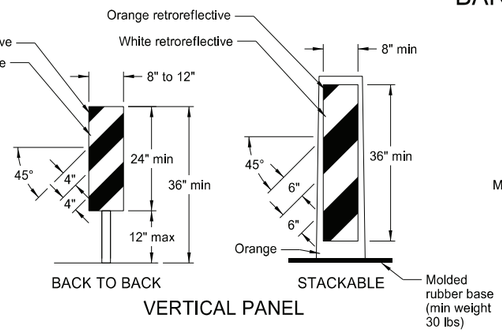


VERTICAL PANEL

Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

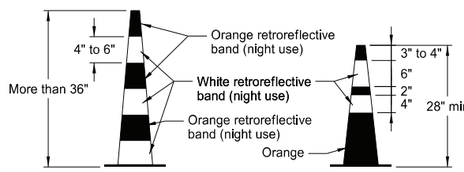


TRAFFIC CONE

Provide retroreflectorization of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectorized space between the orange and white stripes.



TUBULAR MARKER


Provide retroreflectorization of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

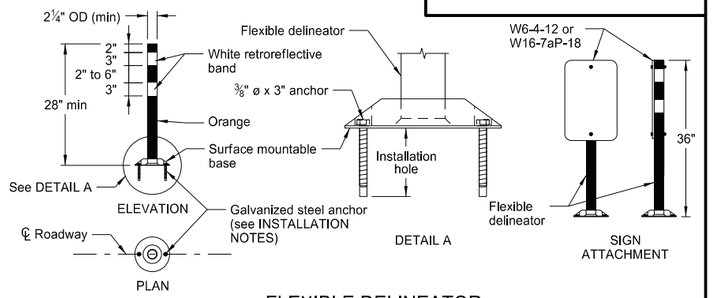

FLEXIBLE DELINEATOR


INSTALLATION NOTES:

1. Drill installation holes to diameter and depth required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.




NOTE: This is the only type of rail acceptable for use with this barricade assembly.

BARRICADE BLADE DETAIL

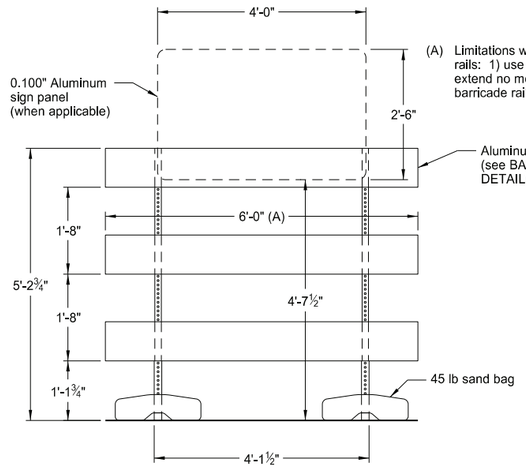


(A) Limitations when using 8'-0" barricade rails: 1) use no sign panel, and 2) extend no more than 1'-0" of the barricade rail past the uprights.

ELEVATION VIEW

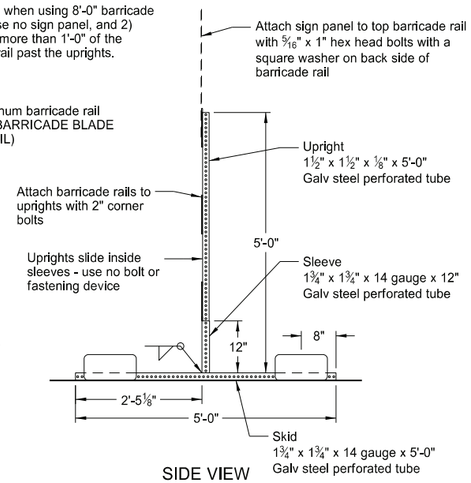

SIDE VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

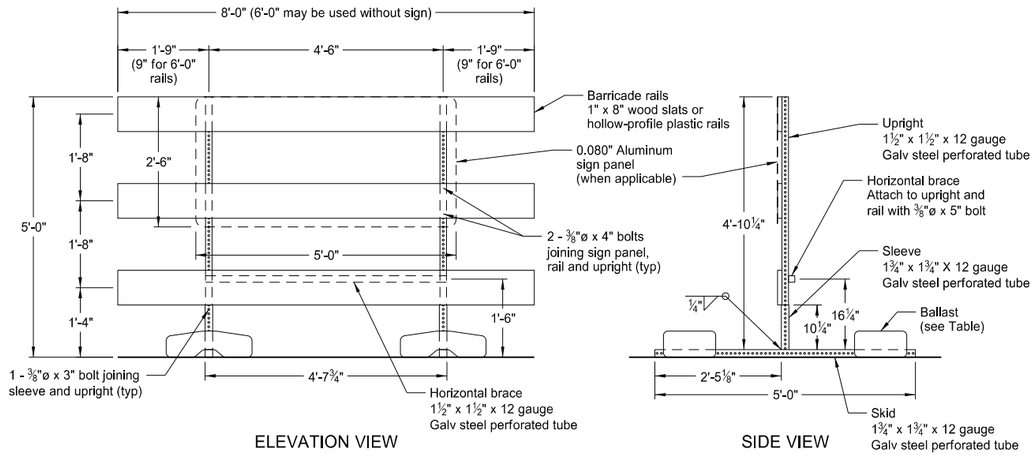


ELEVATION VIEW


SIDE VIEW

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)


NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".



TYPE I BARRICADE





TYPE II BARRICADE

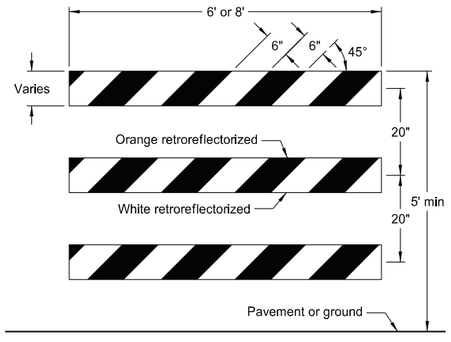


TYPE III BARRICADE


BARRICADE RAIL DETAILS







REFLECTOR DETAIL



ELEVATION

DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags

Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
11-01-19	Revised details for Flexible Delineator
8-01-24	Electronic Stamp/Signature

KIRK J. HOFFE REGISTERED PROFESSIONAL PE-4683 ENGINEER NORTH DAKOTA


08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

D-704-14


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

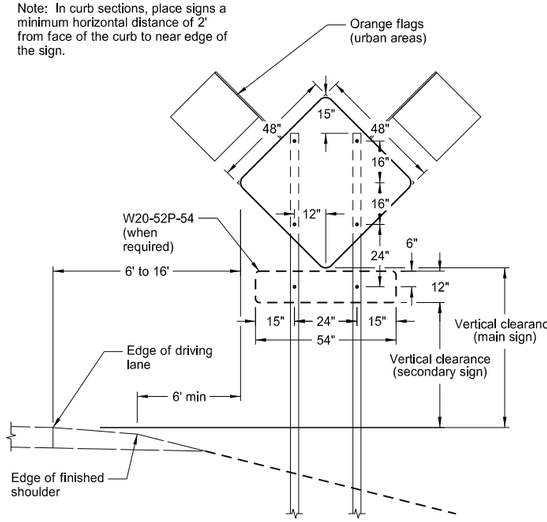


TYPICAL SECTION
(48" x 48" diamond warning sign shown)




48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)




R1-2-60 - YIELD SIGN




R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)




48" x 48" SIGN
(with R6-1-54 sign as required)




24" x 36" SIGN




24" x 24"
ROUTE MARKER
ASSEMBLY




18" x 18"
DIAMOND SIGN




48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)




W14-3-64 - PENNANT SIGN




R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)




48" x 48" SIGN
(with R2-1aP-24 sign as required)




30" x 24" SIGN




108" x 48" SIGN




96" x 48" SIGN




72" x 36" SIGN




72" x 24" SIGN




60" x 24" SIGN




48" x 24" SIGN



36" x 36"
ROUTE MARKER
ASSEMBLY

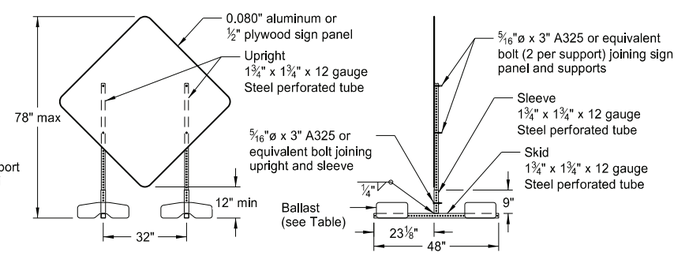

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

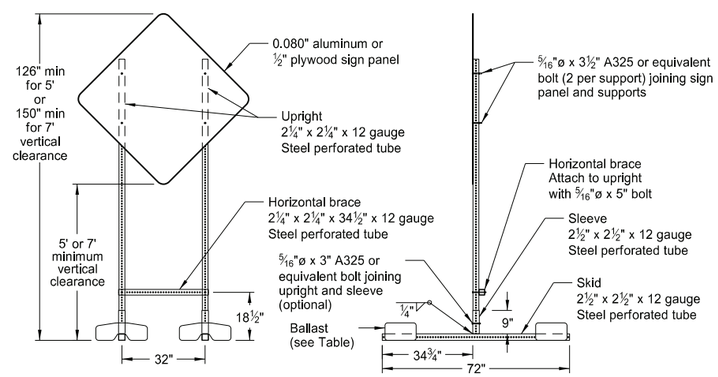

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

   Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

   Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅜" bolts.

3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

   Interstate - white legend on blue background
   Interstate Business Loop - white legend on green background
   US and State - black legend on white background
   County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

   The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

   Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

   Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

   Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

10-4-13

REVISIONS

DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail
8-01-24	Electronic Stamp/Signature


KIRK J. HOFFA
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

TERMINAL AND SEAL COAT SIGN LAYOUTS

D-704-20

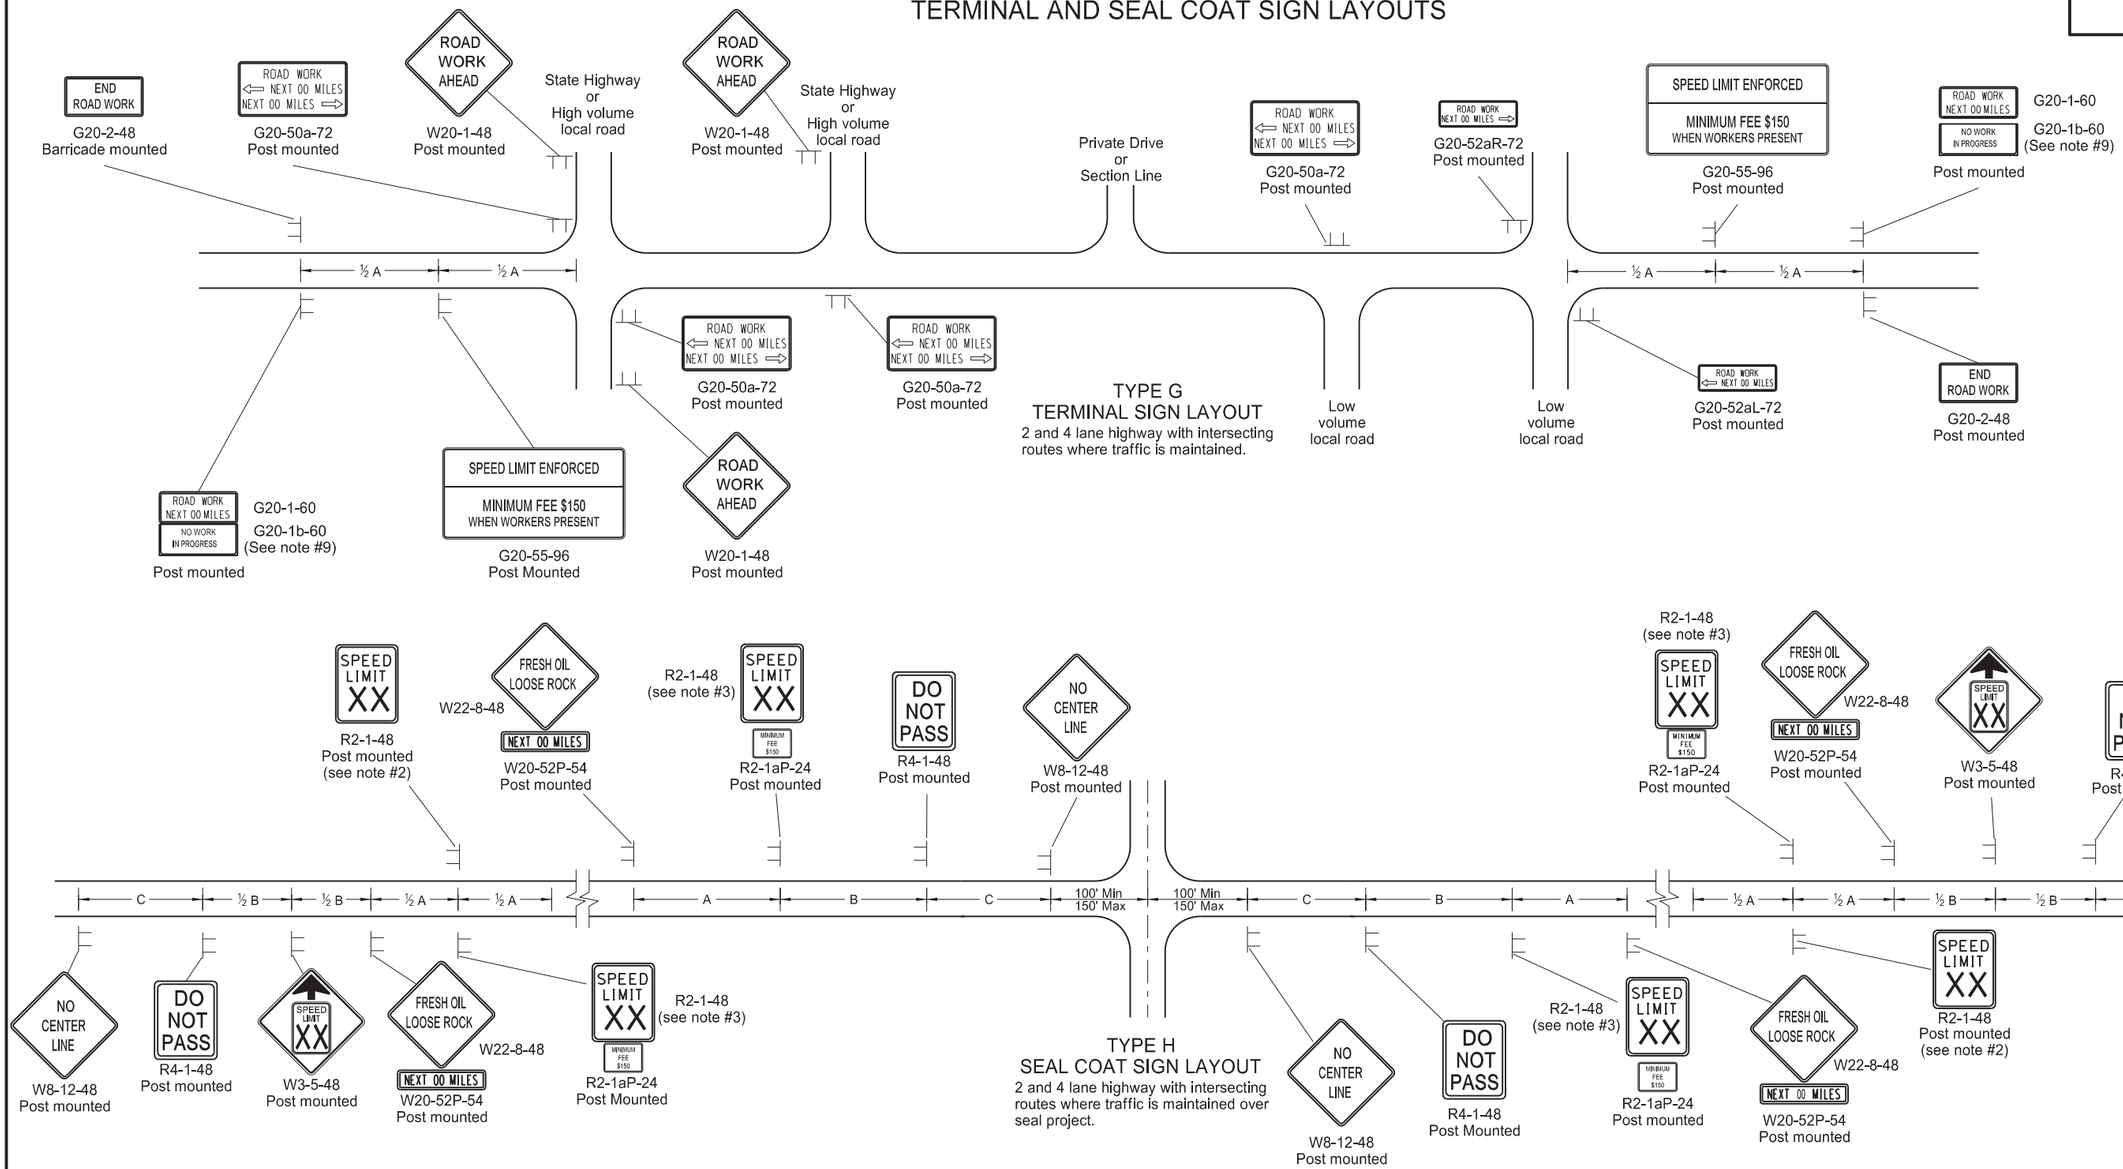

Notes:

1. Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
2. Determine the exact speed limit in the field, based on location and conditions.
3. Determine the reduced speed limit based on the in place speed limit before construction. Where speed limit reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at ½ B.
4. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
5. Cover existing speed limit signs within a reduced speed zone.
6. On seal coat projects, place signs R2-1-48, R2-1aP-24, R4-1-48, W22-8-48 and W20-52P-54 after all important intersections and at five mile intervals. Place sign W8-12-48 after all important intersections and at 2 mile intervals until short term center line pavement marking is placed.
7. As an option, use portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Drawing D-704-14.
8. Cover or remove speed limit signs from layout Type H when loose aggregate is removed.
9. Install sign G20-1b-60 when work is suspended for winter.
10. Use other traffic control layouts in immediate work areas. Place sign R2-1aP-24 below speed limit signs in reduced speed limit work areas.
11. Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
12. Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-27-13

REVISIONS


DATE	CHANGE
08-17-17	Updated notes & sign numbers
11-01-19	Updated note & sign
12-08-21	Switched order of Road Work and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB


LANE CLOSURES ON URBAN STREETS LAYOUTS

D-704-25

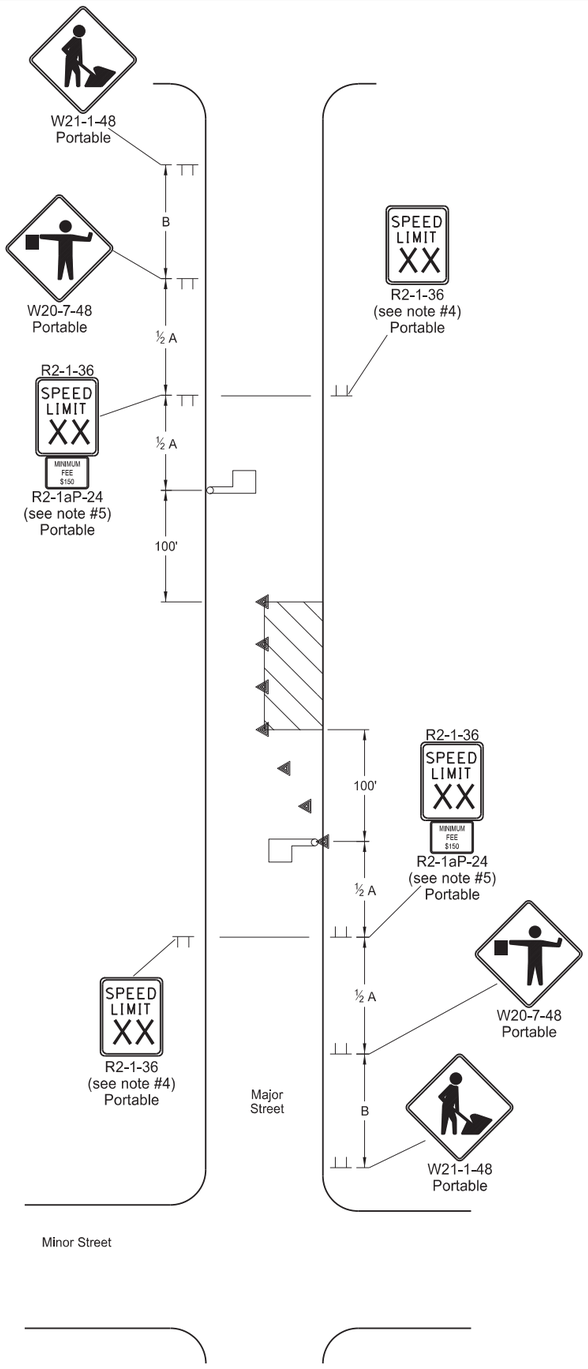


TYPE V
LANE CLOSURE ON URBAN STREET

Portion of roadway closed to traffic only
during daylight hours (mid block location).

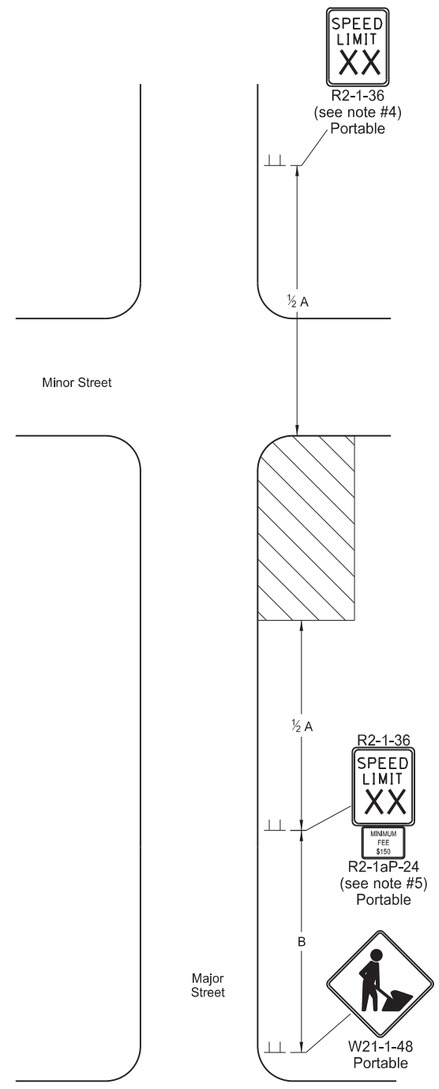

TYPE W
WORK BEYOND CURB ON URBAN STREET

Work area outside driving lane and no closure necessary.

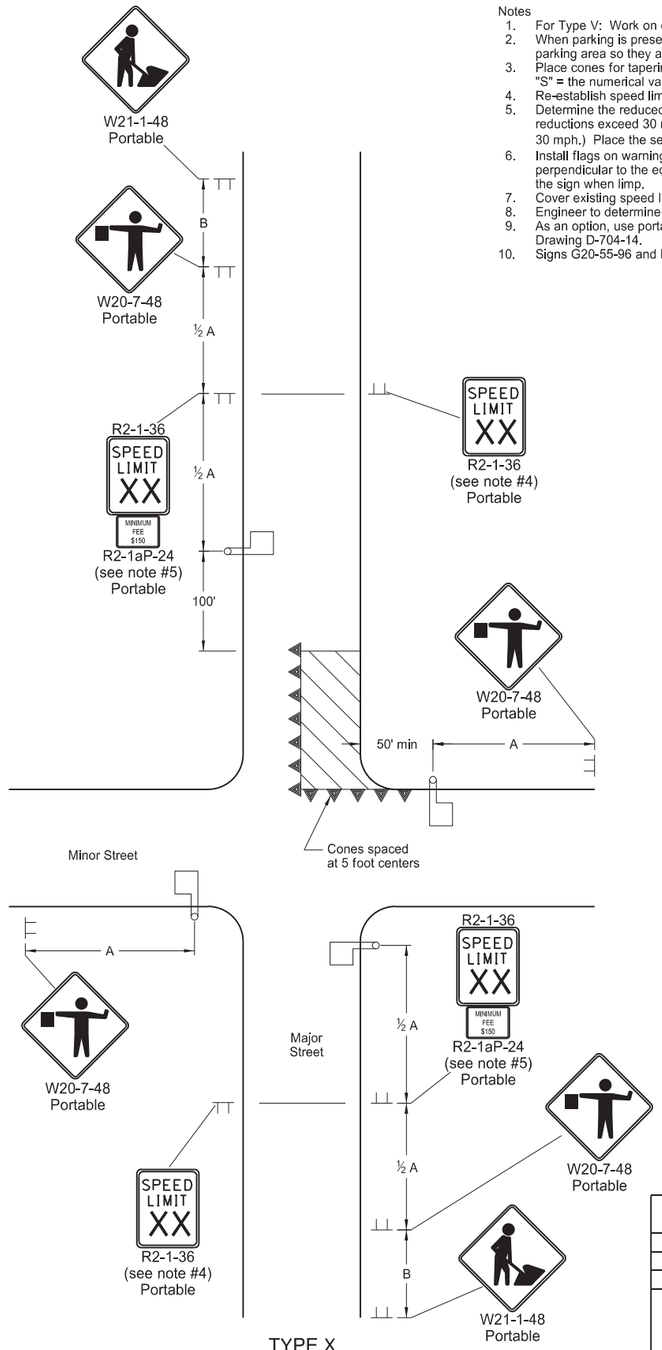

TYPE X
LANE CLOSURE NEAR INTERSECTION ON URBAN STREET

Portion of roadway closed to traffic only
during daylight hours (end block location).

Notes

1. For Type V: Work on one side of roadway at a time so as not to block off more than one lane of traffic.
2. When parking is present, place signs so they are entirely visible above parked vehicles or at the edge of the parking area so they are visible to oncoming traffic. Place signs on portable mounts when located on roadway.
3. Place cones for tapering traffic at 3 equal spaces and cones for tangents at dimension "S". "S" = the numerical value of speed limit.
4. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
5. Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½ B.
6. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inches square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
7. Cover existing speed limit signs within reduced speed zones.
8. Engineer to determine safe speed, when necessary.
9. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
10. Signs G20-55-96 and R2-1aP-24 are not required for urban projects.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

KEY

Sign | Work area
Cones | Flagger

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

9-27-13

REVISIONS


DATE	CHANGE
08-17-17	Updated notes & removed signs
11-01-19	Revised note & added Min Fee sign
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

MISCELLANEOUS SIGN LAYOUTS


D-704-26

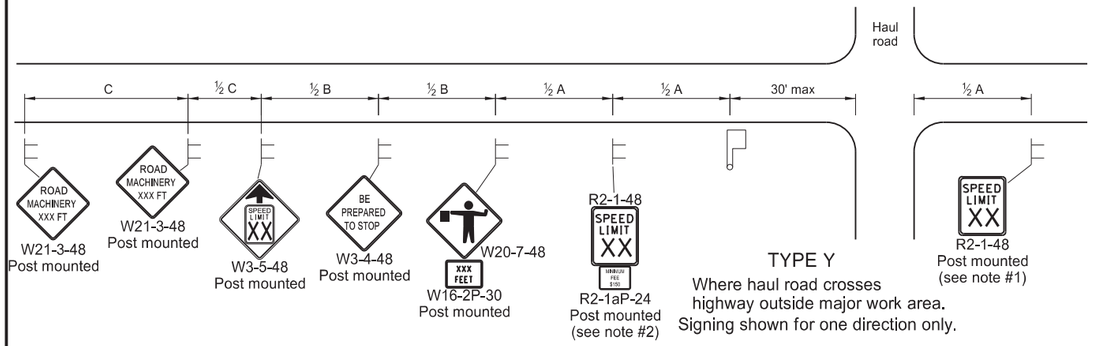


TYPE Y
Where haul road crosses highway outside major work area.
Signing shown for one direction only.

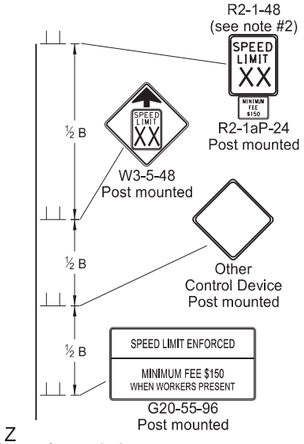


TYPE Z
Where speed zone is needed
Signing shown for one direction only.

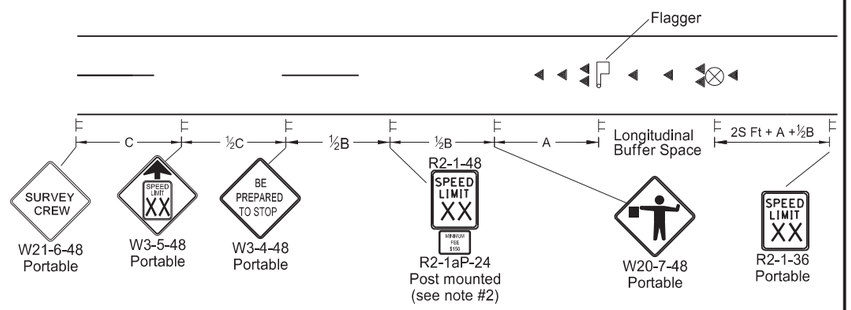


TYPE AA
Where survey crew is used
Signing shown for one direction only.




TYPE BB
Within major work area where sign conditions exist




TYPE CC
Where sign conditions exist




TYPE DD
Where sign conditions exist




TYPE EE
Where sign conditions exist



TYPE FF
Where sign conditions exist
Signing shown for one direction only.




TYPE GG
Where elevation difference exists between lanes



TYPE JJ
For break in pavement.
Install signs when conditions exist and remove when not applicable.
Signing shown for one direction only.

KEY
Flagger | Sign
Cones | Survey Equipment
S = Numerical value of speed limit or 85th percentile.



TYPE KK
At major intersections within pilot car control area

Notes
1. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
2. Determine reduced speed limit based on in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½B.
3. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
4. Cover existing speed limit signs within reduced speed zones.
5. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
6. Sign G20-55-96 is not required if this standard is part of other traffic control layouts, or work is less than 15 days.
7. When pilot car operation is used, place sign G20-4b-36 "Wait For Pilot Car" at major intersections within pilot car control area.
8. Recommend 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.
9. Layouts shown for one direction only.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820
80	910

* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-27-13


REVISIONS


DATE	CHANGE
08-17-17	Added speed limit signs. Updated notes & sign numbers
11-01-19	Revised note 5 & sign numbers
02-23-23	Revised distance & removed signs
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

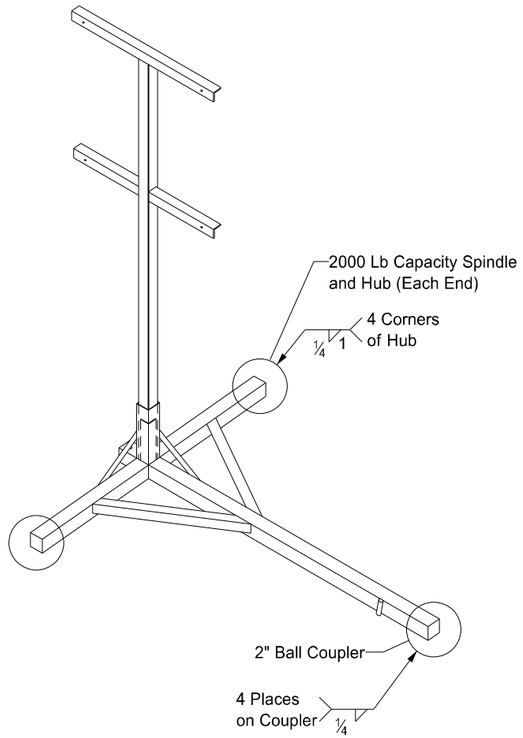

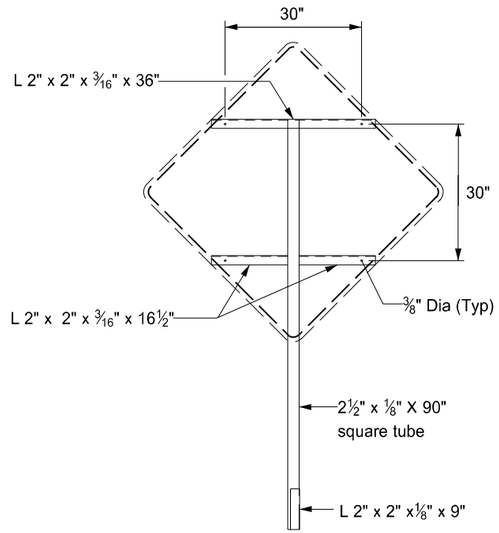

FRONT





RIGHT

SIGN SUPPORT


Notes:

1. Maximum 250 pound weight of assembly.
2. Use a 14" wheel and tire.
3. Use no automotive and equipment axle assemblies for trailer-mounted sign supports.
4. Other NCHRP 350 or MASH crash tested assemblies are acceptable.

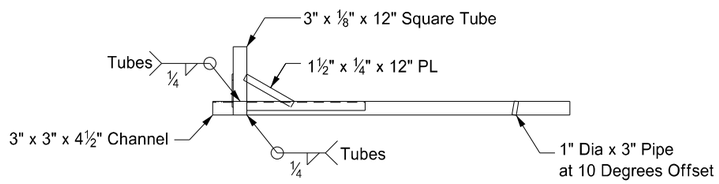



RIGHT

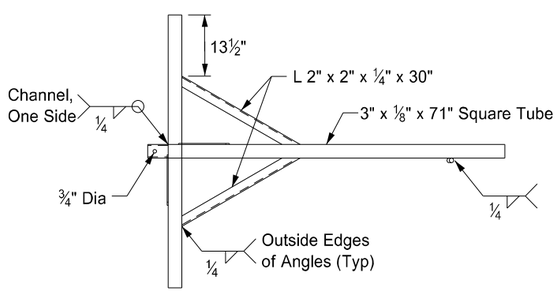

TOP

TRAILER


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE
12/02/2020	Updated Note to active voice.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


12 02 2020

REINFORCED CONCRETE PIPE CULVERTS AND END SECTIONS
(Round Pipe)


FLARED END SECTION						
TERMINAL DIMENSIONS						
DIA	A	B	C	D	E	U
12	0'-4"	2'-0"	4'-0⅞"	6'-0⅞"	2'-0"	2"
15	0'-6"	2'-3"	3'-10"	6'-1"	2'-6"	2¼"
18	0'-9"	2'-3"	3'-10"	6'-1"	3'-0"	2½"
21	0'-9"	3'-0"	3'-1"	6'-1"	3'-6"	2¾"
24	0'-9½"	3'-7½"	2'-6"	6'-1½"	4'-0"	3"
27	0'-10½"	4'-0"	2'-1½"	6'-1½"	4'-6"	3¼"
30	1'-0"	4'-6"	1'-7¾"	6'-1¾"	5'-0"	3½"
36	1'-3"	5'-3"	2'-9"	8'-0"	6'-0"	4"
42	1'-9"	5'-3"	2'-9"	8'-0"	6'-6"	4½"
48	2'-0"	6'-0"	2'-0"	8'-0"	7'-0"	5"
54	2'-3"	5'-5"	2'-9¼"	8'-2¼"	7'-6"	5½"
60	2'-11"	5'-0"	3'-3"	8'-3"	8'-0"	5"
66	2'-6"	6'-0"	2'-3"	8'-3"	8'-6"	5½"
72	3'-0"	6'-6"	1'-9"	8'-3"	9'-0"	6"
78	3'-0"	7'-6"	1'-9"	9'-3"	9'-6"	6½"
84	3'-0"	7'-6½"	1'-9"	9'-3½"	10'-0"	6½"
90	3'-5"	7'-3½"	2'-0"	9'-3½"	11'-0"	6½"




PERSPECTIVE



END VIEW



SIDE VIEW

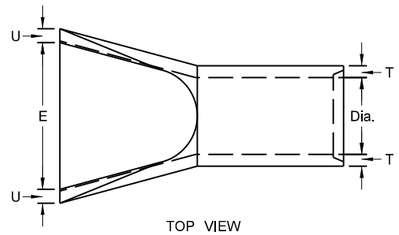


TOP VIEW

REINFORCED CONCRETE PIPE - FLARED END SECTION
Reinforcement to be equivalent to Class III RCP


NOTES:

1. All reinforcing steel shall meet AASHTO M170 requirements.
2. All circular, longitudinal, and elliptical reinforcement shall be assembled and securely fastened in cage fashion so as to maintain reinforcement in exact shape and correct positions within the forms.
3. Laying length of pipe: 12" to 66" (incl.) = not less than 4 feet
   66" to 108" (incl.) = not less than 6 feet
4. Joints shall be sealed with rubber gaskets or with sealer approved by the engineer whenever pipe are specified for storm drain or sanitary sewers.
5. For Class IV and Class V reinforced concrete pipe and end section sizes which do not have reinforcement specified by AASHTO M170, shop drawings and design calculations shall be prepared and sealed by a Professional Engineer and submitted for the Engineer's review.


TRAVERSABLE END SECTION						
DIA	B	C	D	E	R	S
15"	4'	9"	4'-9"	1'-7½"	3"	6
18"	5'-9"	9"	6'-6"	1'-11"	3"	6
24"	6'	1'	7'	2'-6"	3"	4
30"	7'-6"	1'	8'-6"	3'-1"	3½"	4
36"	7'-3"	15"	8'-6"	3'-8"	3"	4




PERSPECTIVE



END VIEW



SIDE VIEW




TOP VIEW

REINFORCED CONCRETE PIPE - TRAVERSABLE END SECTION
Reinforcement to be equivalent to Class III RCP

NOTES (Traversable End Section):


1. Manufactured in accordance with applicable portions of ASTM C76/AASHTO M170.
2. Reinforcement per Class III RCP with double reinforcement in the upper 120° of the full barrel portion.

All Classifications of Round Concrete Pipe					
Internal Dia. of pipe in Inches	Cross-Sectional Water Area	Weight per lin. foot of Pipe Std. Wall	Joint J Groove End Min./Max.	Joint K Tongue End Min.	Minimum Wall Thickness (T)
Dia	Sq. ft.	Lbs.	In.	In.	In.
12	0.79	92	1⅛-2⅛	¾	2
15	1.23	127	1⅛-2¼	⅞	2¼
18	1.77	168	1⅛-2⅛	1	2½
21	2.40	214	1⅛-3⅛	1⅛	2¾
24	3.14	265	2¾-3¾	1⅛	3
27	3.98	322	2¾-4	1¼	3¼
30	4.91	384	3¼-4¼	1¼	3½
33	5.94	452	3¼-4¼	1½	3¾
36	7.07	524	3¼-4¼	1½	4
42	9.62	685	3¾-4¾	1¾	4½
48	12.57	685	3⅞-4¾	1⅞	5
54	15.90	1070	4⅛-5¼	2	5½
60	19.63	1296	4½-5½	2¼	6
66	23.76	1542	5-6	2⅝	6½
72	28.27	1810	5⅛-6¾	2⅞	7
78	33.18	2098	6¼-7¼	2⅞	7½
84	38.48	2410	5⅛-7¾	3⅜	8
90	44.18	2793	6¾-8½	3⅛	8½
96	50.27	3092	7-8¼	3½	9
102	56.75	3466	7-8¼	3½	9½
108	63.62	3864	7¼-8½	3¾	10




END VIEW

CIRCULAR PIPE




TONGUE & GROOVE JOINT



BELL & SPIGOT JOINT

JOINTS FOR REINFORCED CONCRETE PIPE



CONCRETE PIPE PLUG


SEE STANDARD DRAWING D-714-22 FOR DETAILS OF CONCRETE PIPE TIES (TIE BOLTS).

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
05-12-14	
REVISIONS	
DATE	CHANGE
01-21-15	Revised Note 5
11-21-16	Revised End Section Dimensions
09-18-19	Updated Perspective View Details


This document was originally issued and sealed by Jon Ketterling Registration Number PE-4684, on 9/18/19 and the original document is stored at the North Dakota Department of Transportation

ROUND CORRUGATED STEEL PIPE CULVERTS AND END SECTIONS


D-714-4

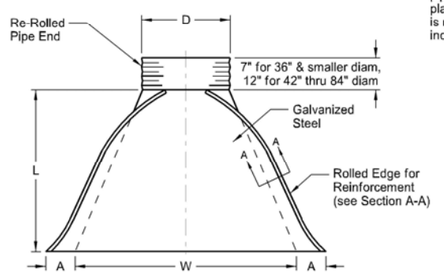


PLAN VIEW

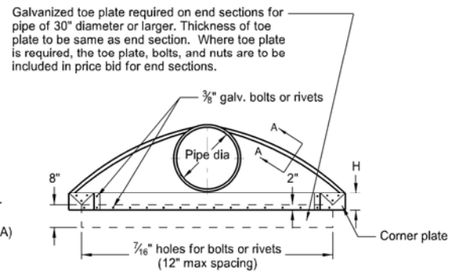

ELEVATION VIEW

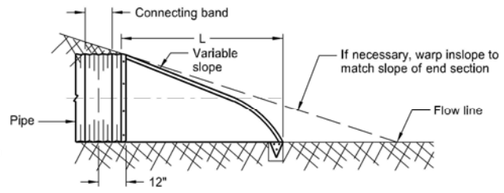

TYPICAL CROSS SECTION
(showing connector section)



PERSPECTIVE VIEW

* * PIPE DIA.	GALVANIZED THICKNESS	END SECTION DIMENSIONS A	B	H	L	W	APPROX. SLOPE	BODY
IN	IN	IN	IN	IN	IN	IN	RATE	PIECE
15	0.064 - 0.079	7	8	6	26	30	2½:1	1
18	0.064 - 0.109	8	10	6	31	36	2½:1	1
24	0.064 - 0.109	10	13	6	41	48	2½:1	1
30	0.064 - 0.109	12	16	8	51	60	2½:1	1 or 2
36	0.064 - 0.109	14	19	9	60	72	2½:1	2
42	0.064 - 0.138	16	22	11	69	84	2½:1	2
48	0.064 - 0.168	18	27	12	78	90	2¼:1	2
54	0.064 - 0.168	18	30	12	84	102	2:1	2
* 60	0.064 - 0.168	18	33	12	87	114	1¾:1	3
* 66	0.064 - 0.168	18	36	12	87	120	1½:1	3
* 72	0.064 - 0.168	18	39	12	87	126	1½:1	3
* 78	0.064 - 0.168	18	42	12	87	132	1¼:1	3
* 84	0.064 - 0.168	18	45	12	87	138	1⅛:1	3


* These sizes have 0.109" sides and 0.138" center panels.

* * Pipe diameter is equal to dimension "D" of end section.


Manufacturers tolerances of above dimensions will be allowed.

Splices to be the lap riveted type.


Multiple panel bodies shall have lap seams which are to be tightly joined with ⅜" dia. galv. bolts or rivets. Nuts to be torqued to 25 foot-lbs ±.




SECTION A-A



TYPE #1
For circular pipes with diameter 24" & smaller



TYPE #2
For circular pipes with diameter 30" through 36"




TYPE #3
For all pipe sizes


COUPLING BAND DIMENSIONS				
COUPLING TYPE	CORRUGATION PITCH x DEPTH	PIPE SIZE	COUPLING BAND LENGTH	MIN. BAND THICKNESS
Hat Band	2⅔" x ½"	12" - 48"	2¾"	.064"
Annular Band	2⅔" x ½"	12" - 72"	12"	.052"
		78" - 84"	12"	.079"
	3" x 1"	48" - 120"	14"	.052"
Hugger Band	2⅔" x ½" Rerolled End	12" - 72"	10½"	.052"
		78" - 84"	10½"	.079"
	3" x 1" Rerolled End	48" - 120"	10½"	.052"
	5" x 1" Rerolled End	48" - 120"	12"	.064"

NOTES:

1. Pipes and connecting bands shall conform to applicable sections of NDDOT Standard Specifications and to AASHTO M-36.
2. Top edge of all end sections to have rolled edges for reinforcement (see Section A-A). The reinforced edges are to be supplemented with 2" x 2" x ¼" galv. angle for 60" through 72" dia. and 2½" x 2½" x ¼" galv. angle for 78" and 84" dia.. Angles to be attached by galv. ⅜" dia. bolts and nuts. Angles are to extend from pipe to the corner wing bend.
3. Elongated pipes shall be factory preformed so that the vertical diameter shall be 5% greater and the horizontal diameter 5% less than a circular pipe.
4. Coupling bands shall be two-piece for pipes larger than 36" as shown in Section C-C & D-D details. For pipes 36" and smaller, a one-piece band is acceptable.
5. ½" x 8" bolts may be used as a substitute for the ½" x 6" bolts shown in the details.
6. Coupling bands wider than 14" may be used if a minimum of four ½" bolts with maximum spacing of 5½" are used for the connection.
7. Length of spot welds shall be minimum ½".




SIDE VIEW




SECTIONAL VIEW

SECTION B-B

HAT BAND FOR FLANGED END PIPE




SIDE VIEW




SECTION C-C
Angle Connection


ANNULAR BAND



TOP VIEW
Die-Formed Angle Connector




SIDE VIEW




SECTIONAL VIEW

HUGGER COUPLING BAND




SECTION D-D
Bar & Strap Connection



SIDE VIEW

END VIEW


2" x 2" x 3/16" Angle Connector




SIDE VIEW

END VIEW


Die-Formed Angle Connector




SPIRAL RIB CORRUGATIONS



3" x 1" CORRUGATIONS or
5" x 1" CORRUGATIONS



2⅔" x ½" CORRUGATIONS



Detail A

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
08-15-13	
REVISIONS	
DATE	CHANGE
01-07-14	End Section Plan View
02-27-14	3" x 1" Corrugation Detail
09-18-19	Added Perspective View Detail
09-23-22	Galvanized Thickness Table


JONATHAN D KETTERLING
DIRECTOR
PROFESSIONAL
PE-4684
ENGINEER
NORTH DAKOTA

09/23/22


DocuSign

CORRUGATED STEEL PIPE ARCH CULVERTS AND END SECTIONS


D-714-5

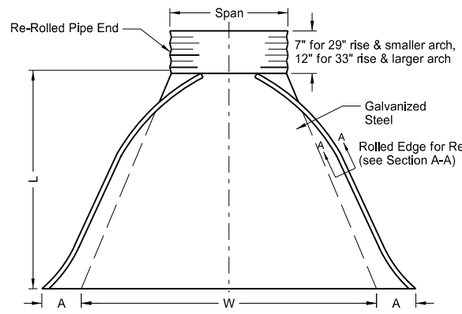


PLAN VIEW

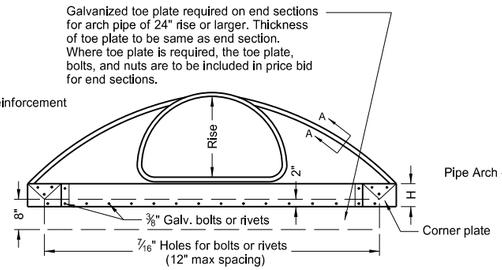

ELEVATION VIEW

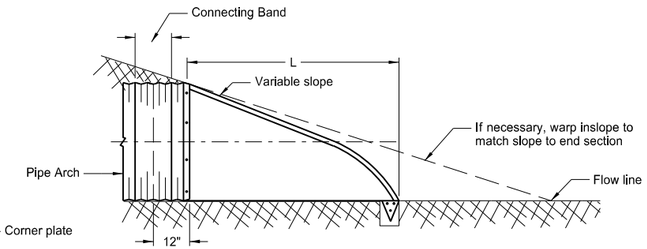

TYPICAL CROSS SECTION
(showing connector section)



PERSPECTIVE VIEW

PIPE ARCH DIMENSION		GALV. THICK.	END SECTION DIMENSIONS					APPROX. SLOPE	BODY
SPAN	RISE		A	B	H	L	W		
IN	IN	IN	IN	IN	IN	IN	IN	RATE	PIECE
17	13	0.064	7	9	6	19	30	2½:1	1
21	15	0.064	7	10	6	23	36	2½:1	1
24	18	0.064	8	12	6	28	42	2½:1	1
28	20	0.064	9	14	6	32	48	2½:1	1
35	24	0.079	10	16	6	39	60	2½:1	1 or 2
42	29	0.079	12	18	8	46	75	2½:1	1 or 2
49	33	0.109	13	21	9	53	85	2½:1	2
57	38	0.109	18	26	12	63	90	2½:1	2
64	43	0.109	18	30	12	70	102	2¼:1	2
* 71	47	0.109	18	33	12	77	114	2¼:1	3
* 77	52	0.109	18	36	12	77	126	2:1	3
* 83	57	0.109	18	39	12	77	138	2:1	3

(1)


* These sizes have 0.109" sides and 0.138" center panels.

Manufacturers tolerances of above dimensions will be allowed.


Splices to be the lap riveted type.

Multiple panel bodies shall have lap seams which are to be tightly joined with ⅜" dia. galv. bolts or rivets. Nuts to be torqued to 25 foot-lbs ±.


(1) Applicable to equivalent sizes of 3"x1" corrugations.




SECTION A-A



TYPE #1
For arch pipes with 20" rise & smaller



TYPE #2
For arch pipes with 24" thru 38" rise




TYPE #3
For all arch pipe sizes

2⅔" x ½" CORRUGATIONS		
SPAN	RISE	EQUIV PIPE DIA.
IN	IN	IN
17	13	15
21	15	18
24	18	21
28	20	24
35	24	30
42	29	36
49	33	42
57	38	48
64	43	54
71	47	60
77	52	66
83	57	72


3" x 1" CORRUGATIONS		
SPAN	RISE	EQUIV PIPE DIA.
IN	IN	IN
53	41	48
60	46	54
66	51	60
73	55	66
81	59	72
87	63	78
95	67	84
103	71	90
112	75	96
117	79	102
128	83	108
137	87	114
142	91	120

For pipe arches use the same width band as for circular pipe of equal periphery.

COUPLING BAND DIMENSIONS				
COUPLING TYPE	CORRUGATION PITCH x DEPTH	ARCH PIPE RISE	COUPLING BAND LENGTH	MIN. BAND THICKNESS
Hat Band	2⅔" x ½"	13" - 38"	2¾"	.064"
Annular Band	2⅔" x ½"	13" - 57"	12"	.052"
	3" x 1"	41" - 91"	14"	.052"
Hugger Band	2⅔" x ½" Rerolled End	13" - 57"	10½"	.052"
		63" - 67"	10½"	.079"
	3" x 1" Rerolled End	41" - 91"	10½"	.052"
	5" x 1" Rerolled End	41" - 91"	12"	.064"




SIDE VIEW




SECTIONAL VIEW

SECTION B-B

HAT BAND FOR FLANGED END PIPE




SIDE VIEW




SECTION C-C
Angle Connection


ANNULAR BAND




TOP VIEW
Die-Formed Angle Connector




SIDE VIEW




HUGGER COUPLING BAND



SECTION D-D
Bar & Strap Connection

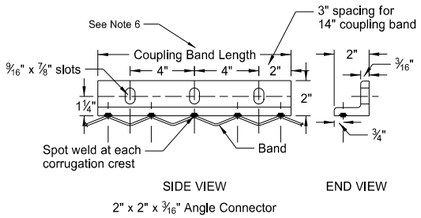


SIDE VIEW END VIEW
2" x 2" x 3/16" Angle Connector

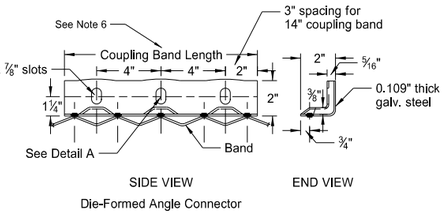


SIDE VIEW END VIEW
Die-Formed Angle Connector


NOTES:

1. Pipe and connecting bands shall conform to applicable sections of NDDOT Standard Specifications and to AASHTO M-36.
2. Top edge of all end sections to have rolled edges for reinforcement (see Section A-A). The reinforced edges are to be supplemented with 2" x 2" ¼" galv. angle for 77"x52" and 83"x57" sizes. Angles to be attached by galv. ⅜" dia. bolts and nuts. Angles are to extend from pipe to the corner wing bend.
3. Coupling bands shall be two-piece for all arch pipes.
4. ½" x 8" bolts may be used as a substitute for the ½" x 6" bolts shown in the details.
5. Coupling bands wider than 14" may be used if a minimum of four ½" bolts with maximum spacing of 5½" are used for the connection
6. Length of spot welds shall be minimum ½".







SPIRAL RIB CORRUGATIONS



3" x 1" CORRUGATIONS or
5" x 1" CORRUGATIONS



2⅔" x ½" CORRUGATIONS



Detail A


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
08-16-13	
REVISIONS	
DATE	CHANGE
01-07-14	End Section Plan View
02-27-14	3" x 1" Corrugation Detail
09-18-19	Added Perspective View Detail

This document was originally issued and sealed by Jon Ketterling Registration Number PE-4684, on 9/18/19 and the original document is stored at the North Dakota Department of Transportation


Docusign Envelope ID: 183A3561-9FCE-4D1A-975A-207779A0B2A0

CONCRETE PIPE, CATTLE PASS, OR PRECAST CONCRETE BOX CULVERT TIES

D-714-22

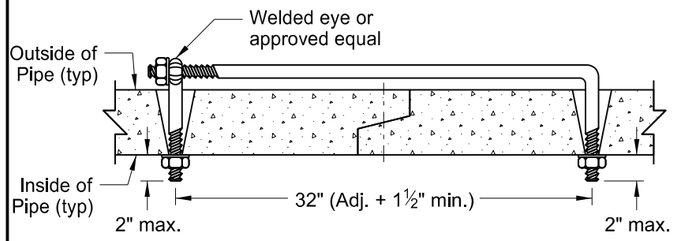


EYE BOLT TIE (PIPES ONLY)

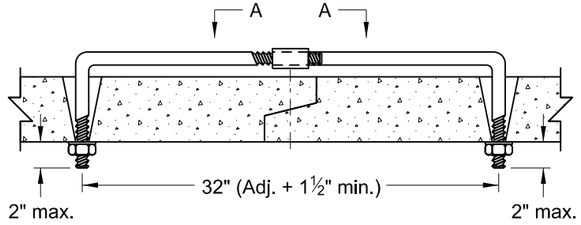


ADJUSTABLE TIE (PIPES ONLY)


REQUIRED SIZE OF TIE BOLTS		
PIPE SIZE	THREAD ø	XXS PIPE SLEEVE INNER ø
18" - 24"	⅝" SEE NOTE 3	¾"
30" - 66"	¾"	1"
72" - 120"	1"	1¼"
RCB/CATTLE PASS		

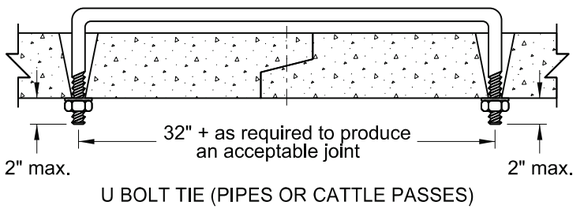


U BOLT TIE (PIPES OR CATTLE PASSES)

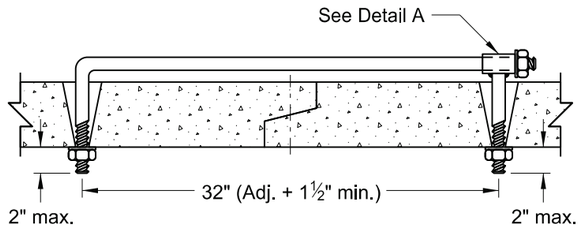


WELDED TIE (PIPES ONLY)




SECTION A-A




DETAIL A

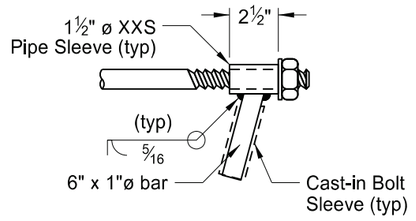


DETAIL B

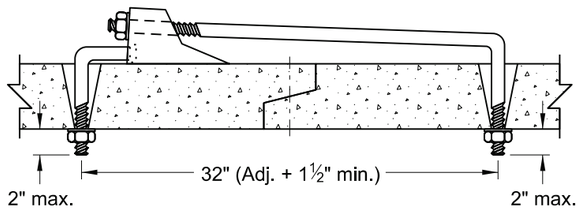


CANOPY TIE (PIPES ONLY)

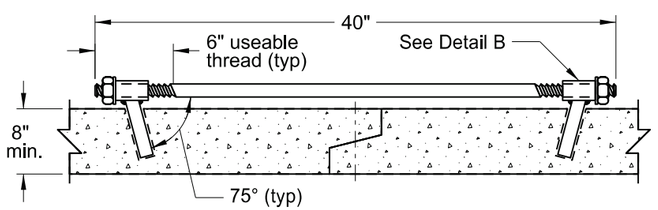

HIDDEN TIE (RCB ONLY)

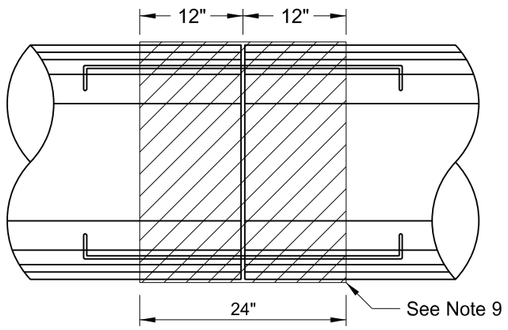

PLAN VIEW (PIPES ONLY)

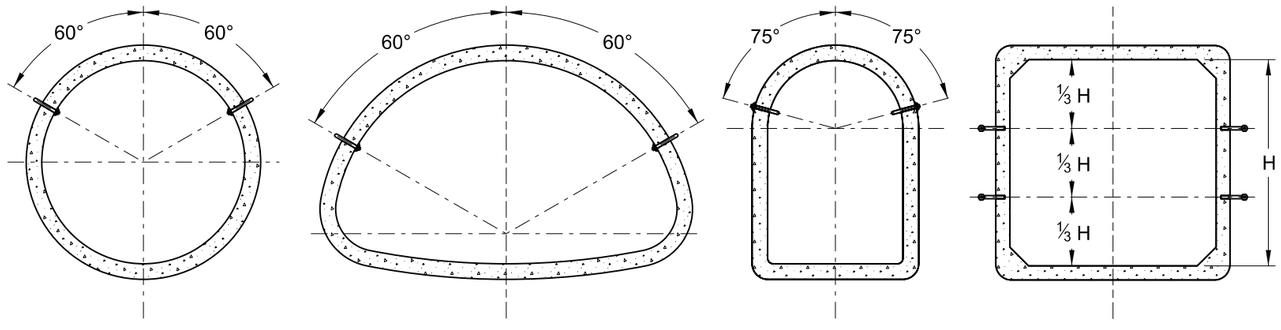

END VIEW

NOTES:


1. The pipe size listed is the inside diameter of round pipe or the equivalent diameter of pipe arch.
2. Insert pipe ties from the inside of the pipes and grout into place for Cattle Pass and Jacked and Bored pipes. Jacked and bored pipes with a diameter of 24" or less do not require pipe ties.
3. Nuts and washers are not required on Jacked and Bored pipes or pipes with a 24" diameter or less. Insert and grout tie bars into place where nuts and washers are not used.
4. Do not use pipe ties to pull the pipe or RCB sections tight. The ties are only for holding sections together.
5. Use only tie bolt assemblies that have been hot dip galvanized in accordance with ASTM A 153.
6. Holes in pipes to accommodate tie bolts will be precast. Tapered holes are permitted. Use holes that have a diameter ¼" larger than the diameter of the thread. In precast RCB's, use holes that contain cast-in bolt sleeves with an inside diameter of 1¼".
7. Include the cost of precasting the required holes and furnishing and installing the tie bolts in the price bid for the appropriate conduit or RCB pay item.
8. Tie all centerline and approach RCP culvert joints. Tie all joints including the end sections of all free ends of storm drain systems. Free ends are defined as any storm drain end which does not terminate at an inlet or manhole. Outfall culverts with end sections which drain adjacent ditches are examples of free ends.
9. Place joint wrap prior to installing ties. Firmly secure the wrap around the full perimeter. For concrete pipes, use Type S2 geotextile fabric and overlap the joint by 12" in both directions. For box culverts, use a waterproof membrane that meets ASTM C990. Provide a membrane that is a minimum of 12" wide and center it at the joint. Provide a minimum overlap of 2.5" at the seams.
10. Use tie bolts that conform to ASTM A 36. Use heavy hex nuts that conform to ASTM A 563. Use washers that conform to ASTM F 436, Type 1. Use welded pipe sleeves and cast-in bolt sleeves that conform to ASTM A 53, Grade B.
11. Provide lock washers or burr threads of concrete box ties after installation and tightening to prevent nut rotation.
12. Tie RCB's as noted in the plans.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
3-18-14	
REVISIONS	
DATE	CHANGE
7-21-15	Note 8
6-6-17	Notes 2-11 Table, Title, Labels
8-11-21	Notes 2-12 Table, Label
01-17-25	Notes 9-13 Table, Labels Section A-A, End View


REGISTERED PROFESSIONAL ENGINEER
JASON R. THORENSON
PE - 5048
DATE 01/17/25
NORTH DAKOTA

TRANSVERSE MAINLINE PIPE INSTALLATION DETAIL
PIPES 4 FEET OR LESS BELOW TOP OF SUBGRADE


D-714-26

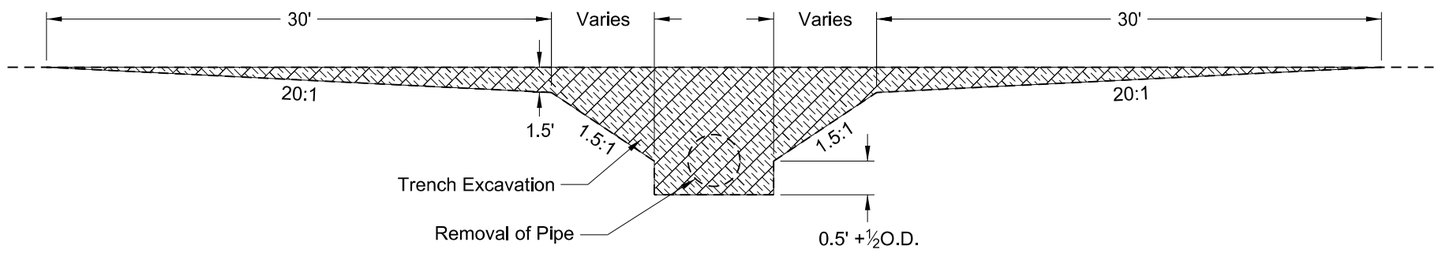

EXCAVATION DETAIL

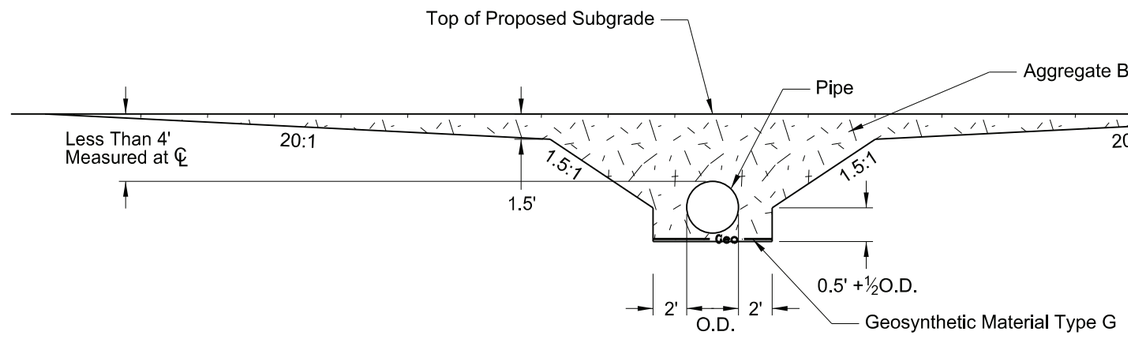

INSTALLATION DETAIL

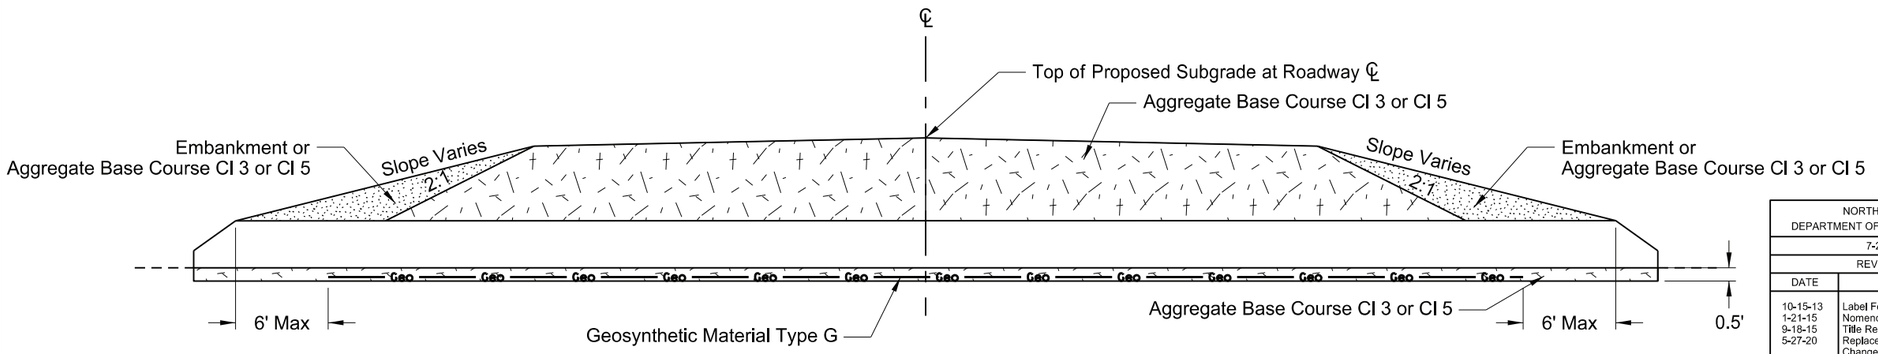

CROSS SECTION

Pay Items
1) Pipe*
2) Geosynthetic Material Type G
3) Removal of Pipe (if required)

*Included in Pipe Pay Item
1) Pipe
2) Trench Excavation
3) Aggregate Base Course Cl 3 or Cl 5
4) Embankment

NOTES:

1) This drawing applies to new/replaced mainline and paved intersection roadway pipes only (including ramps). It does not include pipes in approaches.

2) Embankment may be either borrow Excavation or Common Excavation - Type A

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

7-26-13

REVISIONS


DATE	CHANGE
10-15-13	Label Formatting
1-21-15	Nomenclature
9-18-15	Title Rewording
5-27-20	Replaced R1 Fabric with Geogrid Changed bedding depth


REGISTERED PROFESSIONAL ENGINEER
MATTHEW C KURLE
PE-8777
DATE
05/27/20
NORTH DAKOTA
DocuSign


Docusign Envelope ID: 1230AB8B-A127-47B2-99B3-064304788F03


INLET - CATCH BASIN


D-722-1A

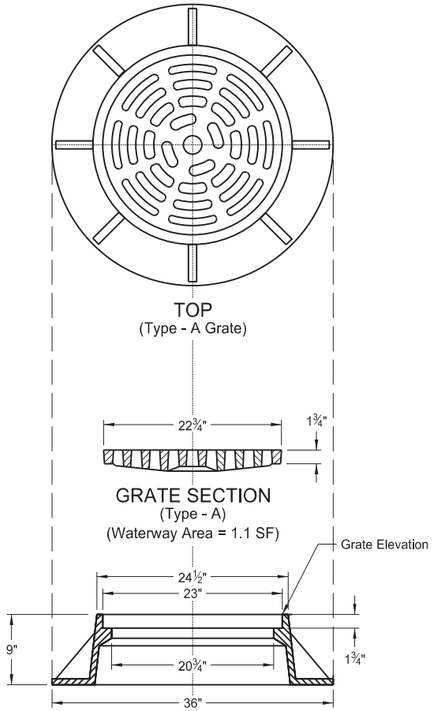

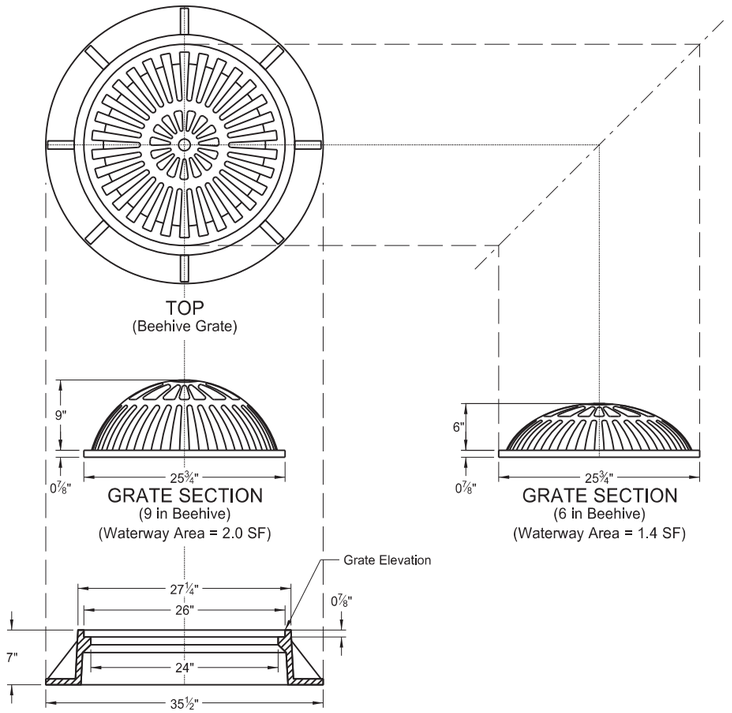

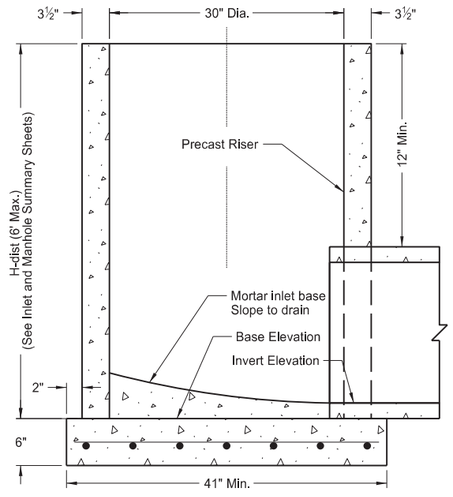

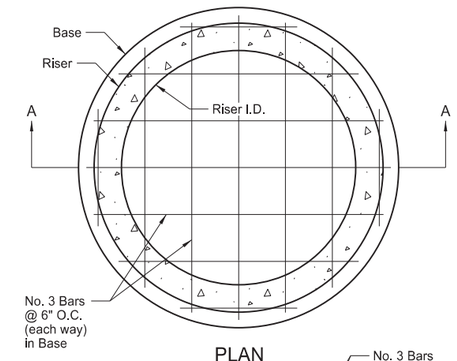

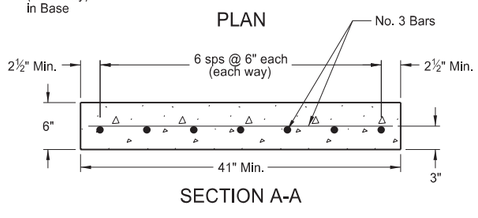

NOTES:

1. Use of other castings, similar in dimension, is allowed if the casting conforms to the riser section and has a grate style specified in the plans, meeting or exceeding the waterway area listed. Modifications to the inlet to facilitate similar castings are only allowed with written approval from the Engineer.
2. Use castings manufactured in accordance with AASHTO M306. Use metal conforming to AASHTO M105 Class 35B in the manufacture of castings.
3. Use Class AE-3 concrete for precast or cast-in-place bases constructed in accordance with Section 722 of the NDDOT Standard Specifications.
4. Construct precast concrete base and riser in accordance with AASHTO M199. Include steel reinforcement as shown in the detail.
5. Use Grade 60 reinforcing steel that meets the requirements of Section 612 of the NDDOT Standard Specifications.
6. Construct inlet risers 4 to 5 inches below final elevation and adjust to final grade using adjusting rings or cast-in-place concrete after paving. Include all costs for this adjustment in the price bid for the inlet.
7. Pipe shall be installed to extend a minimum of 2 inches beyond the inside face of the structure wall at each end. Payment will be based on the actual installed length of pipe between structures, measured end-to-end and rounded to the nearest whole foot.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

05-14-13

REVISIONS


DATE	CHANGE
6-24-14	Revised Note 3.
10-17-17	Updated to active voice.
12-02-20	Updated PE stamp and signature.
08-19-21	Note revisions Updated base and riser dimensions and notes
07-24-25	Note revisions

REGISTERED PROFESSIONAL ENGINEER
JASON R. THORENSON
PE - 5048
DATE 07/24/25
NORTH DAKOTA


Docusign Envelope ID: 1230AB8B-A127-47B2-99B3-064304788F03


INLET - SPECIAL

D-722-1B

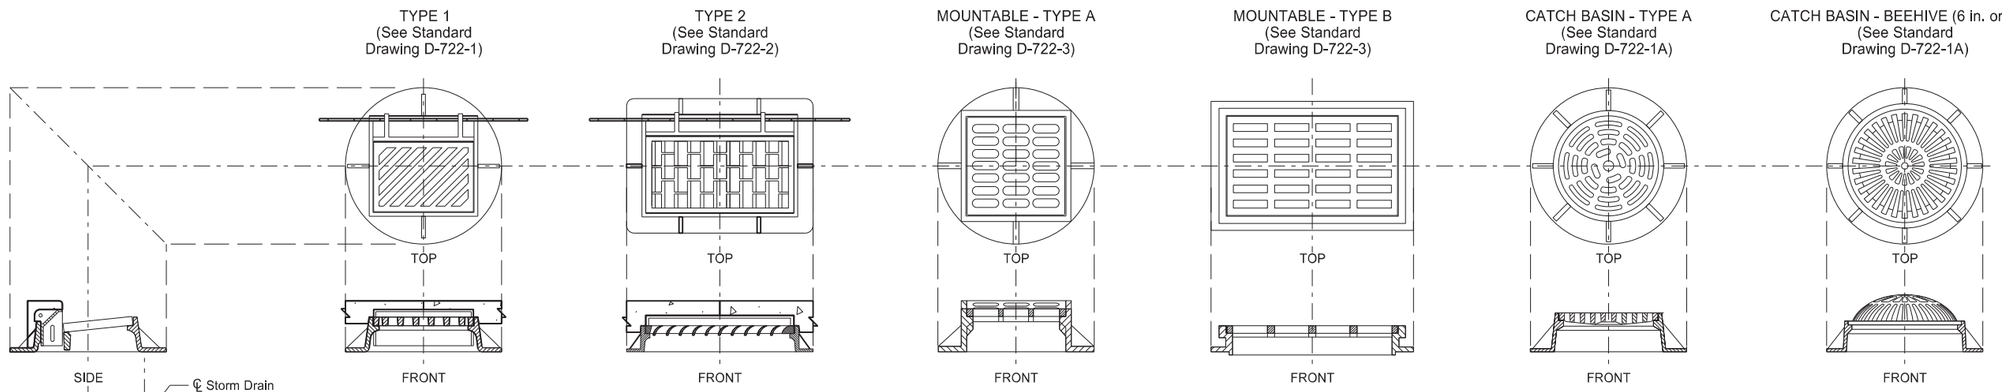

See Note 1.

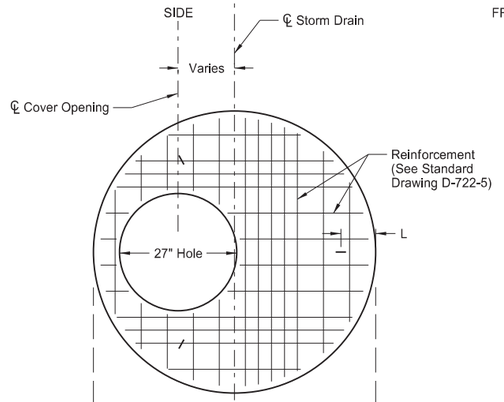

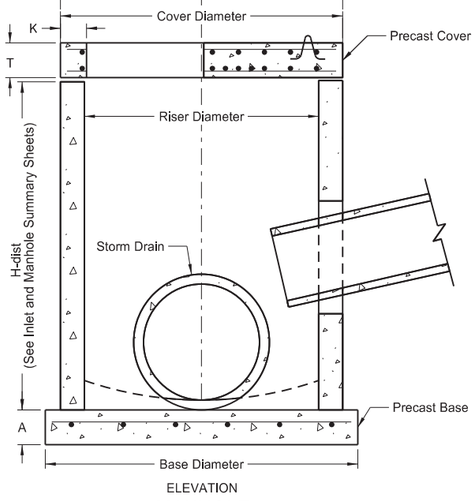

MANHOLE
(See Standard Drawing D-722-5)

RISER DIAMETER	COVER DIAMETER	BASE DIAMETER
48"	58"	66"
60"	72"	78"
72"	86"	92"

See Note 4.

PAY ITEMS

48 in. Riser
- Inlet Special - Type 1 48 in. . . . . Ea.
- Inlet Special - Type 2 48 in. . . . . Ea.
- Inlet Special Mountable - Type A 48 in. . . . . Ea.
- Inlet Special Mountable - Type B 48 in. . . . . Ea.
- Inlet Special Catch basin 6 in. beehive 48 in. . . . Ea.
- Inlet Special Catch basin 9 in. beehive 48 in. . . . Ea.
- Inlet Special Catch basin - Type A 48 in. . . . . Ea.

60 in. Riser
- Inlet Special - Type 1 60 in. . . . . Ea.
- Inlet Special - Type 2 60 in. . . . . Ea.
- Inlet Special Mountable - Type A 60 in. . . . . Ea.
- Inlet Special Mountable - Type B 60 in. . . . . Ea.
- Inlet Special Catch basin 6 in. beehive 60 in. . . . Ea.
- Inlet Special Catch basin 9 in. beehive 60 in. . . . Ea.
- Inlet Special Catch basin - Type A 60 in. . . . . Ea.

72 in. Riser
- Inlet Special - Type 1 72 in. . . . . Ea.
- Inlet Special - Type 2 72 in. . . . . Ea.
- Inlet Special Mountable - Type A 72 in. . . . . Ea.
- Inlet Special Mountable - Type B 72 in. . . . . Ea.
- Inlet Special Catch basin 6 in. beehive 72 in. . . . Ea.
- Inlet Special Catch basin 9 in. beehive 72 in. . . . Ea.
- Inlet Special Catch basin - Type A 72 in. . . . . Ea.

NOTES:

1. For inlet casting details, see Standard Drawings D-722-1, D-722-1A, D-722-2, and D-722-3. Use of other castings, similar in dimension, is allowed provided the casting meets the requirements set forth in the referenced Standard Drawings. Use the grate style as specified in the plans and include in the price bid for "Inlet Special - (casting type & riser size)".
2. Use castings manufactured in accordance with AASHTO M306. Use metal conforming to AASHTO M105 Class 35B in the manufacture of castings.
3. Use the Class of concrete, aggregate size, and methods of construction as detailed in Standard Drawing D-722-5 for the manhole riser, cover, and base.
4. See Standard Drawing D-722-5 for manhole riser, cover, and base details, dimensions, and reinforcement requirements.
5. Note the distance between the ℄ of the cover opening and the ℄ of the storm drain on the Plan & Profile sheets.
6. Construct manhole steps in accordance with Standard Drawing D-722-5 if noted on the Plan and Profile sheets.
7. Construct all risers 4 to 5 inches below final elevation and adjust to final grade using adjusting rings or cast-in-place concrete after paving. Include all costs for this adjustment in the price bid for "Inlet - Special, (casting type & riser size)".
8. Pipe shall be installed to extend a minimum of 2 inches beyond the inside face of the structure wall at each end. Payment will be based on the actual installed length of pipe between structures, measured end-to-end and rounded to the nearest whole foot.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
03-18-14	
REVISIONS	
DATE	CHANGE
08-19-21	Note Revisions
07-24-25	Note Revisions

REGISTERED PROFESSIONAL ENGINEER
JASON R. THORENSON
PE - 5048
DATE 07/24/25
NORTH DAKOTA


DocuSign Envelope ID: 8071F1C0-4FD3-4297-BAED-6F9FA4C58F28

Curb & Gutter and Valley Gutter


D-748-1

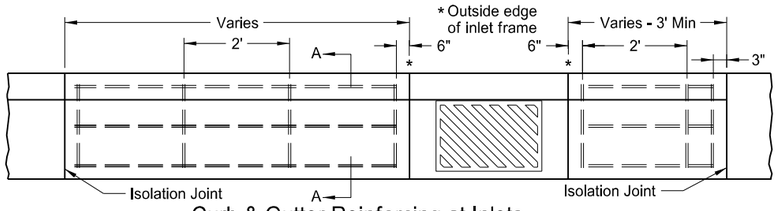

Curb & Gutter Reinforcing at Inlets




Section A-A




Keyway Detail for Curb & Gutter

(To be used with PCC Pavement and Drives)


T= Thickness of pavement unless otherwise noted on plans.

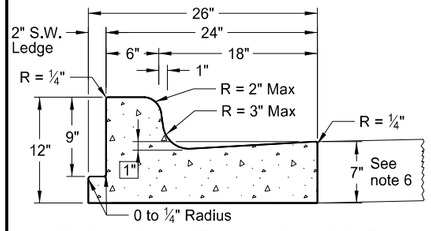


Curb & Gutter Type 1 (Sec. A & B)
Adjacent to Concrete Sidewalk, Median, or Parking Lot. (Sec. A shown. See Sec B for additional details.)

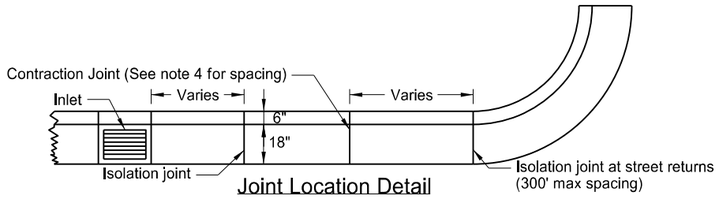


Joint Location Detail

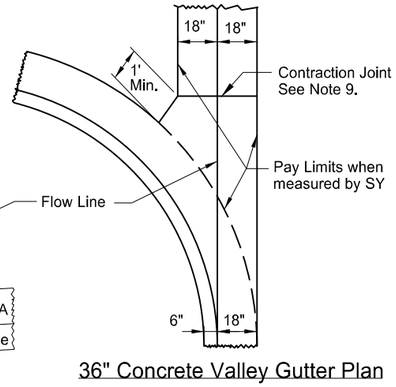


36" Concrete Valley Gutter Plan

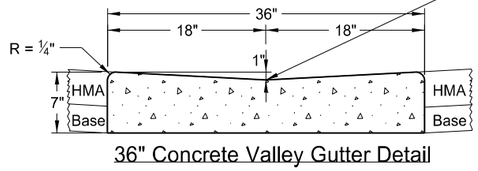


36" Concrete Valley Gutter Detail




Curb & Gutter Type 1 (Sec. A)

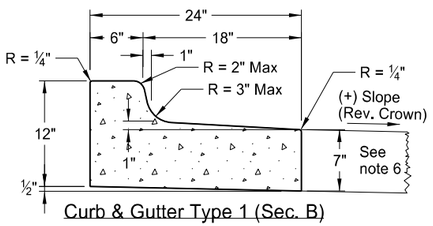


Curb & Gutter Type 1 (Sec. B)



Mountable Curb & Gutter Type 1 (Sec. A)

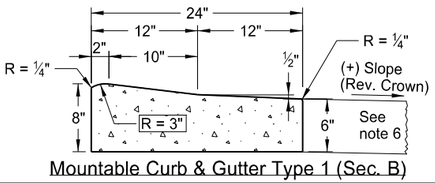


Mountable Curb & Gutter Type 1 (Sec. B)



Detail
(10' Max Spacing)

Contraction Joint


Section Y-Y

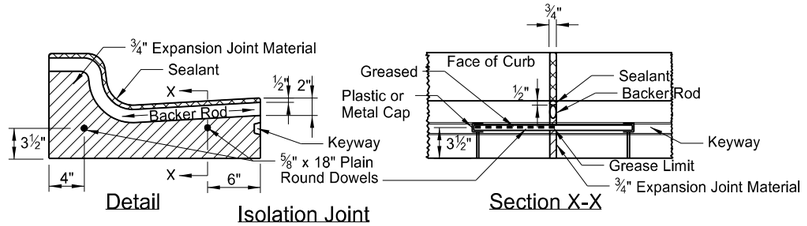


Detail

Isolation Joint

Section X-X

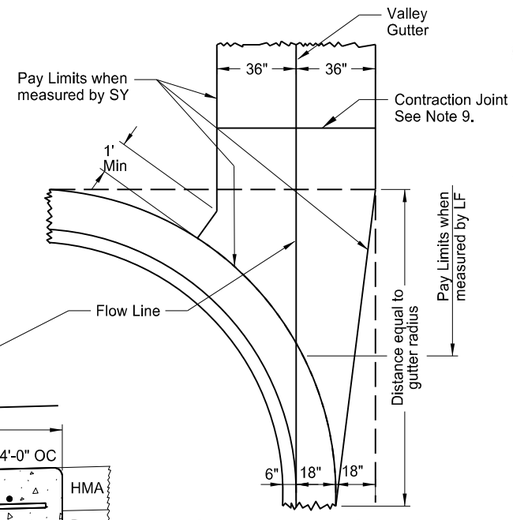

72" Concrete Valley Gutter Plan

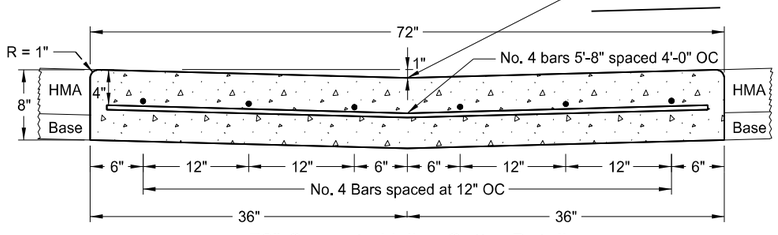

72" Concrete Valley Gutter Detail

NOTES:

1. Use Curb and Gutter Type 1 (Sec. A & B). Use section "A" with (-) pavement slopes and section "B" with (+) pavement slopes.
2. Contraction Joints: Tool the Curb & Gutter 2" as shown on the contraction joint details.
3. Isolation Joints: Use ¾" expansion joint material for isolation joints. Form the backer rod and joint sealant opening with a pre-cut piece of wood or other material approved by the engineer. Dowel supports are not required on the second pour at a cold joint. Install plastic or metal caps and greased dowels in the cold joint for the second pour.
4. Joint Spacing: For hot mix asphalt pavements use a 10' max joint spacing for the curb and gutter with panels on each side of the inlets. For concrete pavements match the joint spacing for the curb and gutter to the pavement joint on PCC Pavements (approximately 15' spacing.)
5. Joint sealing: For contraction joint, use joint sealant that conforms to section 826.02B. Use sealant for expansion joints specified in note 3 above. Tool and install sealant in accordance with the manufacturer's recommendations.
6. Curb & Gutter-Pavement Interface: For hot mix asphalt pavement use gutter depth shown. For PCC pavements, either match gutter depth to adjacent pavement depth or construct gutter depth shown.
7. Tie curb and gutter to abutting PCC pavement with No. 4 bars, 2'-0" in length, spaced at 3'-9" centers for 15' joint spacing (maximum spacing of 4' centers).
8. On street returns and other locations where new curb and gutter ends and does not abut existing curb and gutter, taper the last two (2) feet of the curb from 6" in height to 0". Install a 1/2" premolded full depth isolation joint (the same shape as the curb and gutter just ahead of the taper) with an 18" plain round bar across the joint.
9. Valley Gutter Joints: Form, saw, or score ⅛" min. to ⅜" max. width contraction joints (a minimum 2" depth) at approx 10' intervals. Seal the joints with hot poured elastic type joint sealer (Section 826.02A.2 of the Standard Specifications.) Include all costs for the joint and sealant in the price bid for Valley Gutter.
10. Reinforcing at Inlets: Use #4 deformed reinforcing bars without splices. Include all costs for reinforcing bars at inlets (even inlets located on radii) in the price bid for "Curb & Gutter - Type 1" or "Curb & Gutter Mountable - Type 1." Extend reinforcement to the second joint (with rebar placed through the first joint) in cases where the 3' minimum panel length can't be obtained.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-7-2013	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engr PE Stamp.
10-30-24	Revised bar size & notes.


KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 ENGINEER NORTH DAKOTA

10/30/24


Docusign Envelope ID: 16F7A80B-8DD6-45CC-B8F9-AA9BED01BCFF

CONCRETE DRIVEWAY - URBAN


D-750-1

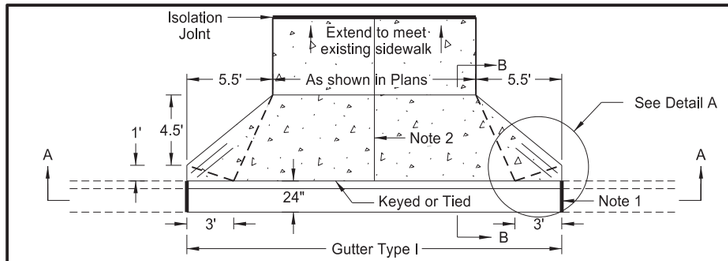


Driveway Type 1




Detail A




Sag - Driveway Type 1




Summit - Driveway Type 1

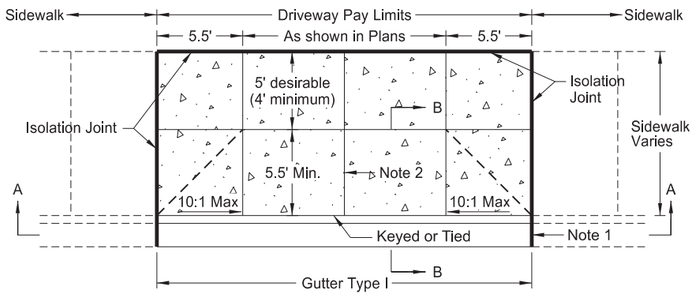


Driveway Type 2A




Sag - Driveway Types 2A & 2B




Summit - Driveway Types 2A & 2B

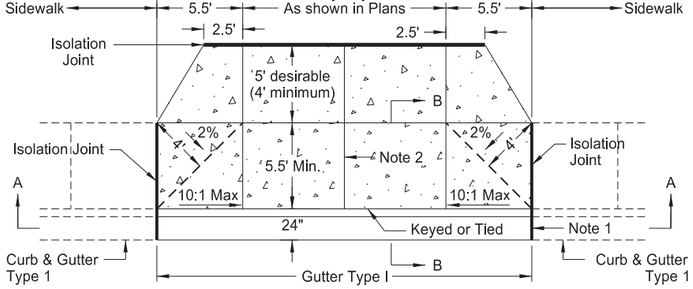


Driveway Type 2B




Sag - Driveway Type 3



Summit - Driveway Type 3

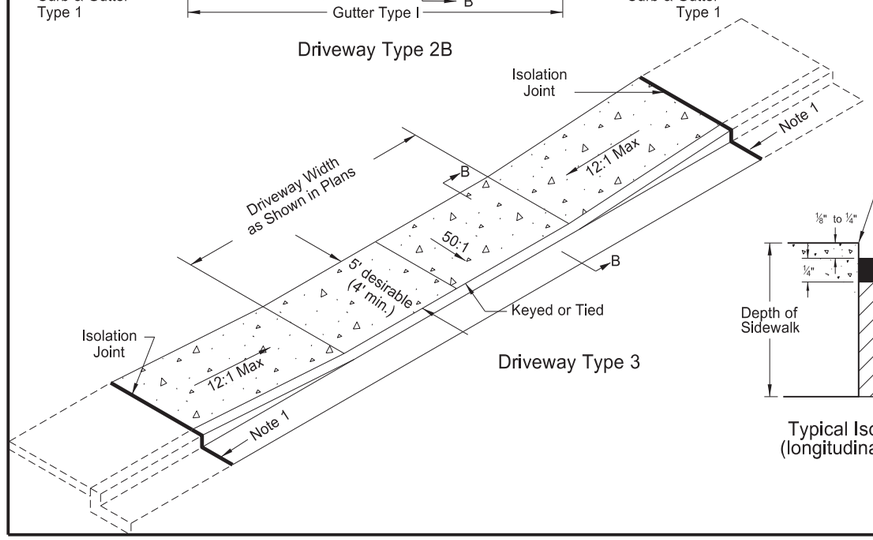

Driveway Type 3

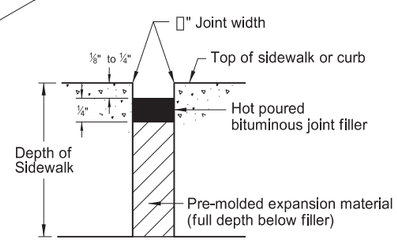

Typical Isolation Joint Seal (longitudinal and transverse)

NOTES:

1. See Standard D-748-1 for curb and gutter isolation joint detail. On PCC roadways, match curb and gutter joints with pavement joints, as much as practical.
2. Joint Spacing: Use 1 center contraction joint on driveways 20' width or less, 2 center contraction joints for driveways 20' to 30' width, and 3 center contraction joints for driveways greater than 30' width.

   Saw or groove contraction joints a minimum depth of 1/3 the depth of the concrete.


   Use isolation joints between separately poured concretes, or between old and new concrete.

   Seal joints with hot pour bituminous filler or low modulus silicone. Install and tool sealant according to manufacturer's recommendations.

   Include all costs for labor, equipment, and material to construct and seal joints in the price bid for the driveway.
3. Include all costs for gutter-Type 1 in the unit price bid for "Curb and Gutter-Type 1".
4. Use 6" driveway unless otherwise specified.
5. Place 4" base material under concrete driveway. Include all costs for labor and materials necessary to place the base material in the price bid for Salvage Base Course or Aggregate Base Course CL 5.
6. Construct sidewalk behind a driveway to the same thickness as the driveway. The Engineer will measure it as driveway concrete.




Section A-A

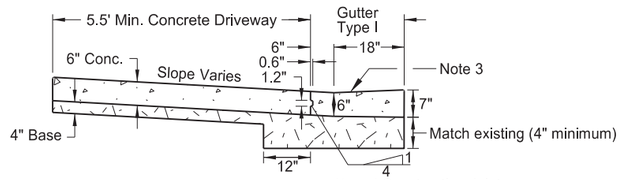

6" Section B-B

Keyed Construction Joint or Tied Joint (#4 x 2'-0" Bars) max 4' on center

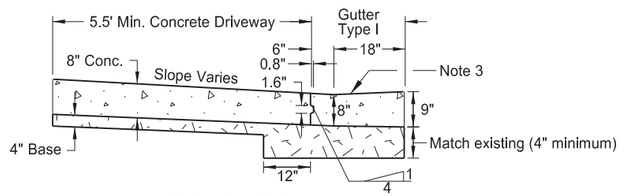

8" Section B-B

Keyed Construction Joint or Tied Joint (#4 x 2'-0" Bars) max 4' on center

Driveway ADT	Grade G1		DImenslon (L) ft.		Grade Changes (D)	
	Desirable	Maximum	Desirable	Maximum	Desirable	Maximum
(< 500)	5%	12% or controlled by vehicle clearance	12	6	6%	15% or controlled by vehicle clearance
(500-1500)	3%	8%	20	20	3%	6%
(> 1500)	2%	5%	40	40	0%	3%

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

2-13-2014

REVISIONS

DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
03-13-25	Tied joint bar dimensions.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

03/13/25


DocuSign Envelope ID: C174DEDF-0A0D-4A6A-B116-79082F516368

SIDEWALK

D-750-2

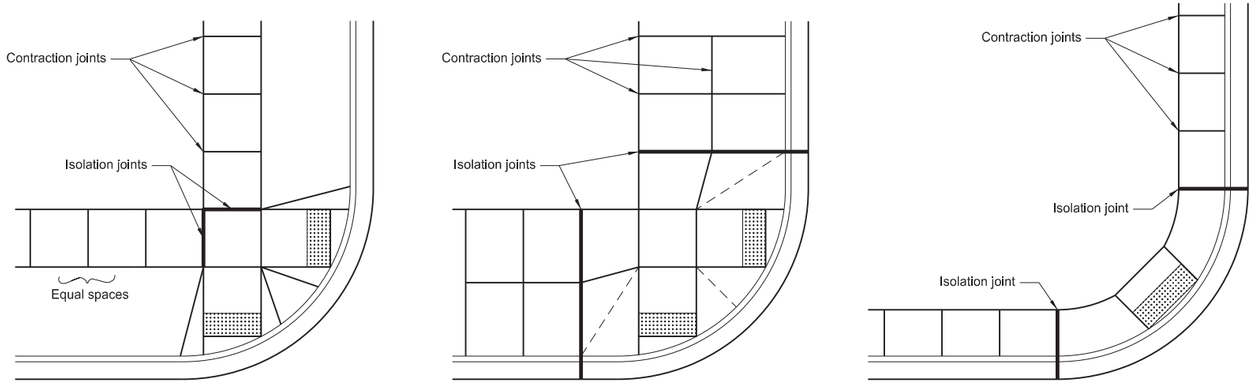

Typical Joint Layouts

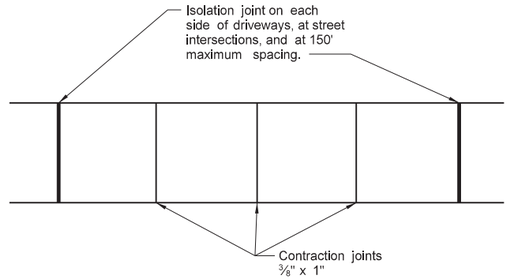

NOTES:

1. Curb ramp and detectable warning panel layouts for informational purposes only. See Standard Drawing D-750-3 for curb ramp and detectable warning panel details.
2. Joint Spacing: Vary transverse contraction joint spacing from 4' to 6' to create approximate square panels.

   Use longitudinal contraction joints when sidewalk width is 8' or greater, and space at half the sidewalk width.


   Saw or groove contraction joints to a minimum depth of 1/3 the depth of the concrete.

   When sidewalk is adjacent to curb & gutter, vary the sidewalk joint spacing to match curb & gutter joints.

   Use isolation joints between separate concrete pours, or between old and new concrete.
3. Include all costs for labor, equipment, and material necessary to construct contraction and isolation joints in the price bid for sidewalk concrete.
4. Use 4" sidewalk concrete thickness unless otherwise specified.
5. Use 4" base material thickness unless otherwise specified. Include all costs for labor and materials necessary to place the base material in the price bid for "Salvage Base Course" or "Aggregate Base Course CL 5."


   Modify existing ground slope with landscaping as needed. If not possible, such as adjacent buildings, use a vertical curb as shown in the detail below. The Engineer will measure curb at the unit price bid for "Curb - Type I" per lineal foot.
6. Sidewalk Width & Grade: Provide a continuous 4' min clear width pedestrian access route with max 2% concrete cross slope, excluding flares. The width of the curb cannot be counted as part of the pedestrian access route.

   When clear width of pedestrian access routes is less than 5.0', provide passing spaces at a maximum of 200' with a minimum size of 5.0' by 5.0'.




Sidewalk Width and Grade


Utility Blockout

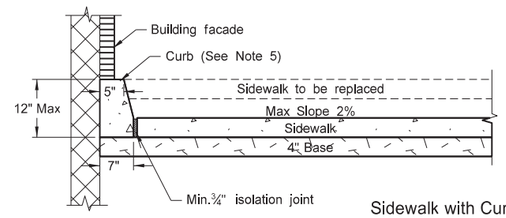


Sidewalk with Curb Detail
(Building face application)

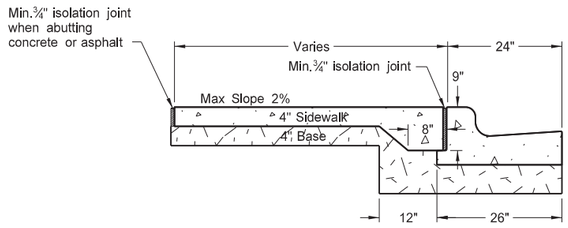


Sidewalk Detail
(Installed adjacent to curb and gutter)




Vertical Discontinuities
(As needed for utility covers, vaults, grating, etc..)




"L"Bar Detail
#3 Bar

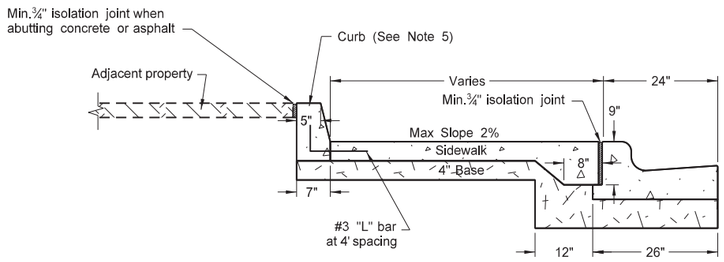

Sidewalk with Curb Detail
(Adjacent property application)

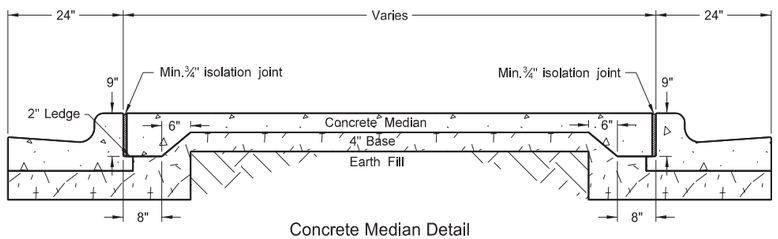

Concrete Median Detail

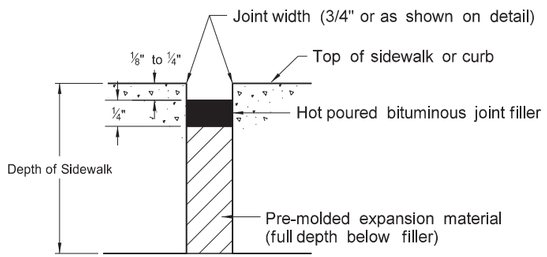

Typical Isolation Joint Seal
(longitudinal and transverse)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-26-13	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
09-05-18	Added sidewalk details for width & grade & passing lane requirements.
08-27-19	New Design Engineer PE Stamp.
08-09-24	Electronic Stamp/Signature.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/09/24


CURB RAMP RETROFIT DETAILS

D-750-3


Type 1A

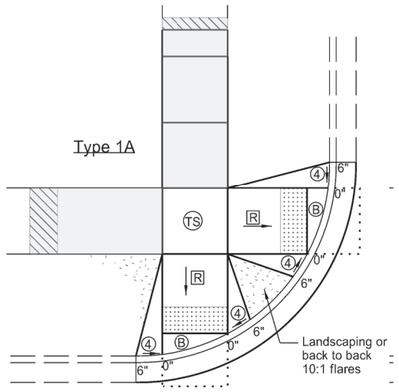


Type 1C

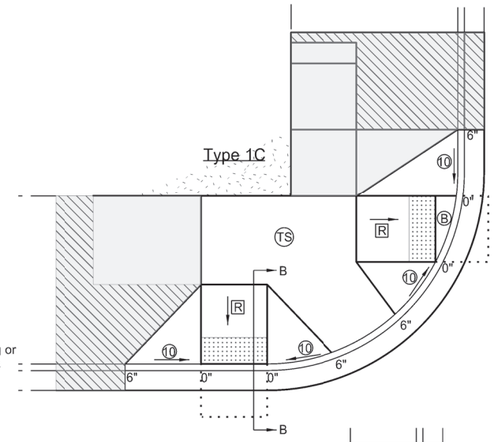


Type 2

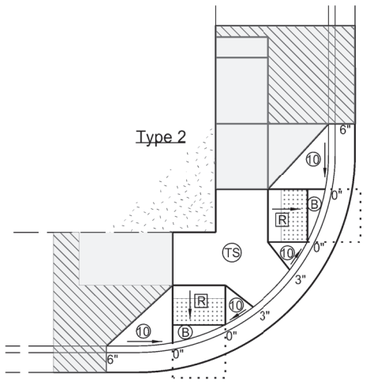


Type 4

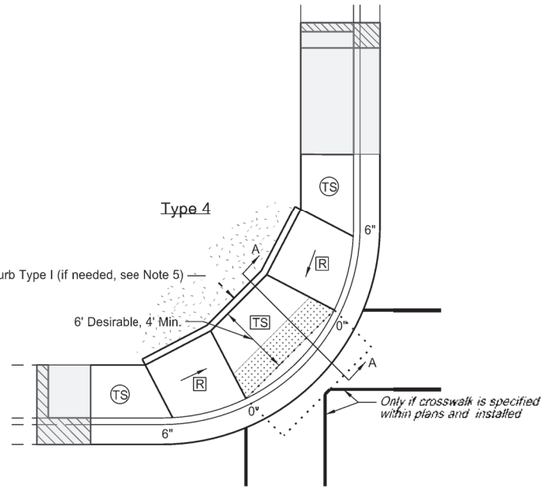


Type 1B

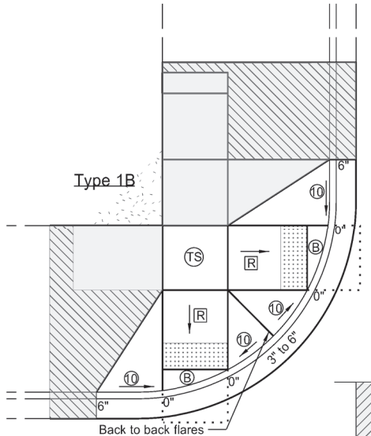


Type 1D

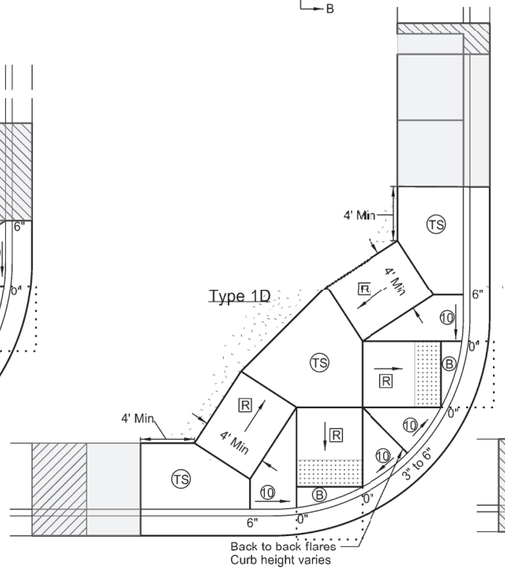

Type 3

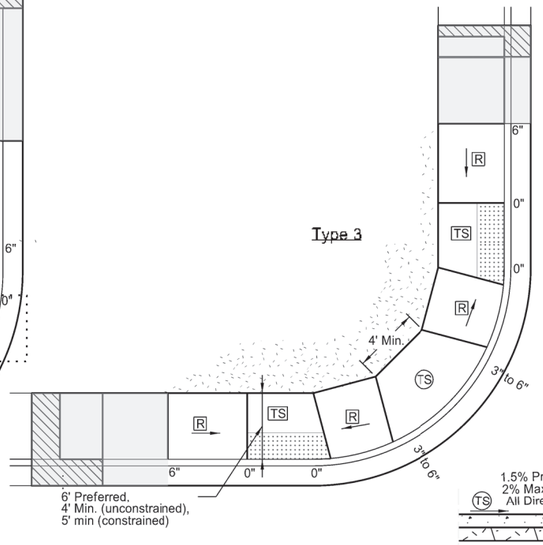




NOTES:

1. Ramp width is the useable portion of the ramp, excluding flares. Match curb ramp width to Existing Pedestrian Facility (EPF) width (4' minimum or 5' for island ramps.) Match ramp width to existing shared use path width. Maximum ramp length is 15'.
2. Provide turning space with desirable 5' x 5' size or larger and minimum 4' x 4' unconstrained size, for any change of direction. Provide landing 5' long x width of path at the bottom and top of parallel ramps and at the top of perpendicular ramps. Turning spaces and Landings may overlap.
3. Match detectable warning panel width to ramp width. Radial panels are allowed. Place detectable warning panel within the lower turning space.
4. Provide a continuous 4' minimum width EPF with 1.5% preferred cross slope and max 2% constructed cross slope.
5. Modify existing ground slope with landscaping, as needed. If not possible, use a vertical curb as detailed on Standard D-750-2. The Engineer will measure curb at the unit price bid for "Curb - Type I" per lineal foot.
6. Islands: If the profile of the island curb ramp is 2% or less, provide a minimum distance of 2' between warning panels. If the profile of the island curb ramp is steeper than 2%, provide a turning space between the ramps.
7. Provide generally planar vertical alignments. Provide grade breaks, perpendicular to the direction of the pedestrian travel, at the top and bottom of curb ramps (1.5% preferred, 2% max constructed cross slope).
8. See Curb Ramp Retrofit Transition Details Standard D-750-4 for additional information. Also See PROWAG for full compliance in the curb ramp area.
9. Grade transitions shall be flush.


LEGEND:

- : Detectable Warning Panel.
- : Landscaping.
- : Transitional tie-in to nearest joint, if needed.
- : Curb Ramp Retrofit Transitional Area (See Standard Drawing D750-4)
- : 4' long x width of EPF or 4' minimum Clear space outside traffic lanes of travel. 1.5% preferred cross slope 2% maximum cross slope 4.7% preferred running and counter slope 5% maximum running and counter slope
- TS : Turning Space. Use at top of ramp or when changing directions. 1.5% preferred slope (2% maximum) all directions.
- R : Preferred Ramp Grade = 5% to 7.5%. Maximum Constructed Grade = 8.3%. Preferred Cross Slope = 1.5%. Maximum Constructed Cross Slope = 2%.
- B : 1.5% preferred cross slope 2% maximum constructed cross slope running slope consistent with the EPF 4.7% preferred max counter slope 5.0% max constructed counter slope
- 10 : 10:1 maximum constructed slope.
- 4 : 4:1 maximum constructed slope.


0", 3", or 6" : Curb Height.




Section A-A

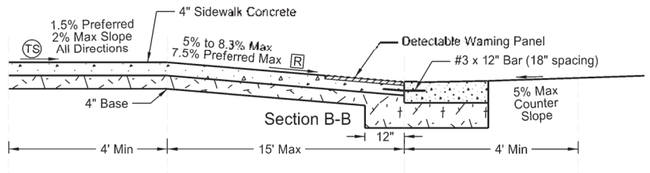


Section B-B




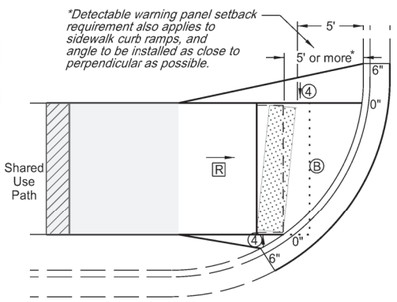


Concrete Apron for Shared Use Paths with Curb and Gutter

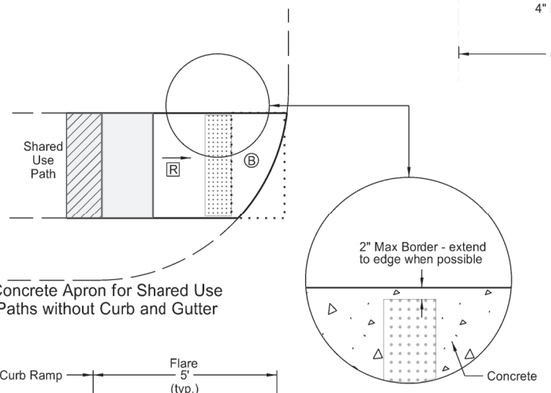

Concrete Apron for Shared Use Paths without Curb and Gutter




4:1 Flares
(To be used when flare is adjacent to landscaping)



10:1 Flares
(To be used when flare is adjacent to sidewalk)

Median Refuge Islands (Cut-Through)

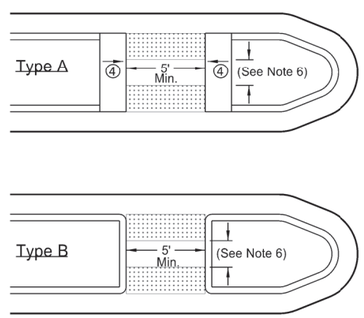

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

11-26-13

REVISIONS


DATE	CHANGE
10-17-17	Updated to active voice.
09-05-18	Revised Notes, Revision for Turning Space, Added Passing Space Requirements, Turned Detectable Warning Panel
03-15-21	Slope & other clarifications.
05-19-21	Separate Curb Ramp Transition Area from Curb Ramp area

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
Kirk J Hoff
05 19 2021


CURB RAMP RETROFIT TRANSITIONAL AREA DETAILS

D-750-4


Type 1A

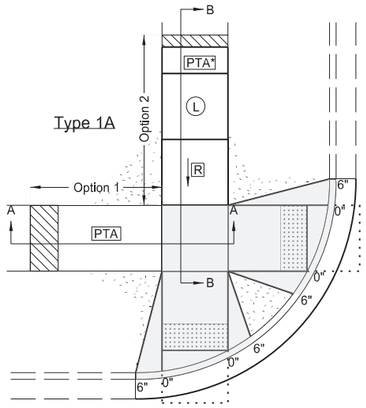


Type 1C

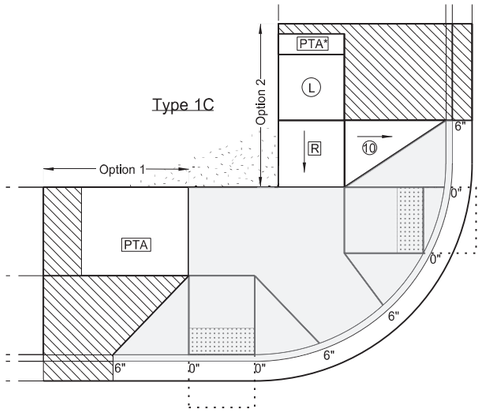


Type 2

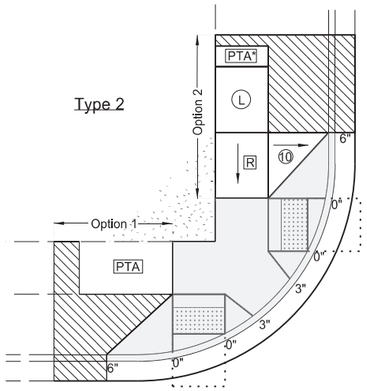


Type 4

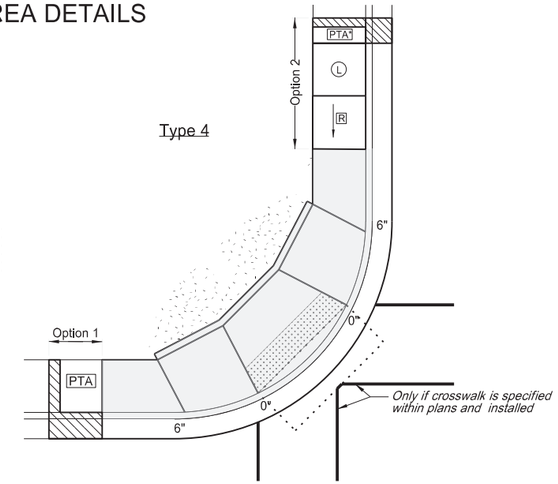


Type 1B

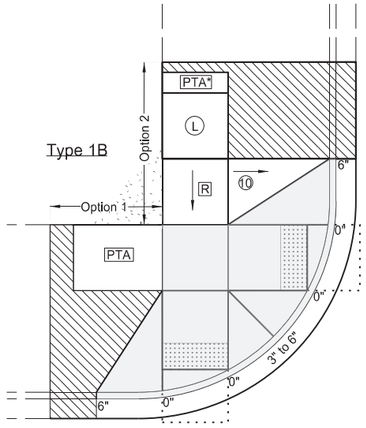



Type 1D

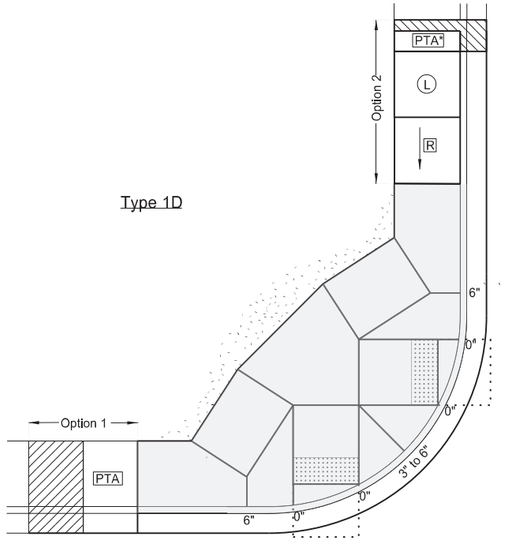


Type 3

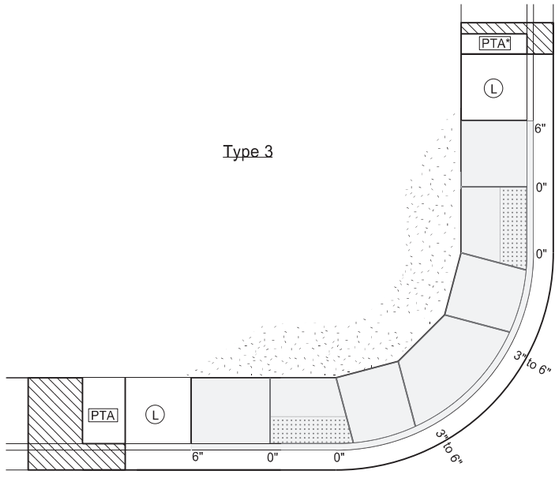




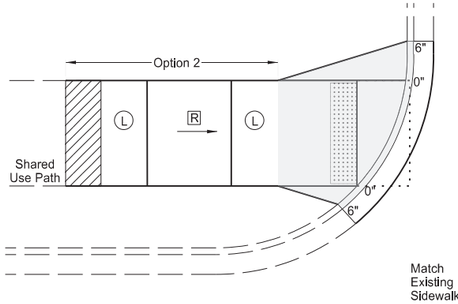

Transition Areas for
Shared Use Paths

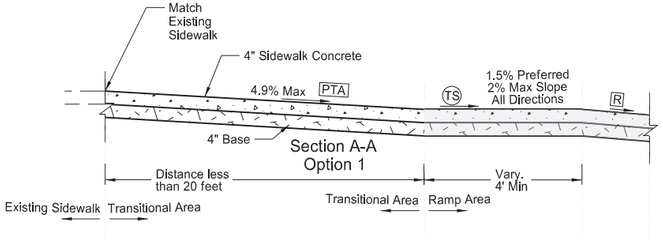

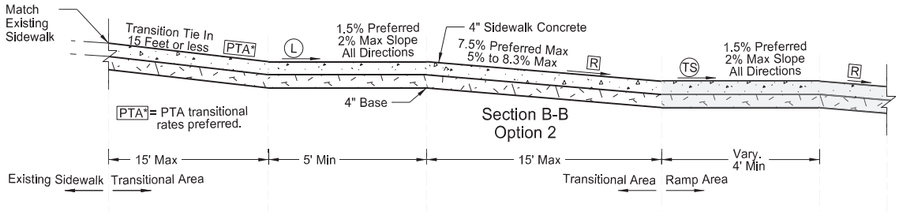

NOTES:

1. Curb Ramp Transitional Areas are to transition from the Curb Ramp area into the Existing Pedestrian Facility (EPF). Each layout shows example transitions. Use any combination for transitions from the Ramp Area into the EPF that allows for similar or gentler slopes to that of the existing condition, yet transitions in the shortest distance possible. In some cases, if grades allow, the Ramp area can immediately transition into the EPF and no transitional area is needed.
2. Option 1: Use this transition when existing running slope grades are less than 5%. Transition from the ramp area to the EPF using the Pedestrian Access Transition Area (PTA) transition rates and in less than 20 feet.
3. Option 2: Use this transition when existing running slopes are greater than 5% and option 1 is not able to be met.

   Add a ramp and a landing immediately after the ramp area. Then transition from the compliant landing into the EPF using the PTA rates (preferred), or in less than 15 feet (which ever is shorter).
4. Transitional Areas for Shared Use Paths can be concrete or asphalt.
5. See Curb Ramp Retrofit Details Standard D-750-3 for additional information.

LEGEND:

- : Detectable Warning Panel.
- : Landscaping.
- : Transitional tie-in to nearest joint, if needed.
- : Curb Ramp Retrofit Area (See Standard Drawing D750-3)
- : 4' long x width of EPF or 4' minimum Clear space outside traffic lanes of travel.
  1.5% preferred cross slope
  2% maximum cross slope
  4.7% preferred running slope
  5% maximum running slope
- PTA : Pedestrian Access Transition Area
  Running Slope less than 4.9%.
  Transition Cross Section at 1/2 percent per foot from the from Ramp Area to EPF.
- (L) (TS) : Turning Space/Landing
  Use at top of ramp or when changing directions.
  1.5% preferred slope (2% maximum) all directions.
- R :Preferred Ramp Grade = 5% to 7.5%.
  Maximum Constructed Grade = 8.3%.
  Preferred Cross Slope = 1.5%.
  Maximum Constructed Cross Slope = 2%
  Maximum Length = 15 feet
- (10) : 10:1 maximum constructed slope.
- (4) : 4:1 maximum constructed slope.

0", 3", or 6" : Curb Height.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
05-19-21	
REVISIONS	
DATE	CHANGE

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
05 19 2021

DocuSign Envelope ID: 3BB6949C-35F3-4834-B8EF-90A4185B6E25

PERFORATED TUBE ASSEMBLY DETAILS

D-754-23

Notes:

1. Curbed Roadways: Use a 3' clearance from face of the curb except where right of way or sidewalk width is limited; Use a minimum 2' clearance. Increase the horizontal clearance if required to maintain a minimum sidewalk clear width of 4' from the sign support, not including any attached curb.

2. Minimum vertical clearance: Provide at least 5' measured from the bottom of the sign to the edge of the driving lane or auxiliary lane at the side of the road in rural districts. Provide at least 7' clearance to the bottom of the sign, where parking or pedestrian movements occur.


   Install signs on expressways a minimum height of 7'.

   Install adopt-a-highway signs on Freeways at least 7' above the edge of the driving lane.

   Maximum vertical clearance is 6" greater than the minimum vertical clearance.

3. Offset signs: Use a vertical clearance of 5' above the edge of the driving lane for signs placed 30 feet or more from the edge of the traveled way.


4. Provide a horizontal clearance from edge of shared use path to edge of sign of 3', except where width is limited. Provide a minimum clearance of 2'.

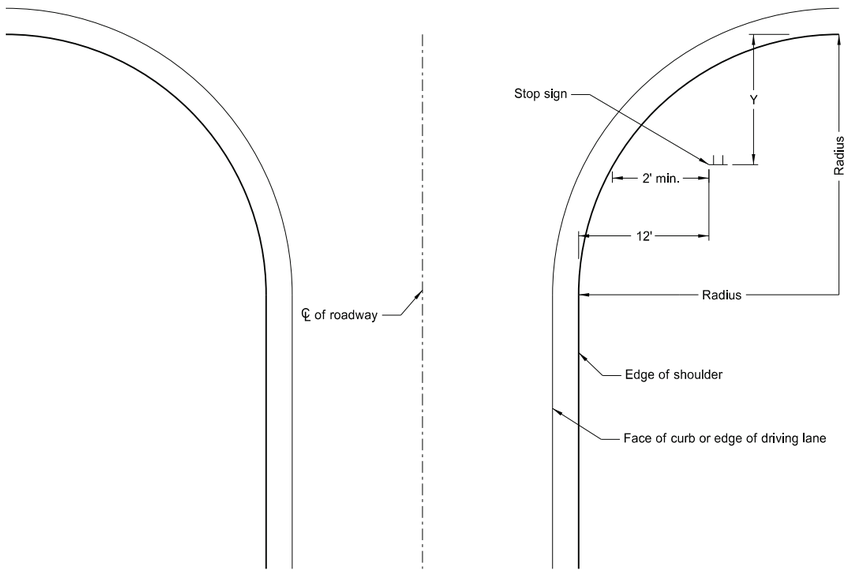

Stop Sign Location
Wide Throat Intersection


Use layout for the placement of "Stop" signs.

Radius ft.	Y-max. ft.	Y-min. ft.
40	50	15
45	50	18
50	50	21
55	50	25
60	50	28
65	50	32
70	50	35
75	50	39
80	50	43

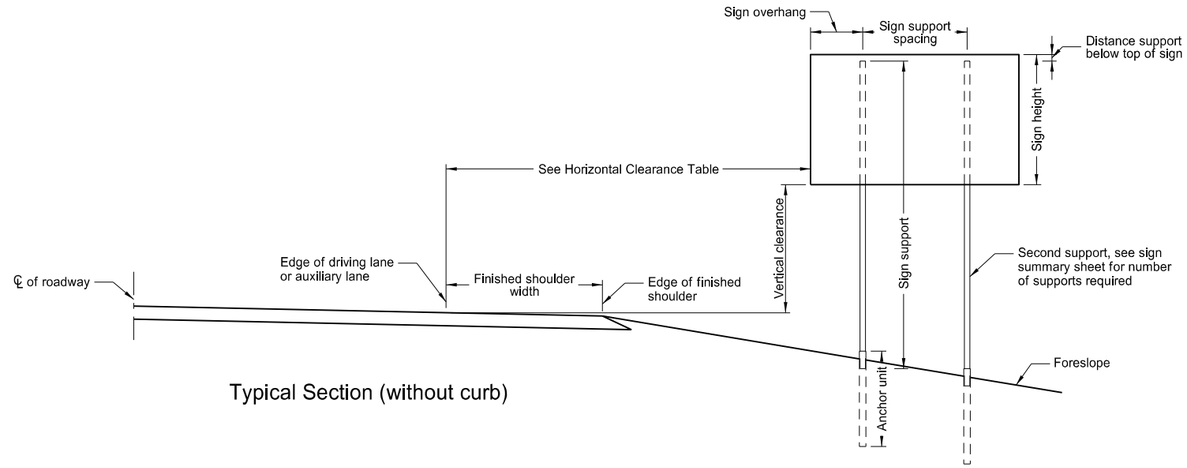


Typical Section (without curb)

Horizontal Clearance Table	
Shoulder Width ft	Offset ft
0 to 2	16
>2 to 4	18
>4 to 6	20
>6 to 8	22
>8 to 10	24

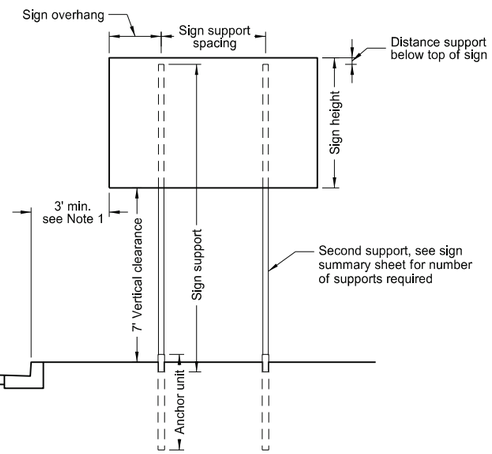

Typical Section (with curb)

Residential or Business District

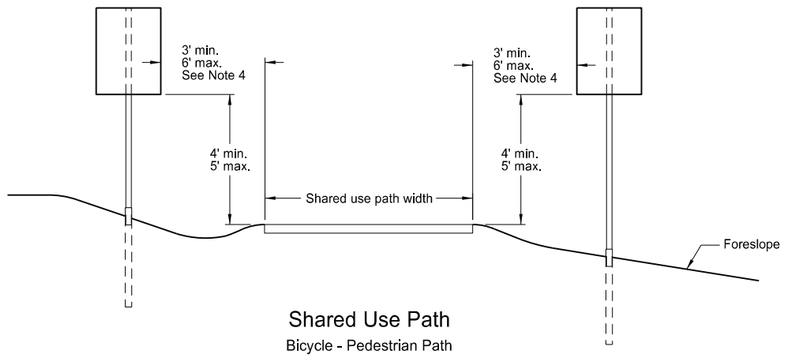

Shared Use Path

Bicycle - Pedestrian Path

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
7-8-14	Revised note 2, added note 4.
8-30-18	Updated notes to active voice.
8-29-19	New Design Engineer PE Stamp.
8-05-24	Electronic Stamp/Signature.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/05/24


DocuSign Envelope ID: 3BB6949C-35F3-4834-B8EF-90A4185B6E25


Mounting Details Perforated Tube

D-754-24

Number of Posts	Telescoping Perforated Tube: Post Size In.	Wall Thick-ness Gauge	Sleeve Size In.	Wall Thick-ness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thick-ness Gauge
1	2	12			No	2¼	12
1	2¼	12			No	2½	12
1	2½	12			(B)	3(C)	7
1	2½	10			Yes		7
1	2¼	12	2½(D)	12	Yes		7
1	2½	12	2¼	12	Yes		7
2	2½	10			Yes		7
2	2¼	12	2½(D)	12	Yes		7
2	2½	12	2¼	12	Yes		7
3 & 4	2½	12			Yes		7
3 & 4	2½	10			Yes		7
3 & 4	2½	12	2¼	12	Yes		7
3 & 4	2¼	12	2½(D)	12	Yes		7
3 & 4	2½	10	2⅜16	10	Yes		7

(B) - Provide a shim as specified by the manufacturer when placing 2½", 12 gauge posts in standard soils without breakaway bases. Provide breakaway base when placing the support in weak soils. The Engineer will determine if the soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.
(C) - 3" anchor unit
(D) - 2½" x 12 ga. x 18" minimum length external sleeve required.

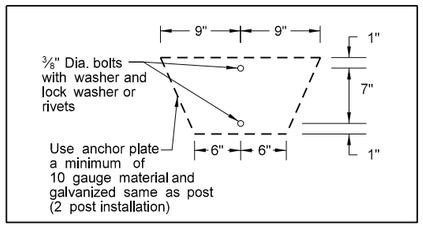


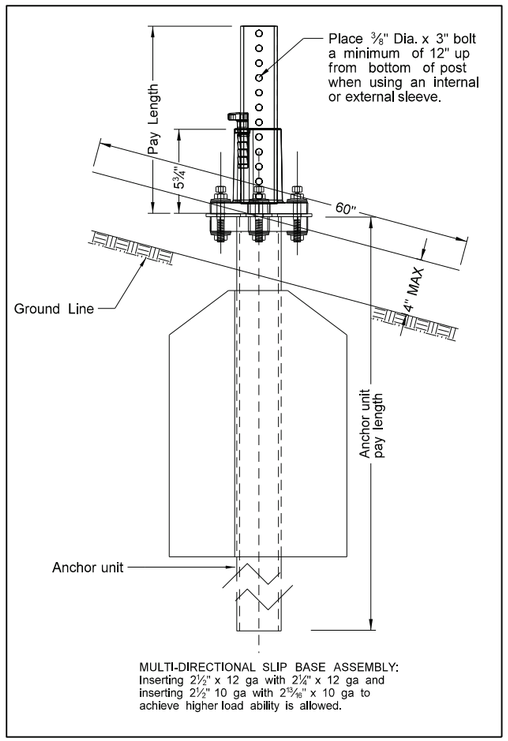


MULTI-DIRECTIONAL SLIP BASE ASSEMBLY:
Inserting 2½" x 12 ga with 2¼" x 12 ga and inserting 2½" 10 ga with 2¹⁵⁄₁₆" x 10 ga to achieve higher load ability is allowed.

SHOULDER BOLT


Shimming agent to reduce tolerance between 3" anchor unit and 2½" post.
(use standard ⅜" diameter grade 8 bolt with proper shim)

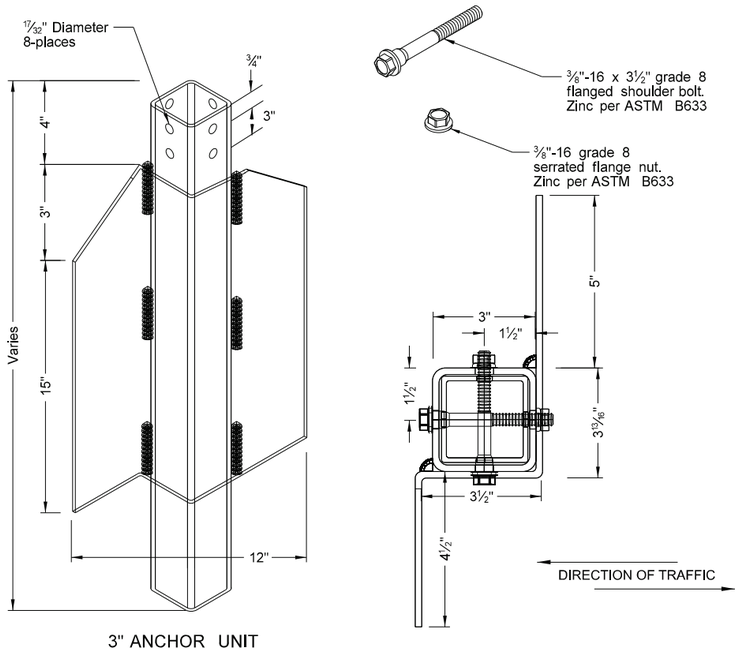


3" ANCHOR UNIT

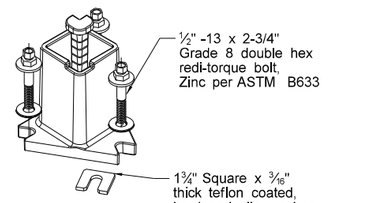

SLIP BASE FOR 2½" POST

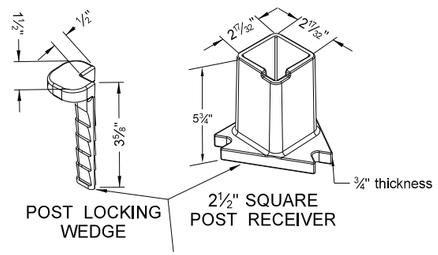

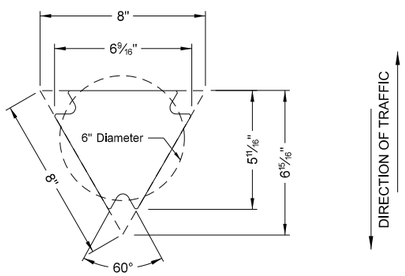


SLIP BASE DETAIL

Properties of Telescoping Perforated Tubes: Tube Size In.	Wall Thickness in.	U.S. Standard Gauge	Weight Per Foot Lbs.	Moment of Inertia In.⁴	Cross Sect. Area In.²	Section Modulud In.³
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
2⅜16 x 2⅜16	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.783

The 2 ⅜16" size 10 gauge is shown as 2.19" size on the plans; The 2½" size is shown as 2.51" size on the plans.

NOTE:

1. 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement is above and below post location and also back and ahead of post.
2. Provide 7 guage HRPO commmercial quality ASTM A569 and 3" x 3" x 7" guage ASTM A500 grade B anchor material with 43.9 KSI yield strength and 59.3 KSI tensile strength. Hot dip galvanize anchor per ASTM A123/153. Tolerances on anchor unit and slip base bottom assembly are +/- 0.005" unless otherwise noted.
3. Eliminate wings when anchor is used in concrete sidewalk.
4. Provide a minimum 8' distance between the first and fourth post on four post signs.
5. Install in accordance with manufacturers recommendation.
6. Use a minimum ½" diameter x 4" grade 8 concrete fastener for surface mount breakaway base.

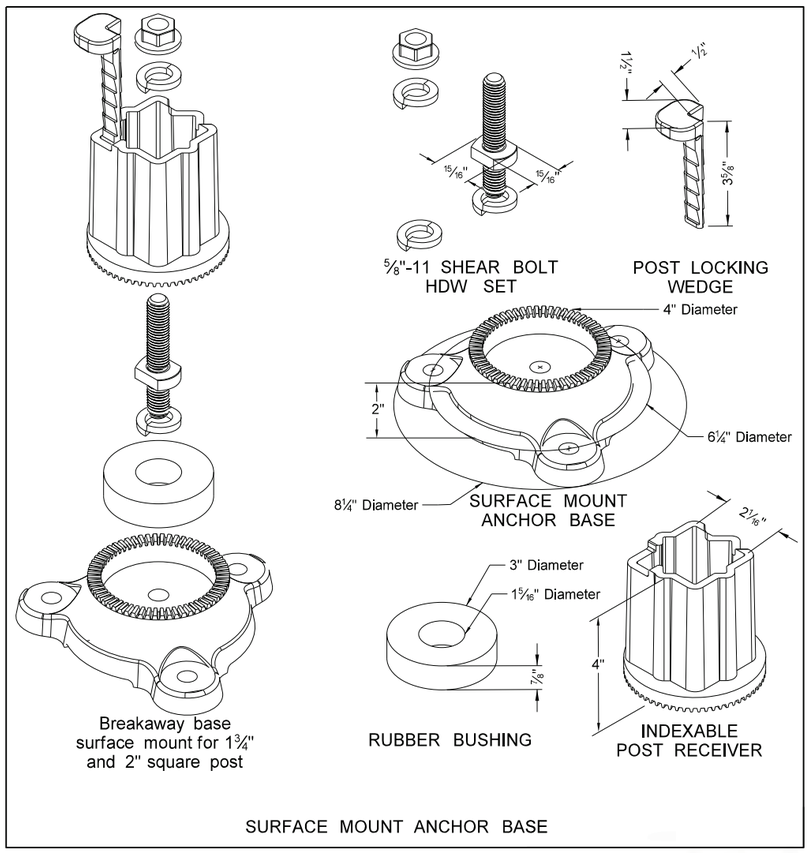

SURFACE MOUNT ANCHOR BASE

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

8-6-09

REVISIONS


DATE	CHANGE
8-30-18	Updated notes to active voice & corrected max height of base.
8-29-19	New Design Engineer PE Stamp.
8-05-24	Electronic Stamp/Signature.


KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 ENGINEER NORTH DAKOTA

08/05/24

Docusign Envelope ID: B2017174-2071-4D82-BD09-F2B4B86DFDCB

D-754-24A

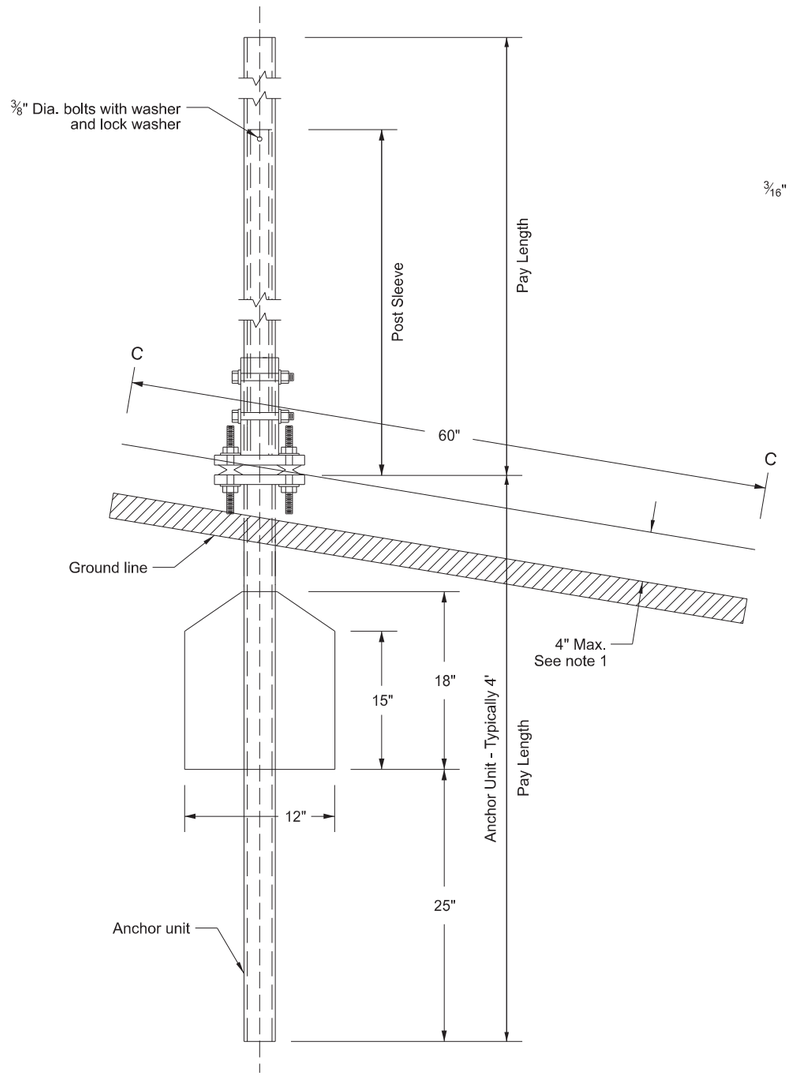





Section C-C

Max projection of the stub post is 4" above a 60" chord aligned radially to the center line of the highway and connecting any point, within the length of the chord, on the ground surface on one side of the support to a point in the ground surface on the other side.

Breakaway Coupler System for Perforated Tubes

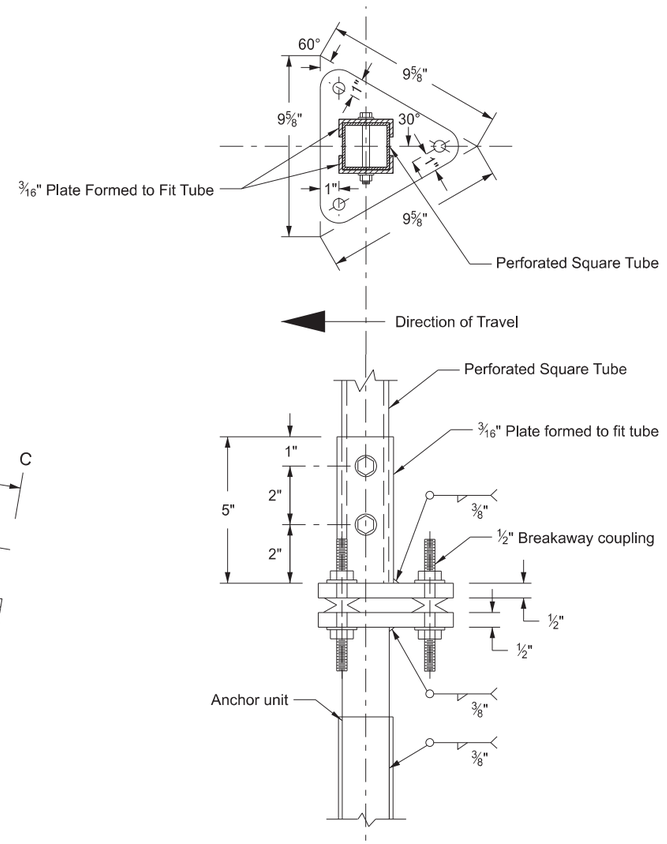

Base Plate with Breakaway Coupler

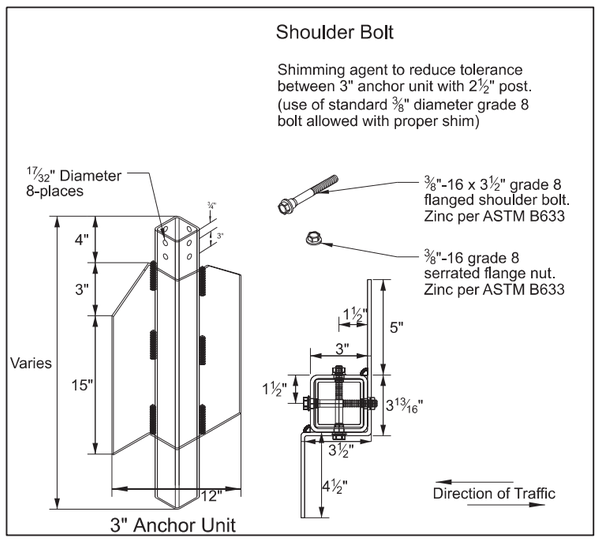

3" Anchor Unit

Notes:

1. 4" Vertical clearance of anchor or breakaway base. The 4" x 60" measurement is above and below post location and also back and ahead of post.
2. Use anchor unit of the same size and specification as the post.
3. Provide a minimum 8' distance between the first and fourth post on four post signs.
4. Use the breakaway base system on standard D-754-24 or the breakaway coupling system manufactured from material meeting the requirements of ASTM A325 fasteners with the special requirements specified by DENT BREAKAWAY IND., INC. which meets the test requirements of NCHRP Report 350.

Number of Posts	Telescoping Perforated Tube						
	Post Size In.	Wall Thick-ness Gauge	Sleeve Size In.	Wall Thick-ness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thickness Guage
1	2	12			No	2¼	12
1	2¼	12			No	2½	12
1	2½	12			(B)	3(C)	7
1	2½	10			Yes		7
1	2¼	12	2	12	Yes		7
1	2½	12	2¼	12	Yes		7
2	2½	10			Yes		7
2	2¼	12	2	12	Yes		7
2	2½	12	2¼	12	Yes		7
3 & 4	2½	12			Yes		7
3 & 4	2½	10			Yes		7
3 & 4	2½	12	2¼	12	Yes		7
3 & 4	2¼	12	2	12	Yes		7
3 & 4	2½	10	2 3/16	10	Yes		7

(B) - 2½" 12 gauge posts do not need breakaway bases unless support is placed in boggy, wet, or loose soil areas.

(C) - 3" anchor unit

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

10-3-2013

REVISIONS

DATE	CHANGE
08-30-18	Updated notes to active voice.
08-30-19	New Design Engr PE Stamp.
08-05-24	Electronic Stamp/Signature.
07-22-25	Corrected "typo" in C-C note.


KIRK J. HOFFT REGISTERED PROFESSIONAL PE-4683 ENGINEER NORTH DAKOTA

07/22/25

DocuSign Envelope ID: 3BB6949C-35F3-4834-B8EF-90A4185B6E25

Mounting Details Perforated Tube


D-754-25

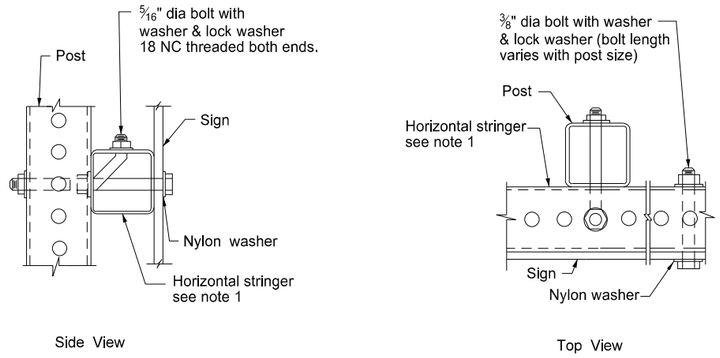

Side View

Top View


STRINGER MOUNTING
(WITH STRINGER IN FRONT OF POST)

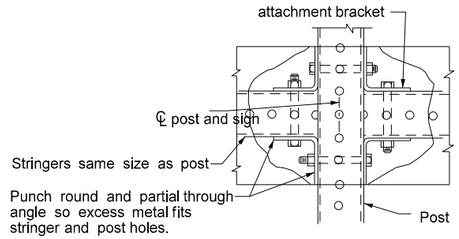


STREET NAME SIGNS AND ONE WAY SIGNS
SINGLE POST ASSEMBLY
ONE STRINGER OR BACK TO BACK MOUNTING

Note:

1. Horizontal stringers - Use perforated tubes or 1¾" x 3/16" thick, 1.08 lbs./ft aluminum or 3.16 lbs./ft steel z bar stringers.
2. Use minimum outside diameter 15/16" ±1/16" and 10 gauge thick metal washers on sign face.
3. Place No Parking signs with directional arrows at a 30 to 45 degree angle with the line of traffic flow. Turning the support to the correct angle for No Parking signs requiring the above angles is allowed. If the No Parking sign is placed with another sign that requires placement at a 90 degree angle with the line of traffic flow, use the detailed angle strap to mount the No Parking sign. Use flat washers and lock washers with all nylon washers.
4. Punching the sign backing and placing the bolt through the sign, the stringer and the post is allowed in lieu of using the bent bolt to attach the post to the stringer.
5. 4" vertical clearance of anchor or breakaway base. The 4" x 60" measurement is above and below post location and also back and ahead of post.




Side View

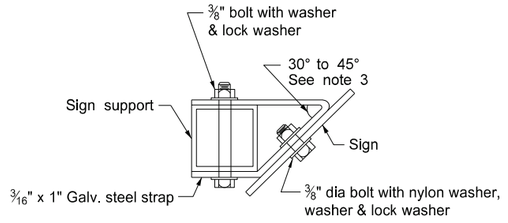

Top View


STRAP DETAIL

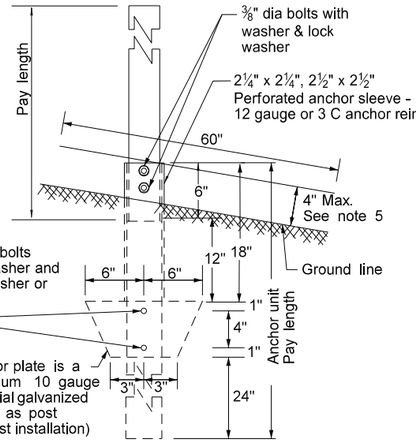


ANCHOR UNIT AND POST ASSEMBLY

Number of Posts	Telescoping Perforated Tube						
	Post Size In.	Wall Thick-ness Gauge	Sleeve Size In.	Wall Thick-ness Gauge	Slip Base	Anchor Size Without Slip Base In.	Anchor Wall Thick-ness Gauge
1	2	12			No	2¼	12
1	2¼	12			No	2½	12
1	2½	12			(B)	3(C)	7
1	2½	10			Yes		7
1	2¼	12	2½(D)	12	Yes		7
1	2½	12	2¼	12	Yes		7
2	2½	10			Yes		7
2	2¼	12	2½(D)	12	Yes		7
2	2½	12	2¼	12	Yes		7
3 & 4	2½	12			Yes		7
3 & 4	2½	10			Yes		7
3 & 4	2½	12	2¼	12	Yes		7
3 & 4	2¼	12	2½(D)	12	Yes		7
3 & 4	2½	10	2 3/16	10	Yes		7

(B) - When placing 2½", 12 gauge posts in standard soils without breakaway bases, provide a shim as specified by the manufacturer. Provide breakaway base when placing the support in weak soils. Engineer will determine if soils are weak. Weak soils are classified as boggy, wet, or loose soil areas.
(C) - 3" anchor unit
(D) - 2½" x 12 ga. x 18" minimum length external sleeve required.




BOLT MOUNTING

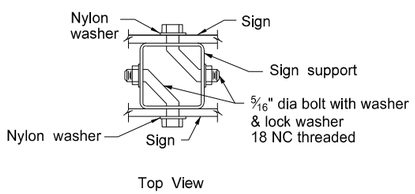

Top View

BACK TO BACK MOUNTING

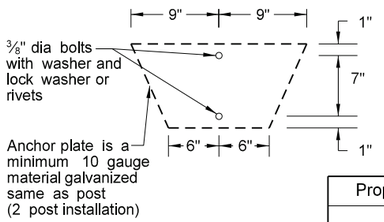

Properties of Telescoping Perforated Tubes						
Tube Size In.	Wall Thickness In.	U.S. Standard Gauge	Weight Per Foot Lbs.	Moment of Inertia In.^{4}	Cross Sect. area In.^{2}	Section Modulus In.^{3}
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.783

The 2 3/16" size 10 gauge is shown as 2.19" size on the plans.
The 2½" size is shown as 2.51" size on the plans.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

8-6-09

REVISIONS

DATE	CHANGE
7-8-14	Revised Note 3.
8-30-18	Updated notes to active voice.
8-30-19	New Design Engr PE Stamp.
8-05-24	Electronic Stamp/Signature.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/05/24


DocuSign Envelope ID: 245AF61F-5CB3-4068-9ABB-3DD8A55F5268

SIGN PUNCHING, STRINGER AND SUPPORT LOCATION DETAILS REGULATORY, WARNING AND GUIDE SIGNS


D-754-27

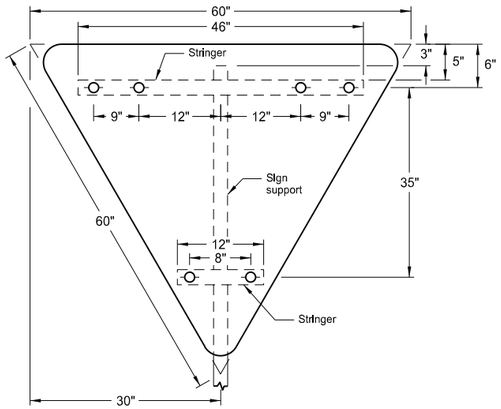

1 Post

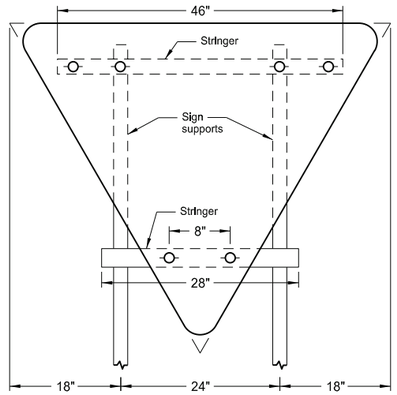

2 Posts

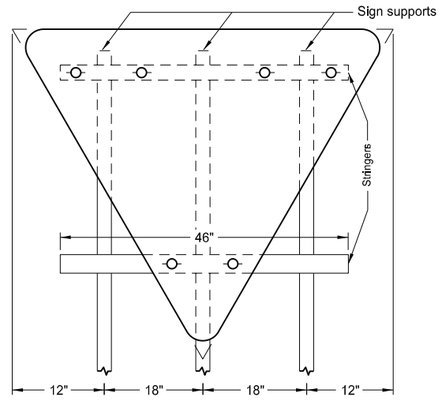


3 Posts

Assembly No. 6


Notes:

1. Use 0.100 inch minimum thickness sign backing material.
2. Use 1½" x 1½" perforated square tube stringers.
3. Punch holes round for ⅜" bolt.




1 Post

Assembly No. 7




1 Post

Assembly No. 8

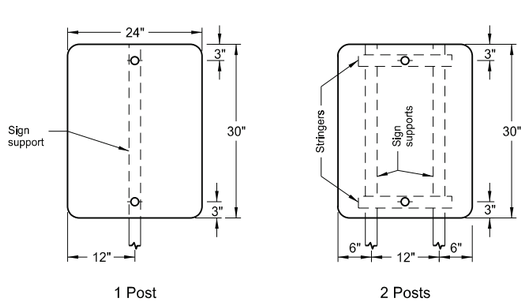


1 Post 2 Posts


Assembly No. 9



1 Post




2 Posts




3 Posts


Assembly No. 10

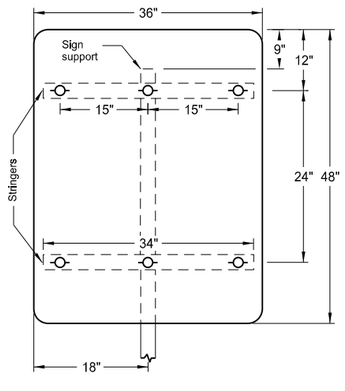

1 Post



2 Posts

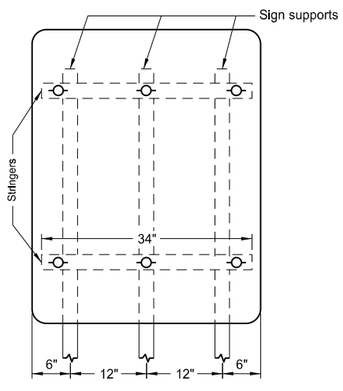

3 Posts

Assembly No. 11


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
8-30-18	Updated notes to active voice.
8-30-19	New Design Engineer PE Stamp.
8-06-24	Electronic Stamp/Signature.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/06/24


DocuSign Envelope ID: BCB8FF2A-083E-48A1-8BCC-2D048B980E67

PUNCHING, STRINGER, AND SUPPORT LOCATION DETAILS FOR REGULATORY, WARNING AND GUIDE BIKE ROUTE SIGNS




1 Post

Assembly No. 100




1 Post

Assembly No. 101

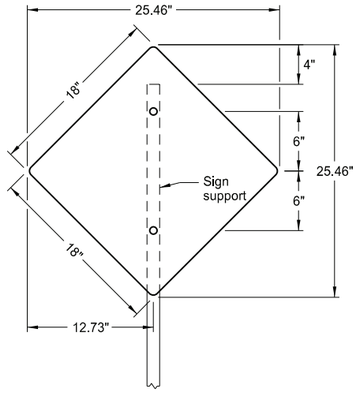


1 Post


Assembly No. 102

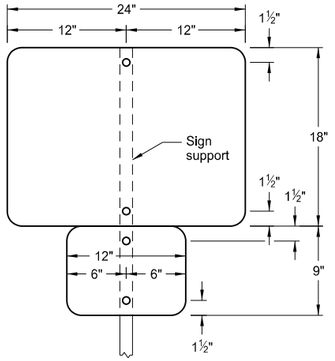

1 Post


Assembly No. 103






1 Post
back to back

Assembly No. 104

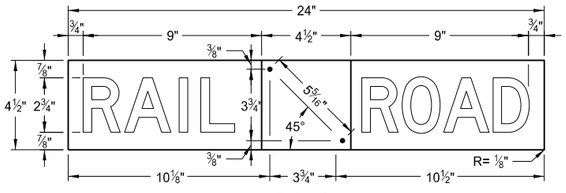


R15-1-24

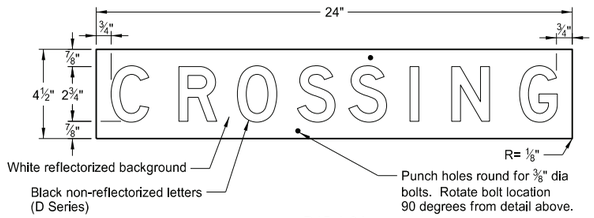


R15-1-24

Railroad Crossing Sign Details




1 Post


Assembly No. 106




1 Post

Assembly No. 107

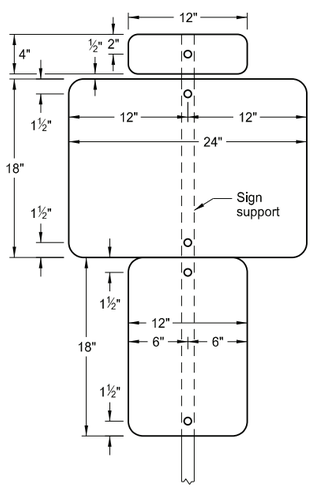


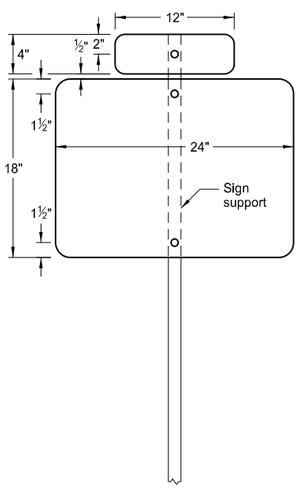

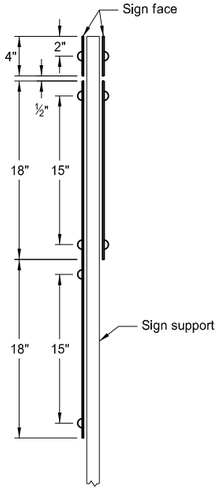

1 Post
back to back

Assembly No. 105

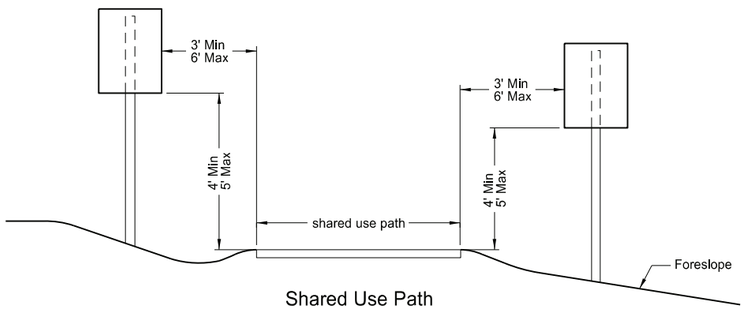

Shared Use Path

Bicycle - Pedestrian Path

Notes:

1. Use 0.100 inch minimum thickness sign backing material.

2. Punch holes round for ⅜" bolt.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-22-12	
REVISIONS	
DATE	CHANGE
9-18-15	Revised Title Name.
8-30-18	Updated notes to active voice.
9-04-19	New Design Engineer PE Stamp.
8-07-24	Electronic Stamp/Signature.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/07/24

DocuSign Envelope ID: C3490446-F65D-4226-AC76-79FBB84E9BA5

911 SIGN SUPPORT INFORMATION AND SIGN DETAILS

D-754-86


POST INFORMATION FOR VARIOUS SIGN CONFIGURATIONS


ASSEMBLY NUMBER	STREET NAME SIGN SIZE	VERTICAL CLEARANCE	MAXIMUM POST LENGTH	NUMBER OF POSTS	SUPPORT SIZE	SLEEVE LENGTH (A)			SLEEVE SIZE	ANCHOR			BREAKAWAY
						1st	2nd	3rd		NUMBER	LENGTH	SIZE	
	Inches	LF	LF			LF	LF	LF			LF		
Special Assembly 1	48"x15"	7	14.5	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	54"x15"	7	16.1	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	60"x15"	7	18.9	1	2.25 x 2.25 12 ga	2.6			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	66"x15"	7	15.8	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	72"x15"	7	14.6	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	78"x15"	7	17.6	2	2.5 x 2.5 12 ga					2	4.0	3 x 3 7 ga	2
	84"x15"	7	15.8	2	2.25 x 2.25 12 ga					2	4.0	2.5 x 2.5 12 ga	
	90"x15"	7	15.3	2	2.5 x 2.5 12 ga					2	4.0	3 x 3 7 ga	2
	96"x15"	7	17.4	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	48"x12"	7	17.5	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	54"x12"	7	15.2	1	2.25 x 2.25 12 ga					1	4.0	2.5 x 2.5 12 ga	
	60"x12"	7	14.2	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	66"x12"	7	15.9	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	72"x12"	7	14.7	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	78"x12"	7	15.7	2	2 x 2 12 ga					2	4.0	2.25 x 2.25 12 ga	
	84"x12"	7	15.6	2	2.25 x 2.25 12 ga					2	4.0	2.5 x 2.5 12 ga	
	90"x12"	7	18.6	2	2.5 x 2.5 12 ga					2	4.0	3 x 3 7 ga	2
	96"x12"	7	17.5	2	2.5 x 2.5 12 ga					2	4.0	3 x 3 7 ga	2
	24"x12"	5	20.3	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	30"x12"	5	16.4	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	36"x12"	5	13.8	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	42"x12"	5	14.7	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	48"x12"	5	12.9	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	54"x12"	5	15.2	1	2.25 x 2.25 12 ga					1	4.0	2.5 x 2.5 12 ga	
	60"x12"	5	13.8	1	2.25 x 2.25 12 ga					1	4.0	2.5 x 2.5 12 ga	
	24"x9"	5	24.1	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	30"x9"	5	21	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	36"x9"	5	17.3	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	42"x9"	5	15.4	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	48"x9"	5	13.5	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	54"x9"	5	14.8	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
	60"x9"	5	13.3	1	2 x 2 12 ga					1	4.0	2.25 x 2.25 12 ga	
Special Assembly 2	24"x12"	5	17.2	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	30"x12"	5	16.3	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	36"x12"	5	15.4	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	42"x12"	5	14.6	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	48"x12"	5	15.2	1	2.25 x 2.25 12 ga	4.5			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	54"x12"	5	20.6	1	2.5 x 2.5 10 ga	1.5			2.19 x 2.19 10 ga	1	4.0	3 x 3 7 ga	1
	60"x12"	5	16.7	1	2.5 x 2.5 12 ga	3.9			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	24"x9"	5	15.2	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	30"x9"	5	14.4	1	2.5 x 2.5 12 ga					1	4.0	3 x 3 7 ga	
	36"x9"	5	16.4	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	42"x9"	5	15.8	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	48"x9"	5	14.4	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	54"x9"	5	15.1	1	2.25 x 2.25 12 ga	4.2			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	60"x9"	5	14.5	1	2.25 x 2.25 12 ga	4.7			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1


POST INFORMATION FOR VARIOUS SIGN CONFIGURATIONS


ASSEMBLY NUMBER	STREET NAME SIGN SIZE	VERTICAL CLEARANCE	MAXIMUM POST LENGTH	NUMBER OF POSTS	SUPPORT SIZE	SLEEVE LENGTH (A)			SLEEVE SIZE	ANCHOR			BREAKAWAY
						1st	2nd	3rd		NUMBER	LENGTH	SIZE	
	Inches	LF	LF			LF	LF	LF			LF		
Special Assembly 3	24"x12"	5	16.2	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	30"x12"	5	15.3	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	36"x12"	5	15.9	1	2.25 x 2.25 12 ga	4.3			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	42"x12"	5	15.2	1	2.25 x 2.25 12 ga	4.8			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	48"x12"	5	15.2	1	2.5 x 2.5 12 ga	5			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	54"x12"	5	20.6	1	2.5 x 2.5 10 ga	1.9			2.19 x 2.19 10 ga	1	4.0	3 x 3 7 ga	1
	60"x12"	5	16	1	2.5 x 2.5 12 ga	4.7			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	24"x9"	5	16.8	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	30"x9"	5	16.1	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	36"x9"	5	15.4	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	42"x9"	5	14.9	1	2.5 x 2.5 10 ga					1	4.0	3 x 3 7 ga	1
	48"x9"	5	15.7	1	2.25 x 2.25 12 ga	4.2			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	54"x9"	5	14.9	1	2.5 x 2.5 12 ga	4.8			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	60"x9"	5	20.5	1	2.5 x 2.5 10 ga	1.6			2.19 x 2.19 10 ga	1	4.0	3 x 3 7 ga	1
Special Assembly 4	24"x12"	5	15.1	1	2.25 x 2.25 12 ga	4.8			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	30"x12"	5	15.1	1	2.5 x 2.5 12 ga	5			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	36"x12"	5	17.4	1	2.5 x 2.5 12 ga	3.6			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	42"x12"	5	16.8	1	2.5 x 2.5 12 ga	4.1			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	48"x12"	5	16.1	1	2.5 x 2.5 12 ga	4.5			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	54"x12"	5	15.5	1	2.5 x 2.5 12 ga	4.9			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	60"x12"	5	16.7	1	2.5 x 2.5 10 ga	4.2			2.19 x 2.19 10 ga	1	4.0	3 x 3 7 ga	1
	24"x9"	5	15.5	1	2.25 x 2.25 12 ga	4.2			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	30"x9"	5	15	1	2.25 x 2.25 12 ga	4.5			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	36"x9"	5	14.5	1	2.25 x 2.25 12 ga	4.8			2 x 2 12 ga	1	4.0	3 x 3 7 ga	1
	42"x9"	5	14.7	1	2.5 x 2.5 12 ga	4.9			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	48"x9"	5	17.2	1	2.5 x 2.5 12 ga	3.5			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	54"x9"	5	15.8	1	2.5 x 2.5 12 ga	4.4			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
	60"x9"	5	15.3	1	2.5 x 2.5 12 ga	4.7			2.25 x 2.25 12 ga	1	4.0	3 x 3 7 ga	1
Special Assembly 5	24"x12"	5	17.1	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	30"x12"	5	16.7	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	36"x12"	5	17.7	2	2.25 x 2.25 12 ga	4	4.5		2 x 2 12 ga	2	4.0	3 x 3 7 ga	2
	42"x12"	5	17.3	2	2.25 x 2.25 12 ga	4.3	4.8		2 x 2 12 ga	2	4.0	3 x 3 7 ga	2
	48"x12"	5	16.8	2	2.25 x 2.25 12 ga	4.5	5		2 x 2 12 ga	2	4.0	3 x 3 7 ga	2
	54"x12"	5	16.5	2	2.25 x 2.25 12 ga	4.8	5.3		2 x 2 12 ga	2	4.0	3 x 3 7 ga	2
	60"x12"	5	17.5	3	2.5 x 2.5 12 ga					3	4.0	3 x 3 7 ga	3
	24"x9"	5	17.3	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	30"x9"	5	17	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	36"x9"	5	16.6	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	42"x9"	5	16.3	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	48"x9"	5	16	2	2.5 x 2.5 10 ga					2	4.0	3 x 3 7 ga	2
	54"x9"	5	17.1	2	2.25 x 2.25 12 ga	4	4.6		2 x 2 12 ga	2	4.0	3 x 3 7 ga	2
	60"x9"	5	16.8	2	2.25 x 2.25 12 ga	4.2	4.8		2 x 2 12 ga	2	4.0	3 x 3 7 ga	2

(A) The sleeve length shown is for the maximum post length. The required sleeve length is the "sleeve length" minus the difference between the "maximum post length" and the post length required in the field.

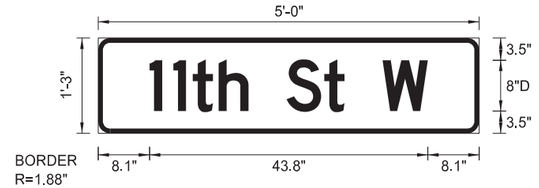

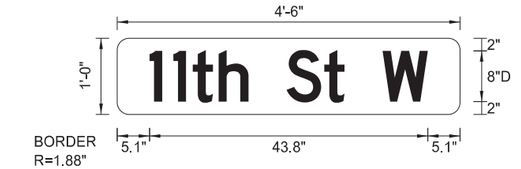

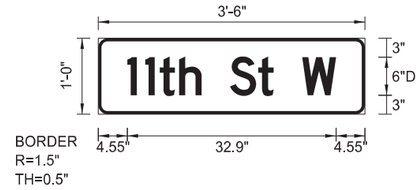

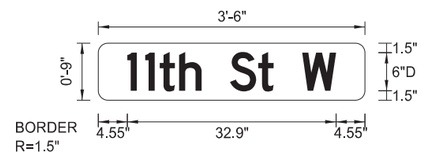

Notes:
Use 6 inch legend except on multi-lane divided roads with speeds of 45 mph or greater.
On divided multi-lane roadways, do not place 911 signs on top of stop sign.

When installing signs on existing supports, check support and sleeve size to determine if they meet table requirements. Measure maximum post length from ground to top of street name sign. If calculated support length is greater than maximum post length shown, recalculate support size.

See Standard Drawing D-754-87 for sign punching, stringer and support location details.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

10-3-13

REVISIONS

DATE	CHANGE
7-18-14	Revised street name sign layouts.
8-30-18	Revised tables, lettering, & signs and updated notes to active voice.
9-05-19	New Design Engineer PE Stamp.
8-08-24	Electronic Stamp/Signature.


KIRK J. HOFFA
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/08/24


DocuSign Envelope ID: F823D7A4-83CC-4936-ABE1-378FF7682B3C

Pavement Marking Message Details


D-762-1

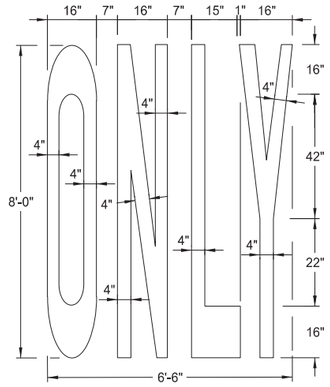


22 S. F.

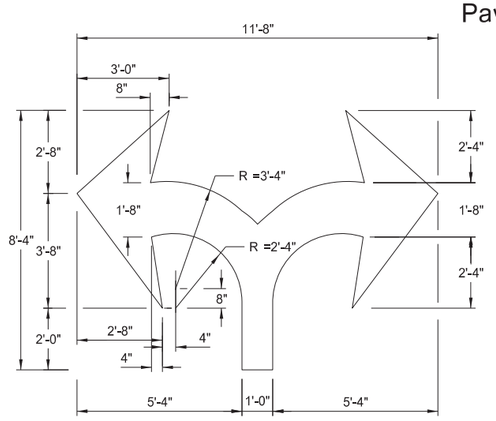


29 S. F.




12 S. F.



16 S. F.

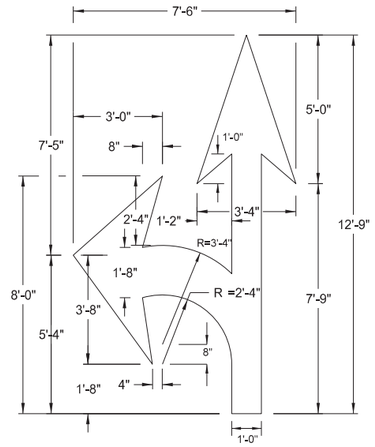


27 S. F.




41 S. F.


Note: Rotate merge arrow 20° from edge of roadway.




4 S. F.



22 S. F.

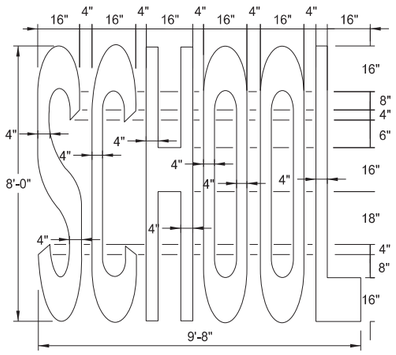


34.5 S. F.

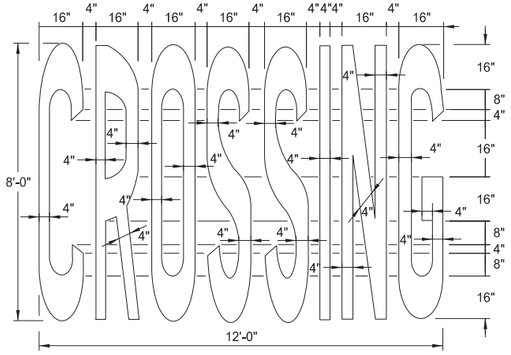


46 S. F.

Speed Limit	Chevron Width	Chevron Spacing 45° to Traffic
0-25 mph	8"	5'
30-40 mph	8"	15'
45 mph and above	12"	25'

Chevron Crosshatching Table




Centerline Pavement Marking Skip Spacing Detail

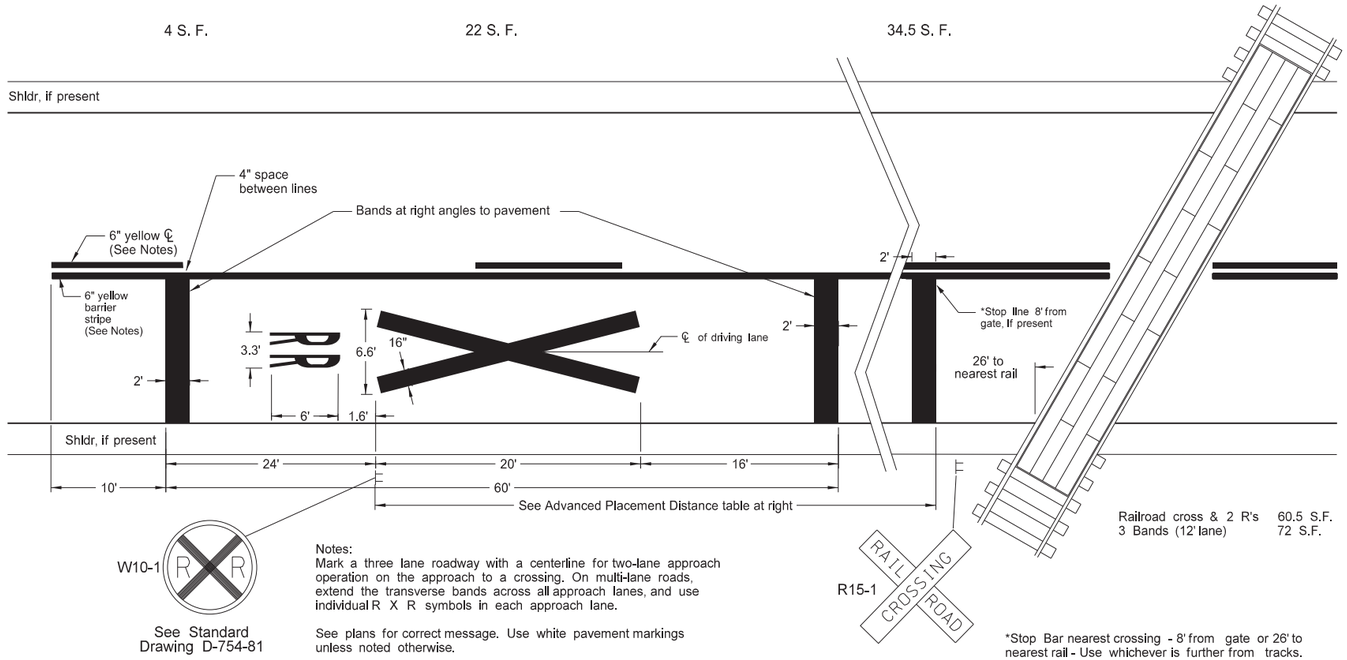

Notes:
Mark a three lane roadway with a centerline for two-lane approach operation on the approach to a crossing. On multi-lane roads, extend the transverse bands across all approach lanes, and use individual R X R symbols in each approach lane.

See plans for correct message. Use white pavement markings unless noted otherwise.

Advance Placement Distance for Railroad Warning Signs	
Posted or 85th Percentile Speed	Advance Distance
20 mph	min. 100 ft
25 mph	min. 100 ft
30 mph	min. 100 ft
35 mph	min. 100 ft
40 mph	125 ft
45 mph	175 ft
50 mph	250 ft
55 mph	325 ft
60 mph	400 ft
65 mph	475 ft
70 mph	550 ft

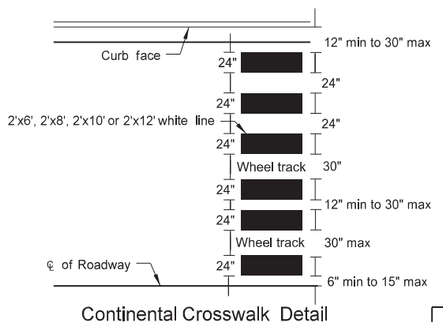

Continental Crosswalk Detail

NOTES:

1. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
2. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40 mph.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

12-6-11

REVISIONS

DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
01-28-2020	Revised min Stop Bar distance to rail.
11-22-2023	Revised pavement marking widths.

KIRK J. HOFFMANN REGISTERED PROFESSIONAL PE-4683 11/22/23 ENGINEER NORTH DAKOTA