Docusign Envelope ID: A6CF88C2-9926-4F0F-9FF7-CF6914194501

DESIGN DATA				
Traffic	Average Daily			
Current 2024	Pass: 1,396	Trucks: 414	Total: 1,810	
Preventive Maintenance				

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	24717	1	1


NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION


NH-6-002(155)318

Nelson and Grand Forks County
Petersburg E to 1.4 Miles W of JCT ND 18 - EB
Concrete Pavement Repair, Grinding,
Mill & Overlay Turn Lanes

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	7/1/2025
Supplemental Specifications	NONE

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
NH-6-002(155)318	17.155	10.286

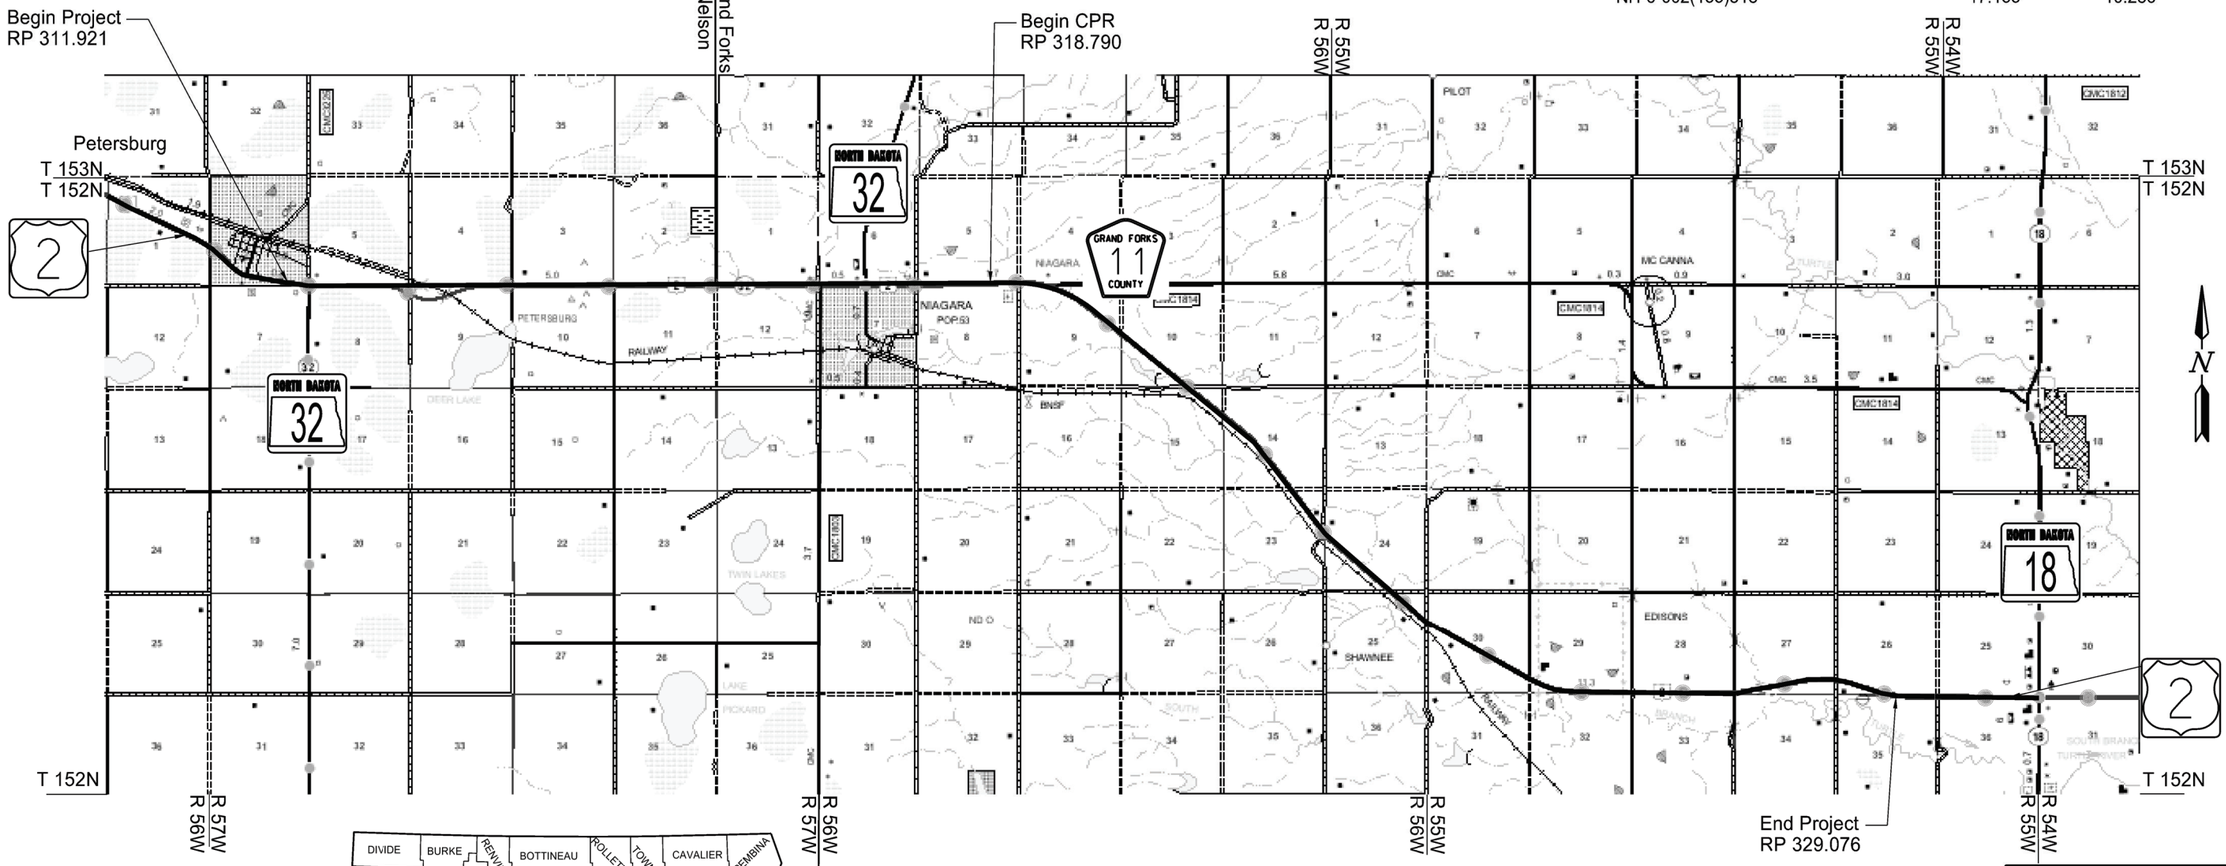

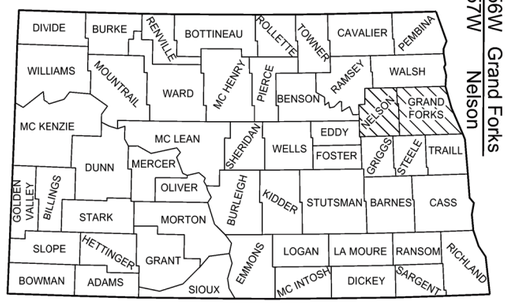

STATE COUNTY MAP

DESIGNER
Brian Ward
DESIGNER
Adam Gorecki
DESIGNER
Konrad Casler

ND DEPARTMENT OF TRANSPORTATION
GRAND FORKS DISTRICT

3/05/26

GRAND FORKS DISTRICT

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/04/26
NORTH DAKOTA

2/11/2026 5:59:21 AM agorecki R:\project\60002318.155\District\Sheets\001TS_Title\Files\Working copy\001TD_001_Title.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	2	1

TABLE OF CONTENTS

PLAN SECTIONS

Section	Page(s)	Description
1	1 - 1	Title Sheet
2	1 - 1	Table of Contents
4	1 - 1	Scope of Work
6	1 - 1	Notes
8	1 - 1	Quantities
10	1 - 1	Basis of Estimate
11	1 - 5	Data Tables
20	1 - 3	General Details
30	1 - 1	Typical Sections
90	1 - 3	Paving Layouts
100	1 - 2	Work Zone Traffic Control
120	1 - 3	Pavement Marking


LIST OF STANDARD DRAWINGS

Number	Description
D-101-1, 2,3,4	NDDOT Abbreviations
D-101-10	NDDOT Utility Company and Organization Abbreviations
D-101-20, 21	Line Styles
D-101-30, 31,32,33	Symbols
D-550-2	Longitudinal Joint Details
D-550-3	Transverse Contraction Joint Details
D-704-2	Traffic Control For Coring Of Hot Bituminous Pavement
D-704-7	Breakaway Systems For Construction Zone Signs - Perforated Tube
D-704-8	Breakaway Systems For Construction Zone Signs - U-Channel Post
D-704-9	Construction Sign Details - Terminal And Guide Signs
D-704-10	Construction Sign Details - Regulatory Signs
D-704-11, 11A	Construction Sign Details - Warning Signs
D-704-13	Barricade And Channelizing Device Details
D-704-14	Construction Sign Punching And Mounting Details
D-704-15	Road Closure Layouts
D-704-20	Terminal And Seal Coat Sign Layouts
D-704-22	Construction Truck And Temporary Detour Layouts
D-704-26	Miscellaneous Sign Layouts
D-704-27	Mobile Operation (Pavement Marking)
D-704-34, 34A	Sign Layout For One Lane Closure
D-704-50	Portable Sign Support Assembly
D-762-1	Pavement Marking Message Details
D-762-4	Pavement Marking
D-762-5	Pavement Marking for Standard 90 Degree Flared Intersection-(No Center Left Turn Lane on Major Road)
D-762-11	Short-Term Pavement Marking

SPECIAL PROVISIONS

Number	Description
SP 330(25)	Commercial Grade Asphalt

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	4	1

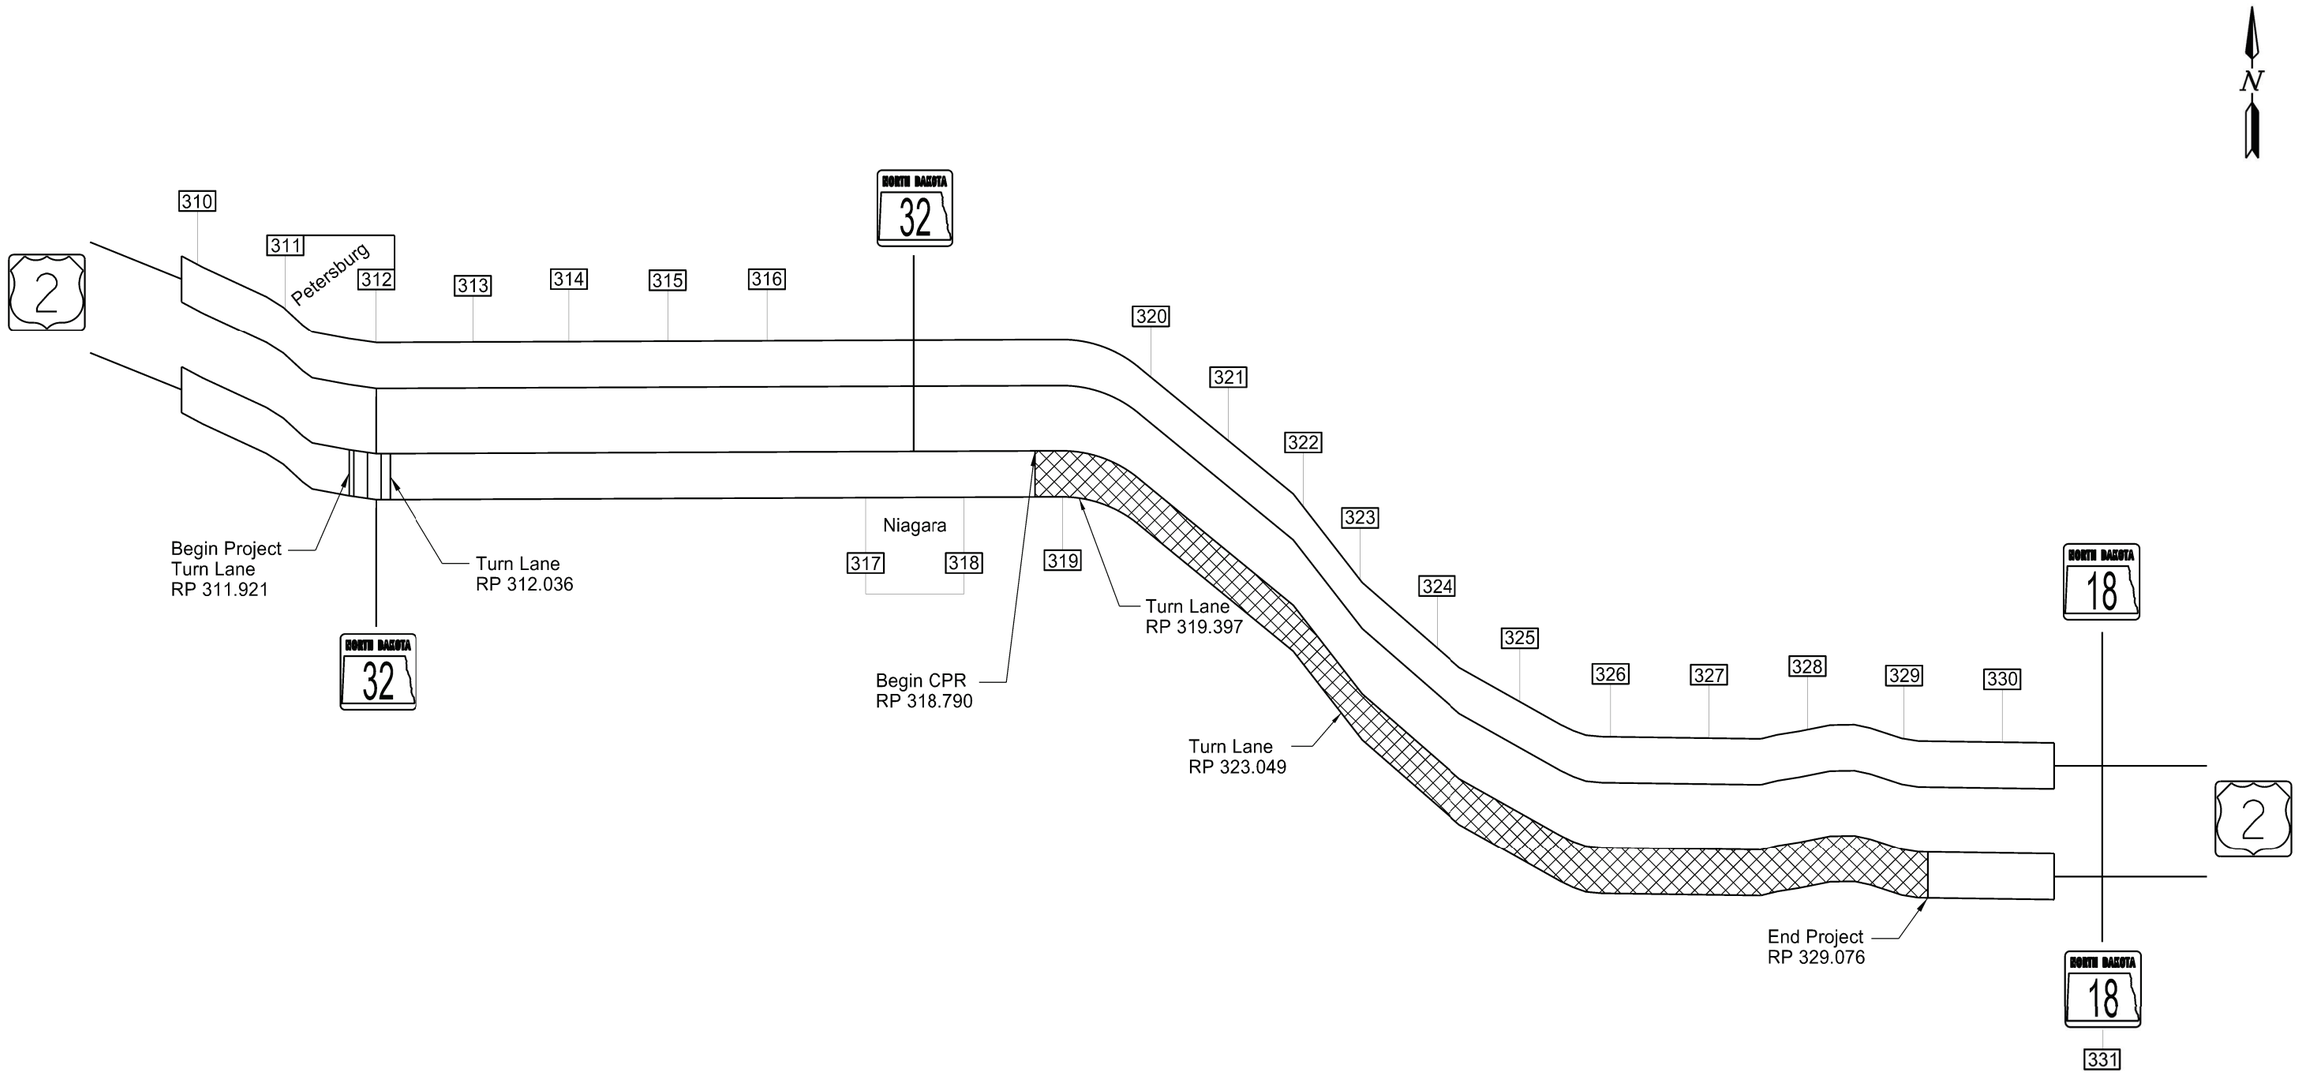

Scope of Work

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/26/2026 7:50:14 AM agorecki R:\project\60002318.155\District\Sheets\004SW_Scope\Files\Working Copy\004SW_001_Scope (2).dgn

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-002(155)318	6	1

NOTES

100-P01 COORDINATION OF PROJECTS: Another project in the vicinity of this project is under contract during the 2026 construction season. This project H-6-002(158)317 and is a CHIP SEAL on US 2, Niagara E to near Arvilla Westbound.

105-P01 PAVEMENT SWEEPING: Sweep paved areas that were used by construction traffic before opening these areas to public traffic.

411-P01 TEMPORARY ASPHALT WEDGES: Place temporary asphalt wedges longitudinally along milled turn lanes to allow smooth passage of vehicles. Millings may be used instead of asphalt for all wedges. Include all costs associated with labor, materials, and equipment for the installation, maintenance and removal of the wedges in the contract price bid for “MILLING PAVEMENT SURFACE”

570-P01 CONCRETE PAVEMENT REPAIR: An additional 25% has been added to the quantities for “CONCRETE PAVEMENT REPAIR-FULL DEPTH,” to be used as directed by the Engineer.

570-P02 SPALL REPAIR – PARTIAL DEPTH: 200 SF of “SPALL REPAIR – PARTIAL DEPTH” has been provided to be used as directed as the Engineer.

570-PO3 PCC PAVEMENT GRINDING: Complete a 1’ feather pass on the driving lane shoulder and passing Lane as noted in section 10 sheet 1. This note overrides Spec 570.04 D.2.

704-100 TRAFFIC CONTROL SUPERVISOR: Provide a Traffic Control Supervisor.

704-P01 TRAFFIC CONTROL FOR CONCRETE PAVEMENT REPAIR: Provide traffic control consisting of a temporary lane closure and flagging.

The maximum work zone length is six miles. The length of the work zone includes the daily construction area plus the longitudinal buffer space and does not include tapers. Lane closures may be less than six miles in length, dependent upon the overall length of the project.

Two work zones are allowed but must be separated by a three mile gap. The gap is considered the distance between the sign reestablishing the normal speed limit after the first work zone and the reduced speed ahead sign for second lane closure.

Place vertical panels on the roadway centerline adjacent to full depth repair areas. Place panels every 10 feet and use a minimum of two panels at each full depth repair area.

Place Type I barricades in front of each full depth removal area. Position barricades so that they do not encroach into the traffic lane.

The traffic control device list is based on two lane closures whose combined total is 8 miles or less, and the following list:

1. Standard D-704-20, Type G;
2. Standard D-704-34 – quantities include {50} delineator drums for approaches;
3. Standard D-704-34A.

The Department will pay for delineator drums used for approach access within the work zone at the contract unit price.

Quantities of Type I barricades and vertical panels are based on {269} full depth repair locations and 2 vertical panels per location. The Department will pay for additional barricades and panels at the contract unit price for the devices.

Remove or shorten lane closures after new concrete has reached the required strength for opening to traffic specified in Section 570.04 A.1.b, "Full Depth Repairs".

762-050 PAVEMENT MARKING: If the Engineer and Contractor agree, plan quantity will be used as the measurement for payment for pavement markings.

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-002(155)318	8	1

SPEC	CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
103	0100	CONTRACT BOND	L SUM	0.8	0.8
411	0105	MILLING PAVEMENT SURFACE	SY	5,089	5,089
430	0500	COMMERCIAL GRADE HOT MIX ASPHALT	TON	576	576
430	1000	CORED SAMPLE	EA	4	4
570	0210	PCC PAVEMENT GRINDING	SY	84,484	84,484
570	0649	CONCRETE PAVEMENT REPAIR-FULL DEPTH	SY	5,300	5,300
570	1512	SPALL REPAIR-PARTIAL DEPTH	SF	200	200
702	0100	MOBILIZATION	L SUM	0.8	0.8
704	0100	FLAGGING	MHR	840	840
704	1000	TRAFFIC CONTROL SIGNS	UNIT	1,808	1,808
704	1050	TYPE I BARRICADE	EA	50	50
704	1052	TYPE III BARRICADE	EA	24	24
704	1060	DELINEATOR DRUMS	EA	50	50
704	1067	TUBULAR MARKERS	EA	321	321
704	1080	STACKABLE VERTICAL PANELS	EA	100	100
704	1087	SEQUENCING ARROW PANEL-TYPE C	EA	1	1
706	0500	AGGREGATE LABORATORY	EA	0.5	0.5
762	0103	PVMT MK PAINTED-MESSAGE	SF	192	192
762	0131	EPOXY PVMT MK 6IN LINE-GROOVED	LF	13,578	13,578
762	0432	SHORT TERM 6IN LINE-TYPE NR	LF	13,578	13,578
762	1106	PVMT MK PAINTED 6IN LINE	LF	109,699	109,699
762	1112	PVMT MK PAINTED 12IN LINE	LF	2,270	2,270
762	1124	PVMT MK PAINTED 24IN LINE	LF	12	12

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-002(155)318	10	1

BASIS OF ESTIMATE

Estimated Quantities			
Description	Unit	Basis	Units
ND 32 Left and Right Turn Lanes RP 311.921 to RP 312.036			
Milling Pavement Surface	SY	See Sec. 90, Sheet 1	1,318
Commercial Grade Asphalt	Ton		147
Left Turn Lane and Median McCanna RP 319.213 to RP 319.397			
Milling Pavement Surface	SY	See Sec. 90, Sheet 2	1,664
Commercial Grade Asphalt	Ton		185
Right Turn Lane and Median Crossover Kolding Dam RP 322.860 to Rp 323.049			
Milling Pavement Surface	SY	See Sec. 90, Sheet 3	2,107
Commercial Grade Asphalt	Ton		235

HMA Cored Samples				
Specification	**Basis of Estimate**	**Location**	**Quantity**	**Unit**
SP 330(25) B, "Engineer's Acceptance Testing	**1 Core per location**	**ND 32 Right and Left Turn Lanes**	2	E/A
		McCanna Left Turn Lane	1	E/A
		Kolding Dam Right Turn Lane & Median	1	E/A
SSP 4 Longitudinal Joint Density			N/A	E/A
430.04.I.2.b(2) " Pavement Thickness Determination Cores"			N/A	E/A
			4	E/A

RP 318.790 to RP 329.076	Unit	Basis	Units
PCC Pavement Grinding: 12' driving lane with 1' feather pass on each side Total 14'	SY		84,483

Temporary Pavement Marking		
Location	Basis	Quantity
US 2 Mainline - RP 318.790 to RP 329.076		
Short Term 6IN Line - Type NR - *30' Skip 10' Line*	1,320 LF/Mi	13,578 LF

Permanent Pavement Marking		
Location	Basis	Quantity
US 2 Mainline - RP 318.790 To 329.076		
Epoxy Pvmt Mk 6IN White Line-Grooved - *30' Skip 10' Line*	1,320 LF/Mi	13,578 LF
Pvmt Mk Painted 6IN White Edge Line	5,280 LF/Mi	54,311 LF
Pvmt Mk Painted 6IN Yellow Median Edge Line	5,280 LF/Mi	54,311 LF
ND 32 Right and Left Turn Lanes RP 311.921		
Pvmt Mk Painted 6IN Yellow Edge Line	See Sec 120 Sheet 1	628 LF
Pvmt Mk Painted 6IN White Edge Line		449 LF
Pvmt Mk Painted 12IN White Channel Line		783 LF
Pvmt Mk Painted - Message White Turn Arrows		96 SF
McCanna Left Turn Lane RP 319.213		
Pvmt Mk Painted 12IN White Channel Line	See Sec 120 Sheet 2	845 LF
Pvmt Mk Painted - Message White Turn Arrows		48 SF
Kolding Dam Turn Lane and Median RP 322.860		
Pvmt Mk Painted 12IN White Channel Line	See Sec 120 Sheet 3	642 LF
Pvmt Mk Painted 24IN White - Stop Bar		12 LF
Pvmt Mk Painted - Message White Turn Arrows		48 SF
Total 6IN Pavement Marking		
	White	Yellow
Short Term 6IN – Type NR	13,578 LF	
Pvmt Mk Painted 6IN Line	54,760 LF	54,939 LF
Epoxy Pvmt Mk 6IN White Line-Grooved	13,578 LF	

Estimated Flagging Hours		
Operation	Basis	Flagging
Concrete Pavment Repair	*30 Days x 12Hr/Day x 2 Flaggers*	720 MHR
PCC Pavement Grinding	*10 Days x 12Hr/Day x 1 Flagger*	120 MHR

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	11	1

STATION			Panel Location	7IN CONCRETE PAVEMENT REPAIR- FULL DEPTH - EB RP 318.790 to RP 329.076						
				DIMENSIONS			CONCRETE PAVEMENT REPAIR - FULL DEPTH	Saw Concrete*	Smooth Bar*	Comments
				L	x	W				
				FT	x	FT	SY	LF	Bars	
95	+	15	A, B, C, D	7	x	27	**21.0**	68	24	
96	+	50	B	42	x	7	**32.7**	98	6	
96	+	78	A	14	x	7	**10.9**	42	6	
99	+	64	A, B	7	x	13	**10.1**	40	12	
99	+	71	C	7	x	7	**5.4**	28	6	
101	+	28	B	28	x	7	**21.8**	70	6	
101	+	42	C, D	14	x	14	**21.8**	56	12	
102	+	47	C	49	x	7	**38.1**	112	6	
107	+	10	D	7	x	7	**5.4**	28	6	
110	+	38	A, B, C, D	7	x	27	**21.0**	68	24	
111	+	29	A, B	7	x	13	**10.1**	40	12	
112	+	57	C	14	x	7	**10.9**	42	6	
113	+	75	B	21	x	7	**16.3**	56	6	
141	+	61	D	7	x	7	**5.4**	28	6	
144	+	97	C	7	x	7	**5.4**	28	6	
153	+	32	A, B	7	x	13	**10.1**	40	12	
154	+	20	A, B	7	x	13	**10.1**	40	12	
162	+	25	A, B, C, D	7	x	27	**21.0**	68	24	
162	+	60	A, B	7	x	13	**10.1**	40	12	
163	+	37	A, B, C, D	7	x	27	**21.0**	68	24	
163	+	51	D	28	x	7	**21.8**	70	6	
164	+	15	A, B, C, D	7	x	27	**21.0**	68	24	
164	+	79	A, B, C, D	7	x	27	**21.0**	68	24	
165	+	13	C, D	14	x	14	**21.8**	56	12	
165	+	34	A, B, C, D	7	x	27	**21.0**	68	24	
168	+	72	A, B	7	x	13	**10.1**	40	12	
170	+	72	C	7	x	7	**5.4**	28	6	
171	+	15	B	7	x	6.5	**5.1**	27	6	
174	+	44	B	7	x	6.5	**5.1**	27	6	
175	+	63	B	7	x	6.5	**5.1**	27	6	
176	+	33	C, D	14	x	14	**21.8**	56	12	
177	+	72	B	14	x	6.5	**10.1**	41	6	
178	+	56	A	14	x	6.5	**10.1**	41	6	
179	+	53	A, B	7	x	13	**10.1**	40	12	
181	+	50	B	14	x	6.5	**10.1**	41	6	
184	+	79	C, D	7	x	14	**10.9**	42	12	
196	+	7	D	7	x	7	**5.4**	28	6	
197	+	12	A, B, C, D	7	x	27	**21.0**	68	24	
199	+	65	C	14	x	7	**10.9**	42	6	
201	+	90	A, B	7	x	13	**10.1**	40	12	
203	+	42	A, B, C, D	7	x	27	**21.0**	68	24	
204	+	5	D	14	x	7	**10.9**	42	6	
204	+	40	D	7	x	7	**5.4**	28	6	
205	+	3	A, B	7	x	13	**10.1**	40	12	
206	+	1	A, B, C, D	7	x	27	**21.0**	68	24	
211	+	76	A	7	x	6.5	**5.1**	27	6	
211	+	90	D	7	x	7	**5.4**	28	6	
213	+	83	C	28	x	7	**21.8**	70	6	
224	+	69	B	35	x	6.5	**25.3**	83	6	
227	+	0	C	70	x	7	**54.4**	154	6	
227	+	70	A	7	x	6.5	**5.1**	27	6	
233	+	44	A	7	x	6.5	**5.1**	27	6	
233	+	51	C	7	x	7	**5.4**	28	6	
234	+	69	D	7	x	7	**5.4**	28	6	
237	+	90	A	7	x	7	**5.4**	28	6	

CPR Data Tables

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/02/26
NORTH DAKOTA

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	11	2

STATION	Panel Location	7IN CONCRETE PAVEMENT REPAIR- FULL DEPTH - EB RP 318.790 to RP 329.076						
		DIMENSIONS			CONCRETE PAVEMENT REPAIR - FULL DEPTH -	Saw Concrete*	Smooth Bar *	Comments
		L	x	W				
		FT	x	FT	SY	LF	EA	
239 + 25	A, B, C, D	14	x	27	**42.0**	82	24	
240 + 87	A	14	x	6.5	**10.1**	41	6	
242 + 70	A, B	7	x	13	**10.1**	40	12	
244 + 38	A, B, C, D	7	x	27	**21.0**	68	24	
244 + 95	B	7	x	6.5	**5.1**	27	6	
252 + 78	C	7	x	7	**5.4**	28	6	
262 + 90	D	7	x	7	**5.4**	28	6	
270 + 58	D	7	x	7	**5.4**	28	6	
275 + 45	C	21	x	7	**16.3**	56	6	
283 + 78	D	7	x	7	**5.4**	28	6	
285 + 20	D	7	x	7	**5.4**	28	6	
290 + 4	D	7	x	7	**5.4**	28	6	
291 + 21	A, B, C, D	35	x	27	**105.0**	124	24	
295 + 50	B	7	x	6.5	**5.1**	27	6	
298 + 86	B	21	x	6.5	**15.2**	55	6	
299 + 28	A, B, C, D	7	x	27	**21.0**	68	24	
300 + 60	A, B, C, D	7	x	27	**21.0**	68	24	
302 + 65	A, B, C, D	7	x	27	**21.0**	68	24	
303 + 27	A, B	7	x	13	**10.1**	40	12	
304 + 32	A	21	x	6.5	**15.2**	55	6	
305 + 64	A, B	7	x	13	**10.1**	40	12	
306 + 86	A, B, C, D	7	x	27	**21.0**	68	24	
311 + 51	A, B, C, D	7	x	27	**21.0**	68	24	
313 + 4	A, B, C, D	7	x	27	**21.0**	68	24	
315 + 35	D	7	x	7	**5.4**	28	6	
315 + 80	C	14	x	7	**10.9**	42	6	
318 + 61	D	7	x	7	**5.4**	28	6	
319 + 44	B	7	x	6.5	**5.1**	27	6	
320 + 42	D	7	x	7	**5.4**	28	6	
320 + 55	B	35	x	6.5	**25.3**	83	6	
322 + 50	D	14	x	7	**10.9**	42	6	
323 + 0	A, B, C, D	14	x	27	**42.0**	82	24	
328 + 83	A, B, C, D	7	x	27	**21.0**	68	24	
332 + 95	D	7	x	7	**5.4**	28	6	
333 + 37	D	7	x	7	**5.4**	28	6	
334 + 56	A, B, C, D	7	x	27	**21.0**	68	24	
334 + 63	C	14	x	7	**10.9**	42	6	
336 + 17	C	7	x	7	**5.4**	28	6	
339 + 44	C, D	7	x	14	**10.9**	42	12	
340 + 58	C	21	x	7	**16.3**	56	6	
343 + 54	B	14	x	6.5	**10.1**	41	6	
348 + 1	D	7	x	7	**5.4**	28	6	
349 + 27	C	7	x	7	**5.4**	28	6	
349 + 55	B, C	14	x	13.5	**21.0**	55	12	
351 + 53	C	14	x	7	**10.9**	42	6	
352 + 30	D	7	x	7	**5.4**	28	6	
367 + 73	D	7	x	7	**5.4**	28	6	
368 + 36	C	7	x	7	**5.4**	28	6	
374 + 58	D	7	x	7	**5.4**	28	6	
375 + 0	D	7	x	7	**5.4**	28	6	
375 + 28	D	7	x	7	**5.4**	28	6	
376 + 23	D	7	x	7	**5.4**	28	6	
376 + 95	C	7	x	7	**5.4**	28	6	
377 + 23	C	7	x	7	**5.4**	28	6	

CPR Data Tables

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/02/26
NORTH DAKOTA

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-002(155)318	11	3

STATION	Panel Location	DIMENSIONS			CONCRETE PAVEMENT REPAIR - FULL DEPTH -	Saw Concrete*	Smooth Bar*	Comments
		L	x	W				
		FT	x	FT	SY	LF	EA	
379 + 60	C, D	7	x	14	**10.9**	42	12	
381 + 27	C, D	7	x	14	**10.9**	42	12	
381 + 68	C	7	x	7	**5.4**	28	6	
383 + 0	C	7	x	7	**5.4**	28	6	
387 + 75	A, B	7	x	13	**10.1**	40	12	
388 + 38	A, B	7	x	13	**10.1**	40	12	
389 + 8	D	7	x	7	**5.4**	28	6	
390 + 49	B	7	x	6.5	**5.1**	27	6	
391 + 62	B	7	x	6.5	**5.1**	27	6	
392 + 10	C	7	x	7	**5.4**	28	6	
399 + 72	C	14	x	7	**10.9**	42	6	
412 + 93	C, D	14	x	14	**21.8**	56	12	
413 + 42	C, D	14	x	14	**21.8**	56	12	
420 + 55	C	7	x	7	**5.4**	28	6	
420 + 85	C	7	x	7	**5.4**	28	6	
423 + 86	B	7	x	6.5	**5.1**	27	6	
433 + 75	C	28	x	7	**21.8**	70	6	
435 + 22	C	14	x	7	**10.9**	42	6	
435 + 64	B	63	x	6.5	**45.5**	139	6	
438 + 31	A, B, C, D	7	x	27	**21.0**	68	24	
438 + 81	A, B, C, D	7	x	27	**21.0**	68	24	
439 + 78	C	91	x	7	**70.8**	196	6	
442 + 79	C, D	7	x	14	**10.9**	42	12	
443 + 70	A, B, C, D	7	x	27	**21.0**	68	24	
445 + 30	C, D	7	x	14	**10.9**	42	12	
445 + 70	A, B, C, D	7	x	27	**21.0**	68	24	
446 + 20	D	7	x	7	**5.4**	28	6	
448 + 50	A, B, C, D	7	x	27	**21.0**	68	24	
449 + 7	C, D	7	x	14	**10.9**	42	12	
449 + 56	A, B, C, D	7	x	27	**21.0**	68	24	
450 + 96	C	14	x	7	**10.9**	42	6	
453 + 78	B	7	x	6.5	**5.1**	27	6	
456 + 2	A, B, C, D	7	x	27	**21.0**	68	24	
456 + 78	A, B, C, D	7	x	27	**21.0**	68	24	
456 + 85	C	49	x	7	**38.1**	112	6	
457 + 83	A, B, C, D	7	x	27	**21.0**	68	24	
458 + 45	A, B, C, D	7	x	27	**21.0**	68	24	
460 + 42	D	7	x	7	**5.4**	28	6	
461 + 66	D	7	x	7	**5.4**	28	6	
462 + 15	A, B, C, D	7	x	27	**21.0**	68	24	
462 + 57	C, D	7	x	14	**10.9**	42	12	
462 + 63	A, B, C, D	7	x	27	**21.0**	68	24	
462 + 70	C	14	x	7	**10.9**	42	6	
463 + 14	A, B, C, D	7	x	27	**21.0**	68	24	
464 + 46	D	7	x	7	**5.4**	28	6	
464 + 88	A, B, C, D	7	x	27	**21.0**	68	24	
467 + 89	A, B, C, D	7	x	27	**21.0**	68	24	
468 + 24	A, B, C, D	7	x	27	**21.0**	68	24	
469 + 36	A, B, C, D	7	x	27	**21.0**	68	24	
474 + 77	A, B, C, D	7	x	27	**21.0**	68	24	
485 + 31	A, B, C, D	7	x	27	**21.0**	68	24	
497 + 81	A, B, C, D	7	x	27	**21.0**	68	24	
499 + 20	C	14	x	7	**10.9**	42	6	
499 + 34	B	7	x	6.5	**5.1**	27	6	
499 + 41	A, B, C, D	7	x	6.5	**5.1**	27	6	

7IN CONCRETE PAVEMENT REPAIR- FULL DEPTH - EB RP 318.790 to RP 329.076

CPR Data Tables

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/02/26
NORTH DAKOTA

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-002(155)318	11	4

STATION			Panel Location	7IN CONCRETE PAVEMENT REPAIR- FULL DEPTH - EB RP 318.790 to RP 329.076						
				DIMENSIONS			CONCRETE PAVEMENT REPAIR - FULL DEPTH -	Saw Concrete*	Smooth Bar*	Comments
				L	x	W				
				FT	x	FT	SY	LF	EA	
499	+	90	A, B, C, D	7	x	27	**21.0**	68	24	
510	+	26	A, B, C, D	7	x	27	**21.0**	68	24	
515	+	10	A, B, C, D	7	x	27	**21.0**	68	24	
520	+	22	A, B, C, D	7	x	27	**21.0**	68	24	
521	+	85	A, B, C, D	7	x	27	**21.0**	68	24	
524	+	8	A, B, C, D	7	x	27	**21.0**	68	24	
527	+	45	A, B, C, D	7	x	27	**21.0**	68	24	
528	+	6	A, B, C, D	7	x	27	**21.0**	68	24	
529	+	5	A, B, C, D	7	x	27	**21.0**	68	24	
529	+	53	A, B, C, D	7	x	27	**21.0**	68	24	
533	+	26	A, B, C, D	7	x	27	**21.0**	68	24	
533	+	67	C, D	7	x	14	**10.9**	42	12	
534	+	23	C	7	x	7	**5.4**	28	6	
534	+	37	A, B	7	x	13	**10.1**	40	12	
534	+	51	C	21	x	7	**16.3**	56	6	
535	+	36	A, B	7	x	13	**10.1**	40	12	
535	+	85	A, B, C, D	7	x	27	**21.0**	68	24	
535	+	99	D	7	x	7	**5.4**	28	6	
537	+	46	A, B, C, D	7	x	27	**21.0**	68	24	
540	+	18	C	28	x	7	**21.8**	70	6	
540	+	46	B	35	x	6.5	**25.3**	83	6	
540	+	60	D	7	x	7	**5.4**	28	6	
541	+	10	C, D	7	x	14	**10.9**	42	12	
543	+	64	A, B, C, D	7	x	27	**21.0**	68	24	
544	+	83	A, B, C, D	7	x	27	**21.0**	68	24	
545	+	30	A, B, C, D	7	x	27	**21.0**	68	24	
546	+	0	A, B, C, D	7	x	27	**21.0**	68	24	
546	+	95	A, B, C, D	7	x	27	**21.0**	68	24	
546	+	26	C, D	7	x	14	**10.9**	42	12	
548	+	61	A, B, C, D	14	x	27	**42.0**	82	24	
548	+	17	A, B, C, D	7	x	27	**21.0**	68	24	
549	+	59	C	21	x	7	**16.3**	56	6	
549	+	80	A, B, C, D	7	x	27	**21.0**	68	24	
549	+	87	C	14	x	7	**10.9**	42	6	
550	+	44	C	14	x	7	**10.9**	42	6	
551	+	13	A, B	7	x	13	**10.1**	40	12	
551	+	70	D	7	x	7	**5.4**	28	6	
552	+	60	A, B, C, D	7	x	27	**21.0**	68	24	
553	+	16	A, B, C, D	7	x	27	**21.0**	68	24	
554	+	30	D	7	x	7	**5.4**	28	6	
555	+	19	A, B, C, D	7	x	27	**21.0**	68	24	
557	+	30	A, B, C, D	7	x	27	**21.0**	68	24	
557	+	37	C	35	x	7	**27.2**	84	6	
559	+	32	A, B, C, D	7	x	27	**21.0**	68	24	
560	+	87	A, B, C, D	7	x	27	**21.0**	68	24	
561	+	29	A, B, C, D	7	x	27	**21.0**	68	24	
561	+	70	A, B, C, D	7	x	27	**21.0**	68	24	
562	+	67	A, B, C, D	7	x	27	**21.0**	68	24	
563	+	23	A, B, C, D	7	x	27	**21.0**	68	24	
563	+	58	A, B, C, D	7	x	27	**21.0**	68	24	
564	+	0	A, B, C, D	7	x	27	**21.0**	68	24	
565	+	0	A, B	7	x	13	**10.1**	40	12	
565	+	14	C, D	7	x	14	**10.9**	42	12	
566	+	3	A, B	7	x	13	**10.1**	40	12	
566	+	39	A, B, C, D	7	x	27	**21.0**	68	24	

CPR Data Tables

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/02/26
NORTH DAKOTA

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-002(155)318	11	5

STATION			Panel Location	DIMENSIONS			CONCRETE PAVEMENT REPAIR - FULL DEPTH -	Saw Concrete*	Smooth Bar*	Comments
				L	x	W				
				FT	x	FT	SY	LF	EA	
568	+	69	A, B, C, D	7	x	27	**21.0**	68	24	
568	+	98	A, B	7	x	13	**10.1**	40	12	
569	+	53	A, B, C, D	7	x	27	**21.0**	68	24	
570	+	10	A, B, C, D	7	x	27	**21.0**	68	24	
570	+	38	A, B	7	x	13	**10.1**	40	12	
572	+	40	A, B, C, D	7	x	27	**21.0**	68	24	
574	+	3	A, B, C, D	7	x	27	**21.0**	68	24	
576	+	92	D	7	x	7	**5.4**	28	6	
577	+	18	A, B, C, D	7	x	27	**21.0**	68	24	
577	+	38	D	7	x	7	**5.4**	28	6	
577	+	92	A, B, C, D	7	x	27	**21.0**	68	24	
578	+	57	A, B	7	x	13	**10.1**	40	12	
579	+	7	C, D	7	x	14	**10.9**	42	12	
579	+	57	A, B, C, D	7	x	27	**21.0**	68	24	
587	+	73	C, D	7	x	14	**10.9**	42	12	
588	+	68	A, B, C, D	7	x	27	**21.0**	68	24	
590	+	55	A, B, C, D	7	x	27	**21.0**	68	24	
591	+	11	D	7	x	7	**5.4**	28	6	
592	+	50	A, B	7	x	13	**10.1**	40	12	
593	+	90	A, B, C, D	7	x	27	**21.0**	68	24	
594	+	90	D	7	x	7	**5.4**	28	6	
595	+	37	A, B, C, D	7	x	27	**21.0**	68	24	
596	+	0	A, B, C, D	7	x	27	**21.0**	68	24	
597	+	0	C, D	7	x	14	**10.9**	42	12	
598	+	34	A, B, C, D	7	x	27	**21.0**	68	24	
598	+	80	C, D	7	x	14	**10.9**	42	12	
600	+	49	A, B, C, D	7	x	27	**21.0**	68	24	
601	+	4	A, B, C, D	7	x	27	**21.0**	68	24	
603	+	20	D	7	x	7	**5.4**	28	6	
604	+	19	C	21	x	7	**16.3**	56	6	
604	+	88	C	7	x	7	**5.4**	28	6	
605	+	37	C	70	x	7	**54.4**	154	6	
606	+	42	A, B, C, D	7	x	27	**21.0**	68	24	
606	+	49	C	14	x	7	**10.9**	42	6	
607	+	34	C, D	7	x	14	**10.9**	42	12	
608	+	4	A, B, C, D	7	x	27	**21.0**	68	24	
609	+	2	A, B, C, D	7	x	27	**21.0**	68	24	
609	+	51	A, B, C, D	7	x	27	**21.0**	68	24	
614	+	27	A, B, C, D	7	x	27	**21.0**	68	24	
615	+	50	A, B, C, D	7	x	27	**21.0**	68	24	
622	+	65	A	7	x	6.5	**5.1**	27	6	
624	+	71	C, D	7	x	14	**10.9**	42	12	
625	+	46	A, B, C, D	7	x	27	**21.0**	68	24	
627	+	8	D	70	x	7	**54.4**	154	6	
627	+	78	A, B, C, D	7	x	27	**21.0**	68	24	
628	+	42	C, D	28	x	14	**43.6**	84	12	
628	+	70	A, B	7	x	13	**10.1**	40	12	
629	+	54	C	7	x	7	**5.4**	28	6	
631	+	52	D	7	x	7	**5.4**	28	6	
632	+	70	C, D	7	x	14	**10.9**	42	12	
634	+	92	A, B	14	x	13	**20.2**	54	12	
634	+	99	C	7	x	7	**5.4**	28	6	

Eastbound CPR Totals

	CONCRETE PAVEMENT REPAIR 8IN		
	CONCRETE PAVEMENT REPAIR - FULL DEPTH - DOWELED	*SAW CONCRETE	*SMOOTH DOWEL BARS
	SY	LF	EA
	4241	14310	3732
25%	5300	17888	4665


*Note: Saw Concrete and Smooth Dowel Bars will not be measured and paid for separately, but included in the Bid Item 570-0649

CPR Data Tables

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB


REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/02/26
NORTH DAKOTA

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	20	1

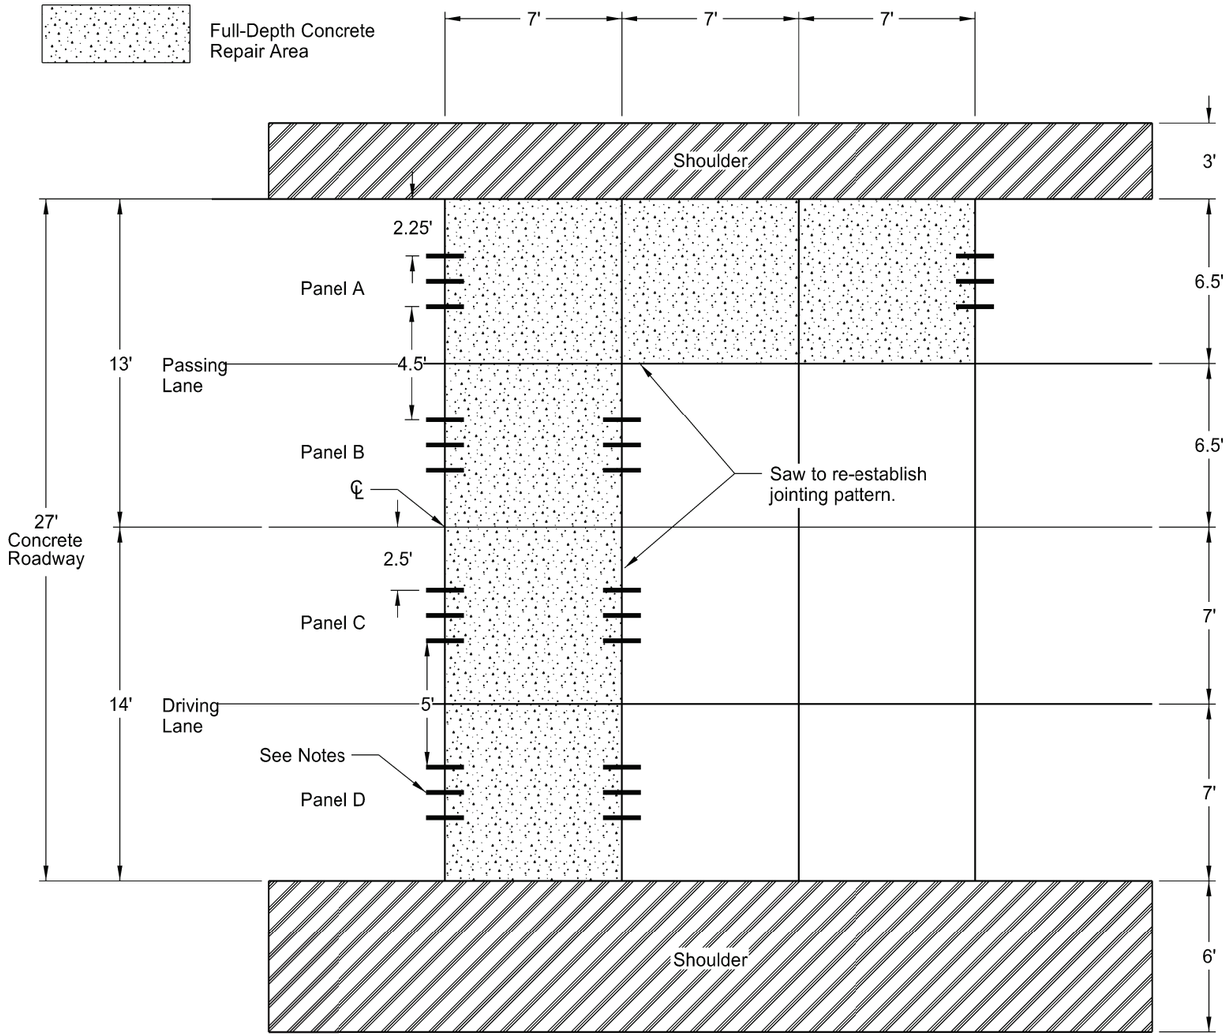


Notes:


1. Install a group of three (3) Smooth Dowel Bars on the leading and trailing edges of each panel's full depth repair.
2. Space the center of the outer Dowel Bars from the edge of the panel according to panel width: 2.25' for 6.5' panels (A/B) and 2.5' for 7' panels (C/D).
3. Align Dowel Bars parallel to the roadway centerline and pavement surface at vertical midpoint of slab.
4. Within each grouping, space Dowel Bars @ 12" C-C.
5. Utilize 1" x 18" smooth Dowel Bars.
6. Re-establish joints after repairs are completed. Saw and seal joints.
7. Include all necessary materials and labor to complete full-depth repair in the price bid for "CONCRETE PAVEMENT REPAIR - FULL DEPTH."

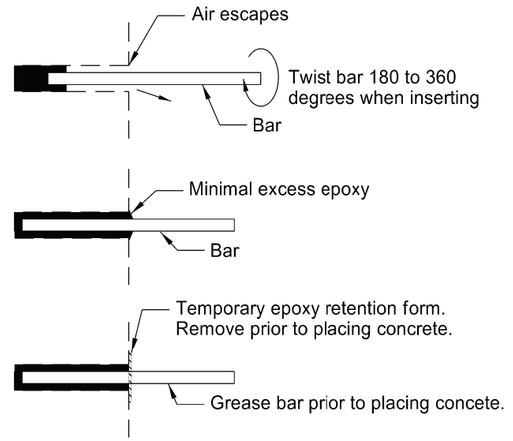


Epoxy and Bar installation
(Dowel or Tie Bars)

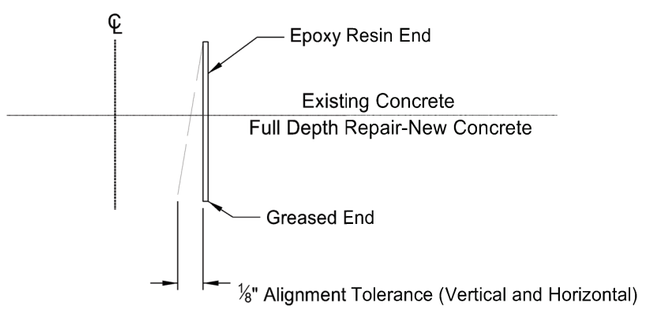

Dowel Alignment Tolerance

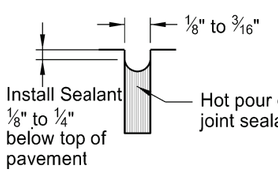

Joint Sealing Detail

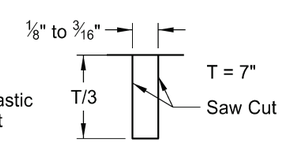


Joint Sawing Detail

Full-Depth Repair and Jointing Details

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB


REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	20	2

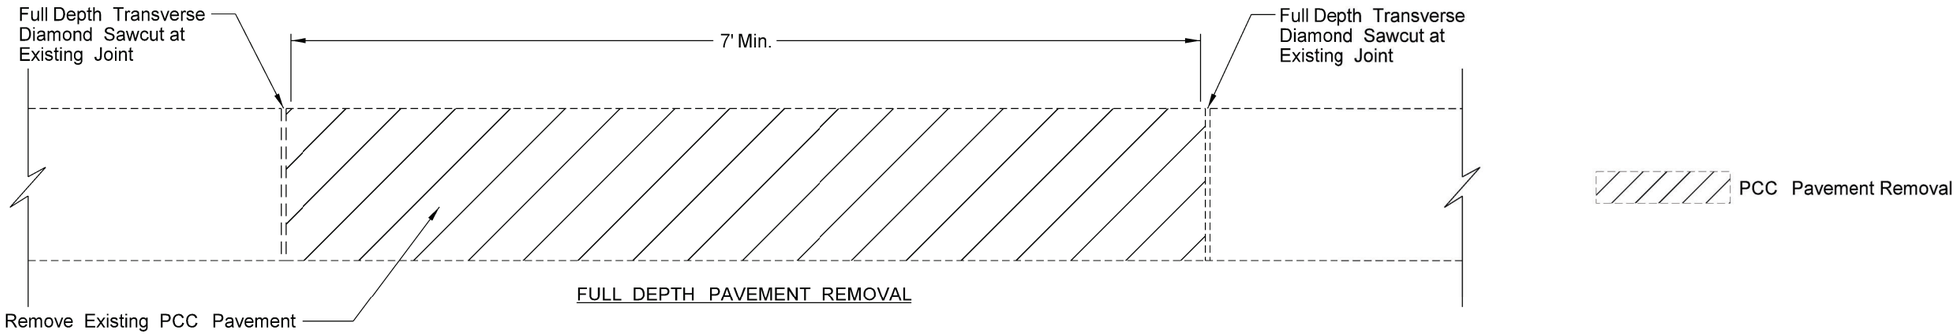

FULL DEPTH PAVEMENT REMOVAL

PCC Pavement Removal

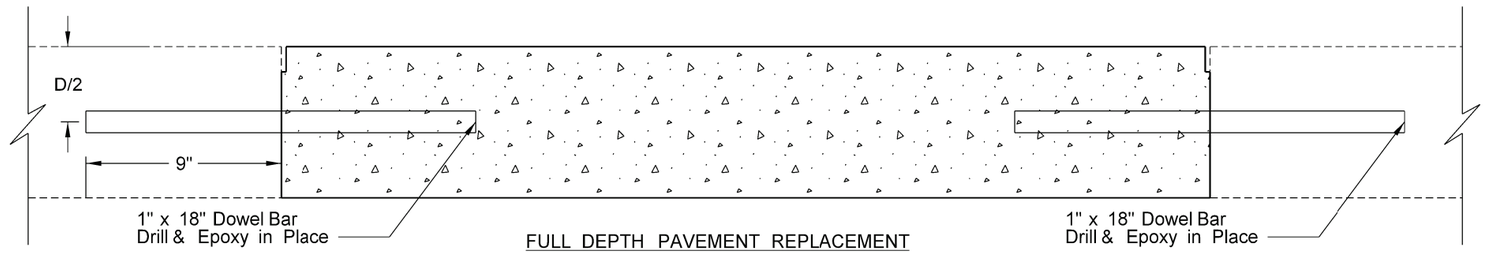

FULL DEPTH PAVEMENT REPLACEMENT

PCC Pavement Placement


Full Depth Repair Detail


CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA


2/27/2026 7:24:00 AM agorecki R:\project\60002318.155\District\Sheets\020GD_Details\Files\020GD_002_DJCP_CPR_FD.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	20	3

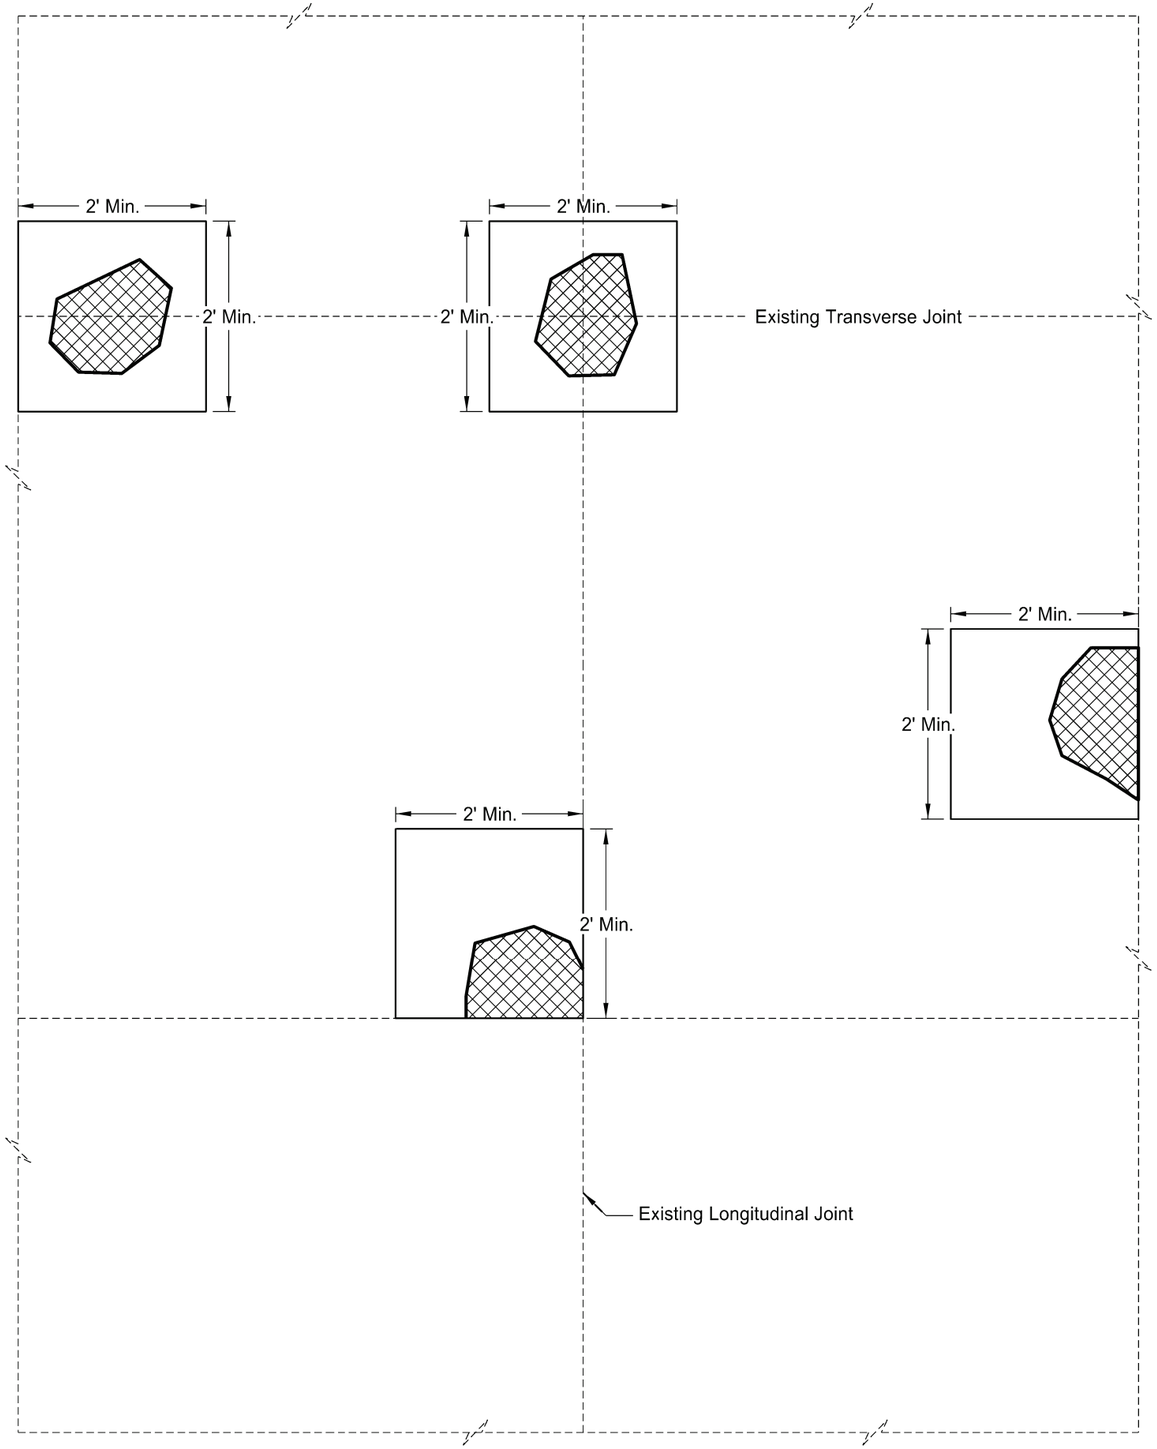


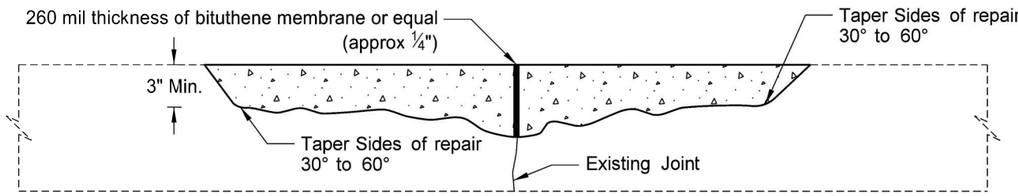

Cross Section - Repair Area (Milling)

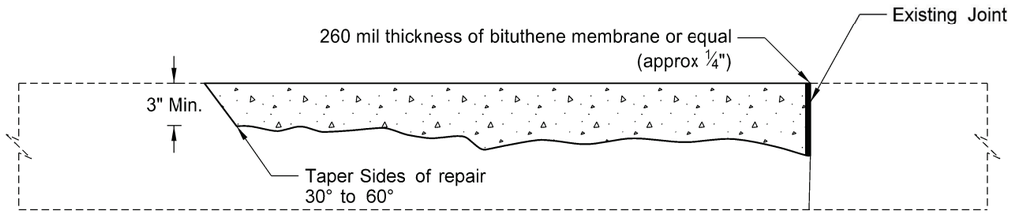

Cross Section - Repair Area (Milling)

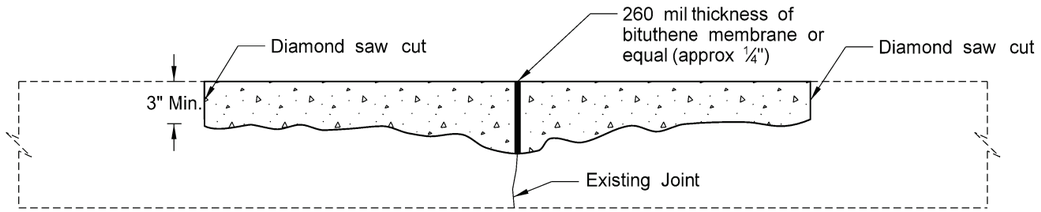

Cross Section - Repair Area (Sawing and Jackhammering)

Spall

Concrete Removal Area


Jointed Non-Reinforced PCC Pavement
Spall Repair Detail

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/27/2026 9:33:49 AM agorecki R:\project\60002318.155\District\Sheets\020GD_Details\Files\020GD_003_DJCP_SPALL_REPAIR.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	30	1

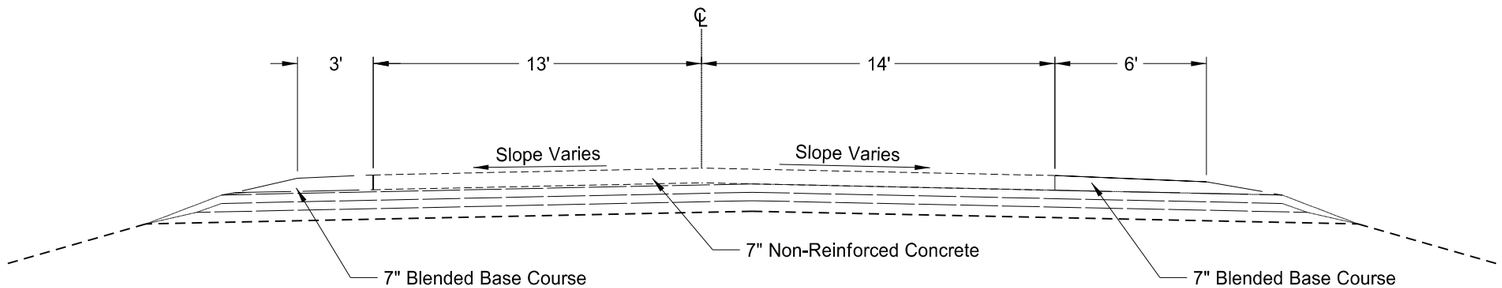

Typical Existing Section 1

Sta 92+00.88 to Sta 625+94.10


Typical Section

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/3/2026 1:39:14 PM bward R:\project\60002318.155\District\Sheets\030TP_Typicals\030TS_Typical Existing.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	90	1

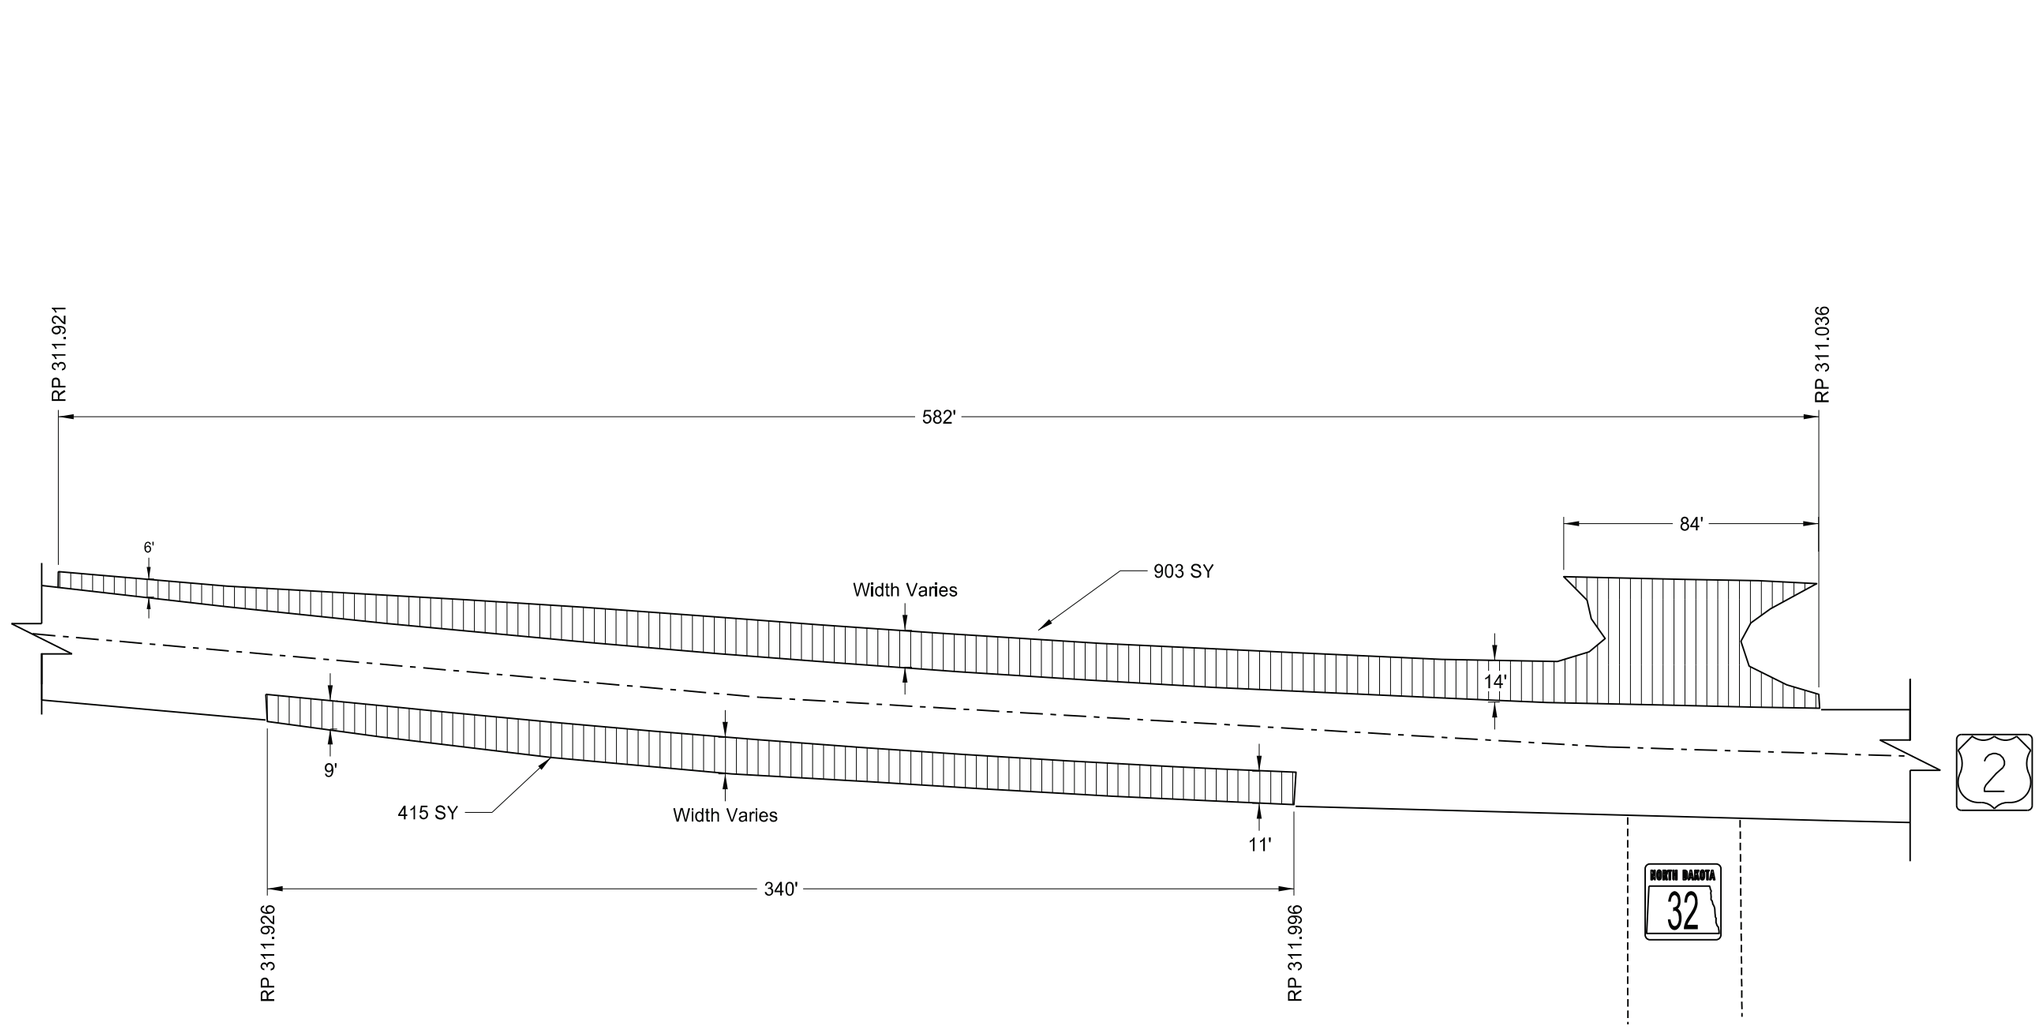

2" Milling and 2" HMA

Basis of Estimate


Milling Pavement Surface	1,318	SY
Commercial Grade Asphalt	148	Tons

ND 32 Turn Lanes and Median Cross-over

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	90	2

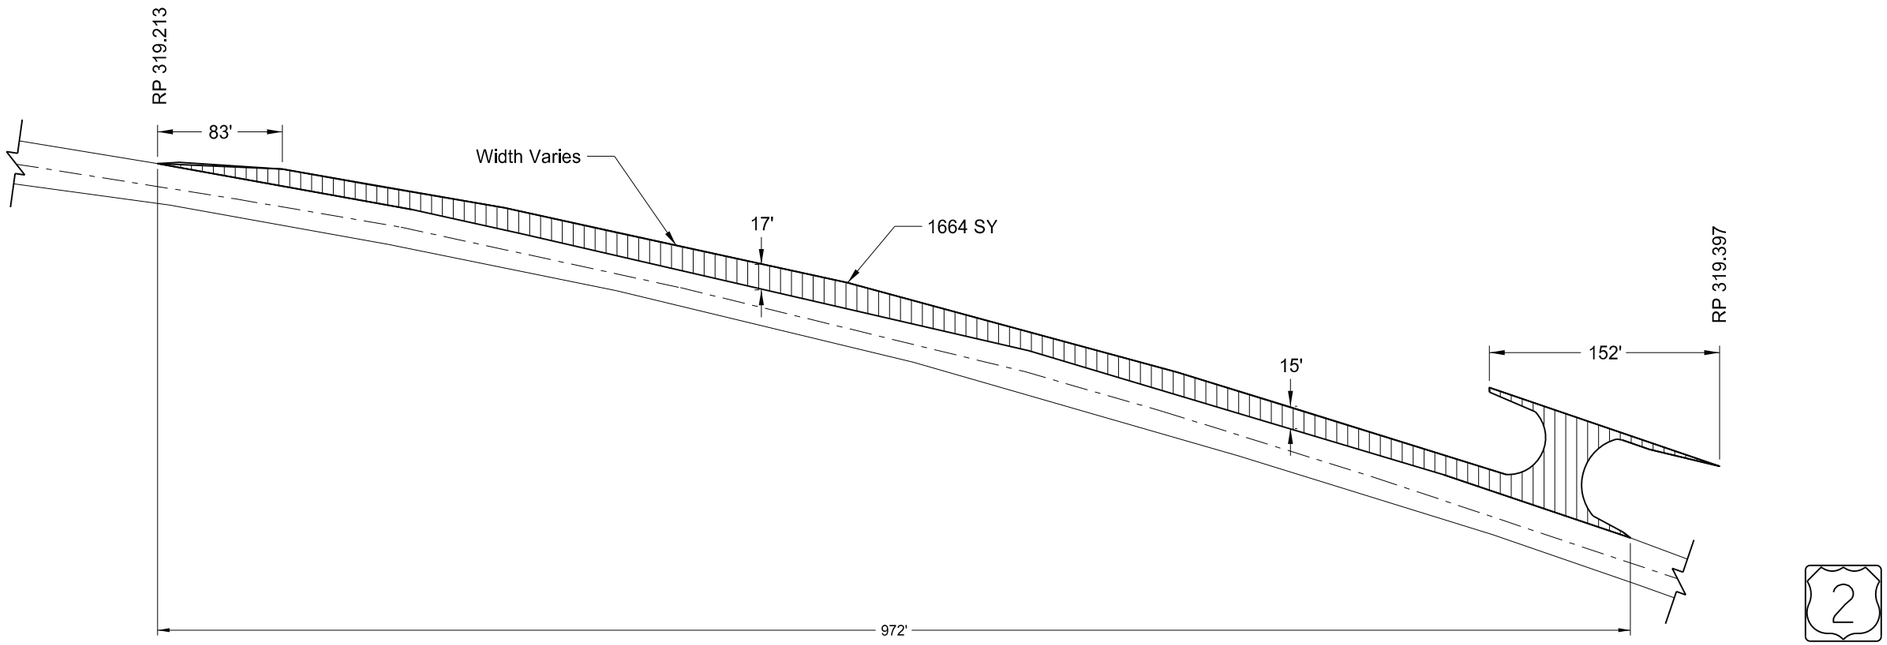

2" Mill and 2" HMA

Basis of Estimate

Milling Pavement Surface	1,664	SY
Commercial Grade Asphalt	185	Tons


LT Turn Lane McCanna

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 miles W of JCT 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/3/2026 12:11:11 PM bward R:\project\60002318.155\District\Sheets\090PL_Paving Layout\090PL_002_PavingLayout.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	90	3

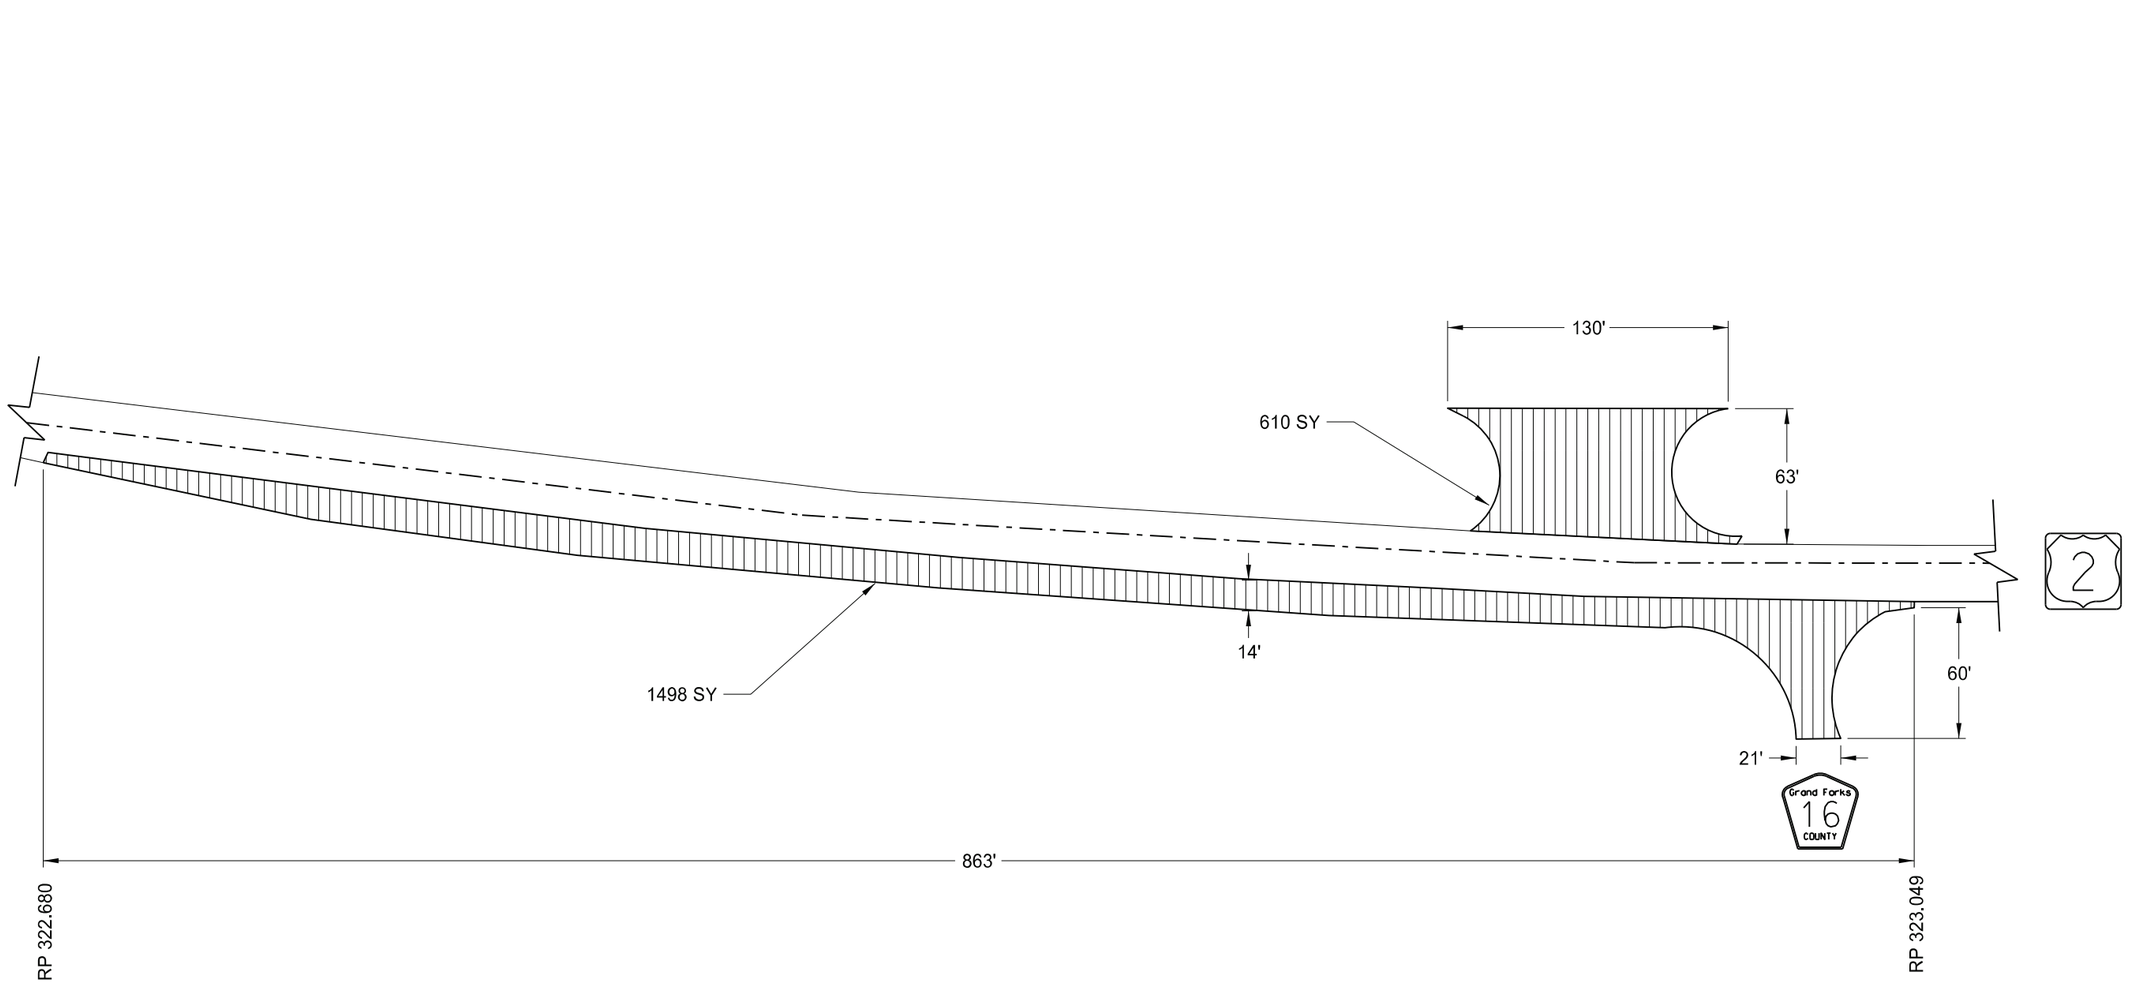

2" Milling and 2" HMA

Basis of Estimate

Milling Pavement Surface	2,108 SY
Commercial Grade Asphalt	235 Tons

Kolding Damn Turn Lane and Median

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/3/2026 12:18:51 PM bward R:\project\60002318.155\District\Sheets\090PL_Paving Layout\090PL_003_PavingLayout.dgn

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-6-002(155)318	100	1

SIGN NUMBER	SIGN SIZE	DESCRIPTION	AMOUNT REQUIRED	UNITS PER AMOUNT	UNITS SUB TOTAL
E5-1-48	48"x48"	EXIT GORE		35	
G20-1-60	**60"x24"**	**ROAD WORK NEXT __ MILES**	**5**	**28**	**140**
G20-1b-60	60"x24"	NO WORK IN PROGRESS (Sign and installation only)		18	
G20-2-48	**48"x24"**	**END ROAD WORK**	**4**	**26**	**104**
G20-4-36	36"x18"	PILOT CAR FOLLOW ME (Mounted to back of pilot car)		18	
G20-4b-36	36"x30"	WAIT FOR PILOT CAR		18	
G20-50a-72	72"x36"	ROAD WORK NEXT __ MILES RT & LT ARROWS		43	
G20-52a-72	**72"x24"**	**ROAD WORK NEXT __ MILES RT or LT ARROW**	**1**	**36**	**36**
G20-55-96	**96"x48"**	**SPEED LIMIT ENFORCED - MINIMUM FEE $150 WHEN WORKERS PRESENT**	**4**	**59**	**236**
M1-1-36	36"x36"	INTERSTATE ROUTE MARKER (Post and installation only)		11	
M1-4-24	24"x24"	U.S. ROUTE MARKER (Post and installation only)		10	
M1-5-24	24"x24"	STATE ROUTE MARKER (Post and installation only)		10	
M3-1-24	24"x12"	NORTH (Mounted on route marker post)		7	
M3-2-24	24"x12"	EAST (Mounted on route marker post)		7	
M3-3-24	24"x12"	SOUTH (Mounted on route marker post)		7	
M3-4-24	24"x12"	WEST (Mounted on route marker post)		7	
M4-8-24	24"x12"	DETOUR (Mounted on route marker post)		7	
M4-9-30	30"x24"	DETOUR ARROW RIGHT or LEFT/AHD AND RT or LT		15	
M4-10-48	48"x18"	DETOUR (INSIDE ARROW) RIGHT or LEFT (Mounted on barricade)		7	
M5-1-21	21"x15"	ADVANCE TURN ARROW RT or LT(Mounted on route marker post)		7	
M5-1-30	30"x21"	ADVANCE TURN ARROW RT or LT(Mounted on route marker post)		9	
M6-1-21	21"x15"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		7	
M6-1-30	30"x21"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		9	
M6-3-21	21"x15"	DIRECTIONAL ARROW UP (Mounted on route marker post)		7	
R1-1-48	48"x48"	STOP		32	
R1-2-60	60"x60"	YIELD		29	
R2-1-36	**36"x48"**	**SPEED LIMIT __ (Portable only)**	**4**	**30**	**120**
R2-1-48	**48"x60"**	**SPEED LIMIT __**	**4**	**39**	**156**
R2-1aP-24	**24"x18"**	**MINIMUM FEE $150 (Mounted on Speed Limit post)**	**4**	**10**	**40**
R3-2-48	48"x48"	NO LEFT TURN		35	
R4-1-48	**48"x60"**	**DO NOT PASS**	**4**	**39**	**156**
R4-7-48	48"x60"	KEEP RIGHT		39	
R5-1-48	48"x48"	DO NOT ENTER		35	
R6-1-54	54"x18"	ONE WAY RIGHT or LEFT (Mounted on STOP or DO NOT ENTER post)		14	
R7-1-12	12"x18"	NO PARKING ANY TIME		11	
R10-6-24	24"x36"	STOP HERE ON RED		16	
R11-2-48	48"x30"	ROAD CLOSED (Mounted on barricade)		12	
R11-2a-48	48"x30"	STREET CLOSED (Mounted on barricade)		12	
R11-3a-60	60"x30"	ROAD CLOSED __ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-3c-60	60"x30"	STREET CLOSED __ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-4a-60	60"x30"	STREET CLOSED TO THRU TRAFFIC (Mounted on barricade)		15	
W1-3-48	48"x48"	REVERSE TURN RIGHT or LEFT		35	
W1-4-48	**48"x48"**	**REVERSE CURVE RIGHT or LEFT**	**4**	**35**	**140**
W1-4b-48	48"x48"	TWO LANE REVERSE CURVE RIGHT or LEFT		35	
W1-6-48	48"x24"	ONE DIRECTION LARGE ARROW		26	
W3-1-48	48"x48"	STOP AHEAD		35	
W3-3-48	48"x48"	SIGNAL AHEAD		35	
W3-4-48	48"x48"	BE PREPARED TO STOP		35	
W3-5-48	**48"x48"**	**SPEED REDUCTION AHEAD**	**4**	**35**	**140**
W4-2-48	48"x48"	LANE ENDS RIGHT or LEFT		35	
W5-1-48	48"x48"	ROAD NARROWS		35	
W5-8-48	48"x48"	THRU TRAFFIC RIGHT LANE		35	
W5-9-48	48"x48"	ROAD WORK TRAFFIC ONLY DOWN & LT or RT ARROW		35	
W6-3-48	48"x48"	TWO WAY TRAFFIC		35	
W8-1-48	48"x48"	BUMP		35	
W8-3-48	48"x48"	PAVEMENT ENDS		35	
W8-7-48	48"x48"	LOOSE GRAVEL		35	
W8-11-48	48"x48"	UNEVEN LANES		35	
W8-12-48	48"x48"	NO CENTER LINE		35	
W8-17-48	48"x48"	SHOULDER DROP-OFF SYMBOL		35	
W8-53-48	48"x48"	TRUCKS ENTERING HIGHWAY		35	
W8-54-48	48"x48"	TRUCKS ENTERING AHEAD or __ FT or _ MILE		35	
W8-55-48	48"x48"	TRUCKS CROSSING AHEAD or __ FT or _ MILE		35	
W8-56-48	48"x48"	TRUCKS EXITING HIGHWAY		35	
W9-3a-48	48"x48"	CENTER LANE CLOSED SYMBOL		35	
W13-1P-30	30"x30"	__ MPH ADVISORY SPEED PLAQUE (Mounted on warning sign post)		14	
W14-3-64	64"x48"	NO PASSING ZONE		28	
W16-2P-30	30"x24"	__ FEET PLAQUE (Mounted on warning sign post)		10	
W20-1-48	**48"x48"**	**ROAD WORK AHEAD or _FT or _ MILE**	**4**	**35**	**140**
W20-2-48	48"x48"	DETOUR AHEAD or __FT or _MILE		35	
W20-3-48	48"x48"	ROAD or STREET CLOSED AHEAD or __ FT or _ MILE		35	
W20-4-48	48"x48"	ONE LANE ROAD AHEAD or __ FT or _ MILE		35	
W20-5-48	**48"x48"**	**RIGHT or CENTER or LEFT LANE CLOSED AHEAD or __ FT or _ MILE**	**4**	**35**	**140**
W20-7-48	**48"x48"**	**FLAGGER**	**3**	**35**	**105**
W20-8-18	**18"x18"**	**STOP - SLOW PADDLE Back to Back**	**3**	**5**	**15**
W20-52P-54	54"x12"	NEXT __ MILES (Mounted on warning sign post)		12	
W21-1-48	48"x48"	WORKERS		35	
W21-2-48	**48"x48"**	**FRESH OIL**	**4**	**35**	**140**
W21-3-48	48"x48"	ROAD MACHINERY AHEAD or __ FT or _ MILE		35	
W21-5-48	48"x48"	SHOULDER WORK		35	
W21-5a-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED		35	
W21-5b-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED AHEAD or __ FT or _ MILE		35	

SIGN NUMBER	SIGN SIZE	DESCRIPTION	AMOUNT REQUIRED	UNITS PER AMOUNT	UNITS SUB TOTAL
W21-6-48	48"x48"	SURVEY CREW		35	
W21-50-48	48"x48"	BRIDGE PAINTING AHEAD or __ FT		35	
W21-51-48	48"x48"	MATERIAL ON ROADWAY		35	
W21-52-48	48"x48"	PAVEMENT BREAKS		35	
W21-53-48	48"x48"	RUMBLE STRIPS AHEAD		35	
W22-8-48	48"x48"	FRESH OIL LOOSE ROCK		35	
W24-1-48	48"x48"	DOUBLE REVERSE CURVE		35	

SPECIAL SIGNS

SPEC & CODE			
704-1000	**TRAFFIC CONTROL SIGNS**	**TOTAL UNITS**	**1808**


SPEC & CODE	DESCRIPTION	UNIT	QUANTITY
704-0100	**FLAGGING**	**MHR**	**840**
704-1048	PORTABLE RUMBLE STRIPS	EACH	
704-1050	**TYPE I BARRICADES**	**EACH**	**50**
704-1052	**TYPE III BARRICADES**	**EACH**	**24**
704-1060	**DELINEATOR DRUMS**	**EACH**	**50**
704-1065	TRAFFIC CONES	EACH	
704-1067	**TUBULAR MARKERS**	**EACH**	**321**
704-1070	DELINEATOR	EACH	
704-1072	FLEXIBLE DELINEATORS	EACH	
704-1080	**STACKABLE VERTICAL PANELS**	**EACH**	**100**
704-1081	VERTICAL PANELS - BACK TO BACK	EACH	
704-1085	SEQUENCING ARROW PANEL - TYPE A	EACH	
704-1086	SEQUENCING ARROW PANEL - TYPE B	EACH	
704-1087	**SEQUENCING ARROW PANEL - TYPE C**	**EACH**	**1**
704-1500	OBLITERATION OF PVMT MK	SF	
704-3501	PORTABLE PRECAST CONCRETE MED BARRIER	LF	
704-3510	PRECAST CONCRETE MED BARRIER - STATE FURNISHED	EACH	
762-0200	RAISED PAVEMENT MARKERS	EACH	
762-0420	SHORT TERM 4IN LINE - TYPE R	LF	
762-0422	SHORT TERM 6IN LINE-TYPE R	LF	
762-0430	SHORT TERM 4IN LINE - TYPE NR	LF	
762-0432	**SHORT TERM 6IN LINE-TYPE NR**	**LF**	**13578**

NOTE:
If additional signs are required, units will be calculated using the formula from Section III-18.06 of the Design Manual.
http://www.dot.nd.gov/

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/04/26
NORTH DAKOTA

Traffic Control Devices List
CPR, Grinding, Mill & Overlay
Turn Lanes
Petersburg E to 1.4 Miles
W of JCT ND 18 - EB


	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	100	2

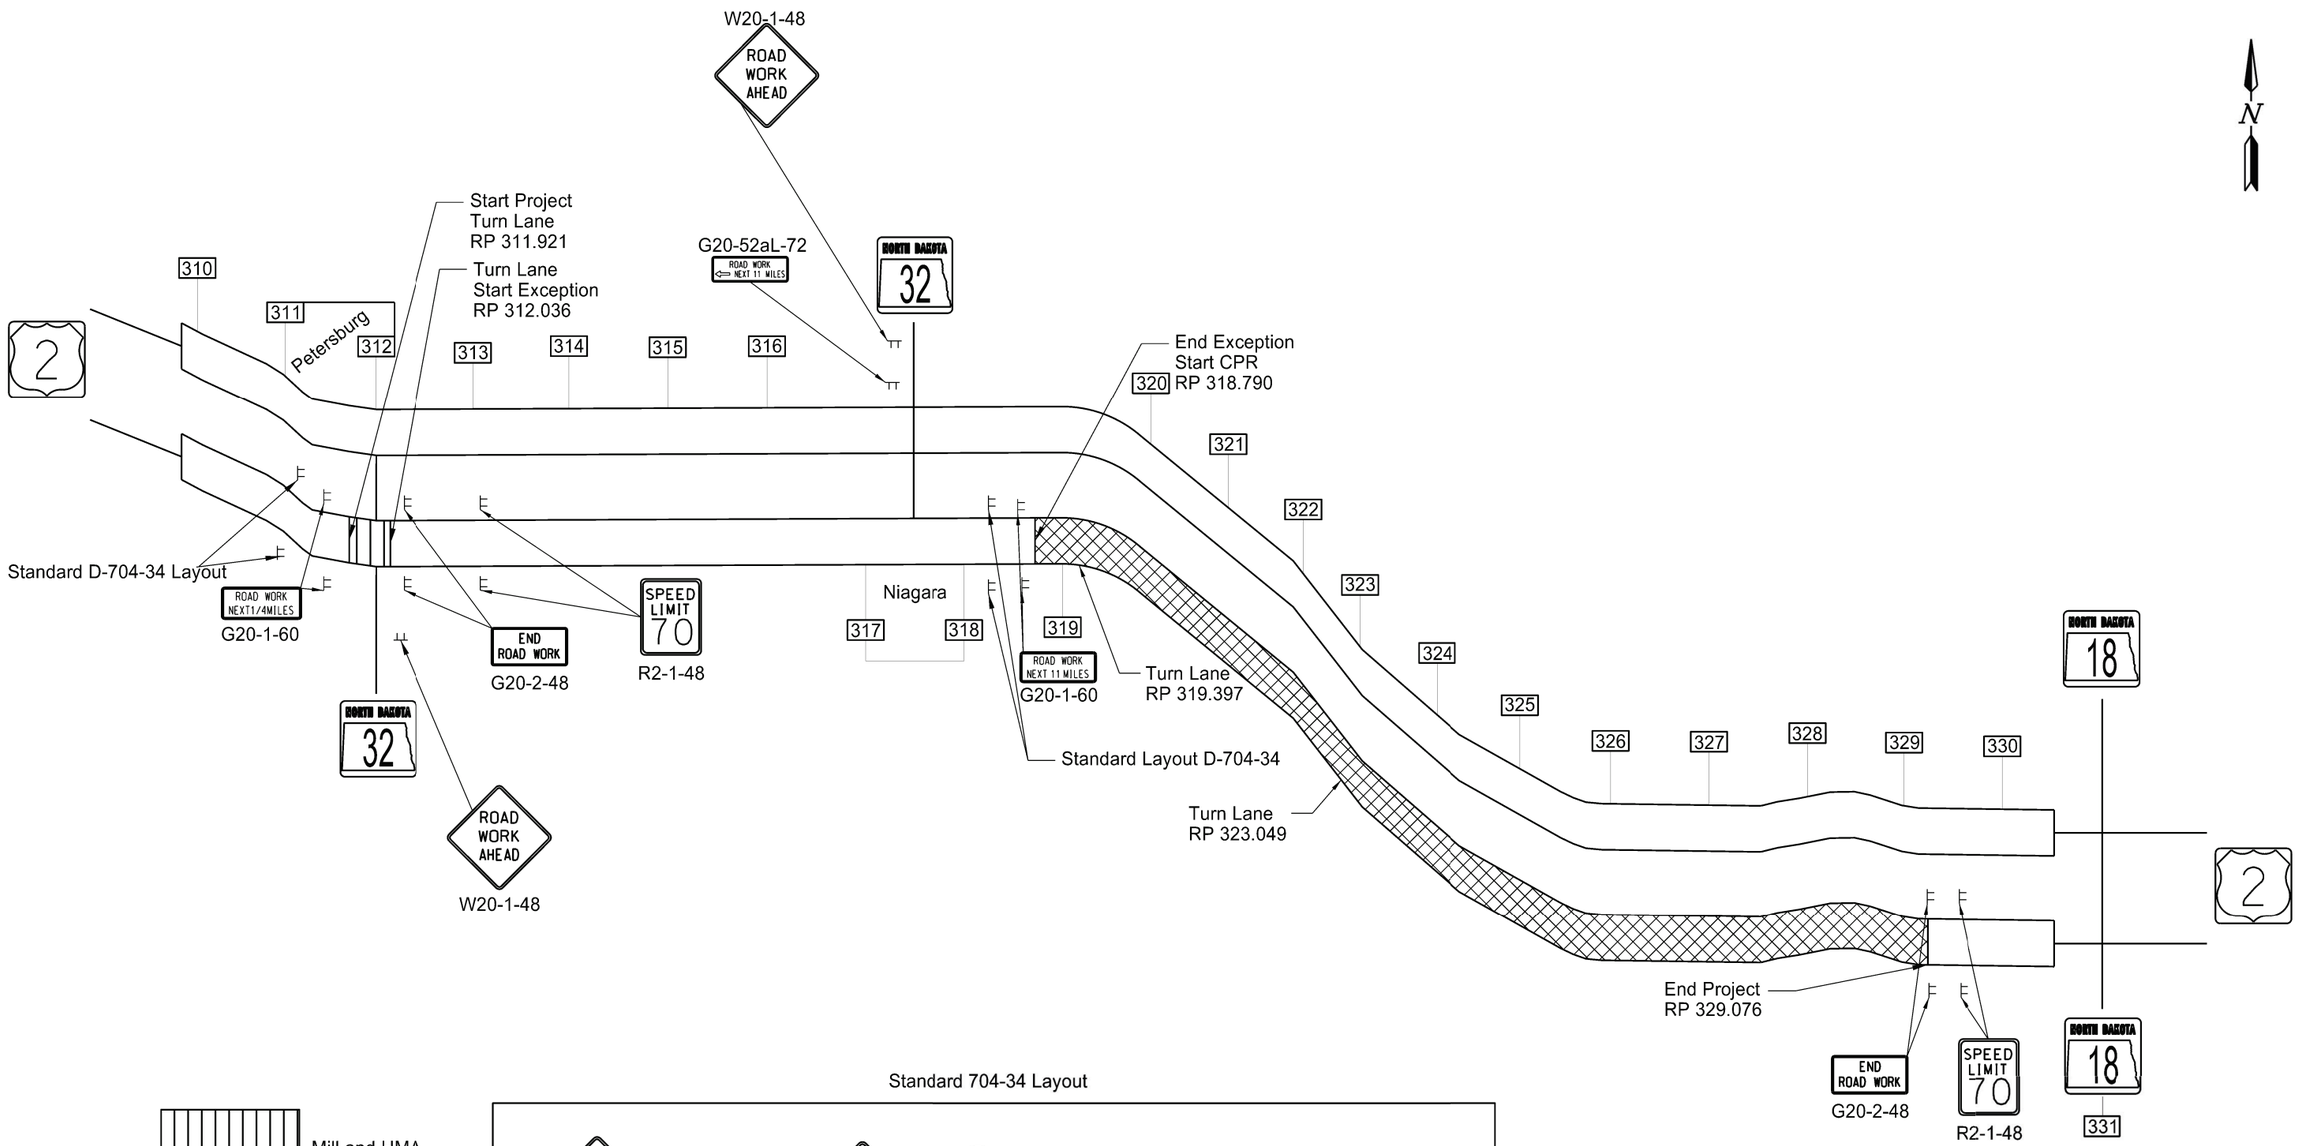

Mill and HMA

CPR and Grinding

Standard 704-34 Layout

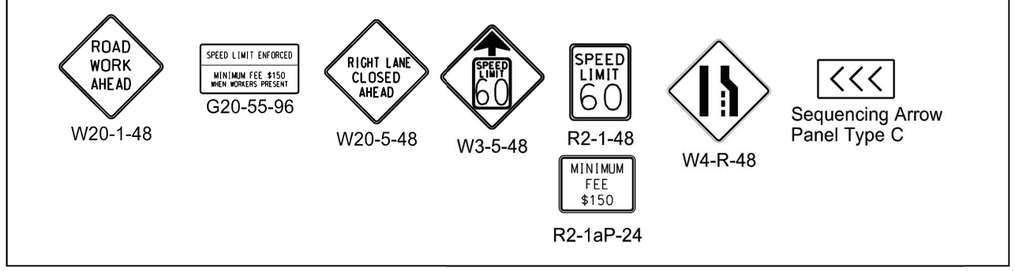


Work Zone Traffic Control

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 03/04/26
NORTH DAKOTA

2/11/2026 6:28:47 AM agorecki R:\project\60002318.155\District\Sheets\100WZ_WZTC\Files\020GD_002_WZTC.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	120	1

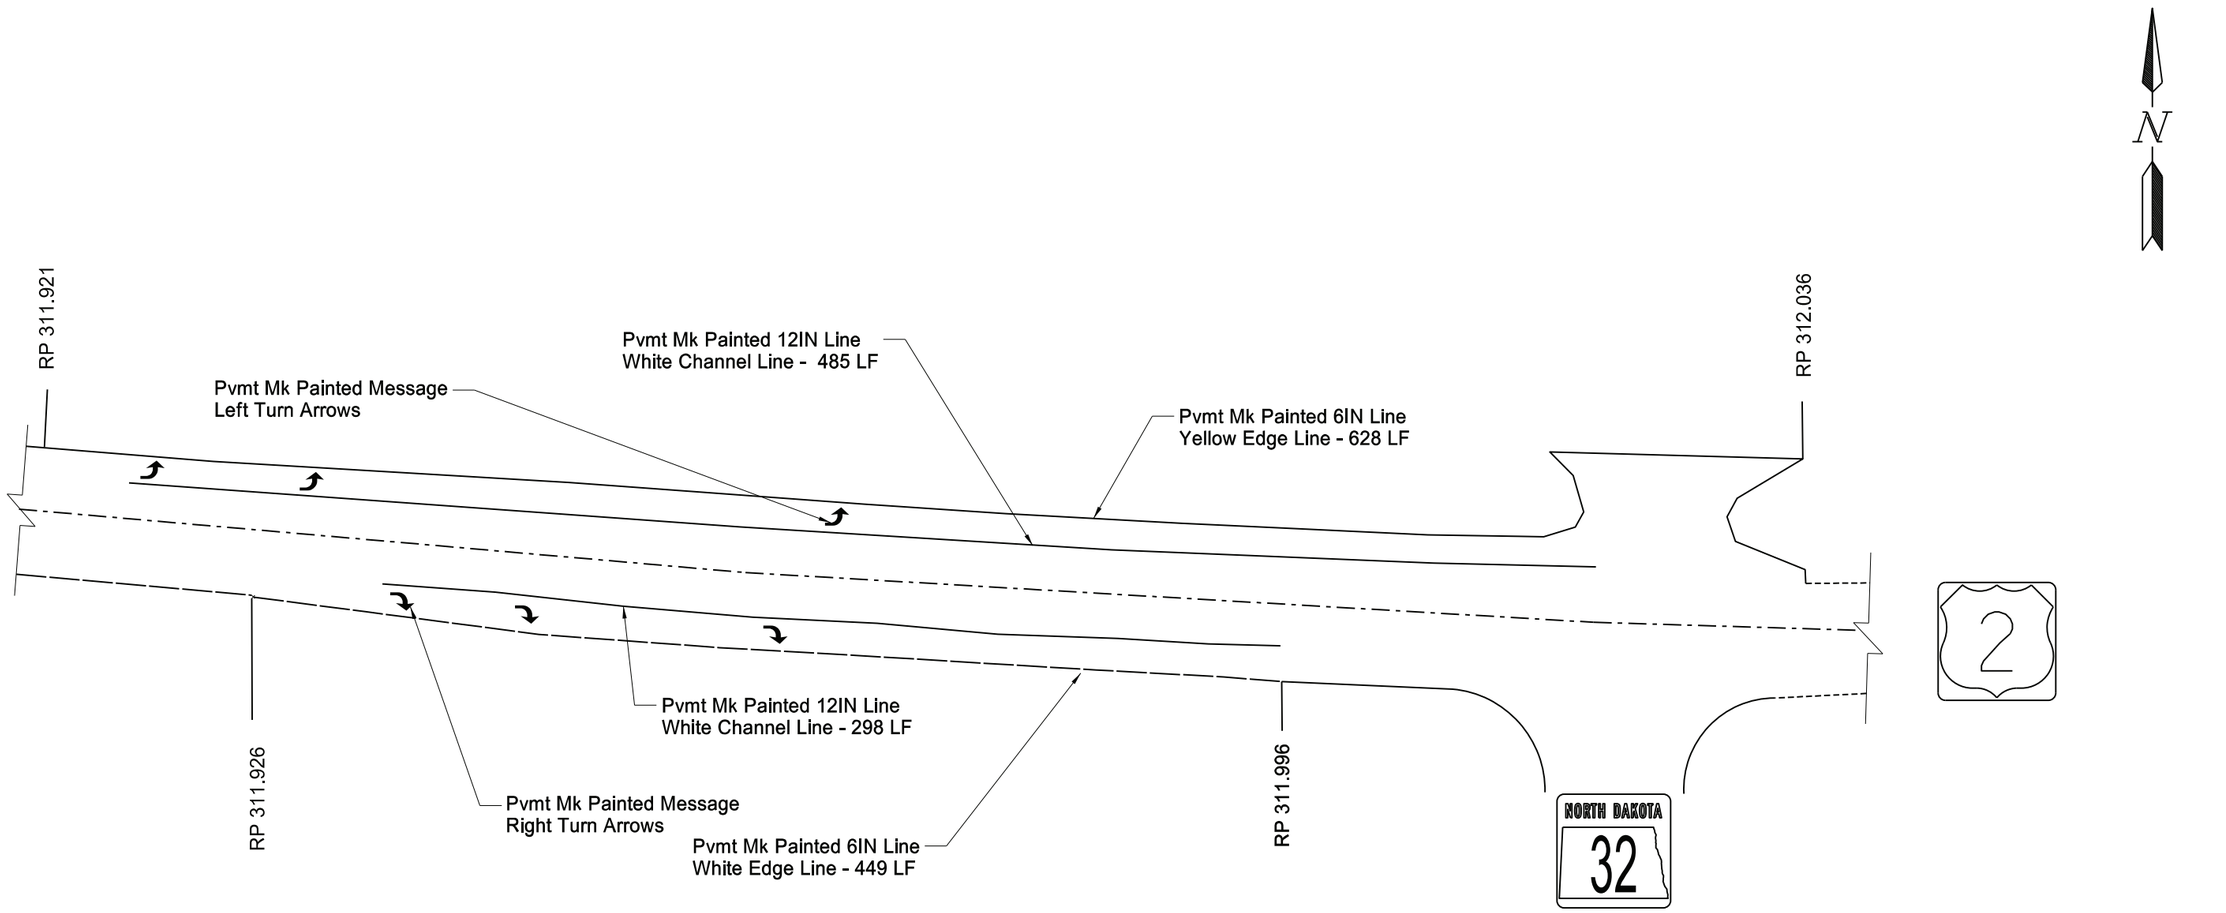

Spec	Code	Description	Quantity
762	1112	Pvmt Mk Painted 12IN Line	
White Channel Line			783 LF
762	1103	Pvmt Mk Painted Message	
Turn Arrows			96 SF
762	1106	Pvmt Mk Painted 6IN Line	
White Edge Line			449 LF
Yellow Edge Line			628 LF

ND 32 Turn Lanes and Median Cross-over


Pavement Marking Details

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/4/2026 11:24:04 AM bward R:\project\60002318.155\District\Sheets\120MK_LPVMT\020GD_001_LPMT.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	120	2

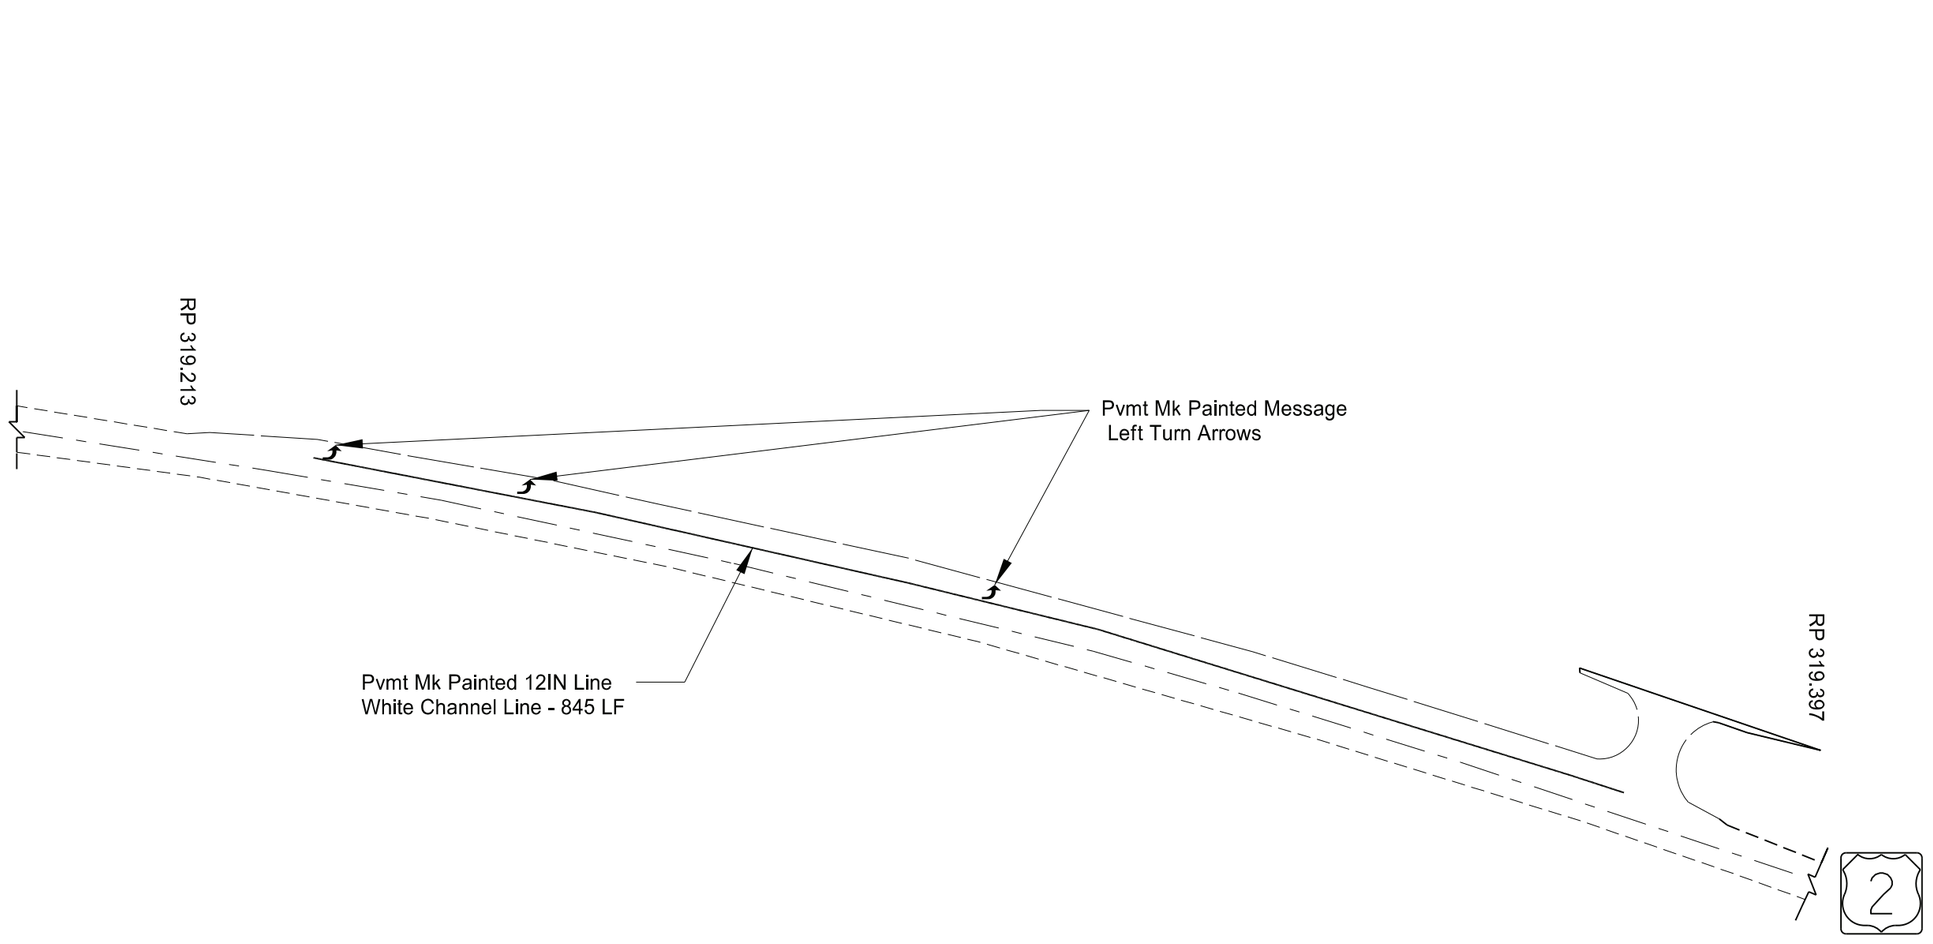

Spec	Code	Description	Quantity
762	1112	Pvmt Mk Painted 12IN Line	
White Channel Line			845 LF
762	1103	Pvmt Mk Painted Message	
Turn Arrows			48 SF

Left Turn Lane McCanna


Pavement Marking Details

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/4/2026 11:31:08 AM bward R:\project\60002318.155\District\Sheets\120MK_LPVMT\020GD_002_LPMT.dgn

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-6-002(155)318	120	3

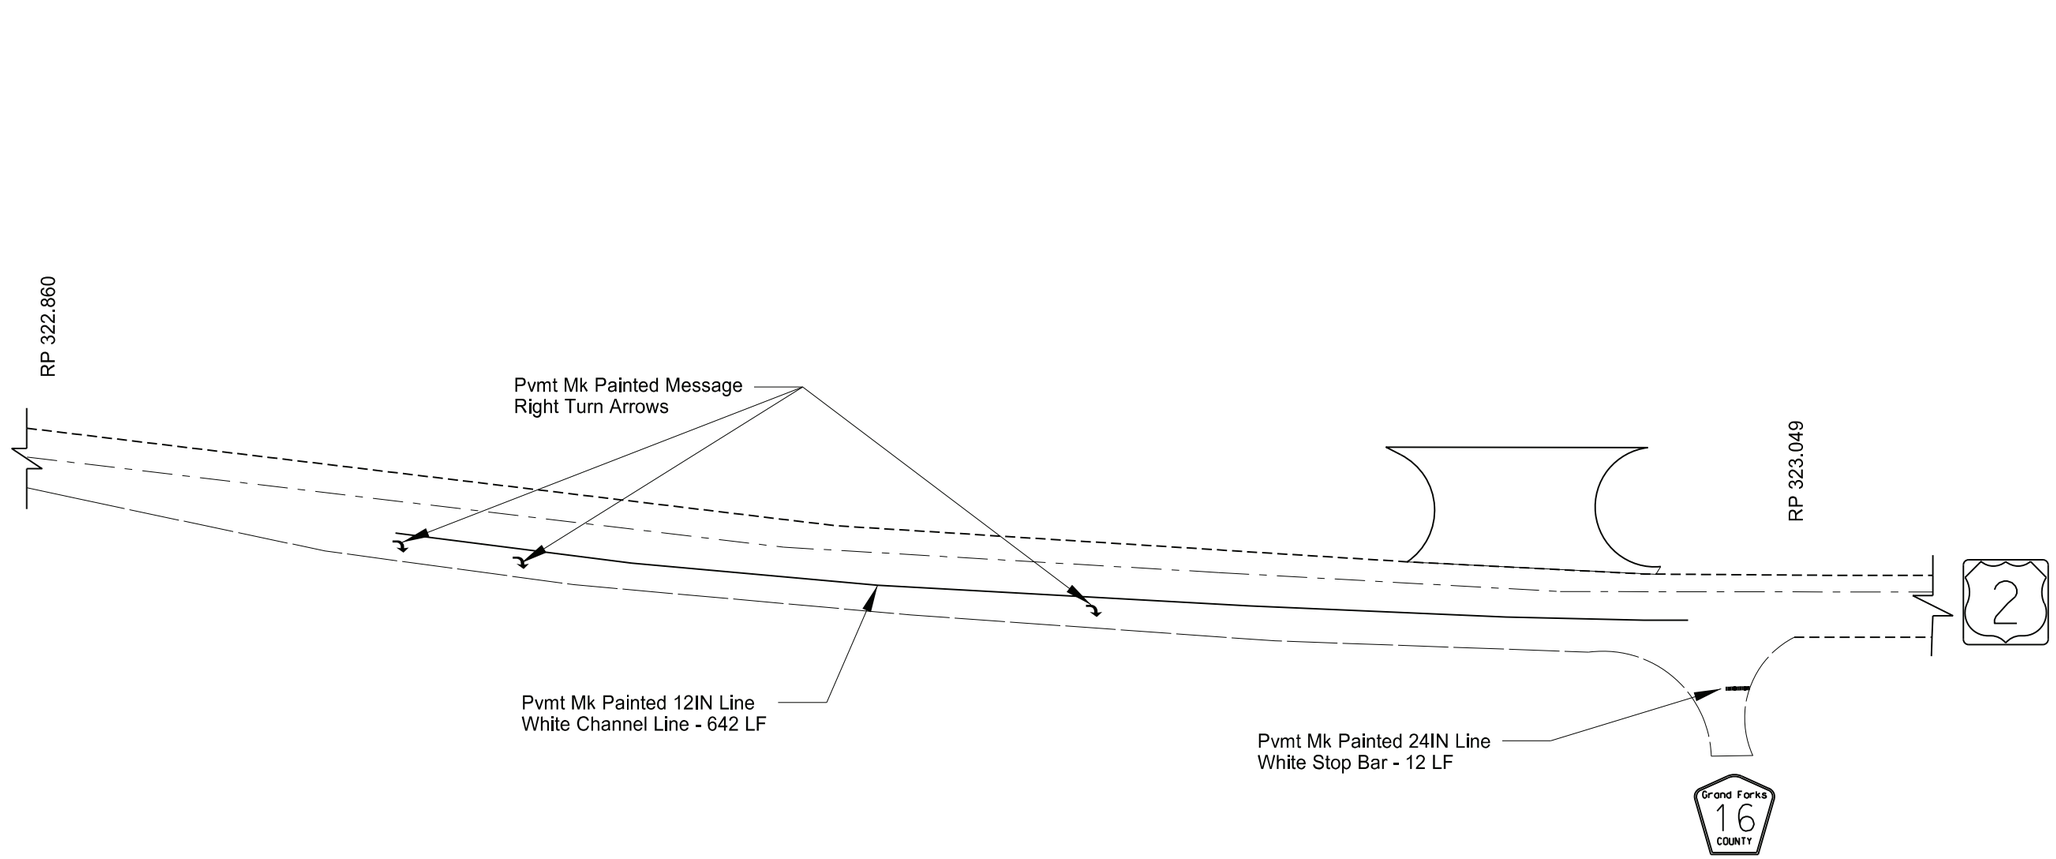

Spec	Code	Description	Quantity
762	1112	Pvmt Mk Painted 12IN Line	
White Channel Line			642 LF
762	1103	Pvmt Mk Painted Message	
Turn Arrows			48 SF
		Pvmt Mk Painted 24IN Line	
White Stop Bar			12 LF

Kolding Dam Turn Lane and Median

Pavement Marking Details

CPR, Grinding, Mill & Overlay Turn Lanes
Petersburg E to 1.4 Miles W of JCT ND 18 - EB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 02/27/26
NORTH DAKOTA

2/4/2026 11:36:15 AM bward R:\project\60002318.155\District\Sheets\120MK_LPVMT\020GD_003_LPMT.dgn

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.
Abn	abandoned
Abut	abutment
Adj	adjusted
Aggr	aggregate
Ahd	ahead
ARV	air release valve
Align	alignment
Al	alley
Alt	alternate
Alum	aluminum
ADA	Americans with Disabilities Act
&	and
Appr	approach
Approx	approximate
ACP	asbestos cement pipe
Asph	asphalt
AC	asphalt cement
Assmd	assumed
@	at
Atten	attenuation
ATR	automatic traffic recorder
Ave	Avenue
Avg	average
ADT	average daily traffic
Bk	back
BF	back face
Balc	balcony
B Wire	barbed wire
Barr	barricade
Btry	battery
BI	beehive inlet
Beg	begin
BG	below grade
BM	bench mark
Bkwy	bikeway
Bit	bituminous
Blk	block
BH	bore hole
Bot	bottom
Blvd	Boulevard
Bndry	boundary
Brkwy	breakaway
Br	bridge
Bldg	building
Bus.	business
BV	butterfly valve
Byp	bypass
C Gdrl	cable guardrail
Calc	calculate
CIP	cast iron pipe
CB	catch basin
CRS	cationic rapid setting
C Gd	cattle guard
C To C	center to center
CL or ℄	centerline
Ch	chain
Chnlk	chain-link
Ch Blk	channel block
Ch Ch	channel change
Chk	check
Chsld	chiseled
Cir	circle
Cl	class
Clnt	clean-out
Clr	clear
Cl&gr	clearing & grubbing
Comb.	combination
Coml	commercial
Compr	compression
CADD	computer aided drafting & design
Conc	concrete
CECB	concrete erosion control blanket
Cond	conductor
Const	construction
Cont	continuous
CSB	continuous split barrel sample
Contr	contraction
Contr	contractor
CP	control point
Coord	coordinate
Cor	corner
Corr	corrected
CAES	corrugated aluminum end section
CAP	corrugated aluminum pipe
CMES	corrugated metal end section
CMP	corrugated metal pipe
CPVCP	corrugated poly-vinyl chloride pipe
CSES	corrugated steel end section
CSFES	corrugated steel flared end section
CSP	corrugated steel pipe
CSTES	corrugated steel traversable end section
Co	County
Crse	course
Ct	Court
Xarm	cross arm
Xbuck	cross buck
Xsec	cross sections
Xing	crossing
Xrd	crossroad
Crn	crown
Culv	culvert
C&G	curb & gutter
CI	curb inlet
CR	curb ramp
C	cut
Dd Ld	dead load
Defl	deflection
Defm	deformed
Dlnt	delineate
Dlntr	delineator
Depr	depression
Desc	description
Det	detail
DWP	detectable warning panel
Dtr	detour
Dia or ø	diameter
Dir	direction
Dist	distance
DM	disturbed material
DB	ditch block
DG	ditch grade
Dbl	double
Dn	down
Dwg	drawing
Dr	drive
Drwy	driveway
DI	drop inlet
D	dry density
Ea	each
Esmt	easement
E	East
EB	Eastbound
Elast	elastomeric
EL	electric locker
E Mtr	electric meter
EVSE	electric vehicle supply equipment
Elec	electric/al
EDM	electronic distance meter
Elev or El	elevation
Ellipt	elliptical
Emb	embankment
Emuls	emulsion/emulsified
ES	end section
Engr	engineer
ESS	environmental sensor station
Eq	equal
Evgr	evergreen
Exc	excavation
Exst	existing
Exp	expansion
Expy	Expressway
E	external of curve
Extru	extruded
FOS	factor of safety
Fed	Federal
FP	feed point
Fn	fence
Fn P	fence post
FO	fiber optic
FD	field drive
F	fill
FAA	fine aggregate angularity
FH	fire hydrant
Fl	flange
Flrd	flared
FES	flared end section
F Bcn	flashing beacon
FA	flight auger sample
FL	flow line
Ftg	footing
FM	force main
Fnd	found
Fdn	foundation
Frac	fractional
Frwy	freeway
Frt	front
FF	front face
F Disp	fuel dispenser
FFP	fuel filler pipes
FLS	fuel leak sensor
Furn	furnish/ed

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

Galv	galvanized
Gar	garage
Gs L	gas line
G Reg	gas line regulator
GMV	gas main valve
G Mtr	gas meter
GSV	gas service valve
GVP	gas vent pipe
GV	gate valve
Ga	gauge
Gov	government
Grd	graded/grade
Grnd	ground
GWM	ground water monitor
Gdrl	guardrail
Gtr	gutter
H Plg	H piling
Hdwl	headwall
Ht	height
Hel	helical
HDPE	high density polyethylene
HM	high mast
HP	high pressure
HPS	high pressure sodium
HTCG	high tension cable guardrail
Hwy	highway
Hor	horizontal
HBP	hot bituminous pavement
HMA	hot mix asphalt
Hyd	hydrant
Ph	hydrogen ion content
Id	identification
Incl	inclinometer tube
IMH	inlet manhole
ID	inside diameter
Inst	instrument
Intchg	interchange
Intmdt	intermediate
Intscn	intersection
Inv	invert
IP	iron pipe
Jt	joint
Jct	junction
Ln	lane
Lg	large
Lat	latitude
Lt	left
Lens	lenses
Lvl	level
Lvlng	leveling
Lht	light
LP	light pole
Ltg	lighting
Liq	liquid
LL	liquid limit
Loc	location
Long.	longitude
Lp	loop
LD	loop detector
Lum	luminaire
Mb	mailbox
ML	main line
MH	manhole
Mkd	marked
Mkr	marker
Mkg	marking
MA	mast arm
Matl	material
Max	maximum
Meas	measure
Mdn	median
MD	median drain
MC	medium curing
MGS	Midwest Guardrail System
MM	mile marker
MP	mile post
Min	minimum
Misc	miscellaneous
Mon	monument
Mnd	mound
Mtbl	mountable
Mtd	mounted
Mtg	mounting
Mk	muck
Neop	neoprene
Ntwk	network
N	North
NE	Northeast
NW	Northwest
NB	Northbound
No. or #	number
Obsc	obscure(d)
Ocpd	occupied
Ocpy	occupy
O/s	offset
OC	on center
C	one dimensional consolidation
OC	organic content
Orig	original
O To O	out to out
OD	outside diameter
OH	overhead
PMT	pad mounted transformer
Pg	pages
Pntd	painted
Pr	pair
Pnl	panel
Pk	park
PSD	passing sight distance
Pvmt	pavement
Ped	pedestal
Ped	pedestrian
PPP	pedestrian pushbutton post
Pen.	penetration
Perf	perforated
Per.	perimeter
Perm	permanent
PL	pipeline
Pl	place
P&P	plan & profile
PL	plastic limit
Pl or ℄	plate
Pt	point
PE	polyethylene
PVC	polyvinyl chloride
PCC	Portland Cement concrete
PP	power pole
Preempt	preemption
Prefab	prefabricated
Prfmd or Pref	preformed
Prep	preperation
Press.	pressure
PRV	pressure relief valve
Prestr	prestressed
Pvt	private
PD	private drive
Prod.	production/produce
Prog	programmed
Prop.	property
Ppsd	proposed
PB	pull box
Qty	quantity
Qtr	quarter
Rad or R	radius
RR	railroad
Rlwy	railway
Rsd	raised
RC	rapid curing
Rec	record
Rcy	recycle
RAP	recycled asphalt pavement
RPCC	recycled portland cement concrete
Ref	reference
R Mkr	reference marker
RM	reference monument
RP	reference point
Refl	reflectorized
RCB	reinforced concrete box
RCES	reinforced concrete end section
RCFES	reinforced concrete flared end section
RCP	reinforced concrete pipe
RCPS	reinforced concrete pipe sewer
RCTES	reinforced concrete traversable end section
Reinf	reinforcement
Res	reservation
Res	residence
Ret	retaining
Rev	reverse
Rt	right
R/W	right of way
Riv	river
Rd	road
Rdbd	road bed
Rdwy	roadway
RWIS	roadway weather information system
Rk	rock
Rt	route

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

D-101-3

Salv	salvage(d)
San	sanitary sewer line
Sec	section
SL	section line
Sep	separation
Seq	sequence
Serv	service
Sht	sheet
Shtng	sheeting
Shldr	shoulder
Sw or Sdwk	sidewalk
SD	sight distance
SN	sign number
Sig	signal
Sgl	single
SRCP	slotted reinforced concrete pipe
SC	slow curing
SS	slow setting
Sm	small
S	South
SE	Southeast
SW	Southwest
SB	Southbound
Sp	spaces
Spcl	special
SA	special assembly
SP	special provisions
G	specific gravity
Spk	spike
SB	split barrel sample
SH	sprinkler head
SV	sprinkler valve
Sq	square
Stk	stake
Std	standard
N	standard penetration test
Std Specs	standard specifications
Stm L	steam line
SEC	steel encased concrete
SMA	stone matrix asphalt
SSD	stopping sight distance
SD	storm drain
St	street
SPP	structural plate pipe
SPPA	structural plate pipe arch
Str	structure
Subd	subdivision
Sub	subgrade
Sub Prep	subgrade preperation
Ss	subsoil
SS	supplement specification
Supp	supplemental
Surf	surfacing
Surv	survey
Sym	symmetrical

Tel	telephone
Tel B	Telephone Booth
Tel P	telephone pole
Tv	television
Temp	temperature
Temp	temporary
TBM	temporary bench mark
T	thinwall tube sample
Ts	topsoil
Traf	traffic
TSCB	traffic signal control box
Tr	trail
Transf	transformer
Trans	transition
TT	transmission tower
TES	traversable end section
Trans	transverse
Trtd	treated
Trmt	treatment
Qc	triaxial compression
TERO	tribal employment rights ordinance
Tpl	triple
Typ	typical
Qu	unconfined compressive strength
Ugrnd	underground
Util	utility
VG	valley gutter
Vap	vapor
Vert	vertical
VCP	vitrified clay pipe
Vol	volume
VSFS	vehicle speed feedback sign
Wkwy	walkway
W	water content
WGV	water gate valve
WL	water line
WM	water main
WMV	water main valve
W Mtr	water meter
WSV	water service valve
WW	water well
Wrng	wearing
WIM	weigh in motion
W	west
WB	westbound
Wrng	wiring
W/	with
W/o	without

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION
07-01-14

REVISIONS

DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT ABBREVIATIONS

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in.	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International
T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CC	closing corner
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
MC	meander corner
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
SC	standard corner
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WC	witness corner
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
12-18-20	Sheet Added - Continued from D-101-3
4-14-25	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM	702 Communications
ACCENT	Accent Communications
AGASSIZ WU	Agassiz Water Users District
AGC	Associated General Contractors of America
ALL PL	Alliance Pipeline
ALL SEAS WU	All Seasons Water Users District
AMOCO PI	Amoco Pipeline Company
AMRDA HESS	Amerada Hess Corporation
AT&T	AT&T Corporation
B PAW	Bear Paw Energy Incorporated
BAKER ELEC	Baker Electric
BASIN ELEC	Basin Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative
BELLE PL	Belle Fourche Pipeline Company
BLM	Bureau of Land Management
BNSF	Burlington Northern Santa Fe Railway
BOEING	Boeing
BRNS RWD	Barnes Rural Water District
BURK-DIV ELEC	Burke-Divide Electric Cooperative
BURL WRD	Burleigh County Water Resource District
CABLE ONE	Cable One
CABLE SERV	Cable Services
CAP ELEC	Capital Electric Cooperative Incorporated
CASS CO ELEC	Cass County Electric Cooperative
CASS RWU	Cass Rural Water Users District
CAV ELEC	Cavalier Rural Electric Cooperative
CBLCOM	Cablecom Of Fargo
CENEX PL	Cenex Pipeline
CENT PL WATER DIST	Central Pipe Line Water District
CENT PWR ELEC	Central Power Electric Cooperative
CENTURYLINK	CenturyLink
COE	Corps of Engineers
CONS COMM	Consolidated Communications
CONS TELCOM	Consolidated Telcom
CONT RES	Continental Resource Inc
CPR	Canadian Pacific Railway
D O E	Department Of Energy
DAK CARR	Dakota Carrier Network
DAK CENT TEL	Dakota Central Telephone
DAK RWD	Dakota Rural Water District
DGC	Dakota Gasification Company
DICKEY R NET	Dickey Rural Networks
DICKEY WRD	Dickey County Water Resource District
DICKEY TEL	Dickey Telephone
DNRR	Dakota Northern Railroad
DOME PL	Dome Pipeline Company
DVELEC	Dakota Valley Electric Cooperative
DVMW	Dakota, Missouri Valley & Western
E CENT REG WD	East Central Water District
ENBRDG	Enbridge Pipelines Incorporated
ENVENTIS	Enventis Telephone
EQUINOR	Equinor Pipeline
FALK MNG	Falkirk Mining Company
FHWA	Federal Highway Administration
G FKS-TRL WD	Grand Forks-traill Water District
GETTY TRD & TRAN	Getty Trading & Transportation
GLDN W ELEC	Golden West Electric Cooperative
GTR RAMSEY WD	Greater Ramsey Water District
GT PLNS NAT GAS	Great Plains Natural Gas Company
HALS TEL	Halstad Telephone Company
IDEA1	Idea1
INT-COMM TEL	Inter-Community Telephone Company
KANEB PL	Kaneb Pipeline Company
KEM ELEC	Kem Electric Cooperative Incorporated
KOCH GATH SYS	Koch Gathering Systems Incorporated
LKHD PL	Lakehead Pipeline Company
LWR YELL R ELEC	Lower Yellowstone Rural Electric
LUMEN	Lumen Technologies Incorporated
MCKNZ CON	McKenzie Consolidated Telcom
MCKNZ ELEC	McKenzie Electric Cooperative
MCKNZ WRD	McKenzie County Water Resource District
MCLEOD	McLeod USA
MCLN ELEC	McLean Electric Cooperative
MCLN-SHRDN R WAT	McLean-Sheridan Rural Water District
MDU	Montana-dakota Utilities
MIDCO	MidContinent Communications
MIDSTATE TEL	Midstate Telephone Company
MINOT CABLE	Minot Cable Television
MINOT TEL	Minot Telephone Company
MISS VALL COMM	Missouri Valley Communications Incorporated
MISS W W S	Missouri West Water System
MNKOTA PWR	Minnkota Power
MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative
MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative
MLGC	Moore & Liberty - Griggs County
MUNICIPAL	City Water And Sewer
MUNICIPAL	City Of '.....'
N CENT ELEC	North Central Electric Cooperative
N PRAIR REG WD	North Prairie Regional Water District
ND PKS & REC	North Dakota Parks And Recreation
ND TEL	North Dakota Telephone Company
NDDOT	North Dakota Department of Transportation
NE REG WD	Northeast Regional Water District
NDSU SOIL SCI DEPT	NDSU Soil Science Department
NEMONT TEL	Nemont Telephone
NODAK R ELEC	Nodak Rural Electric Cooperative
NOON FRMS TEL	Noonan Farmers Telephone Company
NPR	Northern Plains Railroad
NSP	Northern States Power
NTHN BRDR PL	Northern Border Pipeline
NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated
NTHWSTRN REF	Northwestern Refinery Company
NW COMM	Northwest Communication Cooperation
NWRWD	Northwest Rural Water District
ONEOK	Oneok gas
OSHA	Occupational Safety and Health Administration
OTTR TL PWR	Otter Tail Power Company
PAAP	Plains All American Pipeline
P L E M	Prairielands Energy Marketing
POLAR COM	Polar Communications
PVT ELEC	Private Electric
QWEST	Qwest Communications
R&T REG WD	R & T Water District
RED RIV COMM	Red River Communications
RESVTN TEL	Reservation Telephone
ROBRTS TEL	Roberts Company Telephone
R-RIDER ELEC	Roughrider Electric Cooperative
RRVW	Red River Valley & Western Railroad
S CENT REG WD	South Central Regional Water District
SE W U	Southeast Water Users Incorporated
SCOTT CABLE	Scott Cable Television Dickinson
SHERDN ELEC	Sheridan Electric Cooperative
SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
SKYTECH	Skyland Technologies Incorporated
SLOPE ELEC	Slope Electric Cooperative Incorporated
SOURIS RIV TELCOM	Souris River Telecommunications
ST WAT COMM	State Water Commission
STATE LN WATER	State Line Water Cooperative
STER ENG	Sterling Energy
STUT RWD	Stutsman Rural Water District
SW PL PRJ	Southwest Pipeline Project
SWWA	Southwest Water Authority
SUNOCO	Sunoco LP
T M C	Turtle Mountain Communications
TCI	TCI of North Dakota
TESORO HGH PLNS PL	Tesoro High Plains Pipeline
TRI-CNTY WU	Tri-County Water Users Incorporated
TRL CO WRD	Traill County Water Resource District
UNTD TEL	United Telephone
UPPR SOUR WD	Upper Souris Water District
US SPRINT	U.S. Sprint
USAF MSL CABLE	U.S.A.F. Missile Cable
USFWS	US Fish and Wildlife Service
USW COMM	U.S. West Communications
VRNDRY ELEC	Verendrye Electric Cooperative
W RIV TEL	West River Telephone Incorporated
WAPA	Western Area Power Administration
WAWSA	Western Area Water Supply Authority
WEB	W. E. B. Water Development Association
WILLI WRD	Williams County Water Resource District
WILSTN BAS PL	Williston Basin Interstate Pipeline Company
WLSH RWD	Walsh Water Rural Water District
WOLVRTN TEL	Wolverton Telephone
XLENER	Xcel Energy
YSVR	Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

LINE STYLES

D-101-20

Existing Topography

- Existing Ground Void
- Existing Cemetary Boundary
- Existing Box Culvert Bridge
- Existing Concrete Surface
- Existing Drainage Structure
- Existing Gravel Surface
- Existing Riprap
- Existing Dirt Surface
- Existing Asphalt Surface
- Existing Tie Point Line
- Existing Railroad Centerline
- Existing Guardrail Cable
- Existing Guardrail Metal
- Existing Edge of Water
- Existing Fence
- Existing Railroad
- Existing Field Line
- Exst Flow
- Existing Curb
- Existing Valley Gutter
- Existing Driveway Gutter
- Existing Curb and Gutter
- Existing Mountable Curb and Gutter
- Existing 3-Cable w Posts
- Site Boundary
- Existing Berm, Dike, Pit, or Earth Dam
- Existing Ditch Block
- Existing Tree Boundary
- Existing Brush or Shrub Boundary
- Existing Retaining Wall
- Existing Planter or Wall
- Existing W-Beam Guardrail with Posts
- Existing Railroad Switch
- Gravel Pit - Borrow Area
- Existing Wet Area-Vegetation Break
- Existing High Tension Cable Guardrail
- Existing High Tension Cable Guardrail with Posts

Proposed Topography

- 3-Cable w Posts
- Flow
- Fence
- Remove Line
- Wall
- Retaining Wall (Plan View)
- W-Beam w Posts
- High Tension Cable Guardrail with Posts

Existing Utilities

- Existing Electrical
- Existing Fiber Optic Line
- Existing TV Fiber Optic
- Existing Gas Pipe
- Existing Overhead Utility Line
- Existing Power
- Existing Fuel Pipeline
- Existing Undefined Above Ground Pipe Line
- Existing Sanitary Sewer
- Existing Sanitary Force Main
- Existing Storm Drain
- Existing Storm Drain Force Main
- Existing Culvert
- Existing Telephone Line
- Existing TV Line
- Existing Water or Steam Line
- Existing Under Drain
- Existing Slotted Drain
- Existing Conduit
- Existing Conductor
- Existing Down Guy Wire Down Guy
- Existing Underground Vault or Lift Station

Proposed Utilities

- 24 Inch Pipe
- Reinforced Concrete Pipe
- Under Drain
- Edge Drain

Traffic Utilities

- Conductor
- Fiber Optic
- Existing Loop Detector
- Existing Double Micro Loop Detector
- Micro Loop Detector Double
- Existing Micro Loop Detector
- Micro Loop Detector
- Signal Head with Mast Arm
- Existing Signal Head with Mast Arm

Sign Structures

- Existing Overhead Sign Structure
- Existing Overhead Sign Structure Cantilever
- Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
09-23-16 12-18-20	Added and Revised Items, Organized by Functional Groups General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

LINE STYLES

D-101-21

Right Of Way

- Easement
- Existing Easement
- Right of Way
- Existing Right of Way
- Existing Right of Way Railroad
- Existing Right of Way Not State Owned
- Existing Government Lot Line
- Existing Adjacent Block Lines
- Existing Adjacent Lot Lines
- Existing Adjacent Property Line
- Existing Adjacent Subdivision Lines
- Sight Distance Triangle Line
- Dimension Leader

Boundary Control

- Existing City Corporate Limits or Reservation Boundary
- Existing State or International Line
- Existing Township
- Existing County
- Existing Section Line
- Existing Quarter Section Line
- Existing Sixteenth Section Line
- Existing Centerline
- Tangent Line

Cross Sections and Typicals

- Existing Ground
- Existing Topsoil (Cross Section View)
- Existing Ground Void (Not Surveyed) (void — void — void — v)
- Existing Concrete
- Existing Aggregate (Cross Section View)
- Existing Curb and Gutter (Cross Section View)
- Existing Asphalt (Cross Section View)
- Existing Reinforcement Rebar

Geotechnical

- Geotextile Fabric Type D (D — D)
- Geogrid (Geo — Geo)
- Geotextile Fabric Type R (R — R)
- Geotextile Fabric Type R1 (R — R)
- Geotextile Fabric Type RR (RR — RR)
- Geotextile Fabric Type S (S — S)
- Subgrade Reinforcement
- Failure Line

Countours

- Depression Contours
- Supplemental Contour

Profile

- Subgrade, Subcut or Ditch Grade
- Topsoil Profile

Striping

- Centerline Pavement Marking
- Barrier with Centerline Pavement Marking
- Barrier Pavement Marking
- Stripe 4 IN Dotted Extension White
- Stripe 8 IN Dotted Extension White
- Stripe 8 IN Lane Drop

Pavement Joints

- Doweled Joint
- Tie Bar 30 Inch 4 Foot Center to Center
- Tie Bar 18 Inch 3 Foot Center to Center
- Tie Bar at Random Spacing

Bridge Details

- Small Hidden Object
- Large Hidden Object
- Phantom Object
- Existing Conditions Object
- Centerline Main
- Centerline Secondary
- Excavation Limits
- Proposed Ground
- Sheet Piling

Erosion Control

- Limits of Const Transition Line
- Bale Check
- Rock Check
- Floating Silt Curtain (S — S)
- Silt Fence (SF — SF)
- Excavation Limits
- Fiber Rolls

Environmental

- Wetland Mitigation
- Existing Wetland Easement USFWS
- Existing Wetland Jurisdictional
- Existing Wetland
- Tree Row

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16 12-18-20	Added and Revised Items, Organized by Functional Groups General Revisions

KIRK J. HOFF
REGISTERED
Kirk J Hoff
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-30

North Arrow (Half Scale)

Alignment Data Point

Alignment Monument

Spot Elevation

Existing Miscellaneous Spot

Existing Access Control Arrow

Existing Benchmark

Reset USGS Marker

Iron Monument Found

Iron Pin R/W Monument

Property Corner

Iron Pin Reference Monument

Right of Way Marker (Exst, Ppsd, Reset)

Existing Federal Reference Corner

Existing Section Corner (Full, Quarter, Sixteenth, Meander)

Existing Witness Corner

Existing Control Point (CP, GPS-RTK, TRI)

Existing Traverse PI Aerial Panel

Existing Reference Marker Point NGS

Existing EFB Misc

Existing Bush or Shrub

Existing Large Evergreen Tree

Existing Small Evergreen Tree

Existing Large Tree

Existing Small Tree

Existing Tree Trunk

Cairn or Stone Circle

Existing Artifact

Existing Satellite Dish

Existing Weather Station

Existing Windmill or Tower

Reinforced Pavement

CSB Continuous Split Barrel Sample

FA Flight Auger Sample

SB Split Barrel Sample

T Thinwall Tube Sample

N Standard Penetration Test

Incl Inclinometer Tube

Excavation Unit

Existing Ground Water Well Bore Hole

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

SYMBOLS

D-101-31

- Flexible Delineator
- Flexible Delineator Type A (Exst, Ppsd)
- Flexible Delineator Type B (Exst, Ppsd)
- Flexible Delineator Type C (Exst, Ppsd)
- Flexible Delineator Type D (Exst, Ppsd)
- Flexible Delineator Type E (Exst, Ppsd)
- Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type C (Exst, Ppsd, Diamond Grade)
- Delineator Type D (Exst, Ppsd, Diamond Grade)
- Delineator Type E (Exst, Ppsd, Diamond Grade)
- Barricade (Type I, Type II, Type III}
- Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)
- Attenuation Device
- Truck Mounted Attenuator
- Delineator Drums
- Flagger
- Tubular Marker
- Traffic Cone
- Back to Back Vertical Panel Sign

- Highway Sign (Exst, Ppsd)
- Mile Post Type A (Exst-Ppsd-Reset)
- Mile Post Type B (Exst, Ppsd)
- Mile Post Type C (Exst, Ppsd)
- Object Marker Type I (Exst, Ppsd)
- Object Marker Type II (Exst, Ppsd)
- Object Marker Type III (Exst, Ppsd)
- Existing Reference Marker
- Road Closure Gate 18 Ft (Exst, Ppsd)
- Road Closure Gate 28 Ft (Exst, Ppsd)
- Road Closure Gate 40 Ft (Exst, Ppsd)
- Existing Railroad Battery Box
- Existing RR Profile Spot
- Existing Railroad Crossbuck
- Existing Railroad Frog
- Existing Mailbox (Private, Federal)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

SYMBOLS

D-101-32

- Existing Luminaire
- Luminaire LED
- Existing Light Standard Luminaire
- Relocate Light Standard
- Light Standard Light LED Luminaire
- Light Standard 35 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 50 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 70 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 100 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 150 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 200 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 250 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 310 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 400 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 700 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire
- Emergency Vehicle Detector
- Video Detection Camera

- High Mast Light Standard 3 Luminaire (Exst, Ppsd)
- High Mast Light Standard 4 Luminaire (Exst, Ppsd)
- High Mast Light Standard 5 Luminaire (Exst, Ppsd)
- High Mast Light Standard 6 Luminaire (Exst, Ppsd)
- High Mast Light Standard 7 Luminaire (Exst, Ppsd)
- High Mast Light Standard 8 Luminaire (Exst, Ppsd)
- High Mast Light Standard 9 Luminaire (Exst, Ppsd)
- High Mast Light Standard 10 Luminaire (Exst, Ppsd)
- Overhead Sign Structure Load Center (Exst, Ppsd)
- Traffic Signal Controller (Exst, Ppsd)
- Pad Mounted Traffic Signal Controller (Exst, Ppsd)
- Flashing Beacon (Exst, Ppsd)
- Concrete Foundation (Exst, Ppsd)
- Pipe Mounted Flasher (Exst, Ppsd)
- Pad Mounted Feed Point (Exst, Ppsd)
- Pipe Mounted Feed Point with Pad (Exst, Ppsd)
- Pole Mounted Feed Point (Exst, Ppsd)
- Junction Box (Exst, Ppsd)
- Existing Pedestrian Head with Number
- Existing Signal Head
- Pole Mounted Head
- Existing Lighting Standard Pole

- Existing Traffic Signal Standard
- Pull Box (Exst-Ppsd-Undefined)
- Intelligent Transportation Pull Box (Exst, Ppsd)
- Transformer (Exst, Ppsd)
- Power Pole (Exst-Ppsd-with Transformer)
- Wood Pole (Exst, Ppsd)
- Pedestrian Push Button Post (Exst, Ppsd)
- Existing Pole
- Existing Telephone Pole
- Existing Post
- Connection Conductor (Ground, Neutral, Phase 1, Phase 2)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-33

Existing Manhole (Electrical, Gas, Telephone)

Water Manhole (Exst, Exst with Valve)

Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)

Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)

Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)

Force Main Storm Drain Manhole (Exst, Exst with Valve)

Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)

Existing Water Appurtenance

Sprinkler Head (Exst, Ppsd)

Fire Hydrant (Exst, Ppsd)

Cleanout (Exst Sanitary, Underdrain)

Existing Catch Basin Inlet (Round, Square)

Existing Curb Inlet (Round, Square)

Existing Slotted Reinforced Concrete Pipe

Catch Basin (Riser 30 Inch, Beehive, Type A)

Inlet Mountable Curb (Type A, Type B)

Inlet Saddle Base (Type 1, Type 2)

Inlet Special (Catch Basin, Type 1, Type A)

Inlet (Tee, Type 1, Type 2, Type 2 Double)

Median Drain

Headwall (Exst, Ppsd, Ppsd Single with Vegitation Barrier, Ppsd Double with Vegitation Barrier)

Cap or Stub
Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water

Existing Pedestal
Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined

Existing Pipe Vent
Gas, Fuel, Sanitary, Storm Drain, Water, Undefined

Valve
Exst Gas, Exst Water, Ppsd Water, Exst Undefined

Pump
Sanitary, Storm Drain, Exst Water

Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Existing Utility Marker

Existing Meter

Existing Fuel Dispensers

Existing Fuel Filler Pipes

Existing Fuel Leak Sensors

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


12 18 2020

Docusign Envelope ID: 16F7A80B-8DD6-45CC-B8F9-AA9BED01BCFF


LONGITUDINAL JOINT DETAILS

D-550-2

UNTIED JOINTS

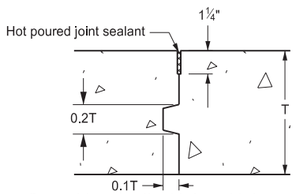


Sawed longitudinal joint with keyway

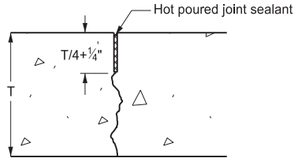

Sawed longitudinal joint without keyway


TIED JOINTS

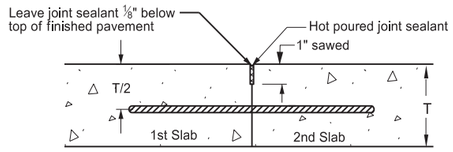


Longitudinal construction joint (tied butt joint)

Notes:


1. Provide hot poured joint sealant meeting the requirements of Section 826.02A.2 of the Standard Specifications.
2. Include all costs of the longitudinal joint and seal in the price bid for the PCC pavement.
3. Do not place tie bars within 18 inches of a transverse joint.
4. Use Grade 40 steel for tie bars installed bent and later straightened.
5. Increase the maximum tie bar spacing up to 10%, when necessary to facilitate construction.
6. Place tie Bars at a 48 inch maximum spacing.
7. A "Warp" joint is a sawed joint or a construction joint with a keyway.
8. A "Butt joint" is a construction joint with no keyway.

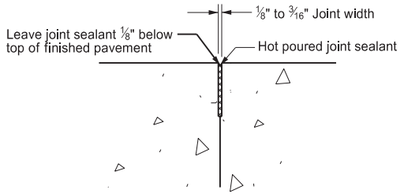

Contraction joint

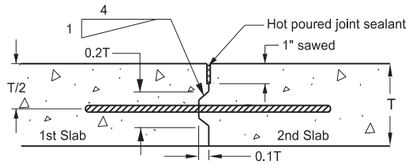

Longitudinal construction joint (tied keyed joint)

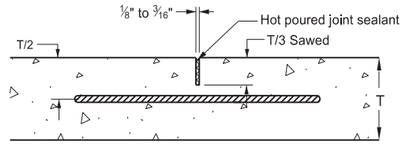


Sawed longitudinal joint

TIEBAR SPACINGS (In)*


TIE BARS	STEEL GRADE	40				60						40					60						40						60						40						60					
	SIZE & LENGTH	#3x24" BARS				#3x30" BARS						#4x24" BARS					#4x36" BARS							#5x30" BARS						#5x42" BARS						#6x36" BARS						#6x48" BARS					
DIST TO NEAREST FREE EDGE		4	6	8	10	4	6	8	10	12	14	8	10	12	14	16	8	10	12	14	16	22	24	10	12	14	16	22	24	10	12	14	16	22	24	10	12	14	16	19	22	24	10	12	14	16	19	22	24
PCC PVMT DEPTH	JOINT TYPE																																															
6"	WARP		48	39			48	48				48					48																														
	BUTT		37	27			48	42				48					48																														
8"	WARP	48	39	29	24	48	48	44	35	29	25	48	42	35	30	26	48	48	48	45	39	28	26	48	48	47	41	30	27	48	48	48	48	45	41	48	48	48	48	48	43	39	48	48	48	48	48	48	48
	BUTT	42	27			48	42	31	25			37	29	24			48	44	37	32	27			46	39	33	29			48	48	48	43	32	29	48	48	48	48	35	30	27	48	48	48	48	48	45	41
8½"	WARP	48	37	28		48	48	42	33	28	24	48	39	33	28	24	48	48	48	42	37	27	24	48	48	44	38	28	25	48	48	48	48	42	38	48	48	48	48	47	40	37	48	48	48	48	48	48	48
	BUTT	39	26			44	39	29				35	27				48	42	35	29	26			44	36	31	27			48	48	47	41	30	27	48	48	45	39	33	28	26	48	48	48	48	48	42	39
9"	WARP	48	35	26		48	48	39	31	26		47	37	31	26		48	48	47	40	35	25		48	48	42	36	26	24	48	48	48	48	40	36	48	48	48	48	44	38	35	48	48	48	48	48	48	48
	BUTT	37	24			48	37	27				33	26				48	40	33	28	25			41	34	29	25			48	48	44	39	28	25	48	48	42	37	31	26	24	48	48	48	48	47	40	37
9½"	WARP	48	33	25		48	48	37	30	25		44	35	29	25		48	48	44	38	33	24		48	46	39	34	25		48	48	48	48	38	34	48	48	48	48	42	36	33	48	48	48	48	48	48	48
	BUTT	35				48	35	26				31	25				47	37	31	27				39	32	27	25			48	48	42	37	27	24	48	47	40	35	29	25		48	48	48	48	44	38	35
10"	WARP	47	31			48	47	35	28			42	34	28	24		48	48	42	36	31			48	44	37	33	24		48	48	48	48	36	33	48	48	48	48	40	34	31	48	48	48	48	48	48	47
	BUTT	33				48	33	25				29	24				45	36	29	25				37	31	26	24			48	46	40	35	25		48	45	38	33	28	24		48	48	48	48	42	36	33
10½"	WARP	45	30			48	45	34	27			40	32	26			48	48	40	34	30			48	42	36	31			48	48	48	47	34	31	48	48	48	45	38	33	30	48	48	48	48	48	48	45
	BUTT	32				48	32	24				28					42	34	28	24				35	29	25				48	44	38	33	24		48	42	36	32	27			48	48	48	48	40	34	31
11"	WARP	43	28			48	43	32	26			38	31	25			48	46	38	33	28			48	40	34	30			48	48	48	45	32	30	48	48	48	43	36	31	28	48	48	48	48	48	47	43
	BUTT	30				46	30					27					40	32	27					34	28	24				48	42	36	32			48	40	35	30	25			48	48	48	46	38	33	30
11½"	WARP	41	27			48	41	31	24			36	29	24			48	44	36	31	27			46	38	32	28			48	48	48	43	31	28	48	48	47	41	34	30	27	48	48	48	48	48	45	41
	BUTT	29				44	29					25					39	31	25					32	27					48	40	35	30			46	39	33	29	24			48	48	48	44	37	31	29
12"	WARP	39	26			48	39	29				35	28				48	42	35	30	26			44	36	31	28			48	48	47	41	30	27	48	48	45	40	33	28	26	48	48	48	48	48	43	39
	BUTT	27				42	27					25					37	30	25					31	25					46	39	33	29			45	37	32	28				48	48	48	42	35	30	27
12½"	WARP	38	25			48	38	28				33	27				48	40	33	29	25			42	35	30	26			48	48	45	39	28	26	48	48	43	38	32	27	25	48	48	48	48	48	41	38
	BUTT	27				40	27										35	28						29	25					44	37	32	27			42	35	30	27				48	48	45	40	34	29	26
13"	WARP	36	24			48	36	27				32	26				48	39	32	27	24			40	33	29	25			48	48	43	38	27	25	48	48	41	36	30	26	24	48	48	48	48	46	40	36
	BUTT	25				38	25										34	27						28						42	35	30	27			41	34	29	25				48	48	44	38	32	28	25
13½"	WARP	35				48	35	26				31	25				47	37	31	26				39	32	28	24			48	48	42	36	26	24	48	47	40	35	29	25		48	48	48	48	48	38	35
	BUTT	25				37	25										33	26						27						41	34	29	25			39	33	28	25				48	48	42	37	31	27	24
14"	WARP	34				48	34	25				30	24				45	36	30	25				37	31	27				48	47	40	35	25		48	45	38	34	28	24		48	48	48	48	43	37	34
	BUTT	24				35	24										32	25						26						39	33	28	25			38	32	27	24				48	47	40	35	30	26	
14½"	WARP	32				48	32	24				29					43	35	29	25				36	30	26				48	45	39	34	24		48	43	37	32	27			48	48	48	48	41	35	32
	BUTT					34											30	25						25						38	32	27	24			36	30	26					48	46	39	34	29	25	
15"	WARP	31				47	31					28					42	33	28	24				35	29	25				48	44	37	33	24		48	42	36	31	26			48	48	48	47	40	34	31
	BUTT					33											29							25						37	31	26				35	29	25					48	44	38	33	28	24	

*Spacing where the calculated pullout strength of the tiebar equals the calculated yield strength of the tiebar - 48 inch spacing indicates a calulated spacing of 4 feet or greater.

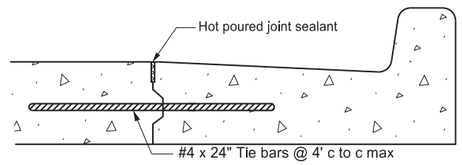

Curb and gutter sections

JOINT SEALER DETAILS

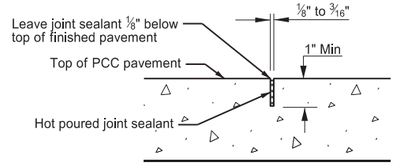

Typical section

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-15-2010	
REVISIONS	
DATE	CHANGE
10/23/2012	Expanded Tie Bar Table
03/16/2016	Updated Jt Details & notes
10/25/2019	Corrected "Typo" in Note 3
03/13/2025	Revised C&G Tie Bar Size

KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 ENGINEER NORTH DAKOTA


Kirk J Hoff

03/13/25

Docusign Envelope ID: 16F7A80B-8DD6-45CC-B8F9-AA9BED01BCFF

TRANSVERSE CONTRACTION JOINT DETAILS


D-550-3

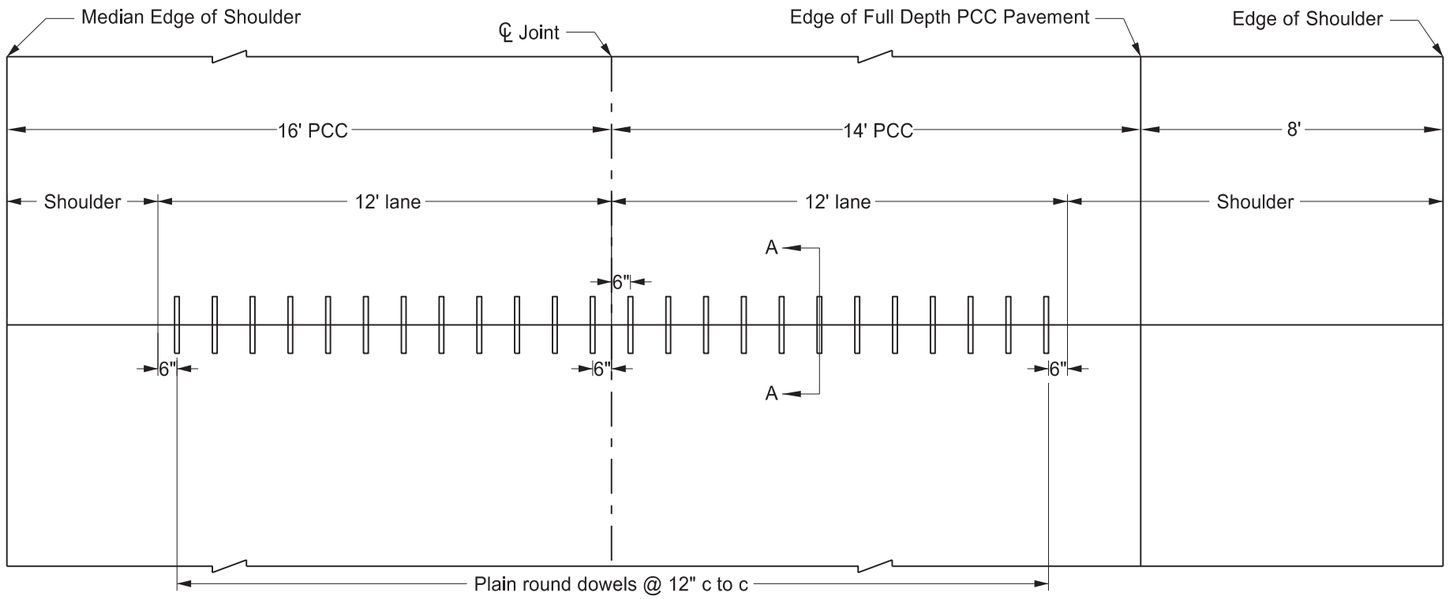


CONTRACTION JOINT DOWEL ASSEMBLY
INTERSTATE

Notes


1. The joint seal details apply to both doweled and non-doweled (plain) transverse joints.
2. T = Thickness of pavement.
3. B = T/4 + ¼" for AE or non-dowelled concrete pavement or
   B = T/3 for AAE or dowelled concrete pavement

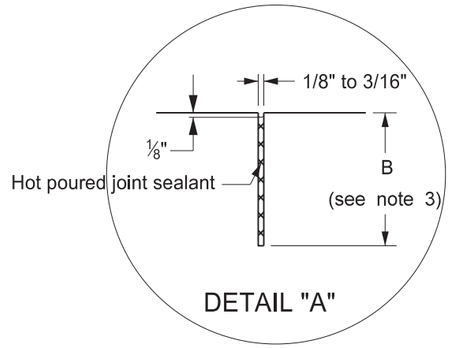

DETAIL "A"

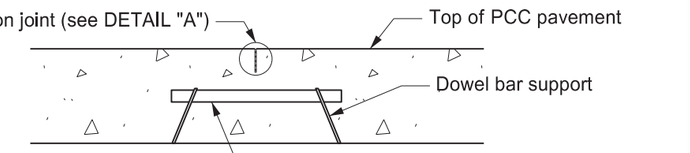

SECTION A-A

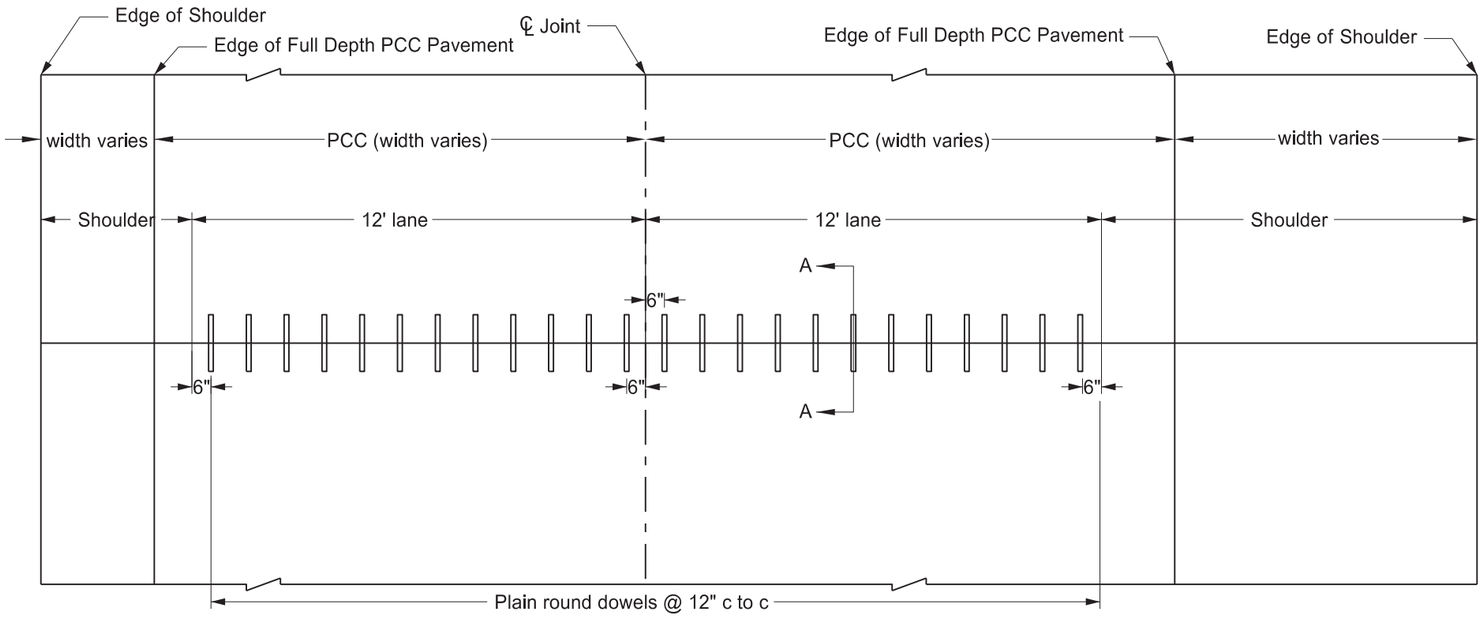

CONTRACTION JOINT DOWEL ASSEMBLY
NON-INTERSTATE

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-15-10	
REVISIONS	
DATE	CHANGE
6/23/2014	Removed dowel size reference
3/16/2016	Revised Joint Details and notes
10/25/2019	Expanded Details for clarity
03/13/2025	Revised # of Dowels & Note 3.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


03/13/25


DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

TRAFFIC CONTROL FOR CORING OF HOT BITUMINOUS PAVEMENT

D-704-2


Two Lane, Two Way Roadways

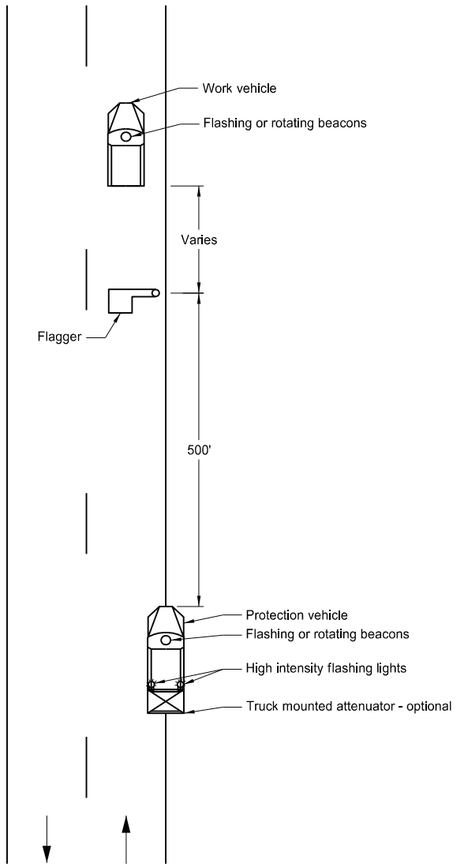


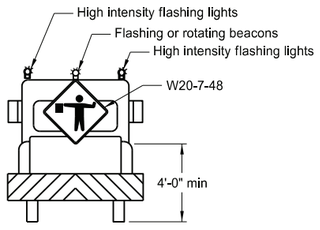

Typical Protection Vehicle

Multilane Roadways

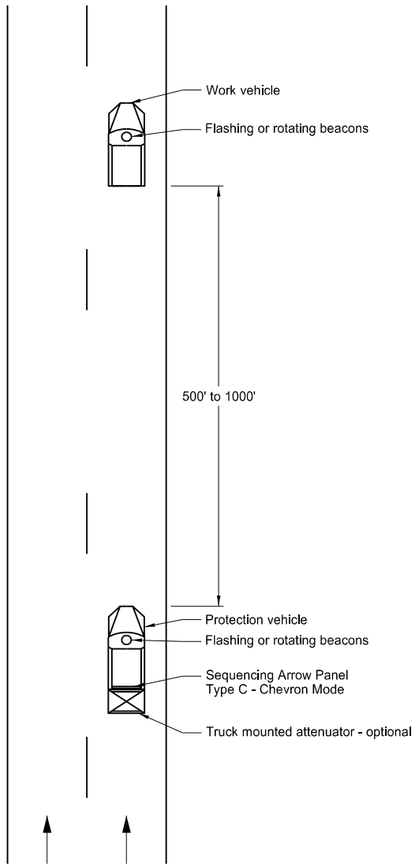

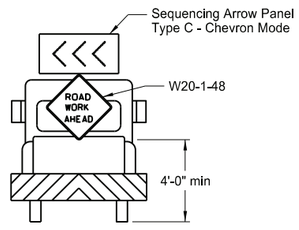

Typical Protection Vehicle

Notes:

1. Display a 360 degree rotating, flashing, oscillating or strobe light on the working vehicle.

2. Display a 360 degree rotating, flashing, oscillating or strobe light on the shadow vehicle. Operate a sequencing arrow panel Type C in chevron mode on the shadow vehicle for Multilane Roadway.

3. Use these layouts during daylight hours and in areas of good visibility only.

4. Use flagger to protect the work area and warn oncoming traffic for two lane, two way roadway.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-7

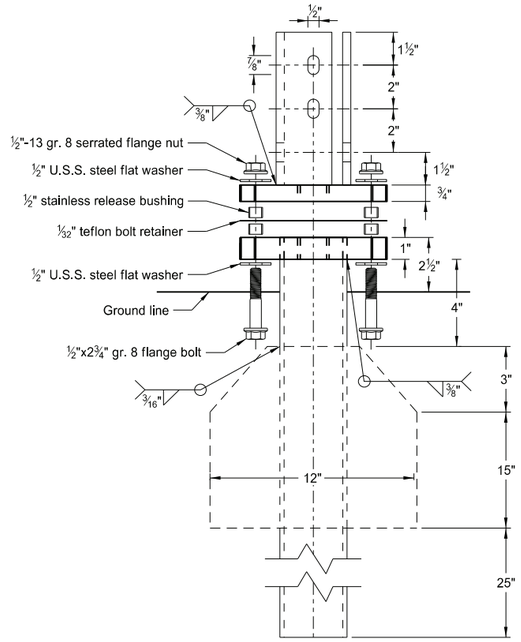


Multi-Directional
Slip Base Assembly


Perforated Tube

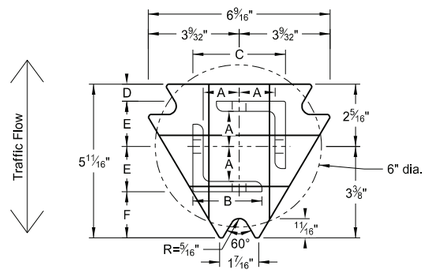


Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2½"x2½"x⅜" ASTM A36 structural angle

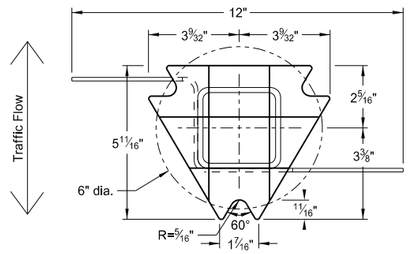


Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50

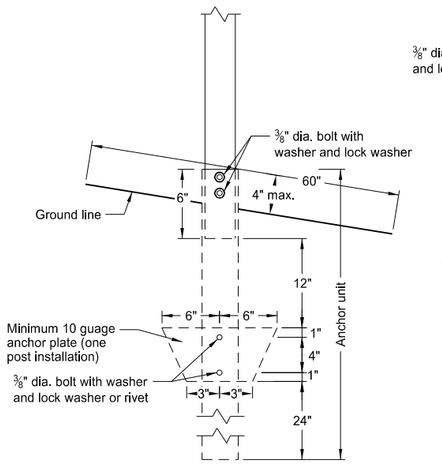


Anchor Unit and Post Assembly

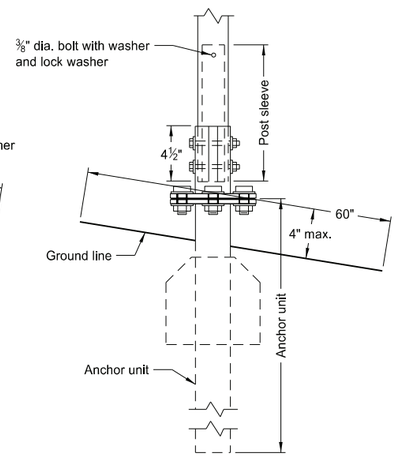

Multi-Directional
Slip Base Anchor Unit
and Post Sleeve Assembly

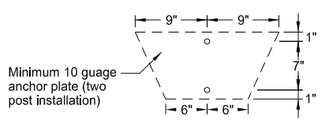

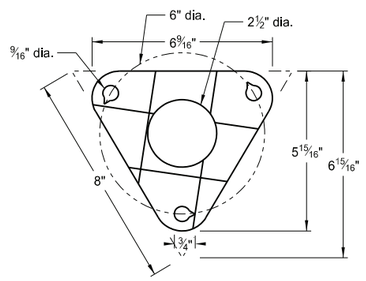

Bolt Retainer for Base Connection
Bolt Retainer- 1/32" Reprocessed Teflon

Notes:

1. Torque slip base bolts as specified by manufacturer.
2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
4. In concrete sidewalk, use same anchor without wings.
5. Provide more than 7' between the first and fourth posts of a four post sign.

Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thick-ness Gauge	Sleeve Size in.	Wall Thick-ness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2¼
1	2¼	12			No	2½
1	2½	12			(A)	3
1	2½	10			Yes	
1	2¼	12	2	12	Yes	
1	2½	12	2¼	12	Yes	
2	2	12			No	2¼
2	2¼	12			No	2½
2	2½	12			Yes	
2	2½	12			Yes	
2	2¼	10	2	12	Yes	
2	2½	12	2¼	12	Yes	
3 & 4	2½	12			Yes	
3 & 4	2½	10			Yes	
3 & 4	2½	12	2¼	12	Yes	
3 & 4	2¼	12	2	12	Yes	
3 & 4	2½	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in.⁴	Cross Sec. Area in.²	Section Modulus in.³
1½ x 1½	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2¼ x 2¼	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2½ x 2½	0.105	12	3.141	0.804	0.803	0.643
2½ x 2½	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 9/64"	2½"	3 1/32"	25/32"	1 33/64"	1 7/8"
2½"x10 ga.	1 9/32"	2½"	3 5/16"	⅝"	1 21/32"	1¾"

(A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.

(B) For additional wind load, insert the 2 3/16"x10 ga. into 2½"x10 ga.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

U-Channel Post

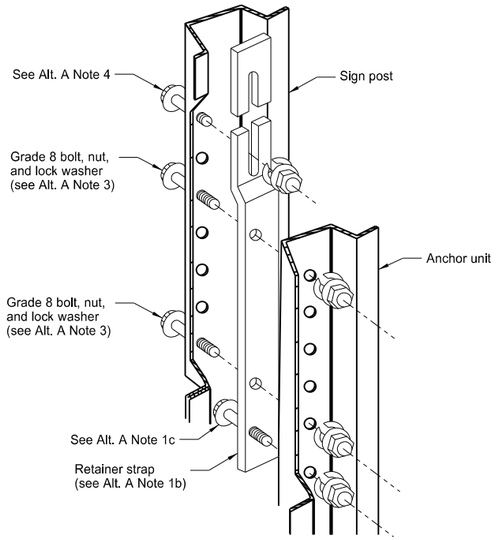


Detail A

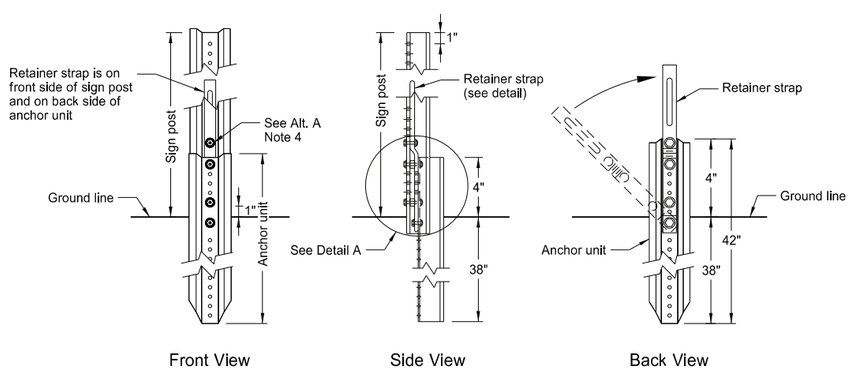


Front View | Side View | Back View

Breakaway U-Channel Detail Alternate A

Install a maximum of 2 posts within 7'.

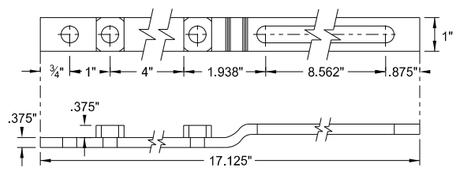


Retainer Strap Detail

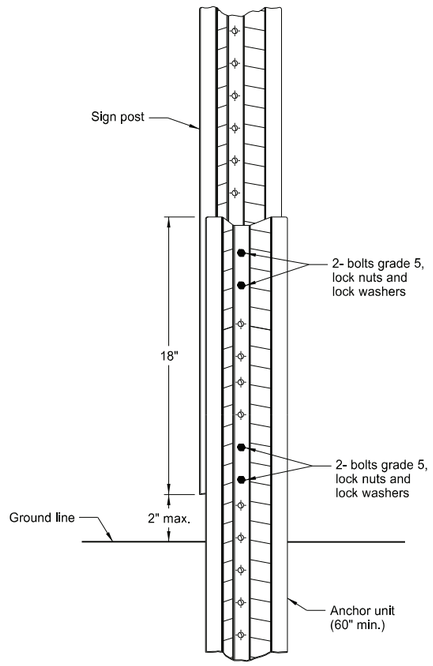

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.

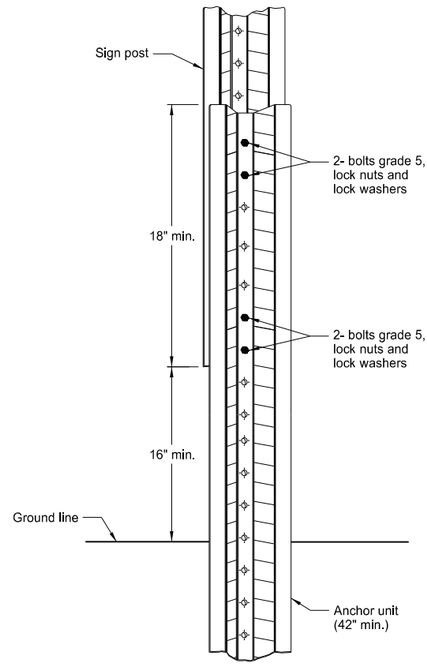

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.

Alternate A Steps of Installation:

1. a) Drive anchor unit to within 12" of ground level.
   b) Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
   c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
   d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
   b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
   b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24


Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS


D-704-9

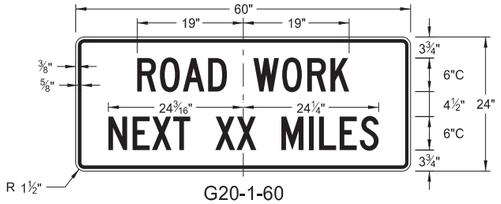


G20-1-60
Legend: black (non-refl)
Background: orange

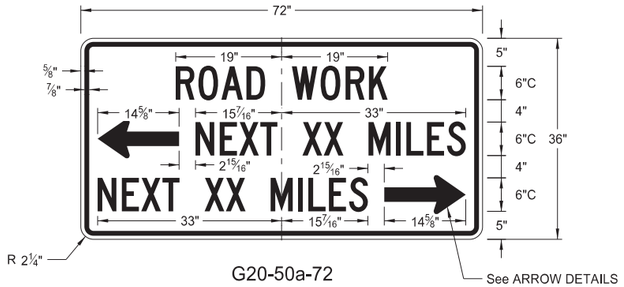


G20-50a-72
Legend: black (non-refl)
Background: orange

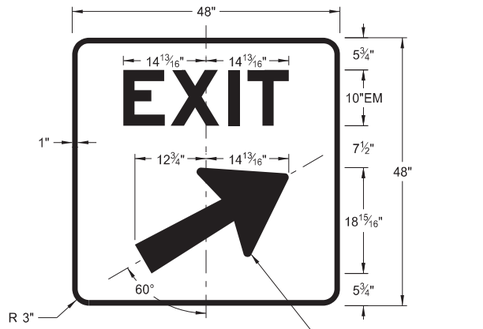


E5-1(L or R)-48
Legend: white
Background: green (orange optional)

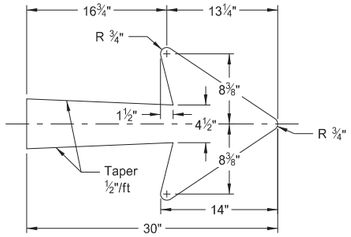


E5-1-48

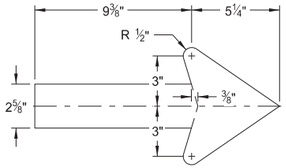


G20-50a-72
G20-52a-72

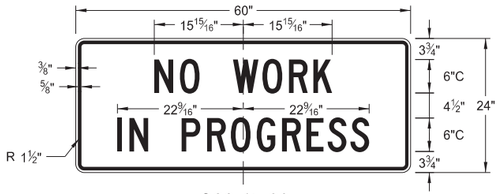


G20-1b-60
Legend: black (non-refl)
Background: orange

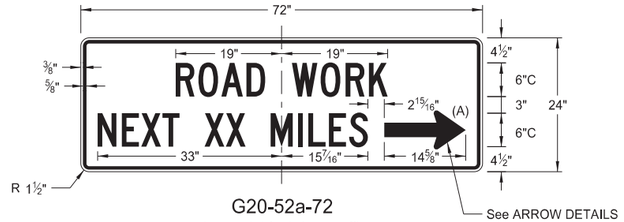


G20-52a-72
Legend: black (non-refl)
Background: orange

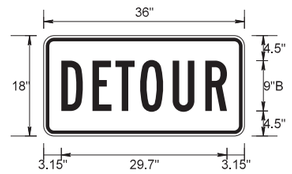


M4-8-36
Legend: black (non-refl)
Background: orange

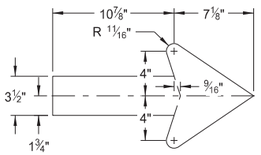


M4-9(L or R)-30
Right or Left

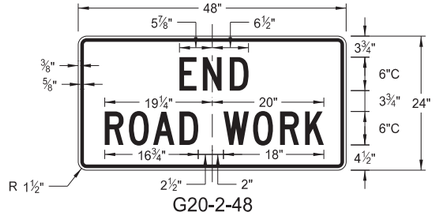


G20-2-48
Legend: black (non-refl)
Background: orange

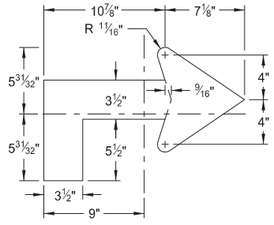

M4-9(L or R)-30
Advanced Right or Left




M4-9-30
Straight

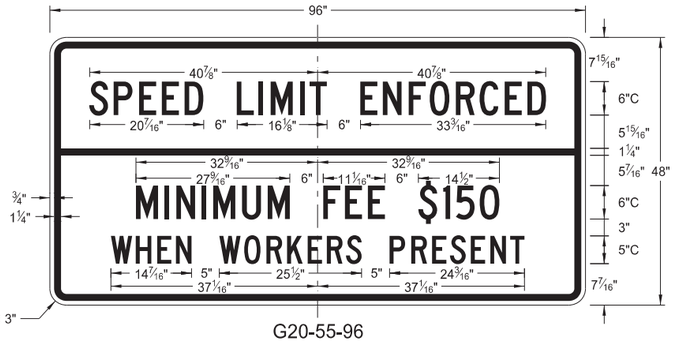

G20-55-96
Legend: black (non-refl)
Background: orange



G20-4b-36
Legend: black (non-refl)
Background: orange

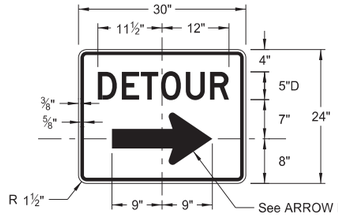

M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange

ARROW DETAILS

NOTES:


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added sign & background color
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB


CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS

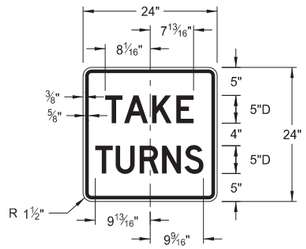


R1-50P-24
Legend: black (non-refl)
Background: white

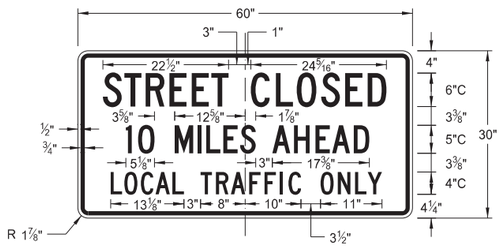

R11-3c-60
Legend: black (non-refl)
Background: white

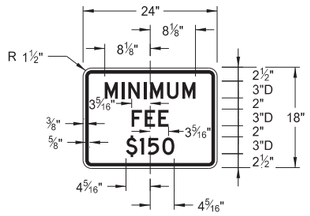

R2-1aP-24
Legend: black (non-refl)
Background: white

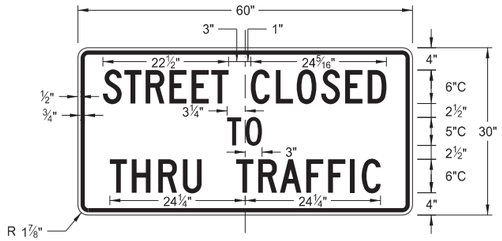

R11-4a-60
Legend: black (non-refl)
Background: white



R11-2a-48
Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Revised sign number
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

CONSTRUCTION SIGN DETAILS
WARNING SIGNS


D-704-11

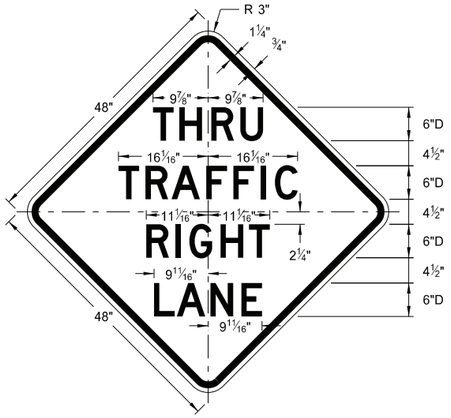


W5-8-48
Legend: black (non-refl)
Background: orange

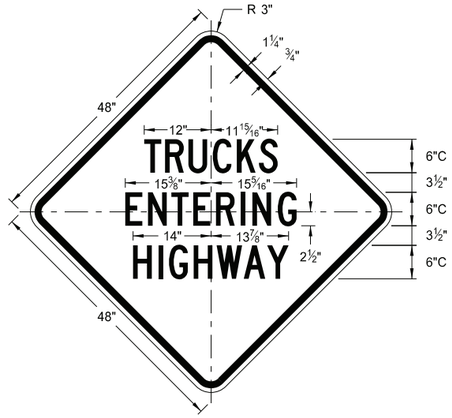


W8-53-48
Legend: black (non-refl)
Background: orange

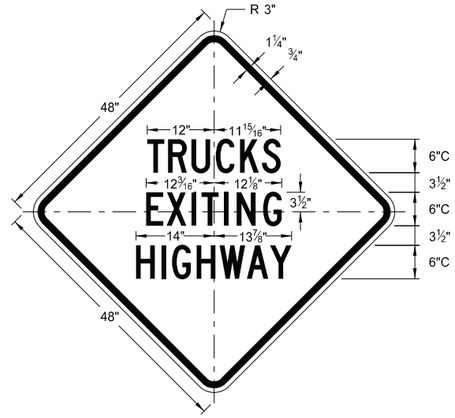


W8-56-48
Legend: black (non-refl)
Background: orange

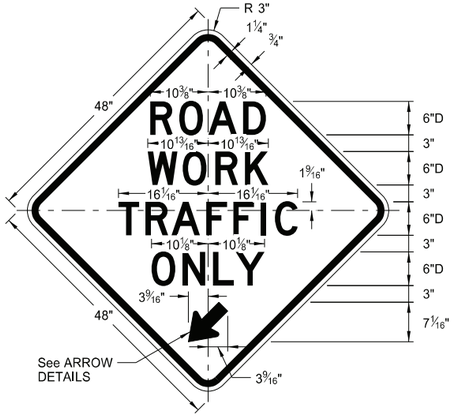


W5-9-48
Legend; black (non-refl)
Background: orange

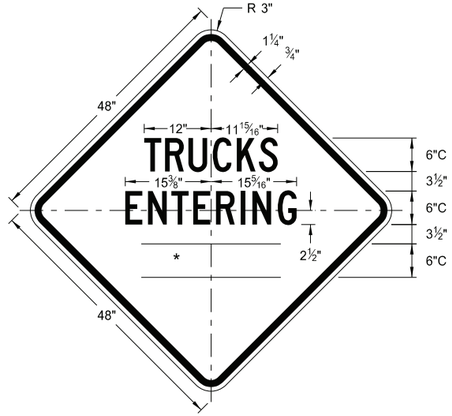


W8-54-48
Legend; black (non-refl)
Background: orange

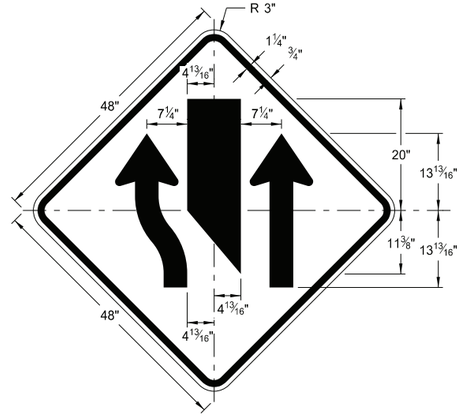

W9-3a-48
Legend; black (non-refl)
Background: orange

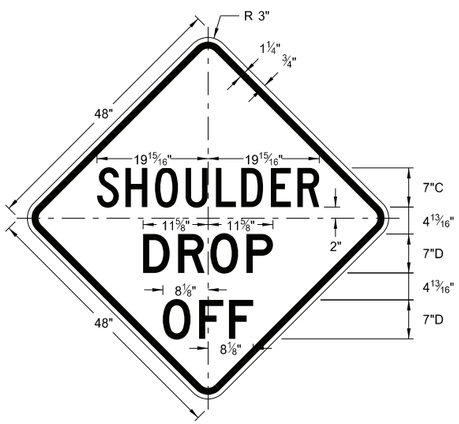


W8-9a-48
Legend: black (non-refl)
Background: orange

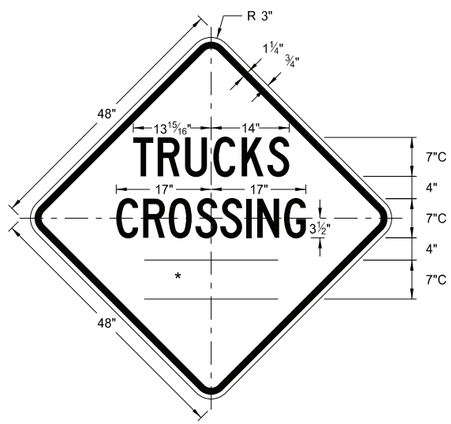


W8-55-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES



W5-9-48

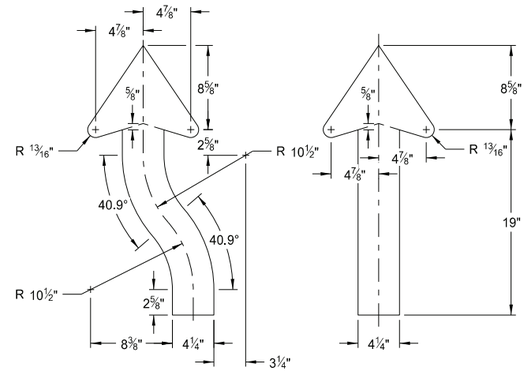

W9-3a-48

ARROW DETAILS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Updated sign number
5-31-18	Revised sign and arrow details
10-03-19	New Design Engineer PE Stamp
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24


DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

CONSTRUCTION SIGN DETAILS
WARNING SIGNS


D-704-11A

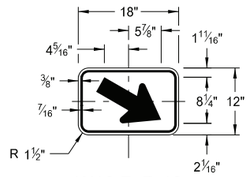

W16-7aP-18
Legend: black (non-refl)
Background: orange

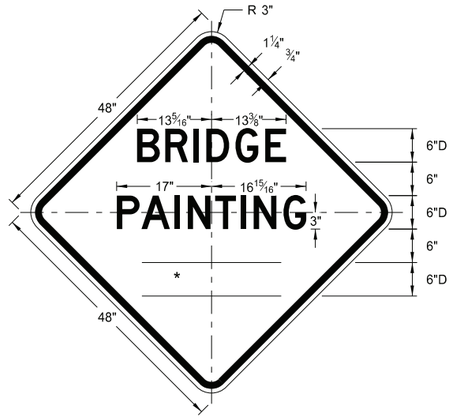


W21-50-48
Legend: black (non-refl)
Background: orange

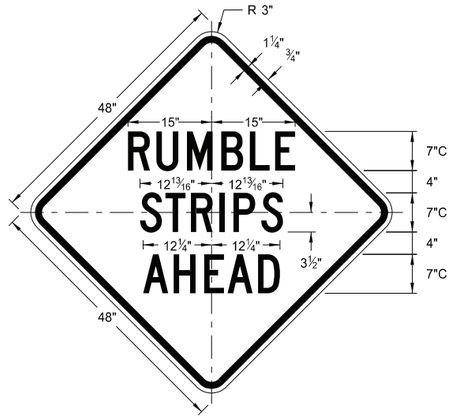


W21-53-48
Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

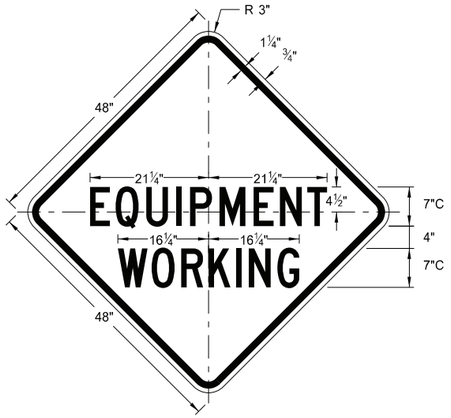


W20-51-48
Legend: black (non-refl)
Background: orange

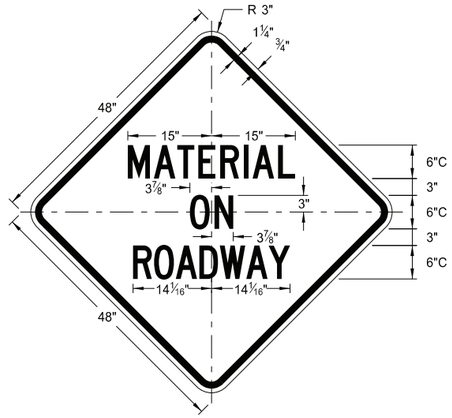


W21-51-48
Legend: black (non-refl)
Background: orange

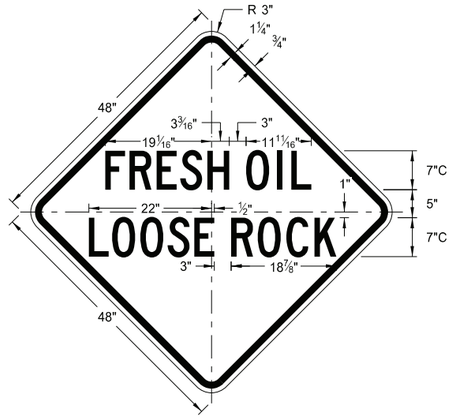


W22-8-48
Legend: black (non-refl)
Background: orange

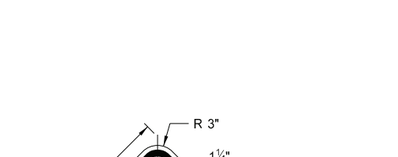

W20-52P-54
Legend: black (non-refl)
Background: orange

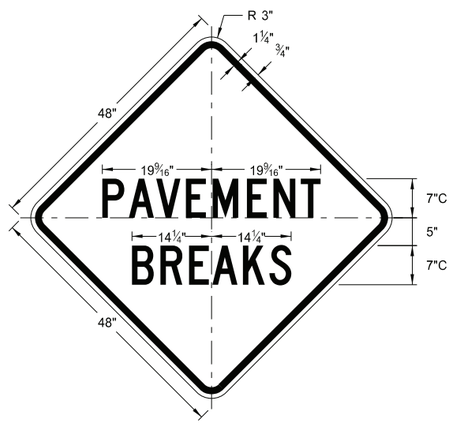

W21-52-48
Legend: black (non-refl)
Background: orange

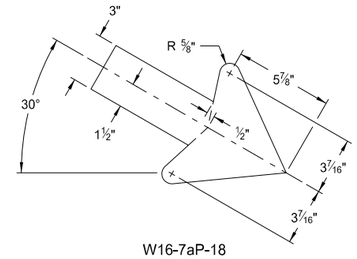

W16-7aP-18

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
5-31-18	
REVISIONS	
DATE	CHANGE
11-01-19	Added details for sign W16-7aP-18.
8-01-24	Electronic Stamp/Signature.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


BARRICADE AND CHANNELIZING DEVICE DETAILS

D-704-13

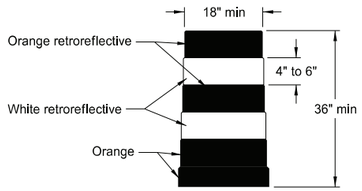


DELINEATOR DRUM

Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectorized spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.

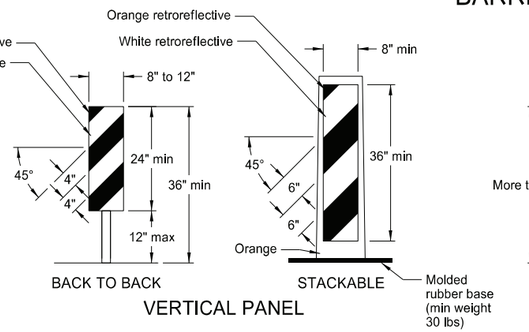


VERTICAL PANEL

Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

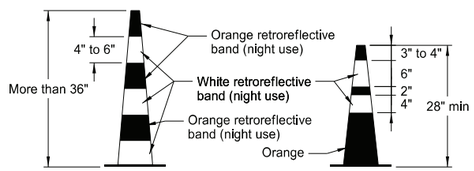


TRAFFIC CONE

Provide retroreflectorization of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectorized space between the orange and white stripes.

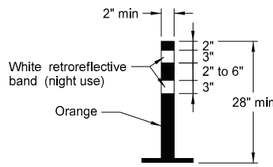

TUBULAR MARKER


Provide retroreflectorization of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

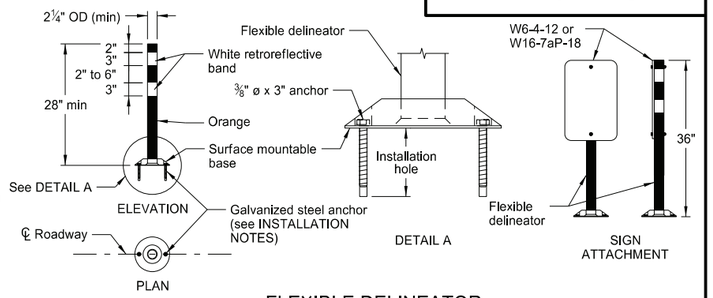


FLEXIBLE DELINEATOR

INSTALLATION NOTES:

1. Drill installation holes to diameter and depth required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

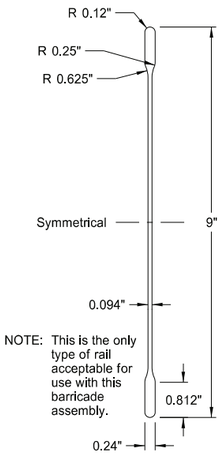


BARRICADE BLADE DETAIL

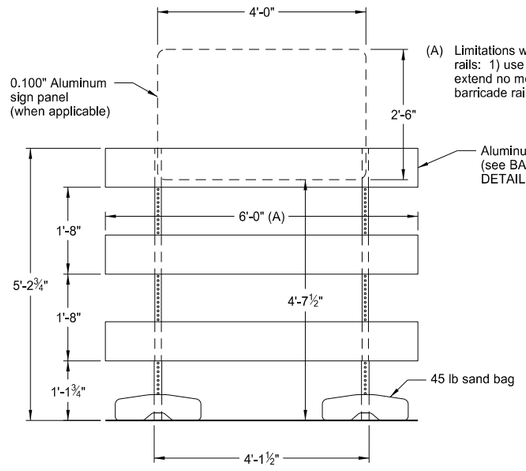


ELEVATION VIEW

(A) Limitations when using 8'-0" barricade rails: 1) use no sign panel, and 2) extend no more than 1'-0" of the barricade rail past the uprights.

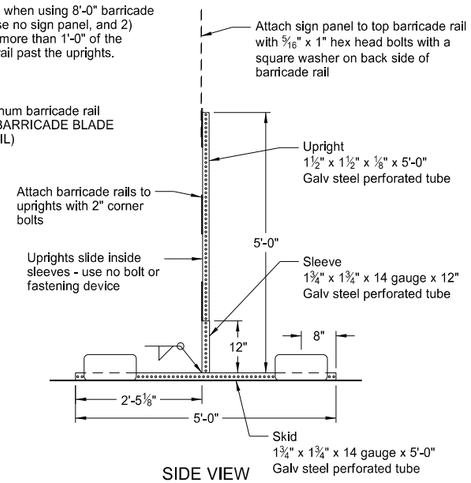


SIDE VIEW

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

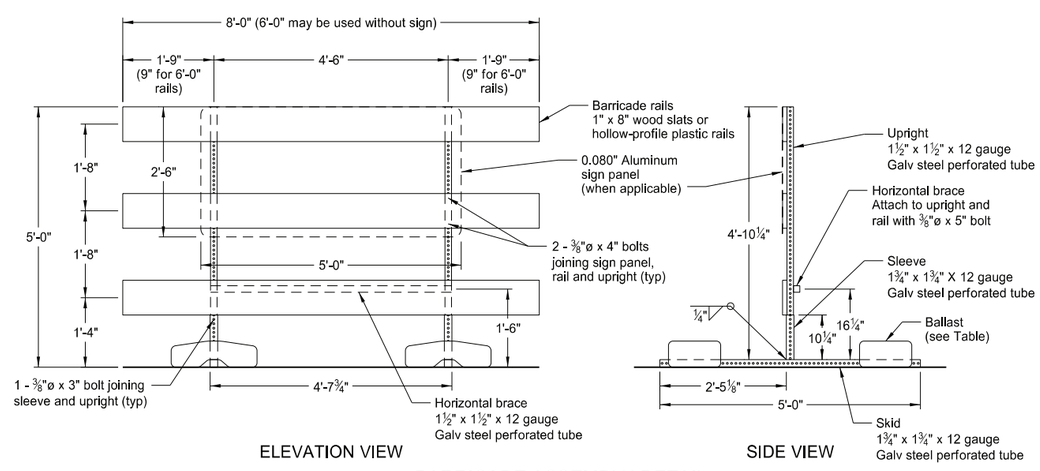


BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)


NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".

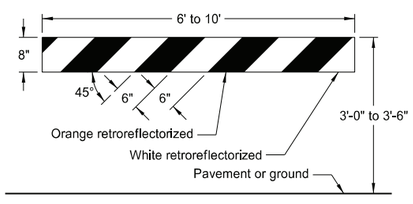

TYPE I BARRICADE

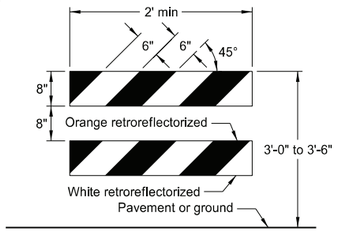



TYPE II BARRICADE

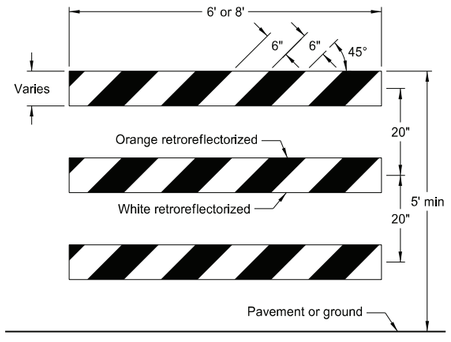


TYPE III BARRICADE

BARRICADE RAIL DETAILS



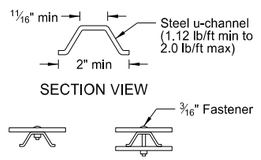

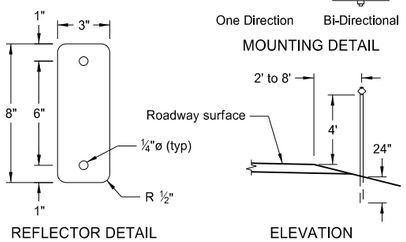

DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags

Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
11-01-19	Revised details for Flexible Delineator
8-01-24	Electronic Stamp/Signature

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

D-704-14


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

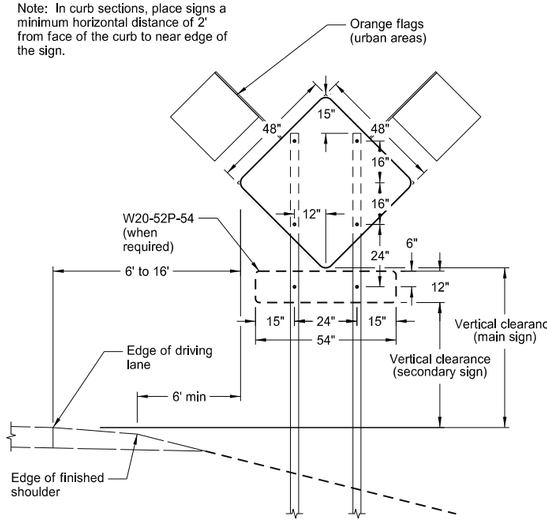


TYPICAL SECTION
(48" x 48" diamond warning sign shown)

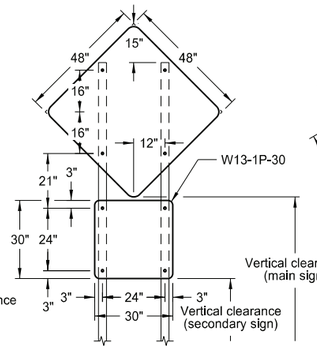


48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)

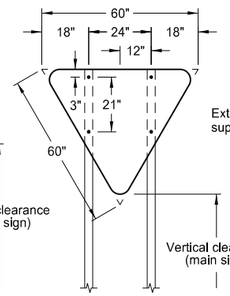


R1-2-60 - YIELD SIGN

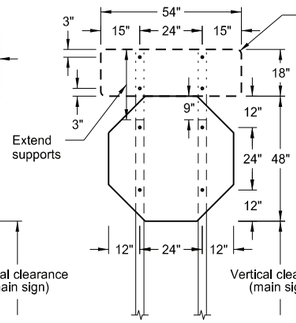


R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)

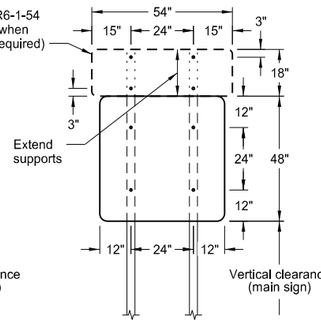


48" x 48" SIGN
(with R6-1-54 sign as required)




24" x 36" SIGN

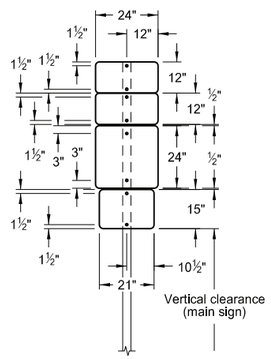


24" x 24"
ROUTE MARKER
ASSEMBLY




18" x 18"
DIAMOND SIGN

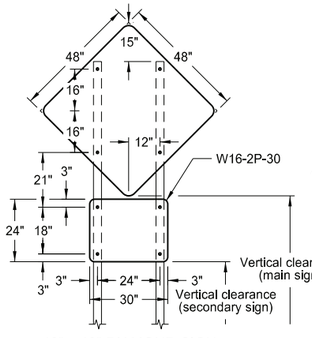


48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)

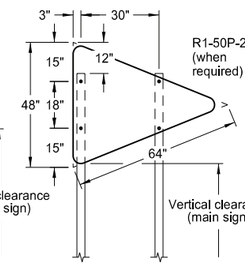


W14-3-64 - PENNANT SIGN

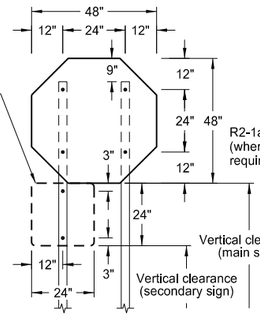


R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)

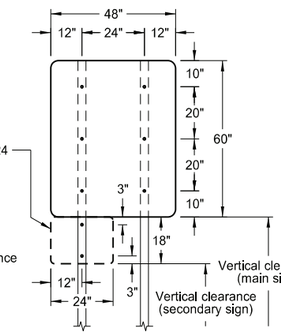


48" x 48" SIGN
(with R2-1aP-24 sign as required)




30" x 24" SIGN

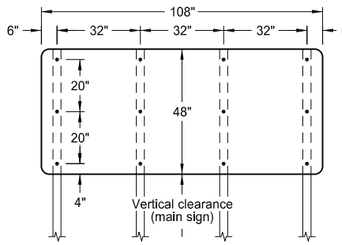


108" x 48" SIGN

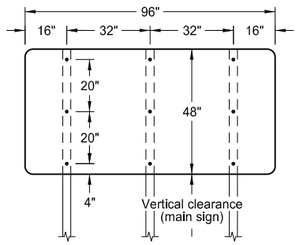


96" x 48" SIGN




72" x 36" SIGN




72" x 24" SIGN

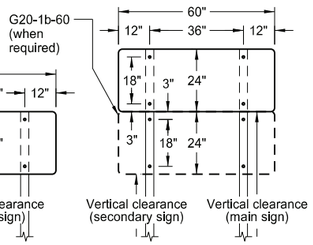


60" x 24" SIGN




48" x 24" SIGN

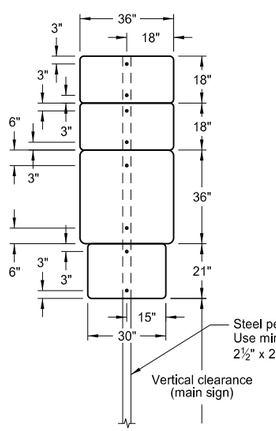

36" x 36"
ROUTE MARKER
ASSEMBLY

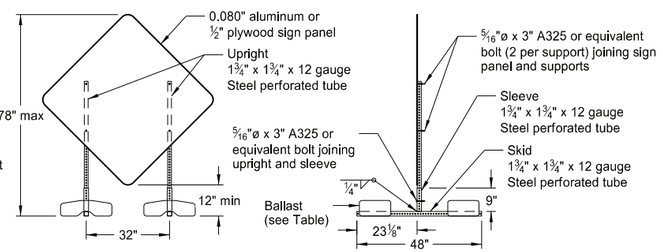

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

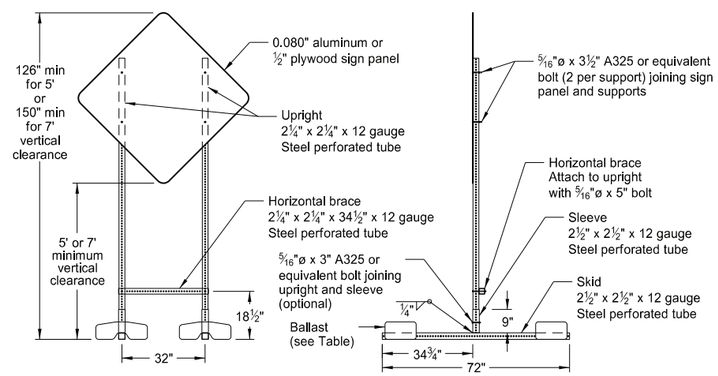

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

   Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

   Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅜" bolts.

3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

   Interstate - white legend on blue background
   Interstate Business Loop - white legend on green background
   US and State - black legend on white background
   County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

   The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

   Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

   Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

   Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

10-4-13

REVISIONS

DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail
8-01-24	Electronic Stamp/Signature


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

TERMINAL AND SEAL COAT SIGN LAYOUTS

D-704-20

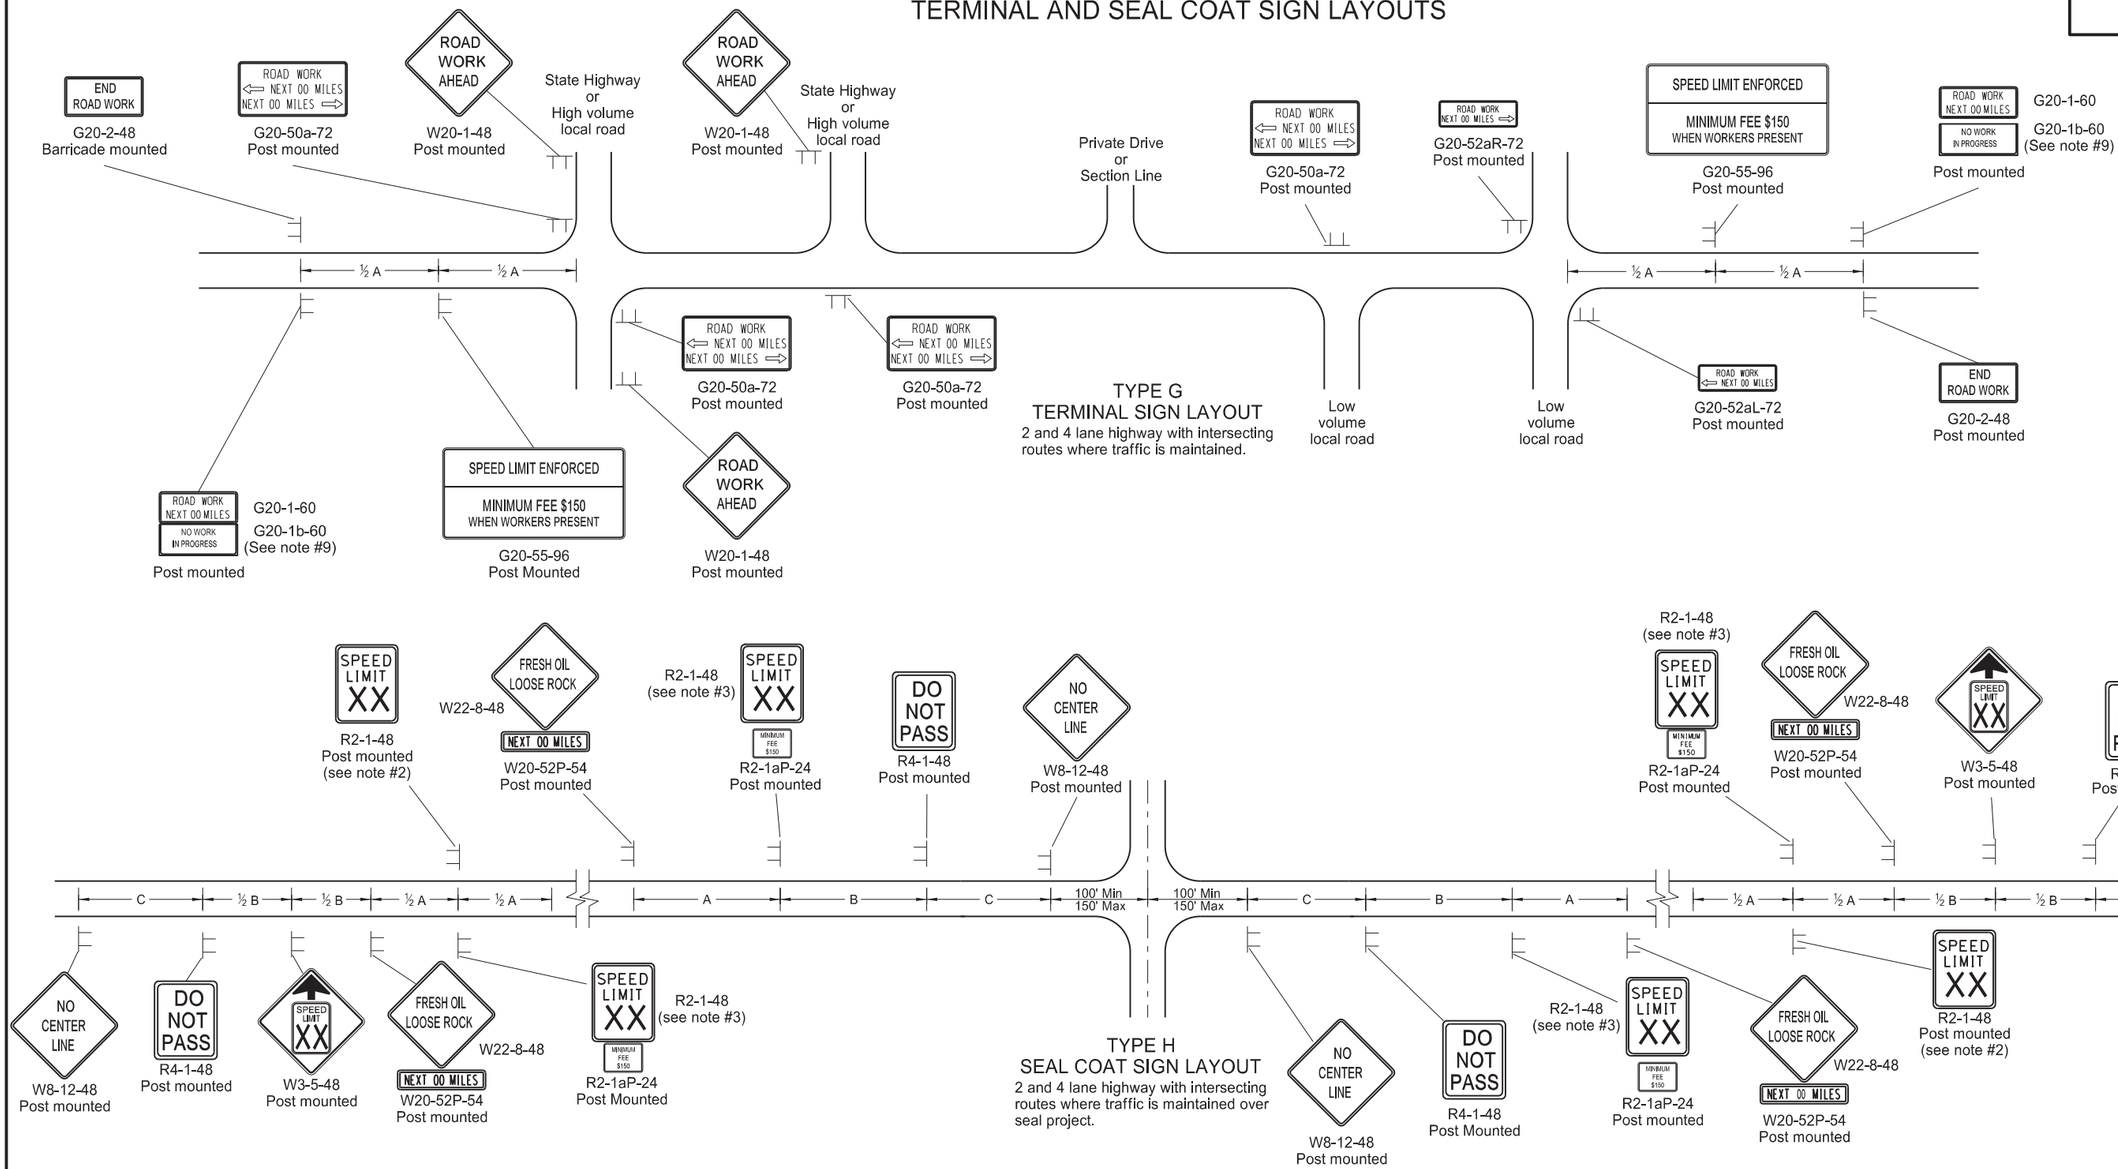

Notes:

1. Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
2. Determine the exact speed limit in the field, based on location and conditions.
3. Determine the reduced speed limit based on the in place speed limit before construction. Where speed limit reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at ½ B.
4. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
5. Cover existing speed limit signs within a reduced speed zone.
6. On seal coat projects, place signs R2-1-48, R2-1aP-24, R4-1-48, W22-8-48 and W20-52P-54 after all important intersections and at five mile intervals. Place sign W8-12-48 after all important intersections and at 2 mile intervals until short term center line pavement marking is placed.
7. As an option, use portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Drawing D-704-14.
8. Cover or remove speed limit signs from layout Type H when loose aggregate is removed.
9. Install sign G20-1b-60 when work is suspended for winter.
10. Use other traffic control layouts in immediate work areas. Place sign R2-1aP-24 below speed limit signs in reduced speed limit work areas.
11. Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
12. Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-27-13

REVISIONS

DATE	CHANGE
08-17-17	Updated notes & sign numbers
11-01-19	Updated note & sign
12-08-21	Switched order of Road Work and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes


KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 06/30/25 ENGINEER NORTH DAKOTA

Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

CONSTRUCTION TRUCK AND TEMPORARY DETOUR LAYOUTS


D-704-22

KEY: Type III barricade; Work area; Sign; Flagger

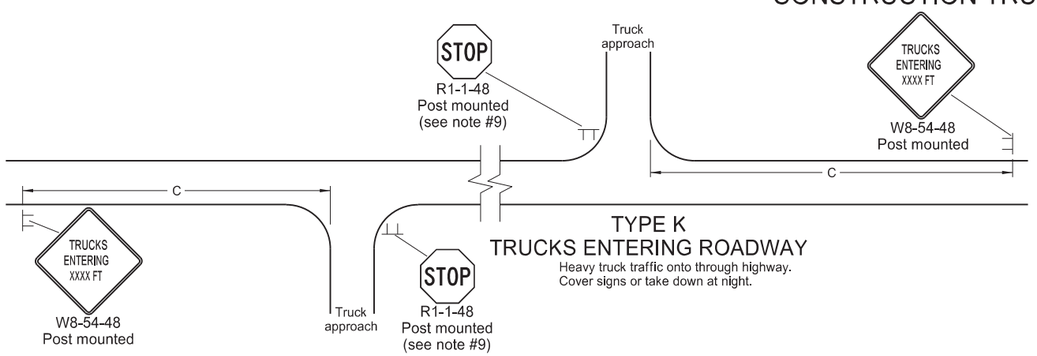


TYPE K
TRUCKS ENTERING ROADWAY

Heavy truck traffic onto through highway.
Cover signs or take down at night.

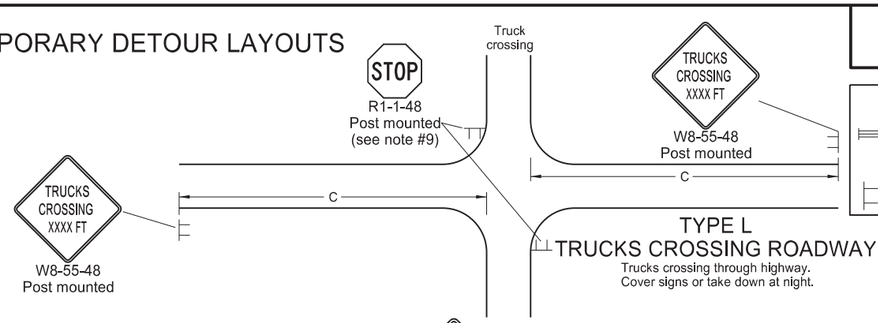

TYPE L
TRUCKS CROSSING ROADWAY

Trucks crossing through highway.
Cover signs or take down at night.

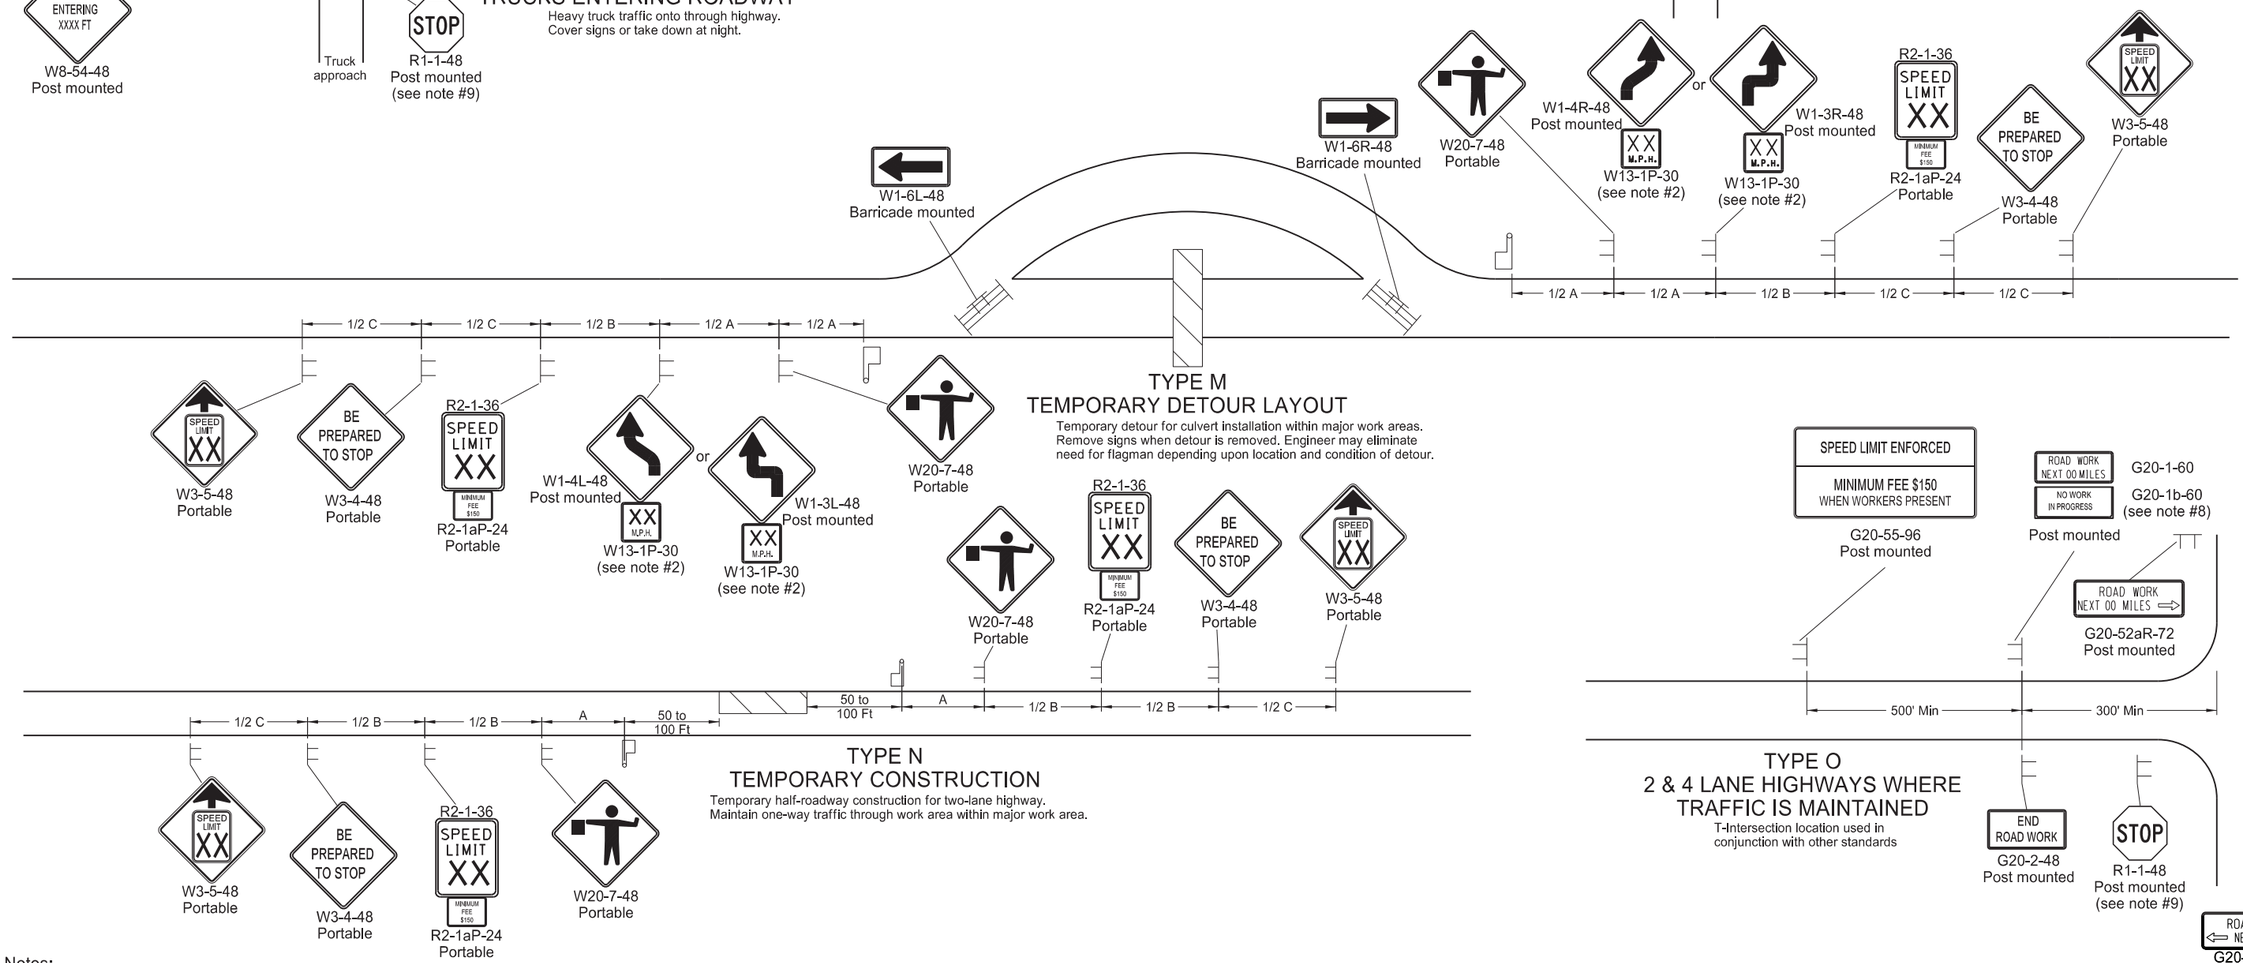

TYPE M
TEMPORARY DETOUR LAYOUT

Temporary detour for culvert installation within major work areas.
Remove signs when detour is removed. Engineer may eliminate need for flagman depending upon location and condition of detour.

TYPE N
TEMPORARY CONSTRUCTION

Temporary half-roadway construction for two-lane highway.
Maintain one-way traffic through work area within major work areas.

TYPE O
2 & 4 LANE HIGHWAYS WHERE TRAFFIC IS MAINTAINED

T-Intersection location used in conjunction with other standards

Notes:

1. Place barricades on a moveable assemblies and signs on portable assemblies when located on roadway.
2. Where necessary, safe speed to be determined by the Engineer.
3. Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½ B.
4. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
5. Cover existing speed limit signs within a reduced speed zone.
6. Covered (when approved by engineer) or obliterated pavement marking measured as Obliteration of Pavement Marking.
7. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
8. Install sign G20-1b-60 when work is suspended for winter.
9. If existing stop sign is in place, a 48" stop sign is not required.
10. Sign G20-55-96 is not required if layout is part of other traffic control that contains this sign, or if work is less than 15 days.
11. Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

ADVANCE WARNING SIGN SPACING

Road Type	Distance Between Signs Min. (ft) A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-27-13

REVISIONS


DATE	CHANGE
08-17-17	Update notes & sign numbers
11-01-19	Revised sign numbers & note 7
12-09-21	Added Speed Limit Enforced and Dollars At Work signs
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes

KIRK J. HOFFMANN
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

MISCELLANEOUS SIGN LAYOUTS


D-704-26

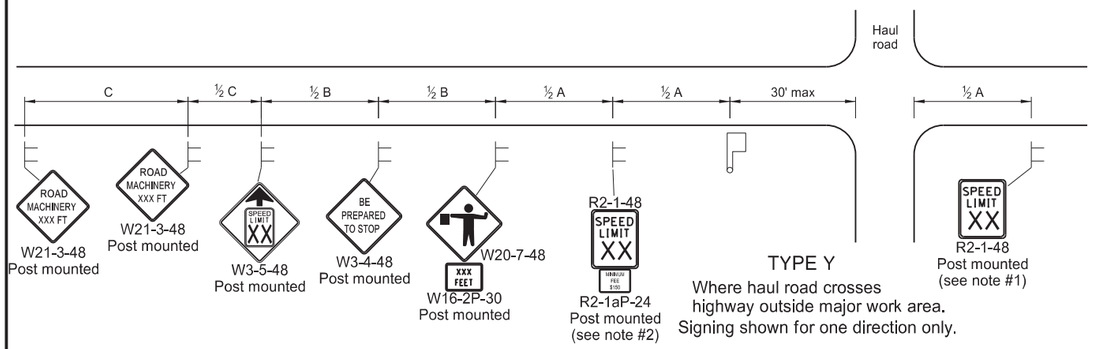


TYPE Y
Where haul road crosses highway outside major work area.
Signing shown for one direction only.

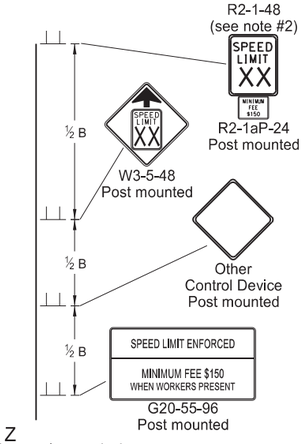


TYPE Z
Where speed zone is needed
Signing shown for one direction only.

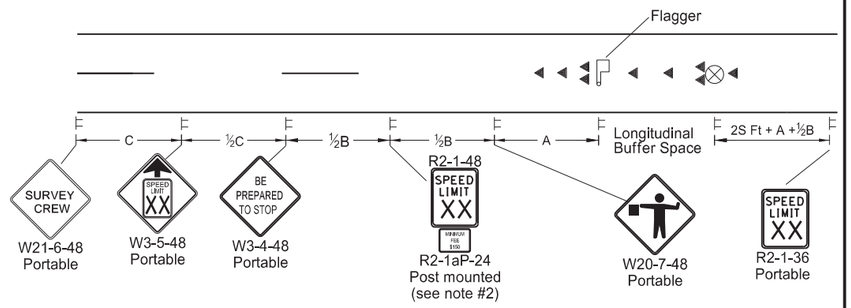


TYPE AA
Where survey crew is used
Signing shown for one direction only.

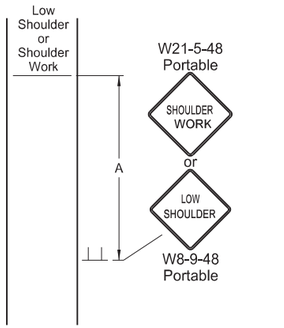


TYPE BB
Within major work area where sign conditions exist

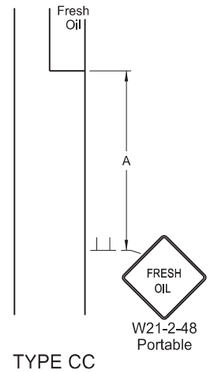


TYPE CC
Where sign conditions exist

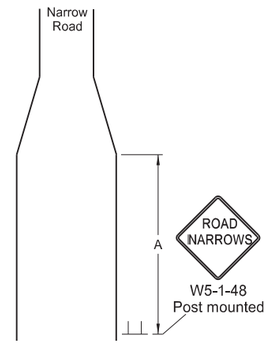


TYPE DD
Where sign conditions exist

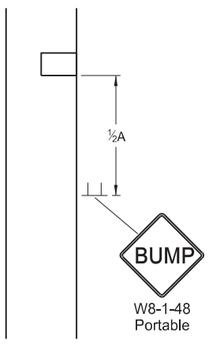


TYPE EE
Where sign conditions exist

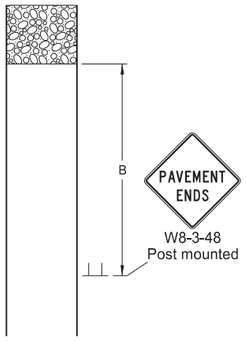

TYPE FF
Where sign conditions exist
Signing shown for one direction only.

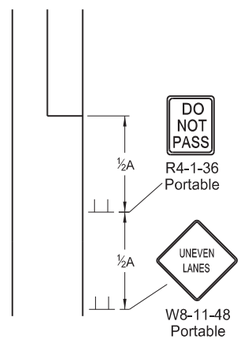


TYPE GG
Where elevation difference exists between lanes

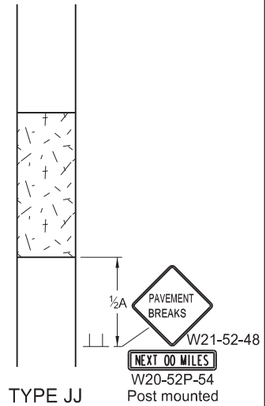

TYPE JJ
For break in pavement.
Install signs when conditions exist and remove when not applicable.
Signing shown for one direction only.

KEY
Flagger
Sign
Cones
Survey Equipment
S = Numerical value of speed limit or 85th percentile.

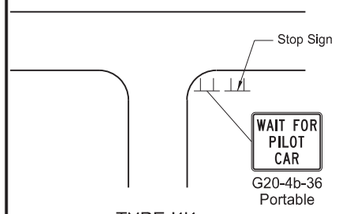

TYPE KK
At major intersections within pilot car control area

Notes
1. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
2. Determine reduced speed limit based on in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½B.
3. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
4. Cover existing speed limit signs within reduced speed zones.
5. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
6. Sign G20-55-96 is not required if this standard is part of other traffic control layouts, or work is less than 15 days.
7. When pilot car operation is used, place sign G20-4b-36 "Wait For Pilot Car" at major intersections within pilot car control area.
8. Recommend 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.
9. Layouts shown for one direction only.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820
80	910

* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-27-13

REVISIONS


DATE	CHANGE
08-17-17	Added speed limit signs. Updated notes & sign numbers
11-01-19	Revised note 5 & sign numbers
02-23-23	Revised distance & removed signs
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


DocuSign Envelope ID: 3284CF4B-204D-426B-8A3F-BDE7624EB5B7

MOBILE OPERATION
(PAVEMENT MARKING)


D-704-27

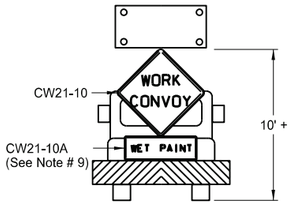

Typical Shadow Vehicle 1
Two-Way Roaday

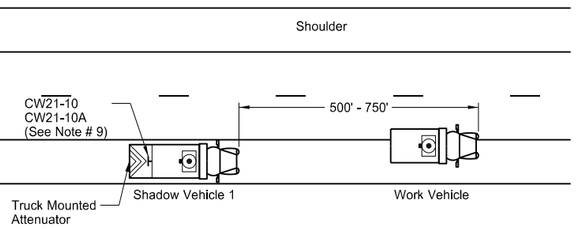


Two-Way Roadway with Paved Shoulders

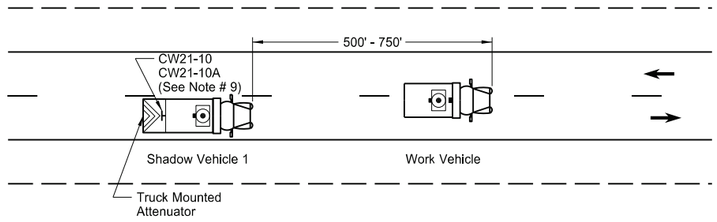


Two-Way Roadway without Paved Shoulders


Sign Details

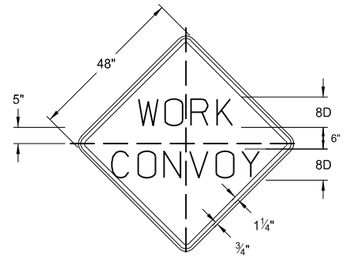

CW21-10

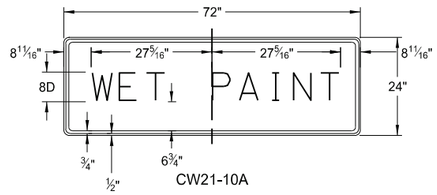


CW21-10A

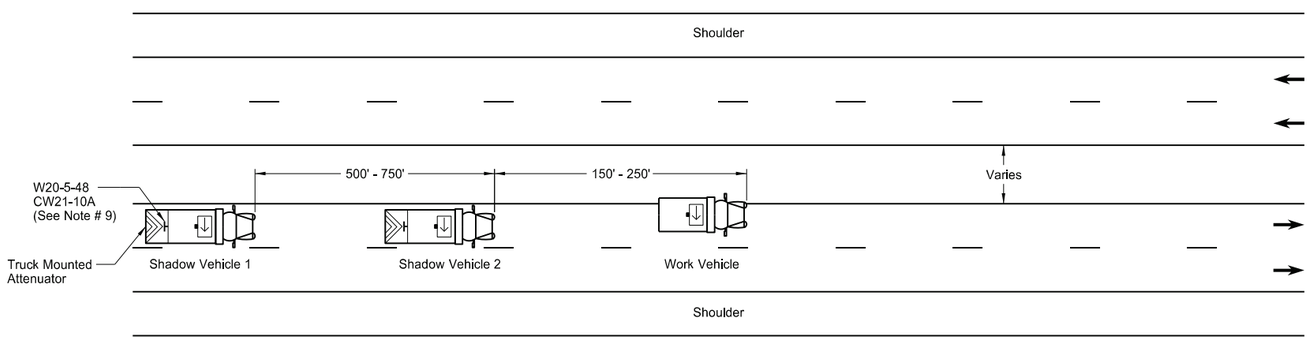


Undivided Multi-Lane Roadway

Notes
1. Use additional vehicles you choose to be in the convoy with truck mounted attenuators, at your own expense.
2. Display yellow rotating beacons or stobe lights on shadow and work vehicles, unless otherwise stated in the plans.
3. Use Type B or Type C flashing arrow panels controlled from inside the vehicle.
4. Provide each vehicle with two-way electronic communication capability.
5. Move shadow vehicle 1 first to shadow other convoy vehicles when convoy changes lane.
6. Vary vehicle spacing between shadow vehicle 1 and shadow vehicle 2 based on sight distance restrictions. Motorists approaching the work convoy need to see trail vehicle in time to slow down and/or change lanes as they approach shadow vehicle.
7. Sign Colors
   Letters = Black
   Border = Black
   Background = Orange
8. As an option, use shadow vehicle 2 the paint tender vehicle.
9. Use sign CW21-10A only during painting operation.
10. Pull over work and shadow vehicles periodically to allow motor vehicle traffic to pass on two lane - two way roadways.

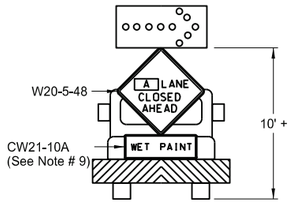

Typical Shadow Vehicle 1 & 2
Multi-Lane Highways

A = Left Right Center

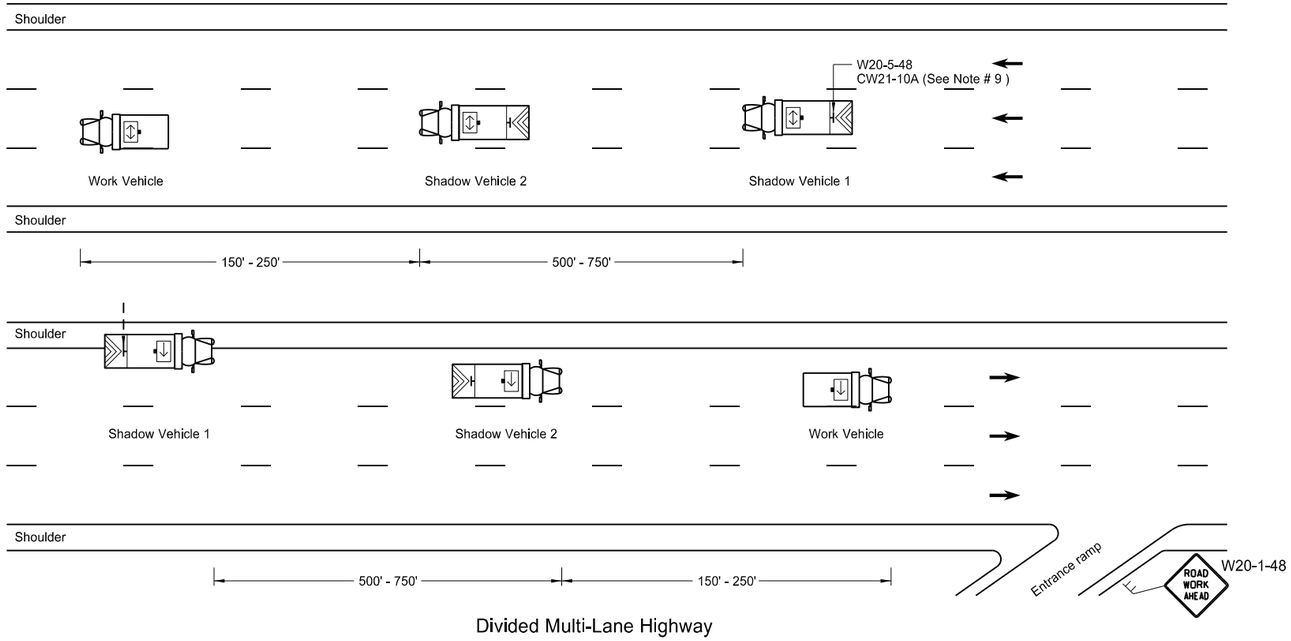

Divided Multi-Lane Highway

KEY

- Sign
- Truck mounted attenuator
- Flashing arrow panels:
  - Right directional
  - Left directional
  - Double arrow directional
  - Caution Mode

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

9-27-13

REVISIONS

DATE	CHANGE
6-18-14	Removed shadow vehicle 2 on two lane roadways
9-27-17	Updated to active voice
11-08-19	Changed Standard Heading
8-02-24	Electronic Stamp/Signature.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/02/24

Docusign Envelope ID: E17899F0-B912-4482-BF85-7148763D5F5D

SIGN LAYOUT FOR ONE LANE CLOSURE

D-704-34

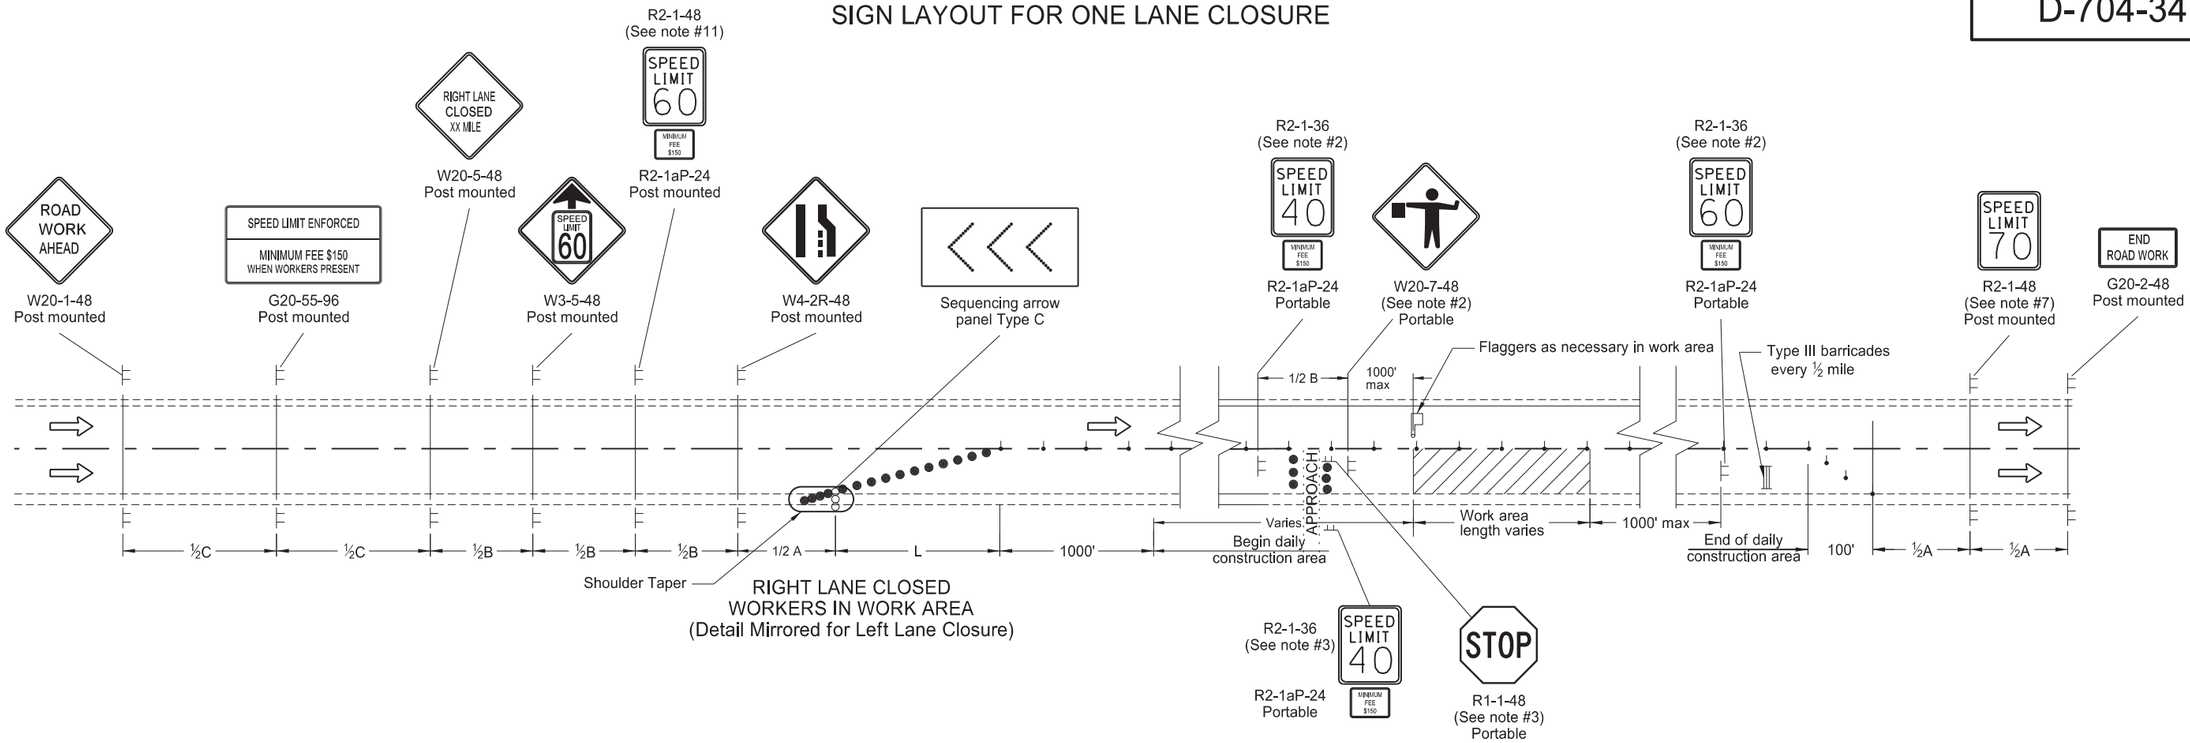

Notes:

1. Install advance signs for flagging when flaggers are flagging.
2. Move the advanced flagger sign and speed limit signs as the work area moves through the construction zone. When the work area is not visible from the flagger, move the flagger station so the work area is visible. Place the 40 mph speed limit sign at ½A in advance of the flagger sign and move the 60 mph speed limit sign. Cover or remove the 40 mph speed limit and the Minimum Fee $150 signs upon completion of the work day or when workers are not present. Determine the exact speed limit in the field, dependent on location and conditions.
3. Approaches: When the work area encompasses an approach, install a 40 mph speed limit sign to control the approach. Cover the existing stop sign and install a new portable stop sign when the approach is on the side of the lane closure. Remove the approach speed limit sign once the main line 40 mph speed zone is moved past the approach.
4. Variables:
   S=Numerical value of speed limit or 85th percentile
   W=The width of taper.
   L=Minimum length of taper, or SxW for freeways, expressways, and all other roads with speeds of 45 mph or greater, or
   (WxSxS)/60 for urban, residential, and other streets with speeds of 40 mph or less.
5. Space delineator drums for tapering traffic at the dimension "S". Space tubular markers used for tangents at 2 times dimension "S".
6. Place sequencing arrow panels at the beginning of the taper when possible. Where shoulder width does not provide sufficient room, move the panel closer to the work area and place on the roadway surface.
   Use Type A on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
   Use Type B on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
   Use Type C on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
7. Re-establish the speed limit. Determine the exact speed limit in the field, dependent on location and conditions.
8. Cover existing speed limit signs within a reduced speed zone.
9. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the diamond sign, and at such a distance above the edge that the flag does not touch the sign when limp.
10. Determine the reduced speed limit dependent on the in place speed limit before construction. Where speed limits are to be reduced more than 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½B.
11. As an option use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
12. Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.

KEY

Type I barricade		Work area	
Type II barricade		Flagger	
Type III barricade		Sequencing arrow panel	
Sign		Tubular markers	
Delineator drum			

ADVANCE WARNING SIGN SPACING

Road Type	Distance Between Signs Min (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-26-2012

REVISIONS

DATE	CHANGE
03-15-16	Removed Do Not Pass signs & updated notes
08-17-17	Updated notes & sign numbers & moved Speed Limit signs
11-01-19	Removed shldr taper details & revised tubular mkr symbol
12-08-21	Switched order of Road Work and Spd Limit Enforced, removed table, & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes


KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 06/30/25 ENGINEER NORTH DAKOTA

Kirk J Hoff

Docusign Envelope ID: E17899F0-B912-4482-BF85-7148763D5F5D

TRAFFIC CONTROL SYSTEM
LANE SHIFT BETWEEN A LANE CLOSURE AND AN OPPOSITE LANE CLOSURE

D-704-34A

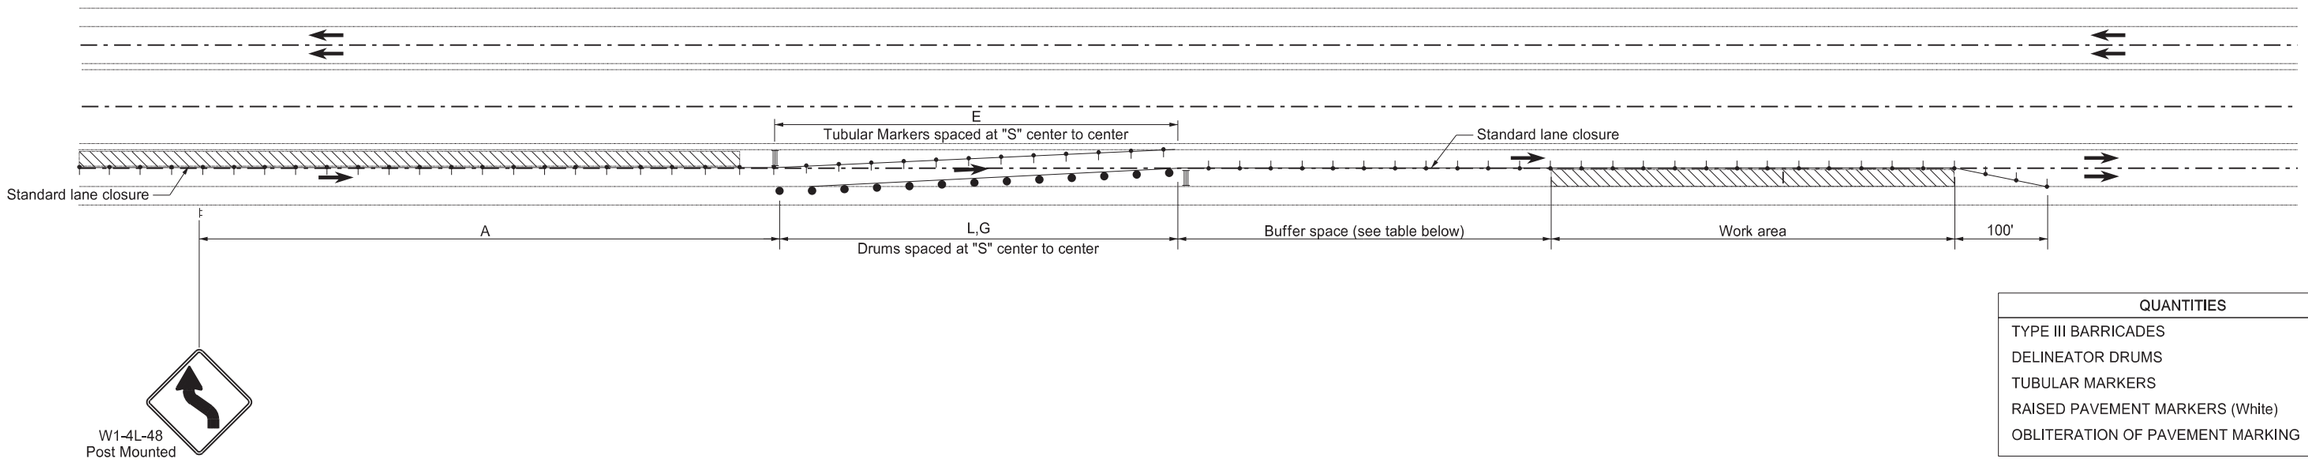

QUANTITIES	
TYPE III BARRICADES	2 Each
DELINEATOR DRUMS	13 Each
TUBULAR MARKERS	13 Each
RAISED PAVEMENT MARKERS (White)	Varies
OBLITERATION OF PAVEMENT MARKING	Varies

KEY
- Work area
- Type III barricade
- Traffic Direction
- Delineator drum
- Tublar markers
- Sign

LEGEND
E Obliteration of pavement marking (10' line, 30' skip centerline)
G Raised pavement markers (white) 5' ctrs.

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820
80	910

* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

Notes
1. Variables
   S = Numerical value of posted speed limit, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.
   W = Width of offset in feet.
   L = Taper length in feet. Speeds 40 mph or less $L=WS^2/60$. Speeds 45 mph or greater $L= WS$.
2. Place signs and barricade on roadway on moveable assemblies.
3. Cover existing speed limit signs within reduced speed zones.
4. Upon approval, the Engineer will measure obliterated or covered pavement marking as Obliteration of Pavement Marking.
5. As an option, use portable sign supports in lieu of post mounted sign in accordance with NDDOT Standard Drawing D-704-14.
6. Place "Minimum Fee $150" signs below speed limit signs when placing traffic control devices to reduce speed.
7. When duration of work is 14 days or less, obliteration of pavement marking (10' line, 30' skip, centerline) and raised pavement markers are not required.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION
10-26-2012


REVISIONS


DATE	CHANGE
09-27-17	Updated to active voice
11-01-19	Clarified work zone
08-02-24	Electronic Stamp/Signature
06-30-25	Legislative Changes

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

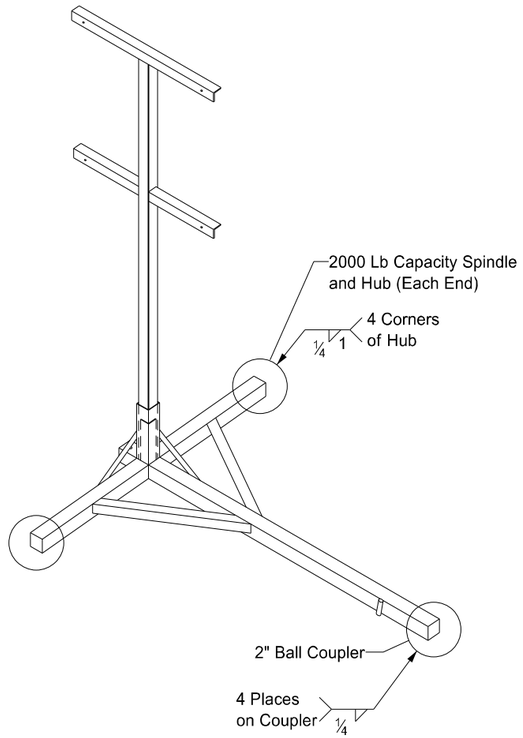

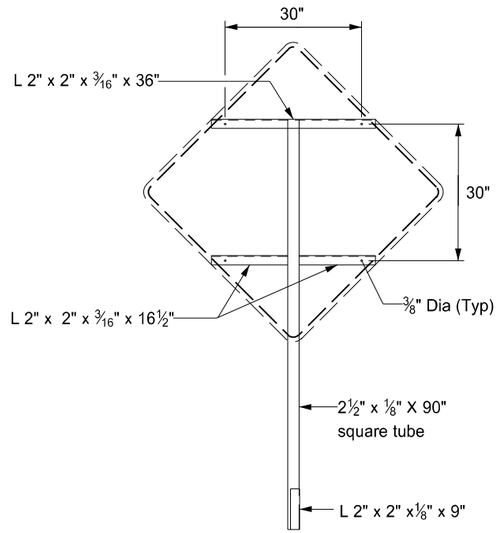

FRONT

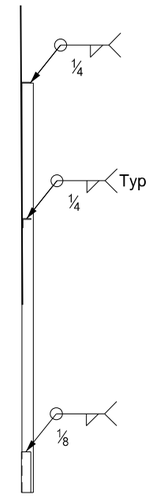



RIGHT

SIGN SUPPORT


Notes:

1. Maximum 250 pound weight of assembly.
2. Use a 14" wheel and tire.
3. Use no automotive and equipment axle assemblies for trailer-mounted sign supports.
4. Other NCHRP 350 or MASH crash tested assemblies are acceptable.

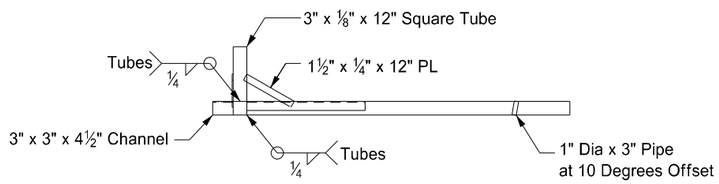

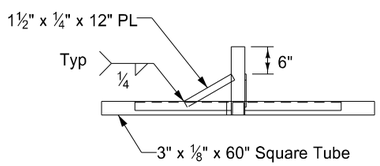

RIGHT

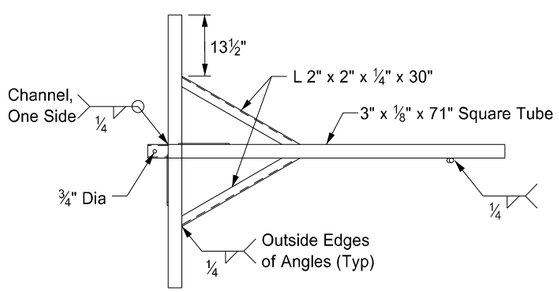

TOP

TRAILER


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE
12/02/2020	Updated Note to active voice.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
Kirk J Hoff
12 02 2020


DocuSign Envelope ID: F823D7A4-83CC-4936-ABE1-378FF7682B3C

Pavement Marking Message Details


D-762-1

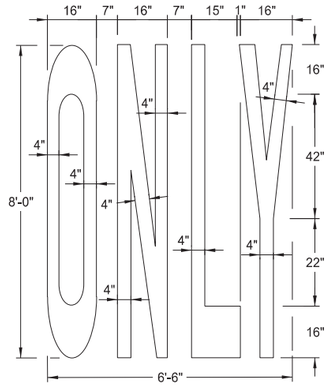


22 S. F.

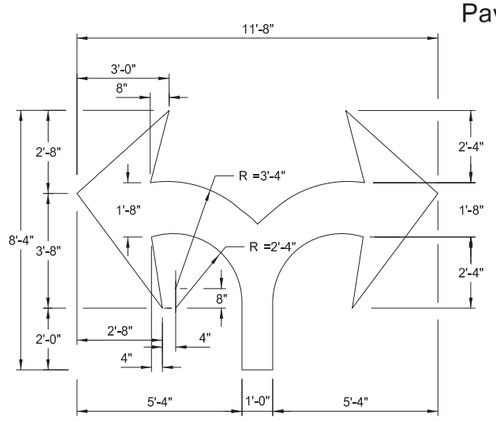


29 S. F.

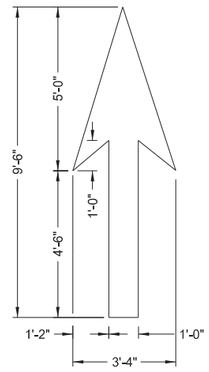


12 S. F.

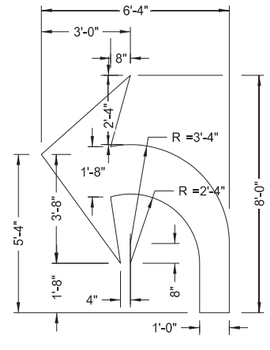

16 S. F.

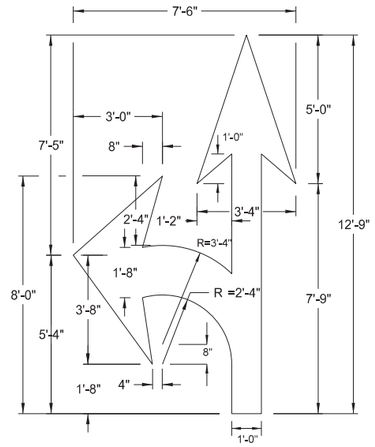


27 S. F.

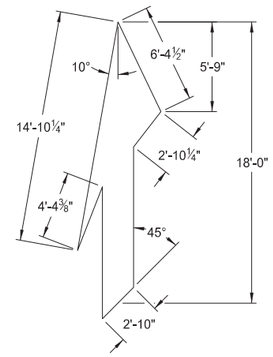


41 S. F.


Note: Rotate merge arrow 20° from edge of roadway.

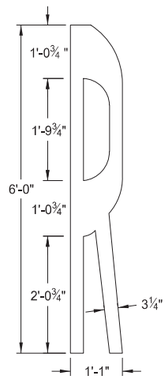


4 S. F.

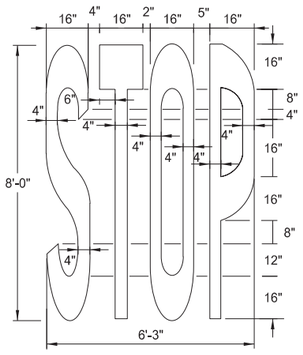

22 S. F.

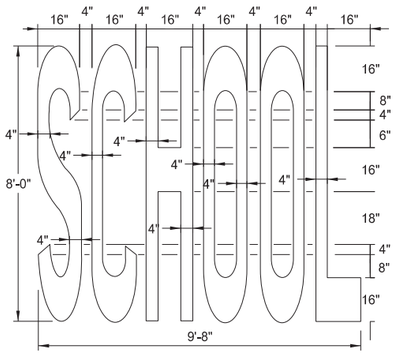

34.5 S. F.

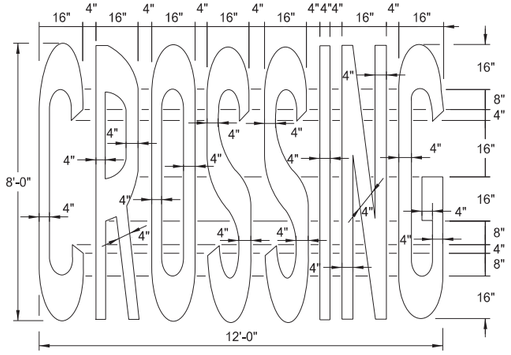


46 S. F.

Speed Limit	Chevron Width	Chevron Spacing 45° to Traffic
0-25 mph	8"	5'
30-40 mph	8"	15'
45 mph and above	12"	25'

Chevron Crosshatching Table

Centerline Pavement Marking Skip Spacing Detail

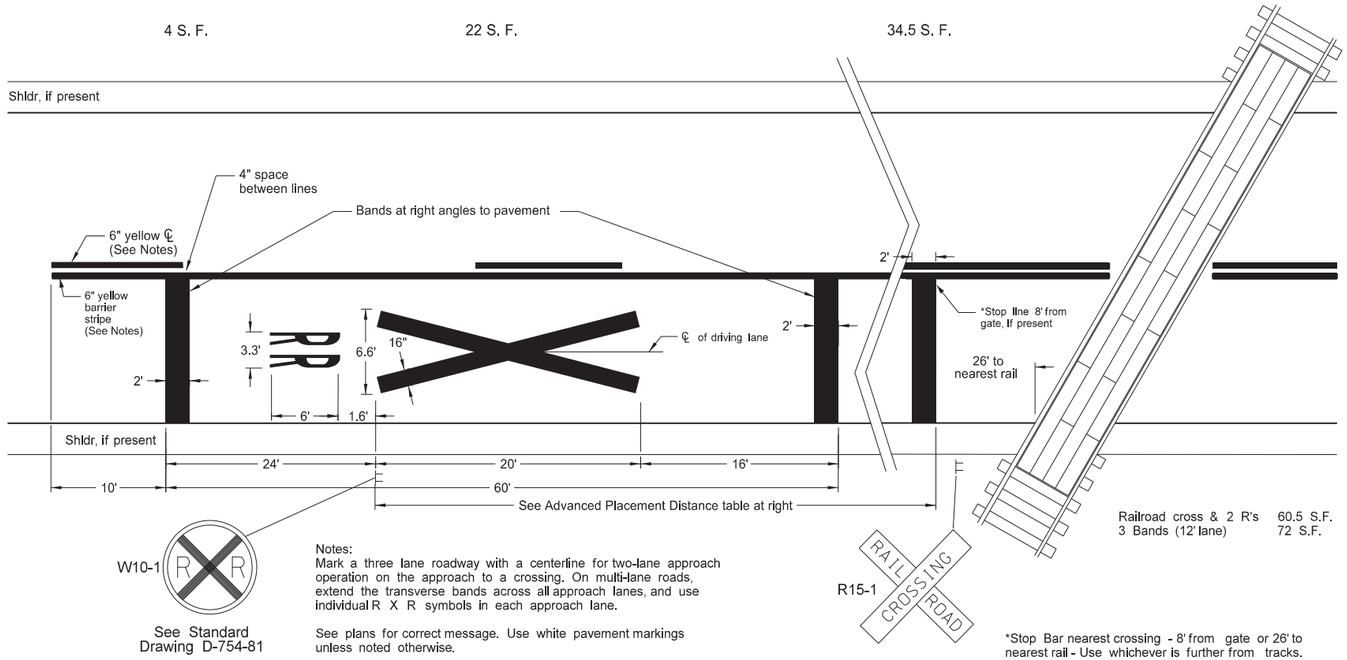


Notes:
Mark a three lane roadway with a centerline for two-lane approach operation on the approach to a crossing. On multi-lane roads, extend the transverse bands across all approach lanes, and use individual R X R symbols in each approach lane.

See plans for correct message. Use white pavement markings unless noted otherwise.

Railroad cross & 2 R's 60.5 S.F.
3 Bands (12' lane) 72 S.F.

*Stop Bar nearest crossing - 8' from gate or 26' to nearest rail - Use whichever is further from tracks.

Advance Placement Distance for Railroad Warning Signs	
Posted or 85th Percentile Speed	Advance Distance
20 mph	min. 100 ft
25 mph	min. 100 ft
30 mph	min. 100 ft
35 mph	min. 100 ft
40 mph	125 ft
45 mph	175 ft
50 mph	250 ft
55 mph	325 ft
60 mph	400 ft
65 mph	475 ft
70 mph	550 ft

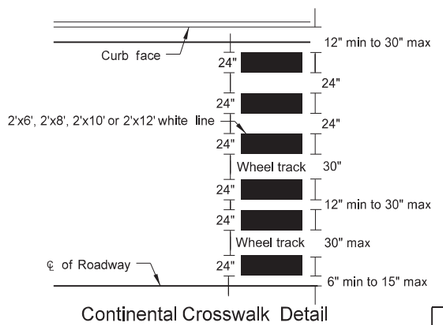

Continental Crosswalk Detail

NOTES:

1. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
2. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40 mph.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

12-6-11

REVISIONS


DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
01-28-2020	Revised min Stop Bar distance to rail.
11-22-2023	Revised pavement marking widths.

KIRK J. HOFF REGISTERED PROFESSIONAL PE-4683 11/22/23 ENGINEER NORTH DAKOTA


DocuSign Envelope ID: ABCF7EEC-0F0E-43FC-8985-B836A5F8B0CC

PAVEMENT MARKING


D-762-4

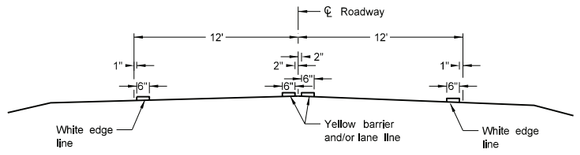

Two Lane Two Way
RURAL ROADWAY

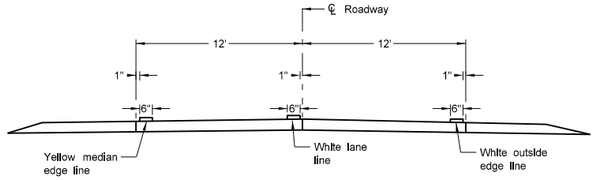

Two Lane Roadway
INTERSTATE HIGHWAY
Concrete Section

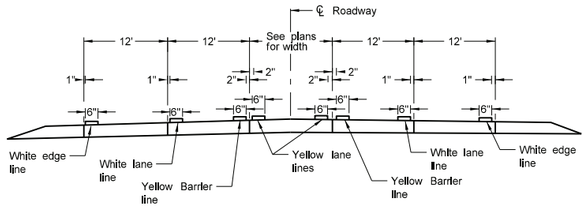

RURAL FIVE LANE ROADWAY
Concrete Section


NOTES:

1. Continue edge lines through private drives and field drives. Break edge lines for intersections.


   For section lines, county roads, and street approaches, stripe the radii and edge lines of the paved surface within the right of way except where curb and gutter is present.

2. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph,


3. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits < 40 mph.

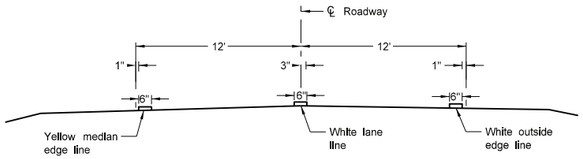


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Asphalt Section

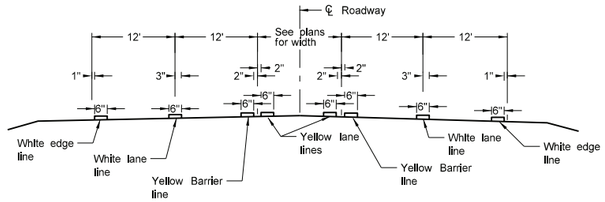


RURAL FIVE LANE ROADWAY
Asphalt Section

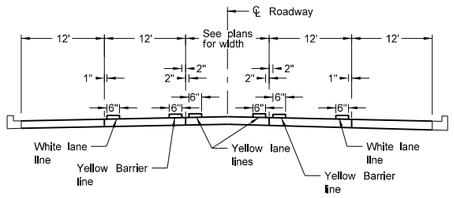


URBAN FIVE LANE SECTION
Concrete Section

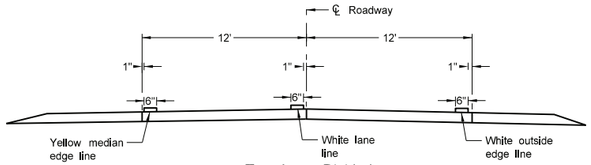


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Concrete Section

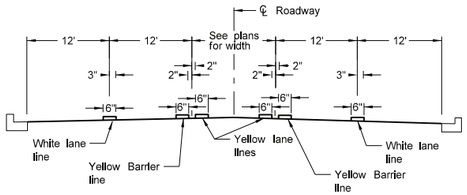


URBAN FIVE LANE SECTION
Asphalt Section

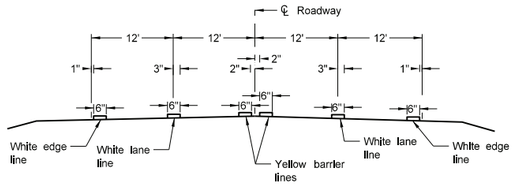


RURAL FOUR LANE ROADWAY
Asphalt Section

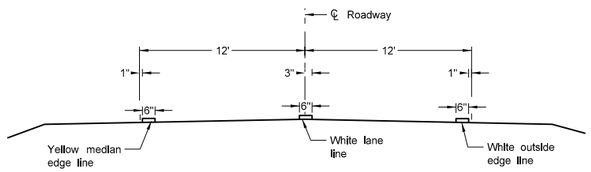


Two Lane Roadway
INTERSTATE HIGHWAY
Asphalt Section

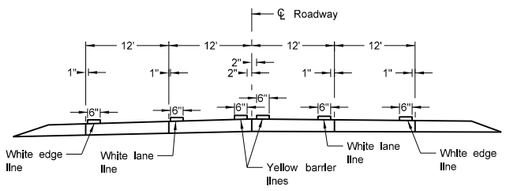


RURAL FOUR LANE ROADWAY
Concrete Section

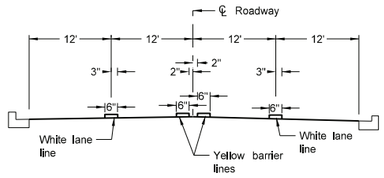

URBAN FOUR LANE SECTION
Asphalt Section

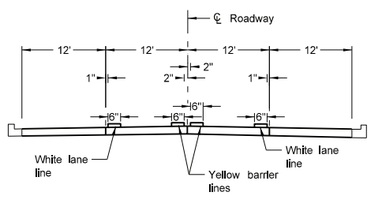

URBAN FOUR LANE SECTION
Concrete Section

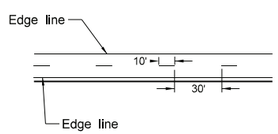

CENTERLINE PAVEMENT MARKING SKIP SPACING DETAIL

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths.
07-09-24	Modified Note 1.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
07/09/24
ENGINEER
NORTH DAKOTA

DocuSign Envelope ID: 09EA856C-BD61-42B6-B726-BC2420A5CEC1

PAVEMENT MARKING FOR STANDARD 90 DEGREE FLARED INTERSECTION


D-762-5

(No Center Left Turn Lane on Major Road)

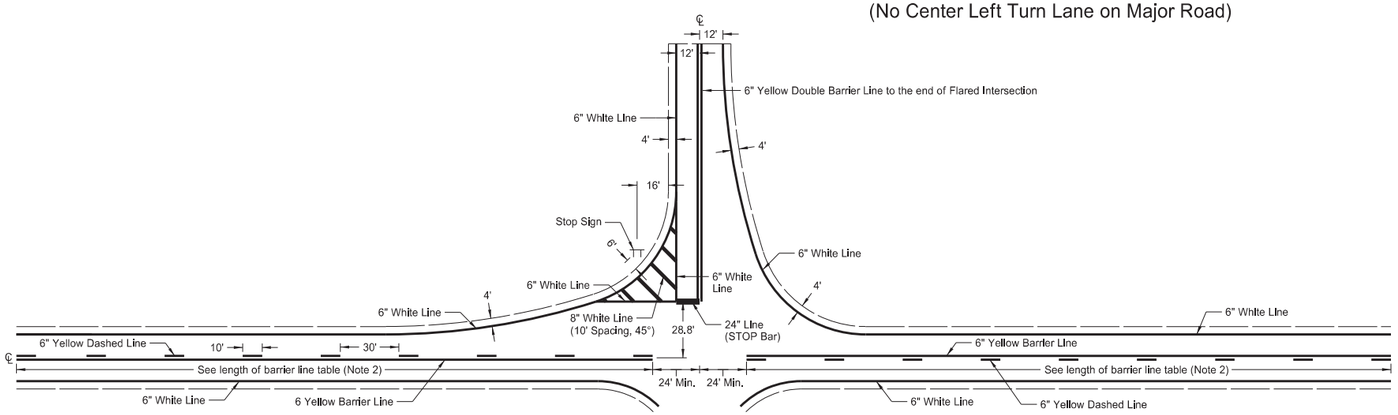


Type A

(No turn lanes present)

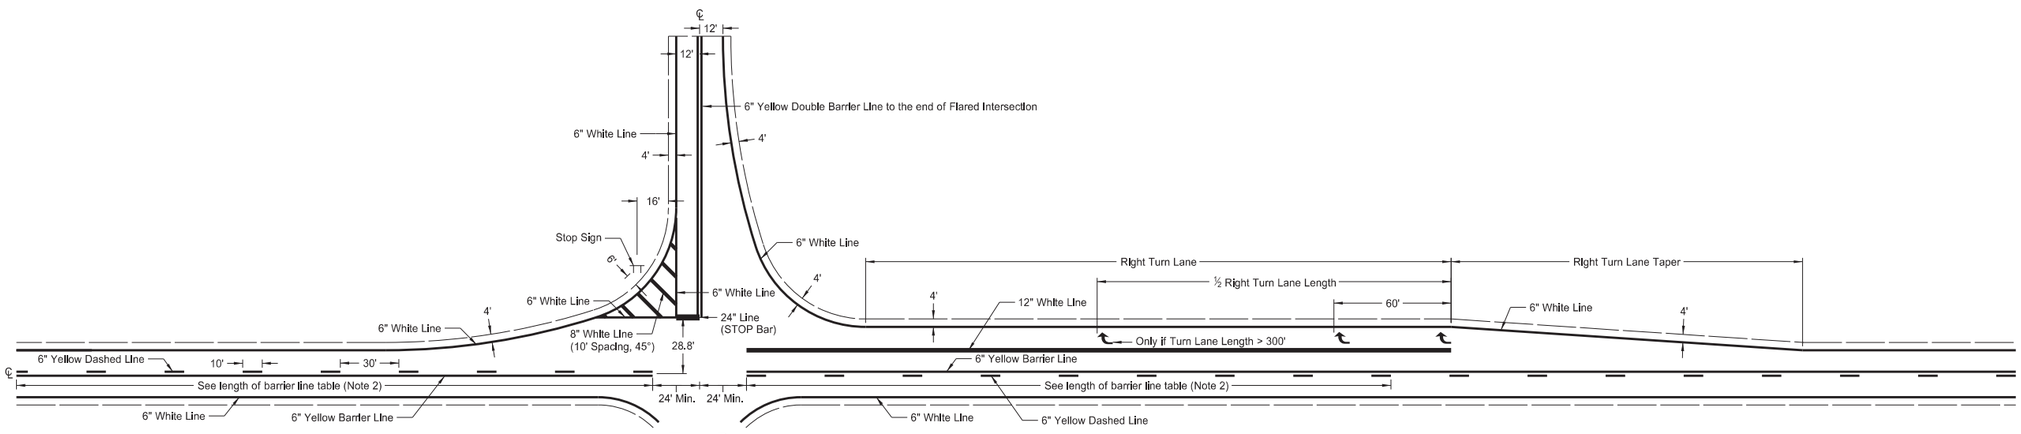

Type B

(Right Turn Lane on Major Road)

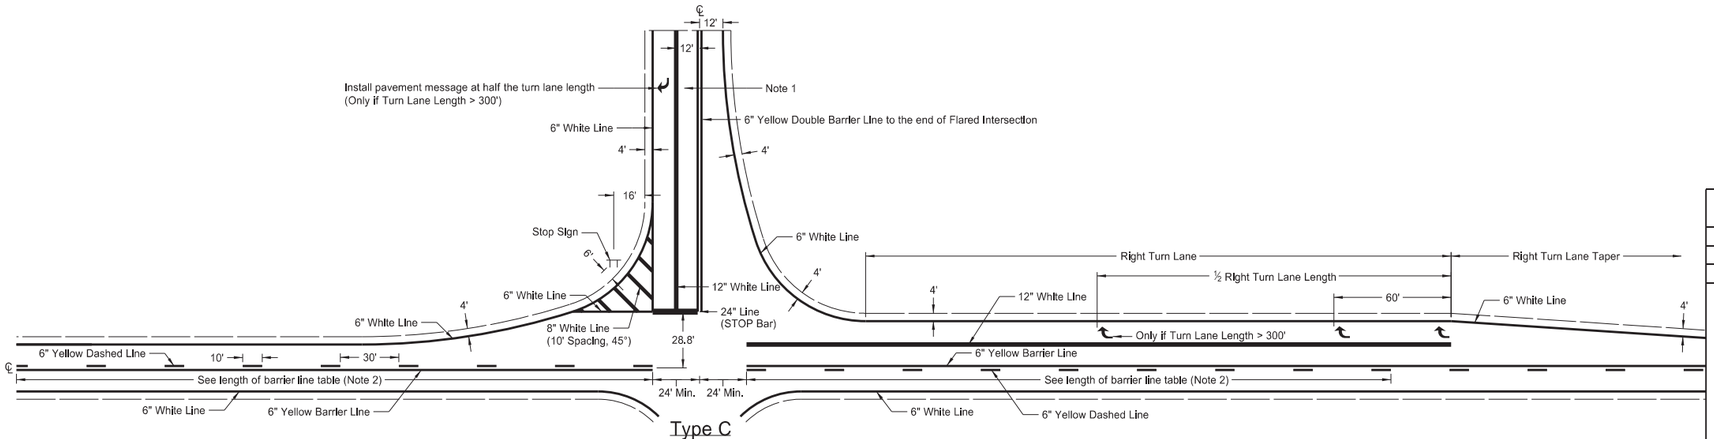

Type C

(Right Turn Lane on Major Road, and Turn Lane on Minor Road)

Notes

1. At "T" intersections (3-leg), additionally install left turn pavement marking message arrow.
2. The barrier lines have variable distances dependent on speed limit. Obtain barrier line length from table below (stopping sight distance.)
3. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
4. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40.
5. Wide line - 8 inches wide if 4 inch normal width lines are used and 12 inches wide if 6 inch normal width lines are used.

Table for Length of Barrier Line									
Speed Limit (mph)	30	35	40	45	50	55	60	65	70
Minimum Length	200'	250'	305'	360'	425'	495'	570'	645'	730'

6" Marking

8" Marking

12" Marking

24" Marking

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

3-29-16

REVISIONS


DATE	CHANGE
8-17-17	Updated note & dimensioning.
8-30-18	Corrected pvmt mkg placement.
8-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths.
1-17-24	Revised wide pvmt mkg width.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
01/17/24
ENGINEER
NORTH DAKOTA


DocuSign Envelope ID: 09EA856C-BD61-42B6-B726-BC2420A5CEC1

SHORT-TERM PAVEMENT MARKING

D-762-11

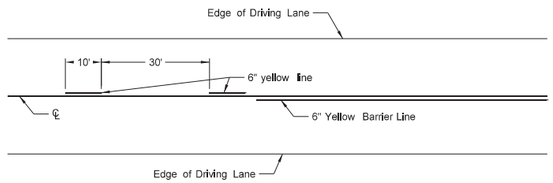


Painted or Tape Lines

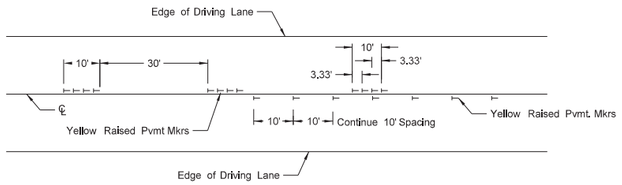


Raised Pavement Markers

TWO-LANE TWO-WAY ROADWAY

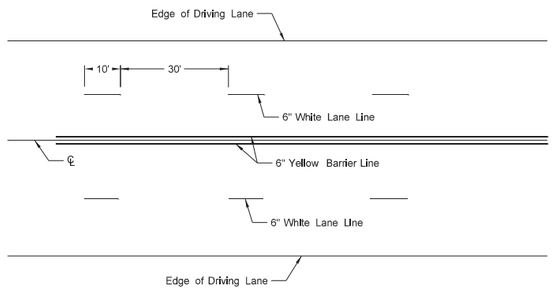


Painted or Tape Lines

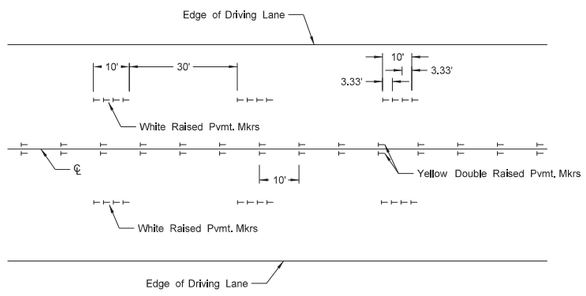


Raised Pavement Markers

FOUR LANE ROADWAY

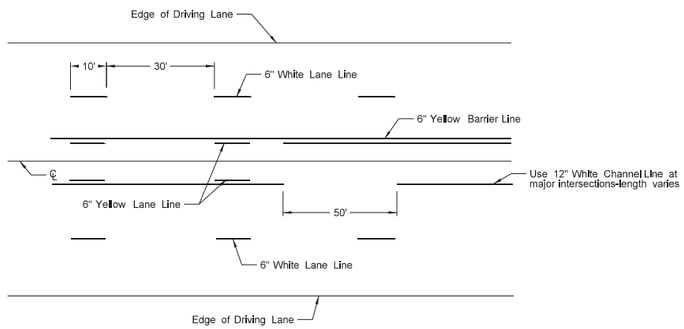


Painted or Tape Lines

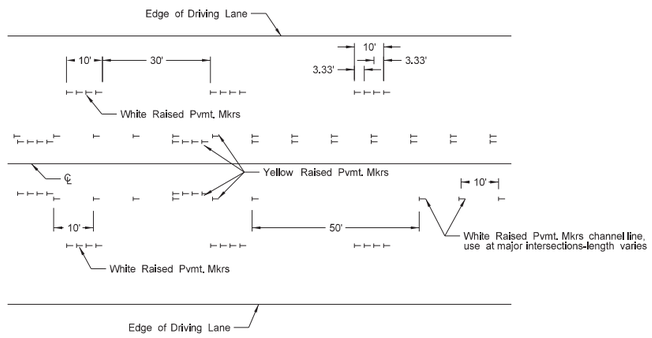


Raised Pavement Markers

FIVE LANE ROADWAY TWO WAY LEFT TURN

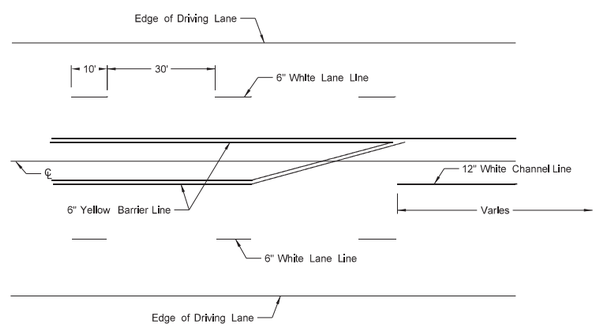

Painted or Tape Lines

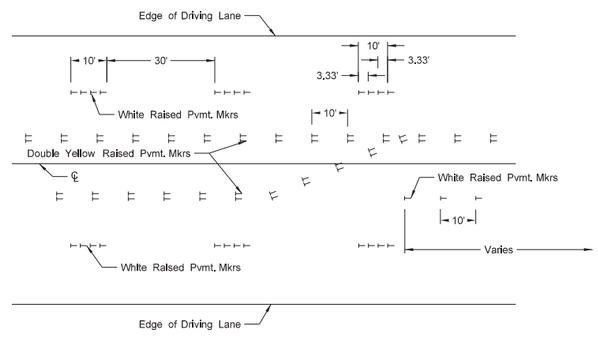

Raised Pavement Markers

FIVE LANE ROADWAY WITH MARKED ISLANDS

NOTES:

1. Place no passing zones on two-lane two-way roadways as shown. In lieu of short term no passing zone pavement markings, place no passing zone signs. Replace no passing zone signs with short term no passing zone pavement marking within three days.
2. Place short term center line stripe (paint) on top lift to match exact placement of permanent stripe.
3. Remove raised markers and tape markings after permanent pavement marking is installed.
4. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
5. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40 mph.
6. Wide lines - 8 inches wide if 4 inch normal width lines are used and 12 inches wide if 6 inch normal width lines are used.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
3-29-16	Re-numbered to be D-762-11 (previously was D-762-6)
10-17-17	Updated to active voice.
8-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths.
1-17-24	Revised wide pvmt marking width.

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
01/17/24
ENGINEER
NORTH DAKOTA