Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

# NDDOT ABBREVIATIONS



| | |
|---|---|
| ? | This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose. |
| Abn | abandoned |
| Abut | abutment |
| Adj | adjusted |
| Aggr | aggregate |
| Ahd | ahead |
| ARV | air release valve |
| Align | alignment |
| Al | alley |
| Alt | alternate |
| Alum | aluminum |
| ADA | Americans with Disabilities Act |
| & | and |
| Appr | approach |
| Approx | approximate |
| ACP | asbestos cement pipe |
| Asph | asphalt |
| AC | asphalt cement |
| Assmd | assumed |
| @ | at |
| Atten | attenuation |
| ATR | automatic traffic recorder |
| Ave | Avenue |
| Avg | average |
| ADT | average daily traffic |
| Bk | back |
| BF | back face |
| Balc | balcony |
| B Wire | barbed wire |
| Barr | barricade |
| Btry | battery |
| BI | beehive inlet |
| Beg | begin |
| BG | below grade |
| BM | bench mark |
| Bkwy | bikeway |
| Bit | bituminous |
| Blk | block |
| BH | bore hole |
| Bot | bottom |
| Blvd | Boulevard |
| Bndry | boundary |
| Brkwy | breakaway |
| Br | bridge |
| Bldg | building |
| Bus. | business |
| BV | butterfly valve |
| Byp | bypass |
| C Gdrl | cable guardrail |
| Calc | calculate |
| CIP | cast iron pipe |
| CB | catch basin |
| CRS | cationic rapid setting |
| C Gd | cattle guard |
| C To C | center to center |
| CL or ℄ | centerline |
| Ch | chain |
| Chnlk | chain-link |
| Ch Blk | channel block |
| Ch Ch | channel change |
| Chk | check |
| Chsld | chiseled |
| Cir | circle |
| Cl | class |
| Clnt | clean-out |
| Clr | clear |
| Cl&gr | clearing & grubbing |
| Comb. | combination |
| Coml | commercial |
| Compr | compression |
| CADD | computer aided drafting & design |
| Conc | concrete |
| CECB | concrete erosion control blanket |
| Cond | conductor |
| Const | construction |
| Cont | continuous |
| CSB | continuous split barrel sample |
| Contr | contraction |
| Contr | contractor |
| CP | control point |
| Coord | coordinate |
| Cor | corner |
| Corr | corrected |
| CAES | corrugated aluminum end section |
| CAP | corrugated aluminum pipe |
| CMES | corrugated metal end section |
| CMP | corrugated metal pipe |
| CPVCP | corrugated poly-vinyl chloride pipe |
| CSES | corrugated steel end section |
| CSFES | corrugated steel flared end section |
| CSP | corrugated steel pipe |
| CSTES | corrugated steel traversable end section |
| Co | County |
| Crse | course |
| Ct | Court |
| Xarm | cross arm |
| Xbuck | cross buck |
| Xsec | cross sections |
| Xing | crossing |
| Xrd | crossroad |
| Crn | crown |
| Culv | culvert |
| C&G | curb & gutter |
| CI | curb inlet |
| CR | curb ramp |
| C | cut |
| Dd Ld | dead load |
| Defl | deflection |
| Defm | deformed |
| Dlnt | delineate |
| Dlntr | delineator |
| Depr | depression |
| Desc | description |
| Det | detail |
| DWP | detectable warning panel |
| Dtr | detour |
| Dia or ø | diameter |
| Dir | direction |
| Dist | distance |
| DM | disturbed material |
| DB | ditch block |
| DG | ditch grade |
| Dbl | double |
| Dn | down |
| Dwg | drawing |
| Dr | drive |
| Drwy | driveway |
| DI | drop inlet |
| D | dry density |
| Ea | each |
| Esmt | easement |
| E | East |
| EB | Eastbound |
| Elast | elastomeric |
| EL | electric locker |
| E Mtr | electric meter |
| EVSE | electric vehicle supply equipment |
| Elec | electric/al |
| EDM | electronic distance meter |
| Elev or El | elevation |
| Ellipt | elliptical |
| Emb | embankment |
| Emuls | emulsion/emulsified |
| ES | end section |
| Engr | engineer |
| ESS | environmental sensor station |
| Eq | equal |
| Evgr | evergreen |
| Exc | excavation |
| Exst | existing |
| Exp | expansion |
| Expy | Expressway |
| E | external of curve |
| Extru | extruded |
| FOS | factor of safety |
| Fed | Federal |
| FP | feed point |
| Fn | fence |
| Fn P | fence post |
| FO | fiber optic |
| FD | field drive |
| F | fill |
| FAA | fine aggregate angularity |
| FH | fire hydrant |
| Fl | flange |
| Flrd | flared |
| FES | flared end section |
| F Bcn | flashing beacon |
| FA | flight auger sample |
| FL | flow line |
| Ftg | footing |
| FM | force main |
| Fnd | found |
| Fdn | foundation |
| Frac | fractional |
| Frwy | freeway |
| Frt | front |
| FF | front face |
| F Disp | fuel dispenser |
| FFP | fuel filler pipes |
| FLS | fuel leak sensor |
| Furn | furnish/ed |

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 07-01-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 04-23-18 | General Revisions |
| 09-20-18 | General Revisions |
| 12-18-20 | General Revisions |
| 08-16-22 | General Revisions |
| 04-14-25 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

# NDDOT ABBREVIATIONS



| | |
|---|---|
| Galv | galvanized |
| Gar | garage |
| Gs L | gas line |
| G Reg | gas line regulator |
| GMV | gas main valve |
| G Mtr | gas meter |
| GSV | gas service valve |
| GVP | gas vent pipe |
| GV | gate valve |
| Ga | gauge |
| Gov | government |
| Grd | graded/grade |
| Grnd | ground |
| GWM | ground water monitor |
| Gdrl | guardrail |
| Gtr | gutter |
| H Plg | H piling |
| Hdwl | headwall |
| Ht | height |
| Hel | helical |
| HDPE | high density polyethylene |
| HM | high mast |
| HP | high pressure |
| HPS | high pressure sodium |
| HTCG | high tension cable guardrail |
| Hwy | highway |
| Hor | horizontal |
| HBP | hot bituminous pavement |
| HMA | hot mix asphalt |
| Hyd | hydrant |
| Ph | hydrogen ion content |
| Id | identification |
| Incl | inclinometer tube |
| IMH | inlet manhole |
| ID | inside diameter |
| Inst | instrument |
| Intchg | interchange |
| Intmdt | intermediate |
| Intscn | intersection |
| Inv | invert |
| IP | iron pipe |
| Jt | joint |
| Jct | junction |
| Ln | lane |
| Lg | large |
| Lat | latitude |
| Lt | left |
| Lens | lenses |
| Lvl | level |
| Lvlng | leveling |
| Lht | light |
| LP | light pole |
| Ltg | lighting |
| Liq | liquid |
| LL | liquid limit |
| Loc | location |
| Long. | longitude |
| Lp | loop |
| LD | loop detector |
| Lum | luminaire |
| Mb | mailbox |
| ML | main line |
| MH | manhole |
| Mkd | marked |
| Mkr | marker |
| Mkg | marking |
| MA | mast arm |
| Matl | material |
| Max | maximum |
| Meas | measure |
| Mdn | median |
| MD | median drain |
| MC | medium curing |
| MGS | Midwest Guardrail System |
| MM | mile marker |
| MP | mile post |
| Min | minimum |
| Misc | miscellaneous |
| Mon | monument |
| Mnd | mound |
| Mtbl | mountable |
| Mtd | mounted |
| Mtg | mounting |
| Mk | muck |
| Neop | neoprene |
| Ntwk | network |
| N | North |
| NE | Northeast |
| NW | Northwest |
| NB | Northbound |
| No. or # | number |
| Obsc | obscure(d) |
| Ocpd | occupied |
| Ocpy | occupy |
| O/s | offset |
| OC | on center |
| C | one dimensional consolidation |
| OC | organic content |
| Orig | original |
| O To O | out to out |
| OD | outside diameter |
| OH | overhead |
| PMT | pad mounted transformer |
| Pg | pages |
| Pntd | painted |
| Pr | pair |
| Pnl | panel |
| Pk | park |
| PSD | passing sight distance |
| Pvmt | pavement |
| Ped | pedestal |
| Ped | pedestrian |
| PPP | pedestrian pushbutton post |
| Pen. | penetration |
| Perf | perforated |
| Per. | perimeter |
| Perm | permanent |
| PL | pipeline |
| Pl | place |
| P&P | plan & profile |
| PL | plastic limit |
| Pl or ℄ | plate |
| Pt | point |
| PE | polyethylene |
| PVC | polyvinyl chloride |
| PCC | Portland Cement concrete |
| PP | power pole |
| Preempt | preemption |
| Prefab | prefabricated |
| Prfmd or Pref | preformed |
| Prep | preperation |
| Press. | pressure |
| PRV | pressure relief valve |
| Prestr | prestressed |
| Pvt | private |
| PD | private drive |
| Prod. | production/produce |
| Prog | programmed |
| Prop. | property |
| Ppsd | proposed |
| PB | pull box |
| Qty | quantity |
| Qtr | quarter |
| Rad or R | radius |
| RR | railroad |
| Rlwy | railway |
| Rsd | raised |
| RC | rapid curing |
| Rec | record |
| Rcy | recycle |
| RAP | recycled asphalt pavement |
| RPCC | recycled portland cement concrete |
| Ref | reference |
| R Mkr | reference marker |
| RM | reference monument |
| RP | reference point |
| Refl | reflectorized |
| RCB | reinforced concrete box |
| RCES | reinforced concrete end section |
| RCFES | reinforced concrete flared end section |
| RCP | reinforced concrete pipe |
| RCPS | reinforced concrete pipe sewer |
| RCTES | reinforced concrete traversable end section |
| Reinf | reinforcement |
| Res | reservation |
| Res | residence |
| Ret | retaining |
| Rev | reverse |
| Rt | right |
| R/W | right of way |
| Riv | river |
| Rd | road |
| Rdbd | road bed |
| Rdwy | roadway |
| RWIS | roadway weather information system |
| Rk | rock |
| Rt | route |

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

| DATE | CHANGE |
|---|---|
| 08-03-15 | General Revisions |
| 04-23-18 | General Revisions |
| 12-18-20 | General Revisions |
| 08-16-22 | General Revisions |
| 04-14-25 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

# NDDOT ABBREVIATIONS

D-101-3

| | |
|---|---|
| Salv | salvage(d) |
| San | sanitary sewer line |
| Sec | section |
| SL | section line |
| Sep | separation |
| Seq | sequence |
| Serv | service |
| Sht | sheet |
| Shtng | sheeting |
| Shldr | shoulder |
| Sw or Sdwk | sidewalk |
| SD | sight distance |
| SN | sign number |
| Sig | signal |
| Sgl | single |
| SRCP | slotted reinforced concrete pipe |
| SC | slow curing |
| SS | slow setting |
| Sm | small |
| S | South |
| SE | Southeast |
| SW | Southwest |
| SB | Southbound |
| Sp | spaces |
| Spcl | special |
| SA | special assembly |
| SP | special provisions |
| G | specific gravity |
| Spk | spike |
| SB | split barrel sample |
| SH | sprinkler head |
| SV | sprinkler valve |
| Sq | square |
| Stk | stake |
| Std | standard |
| N | standard penetration test |
| Std Specs | standard specifications |
| Stm L | steam line |
| SEC | steel encased concrete |
| SMA | stone matrix asphalt |
| SSD | stopping sight distance |
| SD | storm drain |
| St | street |
| SPP | structural plate pipe |
| SPPA | structural plate pipe arch |
| Str | structure |
| Subd | subdivision |
| Sub | subgrade |
| Sub Prep | subgrade preperation |
| Ss | subsoil |
| SS | supplement specification |
| Supp | supplemental |
| Surf | surfacing |
| Surv | survey |
| Sym | symmetrical |

| | |
|---|---|
| Tel | telephone |
| Tel B | Telephone Booth |
| Tel P | telephone pole |
| Tv | television |
| Temp | temperature |
| Temp | temporary |
| TBM | temporary bench mark |
| T | thinwall tube sample |
| Ts | topsoil |
| Traf | traffic |
| TSCB | traffic signal control box |
| Tr | trail |
| Transf | transformer |
| Trans | transition |
| TT | transmission tower |
| TES | traversable end section |
| Trans | transverse |
| Trtd | treated |
| Trmt | treatment |
| Qc | triaxial compression |
| TERO | tribal employment rights ordinance |
| Tpl | triple |
| Typ | typical |
| Qu | unconfined compressive strength |
| Ugrnd | underground |
| Util | utility |
| VG | valley gutter |
| Vap | vapor |
| Vert | vertical |
| VCP | vitrified clay pipe |
| Vol | volume |
| VSFS | vehicle speed feedback sign |
| Wkwy | walkway |
| W | water content |
| WGV | water gate valve |
| WL | water line |
| WM | water main |
| WMV | water main valve |
| W Mtr | water meter |
| WSV | water service valve |
| WW | water well |
| Wrng | wearing |
| WIM | weigh in motion |
| W | west |
| WB | westbound |
| Wrng | wiring |
| W/ | with |
| W/o | without |

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION
07-01-14

REVISIONS

| DATE | CHANGE |
|---|---|
| 08-03-15 | General Revisions |
| 04-23-18 | General Revisions |
| 12-18-20 | General Revisions |
| 08-16-22 | General Revisions |
| 04-14-25 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

# NDDOT ABBREVIATIONS



## MEASUREMENTS

| | |
|---|---|
| ac | acres |
| A | ampere |
| Bd Ft | board feet |
| Cd | candela |
| cm | centimeter |
| C | coulomb |
| CF | cubic feet |
| m3 | cubic meter |
| m3/s | cubic meters per second |
| CY | cubic yard |
| CY/mi | cubic yards per mile |
| D or Deg | degree |
| F | Fahrenheit |
| F | farad |
| ft | feet/foot |
| Gal | gallon |
| G | giga |
| Ha | hectare |
| H | henry |
| Hz | hertz |
| hr | hour(s) |
| in. | inch |
| J | joule |
| K | kelvin |
| kN | kilo newton |
| kPa | kilo pascal |
| kg | kilogram |
| kg/m3 | kilogram per cubic meter |
| km | kilometer |
| K | Kip(s) |
| LF | linear foot |
| L | litre |
| Lm | lumen |
| L sum | lump sum |
| Lx | lux |
| M Hr | man hour |
| M | mega |
| m | meter |
| m/s | meters per second |
| mi | mile |
| mL | milliliter |
| mm | millimeter |
| mm/hr | millimeters per hour |
| n | nano |
| N | newton |
| Pa | pascal |
| lb | pounds |
| sec | seconds |
| S | siemens |
| SF | square feet |
| km2 | square kilometer |
| m2 | square meter |
| SY | square yard |
| Sta Yd | station yards |
| SI | Systems International |
| T | tesla |
| T/mi | tons per mile |
| V | volt |
| W | watt |
| Wb | weber |

## SURVEY DESCRIPTIONS

| | |
|---|---|
| Az | azimuth |
| Bs | backsight |
| Brg | bearing |
| BP Cap | blue plastic cap |
| BS | both sides |
| BC | brass cap |
| CC | closing corner |
| CS | curve to spiral |
| Eq | equation |
| E | external of curve |
| FS | far side |
| FB | field book |
| Fs | foresight |
| Geod | geodetic |
| GIS | Geographical Information System |
| GPS | Global Positioning System |
| HI | height of instrument |
| IM | iron monument |
| I Pn | iron pin |
| LS | Land Surveyor (licensed) |
| LSIT | Land Surveyor In Training |
| L | length of curve |
| LC | long chord |
| LB | level book |
| MC | meander corner |
| Mer | meridian |
| M | mid ordinate of curve |
| NGS | National Geodetic Survey |
| NS | near side |
| Obsn | observation |
| Off Loc | office location |
| OP Cap | orange plastic cap |
| PK | Parker-Kalon nail |
| P Cap | plastic cap |
| PP Cap | pink plastic cap |
| PCC | point of compound curve |
| PC | point of curve |
| PI | point of intersection |
| PRC | point of reverse curvature |
| PT | point of tangent |
| POC | point on curve |
| POT | point on tangent |
| RTP | random traverse point |
| Rge | range |
| RP Cap | red plastic cap |
| SC | spiral to curve |
| SC | standard corner |
| ST | spiral to tangent |
| Sta | station |
| SE | superelevation |
| Tan | tangent |
| T | tangent (semi) |
| TS | tangent to spiral |
| Twp | township |
| TB | transit book |
| TP | traverse point |
| TP | turning point |
| USC&G | US Coast & Geodetic Survey |
| USGS | US Geologic Survey |
| VC | vertical curve |
| WC | witness corner |
| WGS | World Geodetic System |
| YP Cap | yellow plastic cap |
| Z | zenith |

## SOIL TYPES

| | |
|---|---|
| Cl | clay |
| Cl F | clay fill |
| Cl Hvy | clay heavy |
| Cl Lm | clay loam |
| Co S | coal slack |
| C Gr | coarse gravel |
| CS | coarse sand |
| FS | fine sand |
| Gr | gravel |
| Lig Co | lignite coal |
| Lig Sl | lignite slack |
| Lm | loam |
| Rk | rock |
| Sd | sand |
| Sdy Cl | sandy clay |
| Sdy Cl Lm | sandy clay loam |
| Sdy Fl | sandy fill |
| Sdy Lm | sandy loam |
| Sc | scoria |
| Sh | shale |
| Si Cl | silt clay |
| Si Cl Lm | silty clay loam |
| Si Lm | silty loam |

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

| DATE | CHANGE |
|---|---|
| 12-18-20 | Sheet Added<br>- Continued from D-101-3 |
| 4-14-25 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: 60E6D5C0-46BC-49CB-8E0F-CBA6AC9DB3C4

# NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

| | |
|---|---|
| 702COM | 702 Communications |
| ACCENT | Accent Communications |
| AGASSIZ WU | Agassiz Water Users District |
| AGC | Associated General Contractors of America |
| ALL PL | Alliance Pipeline |
| ALL SEAS WU | All Seasons Water Users District |
| AMOCO PI | Amoco Pipeline Company |
| AMRDA HESS | Amerada Hess Corporation |
| AT&T | AT&T Corporation |
| B PAW | Bear Paw Energy Incorporated |
| BAKER ELEC | Baker Electric |
| BASIN ELEC | Basin Electric Cooperative Incorporated |
| BEK TEL | Bek Communications Cooperative |
| BELLE PL | Belle Fourche Pipeline Company |
| BLM | Bureau of Land Management |
| BNSF | Burlington Northern Santa Fe Railway |
| BOEING | Boeing |
| BRNS RWD | Barnes Rural Water District |
| BURK-DIV ELEC | Burke-Divide Electric Cooperative |
| BURL WRD | Burleigh County Water Resource District |
| CABLE ONE | Cable One |
| CABLE SERV | Cable Services |
| CAP ELEC | Capital Electric Cooperative Incorporated |
| CASS CO ELEC | Cass County Electric Cooperative |
| CASS RWU | Cass Rural Water Users District |
| CAV ELEC | Cavalier Rural Electric Cooperative |
| CBLCOM | Cablecom Of Fargo |
| CENEX PL | Cenex Pipeline |
| CENT PL WATER DIST | Central Pipe Line Water District |
| CENT PWR ELEC | Central Power Electric Cooperative |
| CENTURYLINK | CenturyLink |
| COE | Corps of Engineers |
| CONS COMM | Consolidated Communications |
| CONS TELCOM | Consolidated Telcom |
| CONT RES | Continental Resource Inc |
| CPR | Canadian Pacific Railway |
| D O E | Department Of Energy |
| DAK CARR | Dakota Carrier Network |
| DAK CENT TEL | Dakota Central Telephone |
| DAK RWD | Dakota Rural Water District |
| DGC | Dakota Gasification Company |
| DICKEY R NET | Dickey Rural Networks |
| DICKEY WRD | Dickey County Water Resource District |
| DICKEY TEL | Dickey Telephone |
| DNRR | Dakota Northern Railroad |
| DOME PL | Dome Pipeline Company |
| DVELEC | Dakota Valley Electric Cooperative |
| DVMW | Dakota, Missouri Valley & Western |
| E CENT REG WD | East Central Water District |
| ENBRDG | Enbridge Pipelines Incorporated |
| ENVENTIS | Enventis Telephone |
| EQUINOR | Equinor Pipeline |
| FALK MNG | Falkirk Mining Company |
| FHWA | Federal Highway Administration |
| G FKS-TRL WD | Grand Forks-traill Water District |
| GETTY TRD & TRAN | Getty Trading & Transportation |
| GLDN W ELEC | Golden West Electric Cooperative |
| GTR RAMSEY WD | Greater Ramsey Water District |
| GT PLNS NAT GAS | Great Plains Natural Gas Company |
| HALS TEL | Halstad Telephone Company |
| IDEA1 | Idea1 |
| INT-COMM TEL | Inter-Community Telephone Company |
| KANEB PL | Kaneb Pipeline Company |
| KEM ELEC | Kem Electric Cooperative Incorporated |
| KOCH GATH SYS | Koch Gathering Systems Incorporated |
| LKHD PL | Lakehead Pipeline Company |
| LWR YELL R ELEC | Lower Yellowstone Rural Electric |
| LUMEN | Lumen Technologies Incorporated |
| MCKNZ CON | McKenzie Consolidated Telcom |
| MCKNZ ELEC | McKenzie Electric Cooperative |
| MCKNZ WRD | McKenzie County Water Resource District |
| MCLEOD | McLeod USA |
| MCLN ELEC | McLean Electric Cooperative |
| MCLN-SHRDN R WAT | McLean-Sheridan Rural Water District |
| MDU | Montana-dakota Utilities |
| MIDCO | MidContinent Communications |
| MIDSTATE TEL | Midstate Telephone Company |
| MINOT CABLE | Minot Cable Television |
| MINOT TEL | Minot Telephone Company |
| MISS VALL COMM | Missouri Valley Communications Incorporated |
| MISS W W S | Missouri West Water System |
| MNKOTA PWR | Minnkota Power |
| MOR-GRAN-SOU ELEC | Mor-gran-sou Electric Cooperative |
| MOUNT-WILLI ELEC | Mountrail-williams Electric Cooperative |
| MLGC | Moore & Liberty - Griggs County |
| MUNICIPAL | City Water And Sewer |
| MUNICIPAL | City Of '.....' |
| N CENT ELEC | North Central Electric Cooperative |
| N PRAIR REG WD | North Prairie Regional Water District |
| ND PKS & REC | North Dakota Parks And Recreation |
| ND TEL | North Dakota Telephone Company |
| NDDOT | North Dakota Department of Transportation |
| NE REG WD | Northeast Regional Water District |
| NDSU SOIL SCI DEPT | NDSU Soil Science Department |
| NEMONT TEL | Nemont Telephone |
| NODAK R ELEC | Nodak Rural Electric Cooperative |
| NOON FRMS TEL | Noonan Farmers Telephone Company |
| NPR | Northern Plains Railroad |
| NSP | Northern States Power |
| NTHN BRDR PL | Northern Border Pipeline |
| NTHN PLNS ELEC | Northern Plains Electric Cooperative Incorporated |
| NTHWSTRN REF | Northwestern Refinery Company |
| NW COMM | Northwest Communication Cooperation |
| NWRWD | Northwest Rural Water District |
| ONEOK | Oneok gas |
| OSHA | Occupational Safety and Health Administration |
| OTTR TL PWR | Otter Tail Power Company |
| PAAP | Plains All American Pipeline |
| P L E M | Prairielands Energy Marketing |
| POLAR COM | Polar Communications |
| PVT ELEC | Private Electric |
| QWEST | Qwest Communications |
| R&T REG WD | R & T Water District |
| RED RIV COMM | Red River Communications |
| RESVTN TEL | Reservation Telephone |
| ROBRTS TEL | Roberts Company Telephone |
| R-RIDER ELEC | Roughrider Electric Cooperative |
| RRVW | Red River Valley & Western Railroad |
| S CENT REG WD | South Central Regional Water District |
| SE W U | Southeast Water Users Incorporated |
| SCOTT CABLE | Scott Cable Television Dickinson |
| SHERDN ELEC | Sheridan Electric Cooperative |
| SHEYN VLY ELEC | Sheyenne Valley Electric Cooperative |
| SKYTECH | Skyland Technologies Incorporated |
| SLOPE ELEC | Slope Electric Cooperative Incorporated |
| SOURIS RIV TELCOM | Souris River Telecommunications |
| ST WAT COMM | State Water Commission |
| STATE LN WATER | State Line Water Cooperative |
| STER ENG | Sterling Energy |
| STUT RWD | Stutsman Rural Water District |
| SW PL PRJ | Southwest Pipeline Project |
| SWWA | Southwest Water Authority |
| SUNOCO | Sunoco LP |
| T M C | Turtle Mountain Communications |
| TCI | TCI of North Dakota |
| TESORO HGH PLNS PL | Tesoro High Plains Pipeline |
| TRI-CNTY WU | Tri-County Water Users Incorporated |
| TRL CO WRD | Traill County Water Resource District |
| UNTD TEL | United Telephone |
| UPPR SOUR WD | Upper Souris Water District |
| US SPRINT | U.S. Sprint |
| USAF MSL CABLE | U.S.A.F. Missile Cable |
| USFWS | US Fish and Wildlife Service |
| USW COMM | U.S. West Communications |
| VRNDRY ELEC | Verendrye Electric Cooperative |
| W RIV TEL | West River Telephone Incorporated |
| WAPA | Western Area Power Administration |
| WAWSA | Western Area Water Supply Authority |
| WEB | W. E. B. Water Development Association |
| WILLI WRD | Williams County Water Resource District |
| WILSTN BAS PL | Williston Basin Interstate Pipeline Company |
| WLSH RWD | Walsh Water Rural Water District |
| WOLVRTN TEL | Wolverton Telephone |
| XLENER | Xcel Energy |
| YSVR | Yellowstone Valley Railroad |

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 07-01-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 04-23-18 | General Revisions |
| 09-20-18 | General Revisions |
| 12-18-20 | General Revisions |
| 08-16-22 | General Revisions |
| 04-14-25 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
04/14/25
ENGINEER
NORTH DAKOTA

# LINE STYLES

D-101-20

## Existing Topography

- Existing Ground Void
- Existing Cemetary Boundary
- Existing Box Culvert Bridge
- Existing Concrete Surface
- Existing Drainage Structure
- Existing Gravel Surface
- Existing Riprap
- Existing Dirt Surface
- Existing Asphalt Surface
- Existing Tie Point Line
- Existing Railroad Centerline
- Existing Guardrail Cable
- Existing Guardrail Metal
- Existing Edge of Water
- Existing Fence
- Existing Railroad
- Existing Field Line
- Exst Flow
- Existing Curb
- Existing Valley Gutter
- Existing Driveway Gutter
- Existing Curb and Gutter
- Existing Mountable Curb and Gutter
- Existing 3-Cable w Posts
- Site Boundary
- Existing Berm, Dike, Pit, or Earth Dam
- Existing Ditch Block
- Existing Tree Boundary
- Existing Brush or Shrub Boundary
- Existing Retaining Wall
- Existing Planter or Wall
- Existing W-Beam Guardrail with Posts
- Existing Railroad Switch
- Gravel Pit - Borrow Area
- Existing Wet Area-Vegetation Break
- Existing High Tension Cable Guardrail
- Existing High Tension Cable Guardrail with Posts

## Proposed Topography

- 3-Cable w Posts
- Flow
- Fence
- Remove Line
- Wall
- Retaining Wall (Plan View)
- W-Beam w Posts
- High Tension Cable Guardrail with Posts

## Existing Utilities

- Existing Electrical
- Existing Fiber Optic Line
- Existing TV Fiber Optic
- Existing Gas Pipe
- Existing Overhead Utility Line
- Existing Power
- Existing Fuel Pipeline
- Existing Undefined Above Ground Pipe Line
- Existing Sanitary Sewer
- Existing Sanitary Force Main
- Existing Storm Drain
- Existing Storm Drain Force Main
- Existing Culvert
- Existing Telephone Line
- Existing TV Line
- Existing Water or Steam Line
- Existing Under Drain
- Existing Slotted Drain
- Existing Conduit
- Existing Conductor
- Existing Down Guy Wire Down Guy
- Existing Underground Vault or Lift Station

## Proposed Utilities

- 24 Inch Pipe
- Reinforced Concrete Pipe
- Under Drain
- Edge Drain

## Traffic Utilities

- Conductor
- Fiber Optic
- Existing Loop Detector
- Existing Double Micro Loop Detector
- Micro Loop Detector Double
- Existing Micro Loop Detector
- Micro Loop Detector
- Signal Head with Mast Arm
- Existing Signal Head with Mast Arm

## Sign Structures

- Existing Overhead Sign Structure
- Existing Overhead Sign Structure Cantilever
- Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

| DATE | CHANGE |
|---|---|
| 09-23-16<br>12-18-20 | Added and Revised Items, Organized by Functional Groups<br>General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

# LINE STYLES

D-101-21

## Right Of Way

- Easement
- Existing Easement
- Right of Way
- Existing Right of Way
- Existing Right of Way Railroad
- Existing Right of Way Not State Owned
- Existing Government Lot Line
- Existing Adjacent Block Lines
- Existing Adjacent Lot Lines
- Existing Adjacent Property Line
- Existing Adjacent Subdivision Lines
- Sight Distance Triangle Line
- Dimension Leader

## Boundary Control

- Existing City Corporate Limits or Reservation Boundary
- Existing State or International Line
- Existing Township
- Existing County
- Existing Section Line
- Existing Quarter Section Line
- Existing Sixteenth Section Line
- Existing Centerline
- Tangent Line

## Cross Sections and Typicals

- Existing Ground
- Existing Topsoil (Cross Section View)
- Existing Ground Void (Not Surveyed) (void — void — void — v)
- Existing Concrete
- Existing Aggregate (Cross Section View)
- Existing Curb and Gutter (Cross Section View)
- Existing Asphalt (Cross Section View)
- Existing Reinforcement Rebar

## Geotechnical

- Geotextile Fabric Type D (D — D)
- Geogrid (Geo — Geo)
- Geotextile Fabric Type R (R — R)
- Geotextile Fabric Type R1 (R — R)
- Geotextile Fabric Type RR (RR — RR)
- Geotextile Fabric Type S (S — S)
- Subgrade Reinforcement
- Failure Line

## Countours

- Depression Contours
- Supplemental Contour

## Profile

- Subgrade, Subcut or Ditch Grade
- Topsoil Profile

## Striping

- Centerline Pavement Marking
- Barrier with Centerline Pavement Marking
- Barrier Pavement Marking
- Stripe 4 IN Dotted Extension White
- Stripe 8 IN Dotted Extension White
- Stripe 8 IN Lane Drop

## Pavement Joints

- Doweled Joint
- Tie Bar 30 Inch 4 Foot Center to Center
- Tie Bar 18 Inch 3 Foot Center to Center
- Tie Bar at Random Spacing

## Bridge Details

- Small Hidden Object
- Large Hidden Object
- Phantom Object
- Existing Conditions Object
- Centerline Main
- Centerline Secondary
- Excavation Limits
- Proposed Ground
- Sheet Piling

## Erosion Control

- Limits of Const Transition Line
- Bale Check
- Rock Check
- Floating Silt Curtain (S — S)
- Silt Fence (SF — SF)
- Excavation Limits
- Fiber Rolls

## Environmental

- Wetland Mitigation
- Existing Wetland Easement USFWS
- Existing Wetland Jurisdictional
- Existing Wetland
- Tree Row

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 07-01-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 09-23-16<br>12-18-20 | Added and Revised Items, Organized by Functional Groups<br>General Revisions |

KIRK J. HOFF
REGISTERED
Kirk J Hoff
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

# SYMBOLS

D-101-30

North Arrow (Half Scale)

Alignment Data Point

Alignment Monument

Spot Elevation

Existing Miscellaneous Spot

Existing Access Control Arrow

Existing Benchmark

Reset USGS Marker

Iron Monument Found

Iron Pin R/W Monument

Property Corner

Iron Pin Reference Monument

Right of Way Marker (Exst, Ppsd, Reset)

Existing Federal Reference Corner

Existing Section Corner (Full, Quarter, Sixteenth, Meander)

Existing Witness Corner

Existing Control Point (CP, GPS-RTK, TRI)

Existing Traverse PI Aerial Panel

Existing Reference Marker Point NGS

Existing EFB Misc

Existing Bush or Shrub

Existing Large Evergreen Tree

Existing Small Evergreen Tree

Existing Large Tree

Existing Small Tree

Existing Tree Trunk

Cairn or Stone Circle

Existing Artifact

Existing Satellite Dish

Existing Weather Station

Existing Windmill or Tower

Reinforced Pavement

CSB Continuous Split Barrel Sample

FA Flight Auger Sample

SB Split Barrel Sample

T Thinwall Tube Sample

N Standard Penetration Test

Incl Inclinometer Tube

Excavation Unit

Existing Ground Water Well Bore Hole

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 07-01-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 12-18-20 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

# SYMBOLS

D-101-31

- Flexible Delineator
- Flexible Delineator Type A (Exst, Ppsd)
- Flexible Delineator Type B (Exst, Ppsd)
- Flexible Delineator Type C (Exst, Ppsd)
- Flexible Delineator Type D (Exst, Ppsd)
- Flexible Delineator Type E (Exst, Ppsd)
- Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)
- Delineator Type C (Exst, Ppsd, Diamond Grade)
- Delineator Type D (Exst, Ppsd, Diamond Grade)
- Delineator Type E (Exst, Ppsd, Diamond Grade)
- Barricade (Type I, Type II, Type III}
- Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)
- Attenuation Device
- Truck Mounted Attenuator
- Delineator Drums
- Flagger
- Tubular Marker
- Traffic Cone
- Back to Back Vertical Panel Sign

- Highway Sign (Exst, Ppsd)
- Mile Post Type A (Exst-Ppsd-Reset)
- Mile Post Type B (Exst, Ppsd)
- Mile Post Type C (Exst, Ppsd)
- Object Marker Type I (Exst, Ppsd)
- Object Marker Type II (Exst, Ppsd)
- Object Marker Type III (Exst, Ppsd)
- Existing Reference Marker
- Road Closure Gate 18 Ft (Exst, Ppsd)
- Road Closure Gate 28 Ft (Exst, Ppsd)
- Road Closure Gate 40 Ft (Exst, Ppsd)
- Existing Railroad Battery Box
- Existing RR Profile Spot
- Existing Railroad Crossbuck
- Existing Railroad Frog
- Existing Mailbox (Private, Federal)

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 07-01-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 12-18-20 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

Kirk J Hoff

12 18 2020

# SYMBOLS

D-101-32

- Existing Luminaire
- Luminaire LED
- Existing Light Standard Luminaire
- Relocate Light Standard
- Light Standard Light LED Luminaire
- Light Standard 35 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 50 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 70 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 100 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 150 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 200 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 250 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 310 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 400 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 700 Watt High Pressure Sodium Vapor Luminaire
- Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire
- Emergency Vehicle Detector
- Video Detection Camera

- High Mast Light Standard 3 Luminaire (Exst, Ppsd)
- High Mast Light Standard 4 Luminaire (Exst, Ppsd)
- High Mast Light Standard 5 Luminaire (Exst, Ppsd)
- High Mast Light Standard 6 Luminaire (Exst, Ppsd)
- High Mast Light Standard 7 Luminaire (Exst, Ppsd)
- High Mast Light Standard 8 Luminaire (Exst, Ppsd)
- High Mast Light Standard 9 Luminaire (Exst, Ppsd)
- High Mast Light Standard 10 Luminaire (Exst, Ppsd)
- Overhead Sign Structure Load Center (Exst, Ppsd)
- Traffic Signal Controller (Exst, Ppsd)
- Pad Mounted Traffic Signal Controller (Exst, Ppsd)
- Flashing Beacon (Exst, Ppsd)
- Concrete Foundation (Exst, Ppsd)
- Pipe Mounted Flasher (Exst, Ppsd)
- Pad Mounted Feed Point (Exst, Ppsd)
- Pipe Mounted Feed Point with Pad (Exst, Ppsd)
- Pole Mounted Feed Point (Exst, Ppsd)
- Junction Box (Exst, Ppsd)
- Existing Pedestrian Head with Number
- Existing Signal Head
- Pole Mounted Head
- Existing Lighting Standard Pole

- Existing Traffic Signal Standard
- Pull Box (Exst-Ppsd-Undefined)
- Intelligent Transportation Pull Box (Exst, Ppsd)
- Transformer (Exst, Ppsd)
- Power Pole (Exst-Ppsd-with Transformer)
- Wood Pole (Exst, Ppsd)
- Pedestrian Push Button Post (Exst, Ppsd)
- Existing Pole
- Existing Telephone Pole
- Existing Post
- Connection Conductor (Ground, Neutral, Phase 1, Phase 2)

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 07-01-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 12-18-20 | General Revisions |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

# SYMBOLS

D-101-33

Existing Manhole (Electrical, Gas, Telephone)

Water Manhole (Exst, Exst with Valve)

Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)

Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)

Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)

Force Main Storm Drain Manhole (Exst, Exst with Valve)

Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)

Existing Water Appurtenance

Sprinkler Head (Exst, Ppsd)

Fire Hydrant (Exst, Ppsd)

Cleanout (Exst Sanitary, Underdrain)

Existing Catch Basin Inlet (Round, Square)

Existing Curb Inlet (Round, Square)

Existing Slotted Reinforced Concrete Pipe

Catch Basin (Riser 30 Inch, Beehive, Type A)

Inlet Mountable Curb (Type A, Type B)

Inlet Saddle Base (Type 1, Type 2)

Inlet Special (Catch Basin, Type 1, Type A)

Inlet (Tee, Type 1, Type 2, Type 2 Double)

Median Drain

Headwall (Exst, Ppsd, Ppsd Single with Vegitation Barrier, Ppsd Double with Vegitation Barrier)

Cap or Stub
Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water

Existing Pedestal
Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined

Existing Pipe Vent
Gas, Fuel, Sanitary, Storm Drain, Water, Undefined

Valve
Exst Gas, Exst Water, Ppsd Water, Exst Undefined

Pump
Sanitary, Storm Drain, Exst Water

Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)

Existing Utility Marker

Existing Meter

Existing Fuel Dispensers

Existing Fuel Filler Pipes

Existing Fuel Leak Sensors

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 07-01-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 12-18-20 | General Revisions<br>Sheet added<br>- Continued from D-101-32 |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

12 18 2020

# Cross Section Legend

D-101-40


| Description | Longitudinal Parallel to Roadway | Transverse Perpendicular to Roadway* |
|---|---|---|
| Cable Line | CBL1 | CBL2 |
| Conduit Line | CDU1 | CDU2 |
| Electric Line | E1 | E2 |
| Fiber Optic Line | F1 | F2 |
| Gas Main Line | GM1 | GM2 |
| Gas Service Line | GS1 | GS2 |
| Gas Transmission Line | GT1 | GT2 |
| Fuel Pipeline | PL1 | PL2 |
| Sanitary Sewer Force Main | SSF1 | SSF2 |
| Sanitary Sewer | SS1 | SS2 |
| Steam Line | STE1 | STE2 |
| Storm Drain (Assumed Depth) | SD1 | SD2 |
| Telephone Line | T1 | T2 |
| TV Line | TV1 | TV2 |
| Water Main Line | WM1 | WM2 |
| Water Service Line | WS1 | WS2 |

| Description | Longitudinal Parallel to Roadway | Transverse Perpendicular to Roadway* |
|---|---|---|
| Overhead Power Transmission Line | OHT1 | OHT2 |
| Overhead Line | OH1 | OH2 |

Light Standard - Multiple Variations
- Concrete
- Steel
- Wood
- with Traffic Signal



Pole - Multiple Variations
- Utility
- Brace
- Feed Point
- Guy
- Power
- Power Structure
- Power with Light
- Power with Transformer



Manhole - Multiple Variations
- Electric
- Fiber Optic
- Gas
- Inlet
- Sanitary Force Main
- Sanitary
- Sanitary with Valve
- Steam
- Storm
- Storm Force Main
- Storm with Valve
- Telephone
- Water
- Water with Meter
- Water with Valve
- Water with Air Release Valve



Anchor



High Tension Cable Guardrail




* Usually the transverse utilities are shown on a cross section with 2 or more symbols. The utility runs from one symbol to the other, but the connection may not be shown.




Connection to infer that probably will not be displayed

When storm drain invert elevations are NOT used to draw pipe, they will appear as shown to the left. When invert elevations are used to draw pipe, they will be a cross section similar to the graphics shown below.

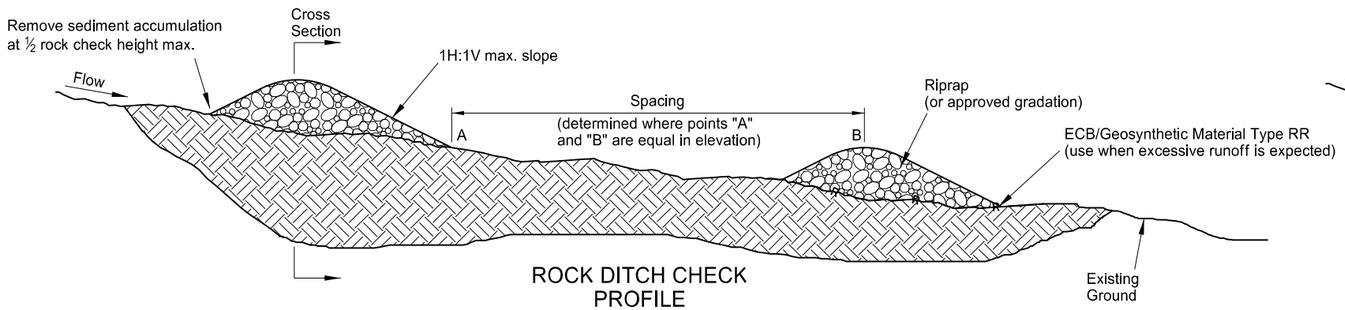


| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 9-20-18 | |
| REVISIONS | |
| DATE | CHANGE |
| 6/14/2023 | CADD Standards Update |

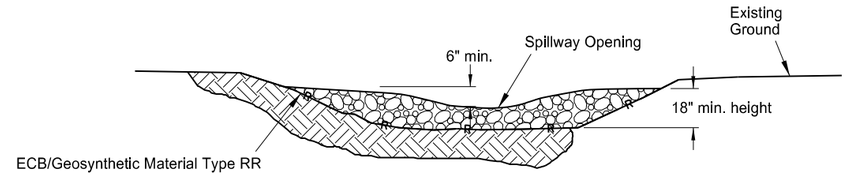
KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

06/14/23

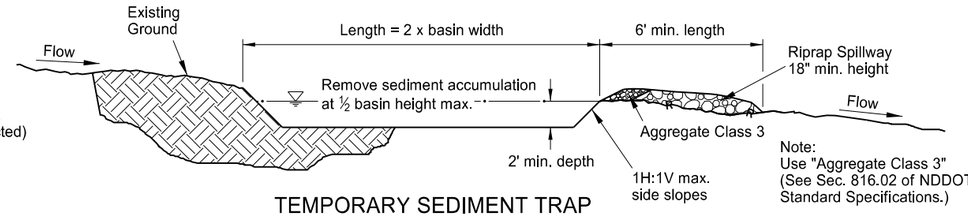
# EROSION AND SILTATION CONTROLS



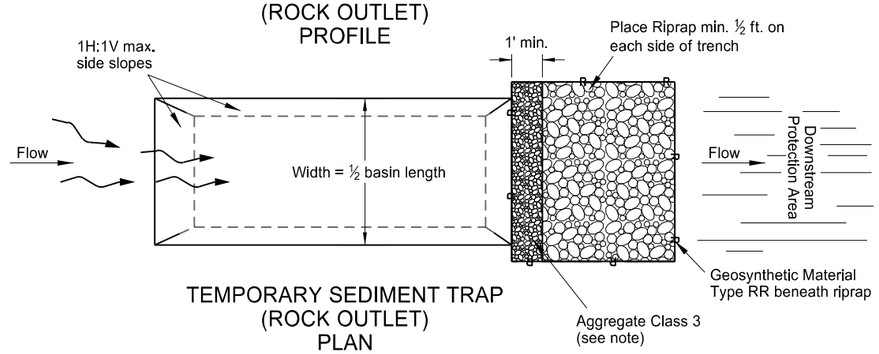

ROCK DITCH CHECK
PROFILE



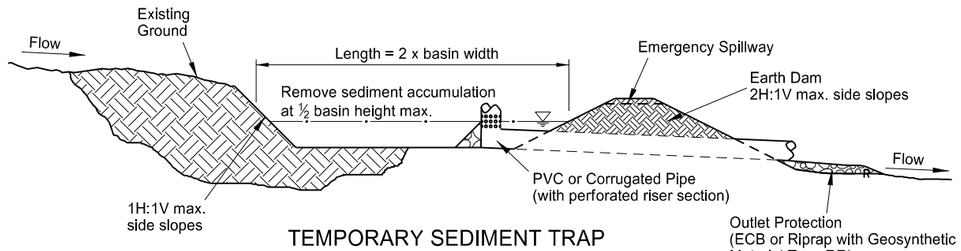

ROCK DITCH CHECK
CROSS SECTION



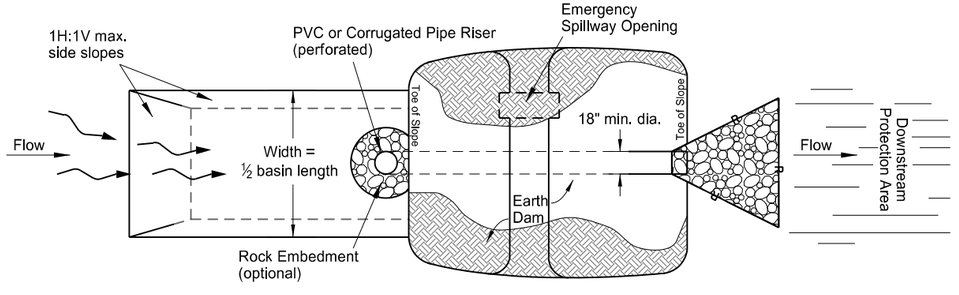

TEMPORARY SEDIMENT TRAP
(ROCK OUTLET)
PROFILE




TEMPORARY SEDIMENT TRAP
(ROCK OUTLET)
PLAN




TEMPORARY SEDIMENT TRAP
(RISER PIPE OUTLET)
PROFILE




TEMPORARY SEDIMENT TRAP
(RISER PIPE OUTLET)
PLAN

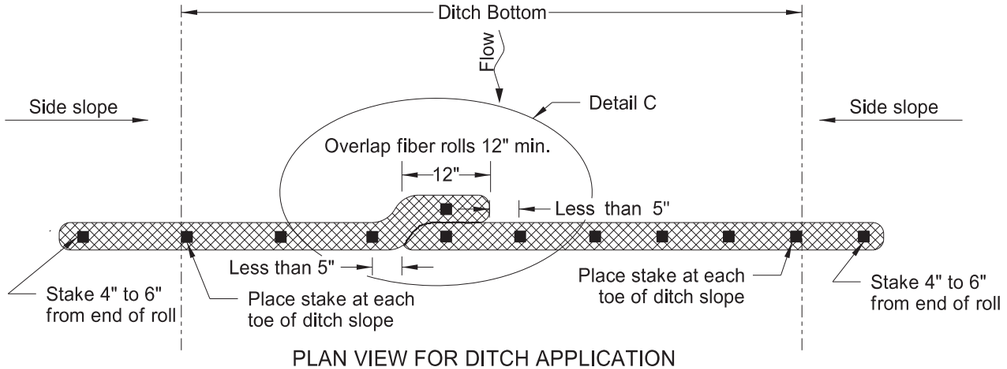
| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 10-03-13 | |
| REVISIONS | |
| DATE | CHANGE |
| 06-26-14 | Changed standard drawing number from D-708-2 to D-256-1. Deleted silt fence details. |
| 10-17-17 | Updated to active voice. |
| 08-27-19 | New Design Engineer PE Stamp |

This document was originally issued and sealed by Kirk J Hoff, Registration Number PE-4683, on 8-27-2019 and the original document is stored at the North Dakota Department of Transportation

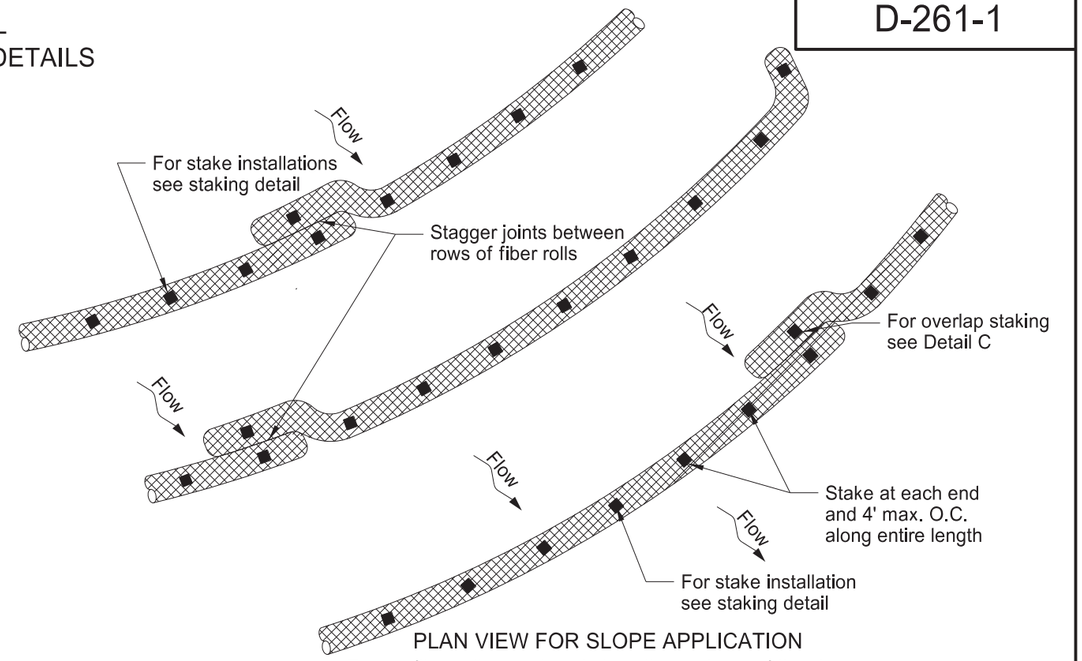
Docusign Envelope ID: 16F7A80B-8DD6-45CC-B8F9-AA9BED01BCFF

D-261-1

# EROSION CONTROL
# FIBER ROLL PLACEMENT DETAILS

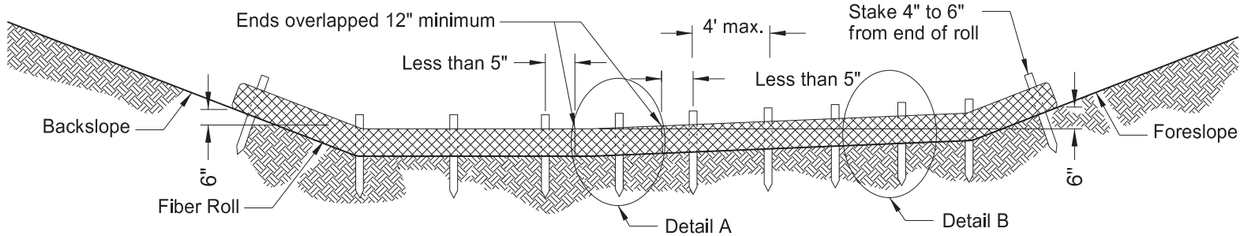



PLAN VIEW FOR DITCH APPLICATION

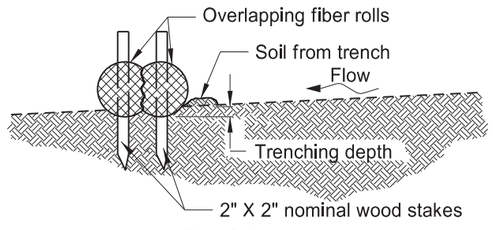



PLAN VIEW FOR SLOPE APPLICATION

Ensure fiber rolls are placed along the contours of the slope.

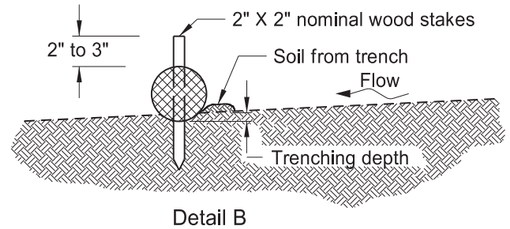



12 OR 20 INCH FIBER ROLL - DITCH BOTTOM




Detail A

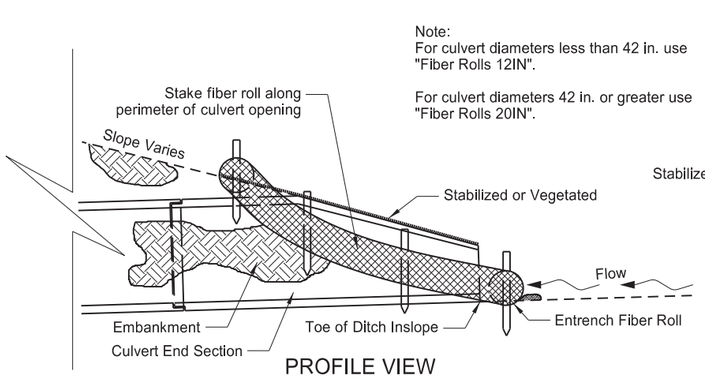
Fiber Roll Overlapping Staking Detail




Detail B

Fiber Roll Staking Detail

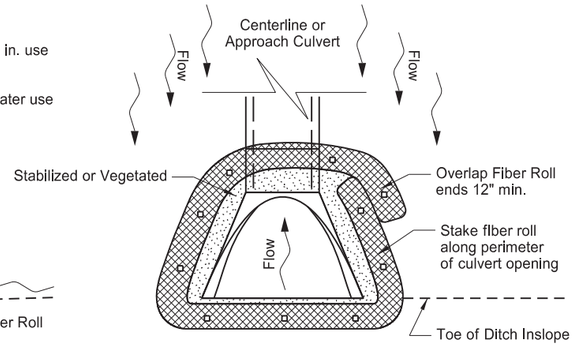
NOTE: Do not allow runoff to run under or around roll.




PROFILE VIEW

Note:
For culvert diameters less than 42 in. use "Fiber Rolls 12IN".

For culvert diameters 42 in. or greater use "Fiber Rolls 20IN".




PLAN VIEW

FIBER ROLL PROTECTION (INLET OF CULVERT)

| FIBER ROLL DIAMETER | NOMINAL STAKE SIZE | MINIMUM STAKE LENGTH | TRENCH DEPTH | |
|---|---|---|---|---|
| | | | MINIMUM | MAXIMUM |
| 6" | 2" x 2" | 18" | 2" | 2" |
| 9" or 12" | 2" x 2" | 24" | 2" | 3" |
| 20" | 2" x 2" | 36" | 3" | 5" |

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

11-18-10

REVISIONS

| DATE | CHANGE |
|---|---|
| 06-10-13 | Added plan view for ditch and slope application. Added table with values for stake and trench dimensions. |
| 10-04-13 | Revised fiber roll overlap detail. |
| 06-26-14 | Changed standard drawing number from D-708-7 to D-261-1. |
| 08-27-19 | New Design Engineer PE Stamp. |
| 04-22-24 | Slope Plan View-overlap change. |
| 03-13-25 | Added D-708-6 Culvert Inlet detail |

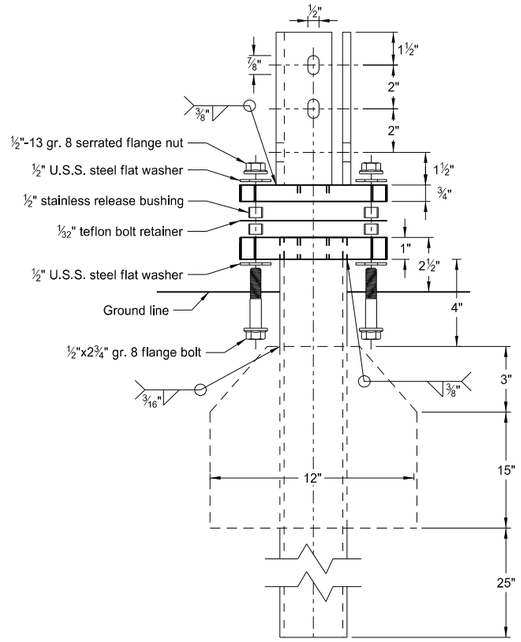
KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

03/13/25

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

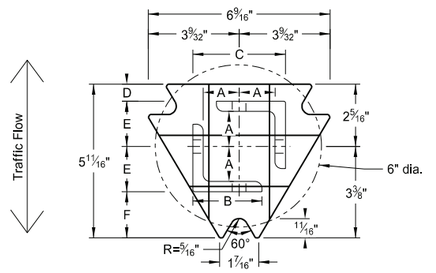
# BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-7

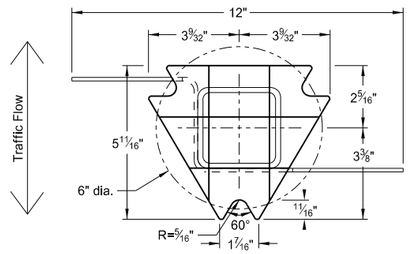



Multi-Directional
Slip Base Assembly

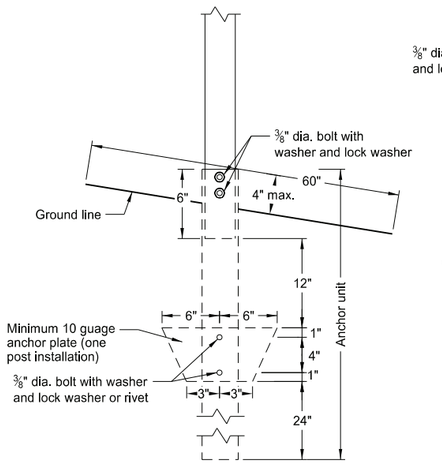
## Perforated Tube



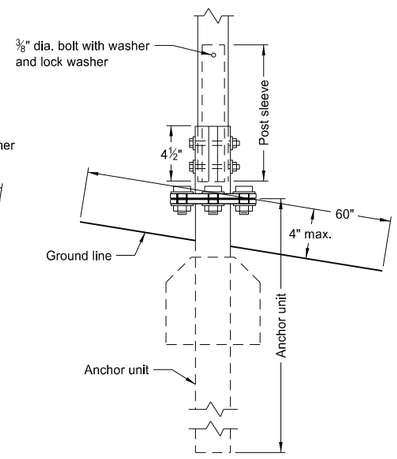

Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2½"x2½"x⅜" ASTM A36 structural angle





Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50





Anchor Unit and Post Assembly




Multi-Directional
Slip Base Anchor Unit
and Post Sleeve Assembly




Bolt Retainer for Base Connection
Bolt Retainer- 1/32" Reprocessed Teflon

Notes:

1. Torque slip base bolts as specified by manufacturer.
2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
4. In concrete sidewalk, use same anchor without wings.
5. Provide more than 7' between the first and fourth posts of a four post sign.

| Telescoping Perforated Tube | | | | | | |
|---|---|---|---|---|---|---|
| Number of Posts | Post Size in. | Wall Thick-ness Gauge | Sleeve Size in. | Wall Thick-ness Gauge | Slip Base | Anchor Size without Slip Base in. |
| 1 | 2 | 12 | | | No | 2¼ |
| 1 | 2¼ | 12 | | | No | 2½ |
| 1 | 2½ | 12 | | | (A) | 3 |
| 1 | 2½ | 10 | | | Yes | |
| 1 | 2¼ | 12 | 2 | 12 | Yes | |
| 1 | 2½ | 12 | 2¼ | 12 | Yes | |
| 2 | 2 | 12 | | | No | 2¼ |
| 2 | 2¼ | 12 | | | No | 2½ |
| 2 | 2½ | 12 | | | Yes | |
| 2 | 2½ | 12 | | | Yes | |
| 2 | 2¼ | 10 | 2 | 12 | Yes | |
| 2 | 2½ | 12 | 2¼ | 12 | Yes | |
| 3 & 4 | 2½ | 12 | | | Yes | |
| 3 & 4 | 2½ | 10 | | | Yes | |
| 3 & 4 | 2½ | 12 | 2¼ | 12 | Yes | |
| 3 & 4 | 2¼ | 12 | 2 | 12 | Yes | |
| 3 & 4 | 2½ | 10 | 2 3/16 | 10 | Yes | |

| Properties of Telescoping Perforated Tube | | | | | | |
|---|---|---|---|---|---|---|
| Tube Size in. | Wall Thickness in. | U.S. Standard Gauge | Weight per Foot lbs. | Moment of Inertia in.⁴ | Cross Sec. Area in.² | Section Modulus in.³ |
| 1½ x 1½ | 0.105 | 12 | 1.702 | 0.129 | 0.380 | 0.172 |
| 2 x 2 | 0.105 | 12 | 2.416 | 0.372 | 0.590 | 0.372 |
| 2¼ x 2¼ | 0.105 | 12 | 2.773 | 0.561 | 0.695 | 0.499 |
| 2 3/16 x 2 3/16 | 0.135 | 10 | 3.432 | 0.605 | 0.841 | 0.590 |
| 2½ x 2½ | 0.105 | 12 | 3.141 | 0.804 | 0.803 | 0.643 |
| 2½ x 2½ | 0.135 | 10 | 4.006 | 0.979 | 1.010 | 0.785 |

| Top Post Receiver Data Table | | | | | | |
|---|---|---|---|---|---|---|
| Square Post Sizes (B) | A | B | C | D | E | F |
| 2 3/16"x10 ga. | 1 9/64" | 2½" | 3 1/32" | 25/32" | 1 33/64" | 1 7/8" |
| 2½"x10 ga. | 1 9/32" | 2½" | 3 5/16" | ⅝" | 1 21/32" | 1¾" |

(A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.

(B) For additional wind load, insert the 2 3/16"x10 ga. into 2½"x10 ga.

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 2-28-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 9-27-17 | Updated to active voice |
| 10-03-19 | New Design Engr PE Stamp |
| 8-01-24 | Electronic Stamp/Signature |

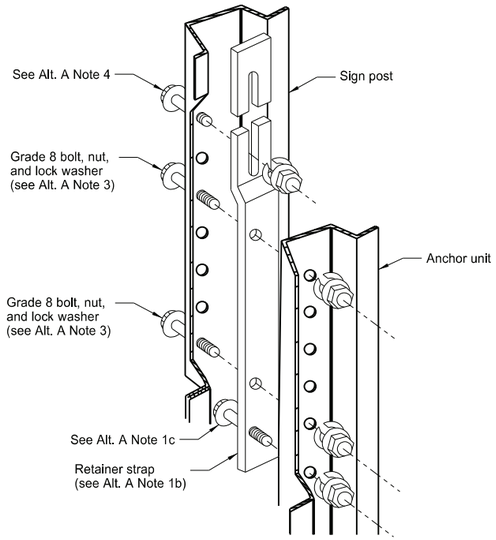
KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

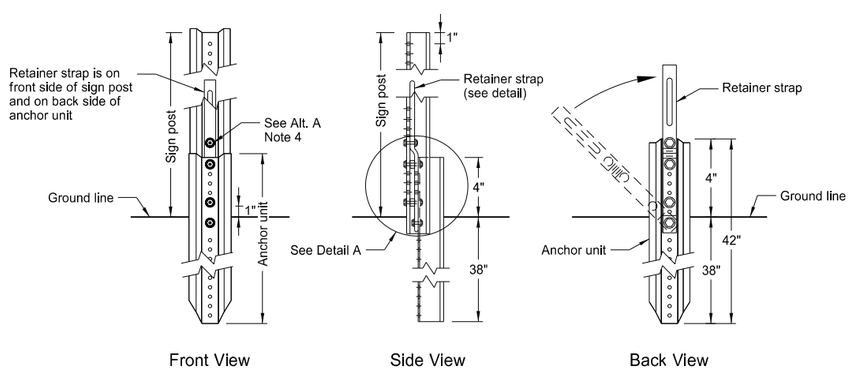
# BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

## U-Channel Post





Detail A



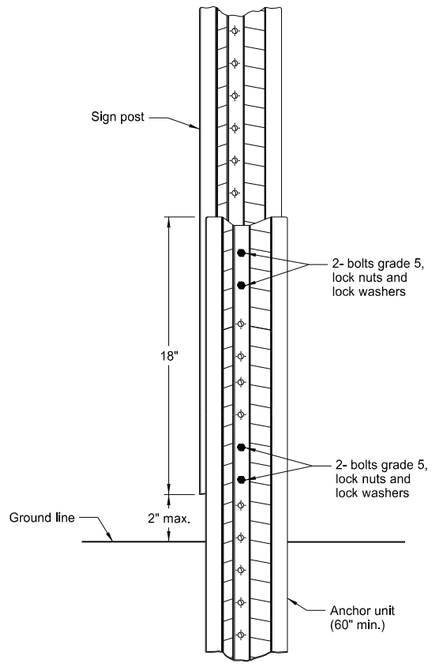

Front View | Side View | Back View

### Breakaway U-Channel Detail Alternate A

Install a maximum of 2 posts within 7'.

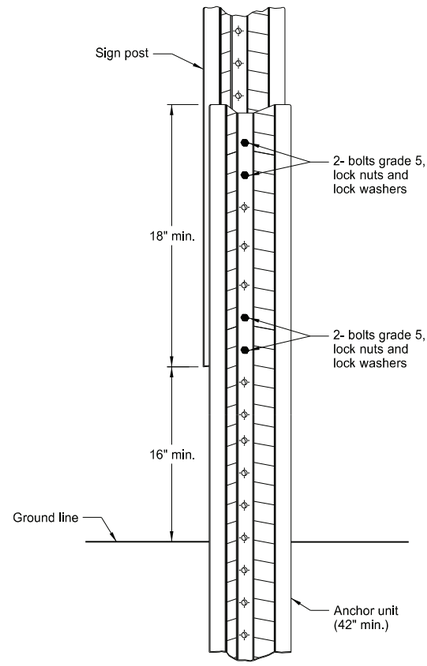



Retainer Strap Detail




### Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.




### Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

Install a maximum of 3 posts within 7'.

Alternate A Steps of Installation:

1. a) Drive anchor unit to within 12" of ground level.
   b) Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
   c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
   d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
   b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
   b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 2-28-14 | |
| REVISIONS | |
| DATE | CHANGE |
| 9-27-17 | Updated to active voice |
| 10-03-19 | New Design Engr PE Stamp |
| 8-01-24 | Electronic Stamp/Signature |

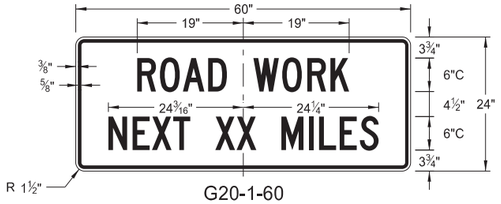
KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

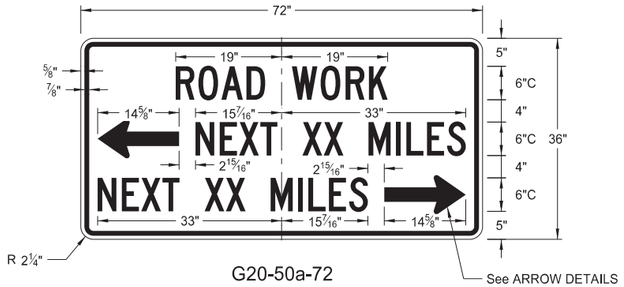
Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

# CONSTRUCTION SIGN DETAILS
# TERMINAL AND GUIDE SIGNS

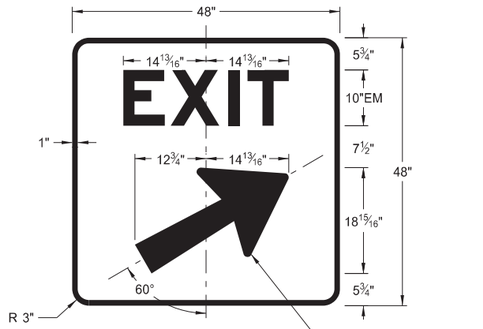
D-704-9





G20-1-60
Legend: black (non-refl)
Background: orange





G20-50a-72
Legend: black (non-refl)
Background: orange



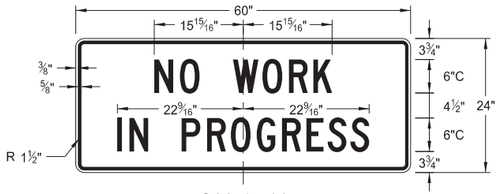

E5-1(L or R)-48
Legend: white
Background: green (orange optional)



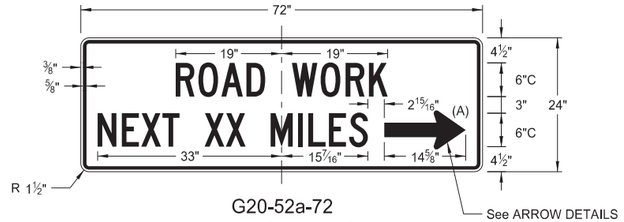

E5-1-48




G20-50a-72
G20-52a-72





G20-1b-60
Legend: black (non-refl)
Background: orange





G20-52a-72
Legend: black (non-refl)
Background: orange





M4-8-36
Legend: black (non-refl)
Background: orange




M4-9(L or R)-30
Right or Left



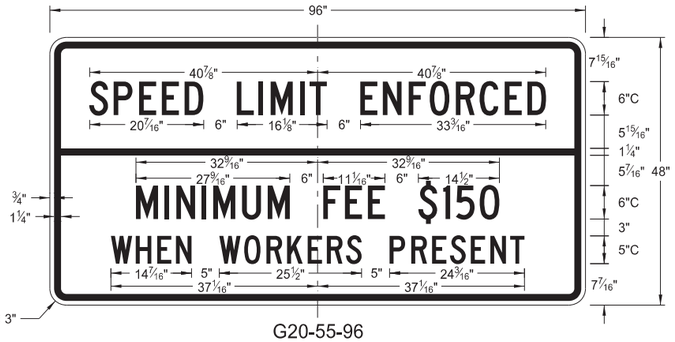

G20-2-48
Legend: black (non-refl)
Background: orange



M4-9(L or R)-30
Advanced Right or Left




M4-9-30
Straight




G20-55-96
Legend: black (non-refl)
Background: orange




G20-4b-36
Legend: black (non-refl)
Background: orange




M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange

## ARROW DETAILS

NOTES:

(A) Arrow may be right or left of the legend to indicate construction to the right or left.


| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 8-13-13 | |
| REVISIONS | |
| DATE | CHANGE |
| 08-17-17 | Added sign & background color |
| 10-03-19 | New Design Engineer PE Stamp |
| 08-01-24 | Electronic Stamp/Signature |
| 06-30-25 | Legislative Changes |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

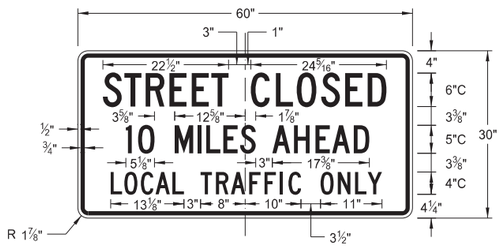
Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB




# CONSTRUCTION SIGN DETAILS
## REGULATORY SIGNS



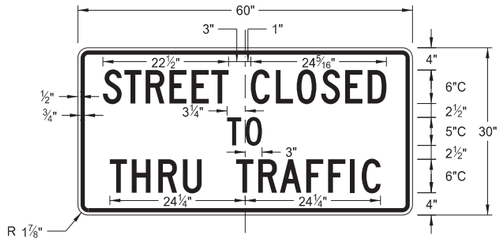

R1-50P-24
Legend: black (non-refl)
Background: white




R11-3c-60
Legend: black (non-refl)
Background: white




R2-1aP-24
Legend: black (non-refl)
Background: white




R11-4a-60
Legend: black (non-refl)
Background: white




R11-2a-48
Legend: black (non-refl)
Background: white

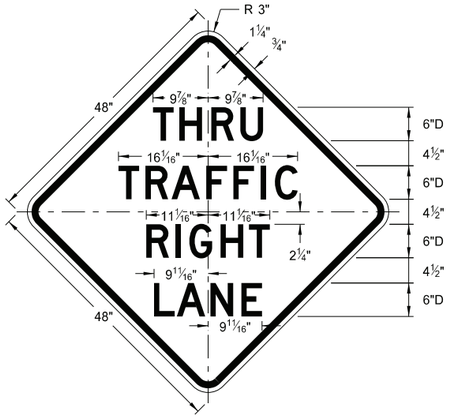
| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 8-13-13 | |
| REVISIONS | |
| DATE | CHANGE |
| 08-17-17 | Revised sign number |
| 10-03-19 | New Design Engineer PE Stamp |
| 08-01-24 | Electronic Stamp/Signature |
| 06-30-25 | Legislative Changes |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

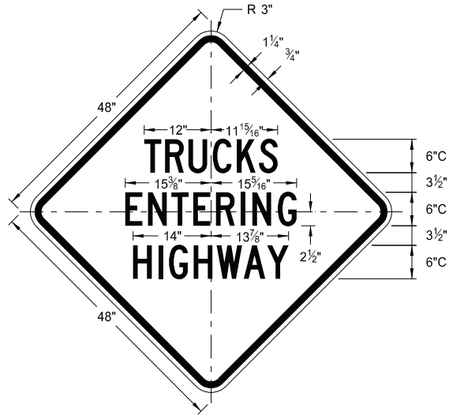
DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

# CONSTRUCTION SIGN DETAILS
## WARNING SIGNS

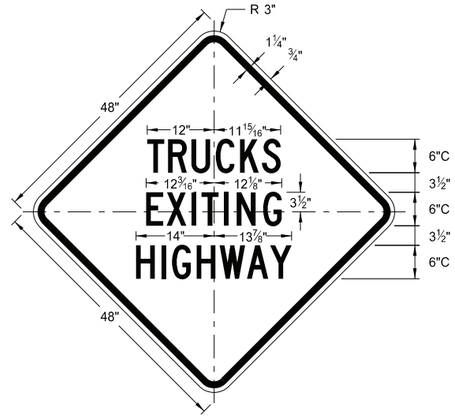
D-704-11



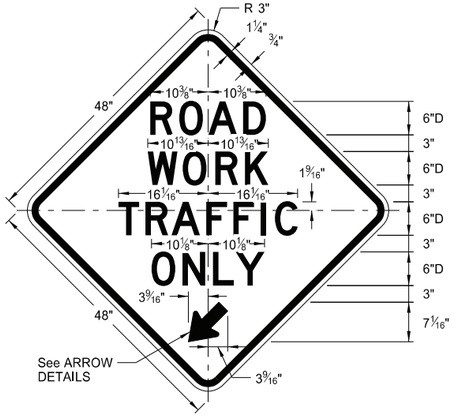

W5-8-48
Legend: black (non-refl)
Background: orange



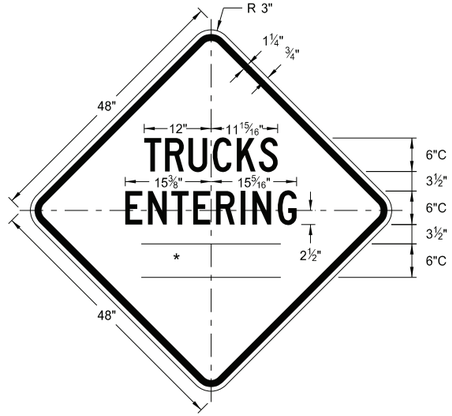

W8-53-48
Legend: black (non-refl)
Background: orange



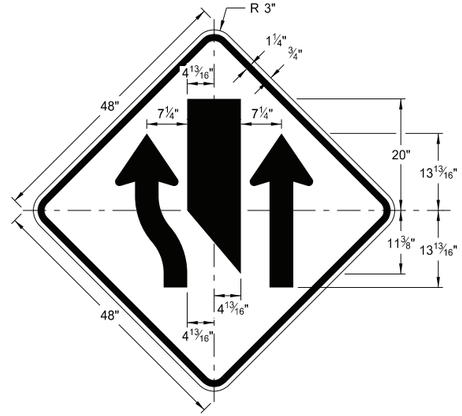

W8-56-48
Legend: black (non-refl)
Background: orange



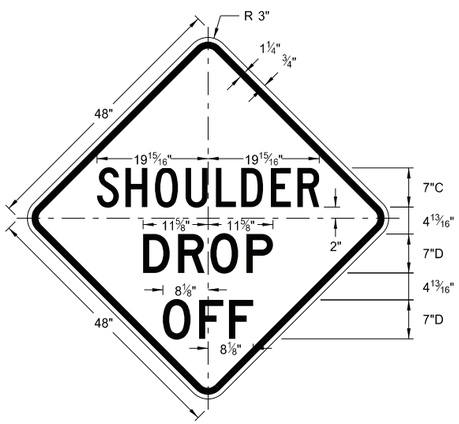

W5-9-48
Legend; black (non-refl)
Background: orange



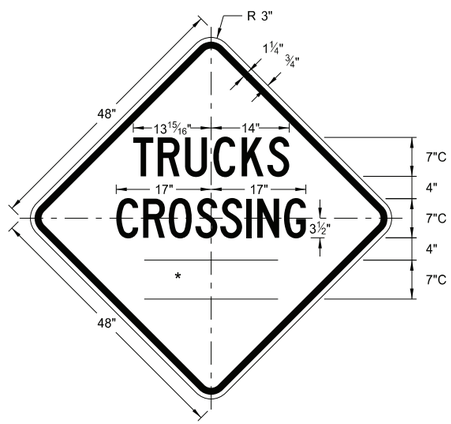

W8-54-48
Legend; black (non-refl)
Background: orange




W9-3a-48
Legend; black (non-refl)
Background: orange





W8-9a-48
Legend: black (non-refl)
Background: orange



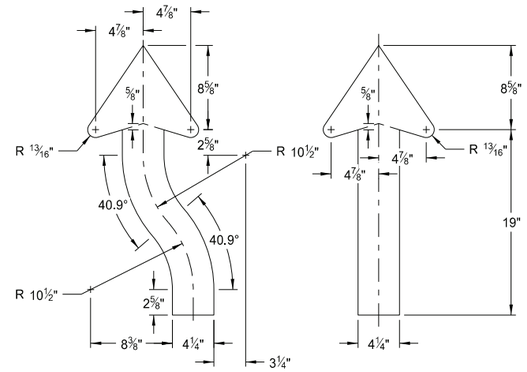

W8-55-48
Legend: black (non-refl)
Background: orange

| WORD | LETTER SPACING |
|---|---|
| AHEAD | Standard |
| 200 FT | Standard |
| 350 FT | Standard |
| 500 FT | Standard |
| 1000 FT | Reduce 40% |
| 1500 FT | Reduce 40% |
| ½ MILE | Reduce 50% |
| 1 MILE | Standard |

* DISTANCE MESSAGES




W5-9-48




W9-3a-48

ARROW DETAILS

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 8-13-13 | |
| REVISIONS | |
| DATE | CHANGE |
| 8-17-17 | Updated sign number |
| 5-31-18 | Revised sign and arrow details |
| 10-03-19 | New Design Engineer PE Stamp |
| 8-01-24 | Electronic Stamp/Signature |


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

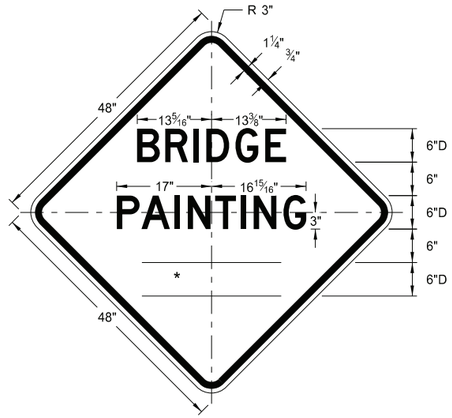
DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

# CONSTRUCTION SIGN DETAILS
## WARNING SIGNS

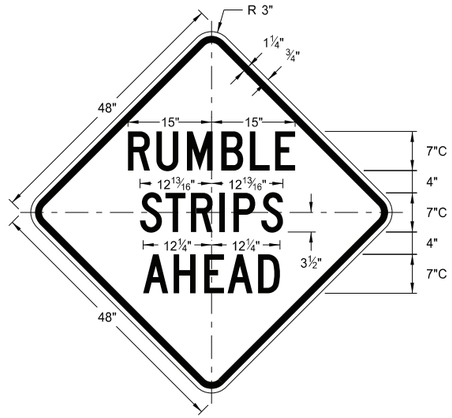
D-704-11A




W16-7aP-18
Legend: black (non-refl)
Background: orange



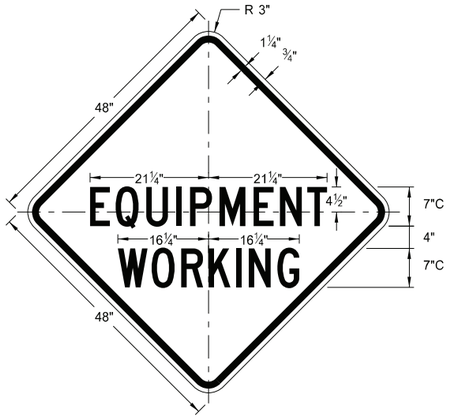

W21-50-48
Legend: black (non-refl)
Background: orange



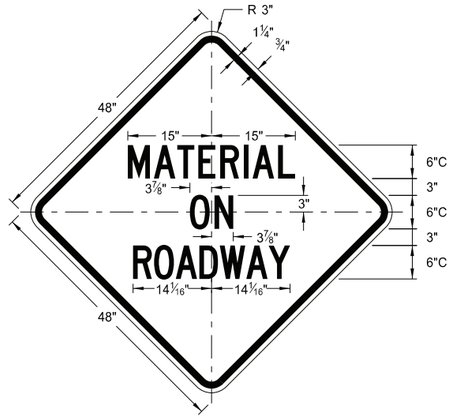

W21-53-48
Legend: black (non-refl)
Background: orange

| WORD | LETTER SPACING |
|---|---|
| AHEAD | Standard |
| 200 FT | Standard |
| 350 FT | Standard |
| 500 FT | Standard |
| 1000 FT | Reduce 40% |
| 1500 FT | Reduce 40% |
| ½ MILE | Reduce 50% |
| 1 MILE | Standard |

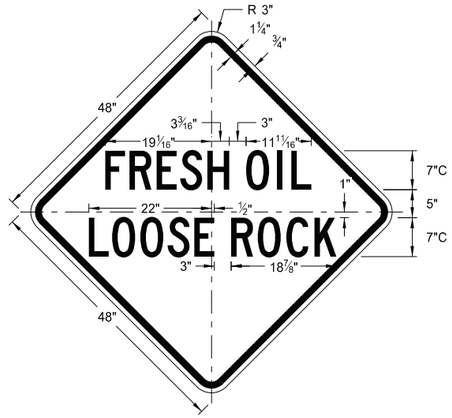
* DISTANCE MESSAGES





W20-51-48
Legend: black (non-refl)
Background: orange



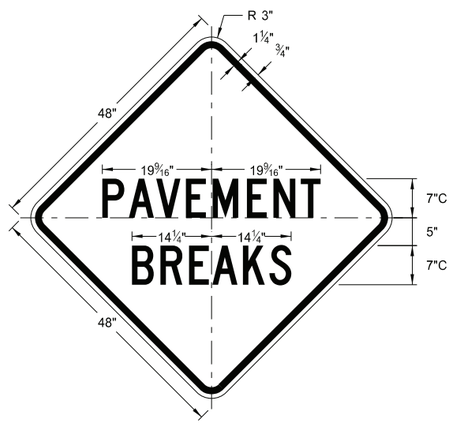

W21-51-48
Legend: black (non-refl)
Background: orange





W22-8-48
Legend: black (non-refl)
Background: orange




W20-52P-54
Legend: black (non-refl)
Background: orange




W21-52-48
Legend: black (non-refl)
Background: orange




W16-7aP-18

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 5-31-18 | |
| REVISIONS | |
| DATE | CHANGE |
| 11-01-19 | Added details for sign W16-7aP-18. |
| 8-01-24 | Electronic Stamp/Signature. |


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775

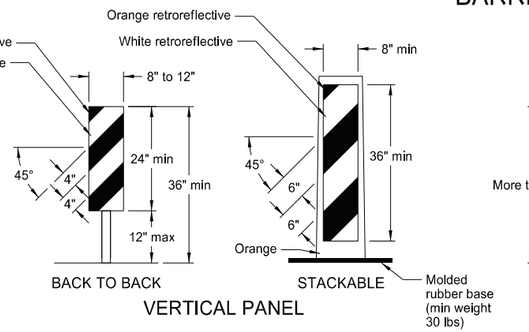
# BARRICADE AND CHANNELIZING DEVICE DETAILS

D-704-13





## DELINEATOR DRUM

Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectorized spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.





## VERTICAL PANEL

Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.



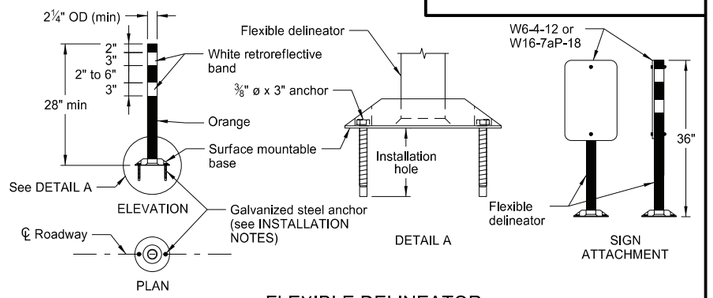

## TRAFFIC CONE

Provide retroreflectorization of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectorized space between the orange and white stripes.




## TUBULAR MARKER


Provide retroreflectorization of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.



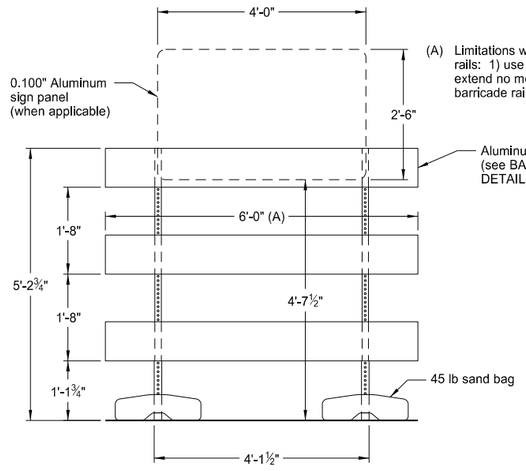

## FLEXIBLE DELINEATOR

INSTALLATION NOTES:

1. Drill installation holes to diameter and depth required by manufacturer's specifications.
2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

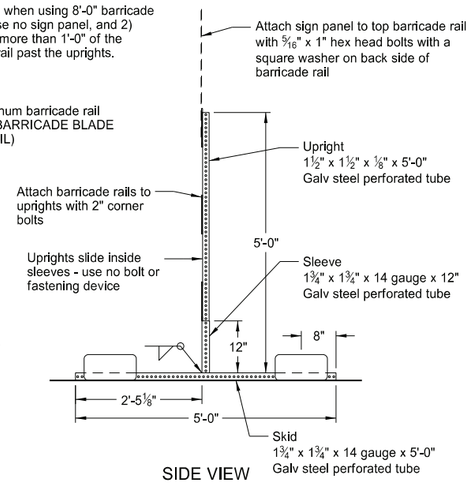



## BARRICADE BLADE DETAIL



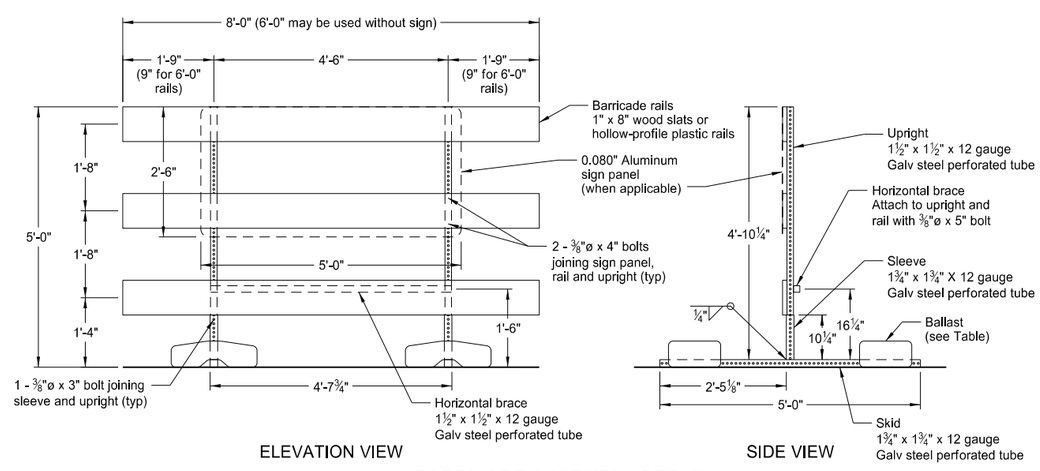

## ELEVATION VIEW

(A) Limitations when using 8'-0" barricade rails: 1) use no sign panel, and 2) extend no more than 1'-0" of the barricade rail past the uprights.





## SIDE VIEW

## BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)





## BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

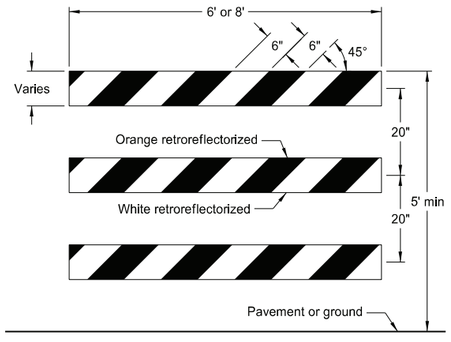
NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".




## TYPE I BARRICADE






## TYPE II BARRICADE

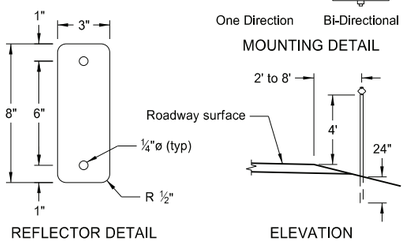



## TYPE III BARRICADE

## BARRICADE RAIL DETAILS




## DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

| | |
|---|---|
| Without Sign | 4 - 25 lb sandbags |
| With Sign | 6 - 25 lb sandbags |

Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 10-3-13 | |
| REVISIONS | |
| DATE | CHANGE |
| 9-27-17 | Updated to active voice |
| 11-01-19 | Revised details for Flexible Delineator |
| 8-01-24 | Electronic Stamp/Signature |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

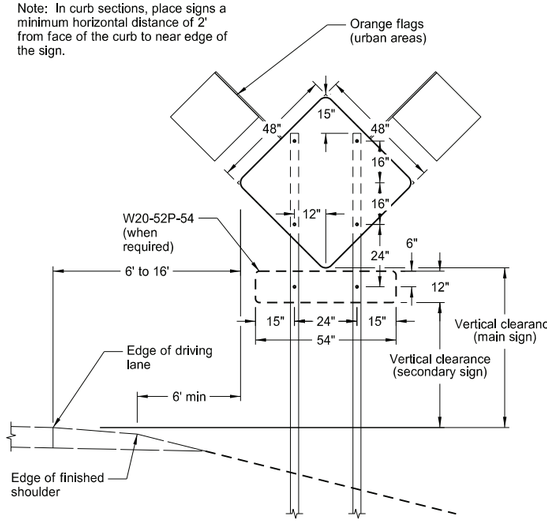
08/01/24

DocuSign Envelope ID: B6D1C72A-6E5E-4E5C-A02F-4D3D1C582775


# CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS

D-704-14


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.





TYPICAL SECTION
(48" x 48" diamond warning sign shown)





48" x 48" DIAMOND SIGN
(with 30" x 30" secondary sign)





R1-2-60 - YIELD SIGN





R1-1-48 - STOP SIGN
(with R6-1-54 sign as required)





48" x 48" SIGN
(with R6-1-54 sign as required)





24" x 36" SIGN





24" x 24"
ROUTE MARKER
ASSEMBLY





18" x 18"
DIAMOND SIGN





48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)





W14-3-64 - PENNANT SIGN





R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)





48" x 48" SIGN
(with R2-1aP-24 sign as required)





30" x 24" SIGN





108" x 48" SIGN





96" x 48" SIGN





72" x 36" SIGN





72" x 24" SIGN



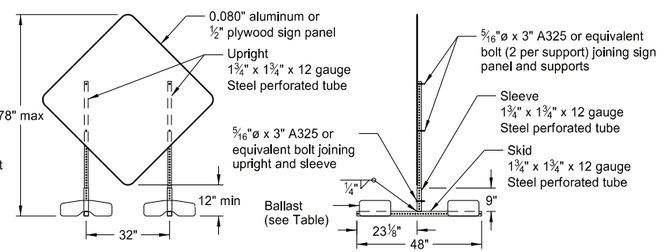

60" x 24" SIGN



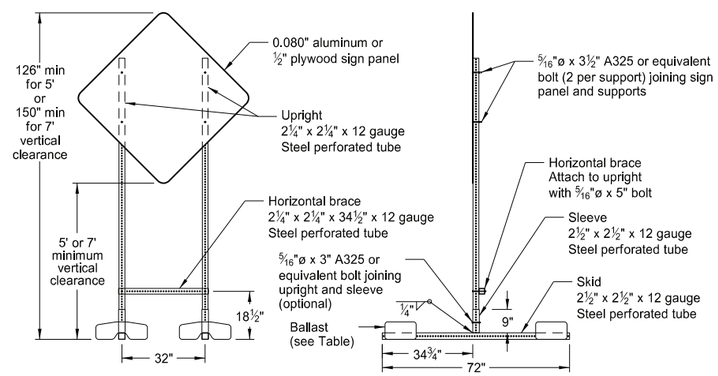

48" x 24" SIGN




36" x 36"
ROUTE MARKER
ASSEMBLY




PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT




PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

   Place signs over 50 square feet on 2½" x 2½" perforated tube supports as a minimum.

   Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, ½" plywood, or other approved material, except where noted. Punch all holes round for ⅜" bolts.

3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

   Interstate - white legend on blue background
   Interstate Business Loop - white legend on green background
   US and State - black legend on white background
   County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

   The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

   Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

   Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

   Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

| Sign Panel Mounting Height (ft) | Number of 25 lb sandbags for 4' x 4' sign panel |
|---|---|
| 1' | 6 |
| 5' | 8 |
| 7' | 10 |

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

10-4-13

REVISIONS

| DATE | CHANGE |
|---|---|
| 11-14-13 | Revised Note 6 |
| 9-27-17 | Updated to active voice |
| 11-01-19 | Revised 60"x24" sign detail |
| 8-01-24 | Electronic Stamp/Signature |

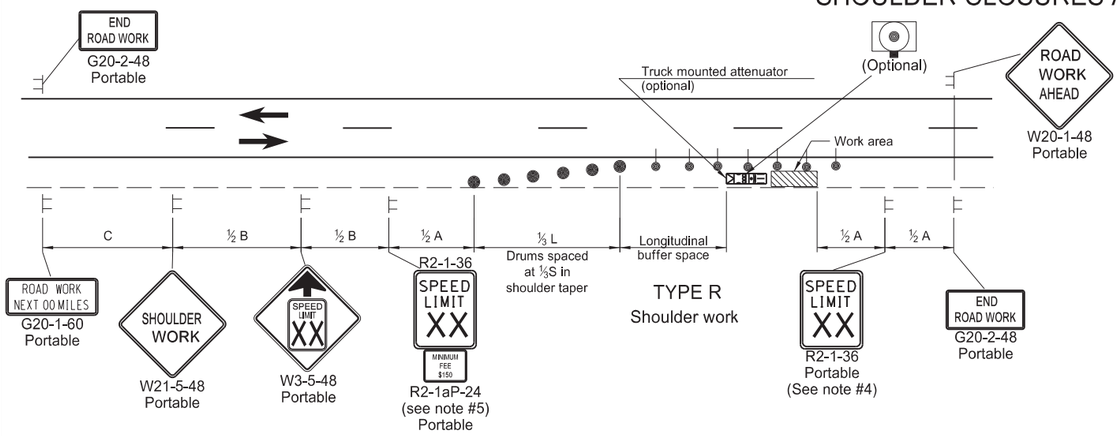
KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA

08/01/24

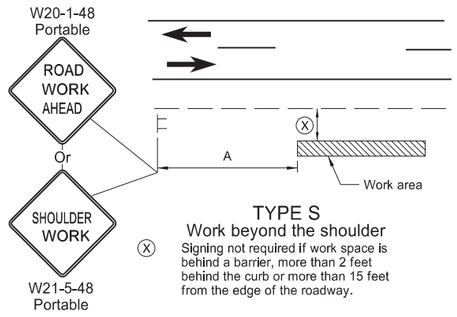
Docusign Envelope ID: 2F5C9714-A0E1-42BB-B36B-42204844BFCB

# SHOULDER CLOSURES AND BRIDGE PAINTING LAYOUTS

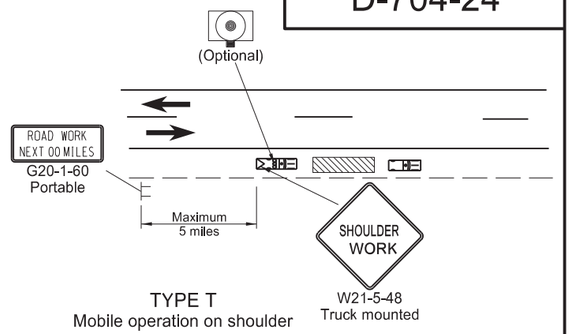
D-704-24



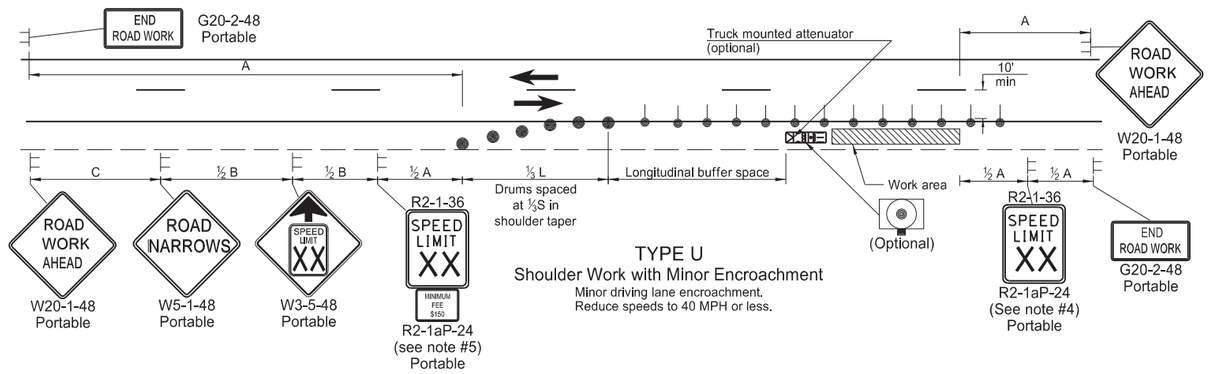

TYPE R
Shoulder work



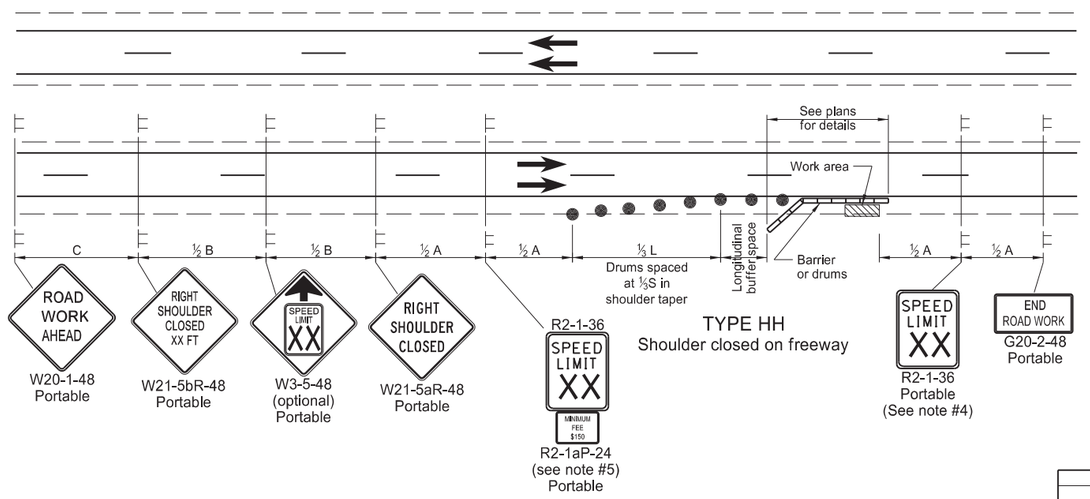

TYPE S
Work beyond the shoulder
Signing not required if work space is behind a barrier, more than 2 feet behind the curb or more than 15 feet from the edge of the roadway.



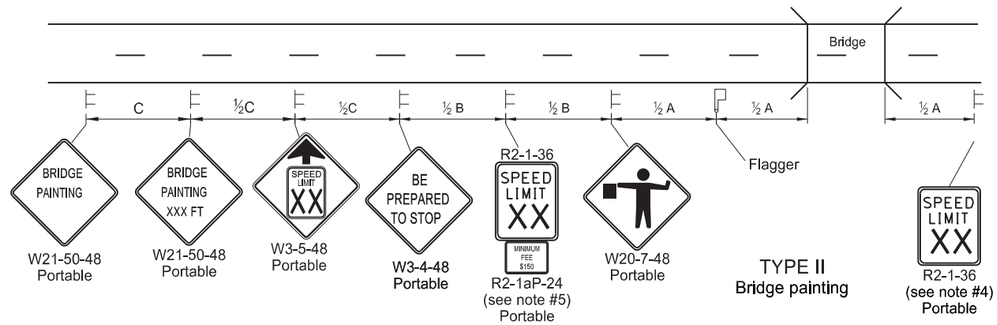

TYPE T
Mobile operation on shoulder




TYPE U
Shoulder Work with Minor Encroachment
Minor driving lane encroachment.
Reduce speeds to 40 MPH or less.




TYPE HH
Shoulder closed on freeway




TYPE II
Bridge painting

Notes
1. Variables
   S = Numerical value of speed limit or 85th percentile.
   W = The width of the taper in feet.
   L = Minimum length of taper, S x W for freeways, expressways, and all other roads with speeds of 45 mph or greater, or W x $S^2$ /60 for urban, residential, and other streets with speeds of 40 mph or less.
2. Space delineator drums for tapering traffic at dimension "S". Space delineator drums or tubular markers for tangents at 2 times "S".
3. Sequencing Arrow Panels
   Use Type A on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
   UseType B on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
   Use Type C on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
4. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
5. Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½B.
6. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
7. Cover existing speed limit signs within a reduced speed zone.
8. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
9. Recommend 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

KEY

| | |
|---|---|
| Sign | Work area |
| Delineator Drum | Tubular Marker |
| Sequencing Arrow Panel (Caution Mode) | |

ADVANCE WARNING SIGN SPACING

| Road Type | Distance Between Signs Min. (ft) A | B | C |
|---|---|---|---|
| Urban - Low Speed (30 mph or less) | 150 | 150 | 150 |
| Urban - Low Speed (over 30 to 40 mph) | 280 | 280 | 280 |
| Urban - High Speed (over 40 mph to 50 mph) | 360 | 360 | 360 |
| Rural - High Speed (over 50 mph to 65 mph) | 720 | 720 | 720 |
| Urban Expressway and Freeway (55 mph to 60 mph) | 850 | 1350 | 2200 |
| Rural Expressway and Freeway (70 mph to 80 mph) | 1000 | 1500 | 2640 |
| Interstate/4-Lane Divided (Maintenance and Surveying) | 750 | 1000 | 1500 |

Longitudinal Buffer Space

| Speed (mph) | Length Min (feet) |
|---|---|
| 20 | 115 |
| 25 | 155 |
| 30 | 200 |
| 35 | 250 |
| 40 | 305 |
| 45 | 360 |
| 50 | 425 |
| 55 | 495 |
| 60 | 570 |
| 65 | 645 |
| 70 | 730 |
| 75 | 820 |
| 80 | 910 |

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-27-13

REVISIONS

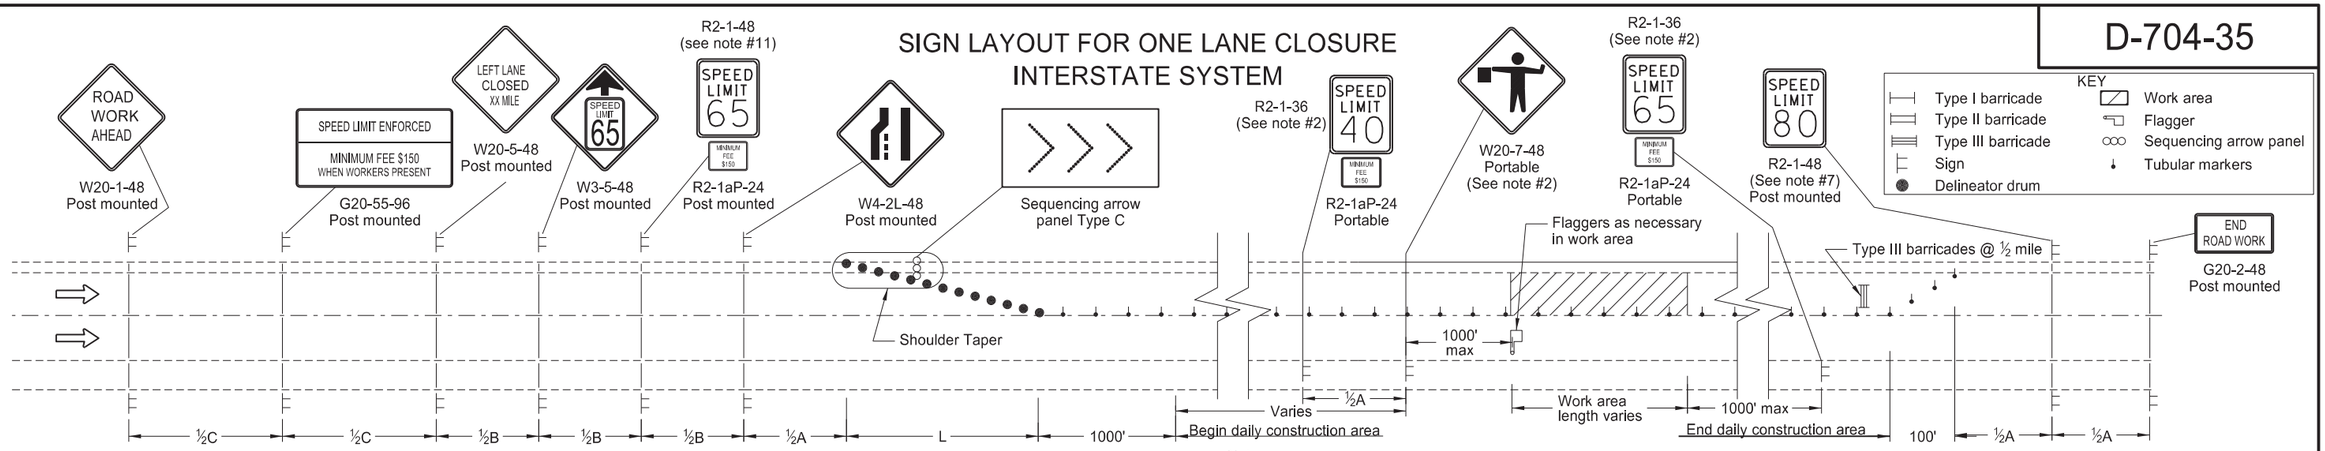
| DATE | CHANGE |
|---|---|
| 08-17-17 | Updated notes & revised signs |
| 11-01-19 | Revised drum spacing & signs nos |
| 08-01-24 | Electronic Stamp/Signature |
| 06-30-25 | Legislative Changes |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA

Docusign Envelope ID: E17899F0-B912-4482-BF85-7148763D5F5D

# D-704-35

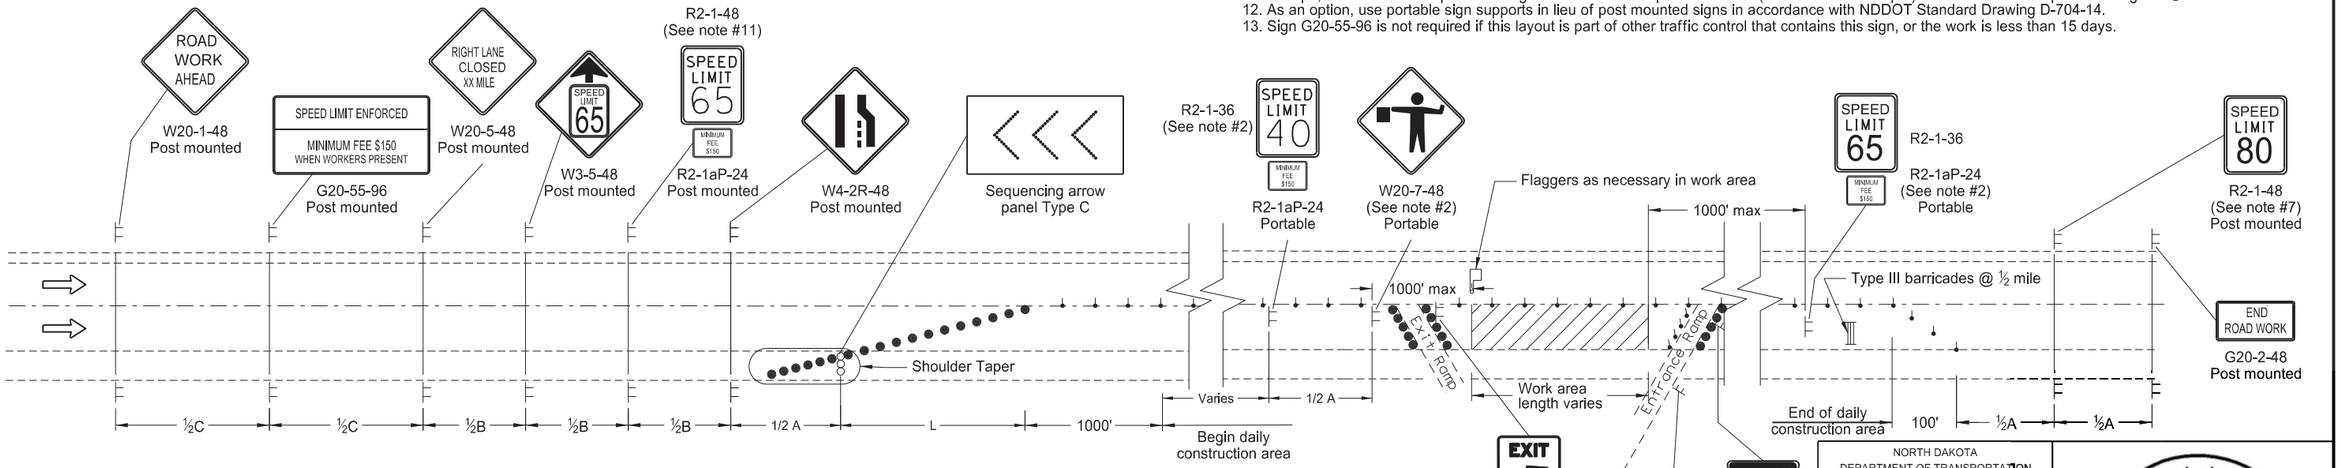
## SIGN LAYOUT FOR ONE LANE CLOSURE INTERSTATE SYSTEM




LEFT LANE CLOSED
WORKERS IN WORK AREA

| ADVANCE WARNING SIGN SPACING | | | |
|---|---|---|---|
| Road Type | Distance Between Signs Min (ft) | | |
| | A | B | C |
| Rural - High Speed (over 50 mph to 65 mph) | 720 | 720 | 720 |
| Urban Expressway and Freeway (55 mph to 60 mph) | 850 | 1350 | 2200 |
| Rural Expressway and Freeway (70 mph to 80 mph) | 1000 | 1500 | 2640 |
| Interstate/4-Lane Divided (Maintenance and Surveying) | 750 | 1000 | 1500 |

Notes:
1. Install advance signs for flagging when flaggers are flagging.
2. Move the advanced flagger sign and the speed limit signs as the work area moves through the construction zone. When the work area is not visible from the flagger, move the flagger station so the work area is visible. Space the 40 mph speed limit sign at ½A in advance of the flagger sign and move the 65 mph speed limit sign. Cover or remove the 40 mph speed limit and Minimum Fee $150 signs and the 65 mph speed limit sign upon completion of the work day or when workers are not present.
3. RAMPS: When the work area encompasses an entrance ramp, install a 40 mph speed limit sign on the ramp and cover any existing yield sign. Install new yield sign as necessary. Remove the ramp speed limit sign when the main line 40 mph speed zone is moved past the ramp.
4. Variables:
   S=Numerical value of speed limit or 85th percentile
   W=The width of taper.
   L=Minimum length of taper, or SxW for freeways, expressways, and all other roads with speeds of 45 mph or greater, or
   WxSxS/60 for urban, residential, and other streets with speeds of 40 mph or less.
5. Space delineator drums for tapering traffic at the dimension "S". Space tubular markers used for tangents at 2 times dimension "S".
6. Place sequencing arrow panels at the beginning of the taper when possible. Where shoulder width does not provide sufficient room, move the panel closer to the work area and place on the roadway surface.
   Use Type C on roadways with high traffic speeds and volumes (over 40 mph or 5000 ADT or greater).
7. Re-establish the speed limit. Determine the exact speed limit in the field, dependent on location and conditions.
8. Cover existing speed limit signs within a reduced speed zone.
9. Upon approval, the Engineer will measure obliterated or covered pavement marking as Obliteration of Pavement Marking.
10. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the diamond sign, and at such a distance above the edge that the flag does not touch the sign when limp.
11. Determine the reduced speed limit dependent on the in place speed limit before construction. When speed limits are to be reduced more than 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at ½B.
12. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
13. Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.




RIGHT LANE CLOSED
WORKERS IN WORK AREA

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION

9-7-2012

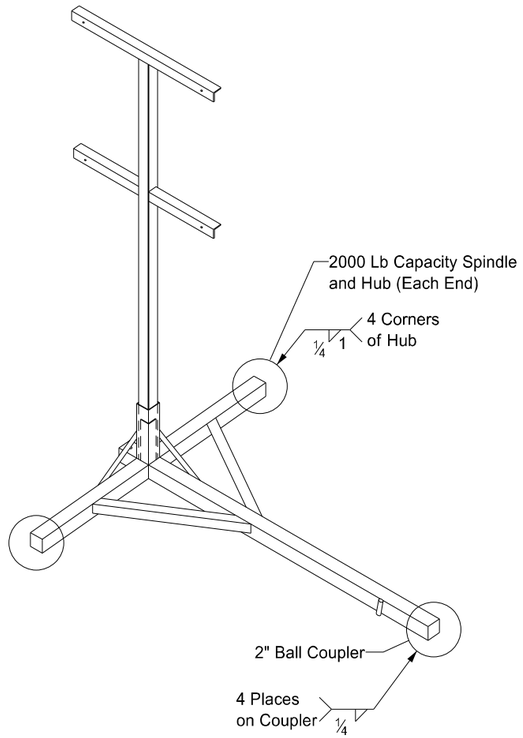
REVISIONS

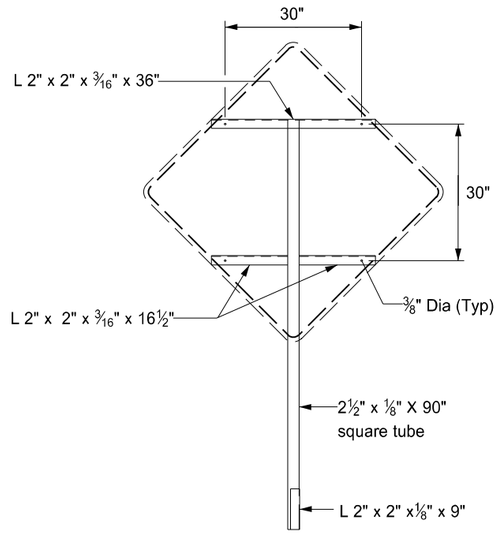
| DATE | CHANGE |
|---|---|
| 06-23-14 | Revised Note 12 |
| 03-15-16 | Removed Do Not Pass signs & updated notes |
| 08-17-17 | Moved speed signs & added note |
| 10-17-17 | Corrected spelling of "shoulder" |
| 11-01-19 | Revised tubular Mrkrs symbols |
| 12-08-21 | Switched order of Road Work Ahead and Spd Limit Enforced, added Dollars At Work, & removed table |
| 11-29-22 | Removed Dollars At Work |
| 06-30-25 | Legislative Changes |

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
06/30/25
ENGINEER
NORTH DAKOTA


# PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50




FRONT

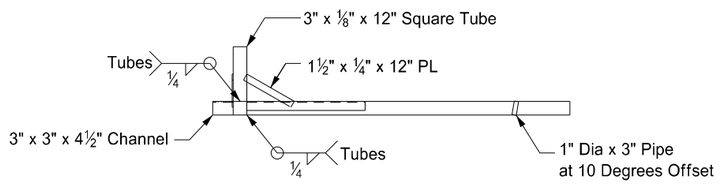




RIGHT

SIGN SUPPORT

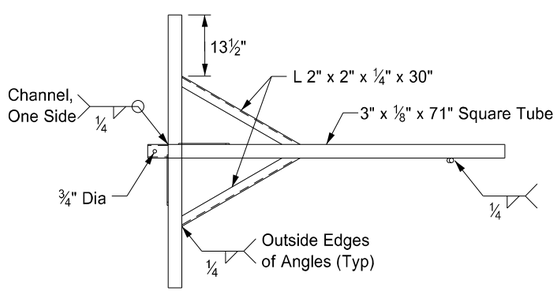
Notes:

1. Maximum 250 pound weight of assembly.
2. Use a 14" wheel and tire.
3. Use no automotive and equipment axle assemblies for trailer-mounted sign supports.
4. Other NCHRP 350 or MASH crash tested assemblies are acceptable.




RIGHT



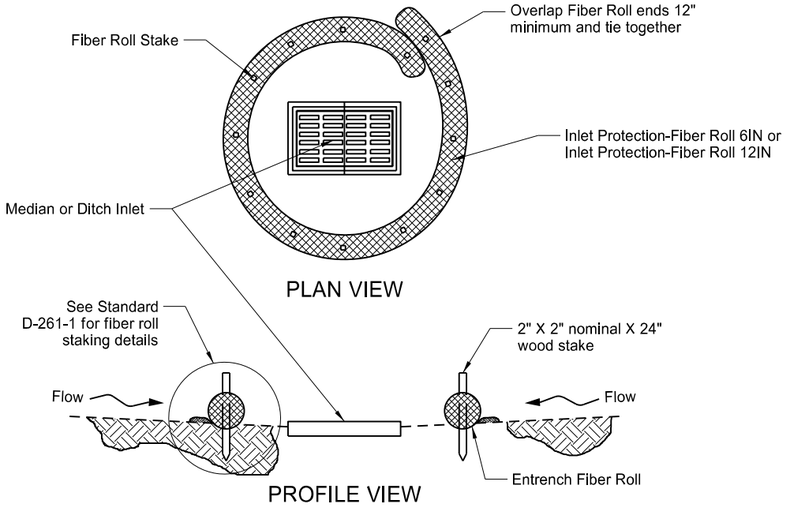

TOP

TRAILER

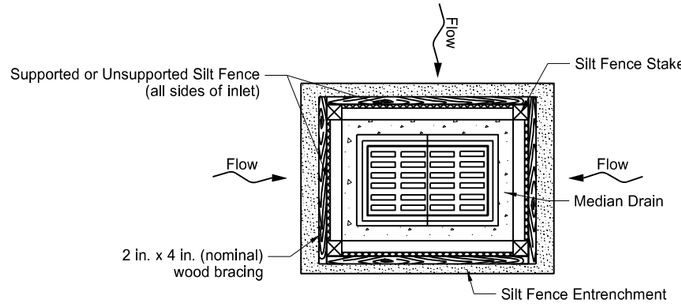
| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 11-23-10 | |
| REVISIONS | |
| DATE | CHANGE |
| 12/02/2020 | Updated Note to active voice. |

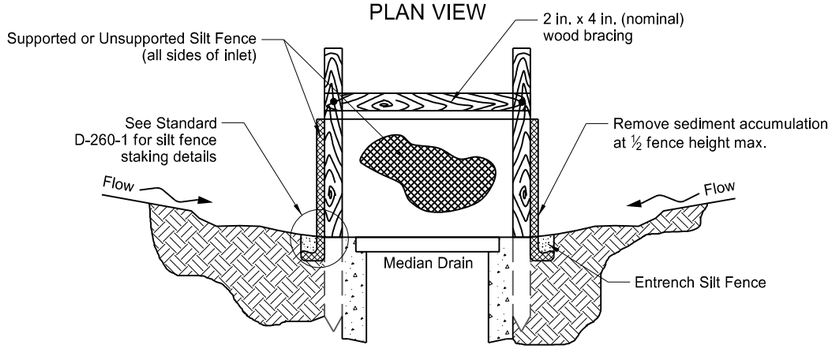
KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
Kirk J Hoff
12 02 2020

# EROSION AND SILTATION CONTROLS
# MEDIAN OR DITCH INLET PROTECTION

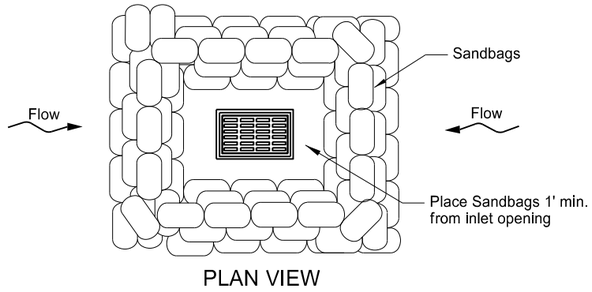



## FIBER ROLL PROTECTION (MEDIAN OR DITCH INLET)

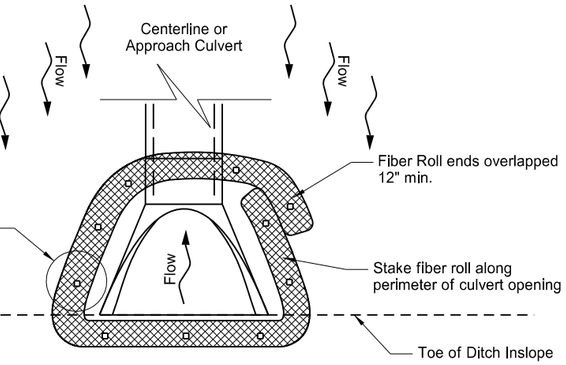


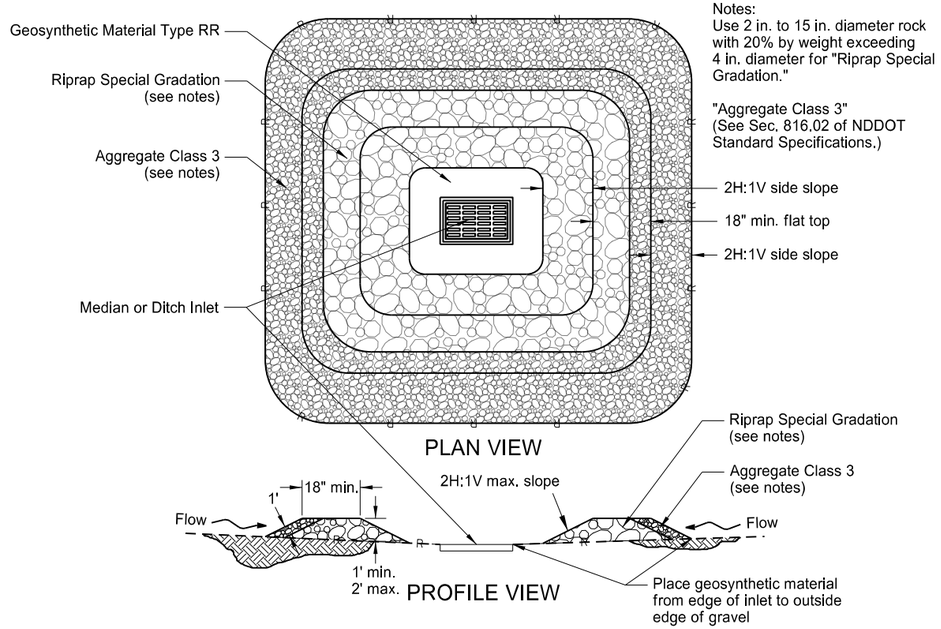

## SILT FENCE PROTECTION (MEDIAN OR DITCH INLET)



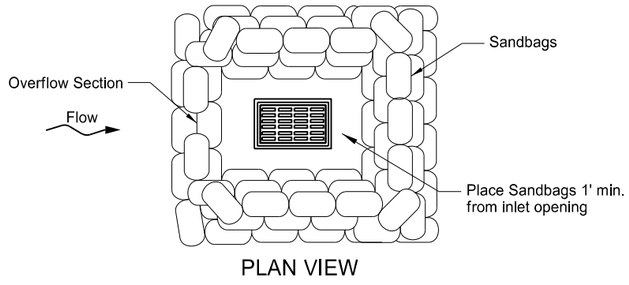

## SANDBAG PROTECTION (LOW POINT)




## FIBER ROLL PROTECTION (INLET OF CULVERT)




## GRAVEL INLET PROTECTION (MEDIAN OR DITCH INLET)




## SANDBAG PROTECTION (ON SLOPE)

| NORTH DAKOTA DEPARTMENT OF TRANSPORTATION | |
|---|---|
| 10-03-13 | |
| REVISIONS | |
| DATE | CHANGE |
| 06-26-14 | Updated reference to standard drawing number for fiber roll staking details. |
| 10-01-14 | Updated reference to standard drawing number for silt fence. |
| 10-17-17 | Updated to active voice. |
| 08-27-19 | New Design Engineer PE Stamp. |

This document was originally issued and sealed by Kirk J Hoff, Registration Number PE-4683, on 8-27-19 and the original document is stored at the North Dakota Department of Transportation