

DESIGN DATA				
Traffic		Average Daily		
Current	2018	Pass: 1,350	Trucks: 865	Total: 2,215
Preventive Maintenance				



NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

H-6-029(196)183
Walsh and Pembina Counties
South of Herrick Interchange to North of ND 66- NB
2" Mill and HMA

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	H-6-029(196)183	25004	1	1

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	7/1/2025
Supplemental Specifications	NONE

PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
H-6-029(196)183	3.688	4.295

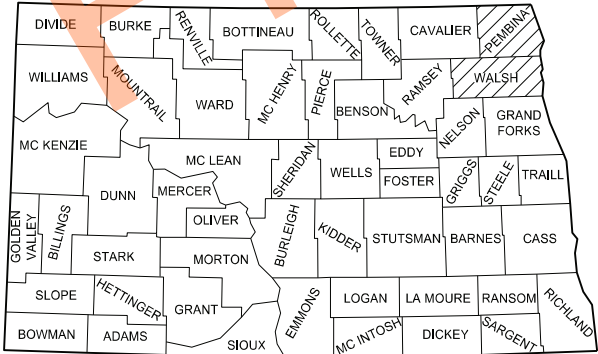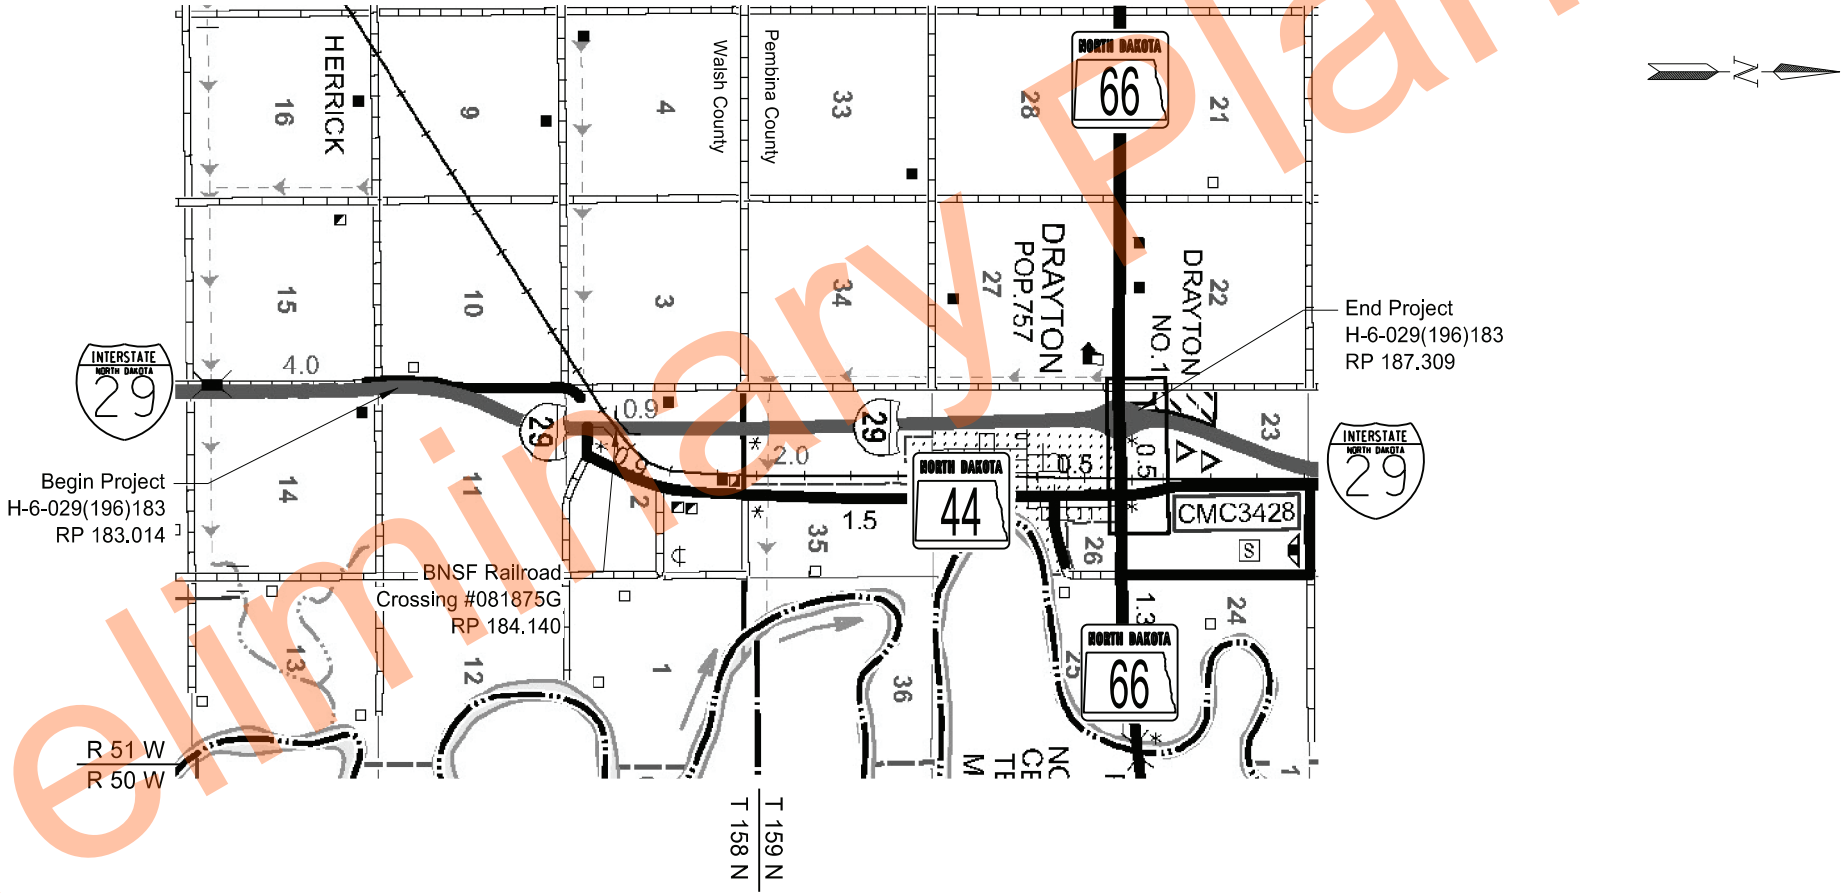

STATE COUNTY MAP

DESIGNER Marc A. Mohagen

ND DEPARTMENT OF TRANSPORTATION GRAND FORKS DISTRICT	4/15/26
---	---------

GRAND FORKS DISTRICT

REGISTERED PROFESSIONAL ENGINEER

DUSTIN LANG


PE-6394

DATE 04/14/26

NORTH DAKOTA

TABLE OF CONTENTS								
					STATE	PROJECT NO.	SECTION NO.	SHEET NO.
					ND	H-6-029(196)183	2	1
PLAN SECTIONS			LIST OF STANDARD DRAWINGS					
Section	Page(s)	Description	Number	Description				
1	1	Title Sheet	D-101-1, 2,3,4	NDDOT Abbreviations				
2	1	Table of Contents	D-101-10	NDDOT Utility Company and Organization Abbreviations				
4	1	Scope of Work	D-101-20, 21	Line Styles				
6	1	Notes	D-101-30, 31,32,33	Symbols				
8	1	Quantities	D-704-7	Breakaway Systems For Construction Zone Signs - Perforated Tube				
10	1	Basis of Estimate	D-704-8	Breakaway Systems For Construction Zone Signs - U-Channel Post				
20	1	General Details	D-704-9	Construction Sign Details - Terminal And Guide Signs				
30	1	Typical Sections	D-704-10	Construction Sign Details - Regulatory Signs				
100	1 - 2	Work Zone Traffic Control	D-704-11	Construction Sign Details - Warning Signs				
			D-704-11A	Construction Sign Details - Warning Signs				
			D-704-13	Barricade And Channelizing Device Details				
			D-704-14	Construction Sign Punching And Mounting Details				
			D-704-20	Terminal And Seal Coat Sign Layouts				
			D-704-22	Construction Truck And Temporary Detour Layouts				
			D-704-26	Miscellaneous Sign Layouts				
			D-704-27	Mobile Operation (Pavement Marking)				
			D-704-35	Sign Layout For One Lane Closure - Interstate System				
			D-704-50	Portable Sign Support Assembly				
			D-704-56	Mobile Operation - Grinding Shoulder Rumble Strips				
			D-760-1	Rumble Strips Interstate Highways				
			D-762-2	Interstate Pavement Marking 4 Lane Divided Highway				
			D-762-4	Pavement Marking				
			D-762-11	Short-Term Pavement Marking				

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	H-6-029(196)183	4	1

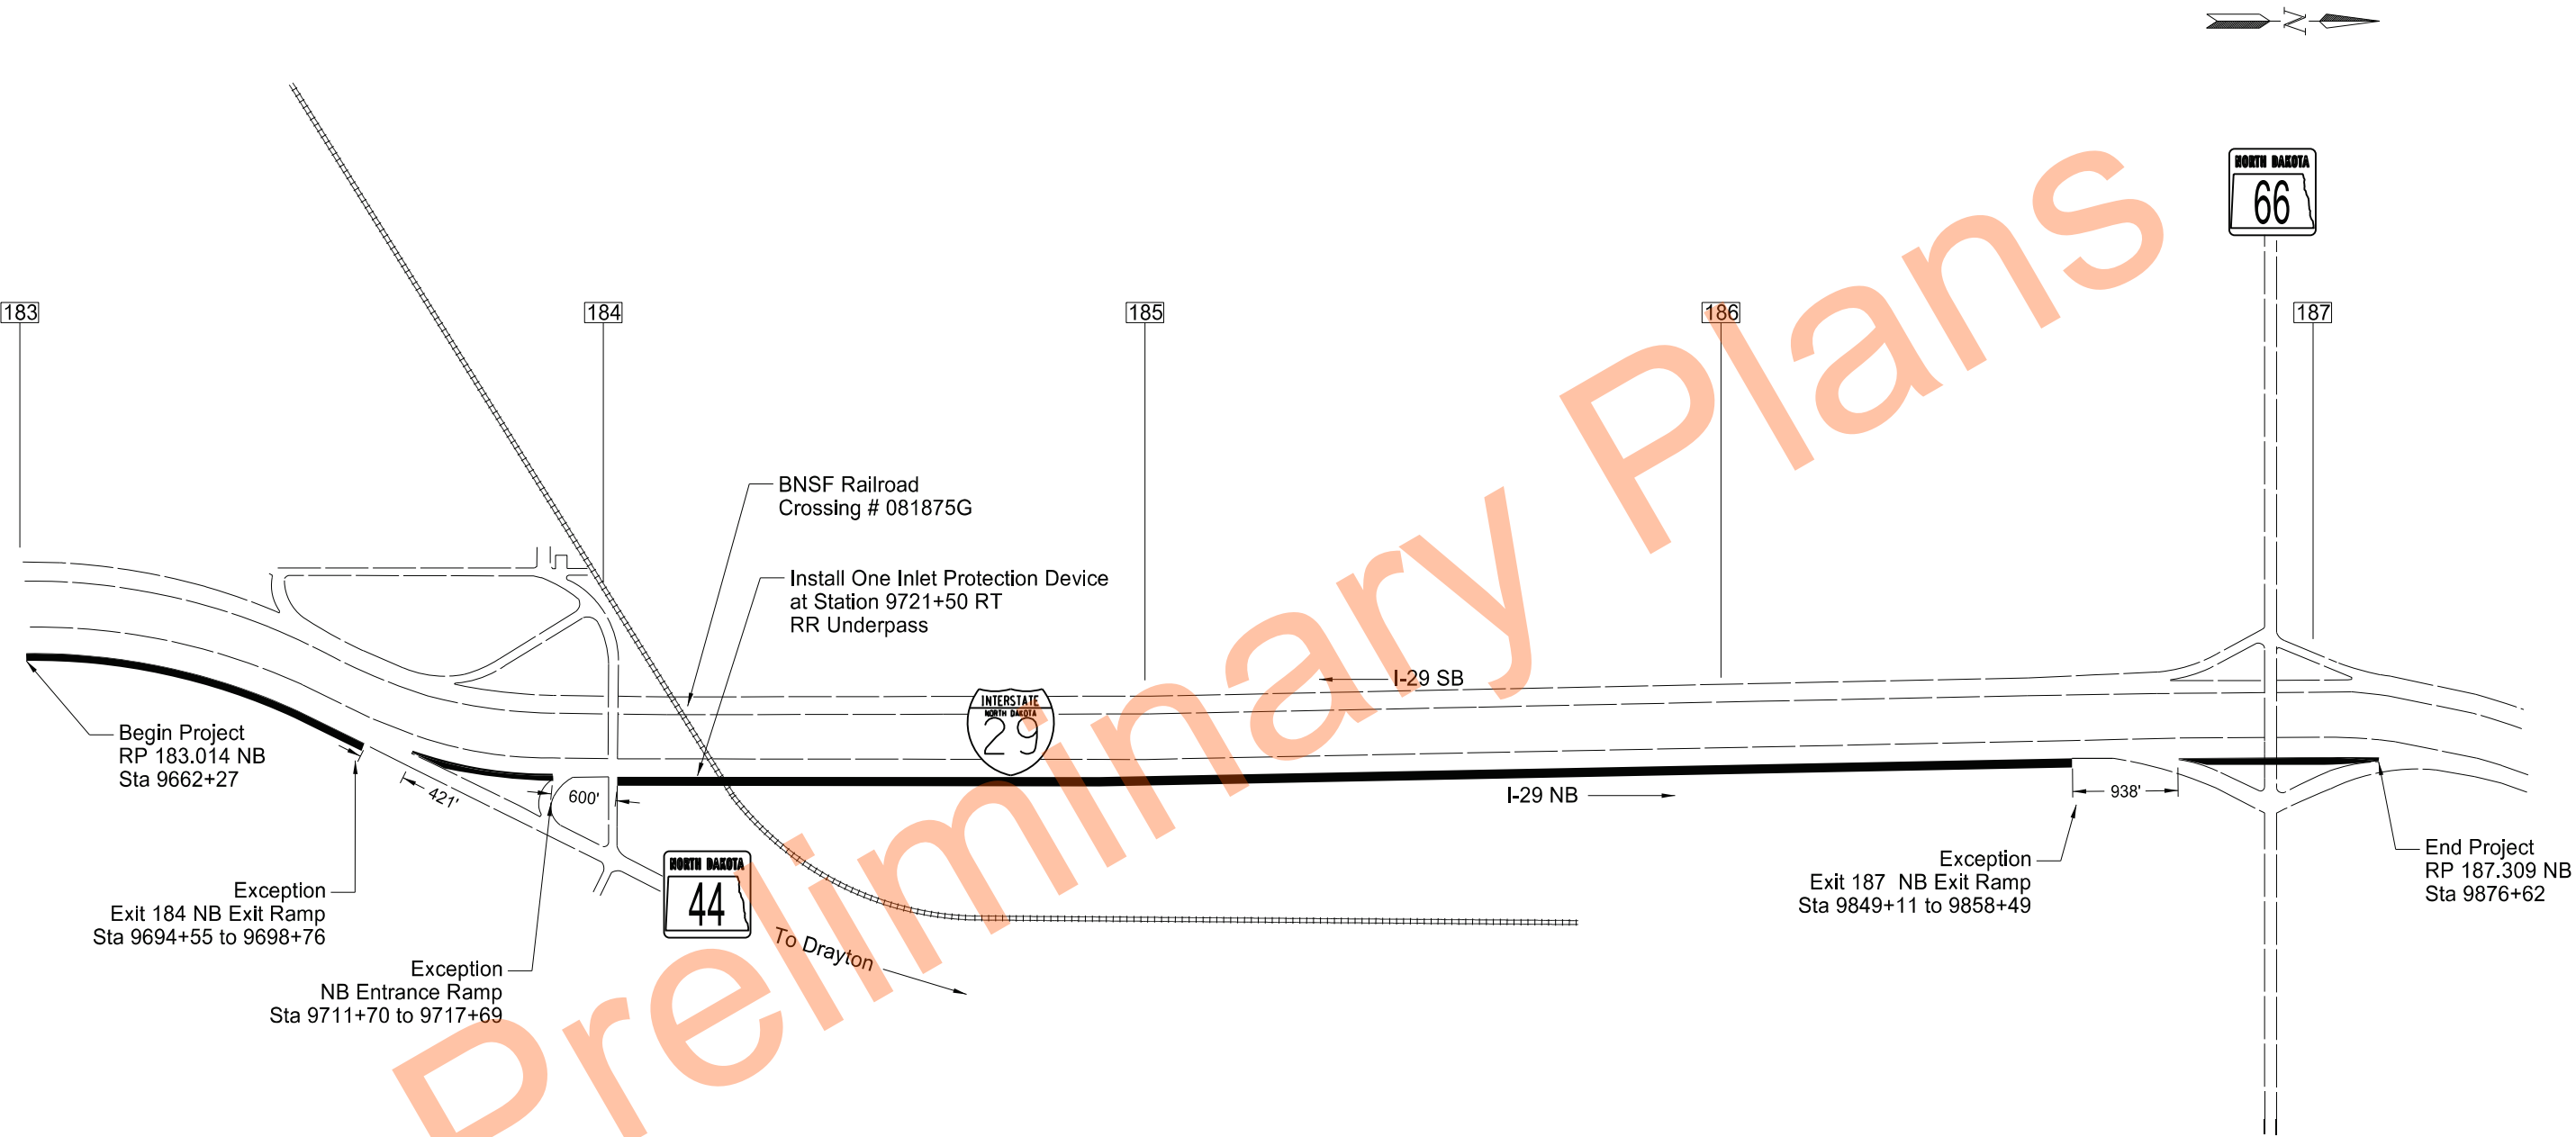

Scope of Work
I-29 NB Mainline Shoulder
2" Mill and Overlay
South of Herrick Interchange to North of ND 66- NB



NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-6-029(196)183	6	1

- 100-P01 COORDINATION OF PROJECTS: Other projects are in the vicinity of this project and under contract during the 2026 construction season.
- HES-6-999(065) District Wide Pavement Marking
 - SS-6-044(003)029 CPR, 2" Mill and Overlay, and ADA work
- 107-300 CONSTRUCTION TRAFFIC ACCESS: Access areas within the right of way only at interchanges. The Engineer may allow temporary access at other locations.
- To obtain temporary access, provide an access plan containing the following information:
- A traffic control plan;
 - A traffic impact analysis;
 - A safety analysis;
 - A COA; and
 - An environmental impact analysis.
- To be considered for approval, the following minimum conditions must be met in the access plan:
- Construction traffic will not be allowed to cross the interstate median, or lanes of traffic being used by the public at grade.
 - The access plan must show that there will be methods in place, at all times, to prevent public traffic from using the access.
 - A plan to restore the area disturbed by the access, including right of way fences, to preexisting or better condition.
- All work necessary to provide the access plan, comply with the plan, and to restore the area to its pre-existing condition must be completed at no additional cost to the Department.
- 107-P01 PROTECTION OF UTILITIES: There is one catch basin located at Sta. 9721+50, on the East shoulder. Care will be taken so that the Milling, HMA and Fog Seal operations do not damage or obstruct the catch basin or existing drainage. There are also 6 PVC Perforated underdrain cleanouts encased in concrete pads 3' x 2.5' on the right shoulder at stations 9719+36, 9723+94, 9726+07, 9728+20, 9730+33, and 9732+50. Mill a straight vertical edge around each pad and tack the exposed edges. Cover each cleanout before paving and fog sealing.
- 411-P01 STOCKPILE MILLED MATERIAL: Process and stockpile all milled material (approximately 2,068 Tons) at NDDOT Maintenance Yard located at 411 Hwy 66 W, Drayton, ND 58225 (701) 740-0976. Before stockpiling, process the milled material so the maximum particle size does not exceed 1-1/2". Stockpile with a front-end loader. Do not operate on the milled material while stockpiling. Notify the Engineer 72 hours prior to delivery of any milled material. Include all costs for labor and equipment to mill, haul, process, and stockpile the milled material in the contract unit price for "MILLING PAVEMENT SURFACE."
- 430-200 FOG SEAL: Apply a fog seal at a rate of 0.05 Gal/SY to the final surface of the hot mix asphalt if the ND T 113 "Lightweight Pieces in Virgin Aggregate" test results exceed 3.0% during mix design or production of the hot mix asphalt. Apply the fog seal behind the finish roller before the mat temperature drops below 130 degrees Fahrenheit. Use the same emulsion material as the Tack Coat. Apply the fog seal at no additional cost to the Department.

- 704-P01 TRAFFIC CONTROL FOR HMA OVERLAYS: Provide traffic control consisting of a temporary lane closure and flagging.
- The maximum work zone length is 4.33 Miles, based on the total length of the project.
- For estimating purposes, the traffic control device list is based on the total length of the project (4.30 Miles) and the following list:
- Standard D-704-22, Types K and L;
 - Standard D-704-26, Types CC, EE, and GG; and
 - Standard D-704-35.
- If all or portions of the lane closure are removed and uneven lanes exist, provide traffic control as specified in Section 704.04 O, "Traffic Control for Uneven Pavement".
- Complete work in a manner such that lane closures can safely be removed if no work is to take place for more than 3 consecutive days. Remove lane closures if no work is to take place for more than 3 consecutive days.
- The Department will pay for all necessary devices deployed, regardless of the number and length of the lane closures.
- 708-P01 INLET PROTECTION-SPECIAL: Protect the Inlet with an Inlet protection device located at Sta 9721+50 on the East shoulder. Include all costs to furnish, install, maintain, replace, and remove inlet protection devices in the contract unit price for "INLET PROTECTION-SPECIAL".
- 762-050 PAVEMENT MARKING: If the Engineer and Contractor agree, plan quantity will be used as the measurement for payment for pavement marking items.



ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-6-029(196)183	8	1

SPEC CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
103	0100 CONTRACT BOND	L SUM	1	1
107	0100 RAILWAY PROTECTION INSURANCE	L SUM	1	1
107	0140 RAILROAD COORDINATION	L SUM	1	1
107	0145 RAILROAD FLAGGING	DAY	1,500	1,500
109	1000 E-TICKETING	L SUM	1	1
411	0105 MILLING PAVEMENT SURFACE	SY	22,507	22,507
430	0500 COMMERCIAL GRADE HOT MIX ASPHALT	TON	2,453	2,453
702	0100 MOBILIZATION	L SUM	1	1
704	0100 FLAGGING	MHR	48	48
704	1000 TRAFFIC CONTROL SIGNS	UNIT	1,299	1,299
704	1052 TYPE III BARRICADE	EA	6	6
704	1060 DELINEATOR DRUMS	EA	80	80
704	1067 TUBULAR MARKERS	EA	160	160
704	1087 SEQUENCING ARROW PANEL-TYPE C	EA	1	1
708	1540 INLET PROTECTION-SPECIAL	EA	1	1
760	0025 SINUSOIDAL RUMBLE STRIP - ASPHALT SHOULDER	MILE	3.689	3.689
762	0432 SHORT TERM 6IN LINE-TYPE NR	LF	19,478	19,478
762	1106 PVMT MK PAINTED 6IN LINE	LF	19,478	19,478

BASIS OF ESTIMATE

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-6-029(196)183	10	1

Design Calculations			
Description	Unit	Width	Quantity
Typical Section 1 (19,478 LF= 3.689 Mi)			
Milling Pavement Surface (5,280 LF/Mi. x 10.4 FT/ 9 SF/SY= 6,101 SY/ Mi.)	SY	10.4	22,507
Mainline Commercial Grade Asphalt (1.699 SF x 5280 LF/ Mi x 2 Ton/CY / 27 CF/CY= 665 Ton/ Mi.)	Ton	10	2,453

Estimated Milled Material Quantities			
Milled Material Available	Milled Cross Section Area (SF)	Depth (In)	Tons (1.875 Ton/CY)
Section 30 Sheet 1	1.699	2	2,298
Milled material to be stockpiled at Drayton Section Yard (Less 10% for losses)			2,068

Estimated Flagging Hours		
Operation	Basis	Flagging
Milling Pavement Surface	1 Day x 12 Hr/Day x 2 Flagger	24 MHR
HMA	1 Day x 12 Hr/Day x 2 Flagger	24 MHR




Sinusoidal Rumble Strip Locations (Asphalt Shoulder)	
Location	Quantity
NB Mainline (Sta 9662+27 to 9694+55) Right Asphalt Shoulder	3,228 LF
NB Mainline (Sta 9698+76 to 9711+70) Right Asphalt Shoulder	1,295 LF
NB Mainline (Sta 9717+69 to 9849+11) Right Asphalt Shoulder	13,142 LF
NB Mainline (Sta 9858+49 to 9876+62) Right Asphalt Shoulder	1,813 LF
Total= 19,478/5,280 LF / Mile	3.689 Mi

Short Term 6 IN Line-Type NR		
Location	Basis	Quantity
White Edge Line (Right Shoulder Only)	5,280 LF/mile	19,478 LF

Permanent Pavement Marking (I-29 NB Mainline RT Shoulder) (RP 183.014 to RP 187.347= *3.727 Miles)		
Location - Type	Basis	Quantity
White Edge Lines – Pvmt MK Painted 6 IN Line	5,280 LF/mile	19,478 LF
*See Section 4 sheet 1 for exception areas		



	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	H-6-029(196)183	30	1

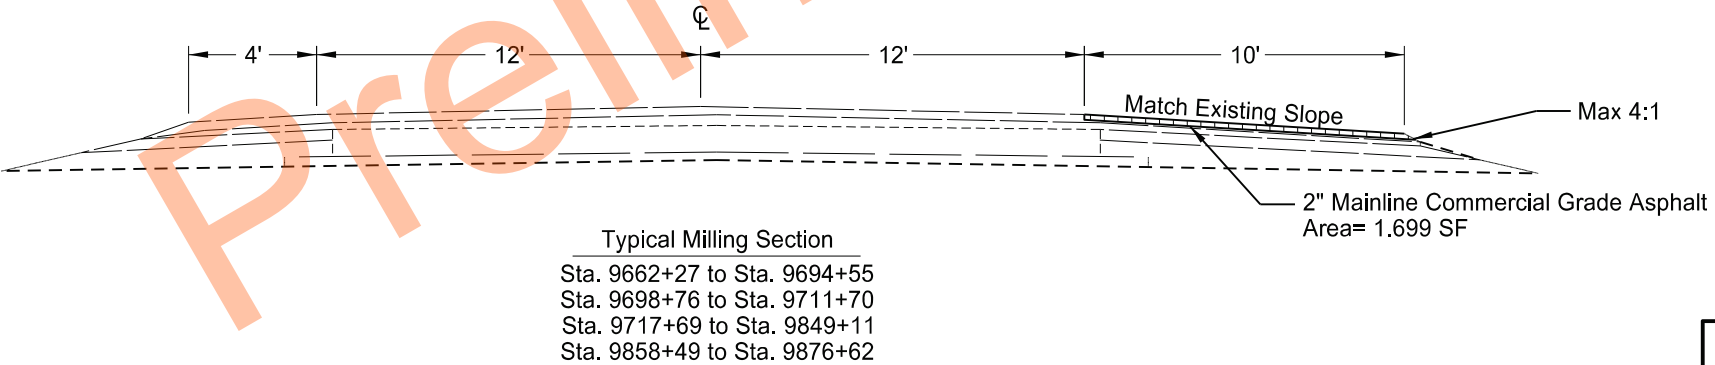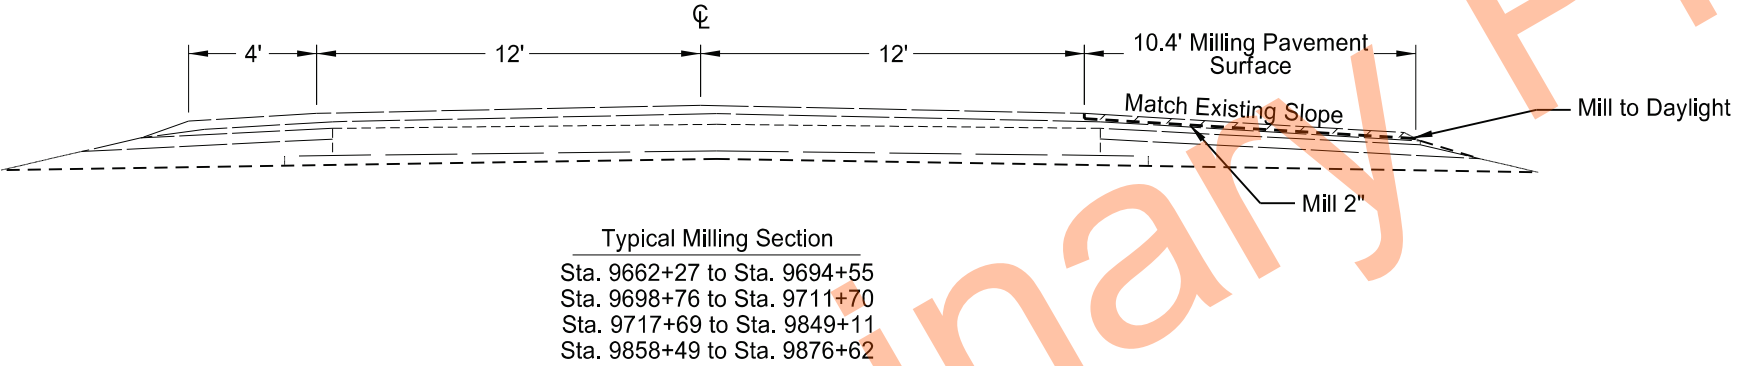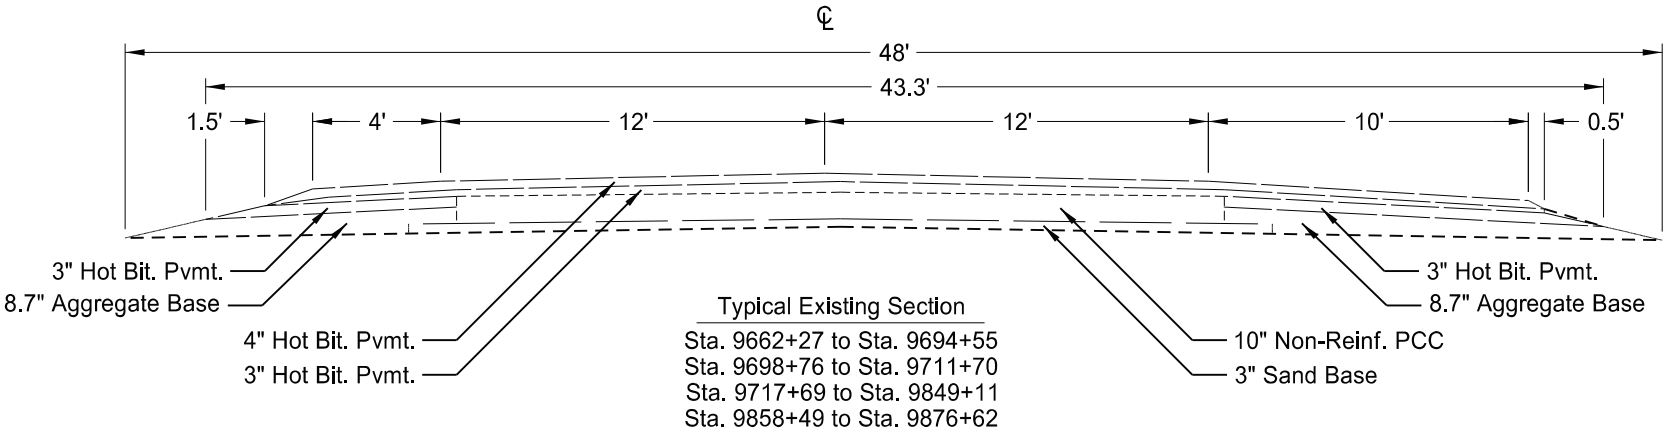

Typical Sections
I-29 NB Mainline Shoulder

2" Mill and Overlay

South of Herrick Interchange to North of ND 66- NB

REGISTERED PROFESSIONAL ENGINEER
DUSTIN LANG
PE-6394
DATE 04/14/26
NORTH DAKOTA

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	H-6-029(196)183	100	1

SIGN NUMBER	SIGN SIZE	DESCRIPTION	AMOUNT REQUIRED	UNITS PER AMOUNT	UNITS SUB TOTAL
E5-1-48	48"x48"	EXIT GORE	2	35	70
G20-1-60	60"x24"	ROAD WORK NEXT ____ MILES	4	28	112
G20-1b-60	60"x24"	NO WORK IN PROGRESS (Sign and installation only)		18	
G20-2-48	48"x24"	END ROAD WORK	2	26	52
G20-4-36	36"x18"	PILOT CAR FOLLOW ME (Mounted to back of pilot car)		18	
G20-4b-36	36"x30"	WAIT FOR PILOT CAR		18	
G20-50a-72	72"x36"	ROAD WORK NEXT ____ MILES RT & LT ARROWS		43	
G20-52a-72	72"x24"	ROAD WORK NEXT ____ MILES RT or LT ARROW	1	36	36
G20-55-96	96"x48"	SPEED LIMIT ENFORCED - MINIMUM FEE \$150 WHEN WORKERS PRESENT		59	
M1-1-36	36"x36"	INTERSTATE ROUTE MARKER (Post and installation only)		11	
M1-4-24	24"x24"	U.S. ROUTE MARKER (Post and installation only)		10	
M1-5-24	24"x24"	STATE ROUTE MARKER (Post and installation only)		10	
M3-1-24	24"x12"	NORTH (Mounted on route marker post)		7	
M3-2-24	24"x12"	EAST (Mounted on route marker post)		7	
M3-3-24	24"x12"	SOUTH (Mounted on route marker post)		7	
M3-4-24	24"x12"	WEST (Mounted on route marker post)		7	
M4-8-24	24"x12"	DETOUR (Mounted on route marker post)		7	
M4-9-30	30"x24"	DETOUR ARROW RIGHT or LEFT/AHD AND RT or LT		15	
M4-10-48	48"x18"	DETOUR (INSIDE ARROW) RIGHT or LEFT (Mounted on barricade)		7	
M5-1-21	21"x15"	ADVANCE TURN ARROW RT or LT(Mounted on route marker post)		7	
M5-1-30	30"x21"	ADVANCE TURN ARROW RT or LT(Mounted on route marker post)		9	
M6-1-21	21"x15"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		7	
M6-1-30	30"x21"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		9	
M6-3-21	21"x15"	DIRECTIONAL ARROW UP (Mounted on route marker post)		7	
R1-1-48	48"x48"	STOP		32	
R1-2-60	60"x60"	YIELD	2	29	58
R2-1-36	36"x48"	SPEED LIMIT ____ (Portable only)	3	30	90
R2-1-48	48"x60"	SPEED LIMIT ____	4	39	156
R2-1aP-24	24"x18"	MINIMUM FEE \$150 (Mounted on Speed Limit post)	5	10	50
R3-2-48	48"x48"	NO LEFT TURN		35	
R4-1-48	48"x60"	DO NOT PASS		39	
R4-7-48	48"x60"	KEEP RIGHT		39	
R5-1-48	48"x48"	DO NOT ENTER		35	
R6-1-54	54"x18"	ONE WAY RIGHT or LEFT (Mounted on STOP or DO NOT ENTER post)		14	
R7-1-12	12"x18"	NO PARKING ANY TIME		11	
R10-6-24	24"x36"	STOP HERE ON RED		16	
R11-2-48	48"x30"	ROAD CLOSED (Mounted on barricade)		12	
R11-2a-48	48"x30"	STREET CLOSED (Mounted on barricade)		12	
R11-3a-60	60"x30"	ROAD CLOSED ____ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-3c-60	60"x30"	STREET CLOSED ____ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-4a-60	60"x30"	STREET CLOSED TO THRU TRAFFIC (Mounted on barricade)		15	
W1-3-48	48"x48"	REVERSE TURN RIGHT or LEFT		35	
W1-4-48	48"x48"	REVERSE CURVE RIGHT or LEFT		35	
W1-4b-48	48"x48"	TWO LANE REVERSE CURVE RIGHT or LEFT		35	
W1-6-48	48"x24"	ONE DIRECTION LARGE ARROW		26	
W3-1-48	48"x48"	STOP AHEAD		35	
W3-3-48	48"x48"	SIGNAL AHEAD		35	
W3-4-48	48"x48"	BE PREPARED TO STOP		35	
W3-5-48	48"x48"	SPEED REDUCTION AHEAD	2	35	70
W4-2-48	48"x48"	LANE ENDS RIGHT or LEFT	2	35	70
W5-1-48	48"x48"	ROAD NARROWS		35	
W5-8-48	48"x48"	THRU TRAFFIC RIGHT LANE		35	
W5-9-48	48"x48"	ROAD WORK TRAFFIC ONLY DOWN & LT or RT ARROW		35	
W6-3-48	48"x48"	TWO WAY TRAFFIC		35	
W8-1-48	48"x48"	BUMP	3	35	105
W8-3-48	48"x48"	PAVEMENT ENDS		35	
W8-7-48	48"x48"	LOOSE GRAVEL		35	
W8-11-48	48"x48"	UNEVEN LANES		35	
W8-12-48	48"x48"	NO CENTER LINE		35	
W8-17-48	48"x48"	SHOULDER DROP-OFF SYMBOL		35	
W8-53-48	48"x48"	TRUCKS ENTERING HIGHWAY		35	
W8-54-48	48"x48"	TRUCKS ENTERING AHEAD or ____ FT or ____ MILE	2	35	70
W8-55-48	48"x48"	TRUCKS CROSSING AHEAD or ____ FT or ____ MILE	2	35	70
W8-56-48	48"x48"	TRUCKS EXITING HIGHWAY		35	
W9-3a-48	48"x48"	CENTER LANE CLOSED SYMBOL		35	
W13-1P-30	30"x30"	____ MPH ADVISORY SPEED PLAQUE (Mounted on warning sign post)		14	
W14-3-64	64"x48"	NO PASSING ZONE		28	
W16-2P-30	30"x24"	____ FEET PLAQUE (Mounted on warning sign post)		10	
W20-1-48	48"x48"	ROAD WORK AHEAD or ____ FT or ____ MILE	5	35	175
W20-2-48	48"x48"	DETOUR AHEAD or ____ FT or ____ MILE		35	
W20-3-48	48"x48"	ROAD or STREET CLOSED AHEAD or ____ FT or ____ MILE		35	
W20-4-48	48"x48"	ONE LANE ROAD AHEAD or ____ FT or ____ MILE		35	
W20-5-48	48"x48"	RIGHT or CENTER or LEFT LANE CLOSED AHEAD or ____ FT or ____ MILE	2	35	70
W20-7-48	48"x48"	FLAGGER	1	35	35
W20-8-18	18"x18"	STOP - SLOW PADDLE Back to Back	2	5	10
W20-52P-54	54"x12"	NEXT ____ MILES (Mounted on warning sign post)		12	
W21-1-48	48"x48"	WORKERS		35	
W21-2-48	48"x48"	FRESH OIL		35	
W21-3-48	48"x48"	ROAD MACHINERY AHEAD or ____ FT or ____ MILE		35	
W21-5-48	48"x48"	SHOULDER WORK		35	
W21-5a-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED		35	
W21-5b-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED AHEAD or ____ FT or ____ MILE		35	

[illegible][illegible]

SPEC & CODE			
704-1000	TRAFFIC CONTROL SIGNS	TOTAL UNITS	1299



[illegible]

NOTE:
If additional signs are required, units will be calculated using the formula from Section III-18.06 of the Design Manual.
<http://www.dot.nd.gov/>



Traffic Control Devices List

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	H-6-029(196)183	100	2

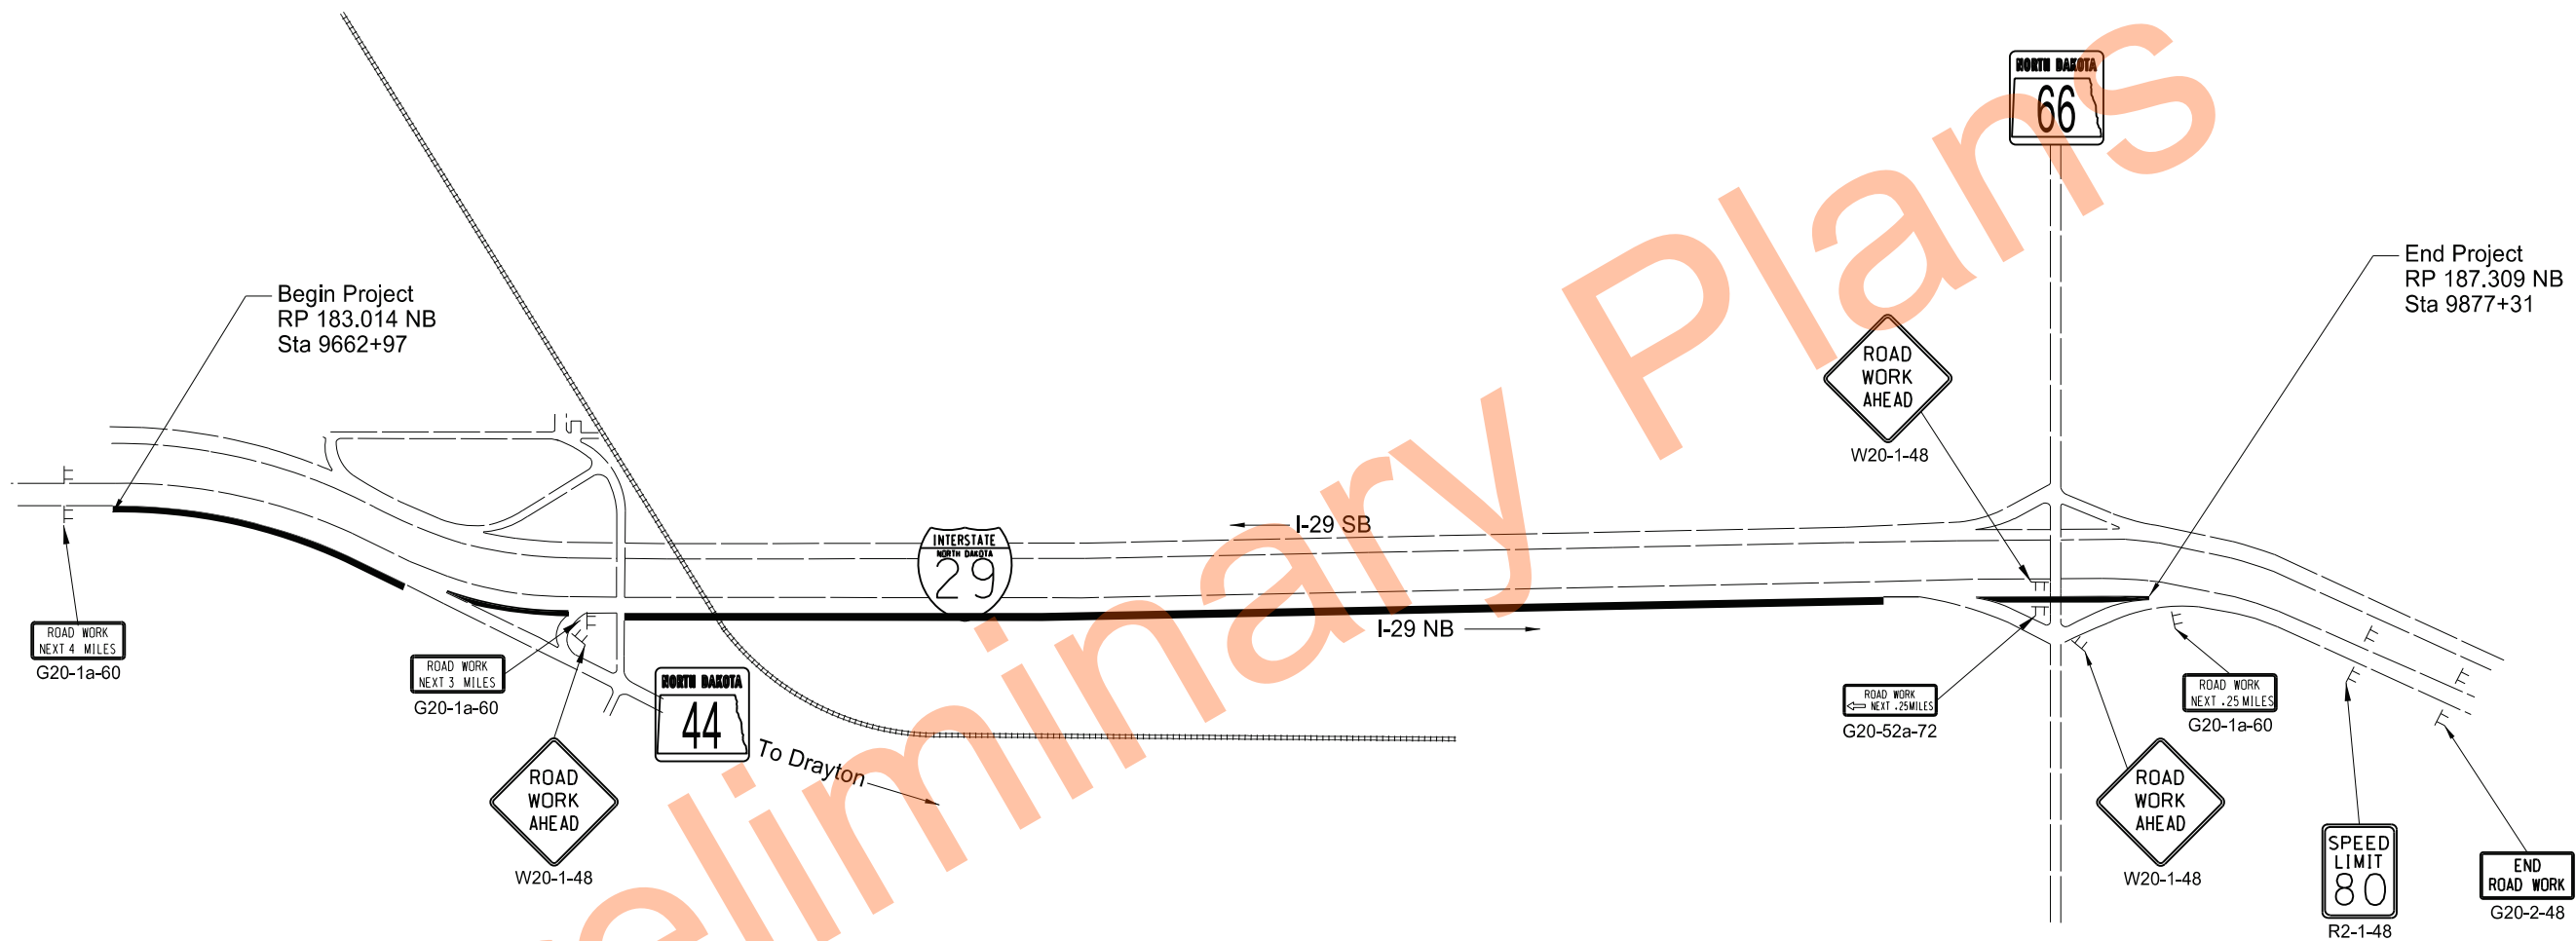

Traffic Control Terminal Signing
I-29 NB Mainline Shoulder

2" Mill and Overlay

South of Herrick Interchange to North of ND 66- NB

REGISTERED PROFESSIONAL ENGINEER

DUSTIN LANG

PE-6394

DATE 04/14/26

NORTH DAKOTA

NDDOT ABBREVIATIONS

D-101-1

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.	C Gdrl	cable guardrail	Culv	culvert	FOS	factor of safety
Abn	abandoned	Calc	calculate	C&G	curb & gutter	Fed	Federal
Abut	abutment	CIP	cast iron pipe	CI	curb inlet	FP	feed point
Adj	adjusted	CB	catch basin	CR	curb ramp	Fn	fence
Aggr	aggregate	CRS	cationic rapid setting	C	cut	Fn P	fence post
Ahd	ahead	C Gd	cattle guard	Dd Ld	dead load	FO	fiber optic
ARV	air release valve	C To C	center to center	Defl	deflection	FD	field drive
Align	alignment	CL or $\varnothing$	centerline	Defm	deformed	F	fill
Al	alley	Ch	chain	DInt	delineate	FAA	fine aggregate angularity
Alt	alternate	Chnlk	chain-link	DIntr	delineator	FH	fire hydrant
Alum	aluminum	Ch Blk	channel block	Depr	depression	FI	flange
ADA	Americans with Disabilities Act	Ch Ch	channel change	Desc	description	FIRD	flared
&	and	Chk	check	Det	detail	FES	flared end section
Appr	approach	Chsld	chiseled	DWP	detectable warning panel	F Bcn	flashing beacon
Approx	approximate	Cir	circle	Dtr	detour	FA	flight auger sample
ACP	asbestos cement pipe	Cl	class	Dia or $\varnothing$	diameter	FL	flow line
Asph	asphalt	Clnt	clean-out	Dir	direction	Ftg	footing
AC	asphalt cement	Clr	clear	Dist	distance	FM	force main
Assmd	assumed	Cl&gr	clearing & grubbing	DM	disturbed material	Fnd	found
@	at	Comb.	combination	DB	ditch block	Fdn	foundation
Atten	attenuation	Coml	commercial	DG	ditch grade	Frac	fractional
ATR	automatic traffic recorder	Compr	compression	Dbl	double	Frwy	freeway
Ave	Avenue	CADD	computer aided drafting & design	Dn	down	Frt	front
Avg	average	Conc	concrete	Dwg	drawing	FF	front face
ADT	average daily traffic	CECB	concrete erosion control blanket	Dr	drive	F Disp	fuel dispenser
		Cond	conductor	Drwy	driveway	FFP	fuel filler pipes
		Const	construction	DI	drop inlet	FLS	fuel leak sensor
		Cont	continuous	D	dry density	Furn	furnish/ed
		CSB	continuous split barrel sample				
		Contr	contraction				
		Contr	contractor				
		CP	control point				
Bk	back	Coord	coordinate	Ea	each		
BF	back face	Cor	corner	Esmt	easement		
Balc	balcony	Corr	corrected	E	East		
B Wire	barbed wire	CAES	corrugated aluminum end section	EB	Eastbound		
Barr	barricade	CAP	corrugated aluminum pipe	Elast	elastomeric		
Btry	battery	CMES	corrugated metal end section	EL	electric locker		
BI	beehive inlet	CMP	corrugated metal pipe	E Mtr	electric meter		
Beg	begin	CPVCP	corrugated poly-vinyl chloride pipe	EVSE	electric vehicle supply equipment		
BG	below grade	CSES	corrugated steel end section	Elec	electric/al		
BM	bench mark	CSFES	corrugated steel flared end section	EDM	electronic distance meter		
Bkwy	bikeway	CSP	corrugated steel pipe	Elev or El	elevation		
Bit	bituminous	CSTES	corrugated steel traversable end section	Ellipt	elliptical		
Blk	block	Co	County	Emb	embankment		
BH	bore hole	Crse	course	Emuls	emulsion/emulsified		
Bot	bottom	Ct	Court	ES	end section		
Blvd	Boulevard	Xarm	cross arm	Engr	engineer		
Bndry	boundary	Xbuck	cross buck	ESS	environmental sensor station		
Brkwy	breakaway	Xsec	cross sections	Eq	equal		
Br	bridge	Xing	crossing	Evgr	evergreen		
Bldg	building	Xrd	crossroad	Exc	excavation		
Bus.	business	Crn	crown	Exst	existing		
BV	butterfly valve			Exp	expansion		
Byp	bypass			Expy	Expressway		
				E	external of curve		
				Extru	extruded		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-10-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



NORTH DAKOTA	
DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

NDDOT ABBREVIATIONS

D-101-3

Salv	salvage(d)	Tel	telephone
San	sanitary sewer line	Tel B	Telephone Booth
Sec	section	Tel P	telephone pole
SL	section line	Tv	television
Sep	separation	Temp	temperature
Seq	sequence	Temp	temporary
Serv	service	TBM	temporary bench mark
Sht	sheet	T	thinwall tube sample
Shtng	sheeting	Ts	topsoil
Shldr	shoulder	Traf	traffic
Sw or Sdwk	sidewalk	TSCB	traffic signal control box
SD	sight distance	Tr	trail
SN	sign number	Transf	transformer
Sig	signal	Trans	transition
Sgl	single	TT	transmission tower
SRCP	slotted reinforced concrete pipe	TES	traversable end section
SC	slow curing	Trans	transverse
SS	slow setting	Trtd	treated
Sm	small	Trmt	treatment
S	South	Qc	triaxial compression
SE	Southeast	TERO	tribal employment rights ordinance
SW	Southwest	Tpl	triple
SB	Southbound	Typ	typical
Sp	spaces		
Spcl	special	Qu	unconfined compressive strength
SA	special assembly	Ugrnd	underground
SP	special provisions	Util	utility
G	specific gravity		
Spk	spike	VG	valley gutter
SB	split barrel sample	Vap	vapor
SH	sprinkler head	Vert	vertical
SV	sprinkler valve	VCP	vitrified clay pipe
Sq	square	Vol	volume
Stk	stake	VSFS	vehicle speed feedback sign
Std	standard		
N	standard penetration test	Wkwy	walkway
Std Specs	standard specifications	W	water content
Stm L	steam line	WGV	water gate valve
SEC	steel encased concrete	WL	water line
SMA	stone matrix asphalt	WM	water main
SSD	stopping sight distance	WMV	water main valve
SD	storm drain	W Mtr	water meter
St	street	WSV	water service valve
SPP	structural plate pipe	WW	water well
SPPA	structural plate pipe arch	Wrng	wearing
Str	structure	WIM	weigh in motion
Subd	subdivision	W	west
Sub	subgrade	WB	westbound
Sub Prep	subgrade preperation	Wrng	wiring
Ss	subsoil	W/	with
SS	supplement specification	W/o	without
Supp	supplemental		
Surf	surfacing		
Surv	survey		
Sym	symmetrical		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



NDDOT ABBREVIATIONS

D-101-4

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in.	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International

T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CC	closing corner
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
MC	meander corner
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
SC	standard corner
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WC	witness corner
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added
4-14-25	- Continued from D-101-3 General Revisions



NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM
ACCENT
AGASSIZ WU
AGC
ALL PL
ALL SEAS WU
AMOCO PI
AMRDA HESS
AT&T
B PAW
BAKER ELEC
BASIN ELEC
BEK TEL
BELLE PL
BLM
BNSF
BOEING
BRNS RWD
BURK-DIV ELEC
BURL WRD
CABLE ONE
CABLE SERV
CAP ELEC
CASS CO ELEC
CASS RWU
CAV ELEC
CBLCOM
CENEX PL
CENT PL WATER DIST
CENT PWR ELEC
CENTURYLINK
COE
CONS COMM
CONS TELCOM
CONT RES
CPR
D O E
DAK CARR
DAK CENT TEL
DAK RWD
DGC
DICKY R NET
DICKY WRD
DICKY TEL
DNRR
DOME PL
DVELEC
DVMW
E CENT REG WD
ENBRDG
ENVENTIS
EQUINOR
FALK MNG
FHWA
G FKS-TRL WD
GETTY TRD & TRAN
GLDN W ELEC

702 Communications
Accent Communications
Agassiz Water Users District
Associated General Contractors of America
Alliance Pipeline
All Seasons Water Users District
Amoco Pipeline Company
Amerada Hess Corporation
AT&T Corporation
Bear Paw Energy Incorporated
Baker Electric
Basin Electric Cooperative Incorporated
Bek Communications Cooperative
Belle Fourche Pipeline Company
Bureau of Land Management
Burlington Northern Santa Fe Railway
Boeing
Barnes Rural Water District
Burke-Divide Electric Cooperative
Burleigh County Water Resource District
Cable One
Cable Services
Capital Electric Cooperative Incorporated
Cass County Electric Cooperative
Cass Rural Water Users District
Cavalier Rural Electric Cooperative
Cablecom Of Fargo
Cenex Pipeline
Central Pipe Line Water District
Central Power Electric Cooperative
CenturyLink
Corps of Engineers
Consolidated Communications
Consolidated Telcom
Continental Resource Inc
Canadian Pacific Railway
Department Of Energy
Dakota Carrier Network
Dakota Central Telephone
Dakota Rural Water District
Dakota Gasification Company
Dickey Rural Networks
Dickey County Water Resource District
Dickey Telephone
Dakota Northern Railroad
Dome Pipeline Company
Dakota Valley Electric Cooperative
Dakota, Missouri Valley & Western
East Central Water District
Enbridge Pipelines Incorporated
Enventis Telephone
Equinor Pipeline
Falkirk Mining Company
Federal Highway Administration
Grand Forks-traill Water District
Getty Trading & Transportation
Golden West Electric Cooperative

GTR RAMSEY WD
GT PLNS NAT GAS
HALS TEL
IDEA1
INT-COMM TEL
KANEB PL
KEM ELEC
KOCH GATH SYS
LKHD PL
LWR YELL R ELEC
LUMEN
MCKNZ CON
MCKNZ ELEC
MCKNZ WRD
MCLEOD
MCLN ELEC
MCLN-SHRDN R WAT
MDU
MIDCO
MIDSTATE TEL
MINOT CABLE
MINOT TEL
MISS VALL COMM
MISS W W S
MINKOTA PWR
MOR-GRAN-SOU ELEC
MOUNT-WILLI ELEC
MLGC
MUNICIPAL
MUNICIPAL
N CENT ELEC
N PRAIR REG WD
ND PKS & REC
ND TEL
NDDOT
NE REG WD
NDSU SOIL SCI DEPT
NEMONT TEL
NODAK R ELEC
NOON FRMS TEL
NPR
NSP
NTHN BRDR PL
NTHN PLNS ELEC
NTHWSTRN REF
NW COMM
NWRWD
ONEOK
OSHA
OTTR TL PWR
PAAP
P L E M
POLAR COM
PVT ELEC
QWEST
R&T REG WD

Greater Ramsey Water District
Great Plains Natural Gas Company
Halstad Telephone Company
Idea1
Inter-Community Telephone Company
Kaneb Pipeline Company
Kem Electric Cooperative Incorporated
Koch Gathering Systems Incorporated
Lakehead Pipeline Company
Lower Yellowstone Rural Electric
Lumen Technologies Incorporated
McKenzie Consolidated Telcom
McKenzie Electric Cooperative
McKenzie County Water Resource District
McLeod USA
McLean Electric Cooperative
McLean-Sheridan Rural Water District
Montana-dakota Utilities
MidContinent Communications
Midstate Telephone Company
Minot Cable Television
Minot Telephone Company
Missouri Valley Communications Incorporated
Missouri West Water System
Minnkota Power
Mor-gran-sou Electric Cooperative
Mountrail-williams Electric Cooperative
Moore & Liberty - Griggs County
City Water And Sewer
City Of '.....'
North Central Electric Cooperative
North Prairie Regional Water District
North Dakota Parks And Recreation
North Dakota Telephone Company
North Dakota Department of Transportation
Northeast Regional Water District
NDSU Soil Science Department
Nemont Telephone
Nodak Rural Electric Cooperative
Noonan Farmers Telephone Company
Northern Plains Railroad
Northern States Power
Northern Border Pipeline
Northern Plains Electric Cooperative Incorporated
Northwestern Refinery Company
Northwest Communication Cooperation
Northwest Rural Water District
Oneok gas
Occupational Safety and Health Administration
Otter Tail Power Company
Plains All American Pipeline
Praeliands Energy Marketing
Polar Communications
Private Electric
Qwest Communications
R & T Water District

RED RIV COMM
RESVTN TEL
ROBRTS TEL
R-RIDER ELEC
RRVW
S CENT REG WD
SE W U
SCOTT CABLE
SHERDN ELEC
SHEYN VLY ELEC
SKYTECH
SLOPE ELEC
SOURIS RIV TELCOM
ST WAT COMM
STATE LN WATER
STER ENG
STUT RWD
SW PL PRJ
SWWA
SUNOCO
T M C
TCI
TESORO GHG PLNS PL
TRI-CNTY WU
TRL CO WRD
UNTD TEL
UPPR SOUR WD
US SPRINT
USAF MSL CABLE
USFWS
USW COMM
VRNDRY ELEC
W RIV TEL
WAPA
WAWSA
WEB
WILLI WRD
WILSTN BAS PL
WLSH RWD
WOLVRTN TEL
XLENER
YSVR

Red River Communications
Reservation Telephone
Roberts Company Telephone
Roughrider Electric Cooperative
Red River Valley & Western Railroad
South Central Regional Water District
Southeast Water Users Incorporated
Scott Cable Television Dickinson
Sheridan Electric Cooperative
Sheyenne Valley Electric Cooperative
Skyland Technologies Incorporated
Slope Electric Cooperative Incorporated
Souris River Telecommunications
State Water Commission
State Line Water Cooperative
Sterling Energy
Stutsman Rural Water District
Southwest Pipeline Project
Southwest Water Authority
Sunoco LP
Turtle Mountain Communications
TCI of North Dakota
Tesoro High Plains Pipeline
Tri-County Water Users Incorporated
Traill County Water Resource District
United Telephone
Upper Souris Water District
U.S. Sprint
U.S.A.F. Missile Cable
US Fish and Wildlife Service
U.S. West Communications
Verendrye Electric Cooperative
West River Telephone Incorporated
Western Area Power Administration
Western Area Water Supply Authority
W. E. B. Water Development Association
Williams County Water Resource District
Williston Basin Interstate Pipeline Company
Walsh Water Rural Water District
Wolverton Telephone
Xcel Energy
Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



LINE STYLES

D-101-20

Existing Topography

	Existing Ground Void
	Existing Cemetary Boundary
	Existing Box Culvert Bridge
	Existing Concrete Surface
	Existing Drainage Structure
	Existing Gravel Surface
	Existing Riprap
	Existing Dirt Surface
	Existing Asphalt Surface
	Existing Tie Point Line
	Existing Railroad Centerline
	Existing Guardrail Cable
	Existing Guardrail Metal
	Existing Edge of Water
	Existing Fence
	Existing Railroad
	Existing Field Line
	Exst Flow
	Existing Curb
	Existing Valley Gutter
	Existing Driveway Gutter
	Existing Curb and Gutter
	Existing Mountable Curb and Gutter

	Existing 3-Cable w Posts
	Site Boundary
	Existing Berm, Dike, Pit, or Earth Dam
	Existing Ditch Block
	Existing Tree Boundary
	Existing Brush or Shrub Boundary
	Existing Retaining Wall
	Existing Planter or Wall
	Existing W-Beam Guardrail with Posts
	Existing Railroad Switch
	Gravel Pit - Borrow Area
	Existing Wet Area-Vegetation Break
	Existing High Tension Cable Guardrail
	Existing High Tension Cable Guardrail with Posts

Proposed Topography

	3-Cable w Posts
	Flow
	Fence
	Remove Line
	Wall
	Retaining Wall (Plan View)
	W-Beam w Posts
	High Tension Cable Guardrail with Posts

Existing Utilities

	Existing Electrical
	Existing Fiber Optic Line
	Existing TV Fiber Optic
	Existing Gas Pipe
	Existing Overhead Utility Line
	Existing Power
	Existing Fuel Pipeline
	Existing Undefined Above Ground Pipe Line
	Existing Sanitary Sewer
	Existing Sanitary Force Main
	Existing Storm Drain
	Existing Storm Drain Force Main
	Existing Culvert
	Existing Telephone Line
	Existing TV Line
	Existing Water or Steam Line
	Existing Under Drain
	Existing Slotted Drain
	Existing Conduit
	Existing Conductor
	Existing Down Guy Wire Down Guy
	Existing Underground Vault or Lift Station

Proposed Utilities

	24 Inch Pipe
	Reinforced Concrete Pipe
	Under Drain
	Edge Drain

Traffic Utilities

	Conductor
	Fiber Optic
	Existing Loop Detector
	Existing Double Micro Loop Detector
	Micro Loop Detector Double
	Existing Micro Loop Detector
	Micro Loop Detector
	Signal Head with Mast Arm
	Existing Signal Head with Mast Arm

Sign Structures

	Existing Overhead Sign Structure
	Existing Overhead Sign Structure Cantilever
	Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups
12-18-20	General Revisions

LINE STYLES

D-101-21

Right Of Way

	Easement
	Existing Easement
	Right of Way
	Existing Right of Way
	Existing Right of Way Railroad
	Existing Right of Way Not State Owned
	Existing Government Lot Line
	Existing Adjacent Block Lines
	Existing Adjacent Lot Lines
	Existing Adjacent Property Line
	Existing Adjacent Subdivision Lines
	Sight Distance Triangle Line
	Dimension Leader

Boundary Control

	Existing City Corporate Limits or Reservation Boundary
	Existing State or International Line
	Existing Township
	Existing County
	Existing Section Line
	Existing Quarter Section Line
	Existing Sixteenth Section Line
	Existing Centerline
	Tangent Line

Cross Sections and Typicals

	Existing Ground
	Existing Topsoil (Cross Section View)
	Existing Ground Void (Not Surveyed)
	Existing Concrete
	Existing Aggregate (Cross Section View)
	Existing Curb and Gutter (Cross Section View)
	Existing Asphalt (Cross Section View)
	Existing Reinforcement Rebar

Geotechnical

	Geotextile Fabric Type D
	Geogrid
	Geotextile Fabric Type R
	Geotextile Fabric Type R1
	Geotextile Fabric Type RR
	Geotextile Fabric Type S
	Subgrade Reinforcement
	Failure Line

Countours

	Depression Contours
	Supplemental Contour

Profile

	Subgrade, Subcut or Ditch Grade
	Topsoil Profile

Striping

	Centerline Pavement Marking
	Barrier with Centerline Pavement Marking
	Barrier Pavement Marking
	Stripe 4 IN Dotted Extension White
	Stripe 8 IN Dotted Extension White
	Stripe 8 IN Lane Drop

Pavement Joints

	Doweled Joint
	Tie Bar 30 Inch 4 Foot Center to Center
	Tie Bar 18 Inch 3 Foot Center to Center
	Tie Bar at Random Spacing

Bridge Details

	Small Hidden Object
	Large Hidden Object
	Phantom Object
	Existing Conditions Object
	Centerline Main
	Centerline Secondary
	Excavation Limits
	Proposed Ground
	Sheet Piling

Erosion Control

	Limits of Const Transition Line
	Bale Check
	Rock Check
	Floating Silt Curtain
	Silt Fence
	Excavation Limits
	Fiber Rolls

Environmental

	Wetland Mitigation
	Existing Wetland Easement USFWS
	Existing Wetland Jurisdictional
	Existing Wetland
	Tree Row

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups
12-18-20	General Revisions

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683


ENGINEER

NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-30

	North Arrow (Half Scale)		Existing Bush or Shrub		Continuous Split Barrel Sample
	Alignment Data Point		Existing Large Evergreen Tree		Flight Auger Sample
	Alignment Monument		Existing Small Evergreen Tree		Split Barrel Sample
	Spot Elevation		Existing Large Tree		Thinwall Tube Sample
	Existing Miscellaneous Spot		Existing Small Tree		Standard Penetration Test
	Existing Access Control Arrow		Existing Tree Trunk		Inclinometer Tube
	Existing Benchmark		Cairn or Stone Circle		Excavation Unit
	Reset USGS Marker		Existing Artifact		Existing Ground Water Well Bore Hole
	Iron Monument Found		Existing Satellite Dish		
	Iron Pin R/W Monument		Existing Weather Station		
	Property Corner		Existing Windmill or Tower		
	Iron Pin Reference Monument		Reinforced Pavement		
	Right of Way Marker (Exst, Ppsd, Reset)				
	Existing Federal Reference Corner				
	Existing Section Corner (Full, Quarter, Sixteenth, Meander)				
	Existing Witness Corner				
	Existing Control Point (CP, GPS-RTK, TRI)				
	Existing Traverse PI Aerial Panel				
	Existing Reference Marker Point NGS				
	Existing EFB Misc				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



12 18 2020

SYMBOLS

D-101-31

				Flexible Delineator				Highway Sign (Exst, Ppsd)
				Flexible Delineator Type A (Exst, Ppsd)				Mile Post Type A (Exst-Ppsd-Reset)
				Flexible Delineator Type B (Exst, Ppsd)				Mile Post Type B (Exst, Ppsd)
				Flexible Delineator Type C (Exst, Ppsd)				Mile Post Type C (Exst, Ppsd)
				Flexible Delineator Type D (Exst, Ppsd)				Object Marker Type I (Exst, Ppsd)
				Flexible Delineator Type E (Exst, Ppsd)				Object Marker Type II (Exst, Ppsd)
				Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)				Object Marker Type III (Exst, Ppsd)
				Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)				Existing Reference Marker
				Delineator Type C (Exst, Ppsd, Diamond Grade)				Road Closure Gate 18 Ft (Exst, Ppsd)
				Delineator Type D (Exst, Ppsd, Diamond Grade)				Road Closure Gate 28 Ft (Exst, Ppsd)
				Delineator Type E (Exst, Ppsd, Diamond Grade)				Road Closure Gate 40 Ft (Exst, Ppsd)
				Barricade (Type I, Type II, Type III)				Existing Railroad Battery Box
				Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)				Existing RR Profile Spot
				Attenuation Device				Existing Railroad Crossbuck
				Truck Mounted Attenuator				Existing Railroad Frog
				Delineator Drums				Existing Mailbox (Private, Federal)
				Flagger				
				Tubular Marker				
				Traffic Cone				
				Back to Back Vertical Panel Sign				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 18 2020

SYMBOLS

D-101-32

	Existing Luminaire		High Mast Light Standard 3 Luminaire (Exst, Ppsd)		Existing Traffic Signal Standard
	Luminaire LED		High Mast Light Standard 4 Luminaire (Exst, Ppsd)		Pull Box (Exst-Ppsd-Undefined)
	Existing Light Standard Luminaire		High Mast Light Standard 5 Luminaire (Exst, Ppsd)		Intelligent Transportation Pull Box (Exst, Ppsd)
	Relocate Light Standard		High Mast Light Standard 6 Luminaire (Exst, Ppsd)		Transformer (Exst, Ppsd)
	Light Standard Light LED Luminaire		High Mast Light Standard 7 Luminaire (Exst, Ppsd)		Power Pole (Exst-Ppsd-with Transformer)
	Light Standard 35 Watt High Pressure Sodium Vapor Luminaire		High Mast Light Standard 8 Luminaire (Exst, Ppsd)		Wood Pole (Exst, Ppsd)
	Light Standard 50 Watt High Pressure Sodium Vapor Luminaire		High Mast Light Standard 9 Luminaire (Exst, Ppsd)		Pedestrian Push Button Post (Exst, Ppsd)
	Light Standard 70 Watt High Pressure Sodium Vapor Luminaire		High Mast Light Standard 10 Luminaire (Exst, Ppsd)		Existing Pole
	Light Standard 100 Watt High Pressure Sodium Vapor Luminaire		Overhead Sign Structure Load Center (Exst, Ppsd)		Existing Telephone Pole
	Light Standard 150 Watt High Pressure Sodium Vapor Luminaire		Traffic Signal Controller (Exst, Ppsd)		Existing Post
	Light Standard 200 Watt High Pressure Sodium Vapor Luminaire		Pad Mounted Traffic Signal Controller (Exst, Ppsd)		Connection Conductor (Ground, Neutral, Phase 1, Phase 2)
	Light Standard 250 Watt High Pressure Sodium Vapor Luminaire		Flashing Beacon (Exst, Ppsd)		
	Light Standard 310 Watt High Pressure Sodium Vapor Luminaire		Concrete Foundation (Exst, Ppsd)		
	Light Standard 400 Watt High Pressure Sodium Vapor Luminaire		Pipe Mounted Flasher (Exst, Ppsd)		
	Light Standard 700 Watt High Pressure Sodium Vapor Luminaire		Pad Mounted Feed Point (Exst, Ppsd)		
	Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire		Pipe Mounted Feed Point with Pad (Exst, Ppsd)		
	Emergency Vehicle Detector		Pole Mounted Feed Point (Exst, Ppsd)		
	Video Detection Camera		Junction Box (Exst, Ppsd)		
			Existing Pedestrian Head with Number		
			Existing Signal Head		
			Pole Mounted Head		
			Existing Lighting Standard Pole		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14 REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

12 18 2020

SYMBOLS

D-101-33

			Existing Manhole (Electrical, Gas, Telephone)		Cap or Stub Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water
			Water Manhole (Exst, Exst with Valve)		Existing Pedestal Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined
			Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)		Existing Pipe Vent Gas, Fuel, Sanitary, Storm Drain, Water, Undefined
			Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)		Valve Exst Gas, Exst Water, Ppsd Water, Exst Undefined
			Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)		Pump Sanitary, Storm Drain, Exst Water
			Force Main Storm Drain Manhole (Exst, Exst with Valve)		Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)		Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Existing Water Appurtenance		Existing Utility Marker
			Sprinkler Head (Exst, Ppsd)		Existing Meter
			Fire Hydrant (Exst, Ppsd)		Existing Fuel Dispensers
			Cleanout (Exst Sanitary, Underdrain)		Existing Fuel Filler Pipes
			Existing Catch Basin Inlet (Round, Square)		Existing Fuel Leak Sensors
			Existing Curb Inlet (Round, Square)		
			Existing Slotted Reinforced Concrete Pipe		
			Catch Basin (Riser 30 Inch, Beehive, Type A)		
			Inlet Mountable Curb (Type A, Type B)		
			Inlet Saddle Base (Type 1, Type 2)		
			Inlet Special (Catch Basin, Type 1, Type A)		
			Inlet (Tee, Type 1, Type 2, Type 2 Double)		
			Median Drain		
			Headwall (Exst, Ppsd, Ppsd Single with Vegetation Barrier, Ppsd Double with Vegetation Barrier)		


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA


12 18 2020

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-7

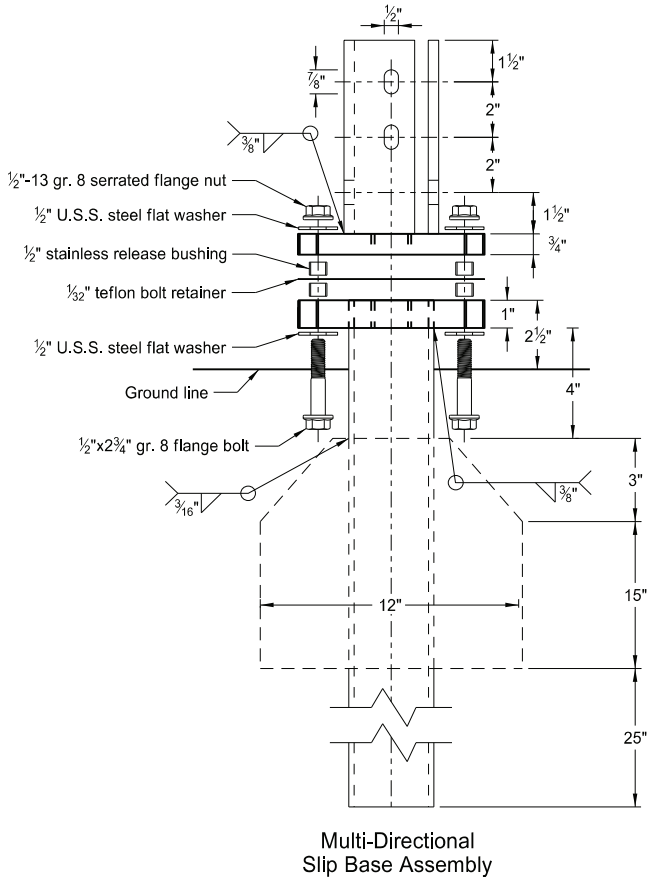

Perforated Tube


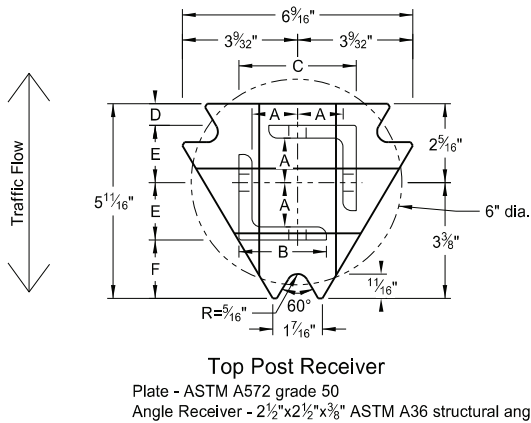


- Notes:
1. Torque slip base bolts as specified by manufacturer.
 2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
 3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
 4. In concrete sidewalk, use same anchor without wings.
 5. Provide more than 7' between the first and fourth posts of a four post sign.


Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 5/16"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 7/8"
2 1/2"x10 ga.	1 3/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

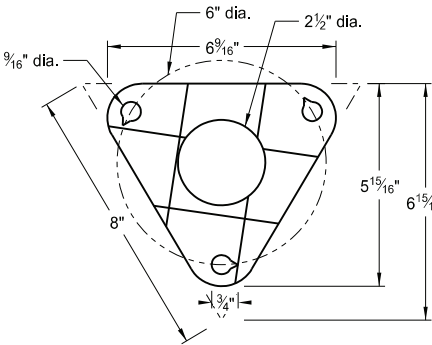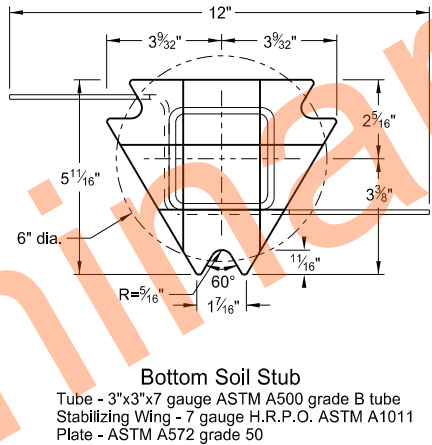

- (A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.
- (B) For additional wind load, insert the 2 3/16"x10 ga. into 2 1/2"x10 ga.

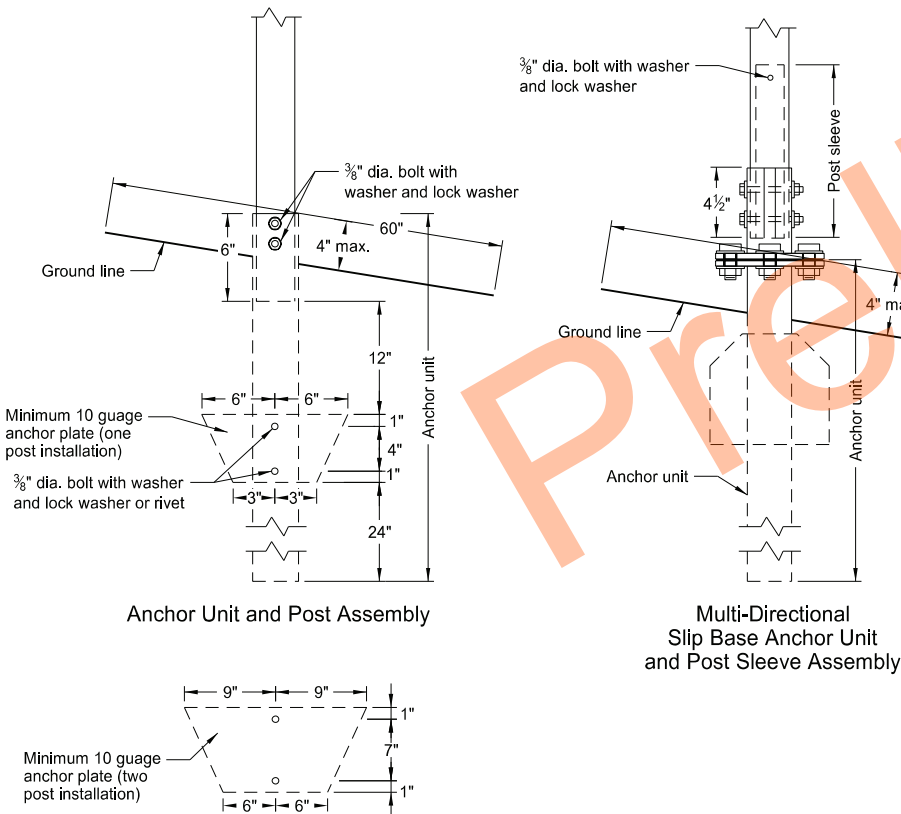

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature








08/01/24

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

U-Channel Post

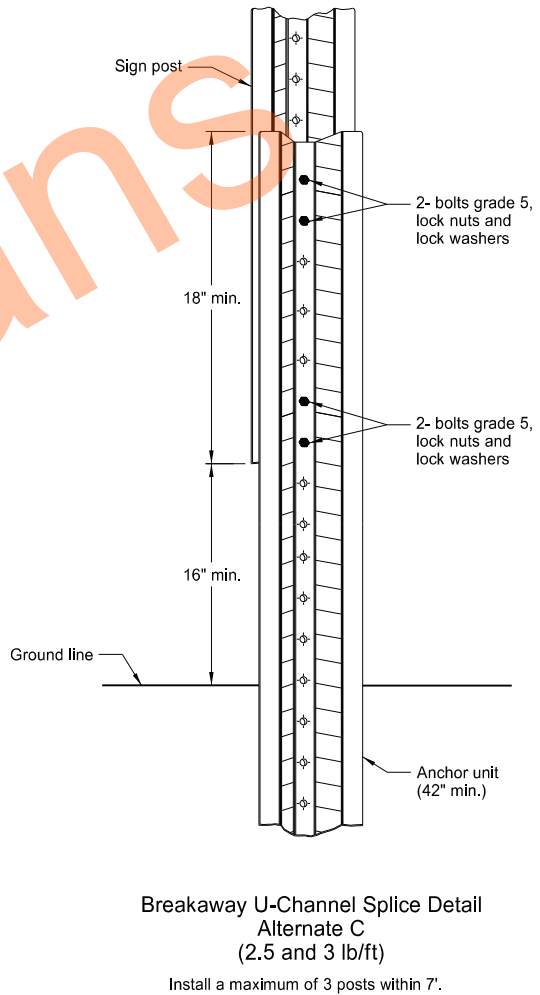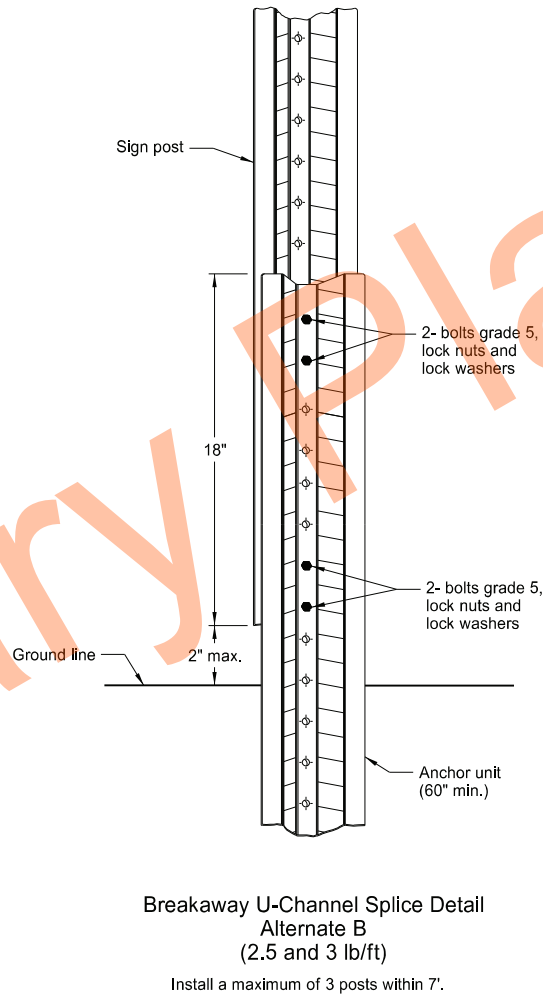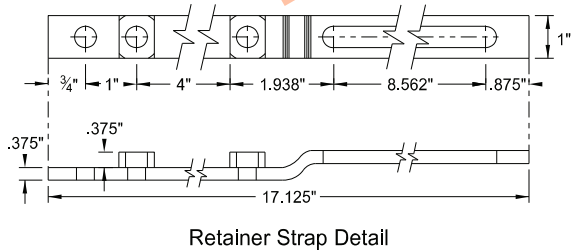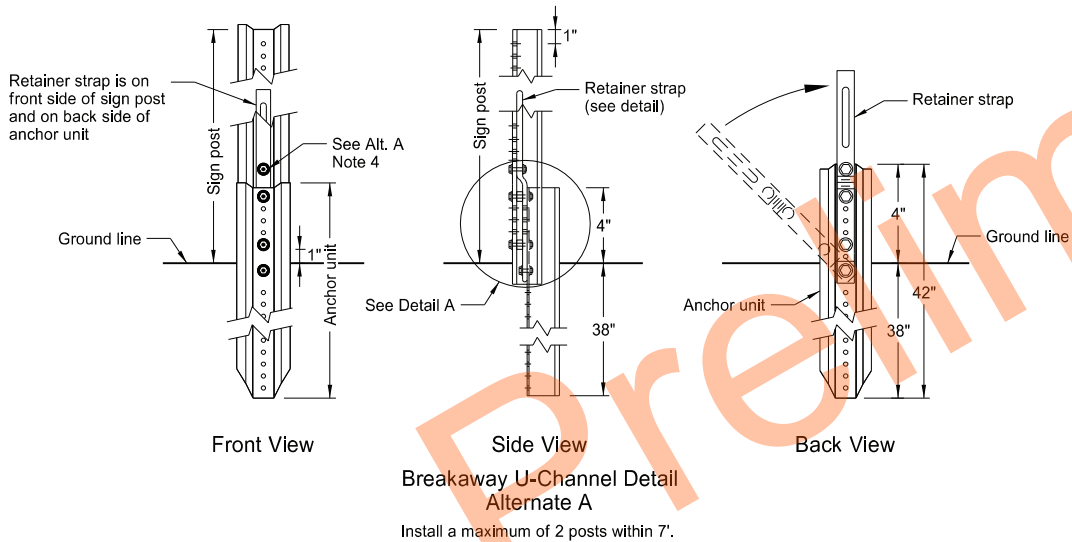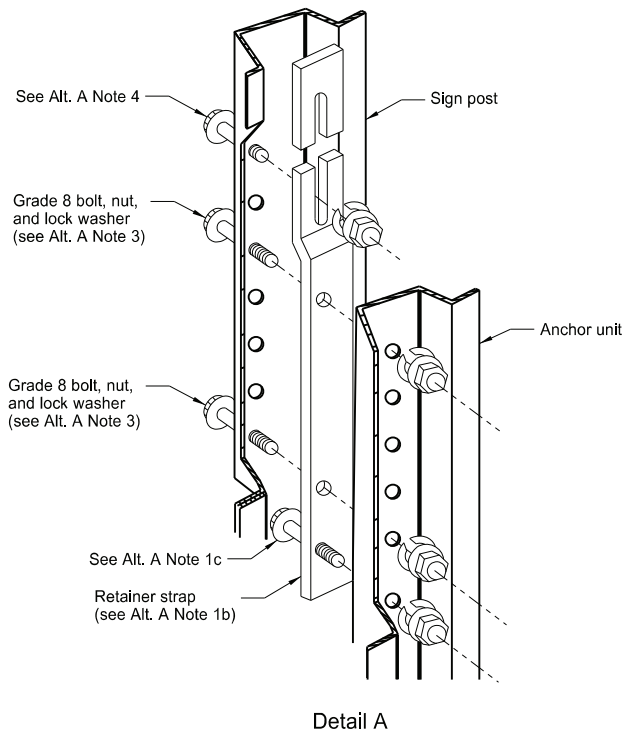

Alternate A Steps of Installation:

- Drive anchor unit to within 12" of ground level.
 - Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
 - Assemble strap to back of anchor unit using $\frac{5}{16}$ "x2" bolt, lock washer and nut.
 - Rotate strap 90° to left.
- Drive anchor unit to 4" above ground.
 - Rotate strap to vertical position.
- Place $\frac{5}{16}$ "x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
 - Alternately tighten two connector bolts.
- Complete assembly by tightening $\frac{5}{16}$ "x2" bolt (this fastens sign post to retainer strap).
- Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature




08/01/24


CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS



G20-1-60
Legend: black (non-refl)
Background: orange

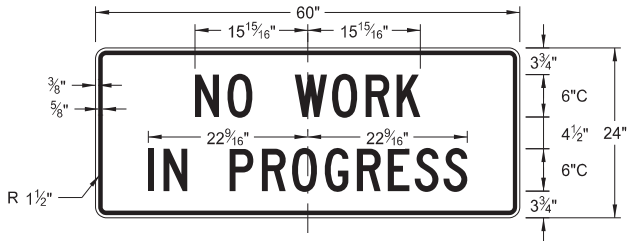


G20-1b-60
Legend: black (non-refl)
Background: orange

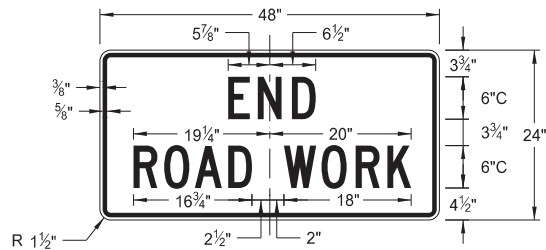


G20-2-48
Legend: black (non-refl)
Background: orange




G20-4b-36
Legend: black (non-refl)
Background: orange

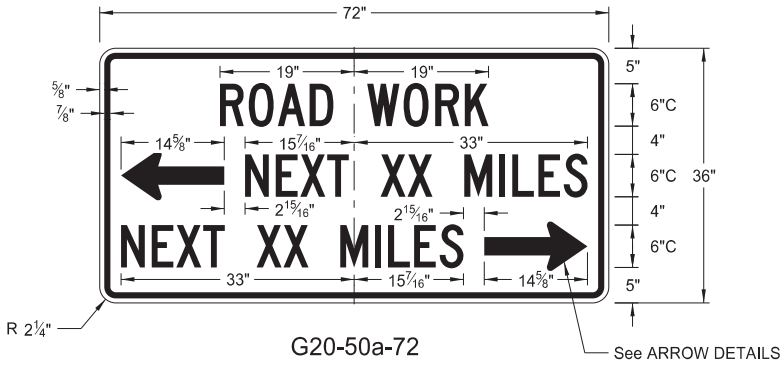


G20-50a-72
Legend: black (non-refl)
Background: orange

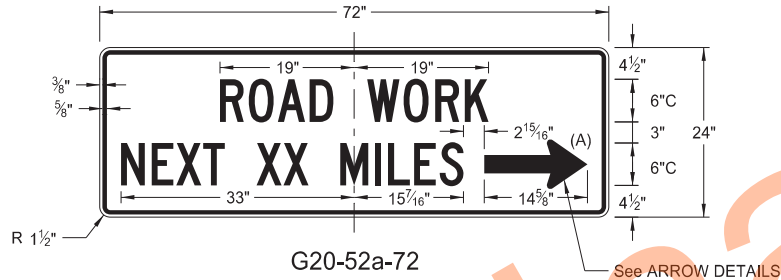


G20-52a-72
Legend: black (non-refl)
Background: orange

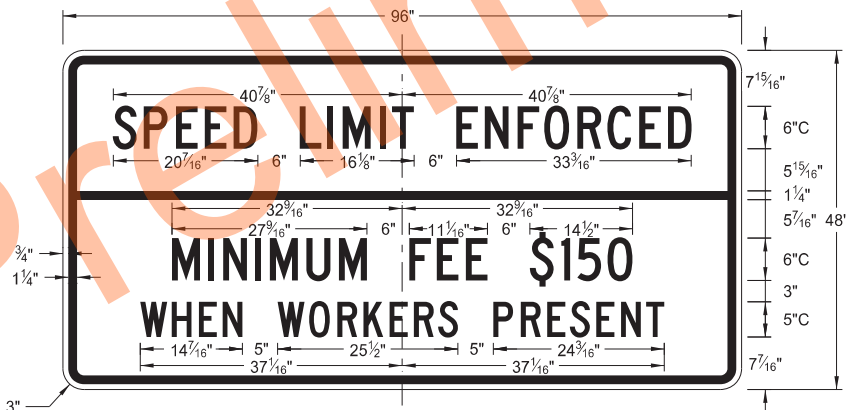


G20-55-96
Legend: black (non-refl)
Background: orange

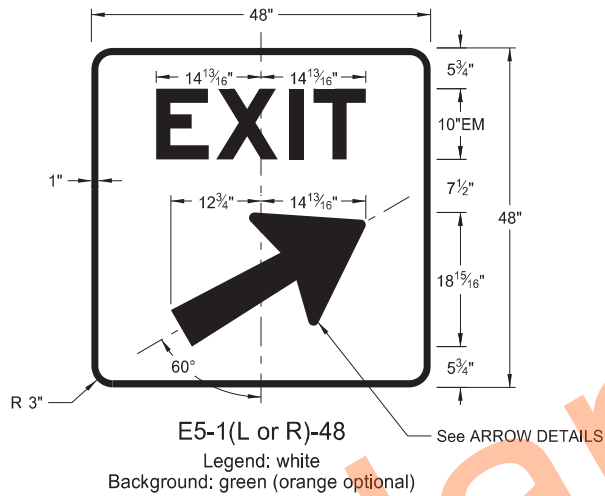


E5-1(L or R)-48
Legend: white
Background: green (orange optional)




M4-8-36
Legend: black (non-refl)
Background: orange

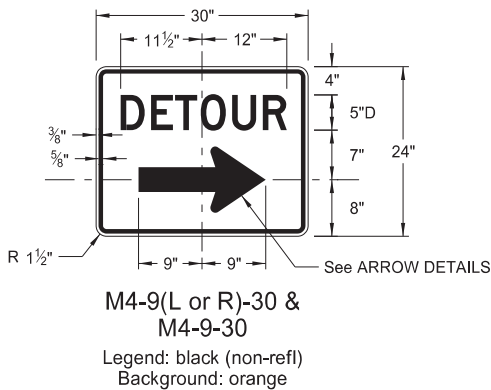


M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange

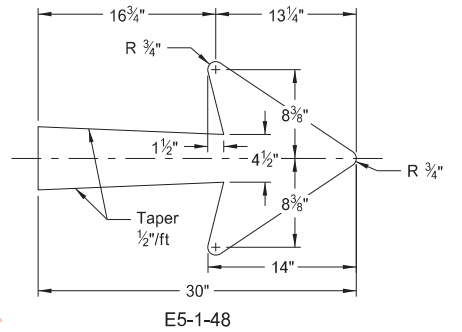


E5-1-48




G20-50a-72
G20-52a-72



M4-9(L or R)-30
Right or Left



M4-9(L or R)-30
Advanced Right or Left



M4-9-30
Straight

ARROW DETAILS

NOTES:


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added sign & background color
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes




CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS


D-704-10

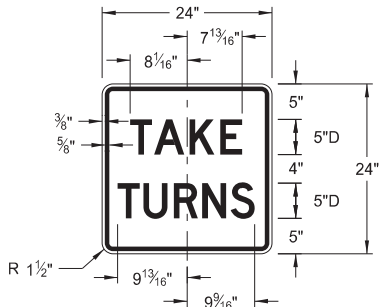


R1-50P-24
Legend: black (non-refl)
Background: white

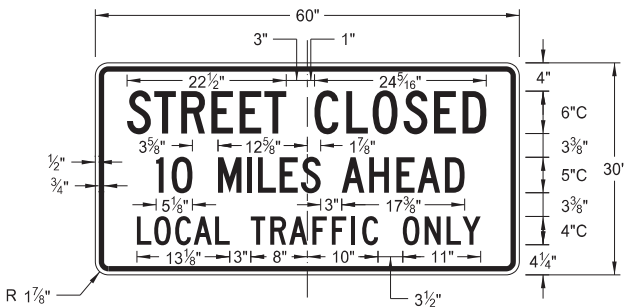

R11-3c-60
Legend: black (non-refl)
Background: white



R2-1aP-24
Legend: black (non-refl)
Background: white

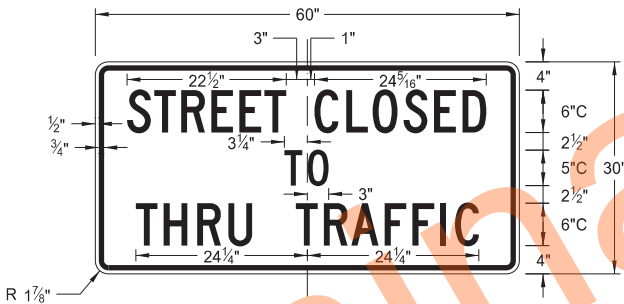

R11-4a-60
Legend: black (non-refl)
Background: white



R11-2a-48
Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Revised sign number
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes




CONSTRUCTION SIGN DETAILS
WARNING SIGNS

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

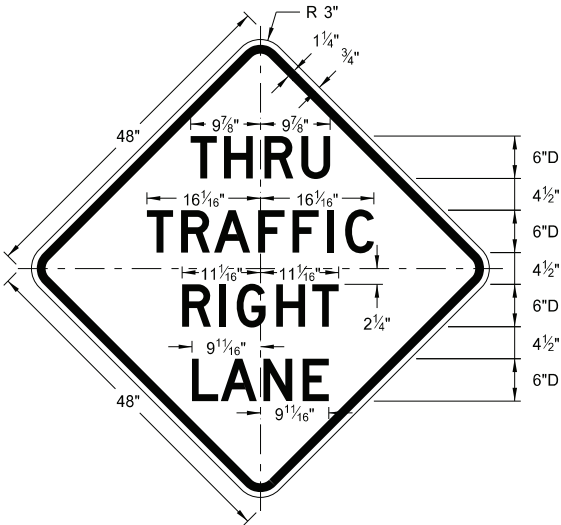


W5-8-48
Legend: black (non-refl)
Background: orange

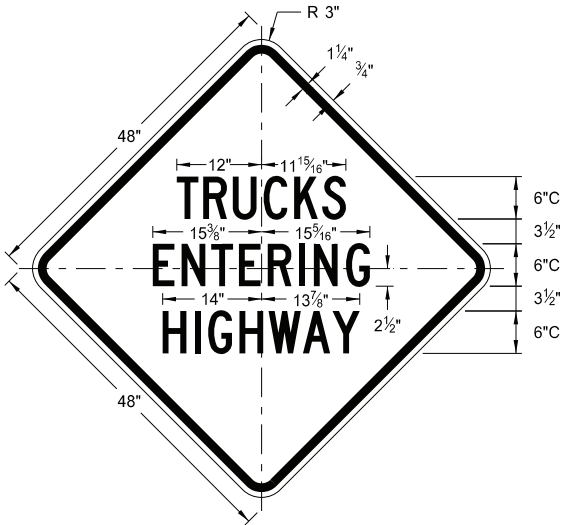


W8-53-48
Legend: black (non-refl)
Background: orange

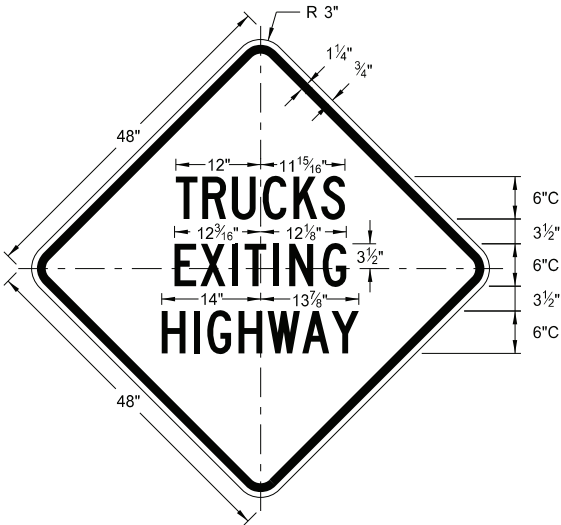


W8-56-48
Legend: black (non-refl)
Background: orange

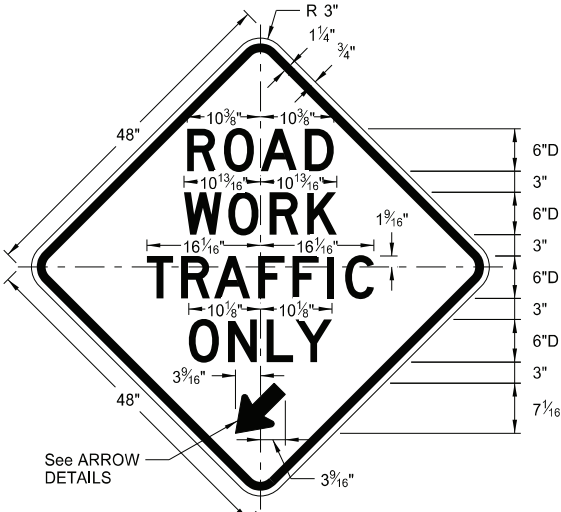


W5-9-48
Legend: black (non-refl)
Background: orange

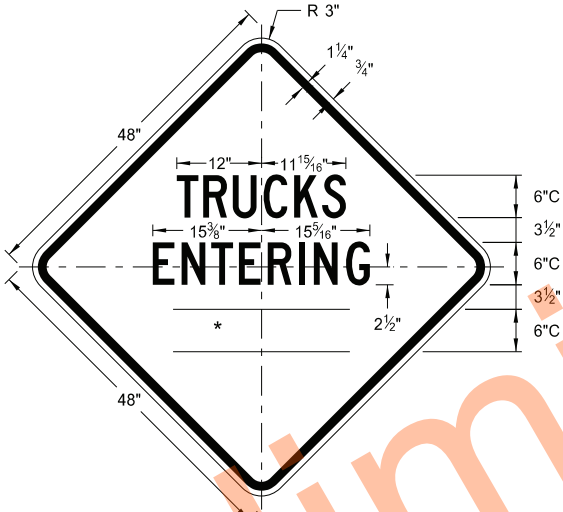


W8-54-48
Legend: black (non-refl)
Background: orange

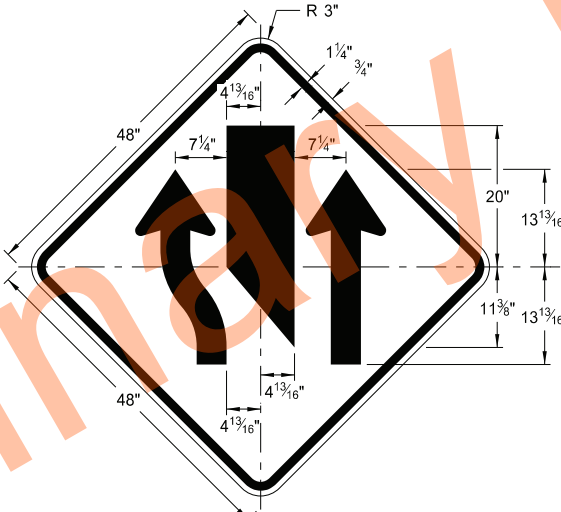



W9-3a-48
Legend: black (non-refl)
Background: orange

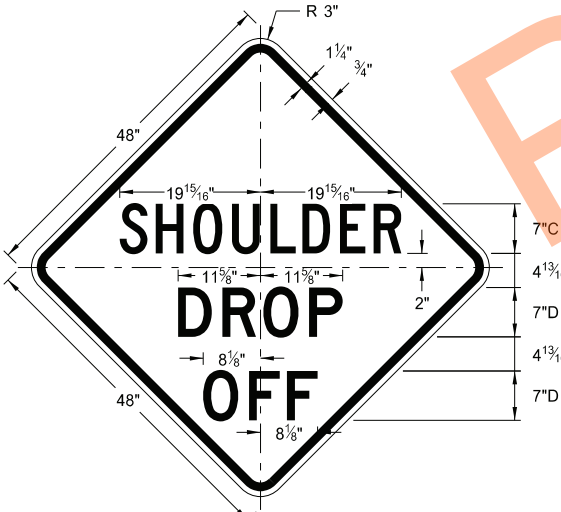

W8-9a-48
Legend: black (non-refl)
Background: orange

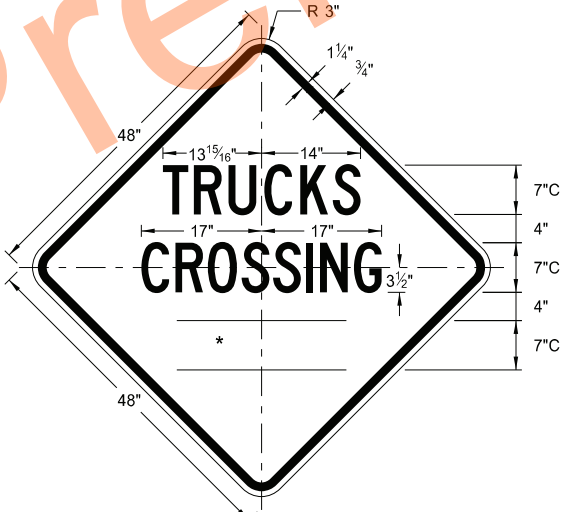

W8-55-48
Legend: black (non-refl)
Background: orange

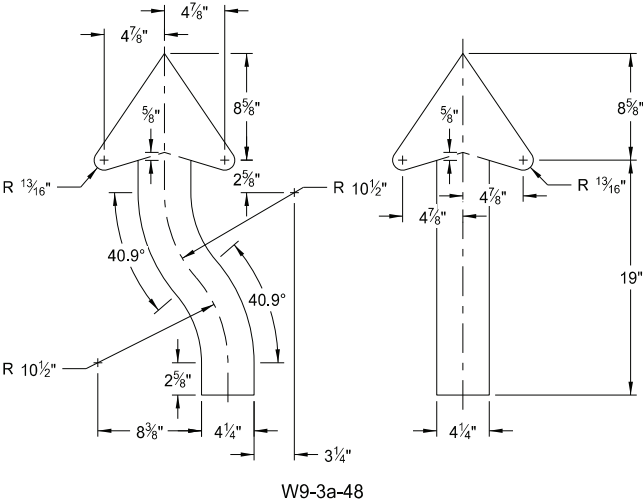


ARROW DETAILS

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
8-17-17	Updated sign number
5-31-18	Revised sign and arrow details
10-03-19	New Design Engineer PE Stamp
8-01-24	Electronic Stamp/Signature




08/01/24

CONSTRUCTION SIGN DETAILS
WARNING SIGNS




W16-7aP-18

Legend: black (non-refl)
Background: orange

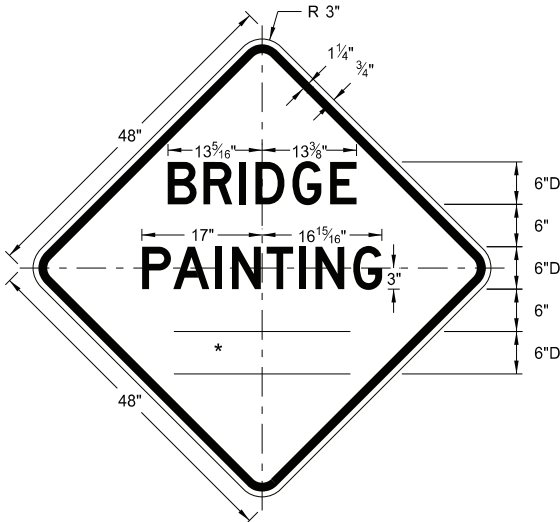


W21-50-48

Legend: black (non-refl)
Background: orange

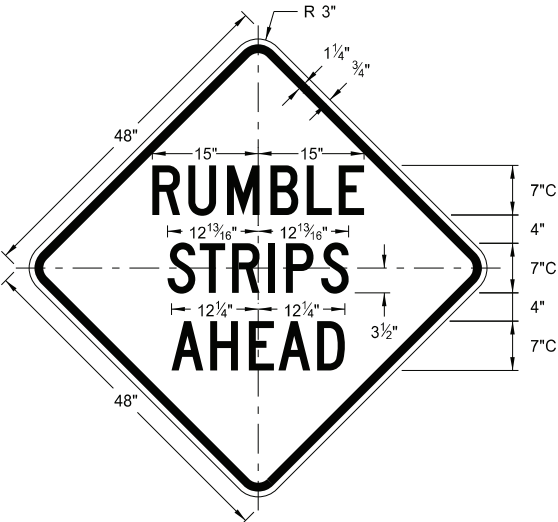


W21-53-48

Legend: black (non-refl)
Background: orange

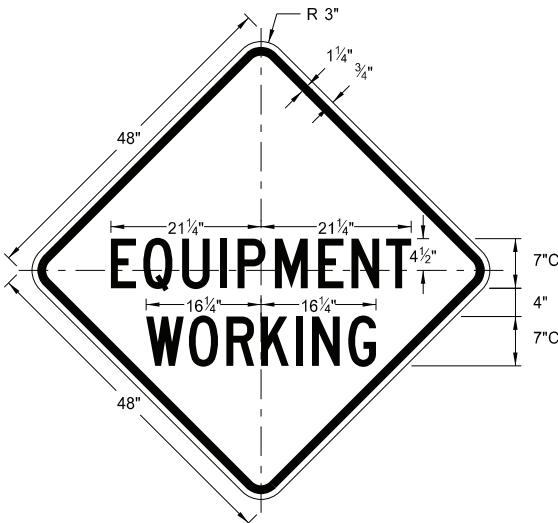


W20-51-48

Legend: black (non-refl)
Background: orange

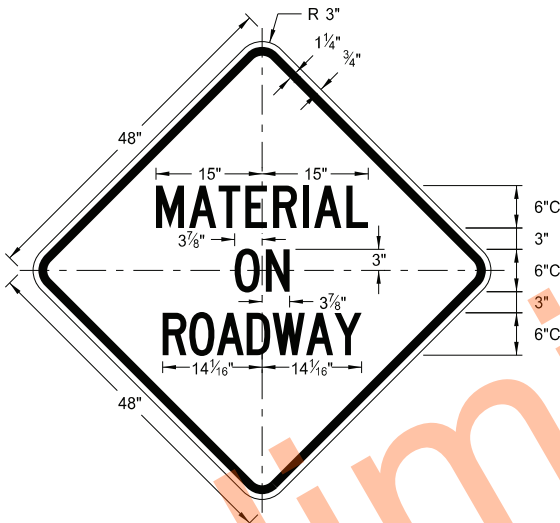


W21-51-48

Legend: black (non-refl)
Background: orange

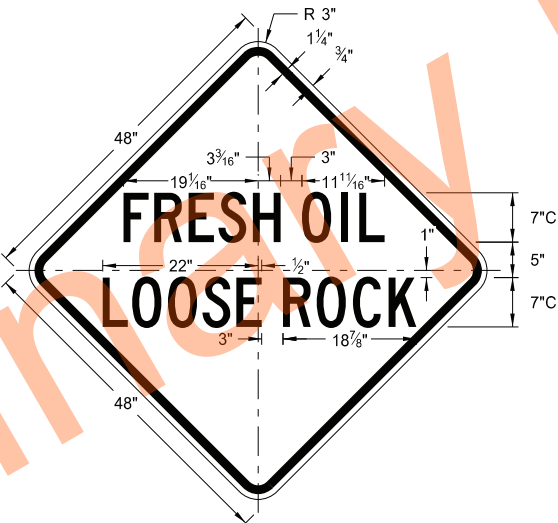


W22-8-48

Legend: black (non-refl)
Background: orange



W20-52P-54

Legend: black (non-refl)
Background: orange

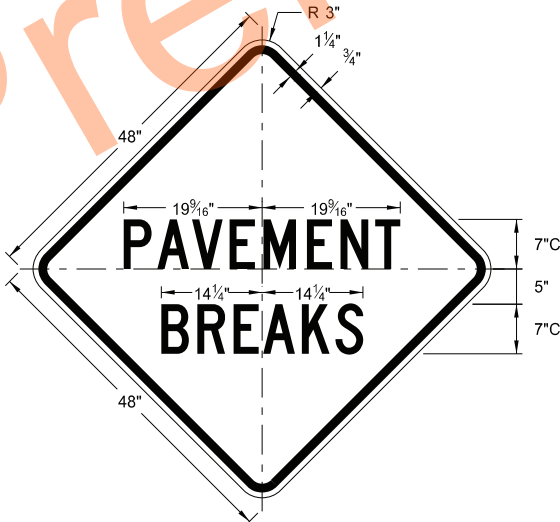


W21-52-48

Legend: black (non-refl)
Background: orange

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES

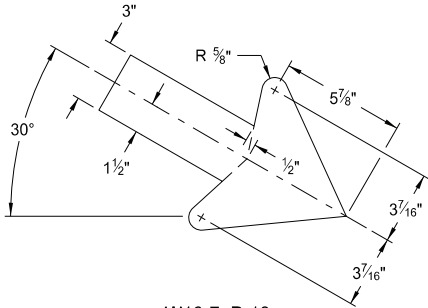


W16-7aP-18

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
5-31-18	
REVISIONS	
DATE	CHANGE
11-01-19	Added details for sign W16-7aP-18.
8-01-24	Electronic Stamp/Signature.




08/01/24

BARRICADE AND CHANNELIZING DEVICE DETAILS

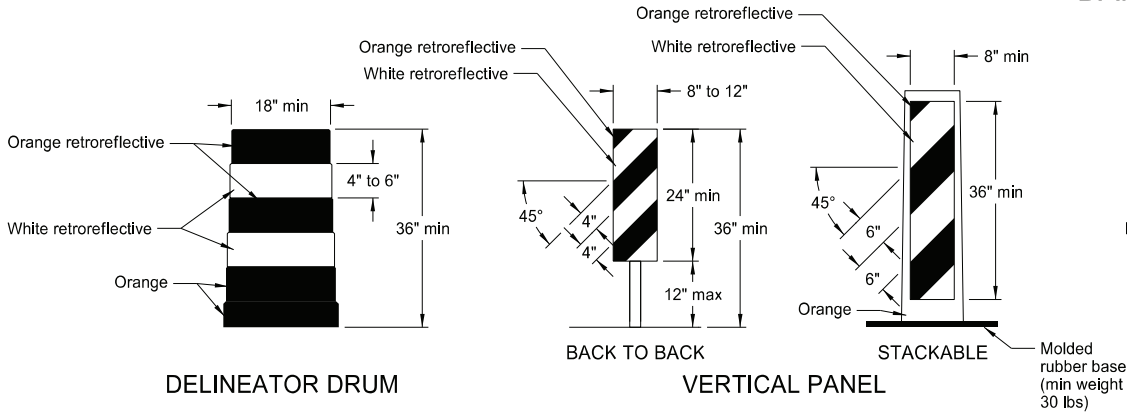


Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectORIZED spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.


Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

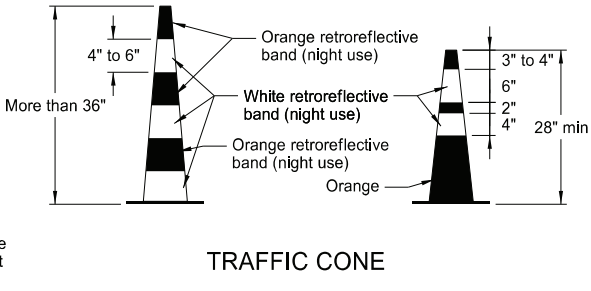


Provide retroreflectORIZATION of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectORIZED space between the orange and white stripes.



Provide retroreflectORIZATION of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

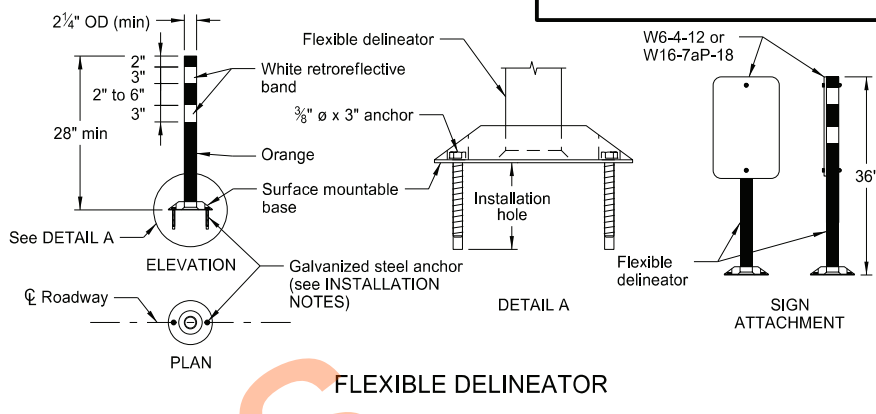


- INSTALLATION NOTES:
1. Drill installation holes to diameter and depth required by manufacturer's specifications.
 2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
 3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

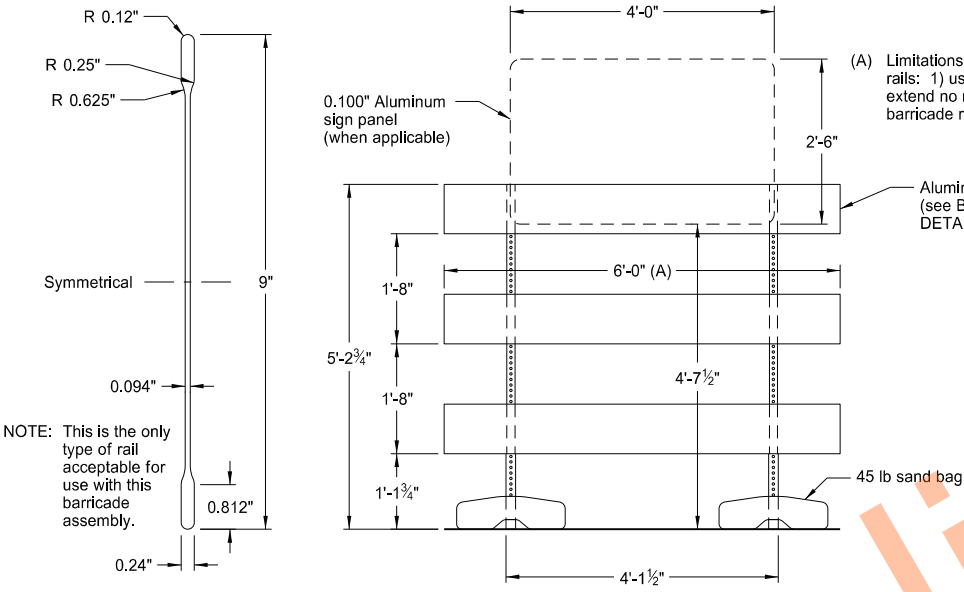


BARRICADE BLADE DETAIL

BARRICADE ASSEMBLY DETAIL
(Aluminum Barricade Rails)


NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".

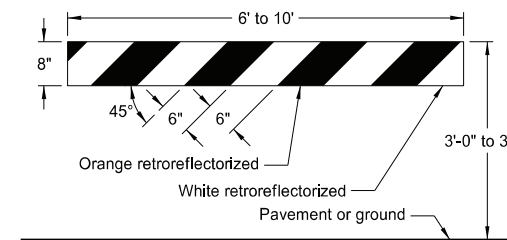


TYPE I BARRICADE

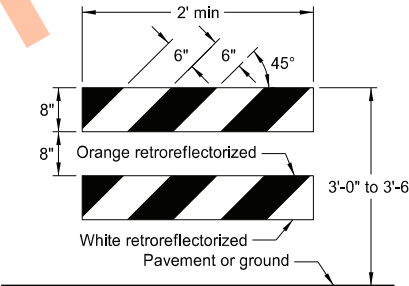

TYPE II BARRICADE

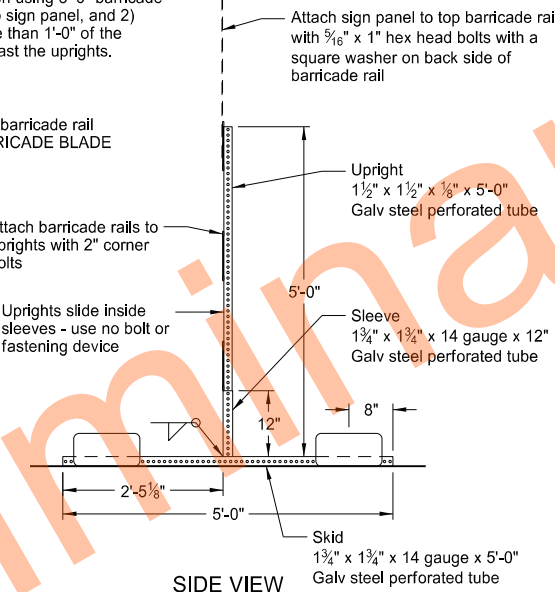


TYPE III BARRICADE

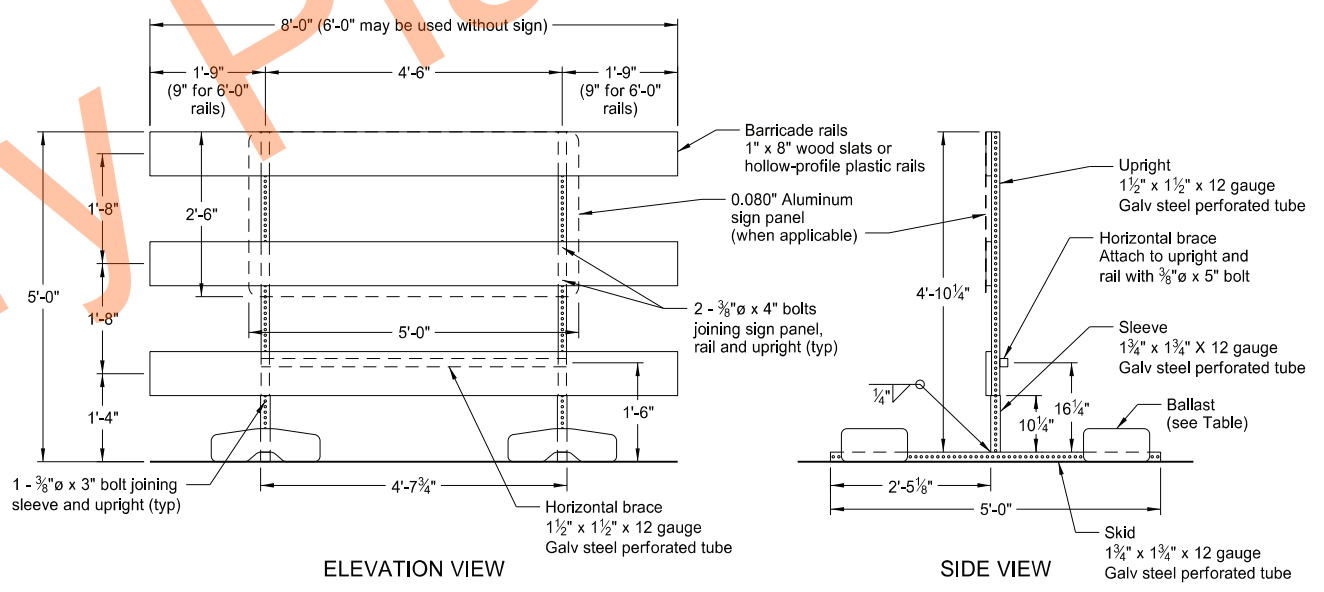

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL
(Wood or Plastic Rails)

SIDE VIEW

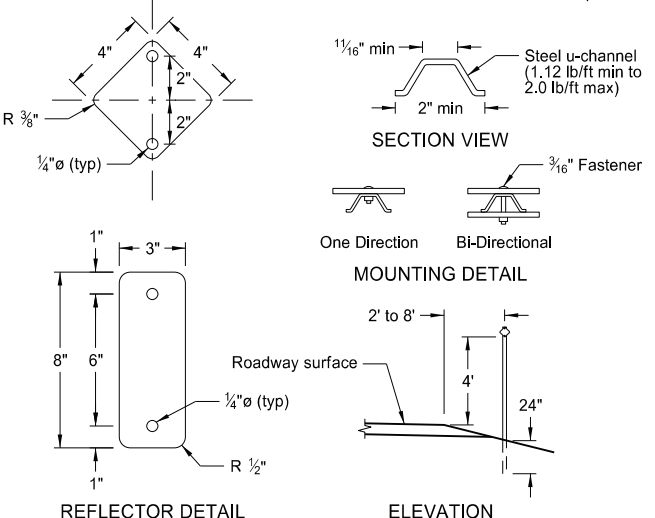

REFLECTOR DETAIL

ELEVATION

DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
11-01-19	Revised details for Flexible Delineator
8-01-24	Electronic Stamp/Signature




CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

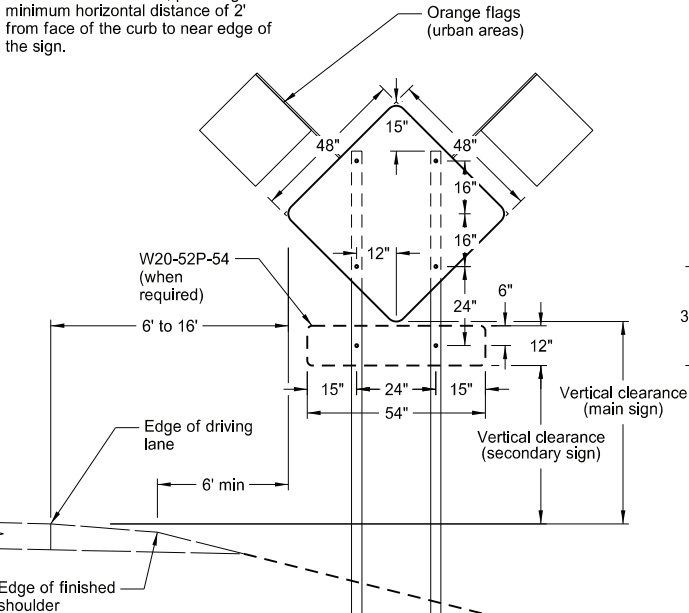


TYPICAL SECTION
(48" x 48" diamond warning sign shown)

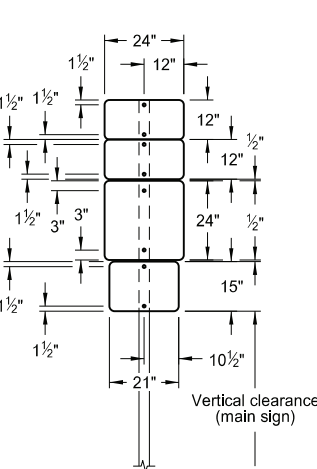


24" x 24" ROUTE MARKER ASSEMBLY

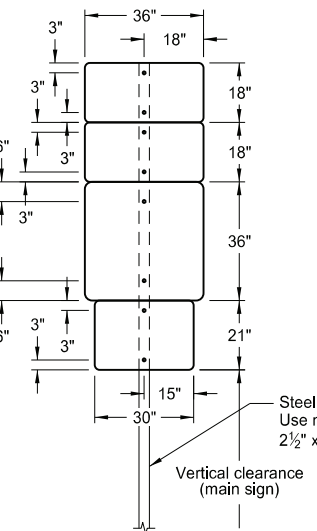


36" x 36" ROUTE MARKER ASSEMBLY




18" x 18" DIAMOND SIGN

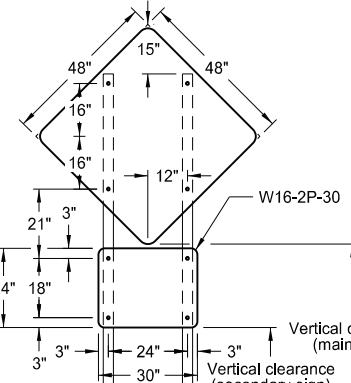


48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)

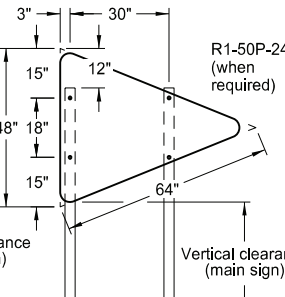


W14-3-64 - PENNANT SIGN

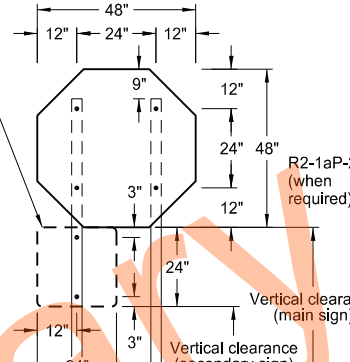


R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)

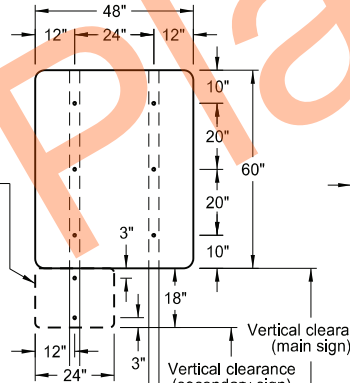


48" x 48" SIGN
(with R6-1-54 sign as required)




30" x 24" SIGN

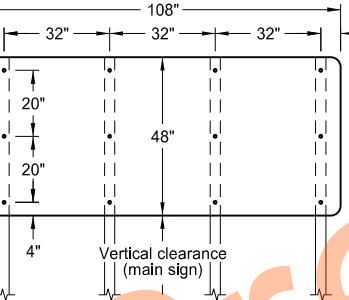


108" x 48" SIGN




96" x 48" SIGN

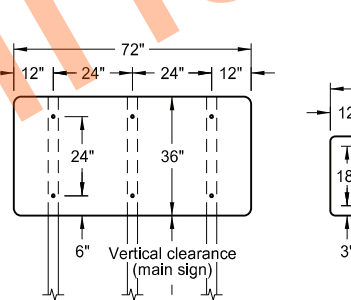


72" x 36" SIGN

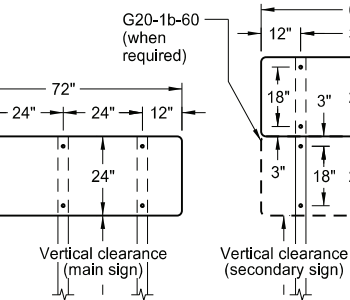


72" x 24" SIGN

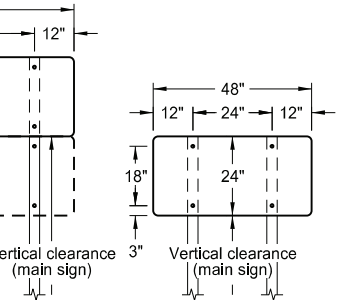


60" x 24" SIGN

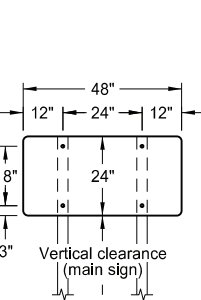

48" x 24" SIGN

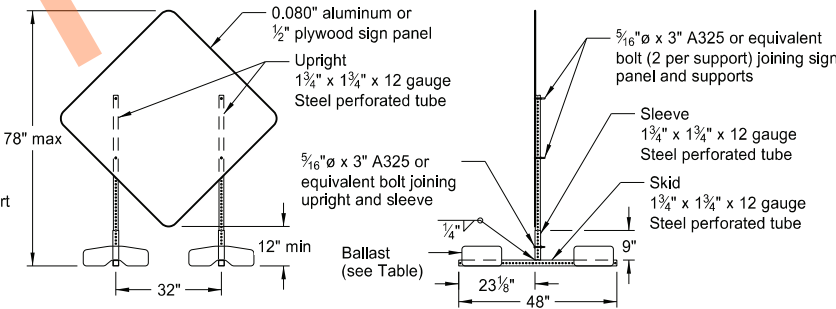

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

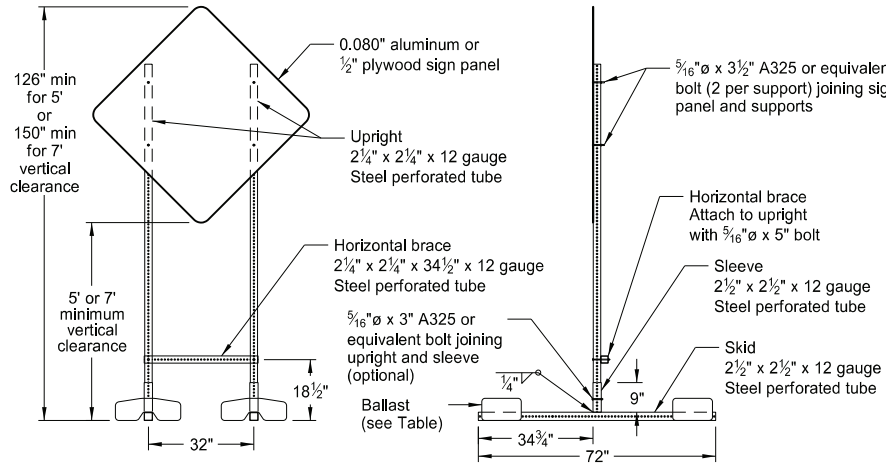

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

Place signs over 50 square feet on 2 1/2" x 2 1/2" perforated tube supports as a minimum.

Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.
2. Sign Panels: Provide sign panels made of 0.100" aluminum, 1/2" plywood, or other approved material, except where noted. Punch all holes round for 3/8" bolts.
3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)
4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail
8-01-24	Electronic Stamp/Signature



08/01/24

TERMINAL AND SEAL COAT SIGN LAYOUTS

D-704-20

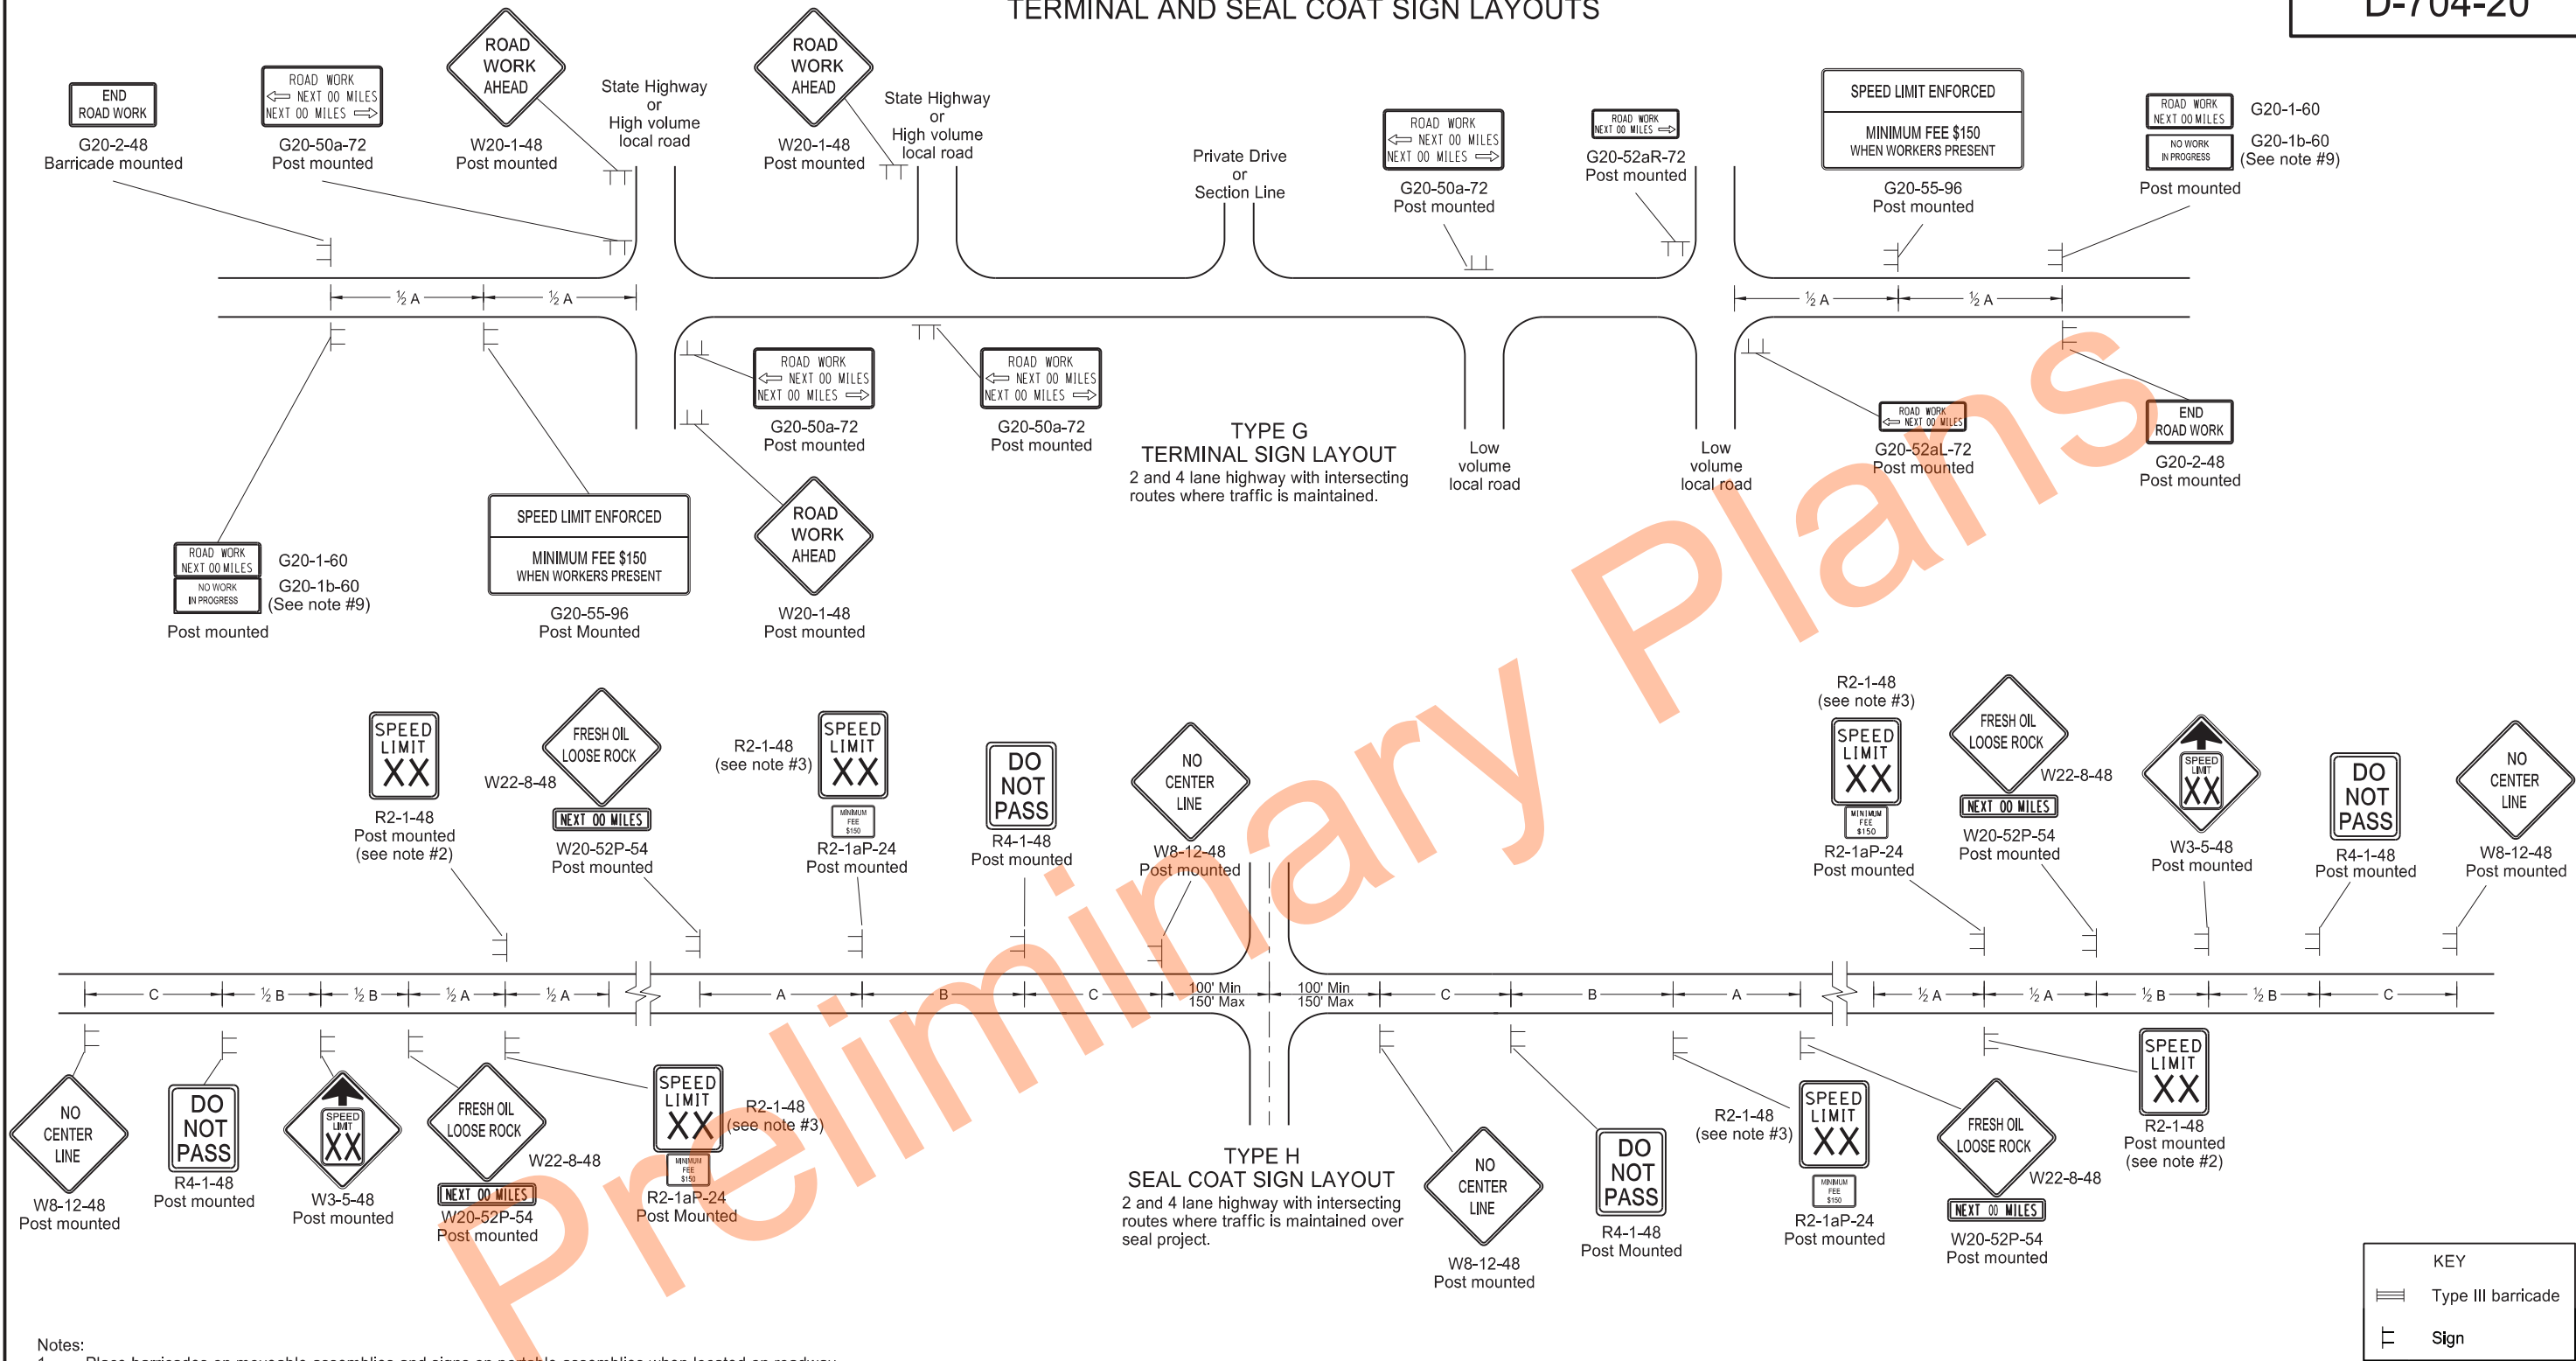

Notes:

- Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
- Determine the exact speed limit in the field, based on location and conditions.
- Determine the reduced speed limit based on the in place speed limit before construction. Where speed limit reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at $\frac{1}{2}$ B.
- Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
- Cover existing speed limit signs within a reduced speed zone.
- On seal coat projects, place signs R2-1-48, R2-1aP-24, R4-1-48, W22-8-48 and W20-52P-54 after all important intersections and at five mile intervals. Place sign W8-12-48 after all important intersections and at 2 mile intervals until short term center line pavement marking is placed.
- As an option, use portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Drawing D-704-14.
- Cover or remove speed limit signs from layout Type H when loose aggregate is removed.
- Install sign G20-1b-60 when work is suspended for winter.
- Use other traffic control layouts in immediate work areas. Place sign R2-1aP-24 below speed limit signs in reduced speed limit work areas.
- Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
- Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.


ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs		
	Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Updated notes & sign numbers
11-01-19	Updated note & sign
12-08-21	Switched order of Road Work and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes



CONSTRUCTION TRUCK AND TEMPORARY DETOUR LAYOUTS

D-704-22

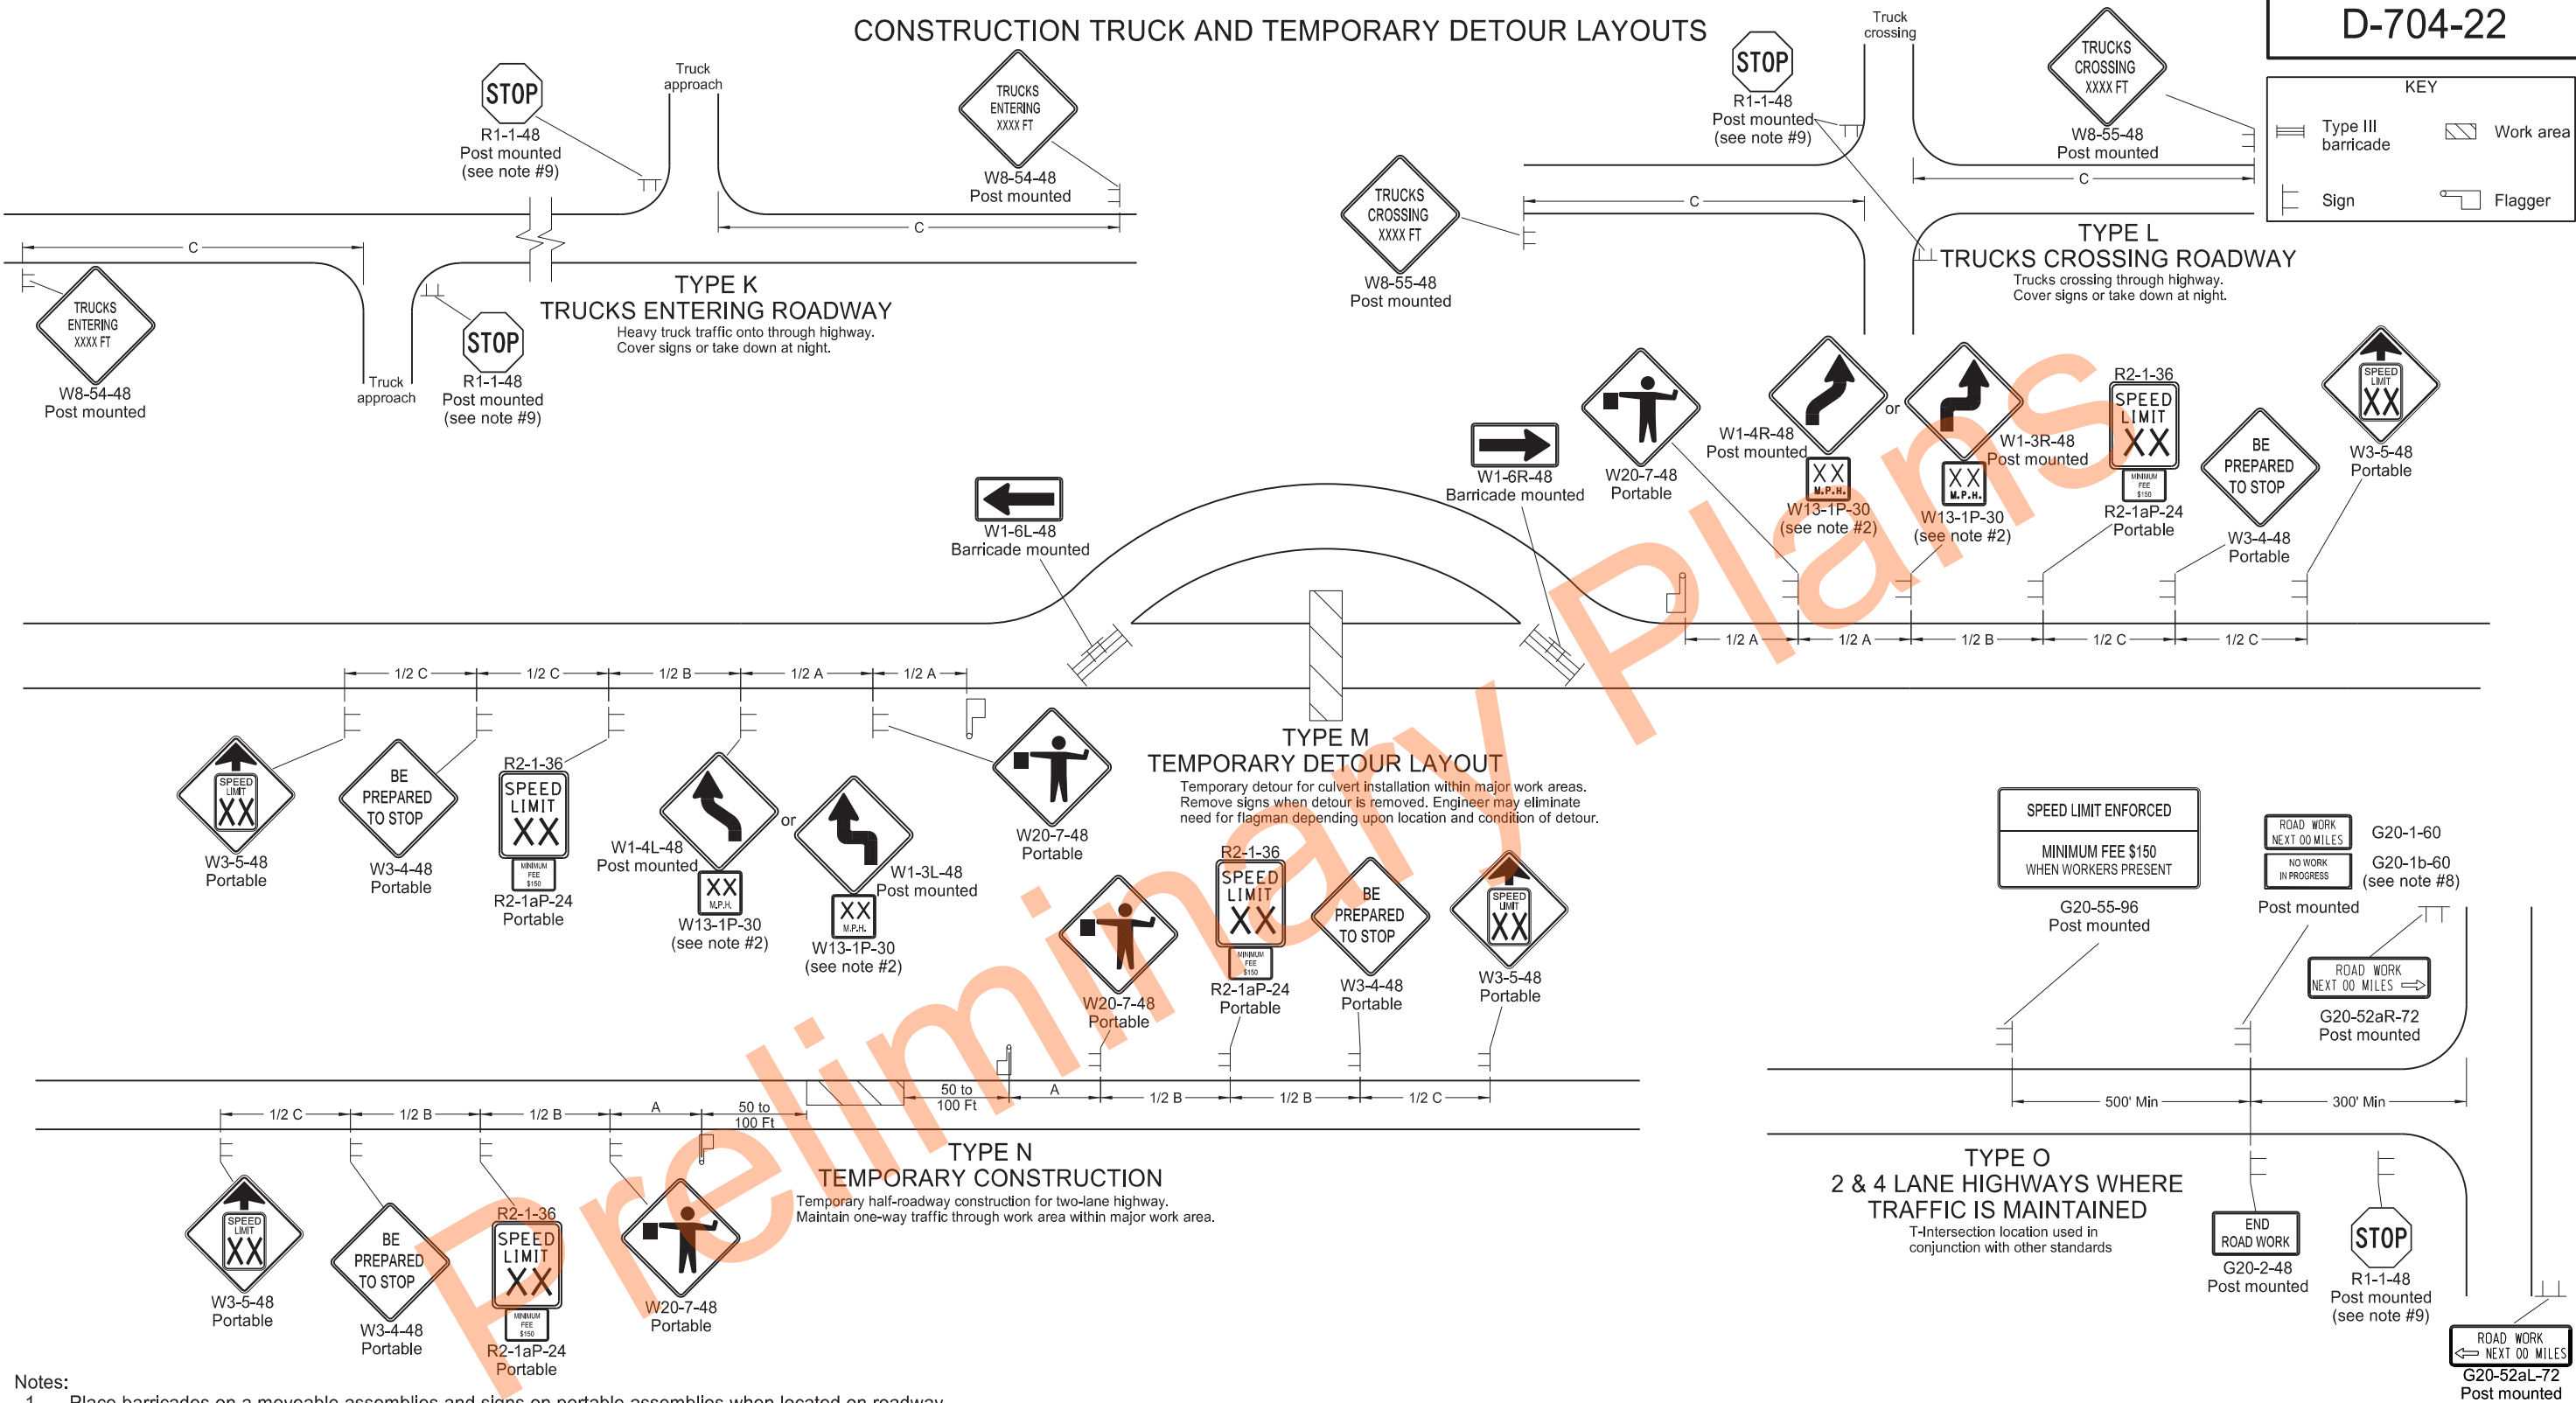

Notes:

- Place barricades on a moveable assemblies and signs on portable assemblies when located on roadway.
- Where necessary, safe speed to be determined by the Engineer.
- Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
- Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
- Cover existing speed limit signs within a reduced speed zone.
- Covered (when approved by engineer) or obliterated pavement marking measured as Obliteration of Pavement Marking.
- As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
- Install sign G20-1b-60 when work is suspended for winter.
- If existing stop sign is in place, a 48" stop sign is not required.
- Sign G20-55-96 is not required if layout is part of other traffic control that contains this sign, or if work is less than 15 days.
- Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.


ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Update notes & sign numbers
11-01-19	Revised sign numbers & note 7
12-09-21	Added Speed Limit Enforced and Dollars At Work signs
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes





MISCELLANEOUS SIGN LAYOUTS


D-704-26

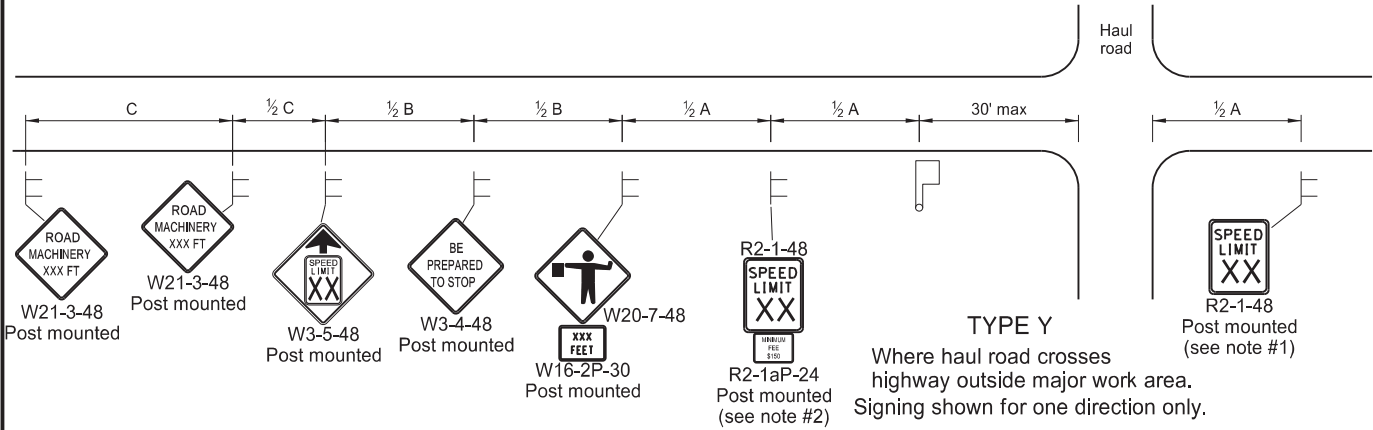


TYPE Z
Where speed zone is needed
Signing shown for one direction only.

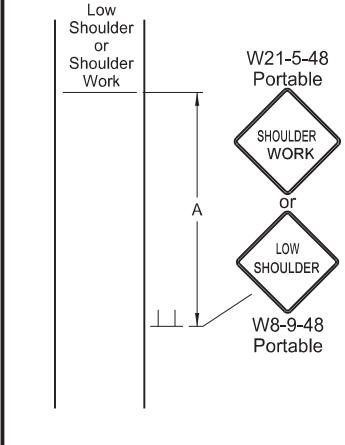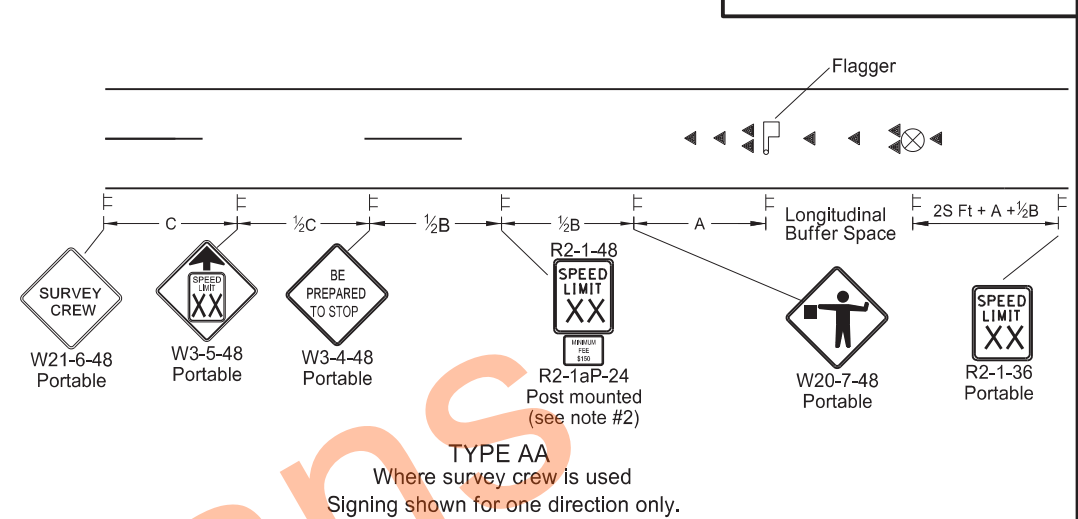


TYPE BB
Within major work area
where sign conditions exist

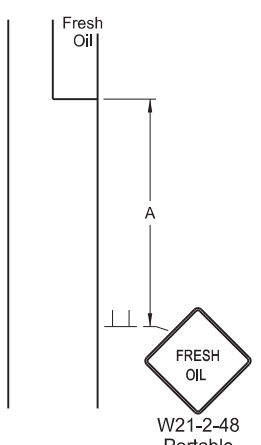


TYPE CC
Where sign conditions exist

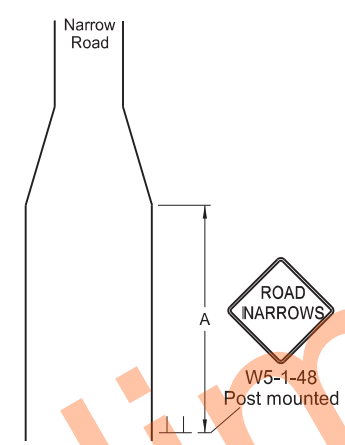


TYPE DD
Where sign conditions exist




TYPE EE
Where sign conditions exist

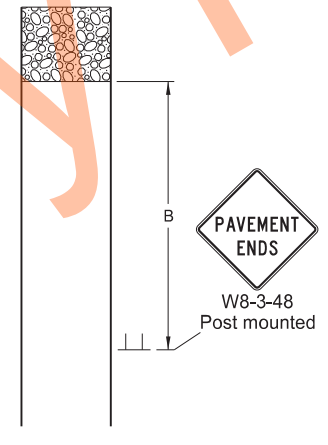


TYPE FF
Where sign conditions exist
Signing shown for one direction only.

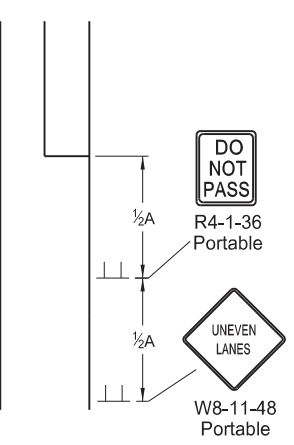

TYPE GG
Where elevation difference
exists between lanes

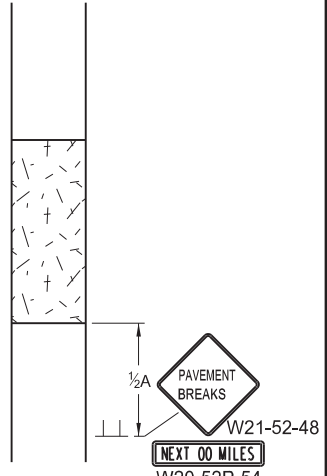

TYPE JJ
For break in pavement.
Install signs when conditions exist
and remove when not applicable.
Signing shown for one direction only.

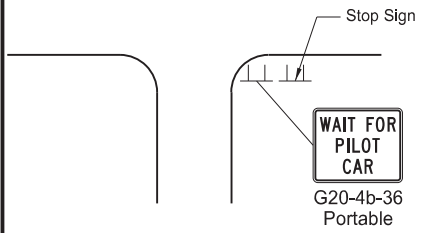

TYPE KK
At major intersections
within pilot car control area

- Notes
1. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
 2. Determine reduced speed limit based on in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
 3. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
 4. Cover existing speed limit signs within reduced speed zones.
 5. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
 6. Sign G20-55-96 is not required if this standard is part of other traffic control layouts, or work is less than 15 days.
 7. When pilot car operation is used, place sign G20-4b-36 "Wait For Pilot Car" at major intersections within pilot car control area.
 8. Recommend 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.
 9. Layouts shown for one direction only.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820
80	910

* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

KEY

Flagger

Sign

Cones

Survey Equipment



S = Numerical value of speed limit or 85th percentile.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added speed limit signs. Updated notes & sign numbers
11-01-19	Revised note 5 & sign numbers
02-23-23	Revised distance & removed signs
06-30-25	Legislative Changes




MOBILE OPERATION
(PAVEMENT MARKING)



D-704-27

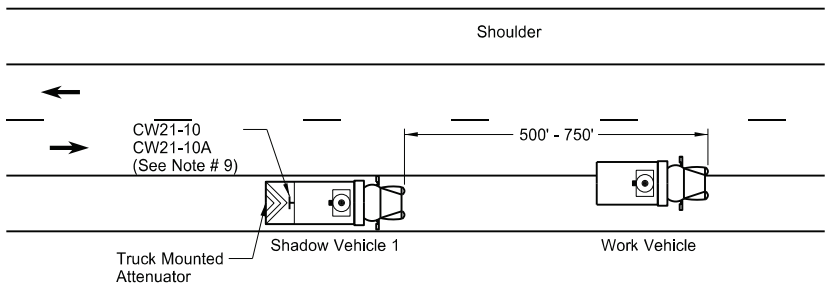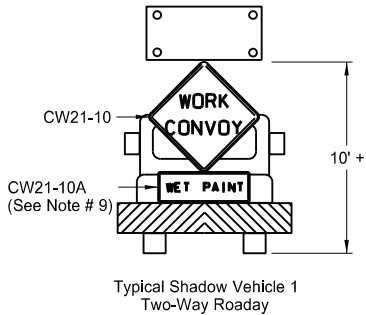




Two-Way Roadway with Paved Shoulders

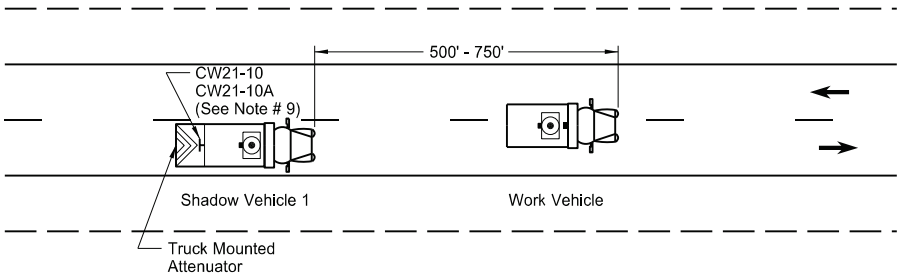

Two-Way Roadway without Paved Shoulders

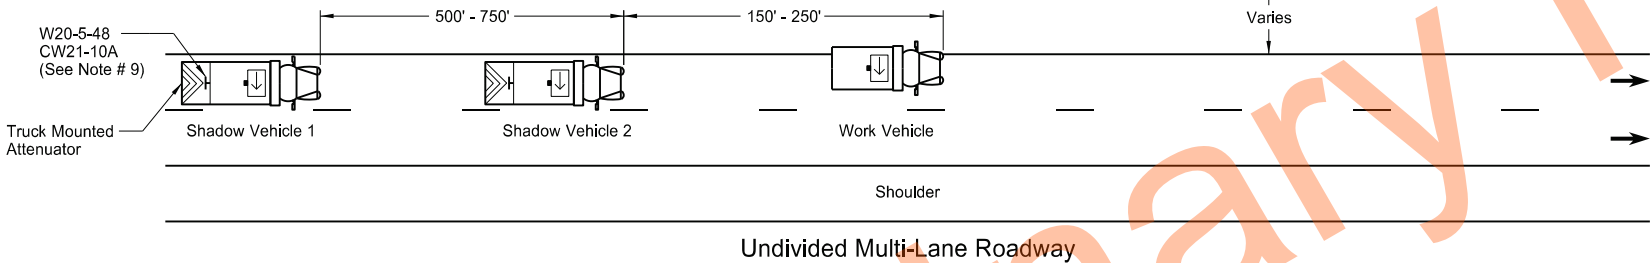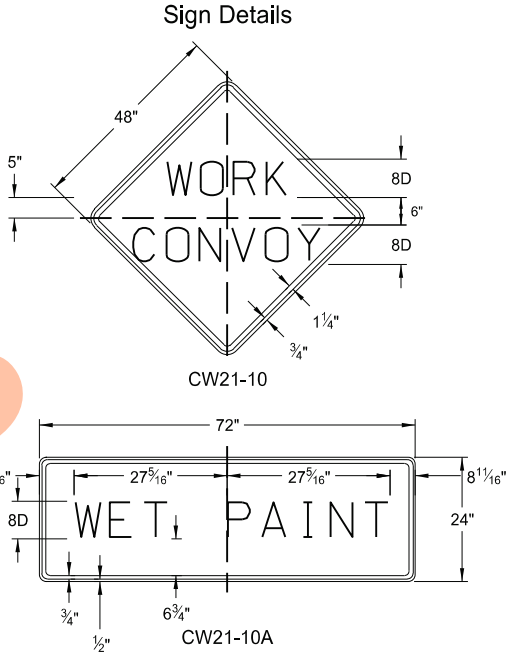

- Notes
1. Use additional vehicles you choose to be in the convoy with truck mounted attenuators, at your own expense.
 2. Display yellow rotating beacons or strobe lights on shadow and work vehicles, unless otherwise stated in the plans.
 3. Use Type B or Type C flashing arrow panels controlled from inside the vehicle.
 4. Provide each vehicle with two-way electronic communication capability.
 5. Move shadow vehicle 1 first to shadow other convoy vehicles when convoy changes lane.
 6. Vary vehicle spacing between shadow vehicle 1 and shadow vehicle 2 based on sight distance restrictions. Motorists approaching the work convoy need to see trail vehicle in time to slow down and/or change lanes as they approach shadow vehicle.
 7. Sign Colors
Letters = Black
Border = Black
Background = Orange
 8. As an option, use shadow vehicle 2 the paint tender vehicle.
 9. Use sign CW21-10A only during painting operation.
 10. Pull over work and shadow vehicles periodically to allow motor vehicle traffic to pass on two lane - two way roadways.

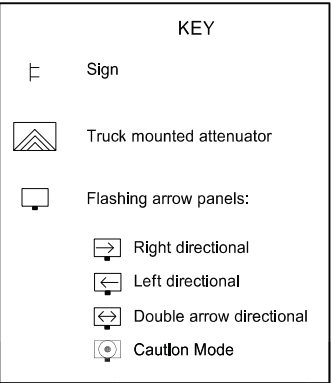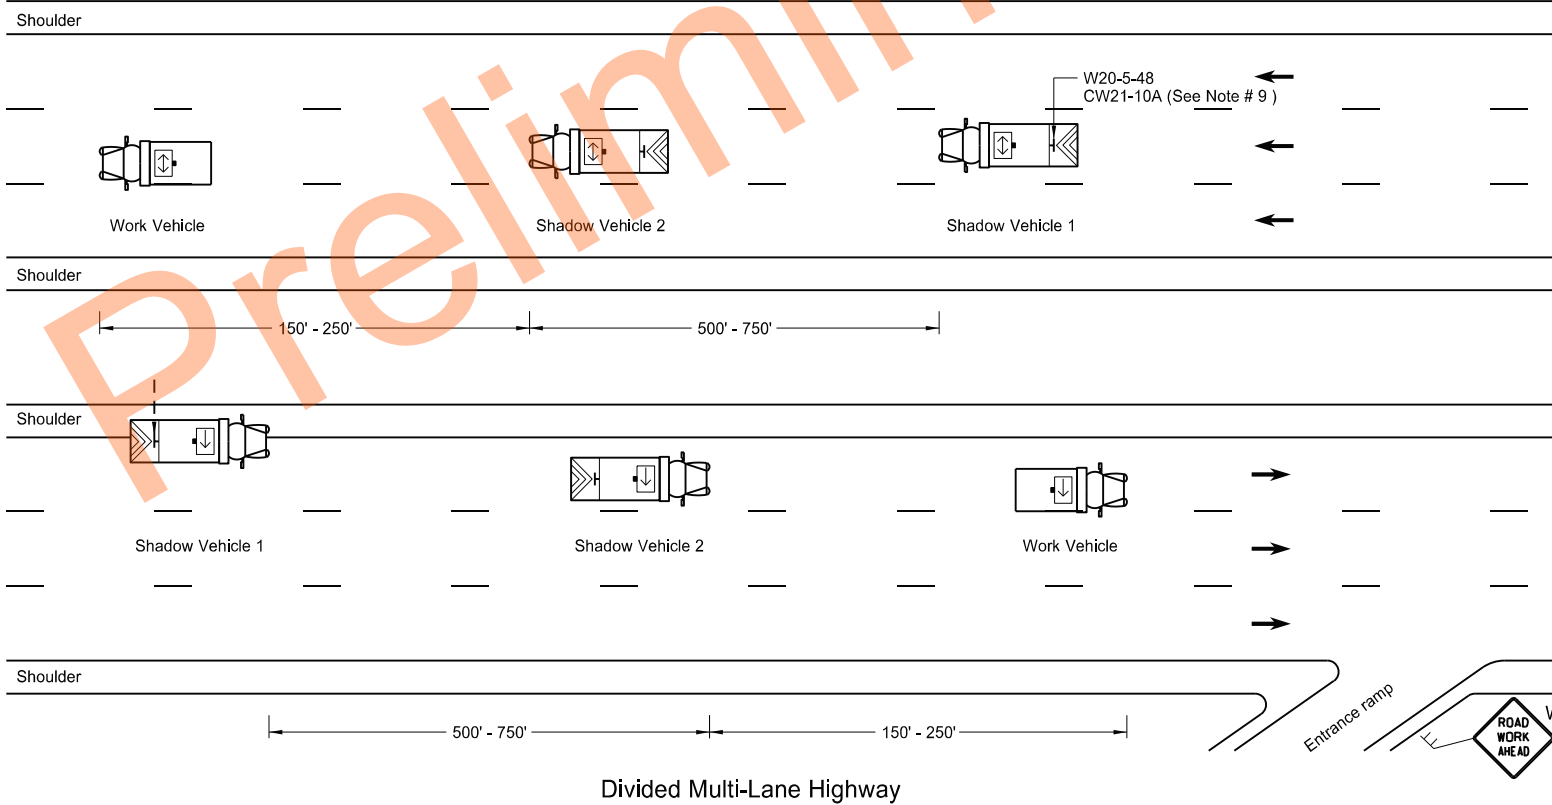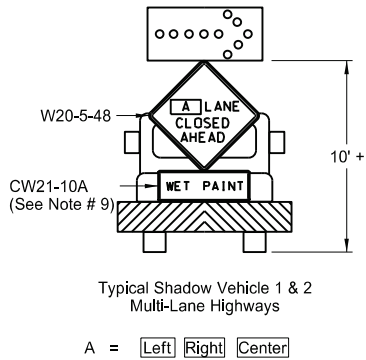

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
6-18-14	Removed shadow vehicle 2 on two lane roadways
9-27-17	Updated to active voice
11-08-19	Changed Standard Heading
6-02-24	Electronic Stamp/Signature.



08/02/24

KEY	
	Type I barricade
	Type II barricade
	Type III barricade
	Sign
	Delineator drum
	Work area
	Flagger
	Sequencing arrow panel
	Tubular markers

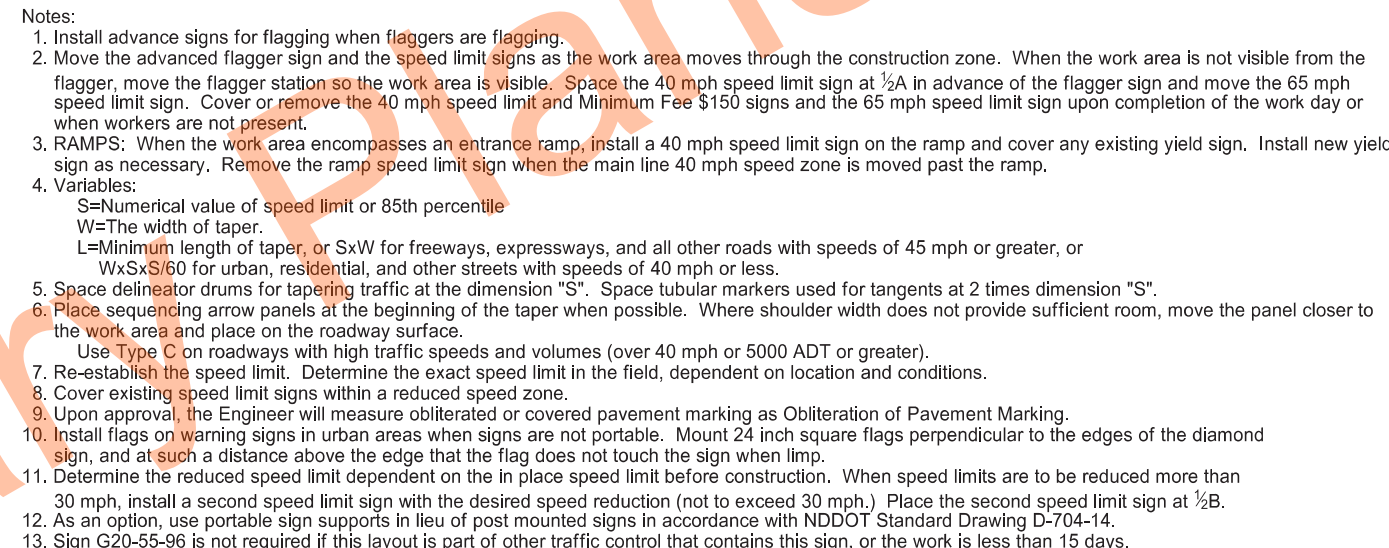


Diagram illustrating the sequence of signs and their placement for a two-lane highway construction zone, showing the progression from the start of the work area to the end of the daily construction area.

Signs and their placement:

- W20-1-48** (Post mounted): ROAD WORK AHEAD
- G20-55-96** (Post mounted): SPEED LIMIT ENFORCED (MINIMUM FEE \$150 WHEN WORKERS PRESENT)
- W20-5-48** (Post mounted): RIGHT LANE CLOSED XX MILE
- W3-5-48** (Post mounted): SPEED LIMIT 65
- R2-1-48** (See note #11): SPEED LIMIT 65
- R2-1aP-24** (Post mounted): SPEED LIMIT 65 (MINIMUM FEE \$150)
- W4-2R-48** (Post mounted): Sequencing arrow panel Type C
- R2-1-36** (See note #2): SPEED LIMIT 40 (MINIMUM FEE \$150)
- R2-1aP-24** (Portable): SPEED LIMIT 40 (MINIMUM FEE \$150)
- W20-7-48** (See note #2) (Portable): Worker ahead sign
- R2-1-48** (See note #7) (Post mounted): SPEED LIMIT 80 (MINIMUM FEE \$150)
- G20-2-48** (Post mounted): END ROAD WORK


Dimensions and Layout:

- Shoulder Taper:** Indicated by a series of dots.
- Work area length varies:** The length of the work area is variable.
- Entrance Ramp:** Indicated by a dashed line.
- Exit Ramp:** Indicated by a dashed line.
- End of daily construction area:** Indicated by a dashed line.
- 1000' max:** Maximum distance between signs.
- 100':** Distance between the end of the daily construction area and the end of the work area.
- 1/2 A:** Distance between the end of the daily construction area and the end of the work area.
- 1/2 B:** Distance between the end of the daily construction area and the end of the work area.
- 1/2 C:** Distance between the end of the daily construction area and the end of the work area.
- L:** Length of the work area.
- 1000':** Distance between the end of the daily construction area and the end of the work area.

Notes:

- As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
- Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.


RIGHT LANE CLOSED
WORKERS IN WORK AREA

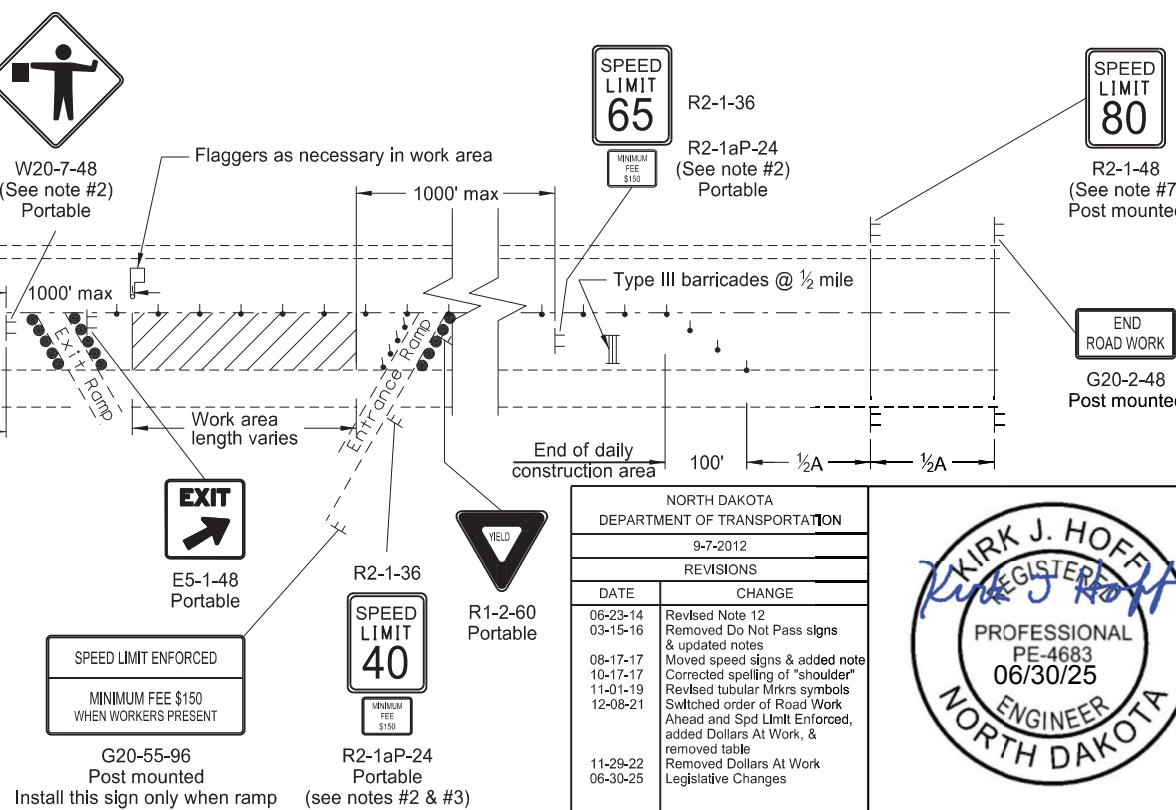

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-7-2012	
REVISIONS	
DATE	CHANGE
06-23-14	Revised Note 12
03-15-16	Removed Do Not Pass signs & updated notes
08-17-17	Moved speed signs & added n
10-17-17	Corrected spelling of "shoulder
11-01-19	Revised tubular Mkrs symbols
12-08-21	Switched order of Road Work Ahead and Spd Limit Enforced
	added Dollars At Work, & removed table
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes




D-704-50




KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12.02.2020

MOBILE OPERATION
Grinding Shoulder Rumble Strips

D-704-56

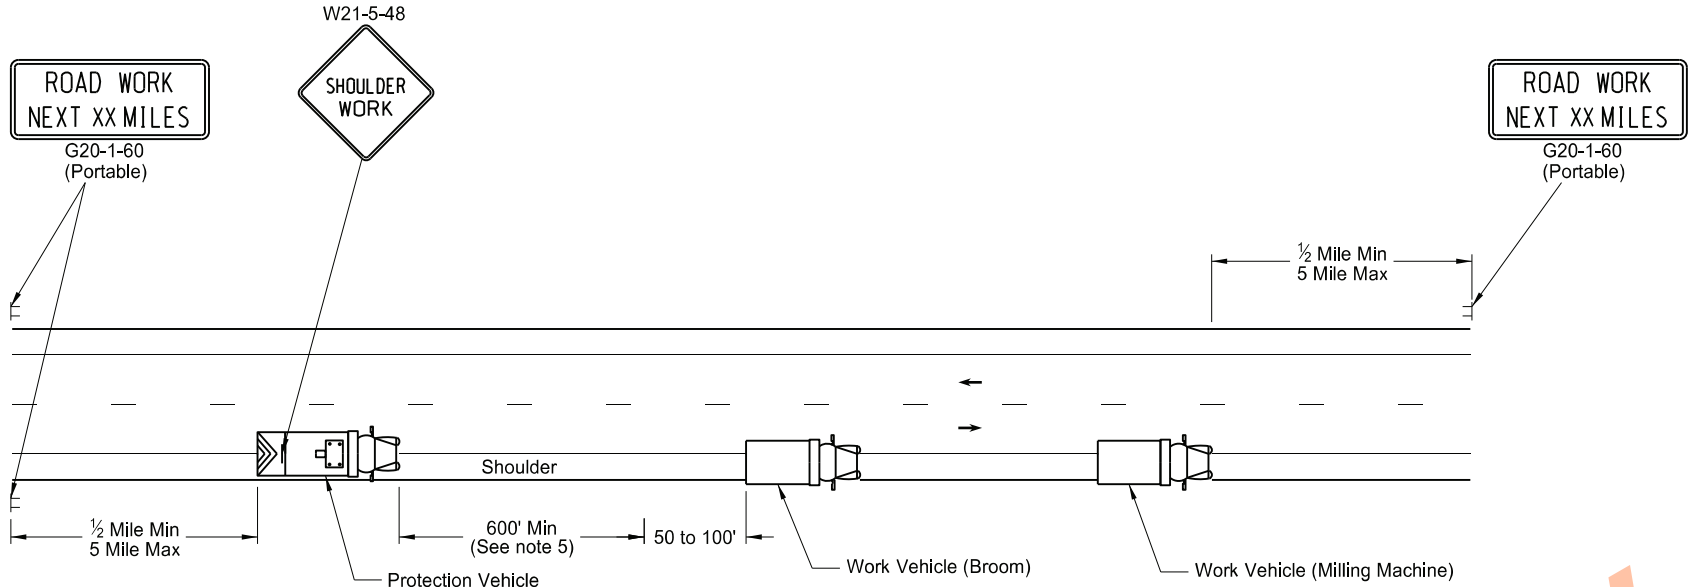


TWO LANE - TWO WAY ROADWAY

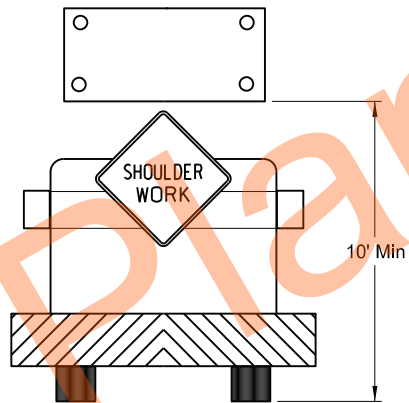


TWO LANE - TWO WAY ROADWAY

Typical Protection Vehicle with
Flashing Arrow Panel In Caution Mode

- Notes:
1. Provide truck mounted attenuators on additional vehicles in the convoy, at no additional cost.
 2. Provide rotating, flashing, oscillating, or strobe lights on vehicles.
 3. Provide Type B or Type C flashing arrow panels that are controlled from inside the vehicle.
 4. Provide two - way electronic communication capability in each vehicle.
 5. Vary vehicle spacing between the protection vehicle and work vehicle depending on sight distance restrictions. Keep the spacing of the convoy vehicles such that motorists approaching the work convoy can see the protection vehicle in time to slow down and safely pass the work vehicles.
 6. Move advance Road Work Ahead signs as the work area moves through the construction zone.

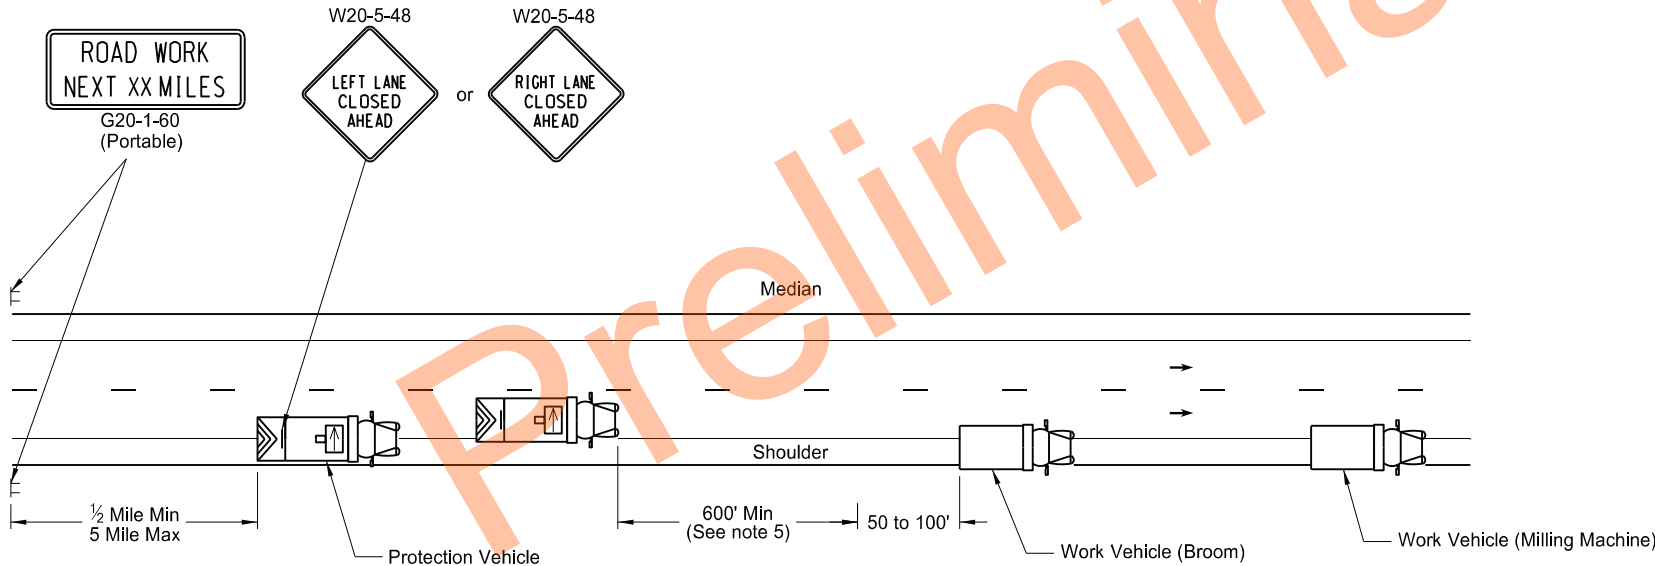


INTERSTATE & 4 LANE DIVIDED HIGHWAY

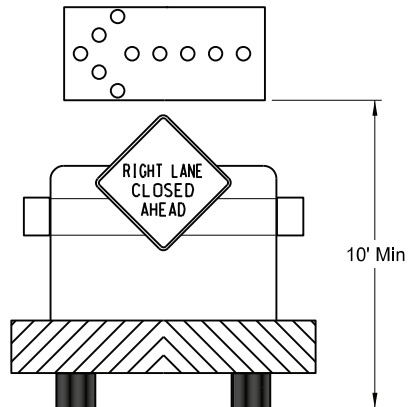

INTERSTATE & 4 LANE DIVIDED HIGHWAY

Typical Protection Vehicle with Flashing Arrow
Panel In Flashing Arrow Mode

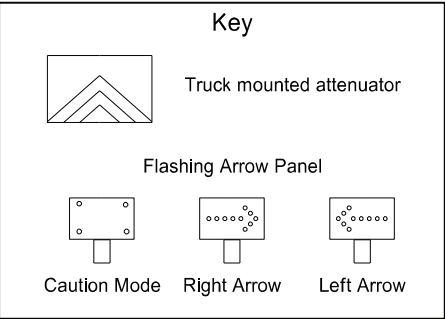

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-15-12	
REVISIONS	
DATE	CHANGE
8-17-17	Updated notes & signs
10-03-19	New Design Engineer PE Stamp
8-02-24	Electronic Stamp/Signature




RUMBLE STRIPS
INTERSTATE HIGHWAYS



D-760-1

NOTES:


- 1) Discontinue rumble strips through ramps and tapers.

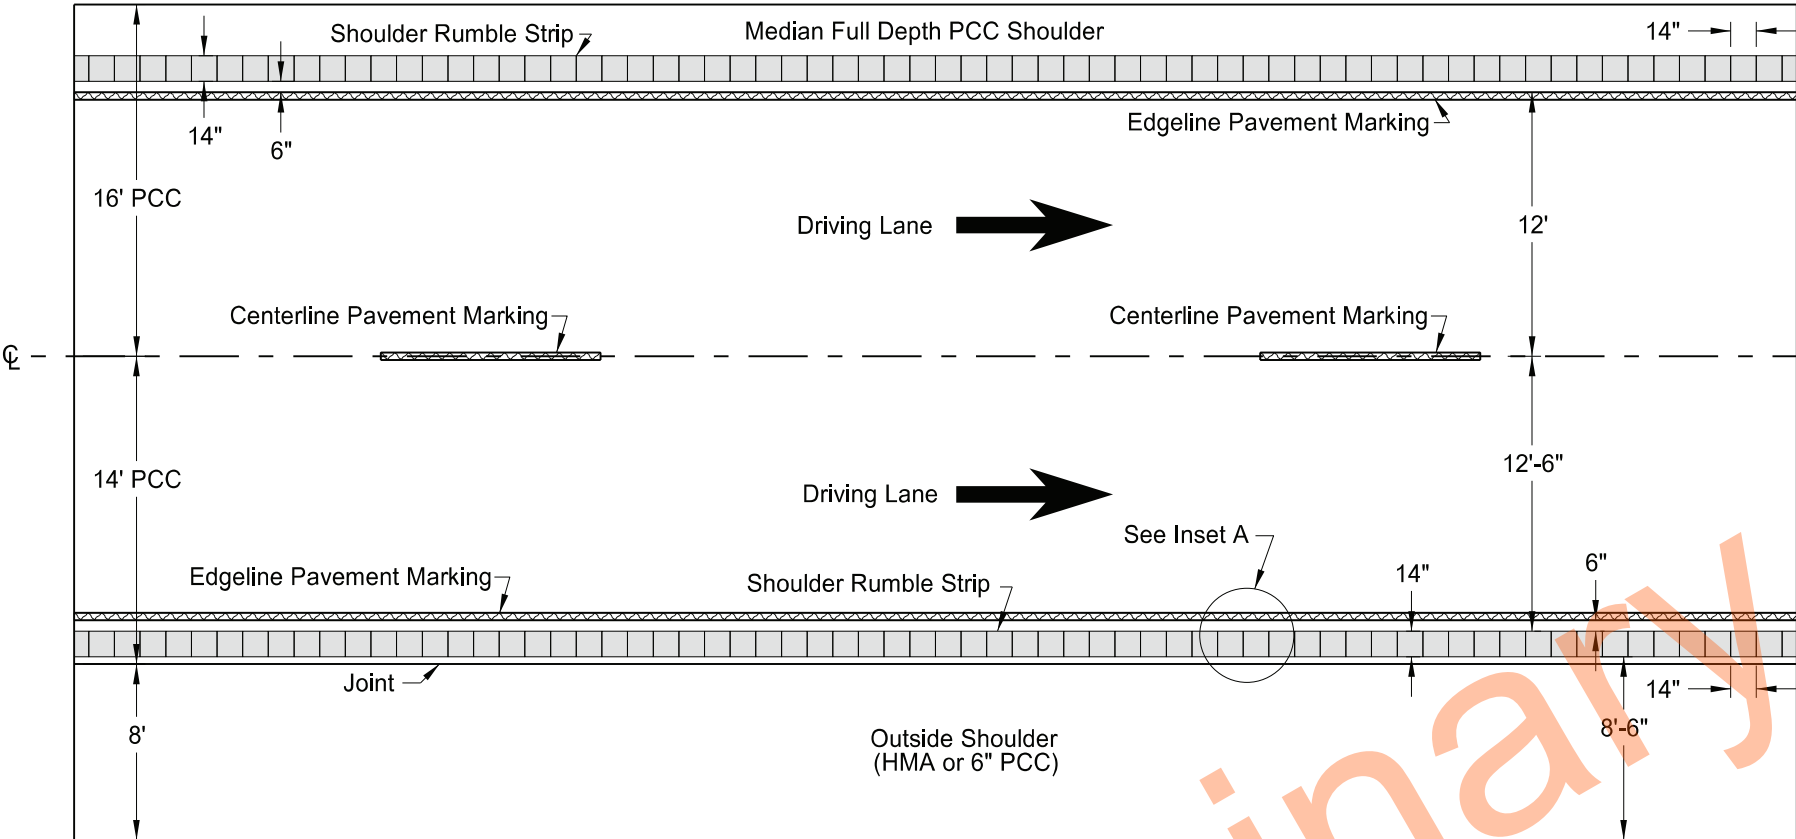


30' Wide Full Depth PCC with 8' Wide HMA Outside Shoulder

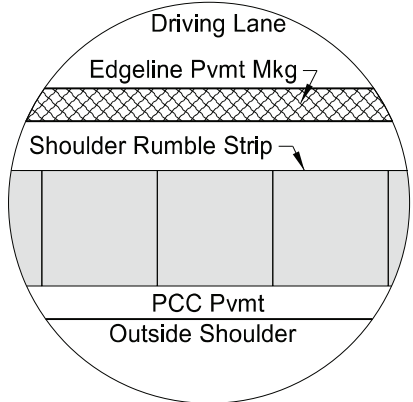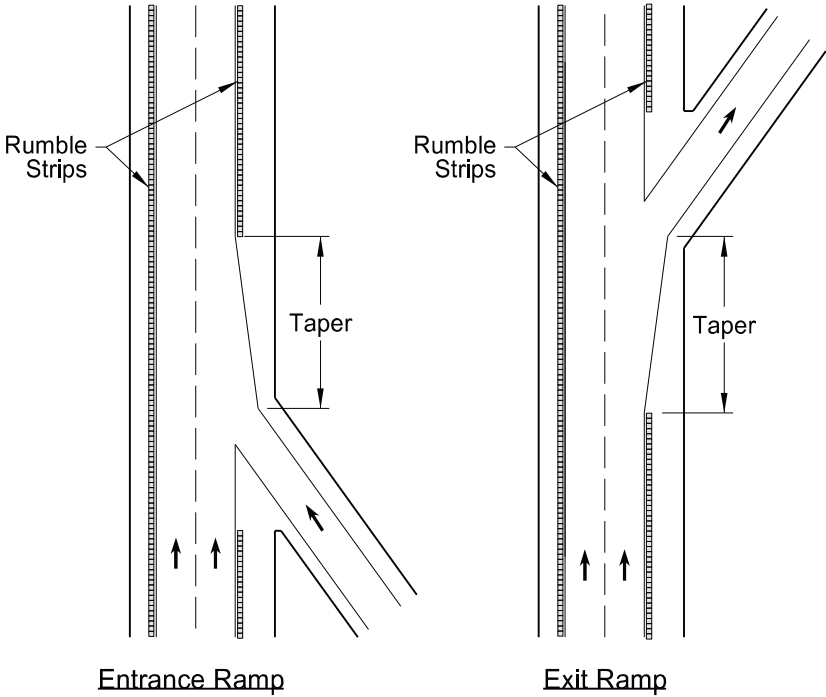

Inset A - Shoulder Rumble Strip
(Layout for opposite shoulder reversed)

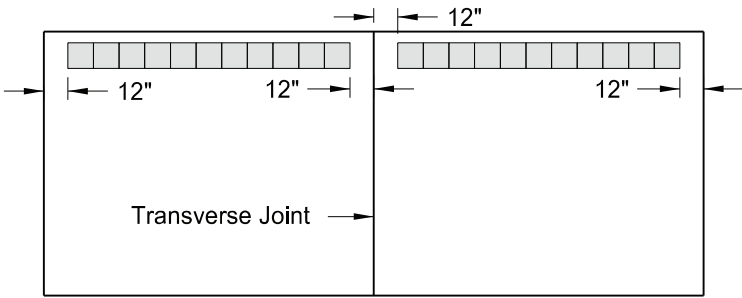

Discontinue rumble strip approx. 12" on both sides of PCC transverse joint

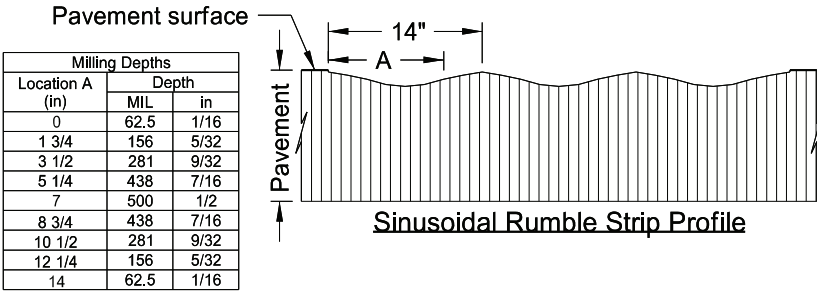


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-29-09	
REVISIONS	
DATE	CHANGE
2-25-10	Note 4 was added.
9-08-11	Revised Notes and D-760-1.
8-30-18	Revised drawings for clarity.
10-25-19	Added missing dimensions.
11-16-21	Added rumble strips to end of taper.
5-26-23	Rumble strips made sinusoidal.



05/26/23

INTERSTATE PAVEMENT MARKING
4 LANE DIVIDED HIGHWAY

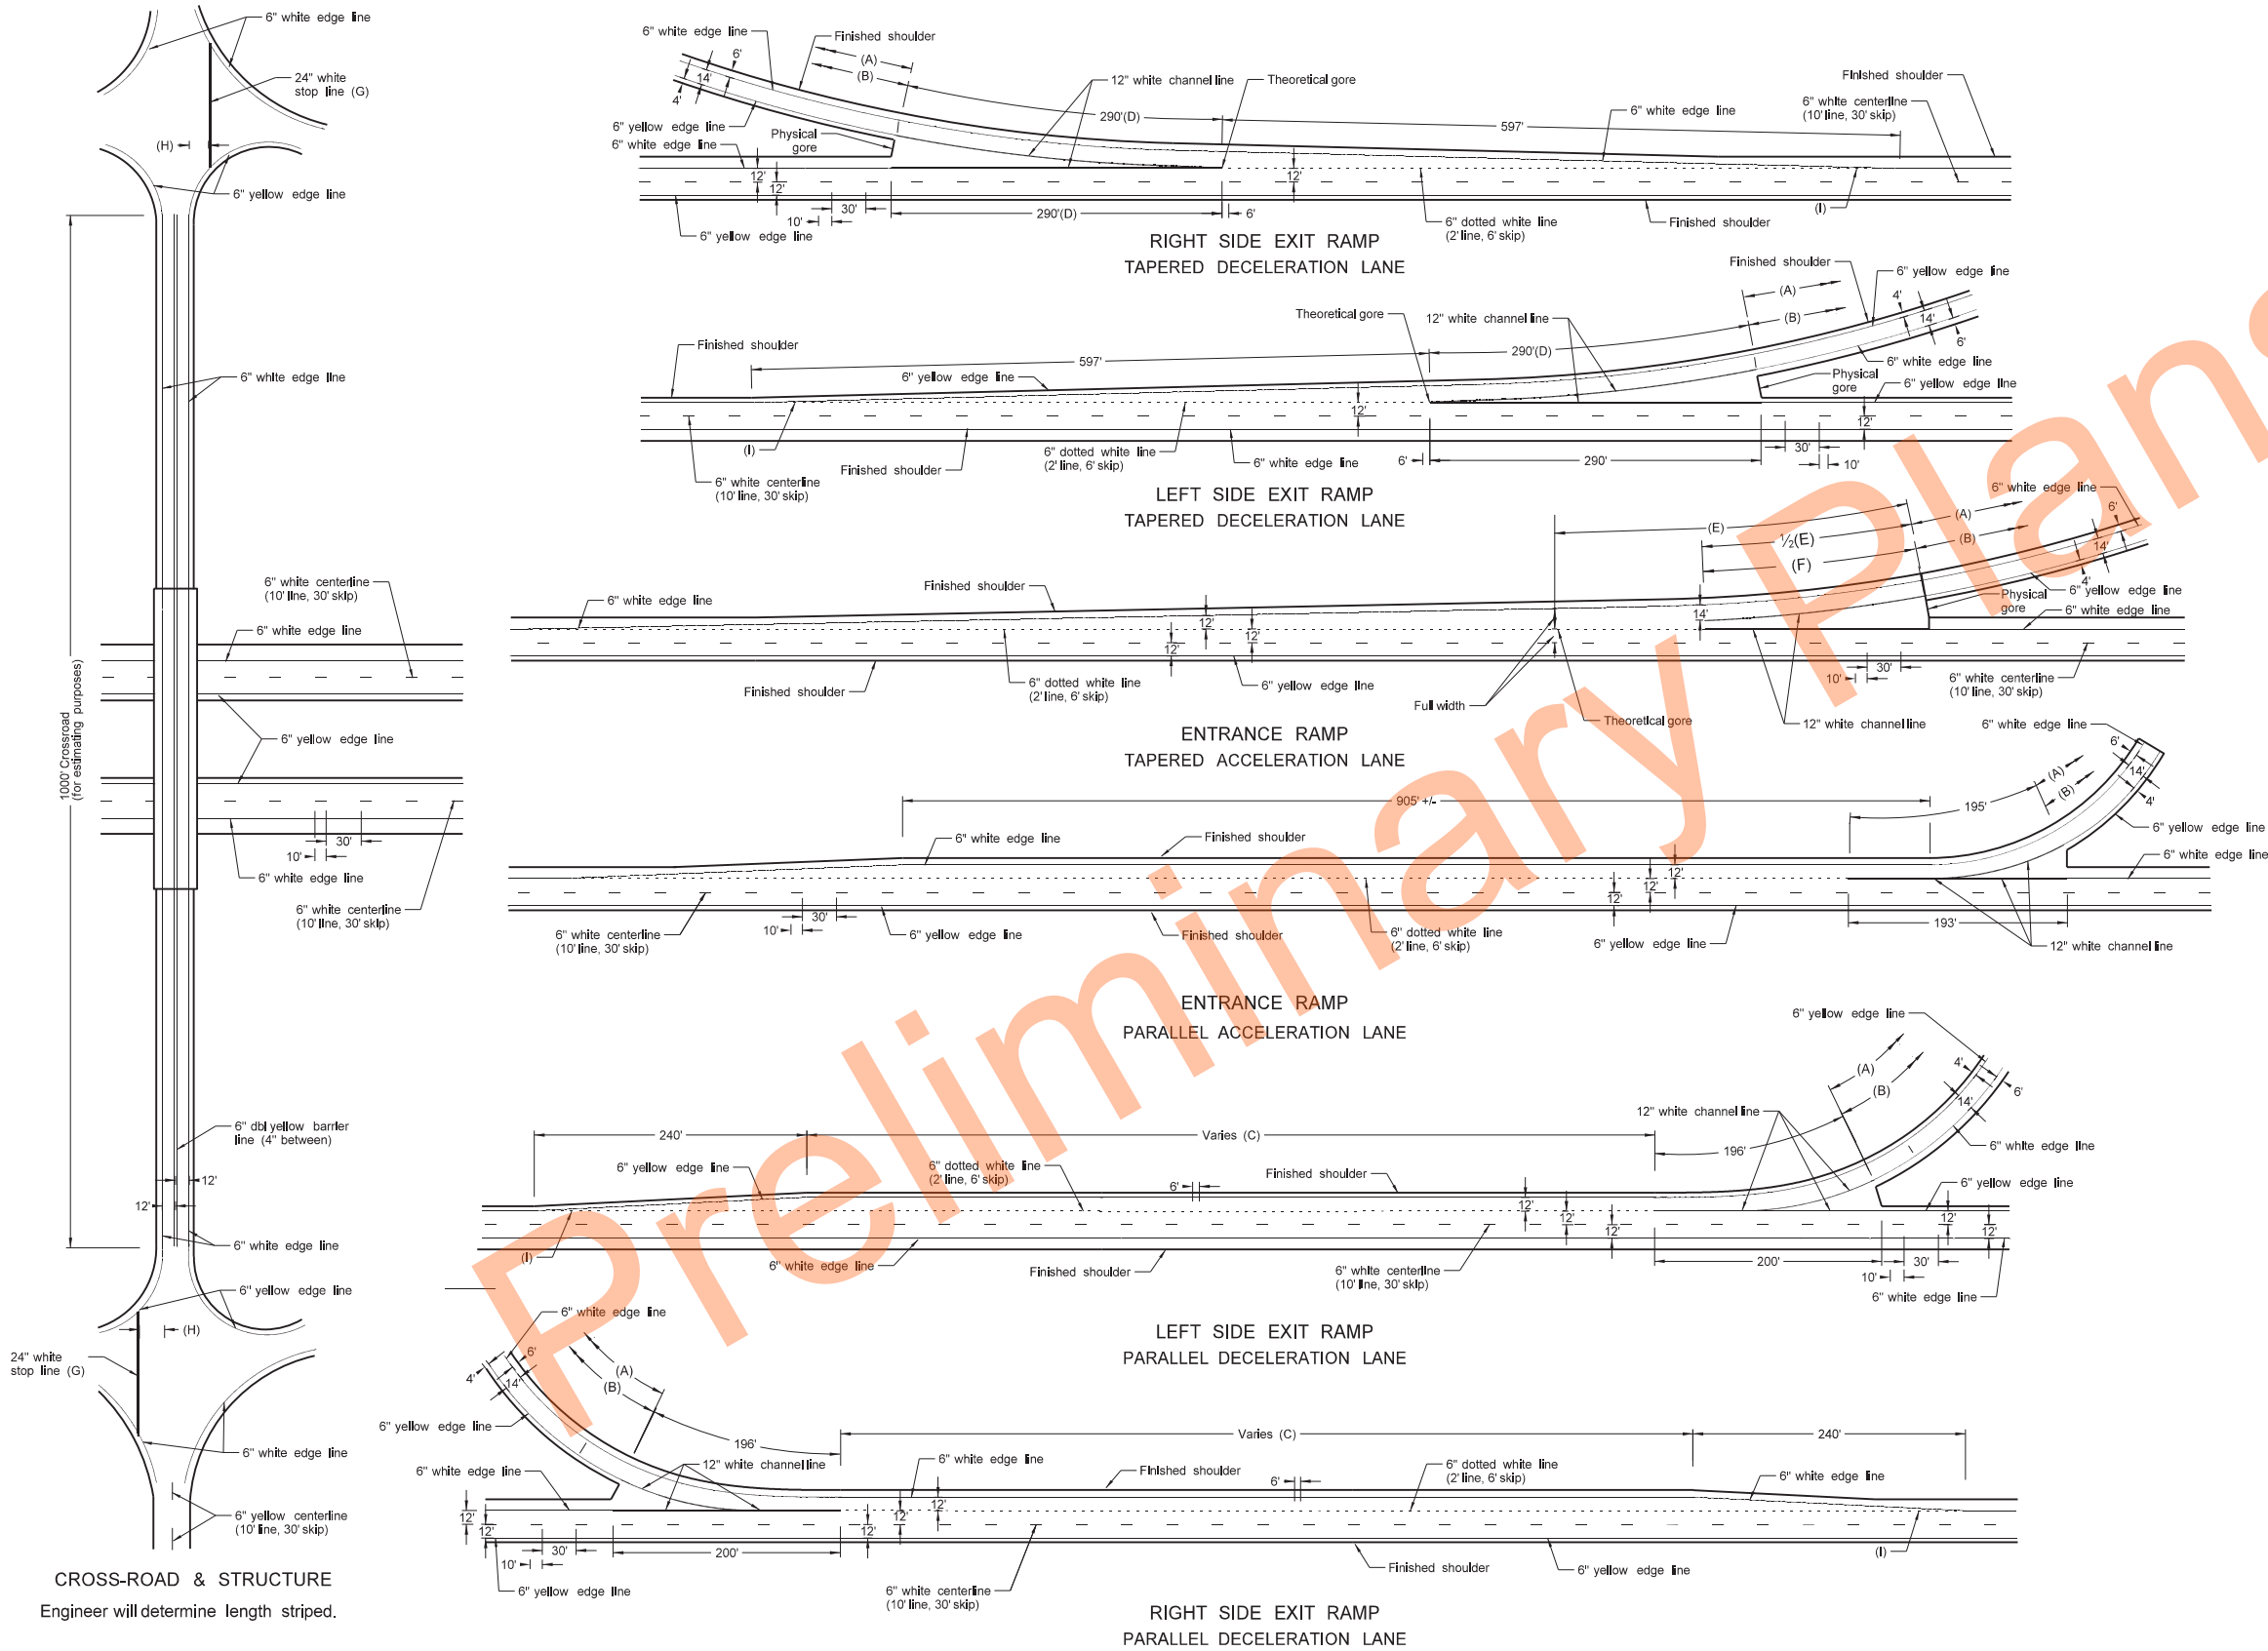

- NOTE:
- (A) Normal width white edge line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
 - (B) Normal width yellow edge line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
 - (C) Assume "varies" equals 790' for purpose of estimate. Place pavement marking from beginning of taper to the 12" line.
 - (D) Beginning of physical gore to theoretical gore.
 - (E) If the distance is less than 350' extend the 12" channel line to the theoretical gore, otherwise use 195'.
 - (F) Use 195' for estimating purposes.
 - (G) Not required for gravel surface crossroad approaches.
 - (H) 4' minimum, 15' maximum from nearest edge of intersection traveled way.
 - (I) Extend dotted line until it touches the edgeline.


BASIS OF ESTIMATE		
LOCATION	ITEM	
Right or Left Side Exit Ramp TAPERED	12" White channel line	580 LF
	24" White stop line	60 LF
	6" White dotted line	148 LF
	6" White edge line	1115 LF
	6" Yellow edge line	1075 LF
Entrance Ramp TAPERED	12" White channel line	390 LF
	6" White dotted line	258 LF
	6" White edge line	1270 LF
Right or Left Side Exit Ramp PARALLEL	6" Yellow edge line	1075 LF
	12" White channel line	398 LF
	24" White stop line	60 LF
	6" White dotted line (C)	258 LF
	6" White edge line	1115 LF
Entrance Ramp PARALLEL	6" Yellow edge line	1075 LF
	12" White channel line	388 LF
	6" White dotted line	283 LF
	6" White edge line	1275 LF
Main Line (Both Roadways)	6" White lane line, 10' line, 30' skip	2640 LF/MI
	6" White edge line	10,560 LF/MI
	6" Yellow edge line	10,560 LF/MI
Cross Road	6" White edge line	2000 LF
	6" Dbl yellow barrier line (4" between)	2000 LF

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-3-11	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice
10-25-19	Replaced 2' Max dim with Note (I)
11-05-21	Revised labels
11-22-23	Revised pvmt marking widths
1-17-24	Revised wide pvmt marking width




PAVEMENT MARKING


D-762-4

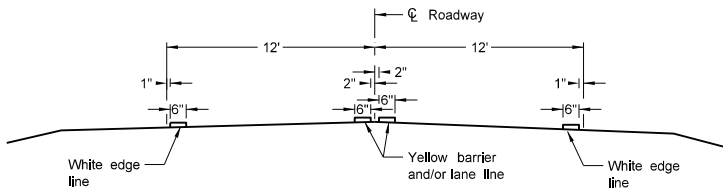


Two Lane Two Way
RURAL ROADWAY

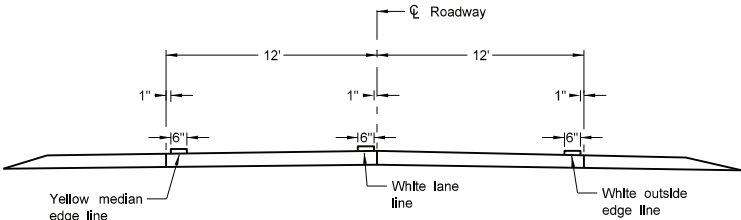


Two Lane Roadway
INTERSTATE HIGHWAY
Concrete Section

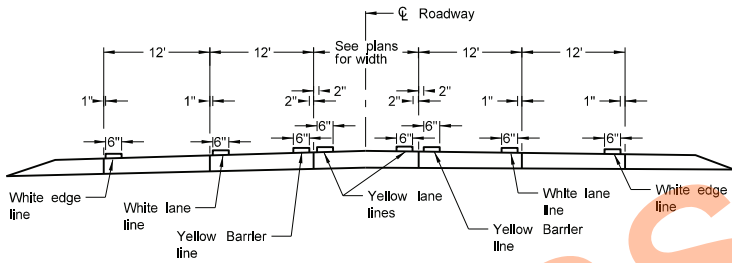


RURAL FIVE LANE ROADWAY
Concrete Section

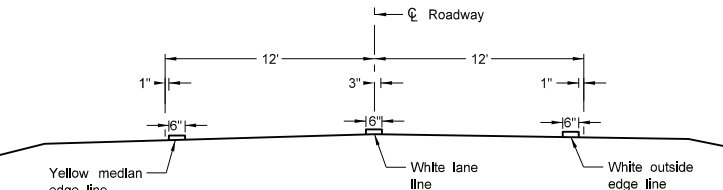


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Asphalt Section

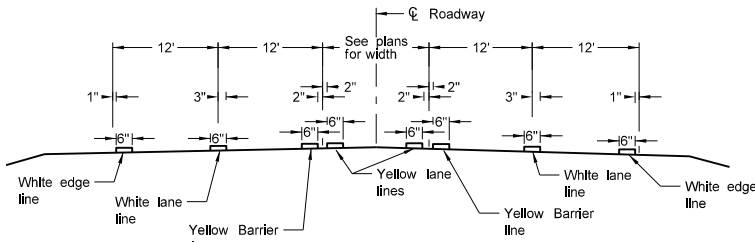


RURAL FIVE LANE ROADWAY
Asphalt Section

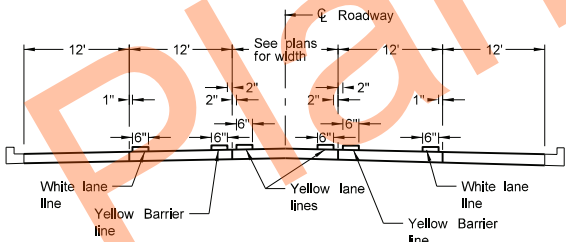


URBAN FIVE LANE SECTION
Concrete Section

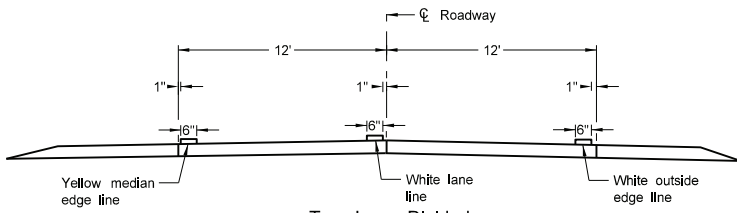


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Concrete Section

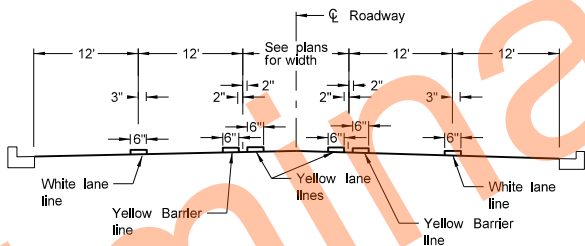


URBAN FIVE LANE SECTION
Asphalt Section

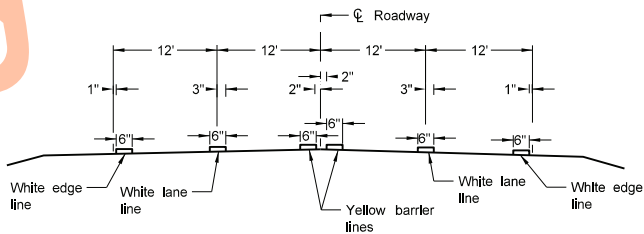


RURAL FOUR LANE ROADWAY
Asphalt Section

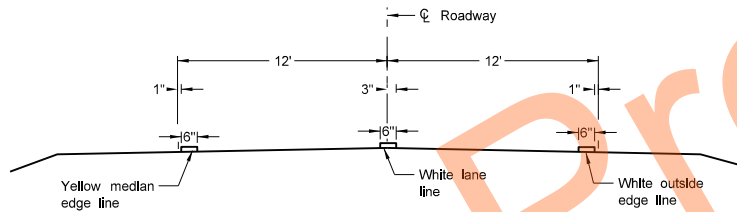


Two Lane Roadway
INTERSTATE HIGHWAY
Asphalt Section

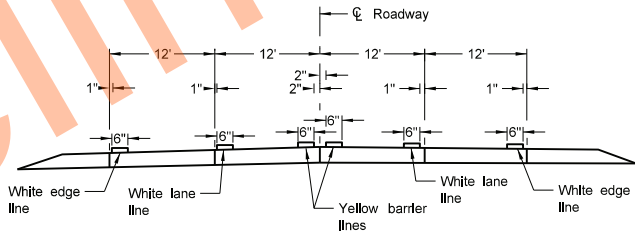


RURAL FOUR LANE ROADWAY
Concrete Section

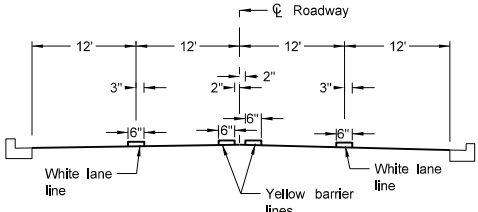

URBAN FOUR LANE SECTION
Asphalt Section

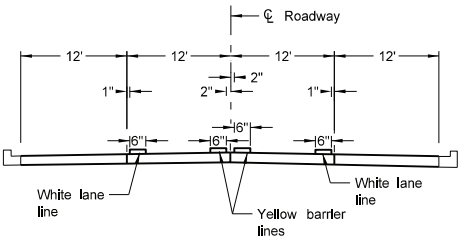

URBAN FOUR LANE SECTION
Concrete Section



CENTERLINE PAVEMENT MARKING SKIP SPACING DETAIL

NOTES:


1. Continue edge lines through private drives and field drives. Break edge lines for intersections.
For section lines, county roads, and street approaches, stripe the radii and edge lines of the paved surface within the right of way except where curb and gutter is present.
2. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
3. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits < 40 mph.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths.
07-09-24	Modified Note 1.




SHORT-TERM PAVEMENT MARKING


D-762-11

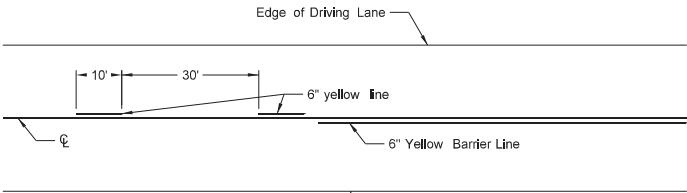


Painted or Tape Lines

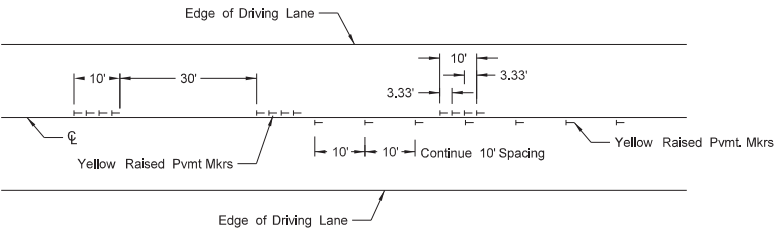


Raised Pavement Markers
TWO-LANE TWO-WAY ROADWAY

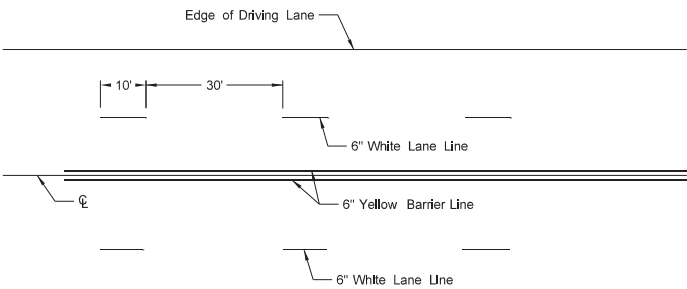


Painted or Tape Lines

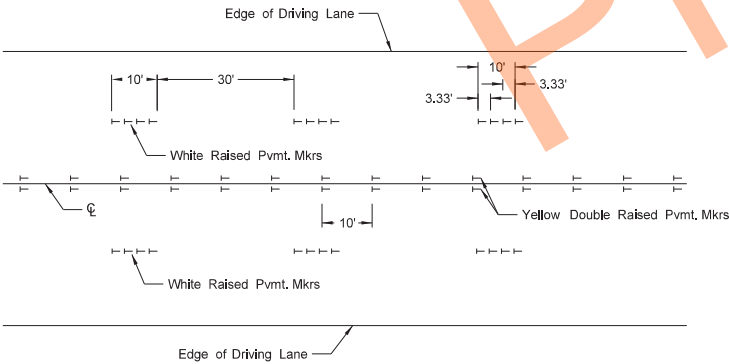


Raised Pavement Markers
FOUR LANE ROADWAY

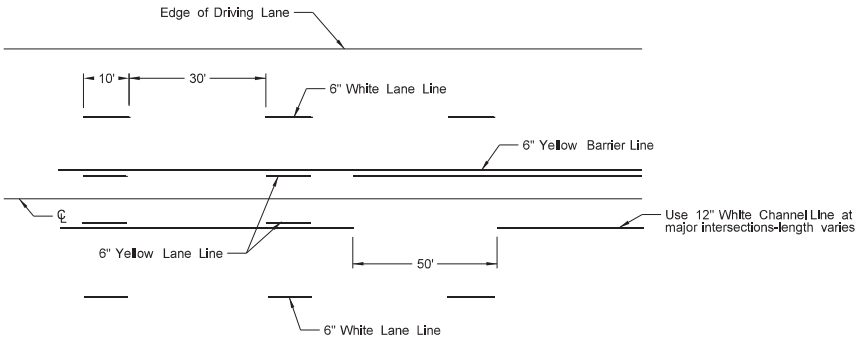


Painted or Tape Lines

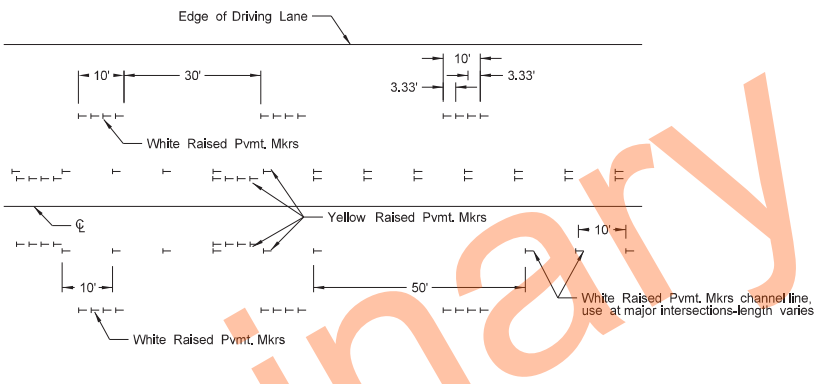

Raised Pavement Markers
FIVE LANE ROADWAY TWO WAY LEFT TURN

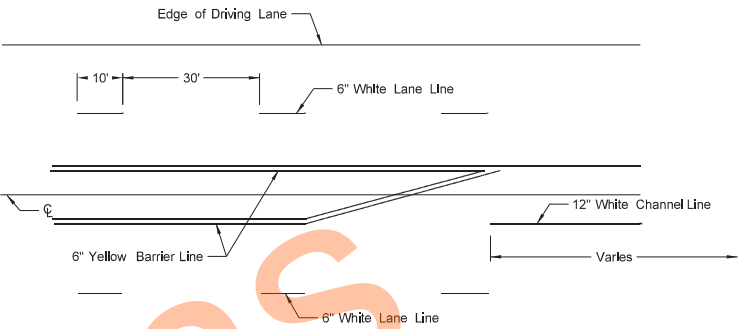

Painted or Tape Lines

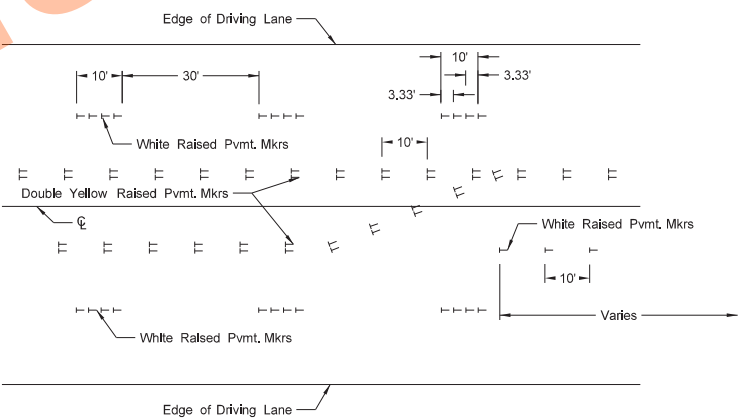

Raised Pavement Markers
FIVE LANE ROADWAY WITH MARKED ISLANDS

- NOTES:
1. Place no passing zones on two-lane two-way roadways as shown. In lieu of short term no passing zone pavement markings, place no passing zone signs. Replace no passing zone signs with short term no passing zone pavement marking within three days.
 2. Place short term center line stripe (paint) on top lift to match exact placement of permanent stripe.
 3. Remove raised markers and tape markings after permanent pavement marking is installed.
 4. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
 5. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40 mph.
 6. Wide lines - 8 inches wide if 4 inch normal width lines are used and 12 inches wide if 6 inch normal width lines are used.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
3-29-16	Re-numbered to be D-762-11 (previously was D-762-6)
10-17-17	Updated to active voice.
8-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths
1-17-24	Revised wide pvmt marking width.

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

01/17/24

ENGINEER

NORTH DAKOTA