

DESIGN DATA				
Traffic	Average Daily			
Current 2024	Pass: 532	Trucks: 220	Total: 752	
Preventive Maintenance				


NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

NH-2-001(087)033
LaMoure County
N Jct ND 13 - Verona North to Jct ND 46
Mill and RHMA Overlay

	STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	24846	1	1

GOVERNING SPECIFICATIONS	Date Published and Adopted by the North Dakota Department of Transportation
Standard Specifications	7/1/2025
Supplemental Specifications	NONE


PROJECT NUMBER \ DESCRIPTION	NET MILES	GROSS MILES
NH-2-001(087)033	18.300	18.300

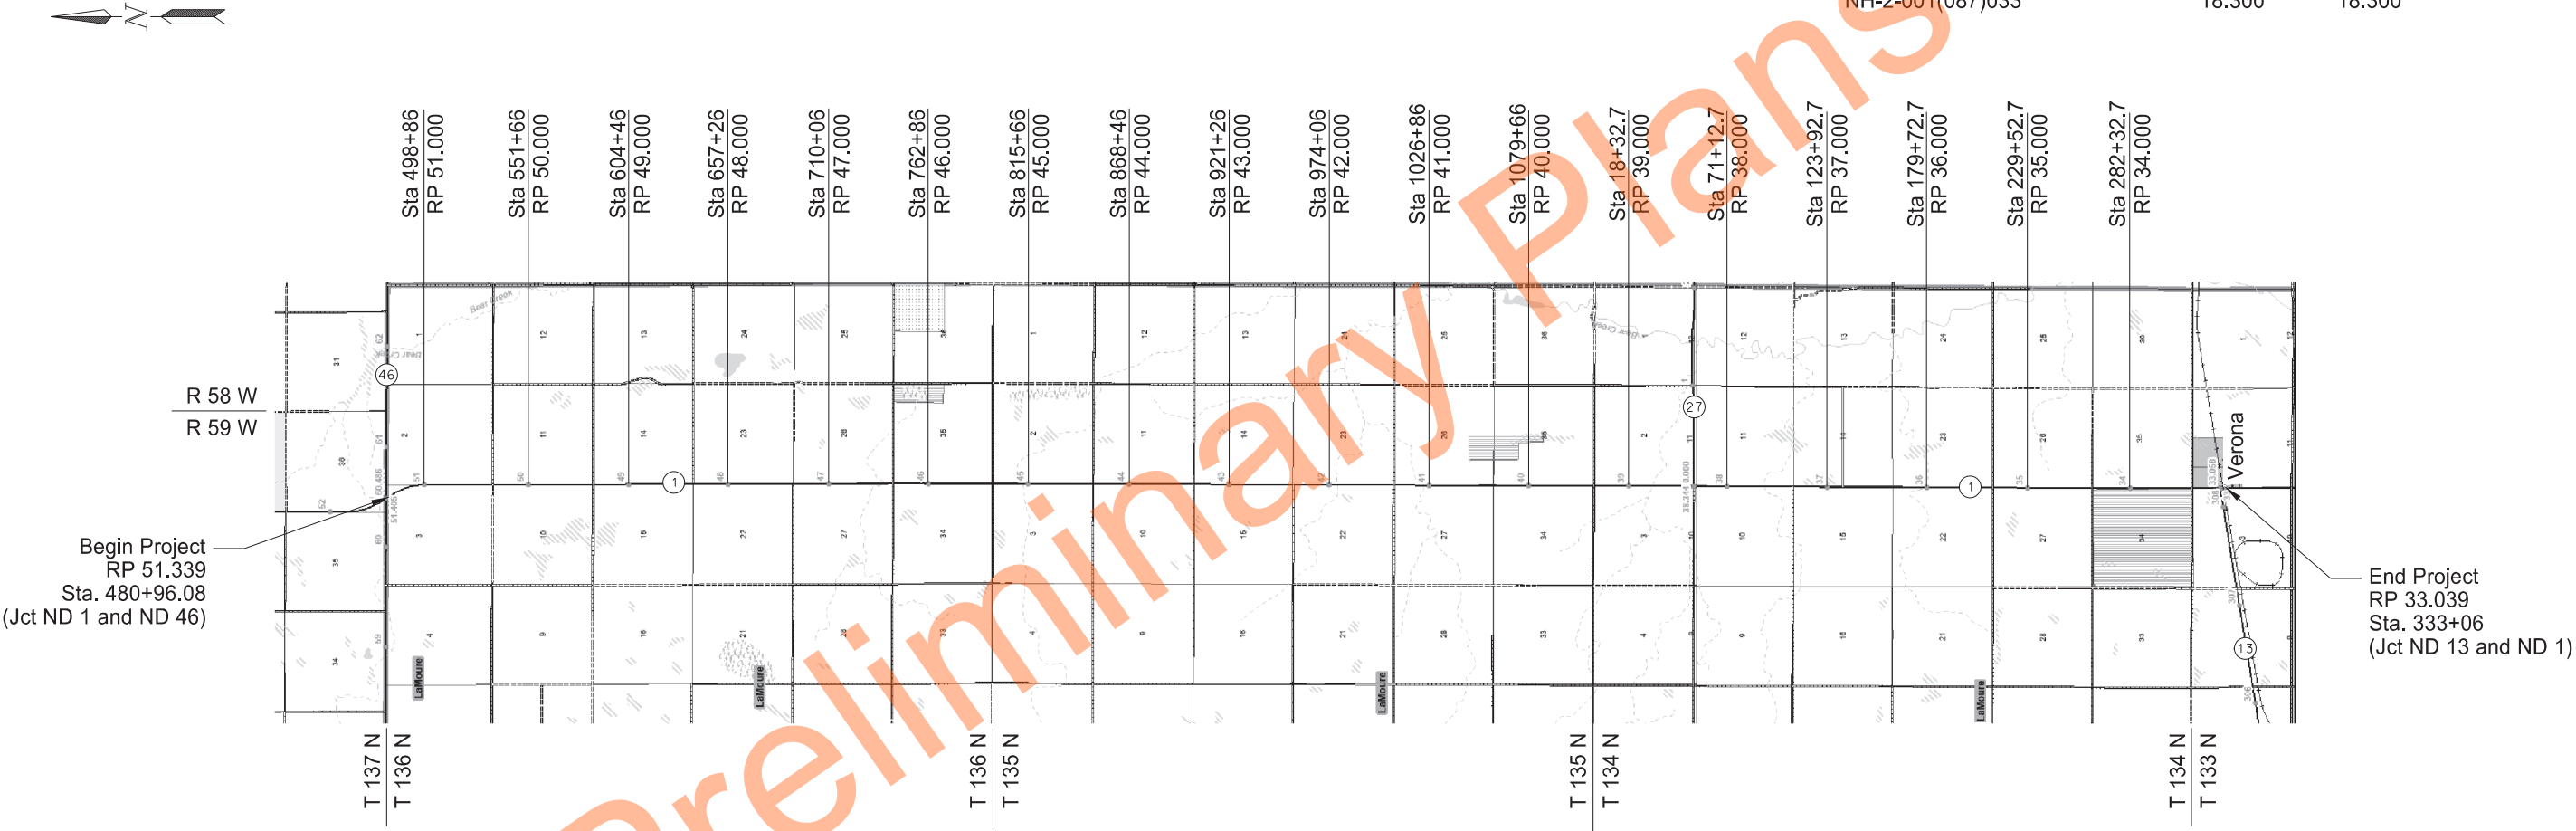

Begin Project
RP 51.339
Sta. 480+96.08
(Jct ND 1 and ND 46)

End Project
RP 33.039
Sta. 333+06
(Jct ND 13 and ND 1)

Station Equation
1114+13.3 Bk =
0+00 Ahd

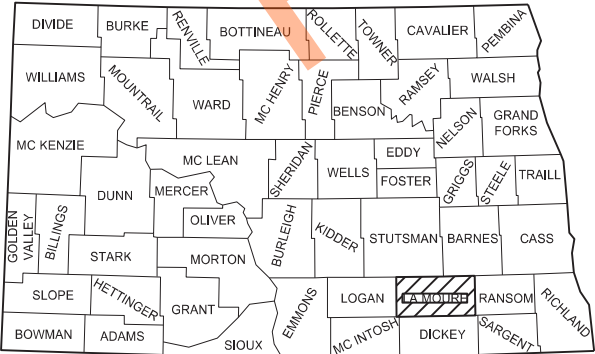

STATE COUNTY MAP

DESIGNER Tyler Peterson
DESIGNER
DESIGNER

ND DEPARTMENT OF TRANSPORTATION
VALLEY CITY DISTRICT
Nathan Haaland
08/13/26

NDDOT VALLEY CITY DISTRICT

REGISTERED PROFESSIONAL ENGINEER

TYLER J. PETERSON


PE-27417

DATE 08/13/26


NORTH DAKOTA

TABLE OF CONTENTS						STATE	PROJECT NO.	SECTION NO.	SHEET NO.
						ND	SS-2-001(087)033	2	1
PLAN SECTIONS					LIST OF STANDARD DRAWINGS				
Section	Page(s)	Description	Number	Description					
1	1	Title Sheet	D-101-1, 2,3,4	NDDOT Abbreviations					
2	1	Table of Contents	D-101-10	NDDOT Utility Company and Organization Abbreviations					
4	1	Scope of Work	D-101-20, 21	Line Styles					
6	1	Notes	D-101-30, 31,32,33	Symbols					
8	1	Quantities	D-704-2	Traffic Control For Coring Of Hot Bituminous Pavement					
10	1	Basis of Estimate	D-704-7, 8,9,10,11,11A	Breakaway Systems For Construction Zone Signs - Perforated Tube					
20	3	General Details	D-704-13, 14,15	Barricade And Channelizing Device Details					
30	3	Typical Sections	D-704-20	Terminal And Seal Coat Sign Layouts					
100	2	Work Zone Traffic Control	D-704-22	Construction Truck And Temporary Detour Layouts					
			D-704-26	Miscellaneous Sign Layouts					
			D-704-27	Mobile Operation (Pavement Marking)					
			D-704-33	Two-Lane Roadway Portable Rumble Strips					
			D-704-50	Portable Sign Support Assembly					
			D-704-56	Mobile Operation - Grinding Shoulder Rumble Strips					
			D-706-1	Bituminous Laboratory					
			D-760-4	Rumble Strips Undivided Highways (Shoulders Less Than 4')					
			D-762-4	Pavement Marking					
			D-762-11	Short-Term Pavement Marking					
SPECIAL PROVISIONS									
Number	Description								
568(25)	E-Ticketing (Mandatory)								
569(25)	Flexible Pavement Surface Tolerance								
SSP 4	Longitudinal Joint Density								

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	4	1

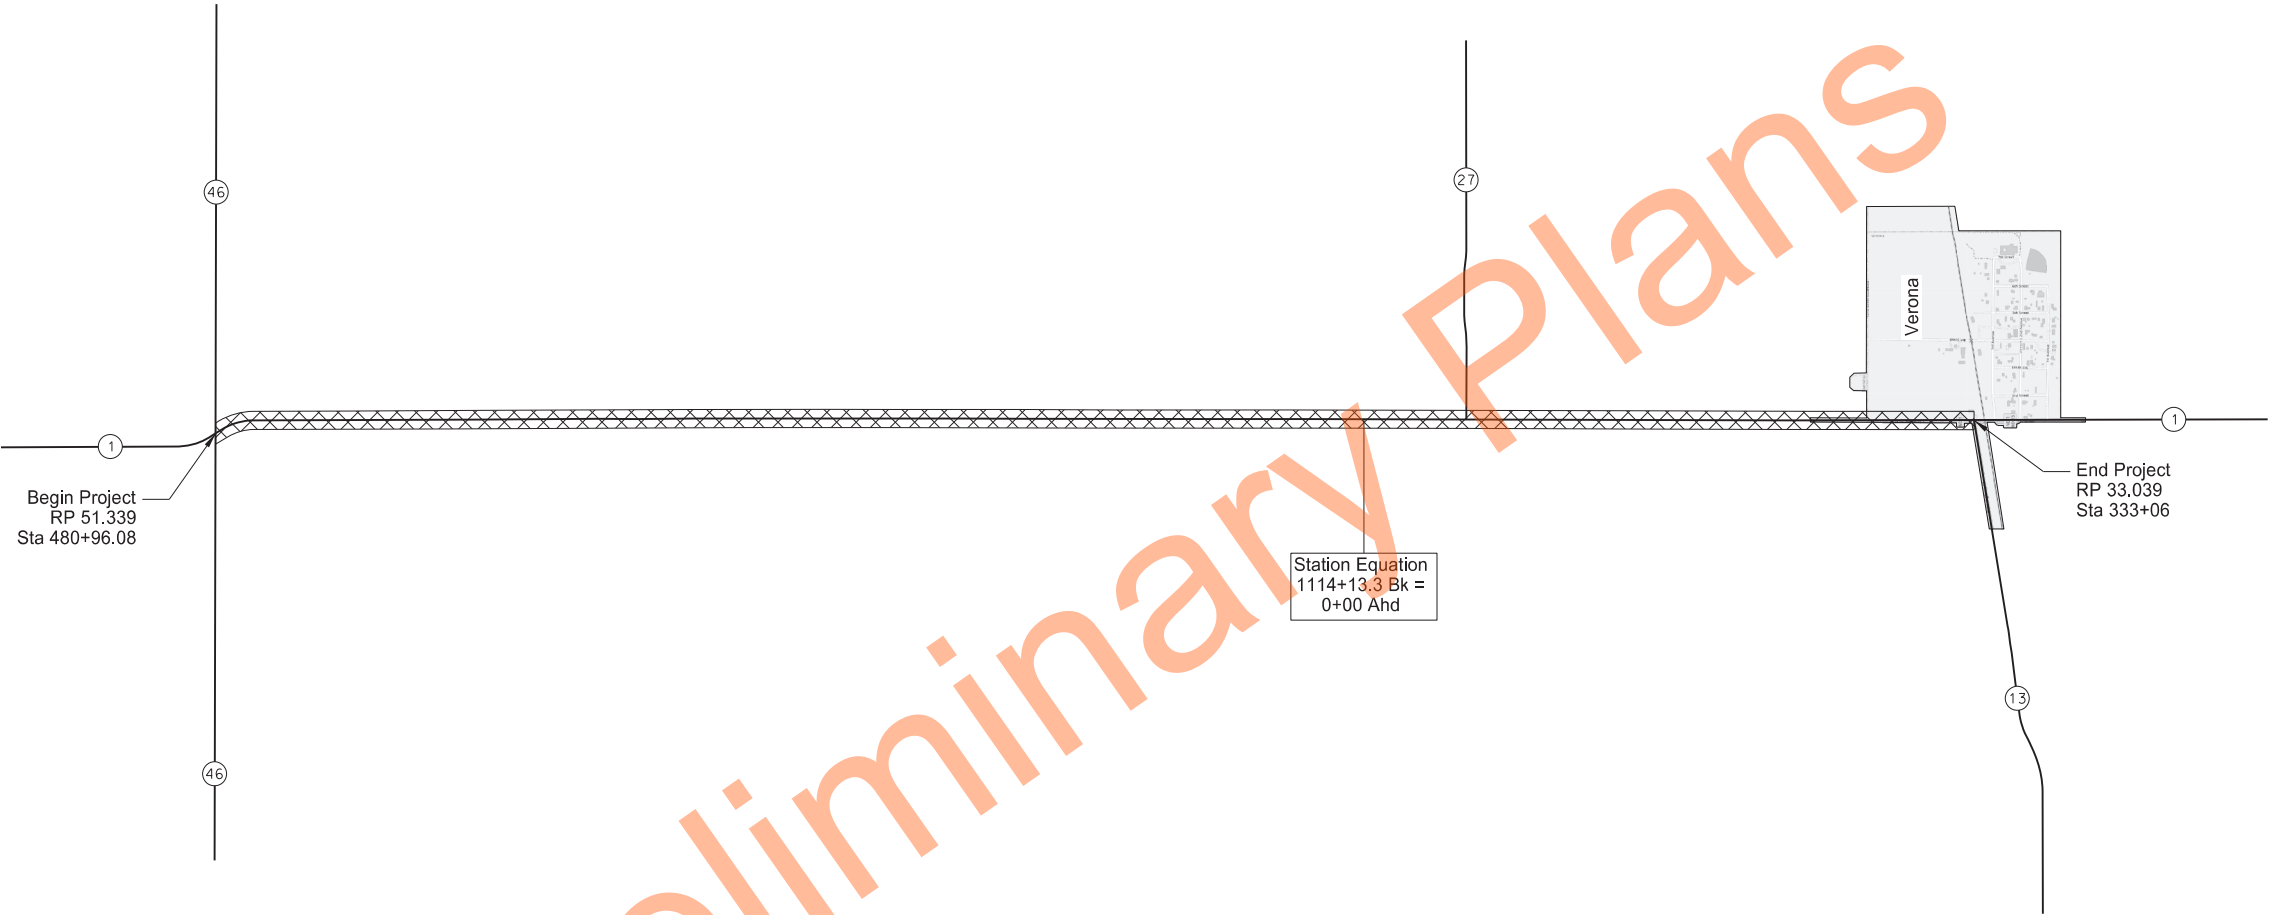

 0.5" Mill and 2" HBP Overlay



Scope of Work	
Mill & RHMA Overlay	
N Jct ND 13 - Verona North to Jct ND 46	

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-2-001(087)033	6	1

NOTES

- 107-P01
- HAUL ROAD RESTORATION: Use Class 13 aggregate for haul road restoration.
- 230-P01
- SHOULDER PREPARATION: Remove all paragraphs in section 230.04 B. in the Standard Specifications and replace with the following: “Spray herbicide to kill all vegetation and roots on the pavement slough and within 2 feet of the outside edge of the slough. Spray herbicide to kill all vegetation and roots existing aggregate shoulder. Mix and apply the herbicide according to the manufacturer’s recommendations. Spray herbicide in two applications that are three weeks apart. Complete spraying no more than 30 days before starting paving operations. Take precautionary measures to prevent any damage to adjacent vegetation caused by the spraying operation.”
- 302-P02
- SALVAGE BITUMINOUS BASE COURSE: Use project millings as Salvage Bituminous Base Course. Provide material meeting the 100% passing 1-1/2" sieve size requirement specified in NDDOT Standard Specifications Section 817 B, "Salvaged Base Course Gradation." All other requirements of NDDOT Standard Specifications Section 302.03, "Materials," are waived. Include the costs of Salvage Bituminous Base Course in bid item “302-0305 SALVAGED BITUMINOUS BASE COURSE”. No additional compensation will be provided.
- 411-P01
- MILLING PAVEMENT SURFACE: Deliver a minimum of 2,000 tons of milled material to the NDDOT stockpile yard at the junction of ND 46 and ND 1, as directed by the Engineer. Include all costs for hauling and placement in the contract unit price for “411-0100 MILLING PAVEMENT SURFACE.” The Department will not provide additional compensation.
- 704-500
- PORTABLE RUMBLE STRIPS (PRS): Use PRS made of rubber or engineered polymers.

Install PRS as part of the temporary traffic control when the following signs are also part of the required traffic control set up:
 - "Be Prepared to Stop" (W3-4); and
 - "Flagger" symbol (W20-7)

Install PRS that meet the following criteria:
 - Have no adhesives or fasteners required for placement;
 - Have a manufacture's speed rating that meets or exceeds the posted speed limit; and
 - Each strip in the array must weigh a minimum of 100 pounds.

Use individual PRS constructed in one of the following manners:
 - A single piece;
 - Interlocking segments; or
 - Two pieces hinged at the midpoint.

704-P01

- An installed array of PRS consists of a minimum of 3 individual strips.
- Move rumble strips with the flagging operation. Do not place rumble strips on horizontal curves.
- The Engineer will count and measure each array as one unit. Include the cost of providing, installing, maintaining, and relocating PRS in the unit price bid for "Portable Rumble Strips".
- TRAFFIC CONTROL FOR BITUMINOUS PAVEMENT: Provide traffic control consisting of a temporary road closure, flagging, and a pilot car.
- Traffic control device quantities are estimated based on a 6-mile lane closure and the list below. The Department will pay for all necessary deployed devices, regardless of the length of the lane closure.
1. Standard D-704-15, layout A

2. Standard D-704-20, layout G – signing will be required at junctions: ND 27, ND 46, ND13, Co. Rd. 34, and Co. Rd 35.

3. Standard D-704-22, layouts K and L; and

4. Standard D-704-26, layouts CC, EE, and GG.


5. Standard D-704-33;

Place flaggers and traffic control devices as shown on Standard D-704-15, layout A at the following intersections when the lane closure spans across them:

1. Jct ND 1 & ND 27

2. Jct ND 1 & Co Rd 34

3. Jct ND 1 & Co Rd 35
- 704-P02
- PORTABLE RUMBLE STRIPS: Four sets of portable rumble strips are included int the plans to allow the contractor to reduce the down time while advancing the flagging operations.



ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-2-001(087)033	8	1

SPEC	CODE	ITEM DESCRIPTION	UNIT	MAINLINE	TOTAL
-----	-----	-----	-----	-----	-----
103	0100	CONTRACT BOND	L SUM	1	1
109	1000	E-TICKETING	L SUM	1	1
216	0100	WATER	M GAL	450	450
302	0305	SALVAGED BITUMINOUS BASE COURSE	TON	750	750
401	0050	TACK COAT	GAL	15,527	15,527
411	0100	MILLING PAVEMENT SURFACE	TON	14,342	14,342
430	0143	RAP - SUPERPAVE FAA 43	TON	36,106	36,106
430	1000	CORED SAMPLE	EA	308	308
430	5815	PG 58S-34 ASPHALT CEMENT	TON	1,697	1,697
702	0100	MOBILIZATION	L SUM	1	1
704	0100	FLAGGING	MHR	300	300
704	1000	TRAFFIC CONTROL SIGNS	UNIT	1,737	1,737
704	1048	PORTABLE RUMBLE STRIPS	EA	4	4
704	1067	TUBULAR MARKERS	EA	165	165
704	1185	PILOT CAR	HR	200	200
706	0550	BITUMINOUS LABORATORY	EA	1	1
706	0600	CONTRACTOR'S LABORATORY	EA	1	1
760	0025	SINUSOIDAL RUMBLE STRIP - ASPHALT SHOULDER	MILE	34.96	34.96
760	0027	SINUSOIDAL RUMBLE STRIP - ASPHALT CENTERLINE	MILE	17.48	17.48
762	0430	SHORT TERM 4IN LINE-TYPE NR	LF	116,962	116,962
762	1106	PVMT MK PAINTED 6IN LINE	LF	232,234	232,234
762	1124	PVMT MK PAINTED 24IN LINE	LF	29	29

BASIS OF ESTIMATE

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-2-001(087)033	10	1

		Typical Section - Tangent		Typical Section - Curve	
		500+07 to 1114+13		480+96 to 500+07	
		0+00 to 333+06			
		Length = 94,712 ft		Length = 1,911 ft	
		17.938 Miles		0.362 Miles	
Material	Unit	Width (ft)	Quantity/Mile	Width (ft)	Quantity/Mile
Tack Coat - 1 Application @ 0.05 Gal/SY	Gal	27	792	27	792
Milling Pavmement Surface @ 2 Ton/CY	Ton	27	769	27	734
RAP - Superpave FAA 43 @ 2.0 Ton/CY	Ton	27	1,854	27	1,866
PG 58S-34 Asphalt Cement @ 4.7% by Weight of Mix	Ton	27	87	27	88

MILLINGS - Salvage Bituminous Base Course	
Millings Taken from Project	14,342 TON
Millings for RAP - Superpave FAA 43	9,027 TON
Millings Available for Project Use	3,881 TON
Millings Required for Salvaged Bituminous Base	750 TON
Millings Required for NDDOT stockpile yard	2,000 TON
Excess Millings	1,131 TON

*RAP PERCENTAGE ESTIMATED AT 25% BY WEIGHT

*10% WASTE FACTOR WAS USED IN CALCULATIONS

HMA Cored Samples							
	A	B		C			
Specification Section	Distance	Lanes	Joints	Lifts	Quantity	Quantity	Unit
404 I.2.b(2), "Pavement Density Cores"	97	2	N/A	1	193	N/A	EA
SSP 4 Longitudinal Joint Density in HMA Pavements (Centerline)	97	N/A	1	1	97	N/A	EA
430.04 I.2.b(3), "Pavement Thickenss Determination Cores"					N/A	18	
				Total	290	18	EA

Water


25 MGal/Mile for Dust Palliative

Rumble Strips		
Type	Location	Quantity
Centerline	RP 33.859 to RP 51.339	17.480 Miles
Edge Line	RP 33.859 to RP 51.340	34.960 Miles


Short Term 4 IN Line - Type NR		
Application	Basis	Quantity
Centerline - Milling	Centerline Skips 1,320 LF/Mile Barrier Stripe 5280 LF/Mile	38,987 LF
Centerline - Paving	Centerline Skips 1,320 LF/Mile Barrier Stripe 5280 LF/Mile	38,987 LF
Centerline - Rumble Strips	Centerline Skips 1,320 LF/Mile Barrier Stripe 5280 LF/Mile	38,987 LF

Permanent - PVMT MK PAINTED 6IN LINE		
Application	Basis	Quantity
Centerline	Centerline Skips 1,320 LF/Mile Barrier Stripe 5280 LF/Mile	38,987 LF
Edge Line	10,560 LF/Mile	193,247 LF


Permanent - PVMT MK PAINTED 24IN LINE		
Application	Basis	Quantity
Stop Bar	24" White Stop Bar - ND 27	29 LF




	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	20	2

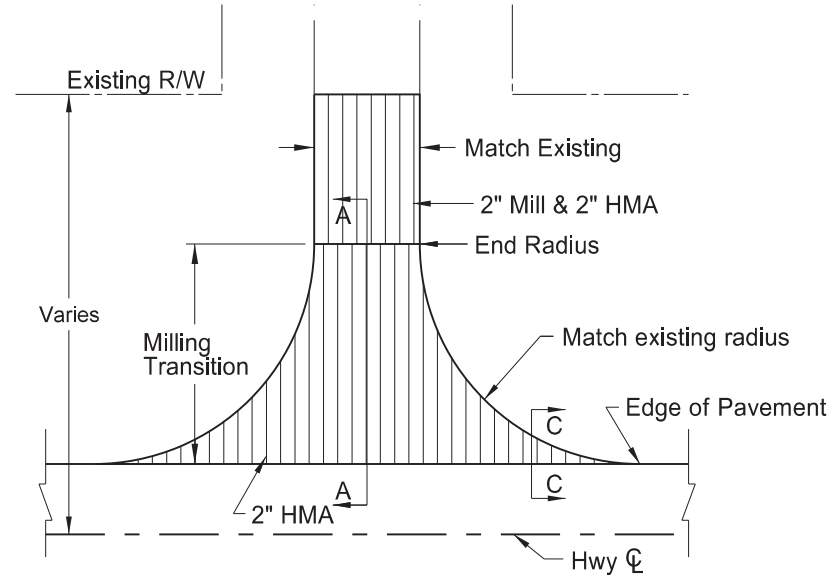


(1) Paved Section Line, County Road, or Street Approach

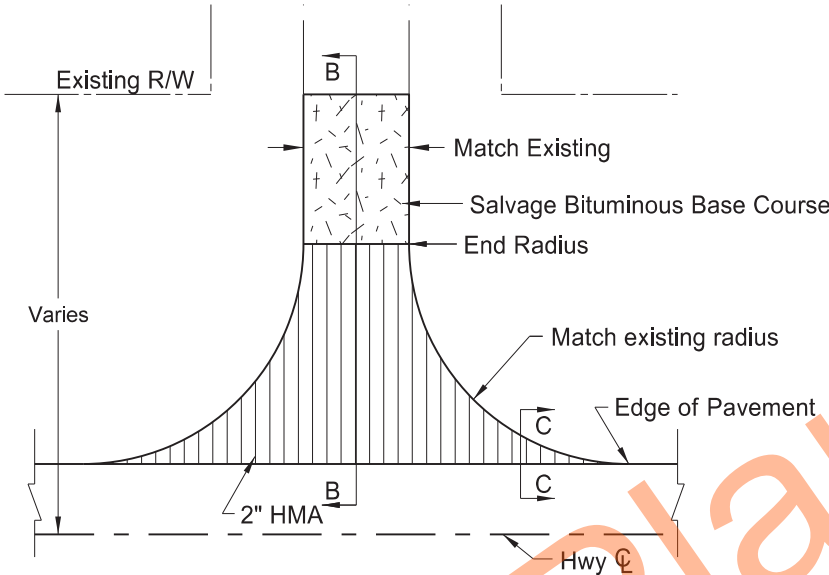


(2) Gravel Section Line, County Road, or Street Approach

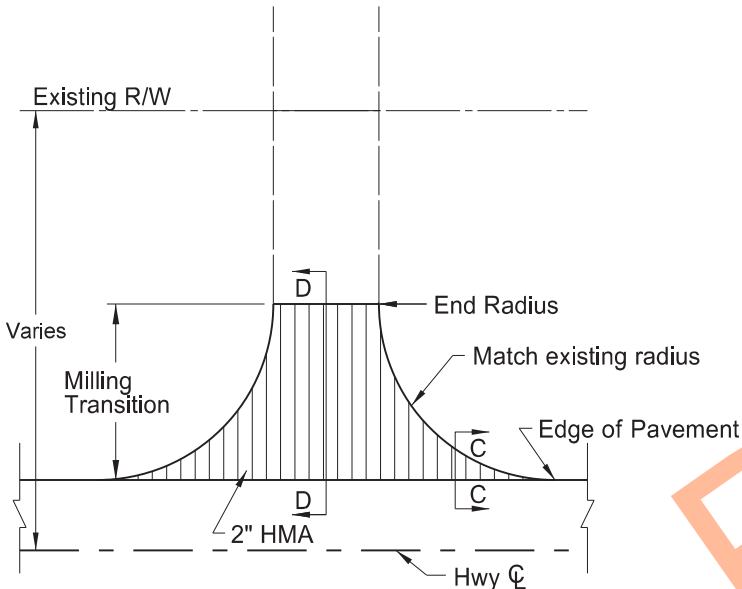

(3) Paved Private Drive Approach

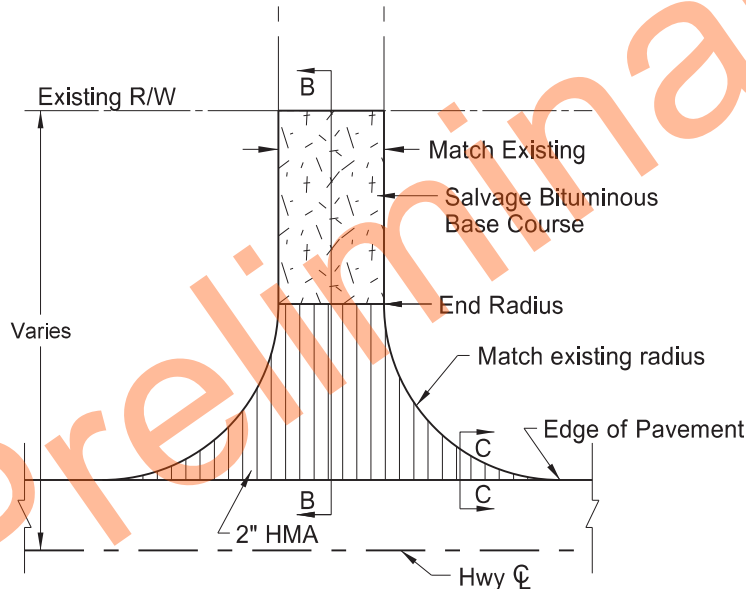





(4) Gravel Private Drive Approach

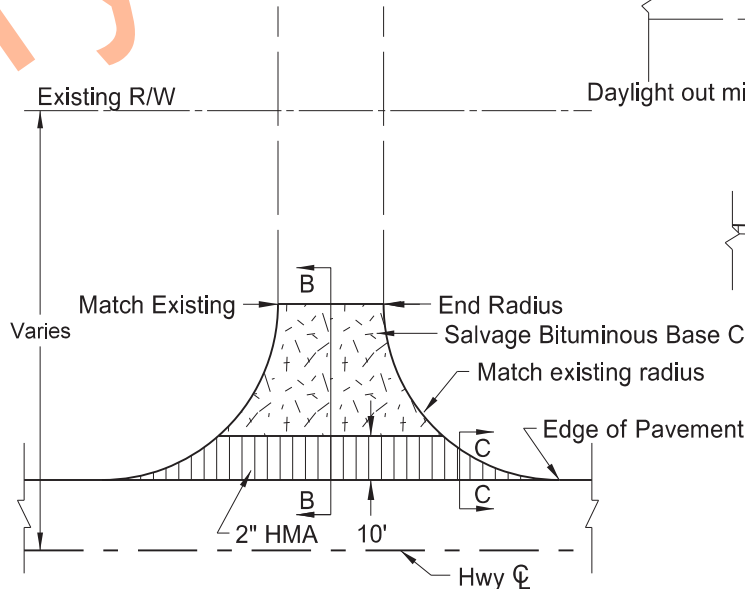


(5) Field Drive Approach

Notes:

- Actual HMA paving and salvage bituminous base course locations may vary in the field, as approved by the Engineer.
- Quantity totals have been included in the bid items of the "Estimate of Quantities" of the plans.
- Salvage bituminous base course has been provided in the quantities to fill in around the radii. This material will be required when sloughs are steeper than 4:1 (see section C-C)

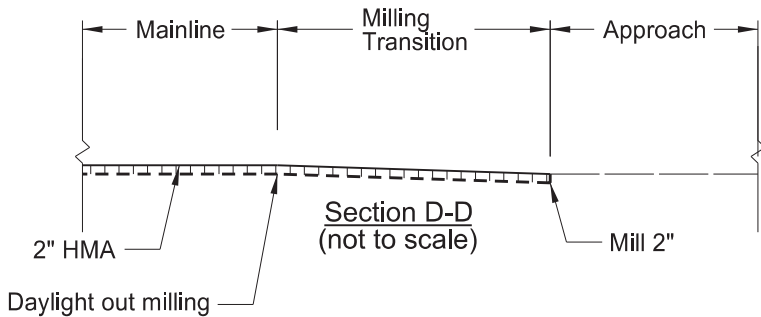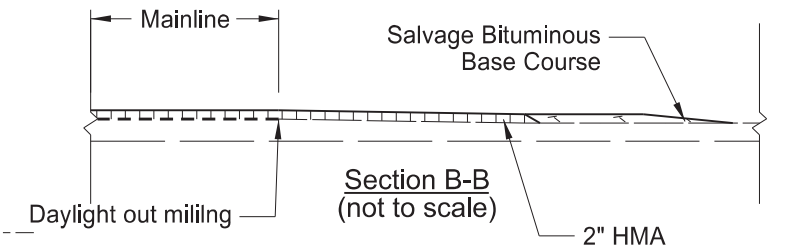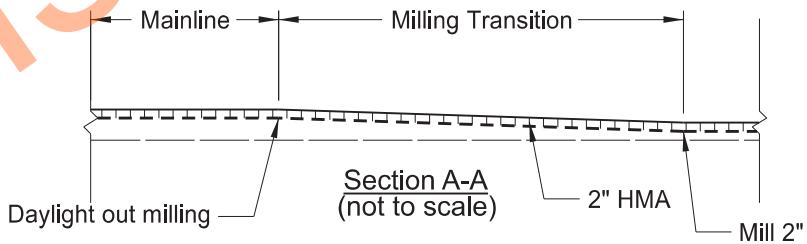

BASIS OF ESTIMATE		1	2	3	4	5	
ITEM	UNIT	Paved Section Line	Gravel Section Line	Paved Private Drive	Gravel Private Drive	Field Drive	TOTALS
Number of Locations	#	0	22	0	24	89	135
Salvage Bituminous Base Course	TON	0	4.7	0	6.1	5.6	750
Tack Coat	GAL	17	13	9	9	4	832
RAP Superpave FAA 43	TON	38.1	28.1	20.3	20.3	8.4	1849
PG 58S-34	TON	1.8	1.3	1.0	1.0	0.4	89
Milling Pavement Surface	TON	28	0	13	0	0	0







Approach Paving Details for Existing Rural Approaches

Mill & RHMA Overlay

N Jct ND 13 - Verona North to Jct ND 46

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	20	3

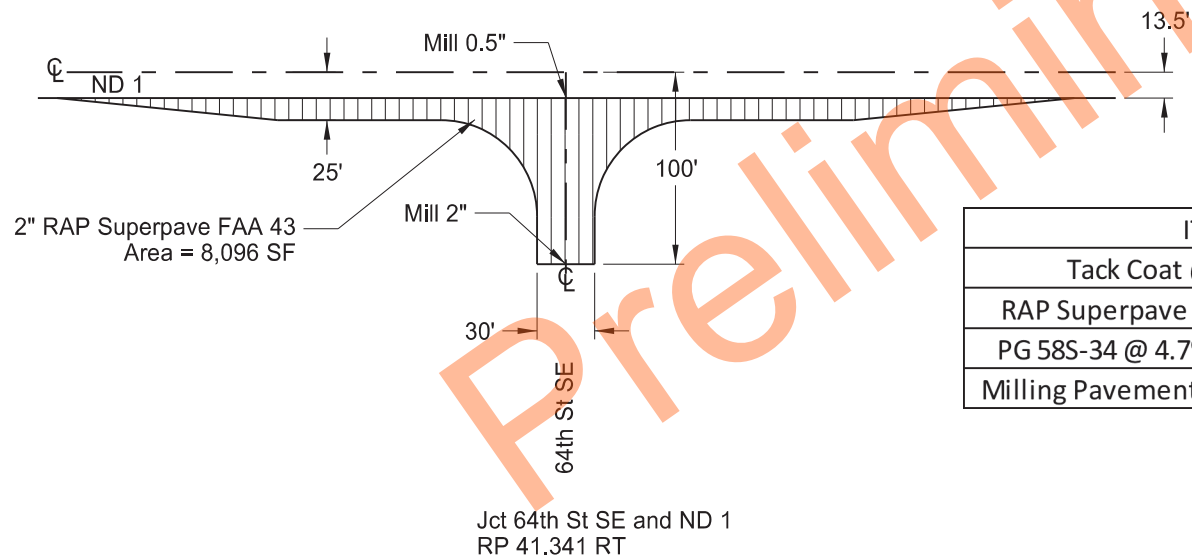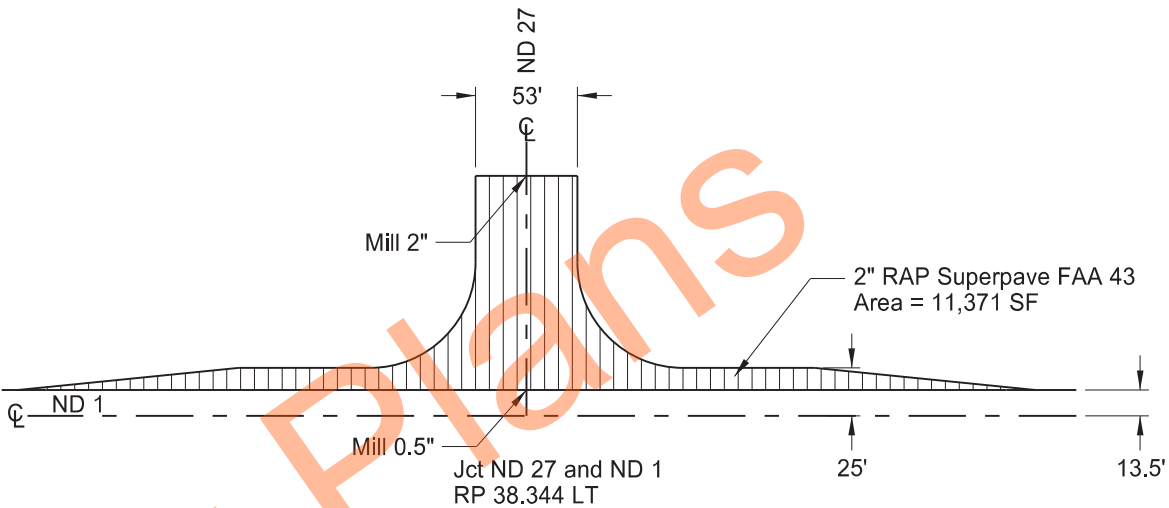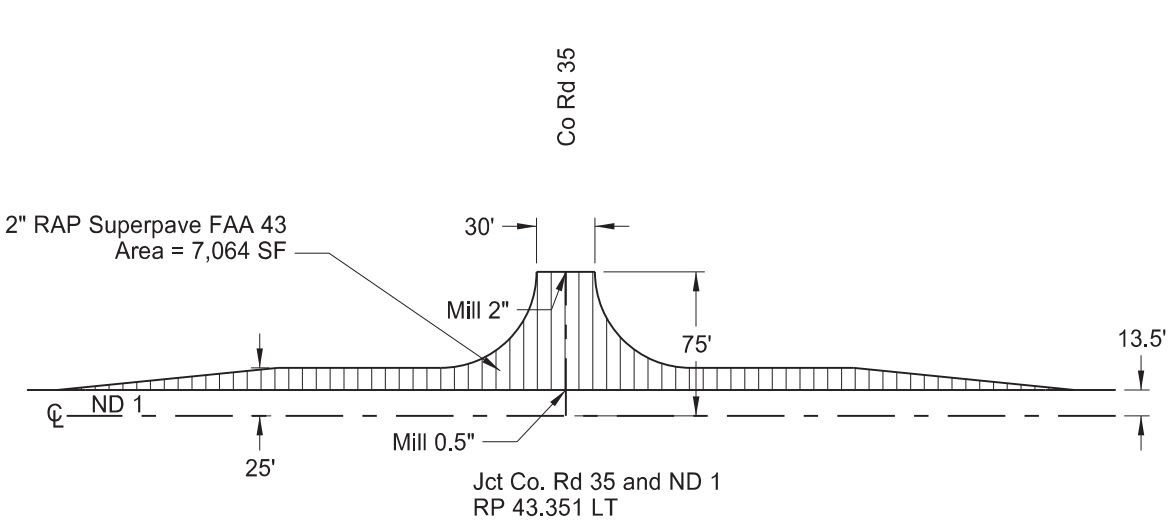

 0.5" Milling and 2" RHMA Overlay

ITEM	UNIT	Jct Co. Rd 35	Jct ND 27	Jct 64th	TOTALS
Tack Coat @ 0.05 Gal/SY	GAL	39.2	63.2	45.0	147.4
RAP Superpave FAA 43 @ 2 Ton/CY	TON	87.2	140.4	100.0	327.5
PG 58S-34 @ 4.7% by Weight of Mix	TON	4.19	6.74	4.80	15.72
Milling Pavement Surface @ 2 Ton/CY	TON	54.5	87.7	62.5	204.71


Flared Intersections

Mill and RHMA Overlay

N Jct ND 13 - Verona N to Jct ND 46



	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	SS-2-001(087)033	20	1

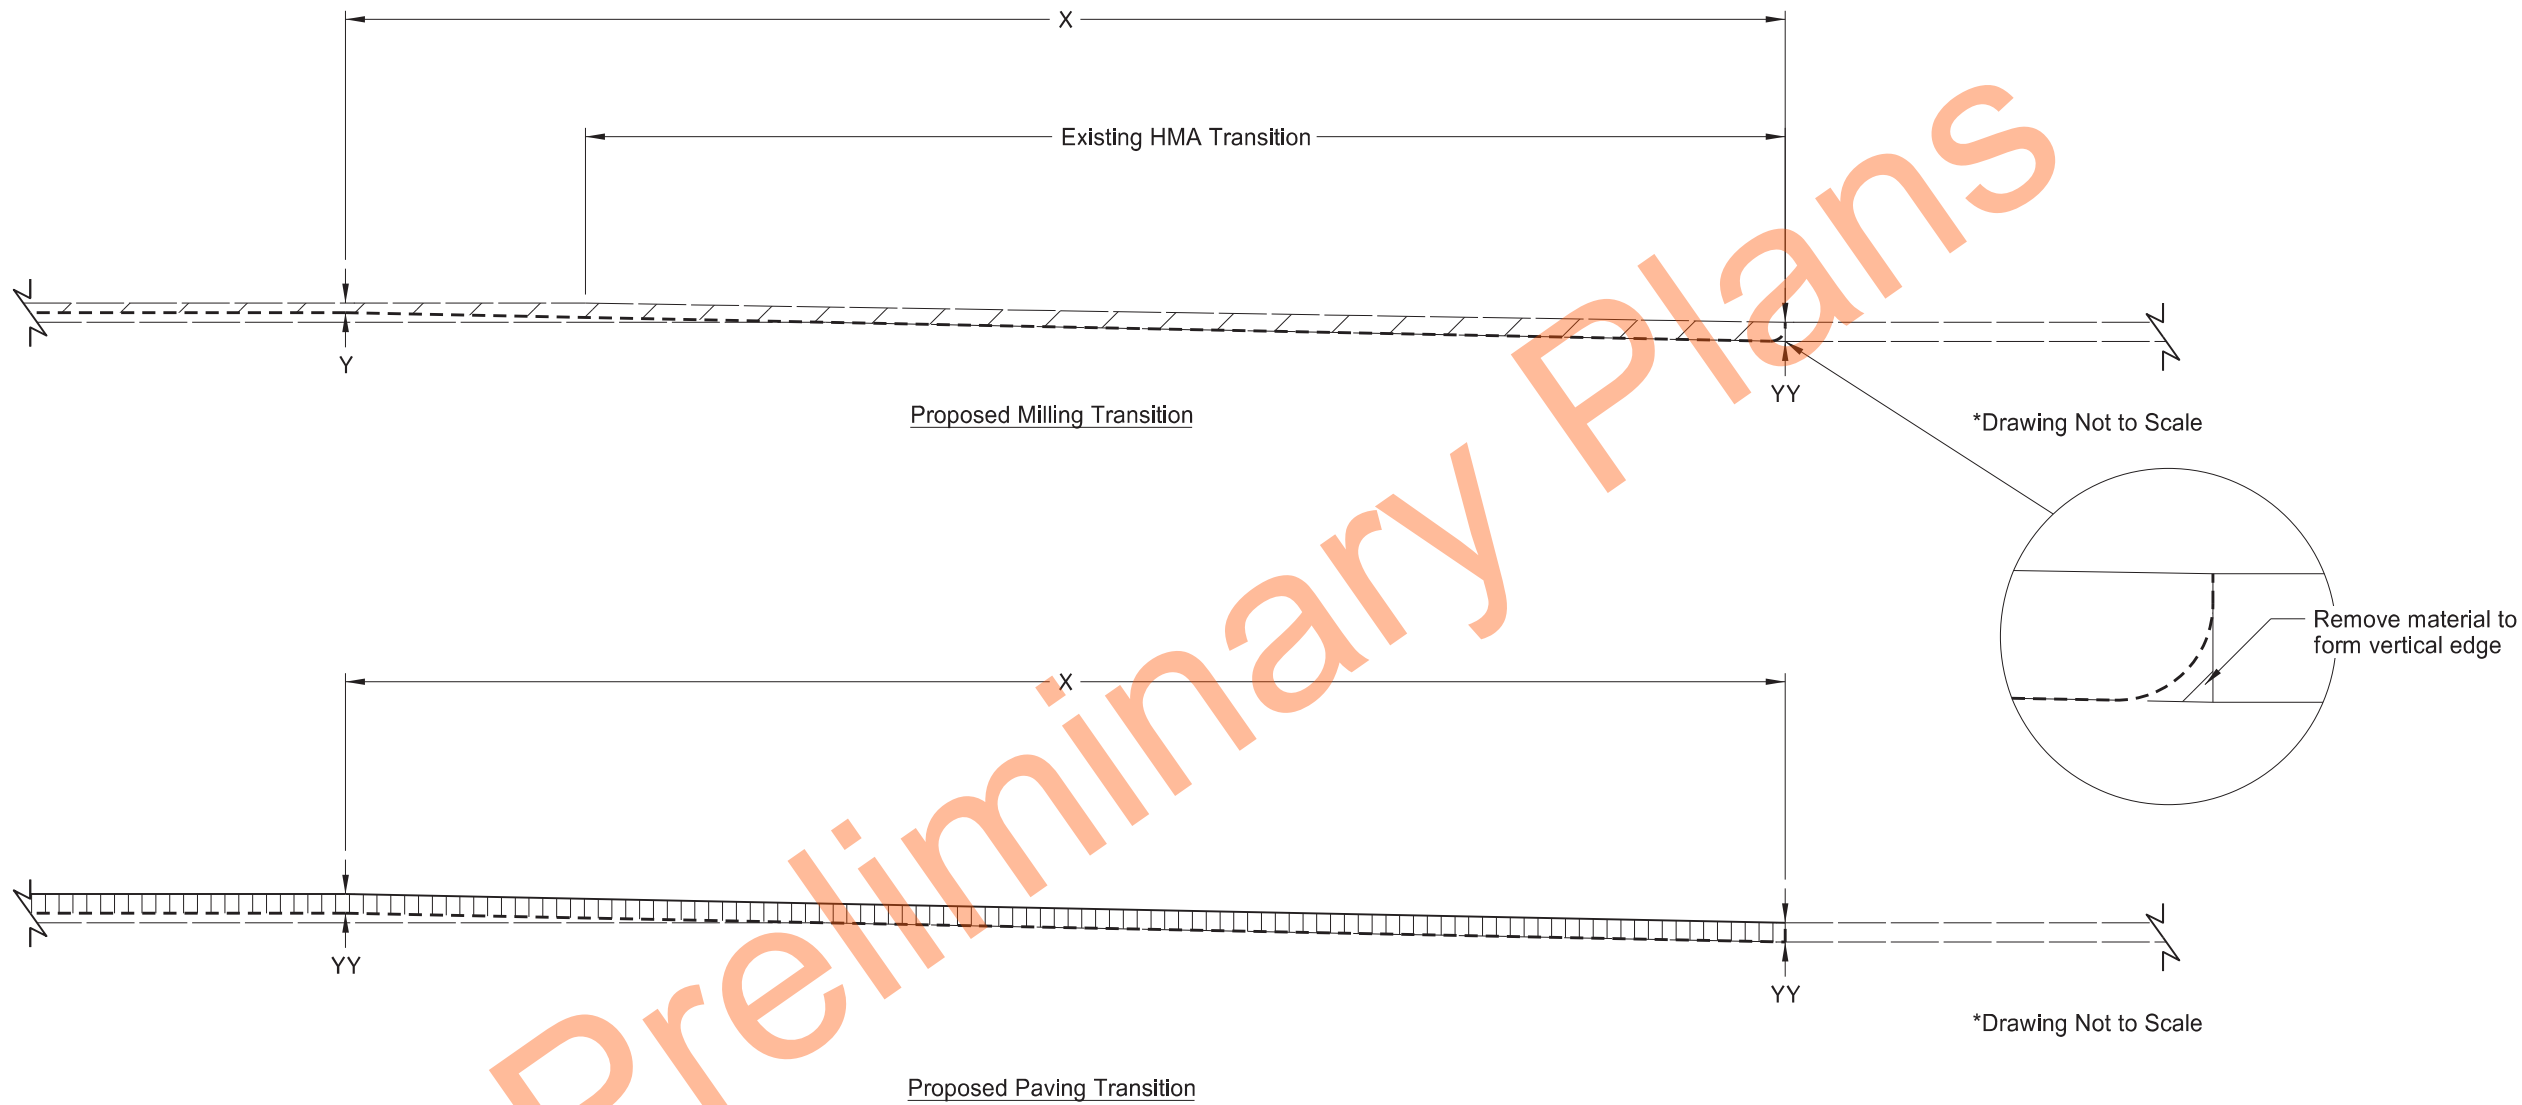

Milling & Paving Transitions						
Location	Sta	To	Sta	X	Y	YY
Begin Project	480+96		482+71	175'	0.5"	2"
End Project	331+31		333+06	175'	0.5"	2"

Milling and Paving End Transitions

Mill & RHMA Overlay

N Jct ND 13 - Verona North to Jct ND 46

REGISTERED PROFESSIONAL ENGINEER


TYLER J. PETERSON

PE-27417

DATE 08/13/26


NORTH DAKOTA

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	20	1

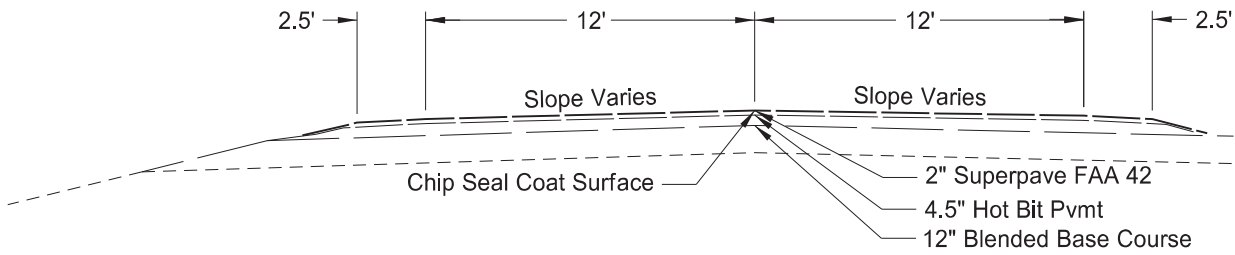

Existing Typical Section - Tangent

Sta 500+07 to Sta 1114+13.3 Bk
Sta 0+00 Ahd to Sta 333+06

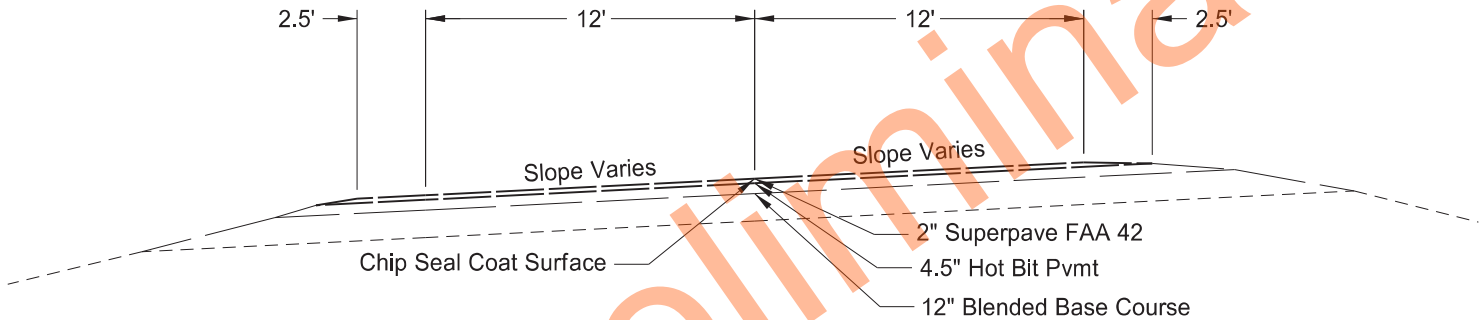

Existing Typical Section - Curve

Sta 480+96 to Sta 500+07


Existing Typical Sections

Mill and RHMA Overlay

N Jct ND 13 - Verona North to Jct ND 46




	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	20	1

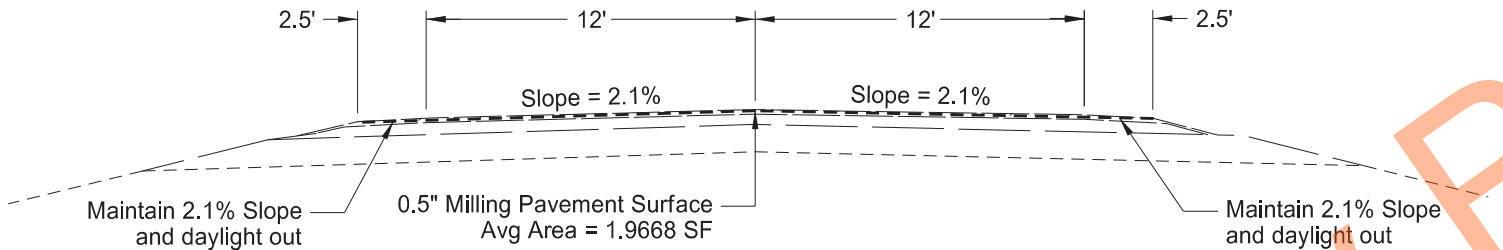

Milling Typical Section - Tangent

Sta 500+07 to Sta 1114+13.3 Bk
Sta 0+00 Ahd to Sta 333+06

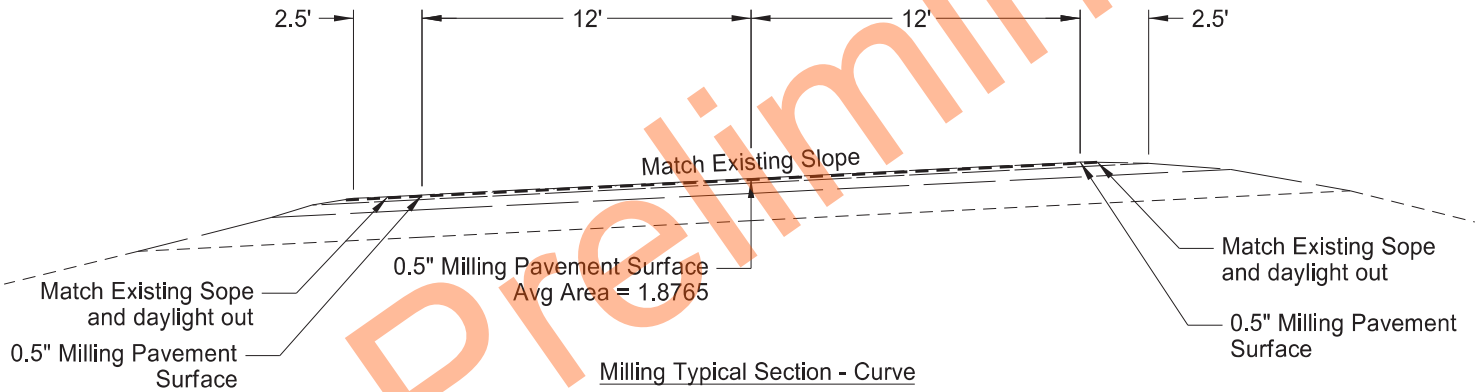

Milling Typical Section - Curve

Sta 480+96 to Sta 500+07


Milling Typical Sections

Mill and RHMA Overlay

N Jct ND 13 - Verona North to Jct ND 46



	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	30	3

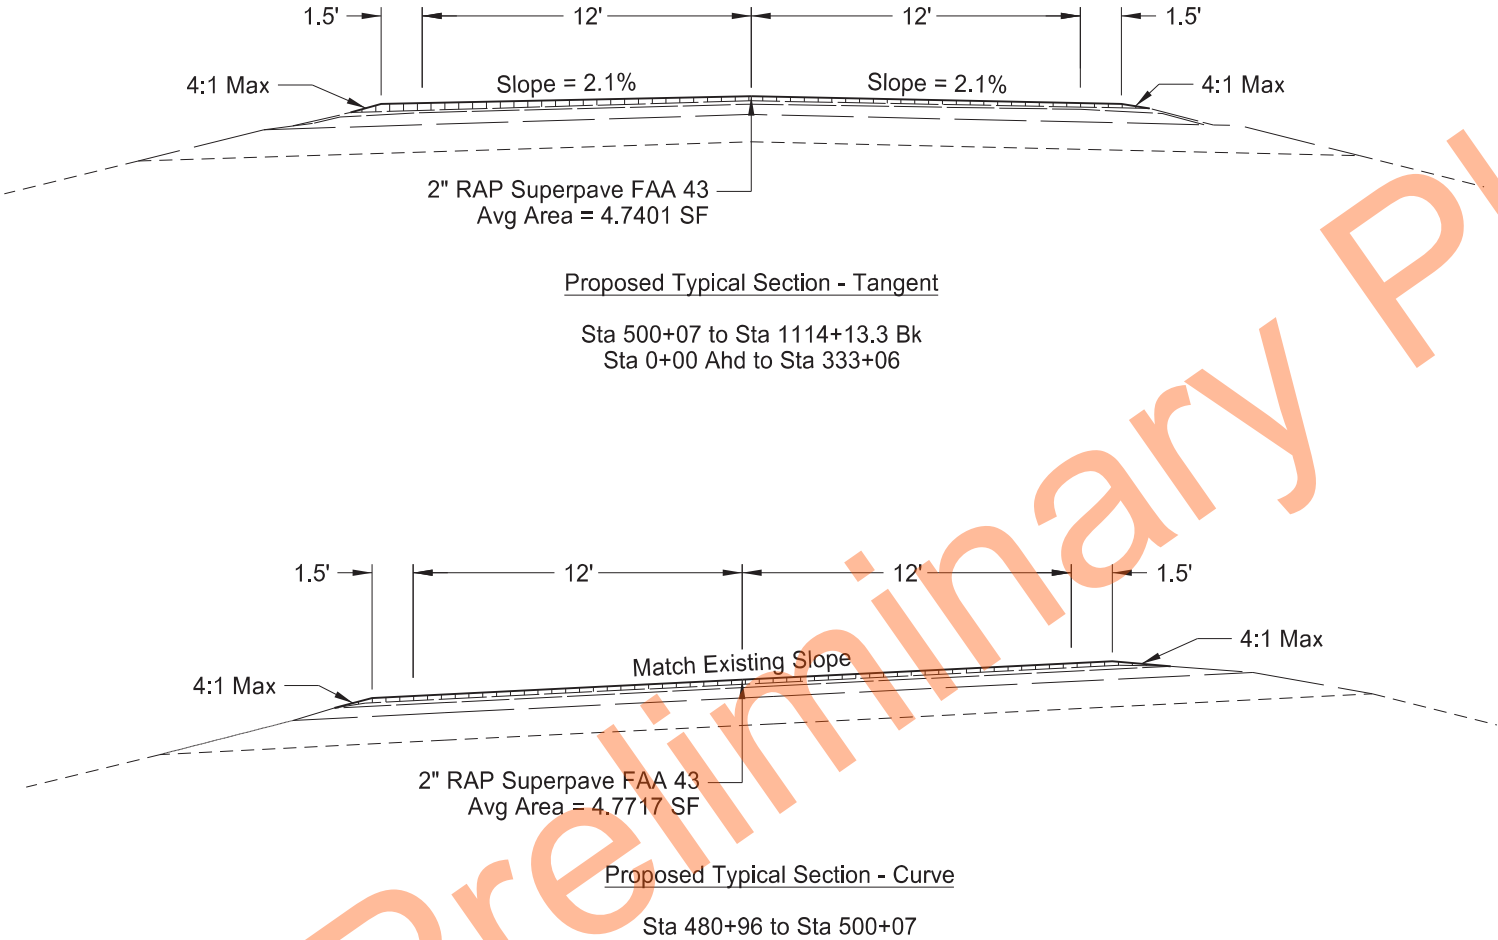

Proposed Typical Sections

Mill and RHMA Overlay

N Jct ND 13 - Verona North to Jct ND 46



STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	NH-2-001(087)033	100	1

SIGN NUMBER	SIGN SIZE	DESCRIPTION	AMOUNT REQUIRED	UNITS PER AMOUNT	UNITS SUB TOTAL
E5-1-48	48"x48"	EXIT GORE		35	
G20-1-60	60"x24"	ROAD WORK NEXT __ MILES	2	28	56
G20-1b-60	60"x24"	NO WORK IN PROGRESS (Sign and installation only)		18	
G20-2-48	48"x24"	END ROAD WORK	2	26	52
G20-4-36	36"x18"	PILOT CAR FOLLOW ME (Mounted to back of pilot car)	1	18	18
G20-4b-36	36"x30"	WAIT FOR PILOT CAR		18	
G20-50a-72	72"x36"	ROAD WORK NEXT __ MILES RT & LT ARROWS	4	43	172
G20-52a-72	72"x24"	ROAD WORK NEXT __ MILES RT or LT ARROW	3	36	108
G20-55-96	96"x48"	SPEED LIMIT ENFORCED - MINIMUM FEE \$150 WHEN WORKERS PRESENT	2	59	118
M1-1-36	36"x36"	INTERSTATE ROUTE MARKER (Post and installation only)		11	
M1-4-24	24"x24"	U.S. ROUTE MARKER (Post and installation only)		10	
M1-5-24	24"x24"	STATE ROUTE MARKER (Post and installation only)		10	
M3-1-24	24"x12"	NORTH (Mounted on route marker post)		7	
M3-2-24	24"x12"	EAST (Mounted on route marker post)		7	
M3-3-24	24"x12"	SOUTH (Mounted on route marker post)		7	
M3-4-24	24"x12"	WEST (Mounted on route marker post)		7	
M4-8-24	24"x12"	DETOUR (Mounted on route marker post)		7	
M4-9-30	30"x24"	DETOUR ARROW RIGHT or LEFT/AHD AND RT or LT		15	
M4-10-48	48"x18"	DETOUR (INSIDE ARROW) RIGHT or LEFT (Mounted on barricade)		7	
M5-1-21	21"x15"	ADVANCE TURN ARROW RT or LT(Mounted on route marker post)		7	
M5-1-30	30"x21"	ADVANCE TURN ARROW RT or LT(Mounted on route marker post)		9	
M6-1-21	21"x15"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		7	
M6-1-30	30"x21"	DIRECTIONAL ARROW RT or LT (Mounted on route marker post)		9	
M6-3-21	21"x15"	DIRECTIONAL ARROW UP (Mounted on route marker post)		7	
R1-1-48	48"x48"	STOP	4	32	128
R1-2-60	60"x60"	YIELD		29	
R2-1-36	36"x48"	SPEED LIMIT __ (Portable only)	4	30	120
R2-1-48	48"x60"	SPEED LIMIT __		39	
R2-1aP-24	24"x18"	MINIMUM FEE \$150 (Mounted on Speed Limit post)	2	10	20
R3-2-48	48"x48"	NO LEFT TURN		35	
R4-1-36	36"x48"	DO NOT PASS (Portable only)	2	30	60
R4-1-48	48"x60"	DO NOT PASS		39	
R4-7-48	48"x60"	KEEP RIGHT		39	
R5-1-48	48"x48"	DO NOT ENTER		35	
R6-1-54	54"x18"	ONE WAY RIGHT or LEFT (Mounted on STOP or DO NOT ENTER post)		14	
R7-1-12	12"x18"	NO PARKING ANY TIME		11	
R10-6-24	24"x36"	STOP HERE ON RED		16	
R11-2-48	48"x30"	ROAD CLOSED (Mounted on barricade)		12	
R11-2a-48	48"x30"	STREET CLOSED (Mounted on barricade)		12	
R11-3a-60	60"x30"	ROAD CLOSED __ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-3c-60	60"x30"	STREET CLOSED __ MILES AHEAD LOCAL TRAFFIC ONLY (Mtd on barricade)		15	
R11-4a-60	60"x30"	STREET CLOSED TO THRU TRAFFIC (Mounted on barricade)		15	
W1-3-48	48"x48"	REVERSE TURN RIGHT or LEFT		35	
W1-4-48	48"x48"	REVERSE CURVE RIGHT or LEFT		35	
W1-4b-48	48"x48"	TWO LANE REVERSE CURVE RIGHT or LEFT		35	
W1-6-48	48"x24"	ONE DIRECTION LARGE ARROW		26	
W3-1-48	48"x48"	STOP AHEAD		35	
W3-3-48	48"x48"	SIGNAL AHEAD		35	
W3-4-48	48"x48"	BE PREPARED TO STOP	2	35	70
W3-5-48	48"x48"	SPEED REDUCTION AHEAD	2	35	70
W4-2-48	48"x48"	LANE ENDS RIGHT or LEFT		35	
W5-1-48	48"x48"	ROAD NARROWS		35	
W5-8-48	48"x48"	THRU TRAFFIC RIGHT LANE		35	
W5-9-48	48"x48"	ROAD WORK TRAFFIC ONLY DOWN & LT or RT ARROW		35	
W6-3-48	48"x48"	TWO WAY TRAFFIC		35	
W8-1-48	48"x48"	BUMP	5	35	175
W8-3-48	48"x48"	PAVEMENT ENDS		35	
W8-7-48	48"x48"	LOOSE GRAVEL		35	
W8-11-48	48"x48"	UNEVEN LANES	2	35	70
W8-12-48	48"x48"	NO CENTER LINE		35	
W8-17-48	48"x48"	SHOULDER DROP-OFF SYMBOL		35	
W8-53-48	48"x48"	TRUCKS ENTERING HIGHWAY		35	
W8-54-48	48"x48"	TRUCKS ENTERING AHEAD or __ FT or __ MILE	2	35	70
W8-55-48	48"x48"	TRUCKS CROSSING AHEAD or __ FT or __ MILE	2	35	70
W8-56-48	48"x48"	TRUCKS EXITING HIGHWAY		35	
W9-3a-48	48"x48"	CENTER LANE CLOSED SYMBOL		35	
W13-1P-30	30"x30"	__ MPH ADVISORY SPEED PLAQUE (Mounted on warning sign post)		14	
W14-3-64	64"x48"	NO PASSING ZONE		28	
W16-2P-30	30"x24"	__ FEET PLAQUE (Mounted on warning sign post)		10	
W20-1-48	48"x48"	ROAD WORK AHEAD or __ FT or __ MILE	6	35	210
W20-2-48	48"x48"	DETOUR AHEAD or __ FT or __ MILE		35	
W20-3-48	48"x48"	ROAD or STREET CLOSED AHEAD or __ FT or __ MILE		35	
W20-4-48	48"x48"	ONE LANE ROAD AHEAD or __ FT or __ MILE		35	
W20-5-48	48"x48"	RIGHT or CENTER or LEFT LANE CLOSED AHEAD or __ FT or __ MILE		35	
W20-7-48	48"x48"	FLAGGER	2	35	70
W20-8-18	18"x18"	STOP - SLOW PADDLE Back to Back	2	5	10
W20-52P-54	54"x12"	NEXT __ MILES (Mounted on warning sign post)		12	
W21-1-48	48"x48"	WORKERS		35	
W21-2-48	48"x48"	FRESH OIL	2	35	70
W21-3-48	48"x48"	ROAD MACHINERY AHEAD or __ FT or __ MILE		35	
W21-5-48	48"x48"	SHOULDER WORK		35	
W21-5a-48	48"x48"	RIGHT or LEFT SHOULDER CLOSED		35	

[illegible][illegible]

SPEC & CODE			
704-1000	TRAFFIC CONTROL SIGNS	TOTAL UNITS	1737



[illegible]

NOTE:
If additional signs are required, units will be calculated using the formula from Section III-18.06 of the Design Manual.
<http://www.dot.nd.gov/>



Traffic Control Devices List

	STATE	PROJECT NO.	SECTION NO.	SHEET NO.
	ND	NH-2-001(087)033	100	2

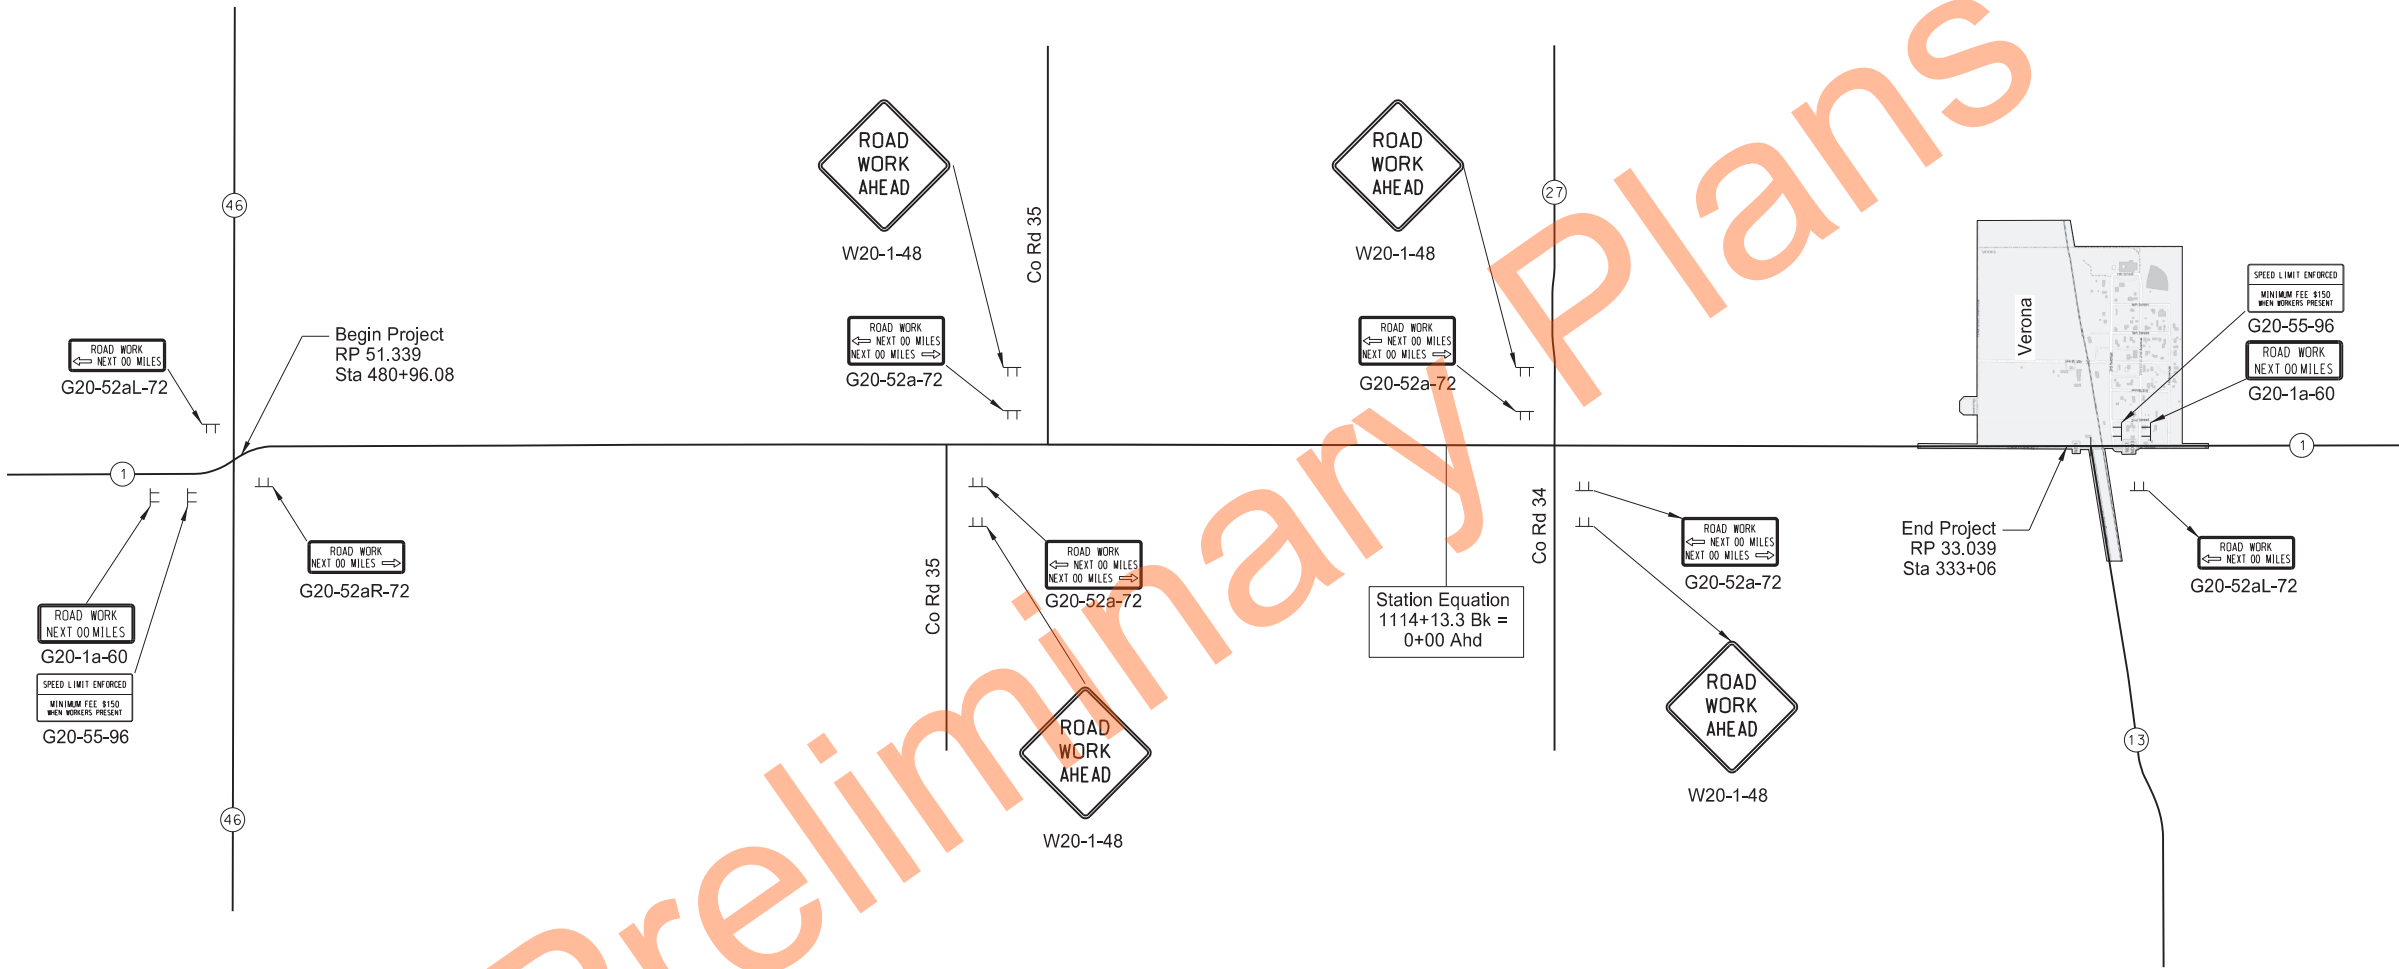

Construction Sign Layout

Mill & RHMA Overlay

N Jct ND 13 - Verona North to Jct ND 46

REGISTERED PROFESSIONAL ENGINEER
TYLER J. PETERSON
PE-27417
DATE 08/13/26
NORTH DAKOTA

NDDOT ABBREVIATIONS

D-101-1

?	This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.	C Gdrl	cable guardrail	Culv	culvert	FOS	factor of safety
Abn	abandoned	Calc	calculate	C&G	curb & gutter	Fed	Federal
Abut	abutment	CIP	cast iron pipe	CI	curb inlet	FP	feed point
Adj	adjusted	CB	catch basin	CR	curb ramp	Fn	fence
Aggr	aggregate	CRS	cationic rapid setting	C	cut	Fn P	fence post
Ahd	ahead	C Gd	cattle guard	Dd Ld	dead load	FO	fiber optic
ARV	air release valve	C To C	center to center	Defl	deflection	FD	field drive
Align	alignment	CL or $\varnothing$	centerline	Defm	deformed	F	fill
Al	alley	Ch	chain	DInt	delineate	FAA	fine aggregate angularity
Alt	alternate	Chnlk	chain-link	DIntr	delineator	FH	fire hydrant
Alum	aluminum	Ch Blk	channel block	Depr	depression	FI	flange
ADA	Americans with Disabilities Act	Ch Ch	channel change	Desc	description	Flrd	flared
&	and	Chk	check	Det	detail	FES	flared end section
Appr	approach	Chsld	chiseled	DWP	detectable warning panel	F Bcn	flashing beacon
Approx	approximate	Cir	circle	Dtr	detour	FA	flight auger sample
ACP	asbestos cement pipe	Cl	class	Dia or $\varnothing$	diameter	FL	flow line
Asph	asphalt	Clnt	clean-out	Dir	direction	Ftg	footing
AC	asphalt cement	Clr	clear	Dist	distance	FM	force main
Assmd	assumed	Cl&gr	clearing & grubbing	DM	disturbed material	Fnd	found
@	at	Comb.	combination	DB	ditch block	Fdn	foundation
Atten	attenuation	Coml	commercial	DG	ditch grade	Frac	fractional
ATR	automatic traffic recorder	Compr	compression	Dbl	double	Frwy	freeway
Ave	Avenue	CADD	computer aided drafting & design	Dn	down	Frt	front
Avg	average	Conc	concrete	Dwg	drawing	FF	front face
ADT	average daily traffic	CECB	concrete erosion control blanket	Dr	drive	F Disp	fuel dispenser
		Cond	conductor	Drwy	driveway	FFP	fuel filler pipes
		Const	construction	DI	drop inlet	FLS	fuel leak sensor
		Cont	continuous	D	dry density	Furn	furnish/ed
		CSB	continuous split barrel sample				
		Contr	contraction				
		Contr	contractor				
Bk	back	CP	control point	Ea	each		
BF	back face	Coord	coordinate	Esmt	easement		
Balc	balcony	Cor	corner	E	East		
B Wire	barbed wire	Corr	corrected	EB	Eastbound		
Barr	barricade	CAES	corrugated aluminum end section	Elast	elastomeric		
Btry	battery	CAP	corrugated aluminum pipe	EL	electric locker		
BI	beehive inlet	CMES	corrugated metal end section	E Mtr	electric meter		
Beg	begin	CMP	corrugated metal pipe	EVSE	electric vehicle supply equipment		
BG	below grade	CPVCP	corrugated poly-vinyl chloride pipe	Elec	electric/al		
BM	bench mark	CSES	corrugated steel end section	EDM	electronic distance meter		
Bkwy	bikeway	CSFES	corrugated steel flared end section	Elev or El	elevation		
Bit	bituminous	CSP	corrugated steel pipe	Ellipt	elliptical		
Blk	block	CSTES	corrugated steel traversable end section	Emb	embankment		
BH	bore hole	Co	County	Emuls	emulsion/emulsified		
Bot	bottom	Crse	course	ES	end section		
Blvd	Boulevard	Ct	Court	Engr	engineer		
Bndry	boundary	Xarm	cross arm	ESS	environmental sensor station		
Brkwy	breakaway	Xbuck	cross buck	Eq	equal		
Br	bridge	Xsec	cross sections	Evgr	evergreen		
Bldg	building	Xing	crossing	Exc	excavation		
Bus.	business	Xrd	crossroad	Exst	existing		
BV	butterfly valve	Crn	crown	Exp	expansion		
Byp	bypass			Expy	Expressway		
				E	external of curve		
				Extru	extruded		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



NORTH DAKOTA	
DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
08-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions

NDDOT ABBREVIATIONS

D-101-3

Salv	salvage(d)	Tel	telephone
San	sanitary sewer line	Tel B	Telephone Booth
Sec	section	Tel P	telephone pole
SL	section line	Tv	television
Sep	separation	Temp	temperature
Seq	sequence	Temp	temporary
Serv	service	TBM	temporary bench mark
Sht	sheet	T	thinwall tube sample
Shtng	sheeting	Ts	topsoil
Shldr	shoulder	Traf	traffic
Sw or Sdwk	sidewalk	TSCB	traffic signal control box
SD	sight distance	Tr	trail
SN	sign number	Transf	transformer
Sig	signal	Trans	transition
Sgl	single	TT	transmission tower
SRCP	slotted reinforced concrete pipe	TES	traversable end section
SC	slow curing	Trans	transverse
SS	slow setting	Trtd	treated
Sm	small	Trmt	treatment
S	South	Qc	triaxial compression
SE	Southeast	TERO	tribal employment rights ordinance
SW	Southwest	Tpl	triple
SB	Southbound	Typ	typical
Sp	spaces		
Spcl	special	Qu	unconfined compressive strength
SA	special assembly	Ugrnd	underground
SP	special provisions	Util	utility
G	specific gravity		
Spk	spike		
SB	split barrel sample	VG	valley gutter
SH	sprinkler head	Vap	vapor
SV	sprinkler valve	Vert	vertical
Sq	square	VCP	vitrified clay pipe
Stk	stake	Vol	volume
Std	standard	VSFS	vehicle speed feedback sign
N	standard penetration test		
Std Specs	standard specifications	Wkwy	walkway
Stm L	steam line	W	water content
SEC	steel encased concrete	WGV	water gate valve
SMA	stone matrix asphalt	WL	water line
SSD	stopping sight distance	WM	water main
SD	storm drain	WMV	water main valve
St	street	W Mtr	water meter
SPP	structural plate pipe	WSV	water service valve
SPPA	structural plate pipe arch	WW	water well
Str	structure	Wrng	wearing
Subd	subdivision	WIM	weigh in motion
Sub	subgrade	W	west
Sub Prep	subgrade preperation	WB	westbound
Ss	subsoil	Wrng	wiring
SS	supplement specification	W/	with
Supp	supplemental	W/o	without
Surf	surfacing		
Surv	survey		
Sym	symmetrical		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-03-15	General Revisions
04-23-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



NDDOT ABBREVIATIONS

D-101-4

MEASUREMENTS

ac	acres
A	ampere
Bd Ft	board feet
Cd	candela
cm	centimeter
C	coulomb
CF	cubic feet
m3	cubic meter
m3/s	cubic meters per second
CY	cubic yard
CY/mi	cubic yards per mile
D or Deg	degree
F	Fahrenheit
F	farad
ft	feet/foot
Gal	gallon
G	giga
Ha	hectare
H	henry
Hz	hertz
hr	hour(s)
in.	inch
J	joule
K	kelvin
kN	kilo newton
kPa	kilo pascal
kg	kilogram
kg/m3	kilogram per cubic meter
km	kilometer
K	Kip(s)
LF	linear foot
L	litre
Lm	lumen
L sum	lump sum
Lx	lux
M Hr	man hour
M	mega
m	meter
m/s	meters per second
mi	mile
mL	milliliter
mm	millimeter
mm/hr	millimeters per hour
n	nano
N	newton
Pa	pascal
lb	pounds
sec	seconds
S	siemens
SF	square feet
km2	square kilometer
m2	square meter
SY	square yard
Sta Yd	station yards
SI	Systems International

T	tesla
T/mi	tons per mile
V	volt
W	watt
Wb	weber

SURVEY DESCRIPTIONS

Az	azimuth
Bs	backsight
Brg	bearing
BP Cap	blue plastic cap
BS	both sides
BC	brass cap
CC	closing corner
CS	curve to spiral
Eq	equation
E	external of curve
FS	far side
FB	field book
Fs	foresight
Geod	geodetic
GIS	Geographical Information System
GPS	Global Positioning System
HI	height of instrument
IM	iron monument
I Pn	iron pin
LS	Land Surveyor (licensed)
LSIT	Land Surveyor In Training
L	length of curve
LC	long chord
LB	level book
MC	meander corner
Mer	meridian
M	mid ordinate of curve
NGS	National Geodetic Survey
NS	near side
Obsn	observation
Off Loc	office location
OP Cap	orange plastic cap
PK	Parker-Kalon nail
P Cap	plastic cap
PP Cap	pink plastic cap
PCC	point of compound curve
PC	point of curve
PI	point of intersection
PRC	point of reverse curvature
PT	point of tangent
POC	point on curve
POT	point on tangent
RTP	random traverse point
Rge	range
RP Cap	red plastic cap
SC	spiral to curve
SC	standard corner
ST	spiral to tangent
Sta	station
SE	superelevation
Tan	tangent
T	tangent (semi)
TS	tangent to spiral
Twp	township
TB	transit book
TP	traverse point
TP	turning point
USC&G	US Coast & Geodetic Survey
USGS	US Geologic Survey
VC	vertical curve
WC	witness corner
WGS	World Geodetic System
YP Cap	yellow plastic cap
Z	zenith

SOIL TYPES

Cl	clay
Cl F	clay fill
Cl Hvy	clay heavy
Cl Lm	clay loam
Co S	coal slack
C Gr	coarse gravel
CS	coarse sand
FS	fine sand
Gr	gravel
Lig Co	lignite coal
Lig Sl	lignite slack
Lm	loam
Rk	rock
Sd	sand
Sdy Cl	sandy clay
Sdy Cl Lm	sandy clay loam
Sdy Fl	sandy fill
Sdy Lm	sandy loam
Sc	scoria
Sh	shale
Si Cl	silt clay
Si Cl Lm	silty clay loam
Si Lm	silty loam

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	Sheet Added
4-14-25	- Continued from D-101-3 General Revisions



NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS

D-101-10

702COM
ACCENT
AGASSIZ WU
AGC
ALL PL
ALL SEAS WU
AMOCO PI
AMRDA HESS
AT&T
B PAW
BAKER ELEC
BASIN ELEC
BEK TEL
BELLE PL
BLM
BNSF
BOEING
BRNS RWD
BURK-DIV ELEC
BURL WRD
CABLE ONE
CABLE SERV
CAP ELEC
CASS CO ELEC
CASS RWU
CAV ELEC
CBLCOM
CENEX PL
CENT PL WATER DIST
CENT PWR ELEC
CENTURYLINK
COE
CONS COMM
CONS TELCOM
CONT RES
CPR
D O E
DAK CARR
DAK CENT TEL
DAK RWD
DGC
DICKY R NET
DICKY WRD
DICKY TEL
DNRR
DOME PL
DVELEC
DVMW
E CENT REG WD
ENBRDG
ENVENTIS
EQUINOR
FALK MNG
FHWA
G FKS-TRL WD
GETTY TRD & TRAN
GLDN W ELEC

702 Communications
Accent Communications
Agassiz Water Users District
Associated General Contractors of America
Alliance Pipeline
All Seasons Water Users District
Amoco Pipeline Company
Amerada Hess Corporation
AT&T Corporation
Bear Paw Energy Incorporated
Baker Electric
Basin Electric Cooperative Incorporated
Bek Communications Cooperative
Belle Fourche Pipeline Company
Bureau of Land Management
Burlington Northern Santa Fe Railway
Boeing
Barnes Rural Water District
Burke-Divide Electric Cooperative
Burleigh County Water Resource District
Cable One
Cable Services
Capital Electric Cooperative Incorporated
Cass County Electric Cooperative
Cass Rural Water Users District
Cavalier Rural Electric Cooperative
Cablecom Of Fargo
Cenex Pipeline
Central Pipe Line Water District
Central Power Electric Cooperative
CenturyLink
Corps of Engineers
Consolidated Communications
Consolidated Telcom
Continental Resource Inc
Canadian Pacific Railway
Department Of Energy
Dakota Carrier Network
Dakota Central Telephone
Dakota Rural Water District
Dakota Gasification Company
Dickey Rural Networks
Dickey County Water Resource District
Dickey Telephone
Dakota Northern Railroad
Dome Pipeline Company
Dakota Valley Electric Cooperative
Dakota, Missouri Valley & Western
East Central Water District
Enbridge Pipelines Incorporated
Enventis Telephone
Equinor Pipeline
Falkirk Mining Company
Federal Highway Administration
Grand Forks-traill Water District
Getty Trading & Transportation
Golden West Electric Cooperative

GTR RAMSEY WD
GT PLNS NAT GAS
HALS TEL
IDEA1
INT-COMM TEL
KANEB PL
KEM ELEC
KOCH GATH SYS
LKHD PL
LWR YELL R ELEC
LUMEN
MCKNZ CON
MCKNZ ELEC
MCKNZ WRD
MCLEOD
MCLN ELEC
MCLN-SHRDN R WAT
MDU
MIDCO
MIDSTATE TEL
MINOT CABLE
MINOT TEL
MISS VALL COMM
MISS W W S
MNMKOTA PWR
MOR-GRAN-SOU ELEC
MOUNT-WILLI ELEC
MLGC
MUNICIPAL
MUNICIPAL
N CENT ELEC
N PRAIR REG WD
ND PKS & REC
ND TEL
NDDOT
NE REG WD
NDSU SOIL SCI DEPT
NEMONT TEL
NODAK R ELEC
NOON FRMS TEL
NPR
NSP
NTHN BRDR PL
NTHN PLNS ELEC
NTHWSTRN REF
NW COMM
NWRWD
ONEOK
OSHA
OTTR TL PWR
PAAP
P L E M
POLAR COM
PVT ELEC
QWEST
R&T REG WD

Greater Ramsey Water District
Great Plains Natural Gas Company
Halstad Telephone Company
Idea1
Inter-Community Telephone Company
Kaneb Pipeline Company
Kem Electric Cooperative Incorporated
Koch Gathering Systems Incorporated
Lakehead Pipeline Company
Lower Yellowstone Rural Electric
Lumen Technologies Incorporated
McKenzie Consolidated Telcom
McKenzie Electric Cooperative
McKenzie County Water Resource District
McLeod USA
McLean Electric Cooperative
McLean-Sheridan Rural Water District
Montana-dakota Utilities
MidContinent Communications
Midstate Telephone Company
Minot Cable Television
Minot Telephone Company
Missouri Valley Communications Incorporated
Missouri West Water System
Minnkota Power
Mor-gran-sou Electric Cooperative
Mountrail-williams Electric Cooperative
Moore & Liberty - Griggs County
City Water And Sewer
City Of '.....'
North Central Electric Cooperative
North Prairie Regional Water District
North Dakota Parks And Recreation
North Dakota Telephone Company
North Dakota Department of Transportation
Northeast Regional Water District
NDSU Soil Science Department
Nemont Telephone
Nodak Rural Electric Cooperative
Noonan Farmers Telephone Company
Northern Plains Railroad
Northern States Power
Northern Border Pipeline
Northern Plains Electric Cooperative Incorporated
Northwestern Refinery Company
Northwest Communication Cooperation
Northwest Rural Water District
Oneok gas
Occupational Safety and Health Administration
Otter Tail Power Company
Plains All American Pipeline
Praiarielands Energy Marketing
Polar Communications
Private Electric
Qwest Communications
R & T Water District

RED RIV COMM
RESVTN TEL
ROBRTS TEL
R-RIDER ELEC
RRVW
S CENT REG WD
SE W U
SCOTT CABLE
SHERDN ELEC
SHEYN VLY ELEC
SKYTECH
SLOPE ELEC
SOURIS RIV TELCOM
ST WAT COMM
STATE LN WATER
STER ENG
STUT RWD
SW PL PRJ
SWWA
SUNOCO
T M C
TCI
TESORO GHG PLNS PL
TRI-CNTY WU
TRL CO WRD
UNTD TEL
UPPR SOUR WD
US SPRINT
USAF MSL CABLE
USFWS
USW COMM
VRNDRY ELEC
W RIV TEL
WAPA
WAWSA
WEB
WILLI WRD
WILSTN BAS PL
WLSH RWD
WOLVRTN TEL
XLENER
YSVR

Red River Communications
Reservation Telephone
Roberts Company Telephone
Roughrider Electric Cooperative
Red River Valley & Western Railroad
South Central Regional Water District
Southeast Water Users Incorporated
Scott Cable Television Dickinson
Sheridan Electric Cooperative
Sheyenne Valley Electric Cooperative
Skyland Technologies Incorporated
Slope Electric Cooperative Incorporated
Souris River Telecommunications
State Water Commission
State Line Water Cooperative
Sterling Energy
Stutsman Rural Water District
Southwest Pipeline Project
Southwest Water Authority
Sunoco LP
Turtle Mountain Communications
TCI of North Dakota
Tesoro High Plains Pipeline
Tri-County Water Users Incorporated
Traill County Water Resource District
United Telephone
Upper Souris Water District
U.S. Sprint
U.S.A.F. Missile Cable
US Fish and Wildlife Service
U.S. West Communications
Verendrye Electric Cooperative
West River Telephone Incorporated
Western Area Power Administration
Western Area Water Supply Authority
W. E. B. Water Development Association
Williams County Water Resource District
Williston Basin Interstate Pipeline Company
Walsh Water Rural Water District
Wolverton Telephone
Xcel Energy
Yellowstone Valley Railroad

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
04-23-18	General Revisions
09-20-18	General Revisions
12-18-20	General Revisions
08-16-22	General Revisions
04-14-25	General Revisions



LINE STYLES

D-101-20

Existing Topography

	Existing Ground Void
	Existing Cemetary Boundary
	Existing Box Culvert Bridge
	Existing Concrete Surface
	Existing Drainage Structure
	Existing Gravel Surface
	Existing Riprap
	Existing Dirt Surface
	Existing Asphalt Surface
	Existing Tie Point Line
	Existing Railroad Centerline
	Existing Guardrail Cable
	Existing Guardrail Metal
	Existing Edge of Water
	Existing Fence
	Existing Railroad
	Existing Field Line
	Exst Flow
	Existing Curb
	Existing Valley Gutter
	Existing Driveway Gutter
	Existing Curb and Gutter
	Existing Mountable Curb and Gutter

	Existing 3-Cable w Posts
	Site Boundary
	Existing Berm, Dike, Pit, or Earth Dam
	Existing Ditch Block
	Existing Tree Boundary
	Existing Brush or Shrub Boundary
	Existing Retaining Wall
	Existing Planter or Wall
	Existing W-Beam Guardrail with Posts
	Existing Railroad Switch
	Gravel Pit - Borrow Area
	Existing Wet Area-Vegetation Break
	Existing High Tension Cable Guardrail
	Existing High Tension Cable Guardrail with Posts

Proposed Topography

	3-Cable w Posts
	Flow
	Fence
	Remove Line
	Wall
	Retaining Wall (Plan View)
	W-Beam w Posts
	High Tension Cable Guardrail with Posts

Existing Utilities

	Existing Electrical
	Existing Fiber Optic Line
	Existing TV Fiber Optic
	Existing Gas Pipe
	Existing Overhead Utility Line
	Existing Power
	Existing Fuel Pipeline
	Existing Undefined Above Ground Pipe Line
	Existing Sanitary Sewer
	Existing Sanitary Force Main
	Existing Storm Drain
	Existing Storm Drain Force Main
	Existing Culvert
	Existing Telephone Line
	Existing TV Line
	Existing Water or Steam Line
	Existing Under Drain
	Existing Slotted Drain
	Existing Conduit
	Existing Conductor
	Existing Down Guy Wire Down Guy
	Existing Underground Vault or Lift Station

Proposed Utilities

	24 Inch Pipe
	Reinforced Concrete Pipe
	Under Drain
	Edge Drain

Traffic Utilities

	Conductor
	Fiber Optic
	Existing Loop Detector
	Existing Double Micro Loop Detector
	Micro Loop Detector Double
	Existing Micro Loop Detector
	Micro Loop Detector
	Signal Head with Mast Arm
	Existing Signal Head with Mast Arm

Sign Structures

	Existing Overhead Sign Structure
	Existing Overhead Sign Structure Cantilever
	Overhead Sign Structure Cantilever

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups
12-18-20	General Revisions

LINE STYLES

D-101-21

Right Of Way

	Easement
	Existing Easement
	Right of Way
	Existing Right of Way
	Existing Right of Way Railroad
	Existing Right of Way Not State Owned
	Existing Government Lot Line
	Existing Adjacent Block Lines
	Existing Adjacent Lot Lines
	Existing Adjacent Property Line
	Existing Adjacent Subdivision Lines
	Sight Distance Triangle Line
	Dimension Leader

Boundary Control

	Existing City Corporate Limits or Reservation Boundary
	Existing State or International Line
	Existing Township
	Existing County
	Existing Section Line
	Existing Quarter Section Line
	Existing Sixteenth Section Line
	Existing Centerline
	Tangent Line

Cross Sections and Typicals

	Existing Ground
	Existing Topsoil (Cross Section View)
	Existing Ground Void (Not Surveyed)
	Existing Concrete
	Existing Aggregate (Cross Section View)
	Existing Curb and Gutter (Cross Section View)
	Existing Asphalt (Cross Section View)
	Existing Reinforcement Rebar

Geotechnical

	Geotextile Fabric Type D
	Geogrid
	Geotextile Fabric Type R
	Geotextile Fabric Type R1
	Geotextile Fabric Type RR
	Geotextile Fabric Type S
	Subgrade Reinforcement
	Failure Line

Countours

	Depression Contours
	Supplemental Contour

Profile

	Subgrade, Subcut or Ditch Grade
	Topsoil Profile

Striping

	Centerline Pavement Marking
	Barrier with Centerline Pavement Marking
	Barrier Pavement Marking
	Stripe 4 IN Dotted Extension White
	Stripe 8 IN Dotted Extension White
	Stripe 8 IN Lane Drop

Pavement Joints

	Doweled Joint
	Tie Bar 30 Inch 4 Foot Center to Center
	Tie Bar 18 Inch 3 Foot Center to Center
	Tie Bar at Random Spacing

Bridge Details

	Small Hidden Object
	Large Hidden Object
	Phantom Object
	Existing Conditions Object
	Centerline Main
	Centerline Secondary
	Excavation Limits
	Proposed Ground
	Sheet Piling

Erosion Control

	Limits of Const Transition Line
	Bale Check
	Rock Check
	Floating Silt Curtain
	Silt Fence
	Excavation Limits
	Fiber Rolls

Environmental

	Wetland Mitigation
	Existing Wetland Easement USFWS
	Existing Wetland Jurisdictional
	Existing Wetland
	Tree Row

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION

07-01-14

REVISIONS

DATE	CHANGE
09-23-16	Added and Revised Items, Organized by Functional Groups General Revisions
12-18-20	

KIRK J. HOFF

REGISTERED

PROFESSIONAL

PE-4683

ENGINEER

NORTH DAKOTA

12 18 2020

SYMBOLS

D-101-30

	North Arrow (Half Scale)		Existing Bush or Shrub		Continuous Split Barrel Sample
	Alignment Data Point		Existing Large Evergreen Tree		Flight Auger Sample
	Alignment Monument		Existing Small Evergreen Tree		Split Barrel Sample
	Spot Elevation		Existing Large Tree		Thinwall Tube Sample
	Existing Miscellaneous Spot		Existing Small Tree		Standard Penetration Test
	Existing Access Control Arrow		Existing Tree Trunk		Inclinometer Tube
	Existing Benchmark		Cairn or Stone Circle		Excavation Unit
	Reset USGS Marker		Existing Artifact		Existing Ground Water Well Bore Hole
	Iron Monument Found		Existing Satellite Dish		
	Iron Pin R/W Monument		Existing Weather Station		
	Property Corner		Existing Windmill or Tower		
	Iron Pin Reference Monument		Reinforced Pavement		
	Right of Way Marker (Exst, Ppsd, Reset)				
	Existing Federal Reference Corner				
	Existing Section Corner (Full, Quarter, Sixteenth, Meander)				
	Existing Witness Corner				
	Existing Control Point (CP, GPS-RTK, TRI)				
	Existing Traverse PI Aerial Panel				
	Existing Reference Marker Point NGS				
	Existing EFB Misc				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

12 18 2020

SYMBOLS

D-101-31

	Flexible Delineator		Highway Sign (Exst, Ppsd)
	Flexible Delineator Type A (Exst, Ppsd)		Mile Post Type A (Exst-Ppsd-Reset)
	Flexible Delineator Type B (Exst, Ppsd)		Mile Post Type B (Exst, Ppsd)
	Flexible Delineator Type C (Exst, Ppsd)		Mile Post Type C (Exst, Ppsd)
	Flexible Delineator Type D (Exst, Ppsd)		Object Marker Type I (Exst, Ppsd)
	Flexible Delineator Type E (Exst, Ppsd)		Object Marker Type II (Exst, Ppsd)
	Delineator Type A (Exst, Ppsd, Diamond Grade-Reset)		Object Marker Type III (Exst, Ppsd)
	Delineator Type B (Exst, Ppsd, Diamond Grade-Reset)		Existing Reference Marker
	Delineator Type C (Exst, Ppsd, Diamond Grade)		Road Closure Gate 18 Ft (Exst, Ppsd)
	Delineator Type D (Exst, Ppsd, Diamond Grade)		Road Closure Gate 28 Ft (Exst, Ppsd)
	Delineator Type E (Exst, Ppsd, Diamond Grade)		Road Closure Gate 40 Ft (Exst, Ppsd)
	Barricade (Type I, Type II, Type III)		Existing Railroad Battery Box
			Existing RR Profile Spot
			Existing Railroad Crossbuck
	Arrow Panel (Caution Mode, Double Direction, Left Directional, Right Directional, Sequencing, Truck Mounted)		Existing Railroad Frog
	Attenuation Device		Existing Mailbox (Private, Federal)
	Truck Mounted Attenuator		
	Delineator Drums		
	Flagger		
	Tubular Marker		
	Traffic Cone		
	Back to Back Vertical Panel Sign		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

12 18 2020

SYMBOLS

D-101-32

	Existing Luminaire			High Mast Light Standard 3 Luminaire (Exst, Ppsd)		Existing Traffic Signal Standard		
	Luminaire LED			High Mast Light Standard 4 Luminaire (Exst, Ppsd)				Pull Box (Exst-Ppsd-Undefined)
	Existing Light Standard Luminaire			High Mast Light Standard 5 Luminaire (Exst, Ppsd)				Intelligent Transportation Pull Box (Exst, Ppsd)
	Relocate Light Standard			High Mast Light Standard 6 Luminaire (Exst, Ppsd)				Transformer (Exst, Ppsd)
	Light Standard Light LED Luminaire			High Mast Light Standard 7 Luminaire (Exst, Ppsd)				Power Pole (Exst-Ppsd-with Transformer)
	Light Standard 35 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 8 Luminaire (Exst, Ppsd)				Wood Pole (Exst, Ppsd)
	Light Standard 50 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 9 Luminaire (Exst, Ppsd)				Pedestrian Push Button Post (Exst, Ppsd)
	Light Standard 70 Watt High Pressure Sodium Vapor Luminaire			High Mast Light Standard 10 Luminaire (Exst, Ppsd)				Existing Pole
	Light Standard 100 Watt High Pressure Sodium Vapor Luminaire			Overhead Sign Structure Load Center (Exst, Ppsd)				Existing Telephone Pole
	Light Standard 150 Watt High Pressure Sodium Vapor Luminaire			Traffic Signal Controller (Exst, Ppsd)				Existing Post
	Light Standard 200 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Traffic Signal Controller (Exst, Ppsd)				Connection Conductor (Ground, Neutral, Phase 1, Phase 2)
	Light Standard 250 Watt High Pressure Sodium Vapor Luminaire			Flashing Beacon (Exst, Ppsd)				
	Light Standard 310 Watt High Pressure Sodium Vapor Luminaire			Concrete Foundation (Exst, Ppsd)				
	Light Standard 400 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Flasher (Exst, Ppsd)				
	Light Standard 700 Watt High Pressure Sodium Vapor Luminaire			Pad Mounted Feed Point (Exst, Ppsd)				
	Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire			Pipe Mounted Feed Point with Pad (Exst, Ppsd)				
	Emergency Vehicle Detector			Pole Mounted Feed Point (Exst, Ppsd)				
	Video Detection Camera			Junction Box (Exst, Ppsd)				
				Existing Pedestrian Head with Number				
				Existing Signal Head				
				Pole Mounted Head				
				Existing Lighting Standard Pole				

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions

KIRK J. HOFF
REGISTERED
PROFESSIONAL

Kirk J Hoff

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14 REVISIONS	
DATE	CHANGE
12-18-20	General Revisions



12 18 2020

SYMBOLS

D-101-33

			Existing Manhole (Electrical, Gas, Telephone)		Cap or Stub Exst Gas, Exst Sanitary, Exst Storm Drain, Ppsd Storm Drain, Exst Water
			Water Manhole (Exst, Exst with Valve)		Existing Pedestal Electrical, Telephone, Fiber Optic Telephone, TV, Fiber Optic TV, Undefined
			Sanitary Sewer Manhole (Exst, Ppsd, Exst with Valve)		Existing Pipe Vent Gas, Fuel, Sanitary, Storm Drain, Water, Undefined
			Sanitary Force Main Manhole (Exst, Ppsd, Exst with Valve)		Valve Exst Gas, Exst Water, Ppsd Water, Exst Undefined
			Storm Drain Manhole (Exst, Ppsd, Exst with Inlet, Ppsd with Inlet)		Pump Sanitary, Storm Drain, Exst Water
			Force Main Storm Drain Manhole (Exst, Exst with Valve)		Corrugated Metal End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Manhole (Ppsd, Ppsd 48 Inch, Exst Undefined)		Reinforced Concrete End Section (18, 24, 30, 36, 42, 48, 54, 60 Inch)
			Existing Water Appurtenance		Existing Utility Marker
			Sprinkler Head (Exst, Ppsd)		Existing Meter
			Fire Hydrant (Exst, Ppsd)		Existing Fuel Dispensers
			Cleanout (Exst Sanitary, Underdrain)		Existing Fuel Filler Pipes
			Existing Catch Basin Inlet (Round, Square)		Existing Fuel Leak Sensors
			Existing Curb Inlet (Round, Square)		
			Existing Slotted Reinforced Concrete Pipe		
			Catch Basin (Riser 30 Inch, Beehive, Type A)		
			Inlet Mountable Curb (Type A, Type B)		
			Inlet Saddle Base (Type 1, Type 2)		
			Inlet Special (Catch Basin, Type 1, Type A)		
			Inlet (Tee, Type 1, Type 2, Type 2 Double)		
			Median Drain		
			Headwall (Exst, Ppsd, Ppsd Single with Vegetation Barrier, Ppsd Double with Vegetation Barrier)		



NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE
12-18-20	General Revisions Sheet added - Continued from D-101-32

KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 18 2020

TRAFFIC CONTROL FOR CORING OF HOT BITUMINOUS PAVEMENT



D-704-2

Two Lane, Two Way Roadways

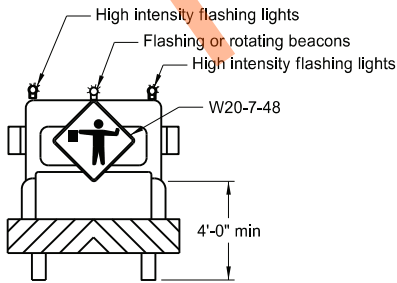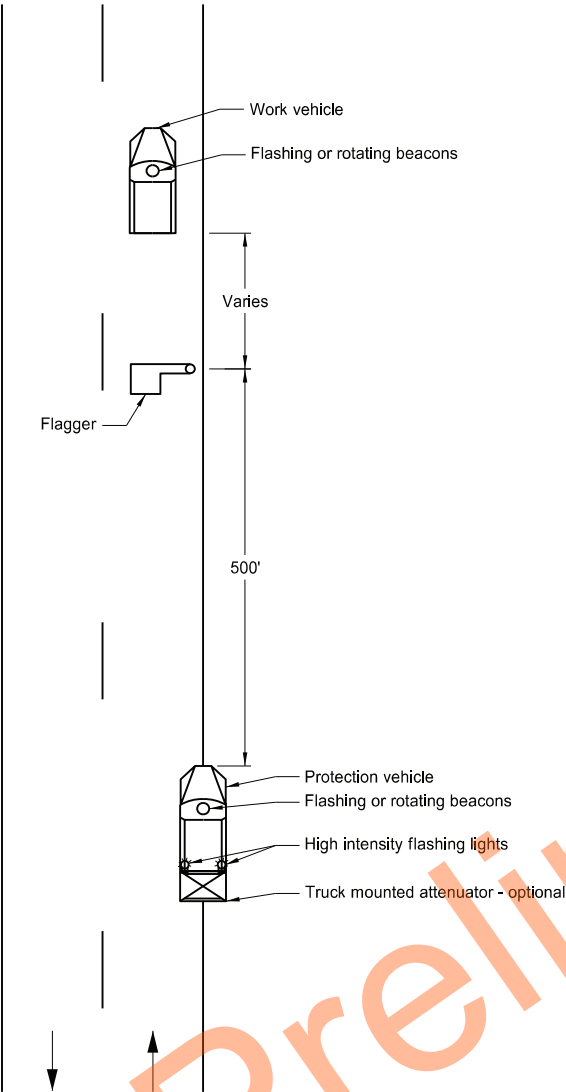

Typical Protection Vehicle

Multilane Roadways

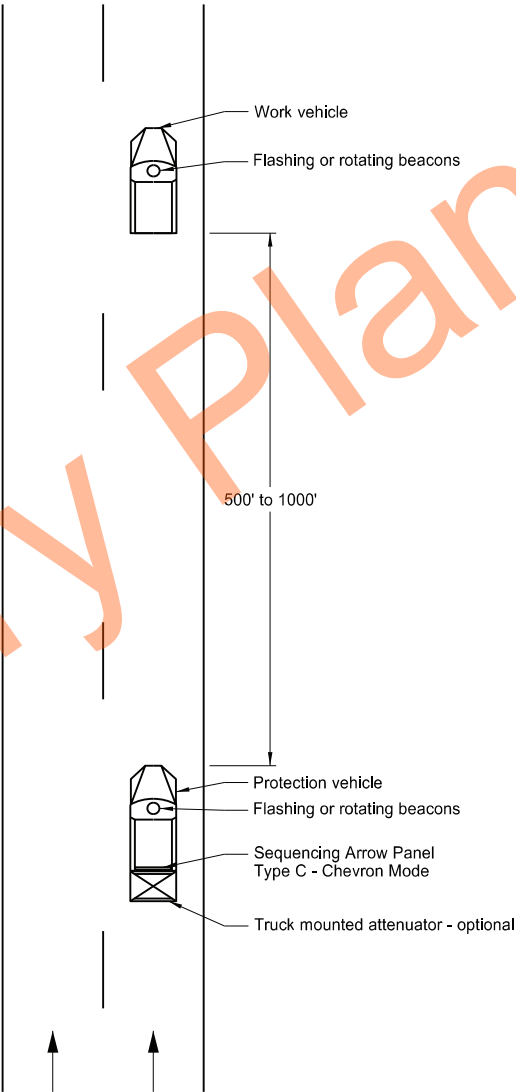

Typical Protection Vehicle


- Notes:
1. Display a 360 degree rotating, flashing, oscillating or strobe light on the working vehicle.
 2. Display a 360 degree rotating, flashing, oscillating or strobe light on the shadow vehicle. Operate a sequencing arrow panel Type C in chevron mode on the shadow vehicle for Multilane Roadway.
 3. Use these layouts during daylight hours and in areas of good visibility only.
 4. Use flagger to protect the work area and warn oncoming traffic for two lane, two way roadway.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-25-12	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature


08/01/24

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS


D-704-7

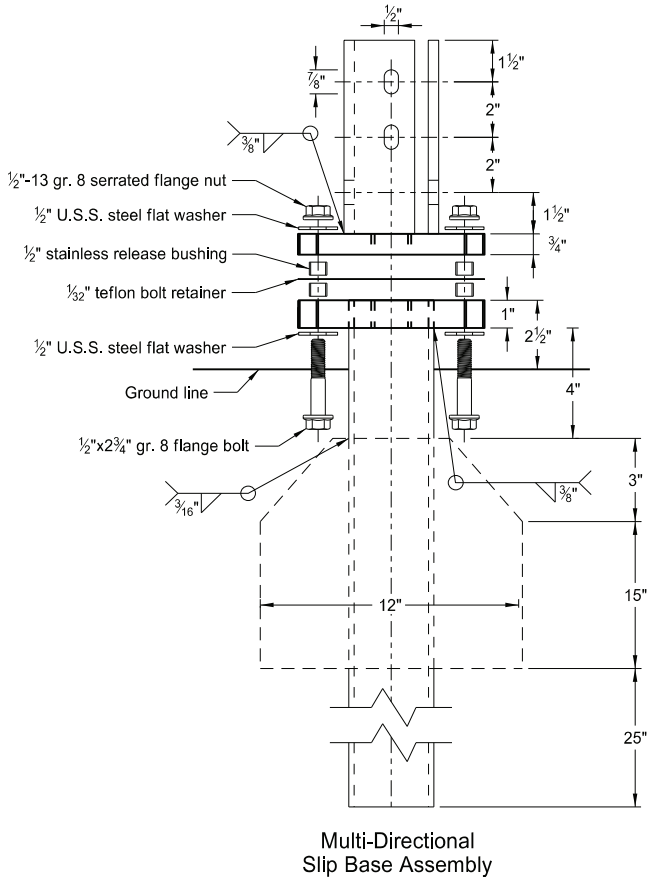

Perforated Tube

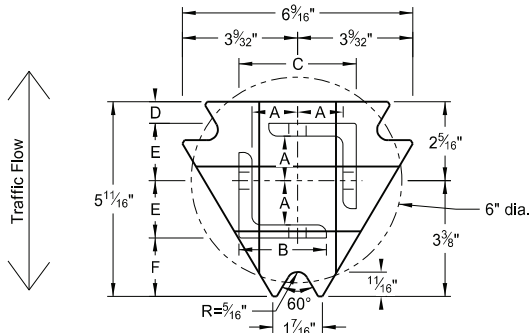

Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2 1/2"x2 1/2"x3/8" ASTM A36 structural angle

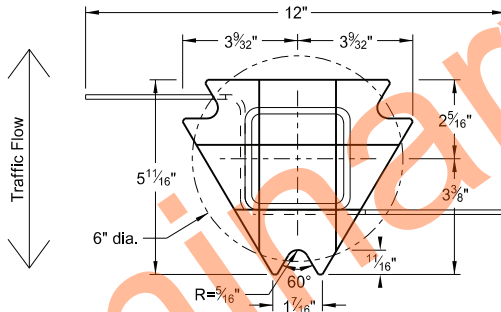

Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50

Notes:

1. Torque slip base bolts as specified by manufacturer.
2. Use anchor with 43.9 KSI yield strength and 59.3 KSI tensile strength.
3. Provide 4" vertical clearance for anchor or breakaway base. Measure the 4"x60" measurement above and below post location and back and ahead of post.
4. In concrete sidewalk, use same anchor without wings.
5. Provide more than 7' between the first and fourth posts of a four post sign.

Telescoping Perforated Tube

Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube


Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785

Top Post Receiver Data Table


Square Post Sizes (B)	A	B	C	D	E	F
2 3/16"x10 ga.	1 5/16"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 7/8"
2 1/2"x10 ga.	1 3/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

(A) Use breakaway base when support is placed in weak soils. Engineer determines if soils are weak.


(B) For additional wind load, insert the 2 3/16"x10 ga. into 2 1/2"x10 ga.

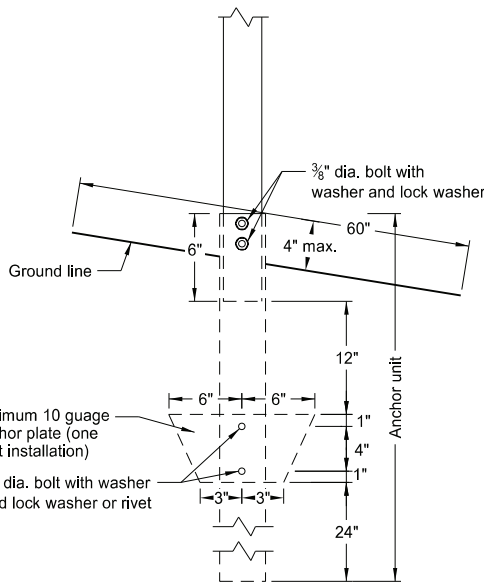

Anchor Unit and Post Assembly

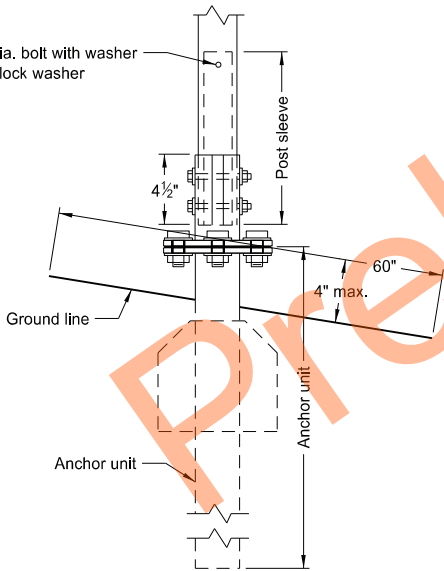

Multi-Directional Slip Base Anchor Unit and Post Sleeve Assembly

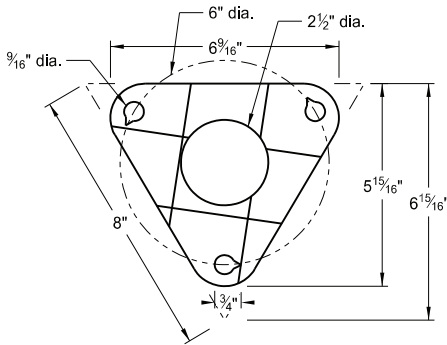

Bolt Retainer for Base Connection
Bolt Retainer- 1/32" Reprocessed Teflon

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature








08/01/24

BREAKAWAY SYSTEMS FOR CONSTRUCTION ZONE SIGNS

D-704-8

U-Channel Post

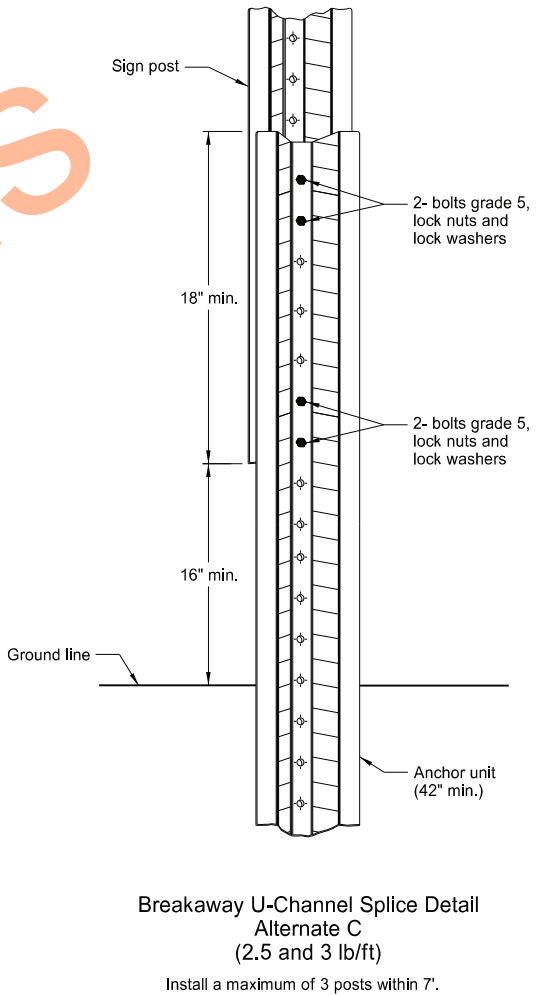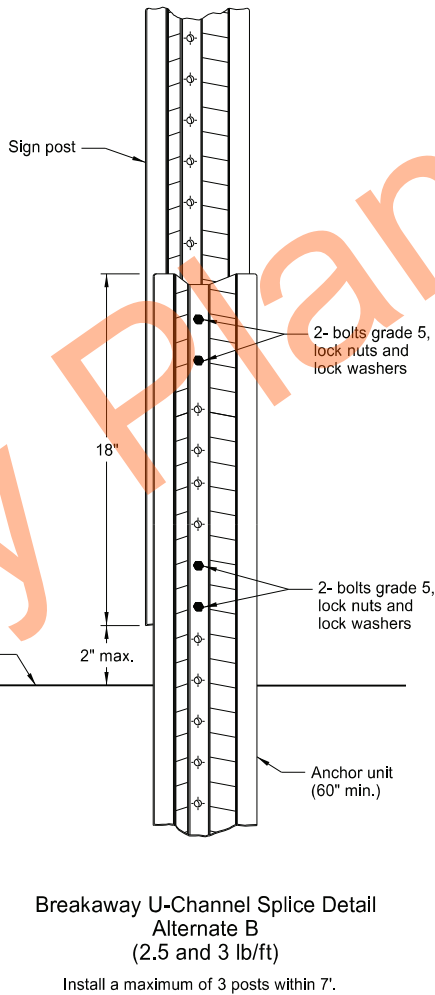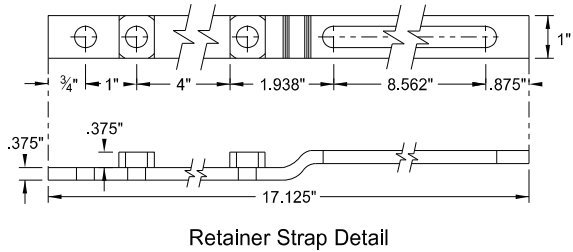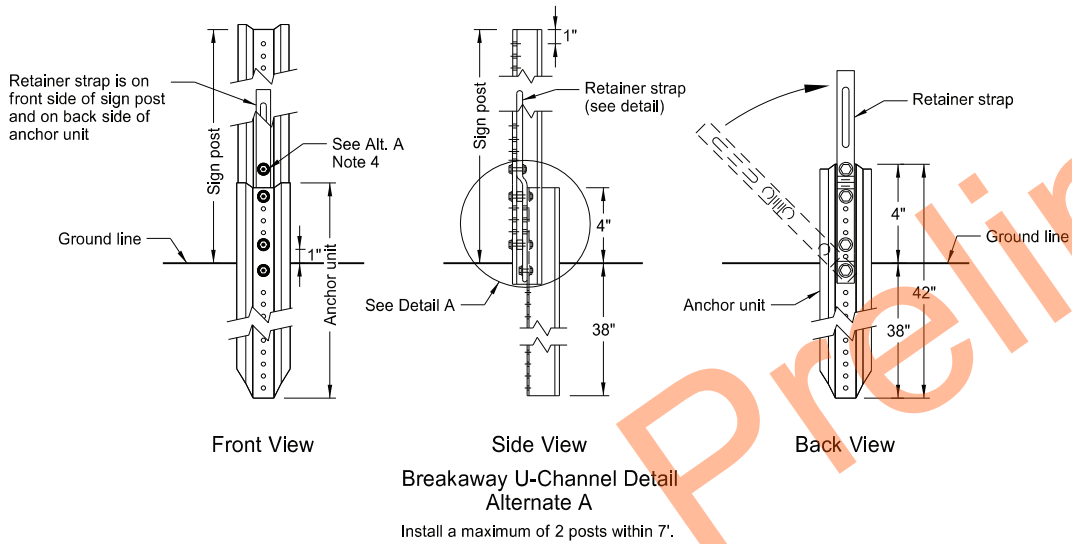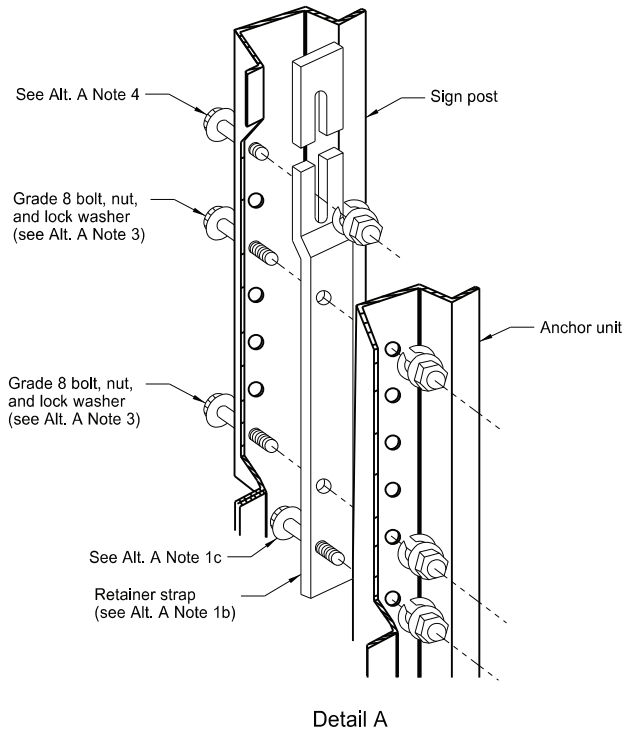

Alternate A Steps of Installation:

- a) Drive anchor unit to within 12" of ground level.
b) Establish proper assembly by lining up bottom hole of retainer strap with 6th hole from the top of the anchor unit.
c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
d) Rotate strap 90° to left.
- a) Drive anchor unit to 4" above ground.
b) Rotate strap to vertical position.
- a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
b) Alternately tighten two connector bolts.
- Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
- Properly nest base post, strap, and sign post. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
10-03-19	New Design Engr PE Stamp
8-01-24	Electronic Stamp/Signature




08/01/24


CONSTRUCTION SIGN DETAILS
TERMINAL AND GUIDE SIGNS



G20-1-60
Legend: black (non-refl)
Background: orange

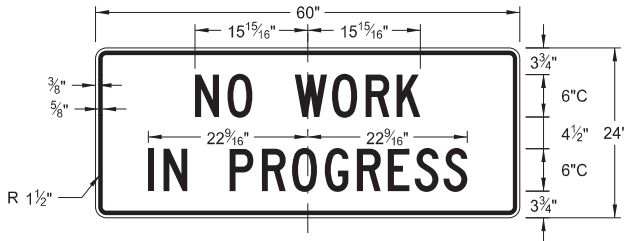


G20-1b-60
Legend: black (non-refl)
Background: orange

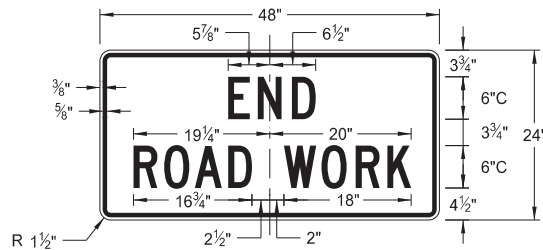


G20-2-48
Legend: black (non-refl)
Background: orange




G20-4b-36
Legend: black (non-refl)
Background: orange

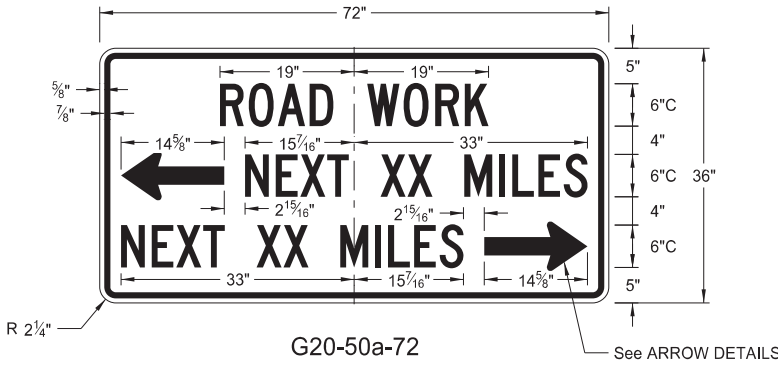


G20-50a-72
Legend: black (non-refl)
Background: orange

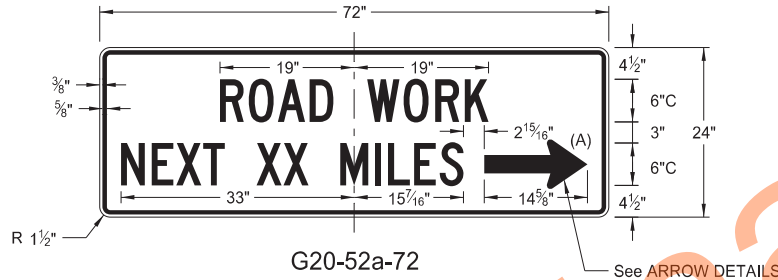


G20-52a-72
Legend: black (non-refl)
Background: orange

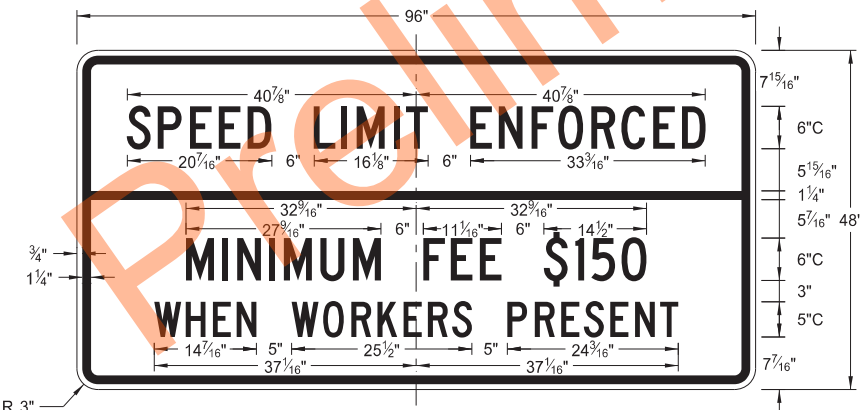


G20-55-96
Legend: black (non-refl)
Background: orange

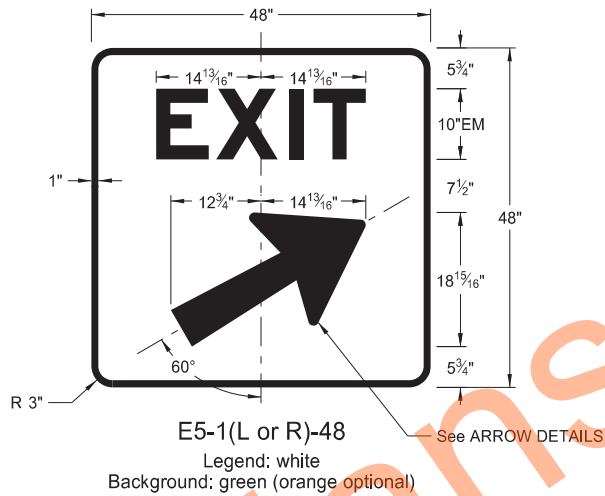


E5-1(L or R)-48
Legend: white
Background: green (orange optional)

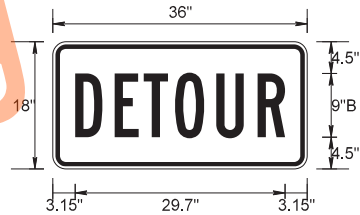


M4-8-36
Legend: black (non-refl)
Background: orange

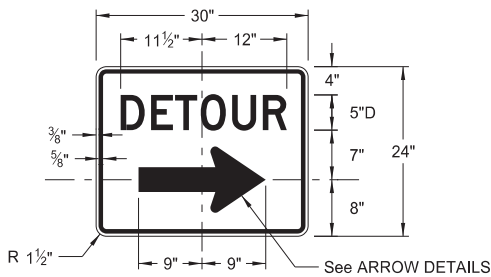


M4-9(L or R)-30 &
M4-9-30
Legend: black (non-refl)
Background: orange

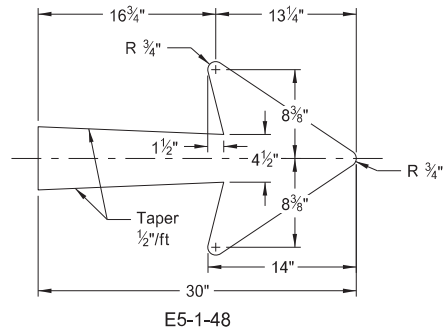


E5-1-48




G20-50a-72
G20-52a-72



M4-9(L or R)-30
Right or Left



M4-9(L or R)-30
Advanced Right or Left



M4-9-30
Straight

ARROW DETAILS

NOTES:


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added sign & background color
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes




CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS


D-704-10

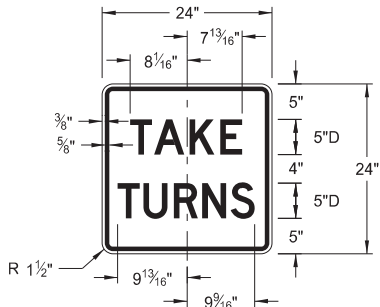


R1-50P-24
Legend: black (non-refl)
Background: white

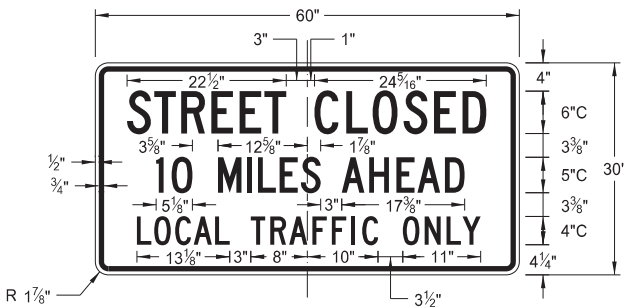


R11-3c-60
Legend: black (non-refl)
Background: white



R2-1aP-24
Legend: black (non-refl)
Background: white

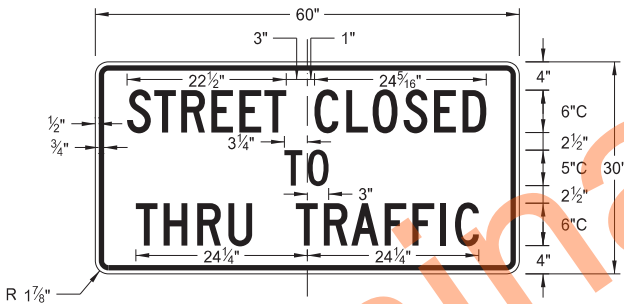

R11-4a-60
Legend: black (non-refl)
Background: white



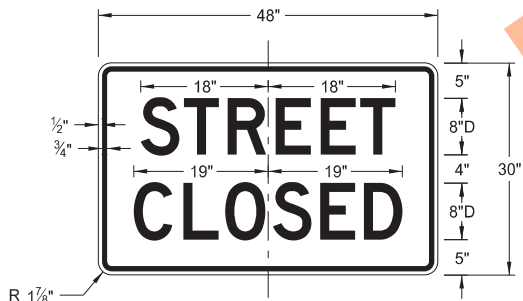


R11-2a-48
Legend: black (non-refl)
Background: white








NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE
08-17-17	Revised sign number
10-03-19	New Design Engineer PE Stamp
08-01-24	Electronic Stamp/Signature
06-30-25	Legislative Changes



D-704-11



* DISTANCE MESSAGES

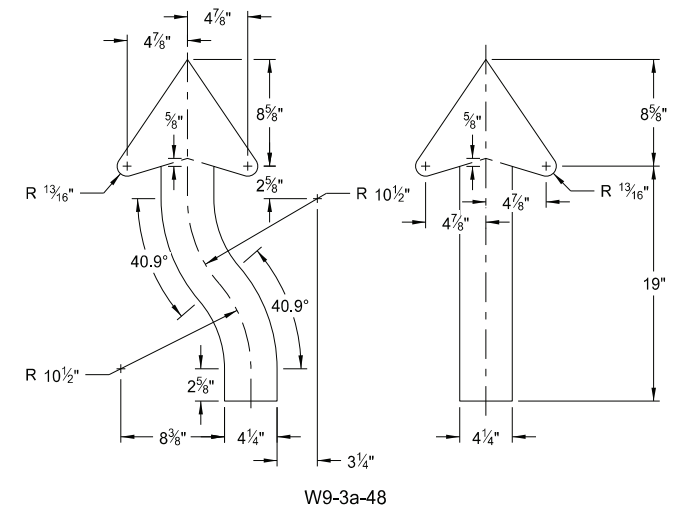


ARROW DETAILS

08/01/24

CONSTRUCTION SIGN DETAILS
WARNING SIGNS


WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard

* DISTANCE MESSAGES




W16-7aP-18

Legend: black (non-refl)
Background: orange

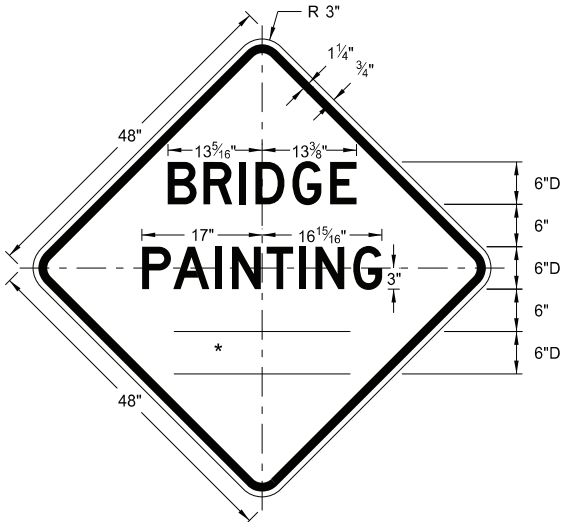


W21-50-48

Legend: black (non-refl)
Background: orange

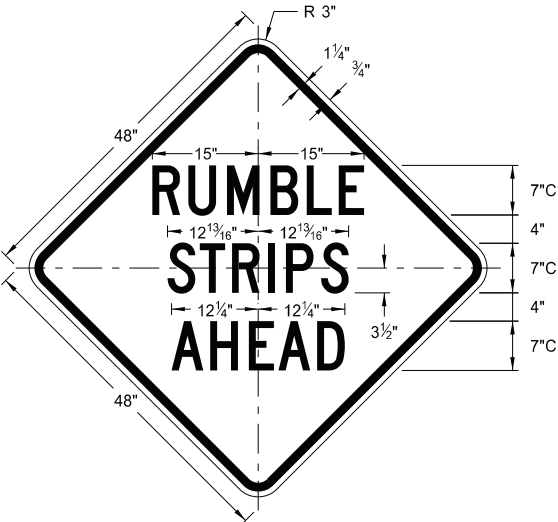


W21-53-48

Legend: black (non-refl)
Background: orange

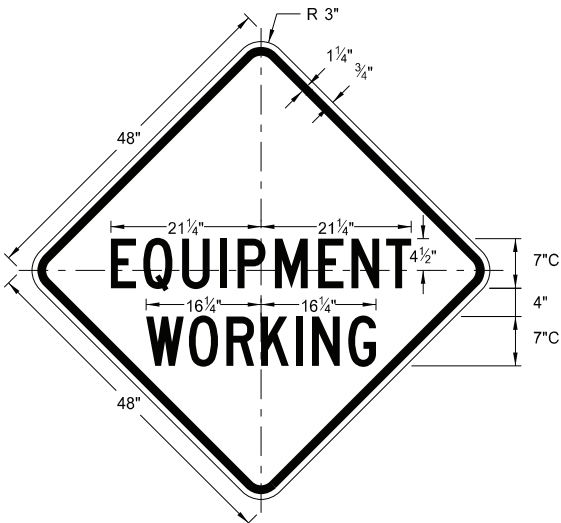


W20-51-48

Legend: black (non-refl)
Background: orange

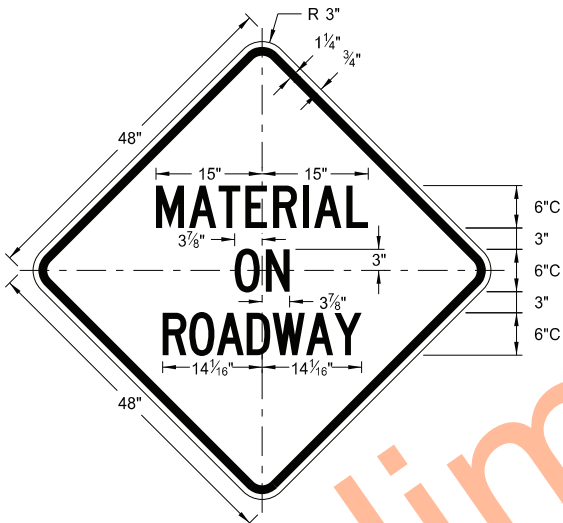


W21-51-48

Legend: black (non-refl)
Background: orange

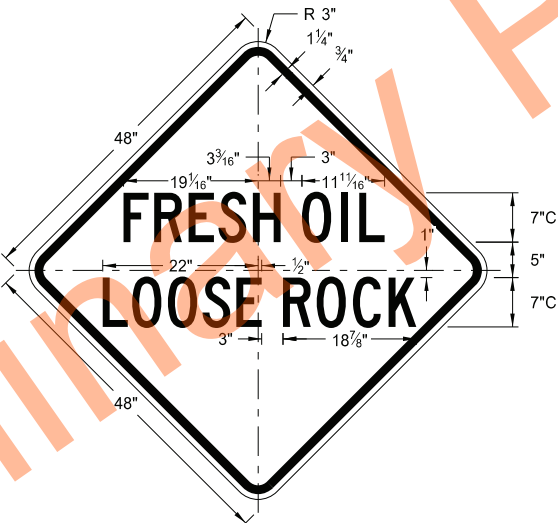


W22-8-48

Legend: black (non-refl)
Background: orange

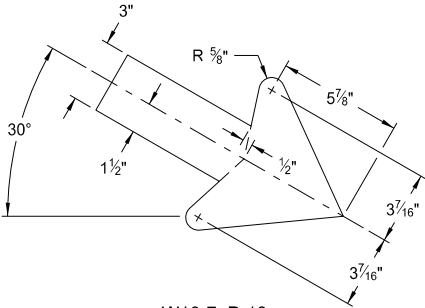


W16-7aP-18



W20-52P-54

Legend: black (non-refl)
Background: orange

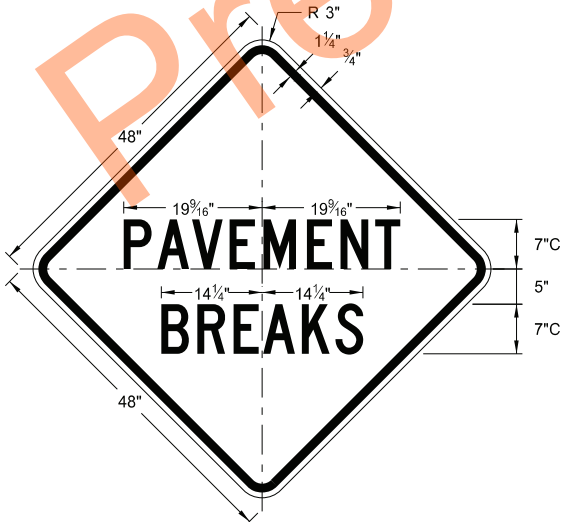

W21-52-48


Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
5-31-18	
REVISIONS	
DATE	CHANGE
11-01-19	Added details for sign W16-7aP-18.
8-01-24	Electronic Stamp/Signature.




08/01/24

BARRICADE AND CHANNELIZING DEVICE DETAILS

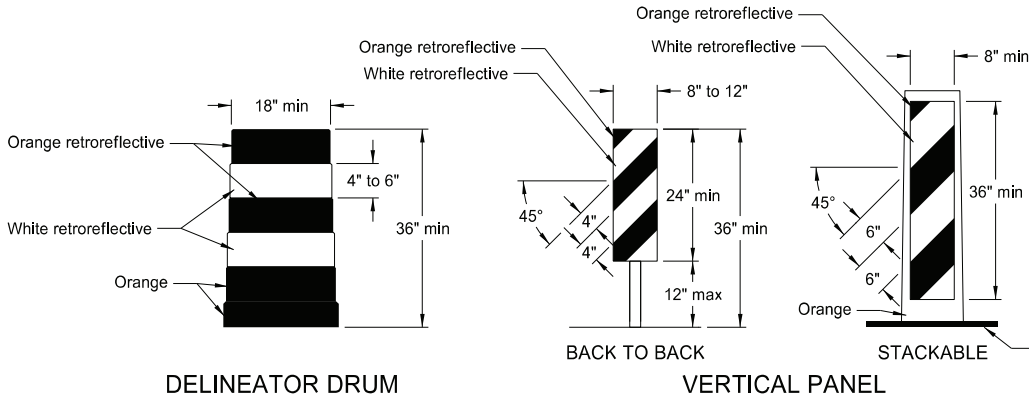


Provide horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide for drum markings. Use a minimum of two orange and two white stripes with the top stripe being orange for each drum. Do not exceed 3" nonretroreflectORIZED spaces between the horizontal orange and white stripes. Avoid placement of stripes on drum ribs or indentations. Use closed top drums that will not allow collection of debris. Do not place ballast on the top of drum.


Provide alternating orange and white retroreflective stripes, sloping downward in direction vehicular traffic is to pass. Place retroreflective sheeting on both sides of panel with a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, use a stripe width of 6 inches.

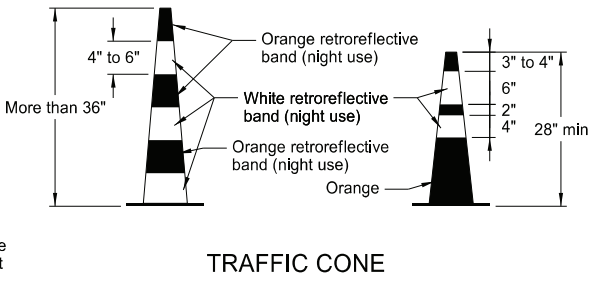


Provide retroreflectORIZATION of cones more than 36" in height by alternating orange and white retroreflective stripes. Use a minimum of two orange and two white stripes for each cone with the top stripe being orange. Use maximum 3" nonretroreflectORIZED space between the orange and white stripes.



Provide retroreflectORIZATION of tubular markers more than 42" in height by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

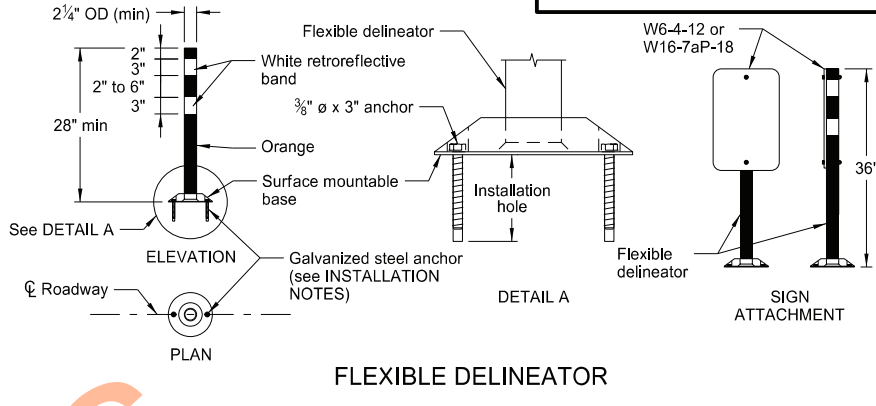


- INSTALLATION NOTES:
1. Drill installation holes to diameter and depth required by manufacturer's specifications.
 2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
 3. In lieu of bolted down base, use an 8" x 8" butyl pad or hot melt butyl. Remove butyl as close as possible to pavement surface.

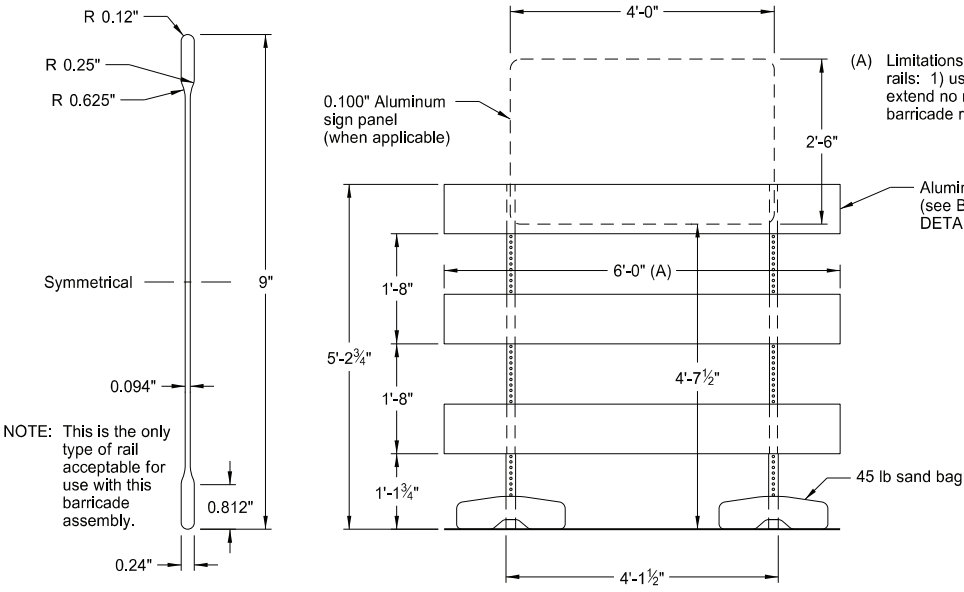


BARRICADE BLADE DETAIL

ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL
(Aluminum Barricade Rails)

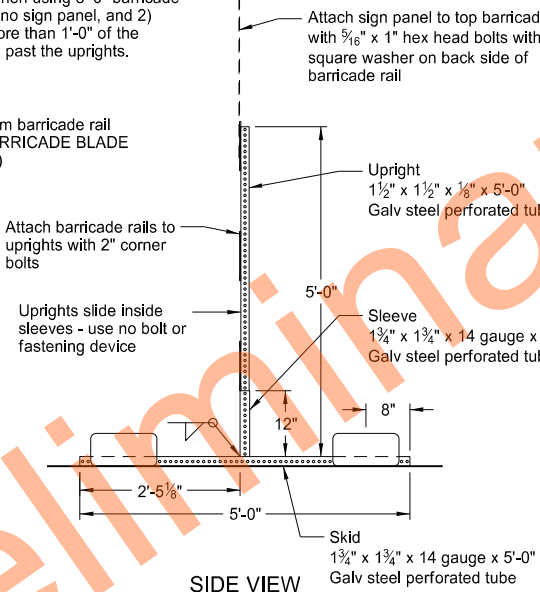


SIDE VIEW

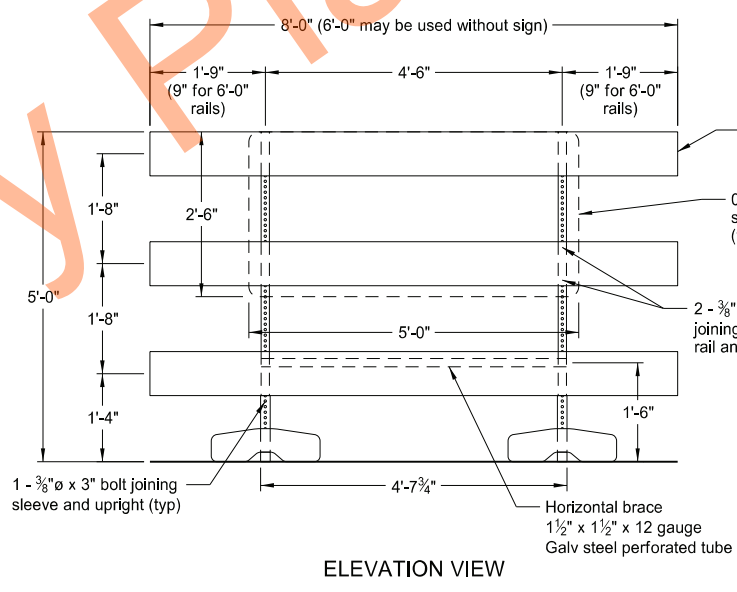


ELEVATION VIEW

BARRICADE ASSEMBLY DETAIL
(Wood or Plastic Rails)

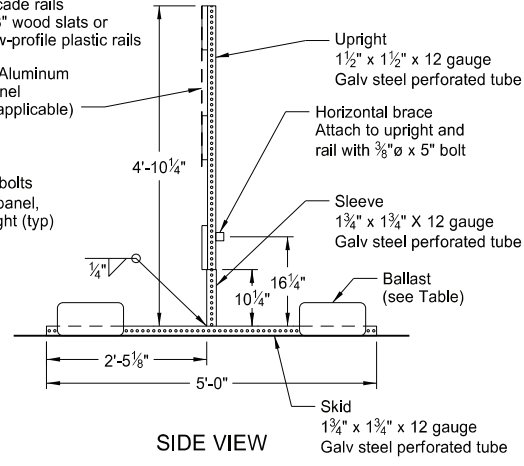


SIDE VIEW


NOTE: For barricade markings use alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Place retroreflective sheeting on both sides of the rails with a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", use a rail stripe width of 4".

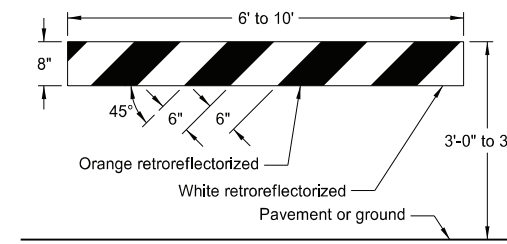


TYPE I BARRICADE

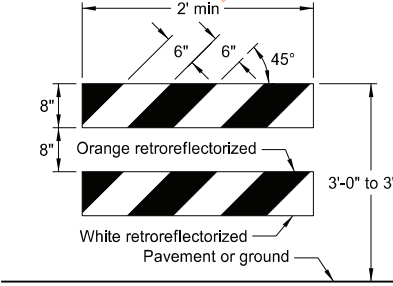

TYPE II BARRICADE

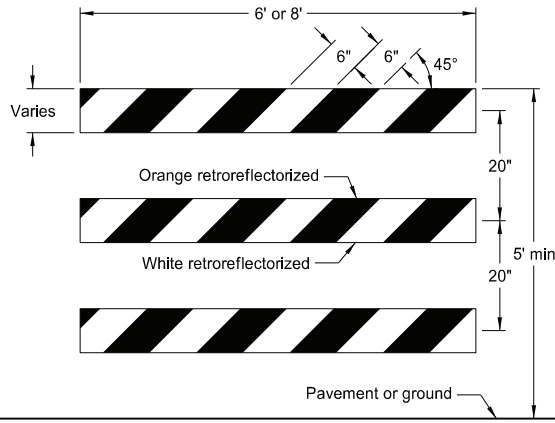

TYPE III BARRICADE

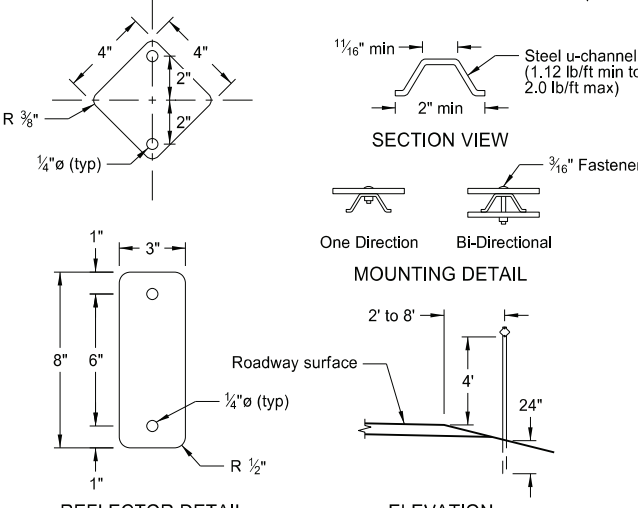

REFLECTOR DETAIL

ELEVATION

DELINEATORS

MINIMUM BALLAST
(For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: Number of sandbags based on a wind speed of 55 MPH. Sandbags assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE
9-27-17	Updated to active voice
11-01-19	Revised details for Flexible Delineator
8-01-24	Electronic Stamp/Signature




CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: In curb sections, place signs a minimum horizontal distance of 2' from face of the curb to near edge of the sign.

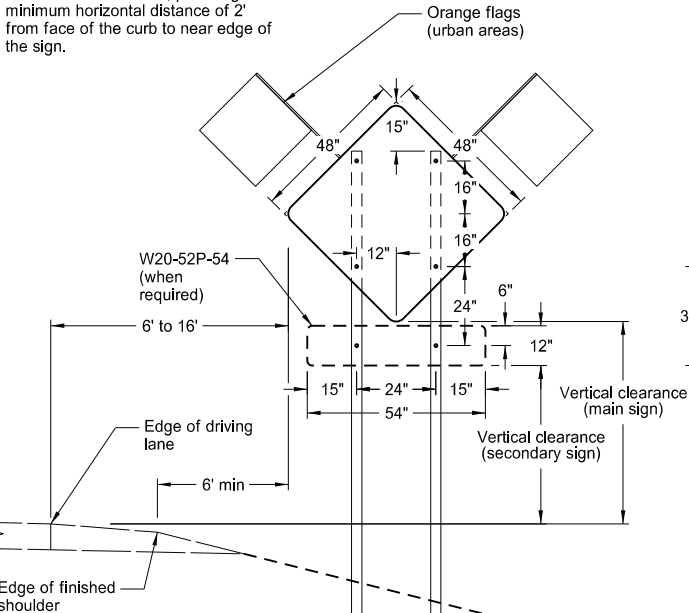


TYPICAL SECTION
(48" x 48" diamond warning sign shown)

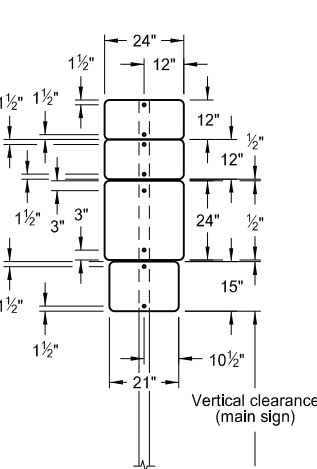


24" x 24" ROUTE MARKER ASSEMBLY

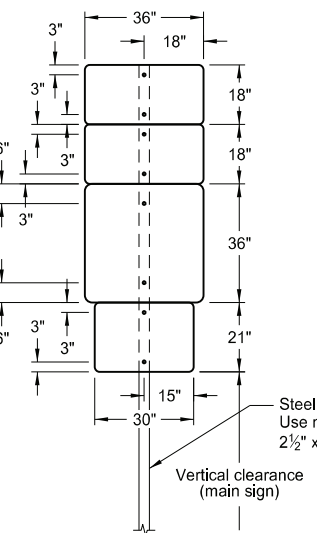


36" x 36" ROUTE MARKER ASSEMBLY




18" x 18" DIAMOND SIGN

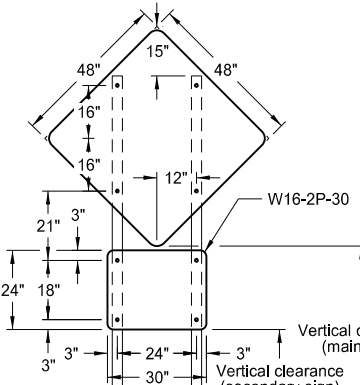


48" x 48" DIAMOND SIGN
(with 30" x 24" secondary sign)

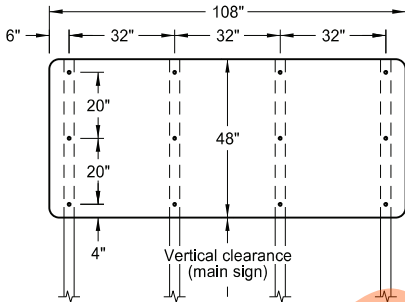


108" x 48" SIGN




96" x 48" SIGN




W14-3-64 - PENNANT SIGN

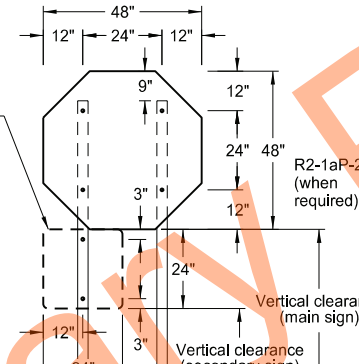


R1-1-48 - STOP SIGN
(with R1-50P-24 sign as required)




72" x 36" SIGN




60" x 24" SIGN

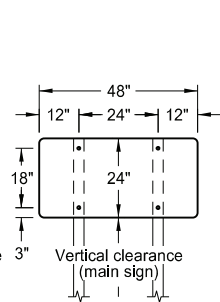

48" x 24" SIGN

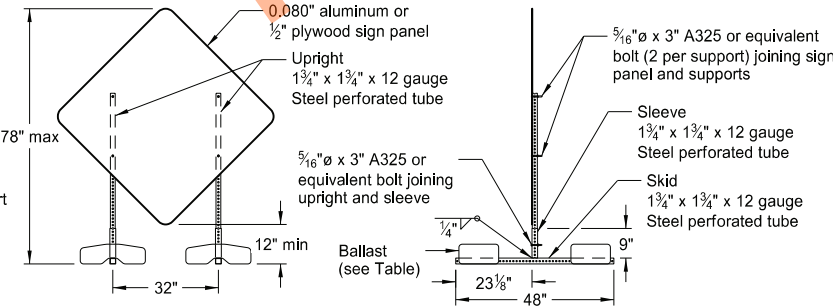

PORTABLE SIGN SUPPORT
LOW-MOUNTING HEIGHT

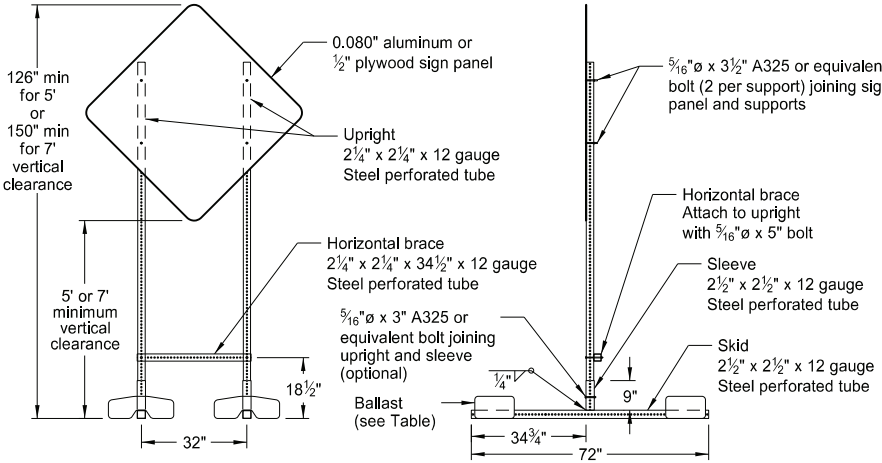

PORTABLE SIGN SUPPORT
HIGH-MOUNTING HEIGHT

NOTES:

1. Sign Supports: Galvanize or paint supports. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes based on a wind speed of 55 MPH.

Place signs over 50 square feet on 2 1/2" x 2 1/2" perforated tube supports as a minimum.

Do not attach guy wires to sign supports. Attach wind beams behind sign panels when used with u-posts.

2. Sign Panels: Provide sign panels made of 0.100" aluminum, 1/2" plywood, or other approved material, except where noted. Punch all holes round for 3/8" bolts.

3. Alternate Messages: Install and remove alternate message signs on reflectorized plate (without borders) as required. (i.e. "Left" and "Right" message on lane closure sign)

4. Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:

Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background

5. Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.

The vertical clearance to secondary signs is 1'-0" less than the vertical clearance stated above.

Provide a minimum clearance of 7'-0" from the ground at the post for signs with an area exceeding 50 square feet.

6. Portable Signs: Provide portable signs that meet the vertical clearance stated above when it is necessary to place signs within the pavement surface.

Use of low-mounting height (minimum 12" vertical clearance) portable signs for 5 days or less, is allowed as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. Use of R9-8 through R9-11a series, W1-6 through W1-8 series, M4-10, and E5-1 is allowed for longer than 5 days.

Restrict signs mounted on portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT details to a maximum surface area of 16 square feet.

MINIMUM BALLAST
(For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10


Note: The number of sandbags are based on a wind speed of 55 MPH. Place sandbags at or near the ends of skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6
9-27-17	Updated to active voice
11-01-19	Revised 60"x24" sign detail
8-01-24	Electronic Stamp/Signature



08/01/24

ROAD CLOSURE LAYOUTS

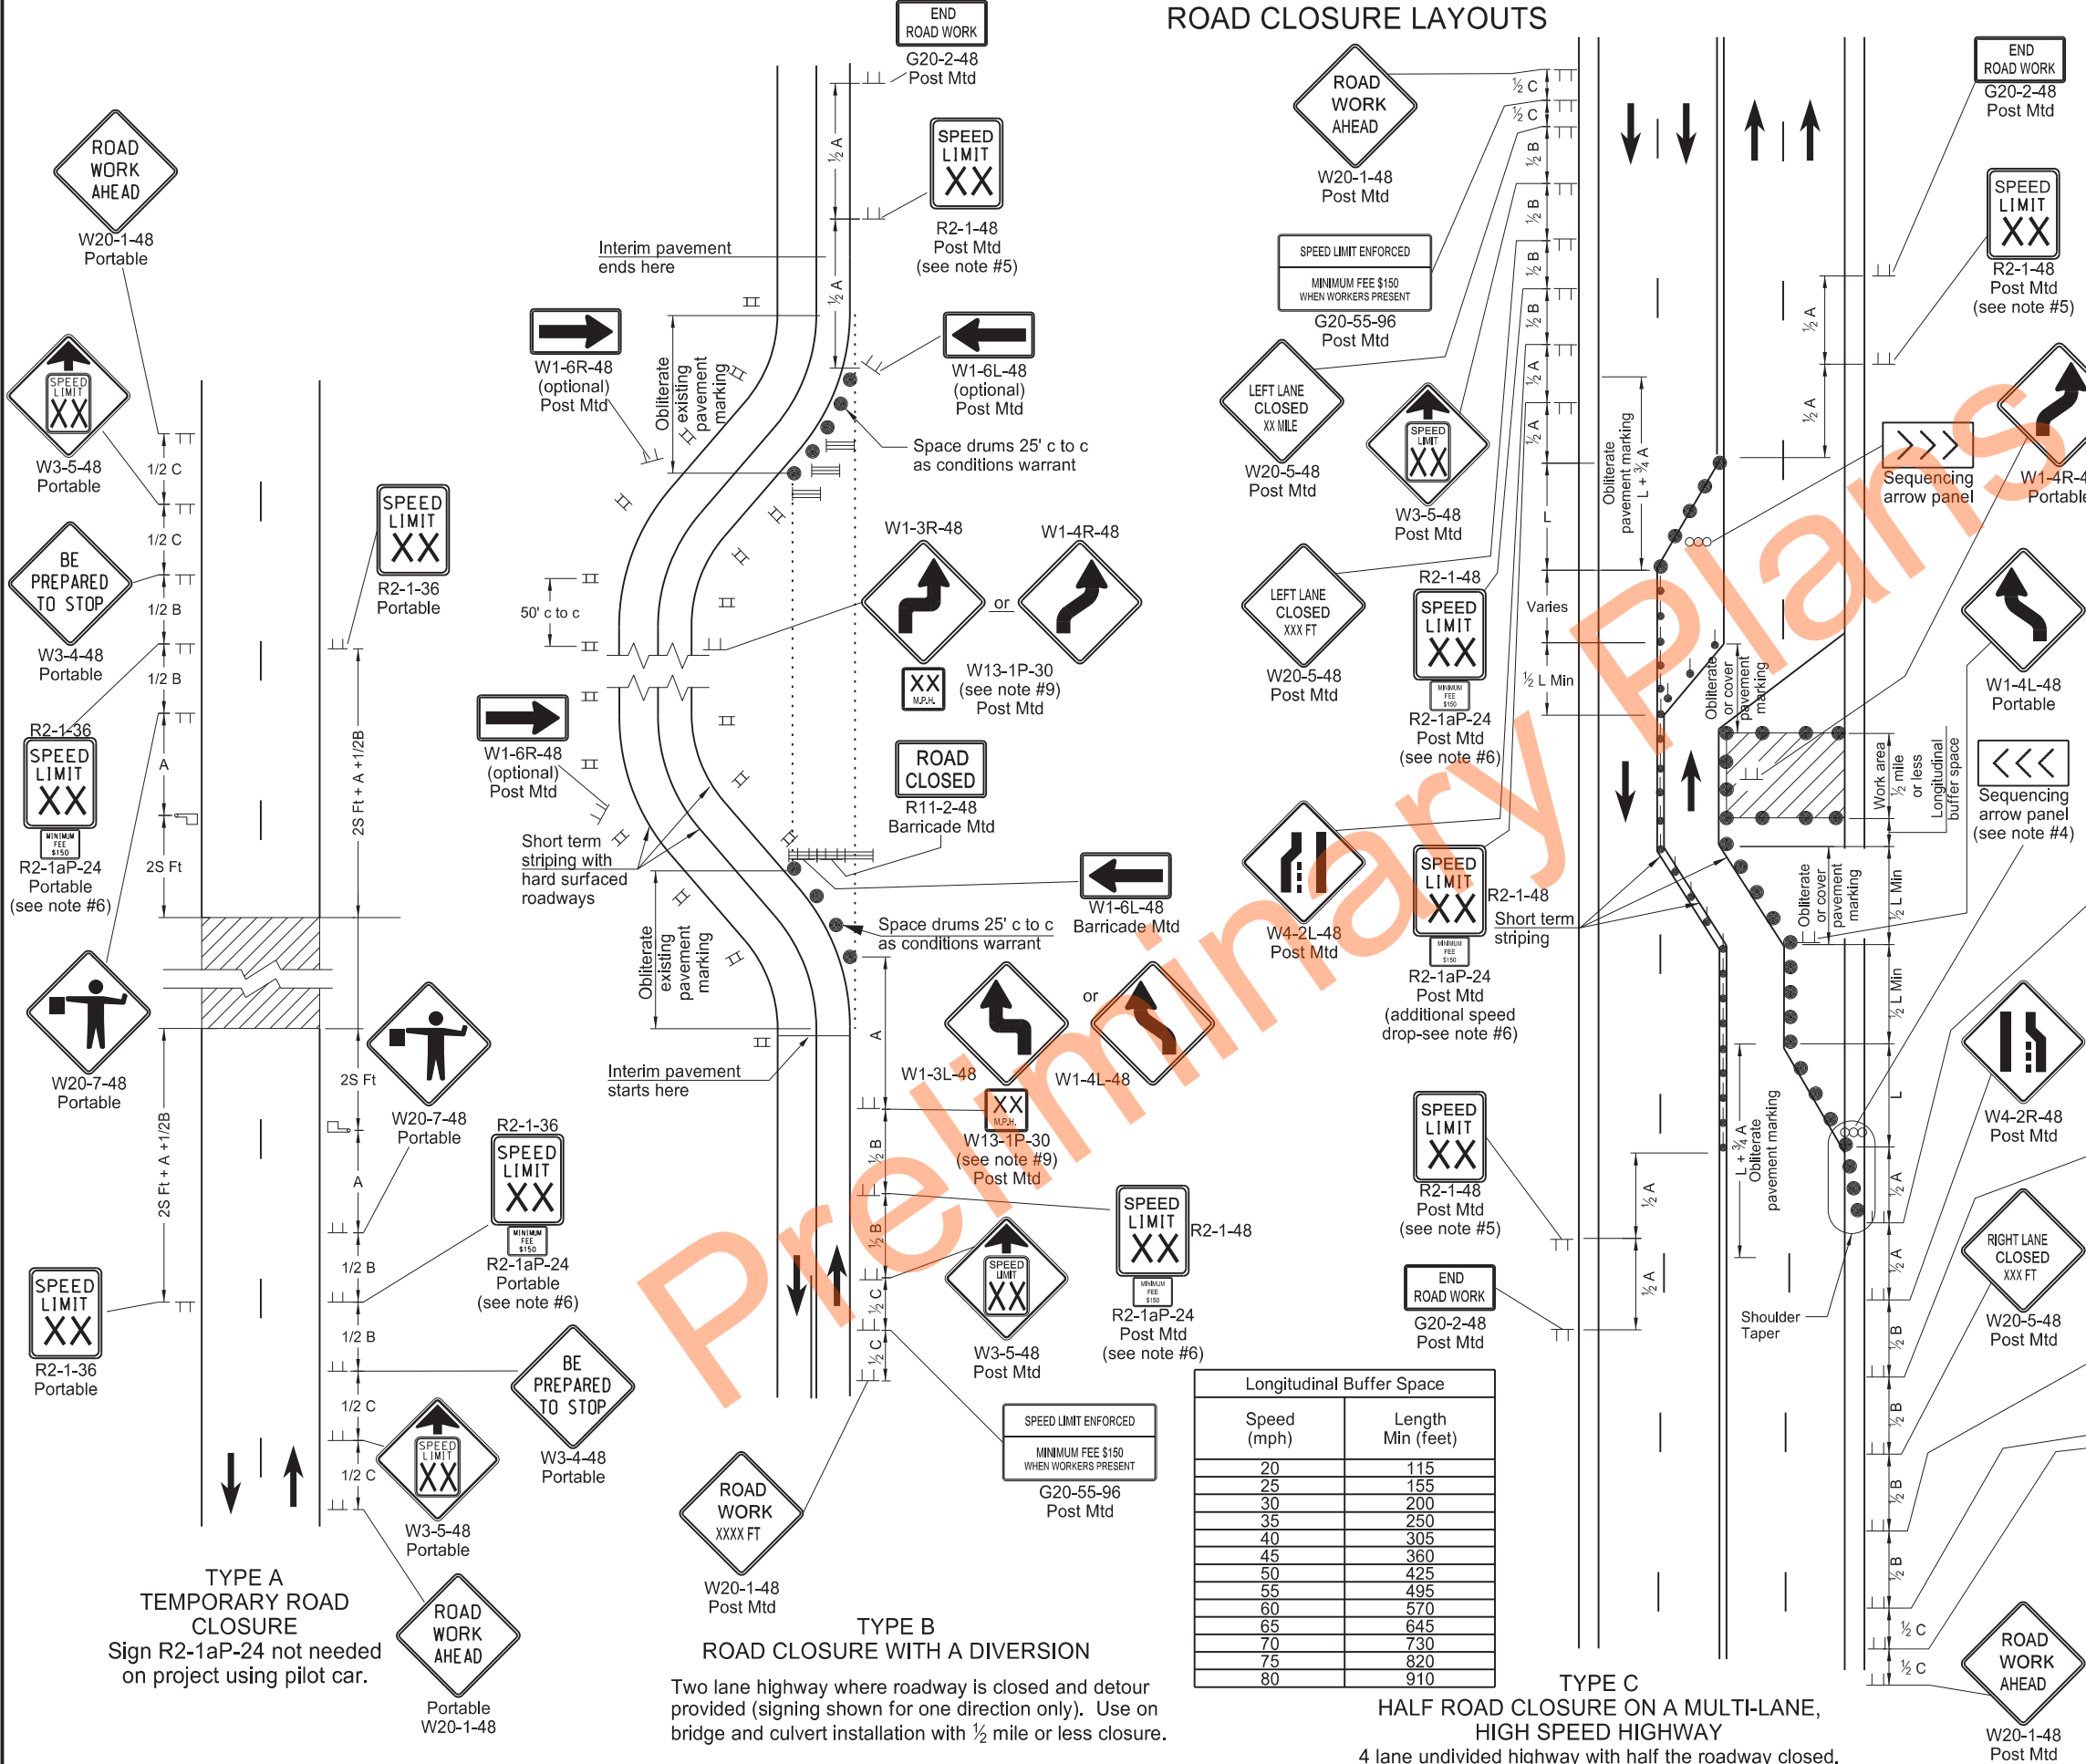

- Notes:
- Variables
 - S = Numerical value of speed limit or 85th percentile.
 - W = The width of taper in feet.
 - L = Minimum length of taper, S x W for freeways, expressways, and other roads with speeds of 45 mph or greater, or W x S²/60 for urban, residential, and other streets with speeds of 40 mph or less.
 - Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
 - Place delineator drums, barricades or cones for tapering traffic at dimension "S" and for tangents space at 2 times dimension "S".
 - Place Sequencing Arrow Panels at the beginning of the taper when possible. Where shoulder width does not provide sufficient room, move the panel closer to the work area and place on roadway surface. See Shoulder Closure Standard Drawing.
 - Use Type A on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
 - Use Type B on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
 - Use Type C on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
 - Re-establish speed. Determine exact speed limit in the field, dependent on location and conditions.
 - Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
 - Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
 - Cover existing speed limit signs within reduced speed zones.
 - Where necessary, engineer will determine safe speed.
 - As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
 - Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
 - Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.

Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500


KEY	
	Type III barricade
	Sign
	Delineator drum
	Tubular markers
	Work area
	Flagger
	Sequencing arrow panel
	Vertical panels back to back

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Updated Notes & Spd Limit signs
11-01-19	Sign, Notes, & Pmnt Mk updates
12-08-21	Switched order of Road Work Ahead and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes



TERMINAL AND SEAL COAT SIGN LAYOUTS

D-704-20

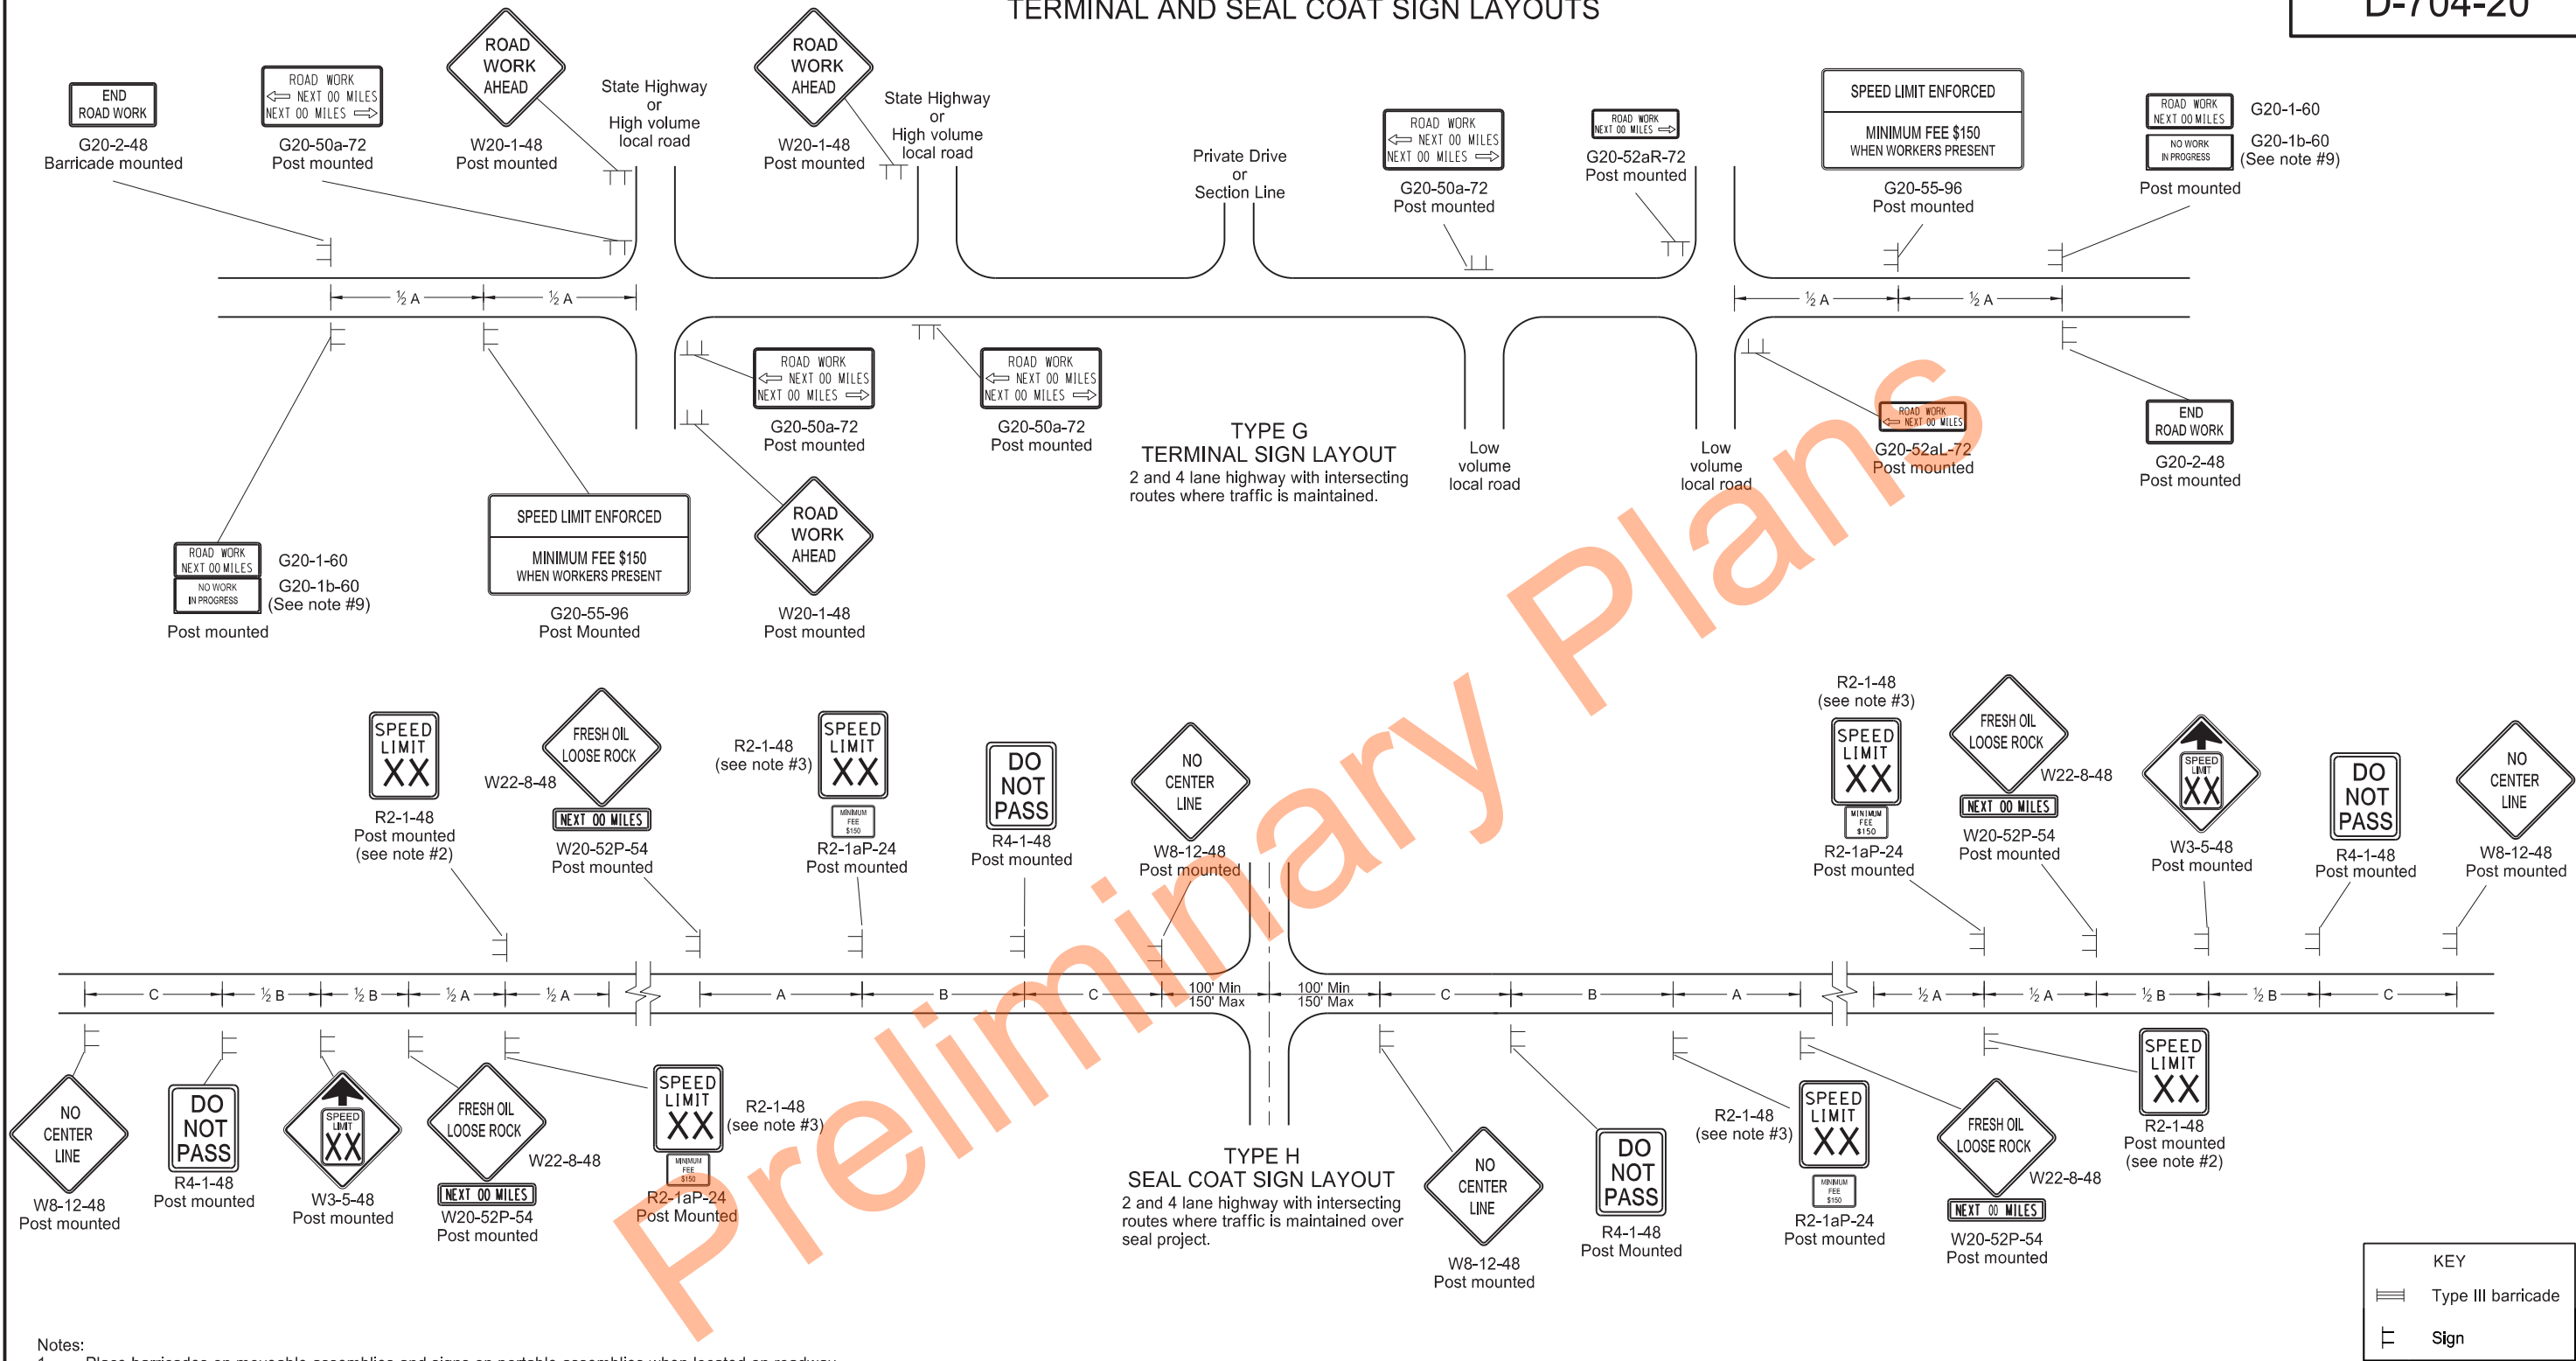

Notes:

- Place barricades on moveable assemblies and signs on portable assemblies when located on roadway.
- Determine the exact speed limit in the field, based on location and conditions.
- Determine the reduced speed limit based on the in place speed limit before construction. Where speed limit reductions exceed 30 MPH, install a second speed limit sign with the desired speed reduction (not to exceed 30 MPH.) Place the second speed limit sign at 1/2 B.
- Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
- Cover existing speed limit signs within a reduced speed zone.
- On seal coat projects, place signs R2-1-48, R2-1aP-24, R4-1-48, W22-8-48 and W20-52P-54 after all important intersections and at five mile intervals. Place sign W8-12-48 after all important intersections and at 2 mile intervals until short term center line pavement marking is placed.
- As an option, use portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Drawing D-704-14.
- Cover or remove speed limit signs from layout Type H when loose aggregate is removed.
- Install sign G20-1b-60 when work is suspended for winter.
- Use other traffic control layouts in immediate work areas. Place sign R2-1aP-24 below speed limit signs in reduced speed limit work areas.
- Sign G20-55-96 is not required if this layout is part of other traffic control that contains this sign, or the work is less than 15 days.
- Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.


ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Updated notes & sign numbers
11-01-19	Updated note & sign
12-08-21	Switched order of Road Work and Spd Limit Enforced & added Dollars At Work
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes



CONSTRUCTION TRUCK AND TEMPORARY DETOUR LAYOUTS

D-704-22

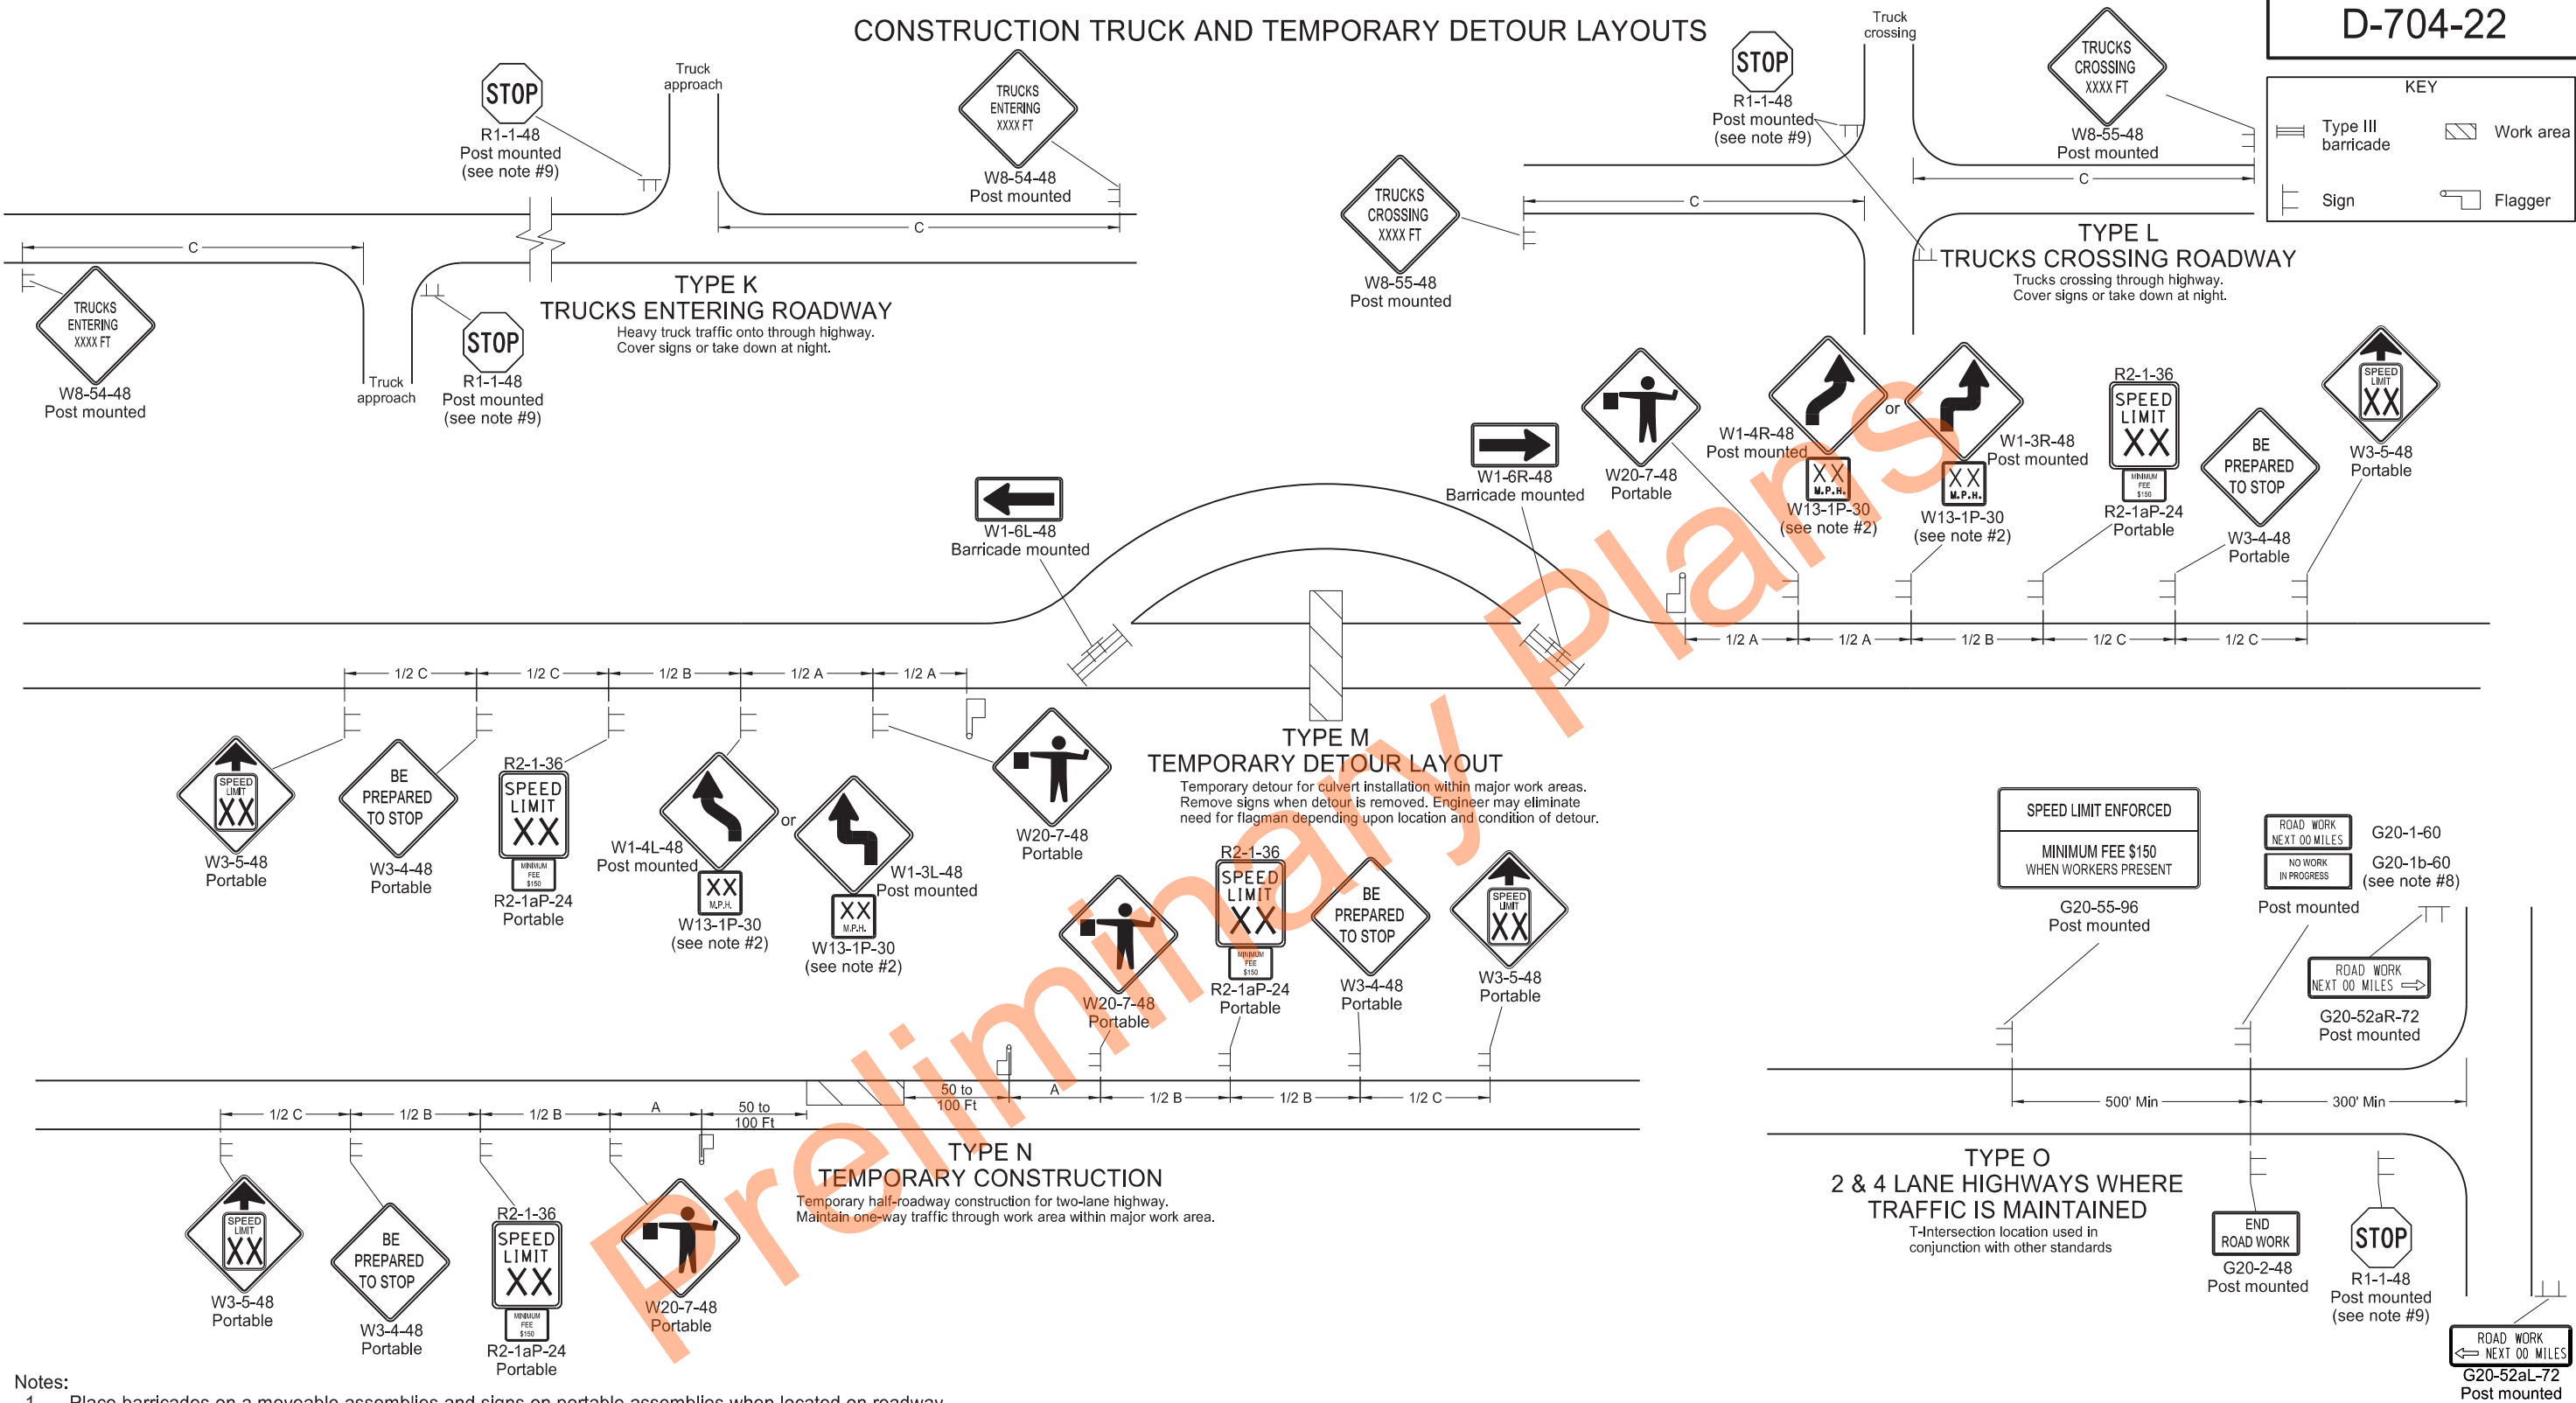

Notes:

- Place barricades on a moveable assemblies and signs on portable assemblies when located on roadway.
- Where necessary, safe speed to be determined by the Engineer.
- Determine the reduced speed limit based on the in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
- Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
- Cover existing speed limit signs within a reduced speed zone.
- Covered (when approved by engineer) or obliterated pavement marking measured as Obliteration of Pavement Marking.
- As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
- Install sign G20-1b-60 when work is suspended for winter.
- If existing stop sign is in place, a 48" stop sign is not required.
- Sign G20-55-96 is not required if layout is part of other traffic control that contains this sign, or if work is less than 15 days.
- Recommend using 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.


ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Update notes & sign numbers
11-01-19	Revised sign numbers & note 7
12-09-21	Added Speed Limit Enforced and Dollars At Work signs
11-29-22	Removed Dollars At Work
06-30-25	Legislative Changes












MISCELLANEOUS SIGN LAYOUTS

D-704-26

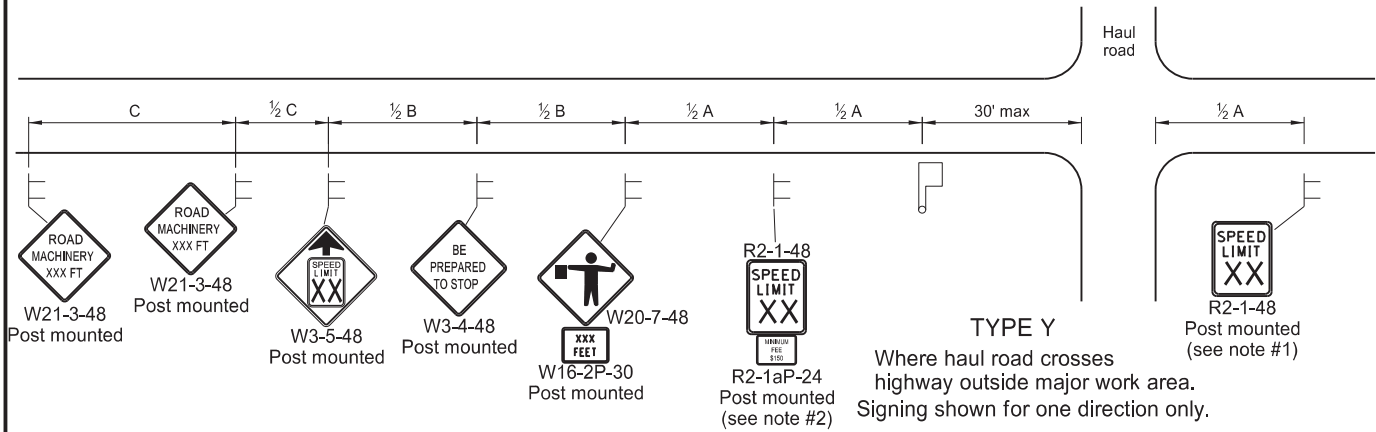

TYPE Z
Where speed zone is needed
Signing shown for one direction only.

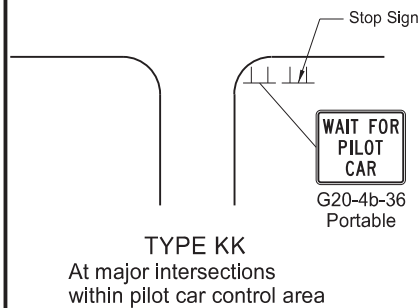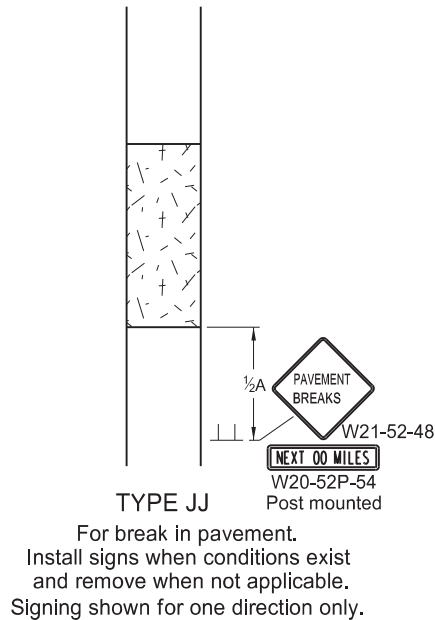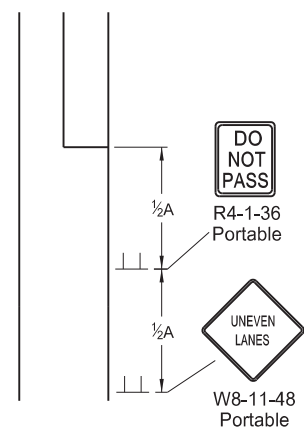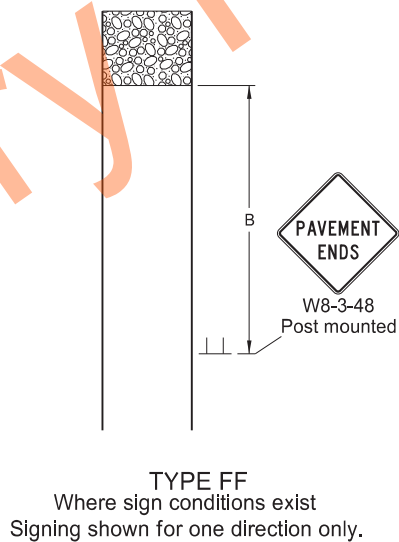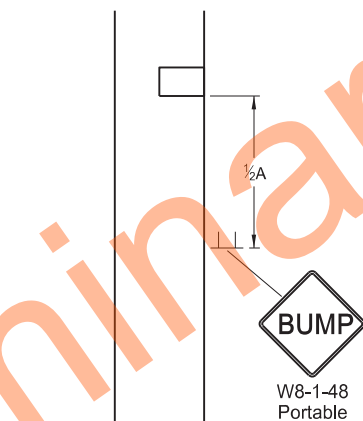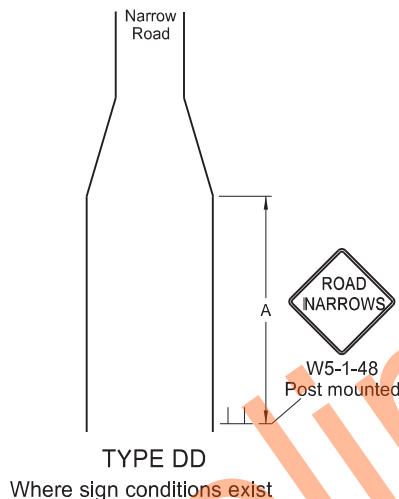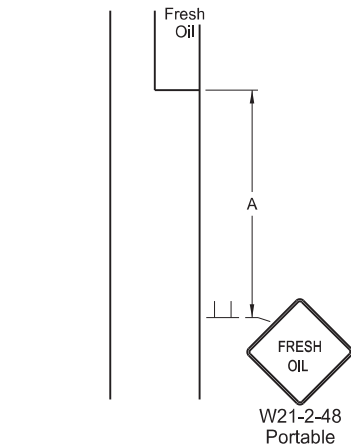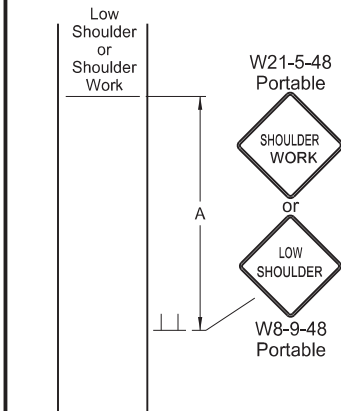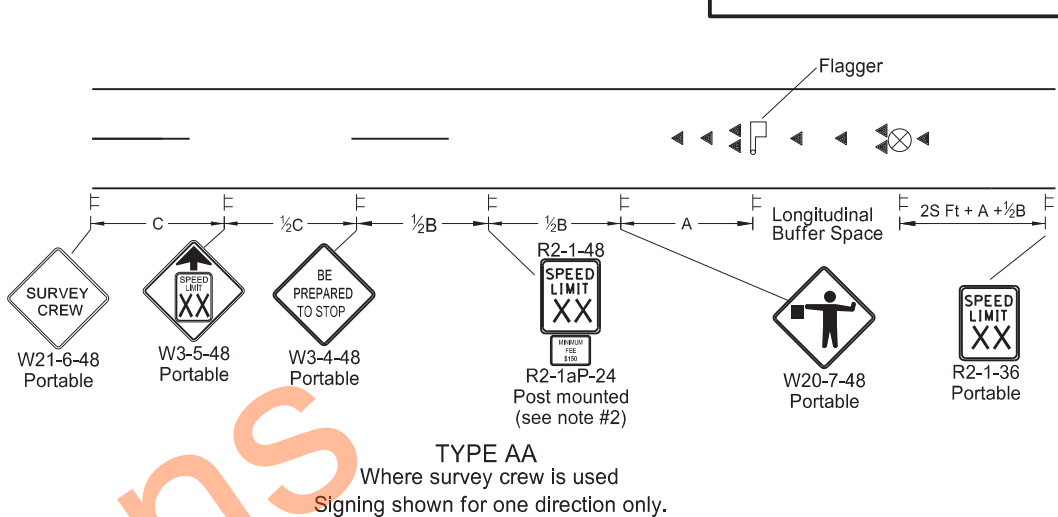

- Notes
1. Re-establish speed limit. Determine exact speed limit in the field, dependent on location and conditions.
 2. Determine reduced speed limit based on in-place speed limit before construction. Where speed reductions exceed 30 mph, install a second speed limit sign with the desired speed reduction (not to exceed 30 mph.) Place the second speed limit sign at 1/2 B.
 3. Install flags on warning signs in urban areas when signs are not portable. Mount 24 inch square flags perpendicular to the edges of the sign, and at such a distance above the edge that the flag does not touch the sign when limp.
 4. Cover existing speed limit signs within reduced speed zones.
 5. As an option, use portable sign supports in lieu of post mounted signs in accordance with NDDOT Standard Drawing D-704-14.
 6. Sign G20-55-96 is not required if this standard is part of other traffic control layouts, or work is less than 15 days.
 7. When pilot car operation is used, place sign G20-4b-36 "Wait For Pilot Car" at major intersections within pilot car control area.
 8. Recommend 40 mph speed limit in vicinity of workers, unless location and conditions dictate otherwise.
 9. Layouts shown for one direction only.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 80 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820
80	910

* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

KEY

Flagger

Sign

Cones

Survey Equipment



S = Numerical value of speed limit or 85th percentile.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
08-17-17	Added speed limit signs. Updated notes & sign numbers
11-01-19	Revised note 5 & sign numbers
02-23-23	Revised distance & removed signs
06-30-25	Legislative Changes




MOBILE OPERATION
(PAVEMENT MARKING)





D-704-27

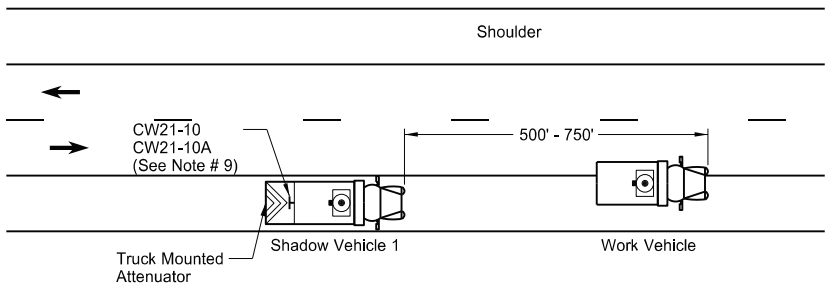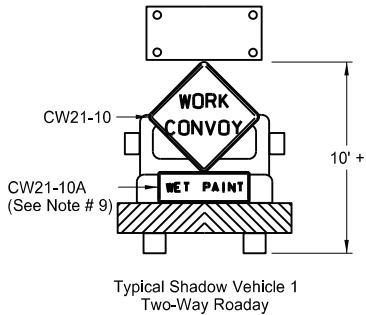


Two-Way Roadway with Paved Shoulders

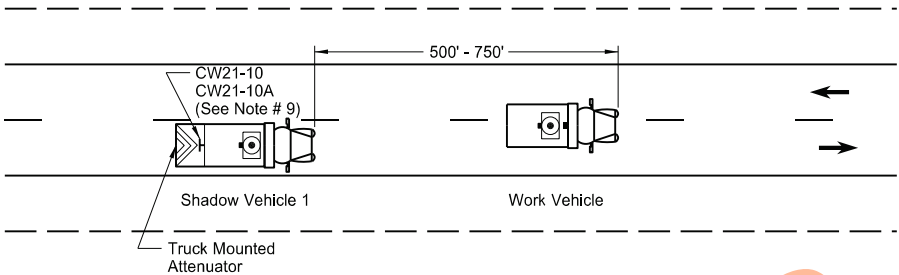


Two-Way Roadway without Paved Shoulders

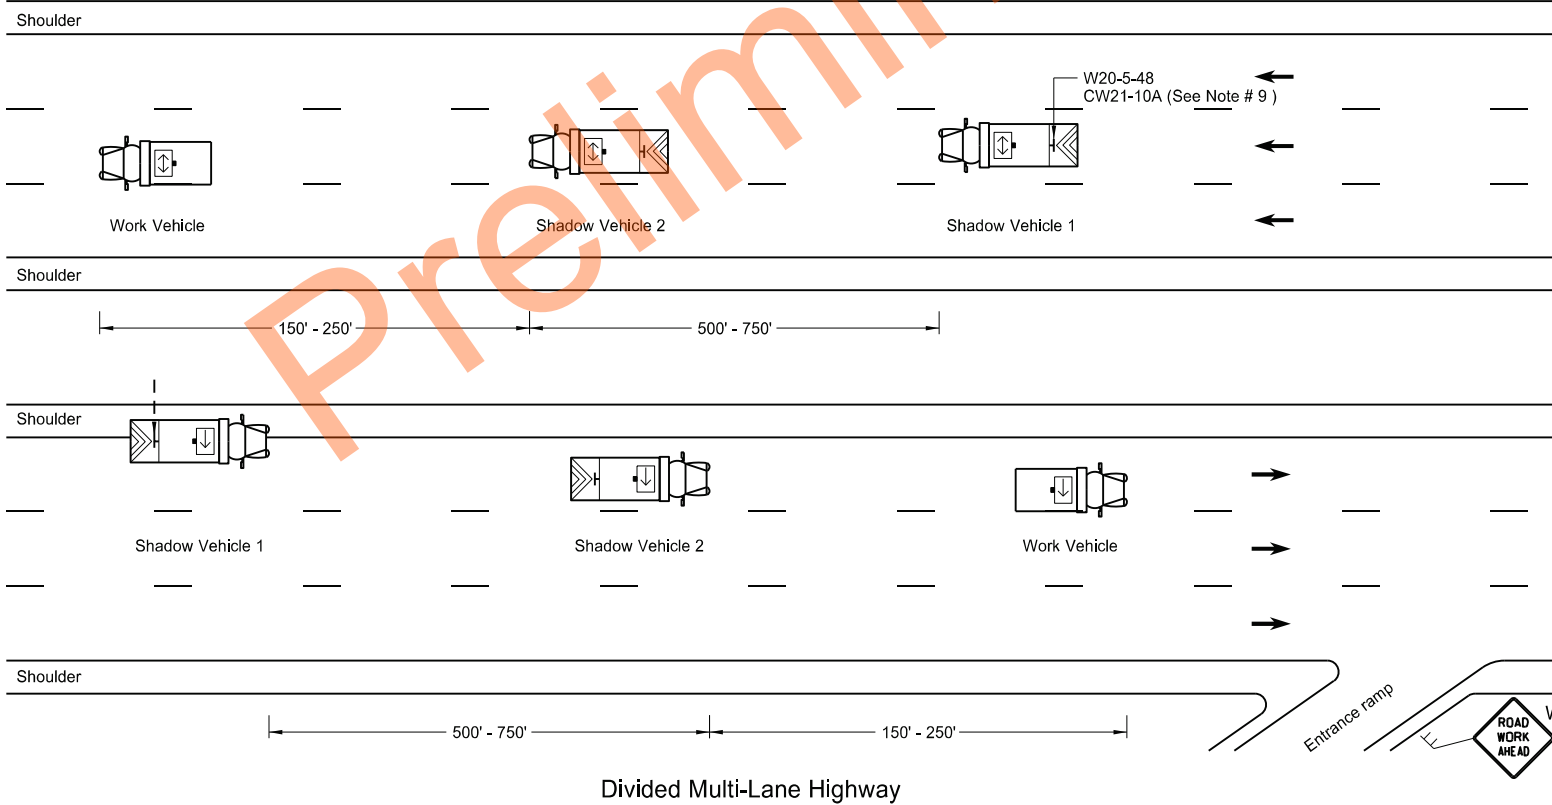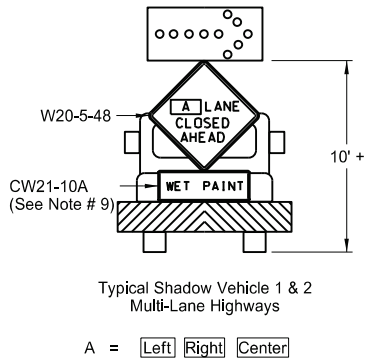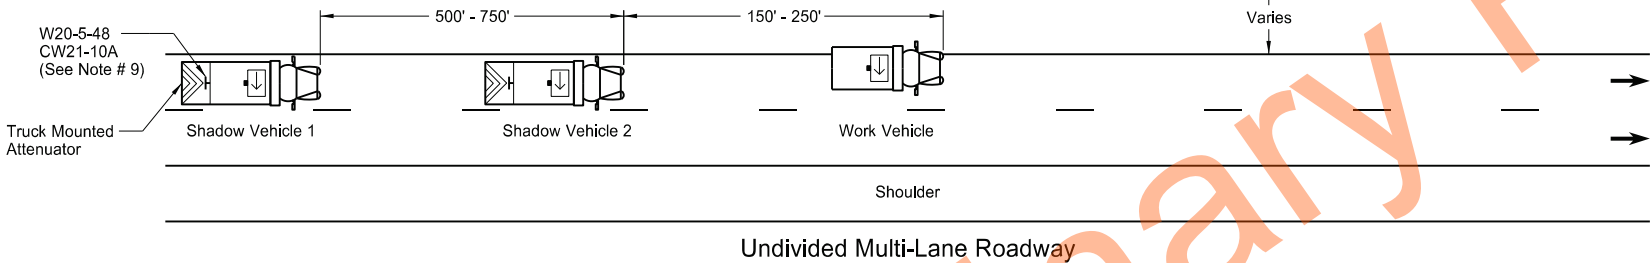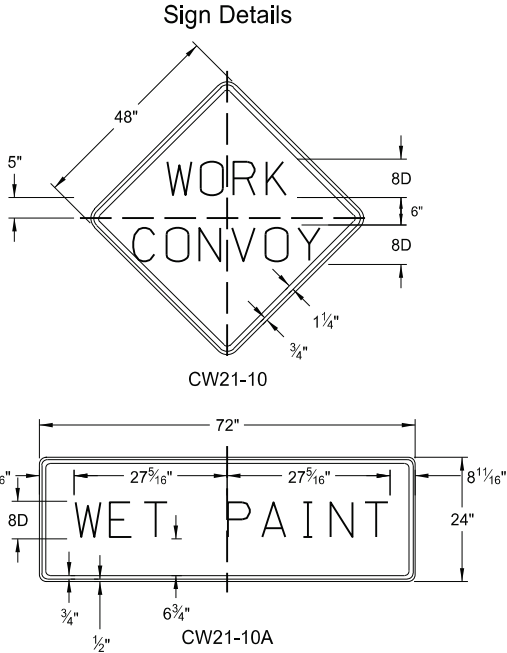

- Notes
1. Use additional vehicles you choose to be in the convoy with truck mounted attenuators, at your own expense.
 2. Display yellow rotating beacons or strobe lights on shadow and work vehicles, unless otherwise stated in the plans.
 3. Use Type B or Type C flashing arrow panels controlled from inside the vehicle.
 4. Provide each vehicle with two-way electronic communication capability.
 5. Move shadow vehicle 1 first to shadow other convoy vehicles when convoy changes lane.
 6. Vary vehicle spacing between shadow vehicle 1 and shadow vehicle 2 based on sight distance restrictions. Motorists approaching the work convoy need to see trail vehicle in time to slow down and/or change lanes as they approach shadow vehicle.
 7. Sign Colors
Letters = Black
Border = Black
Background = Orange
 8. As an option, use shadow vehicle 2 the paint tender vehicle.
 9. Use sign CW21-10A only during painting operation.
 10. Pull over work and shadow vehicles periodically to allow motor vehicle traffic to pass on two lane - two way roadways.

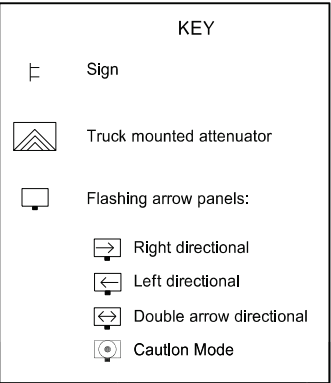

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
6-18-14	Removed shadow vehicle 2 on two lane roadways
9-27-17	Updated to active voice
11-08-19	Changed Standard Heading
6-02-24	Electronic Stamp/Signature.



Two-Lane Roadway Portable Rumble Strips

D-704-33

Work area





Flagger

Sign

KEY


S = Numerical value of speed limit or 85th percentile.

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - High Speed (over 45 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720

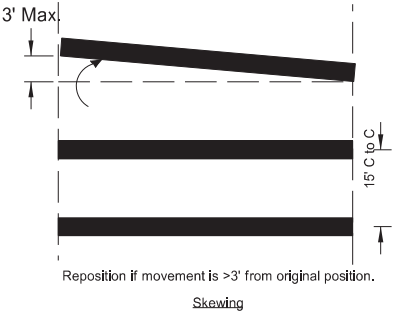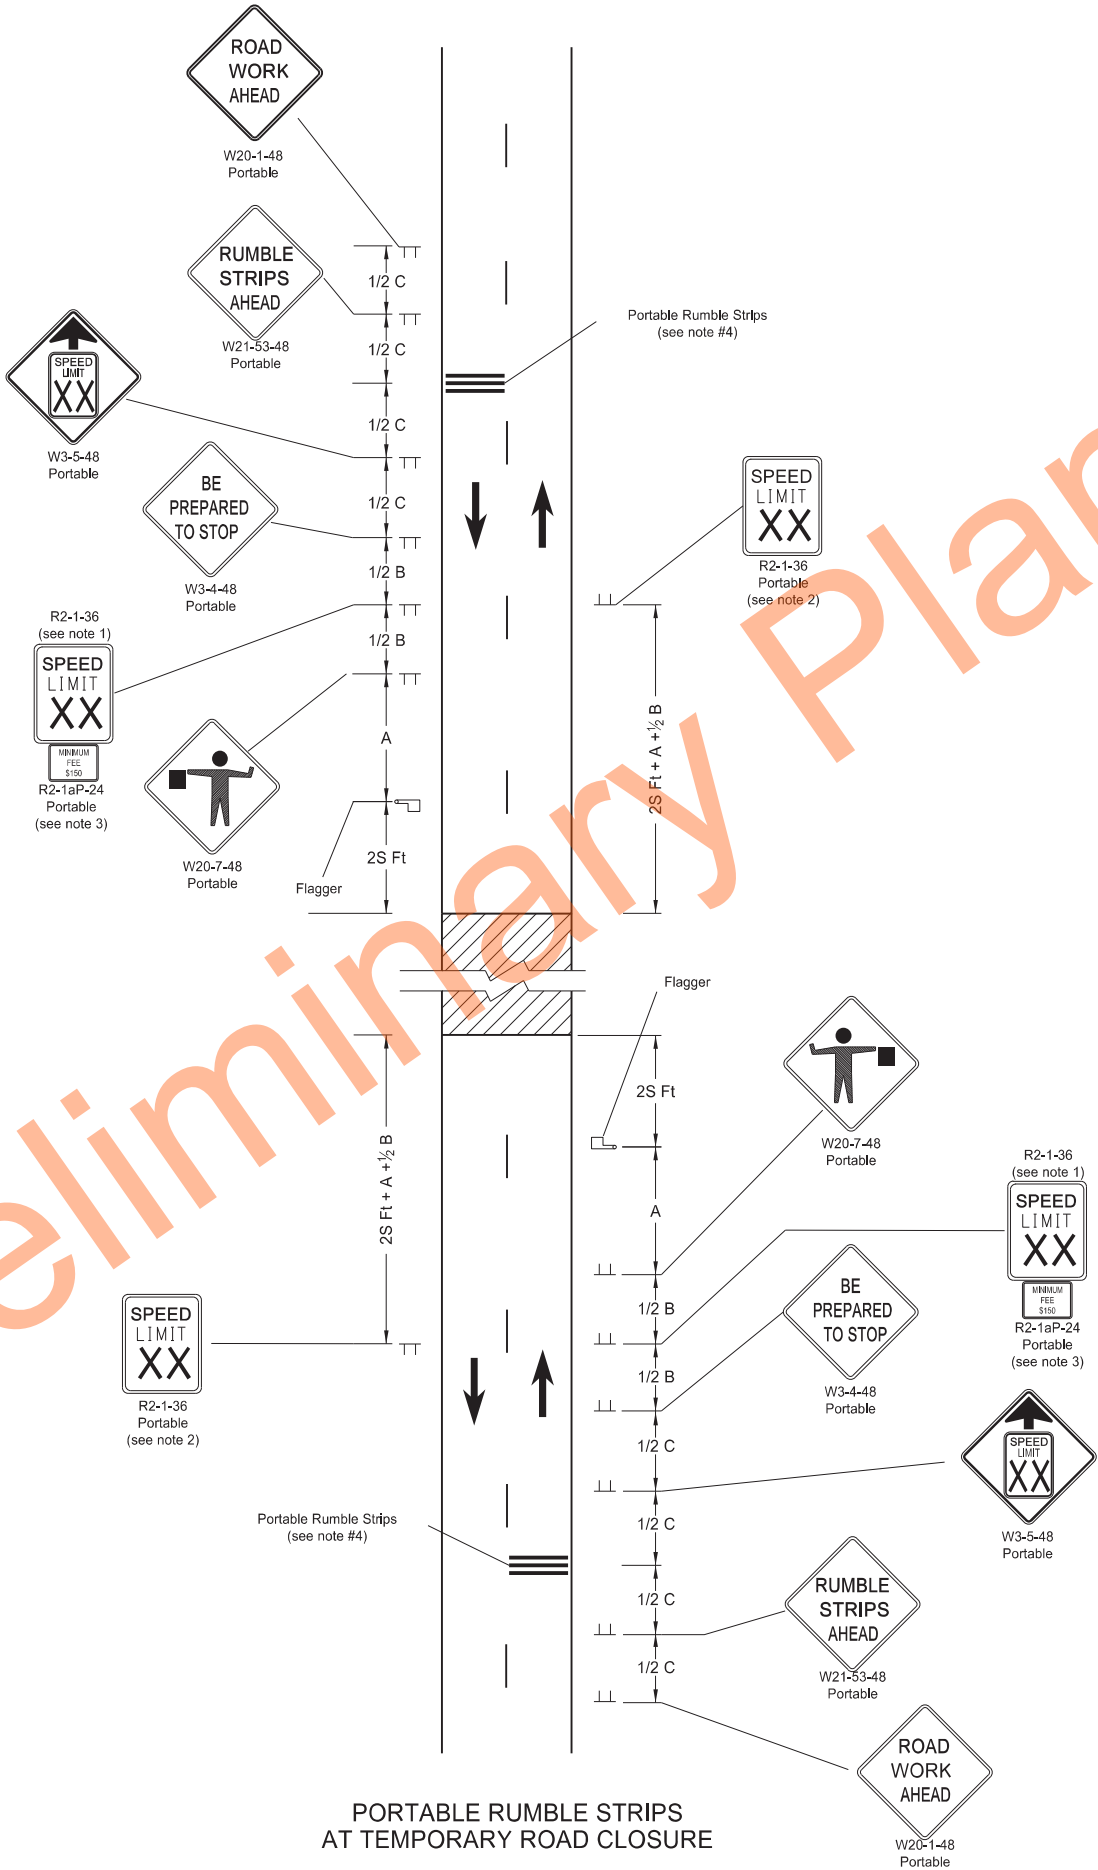

PORTABLE RUMBLE STRIPS ARRAY
TYPES OF MOVEMENT AND MAXIMUM ALLOWANCES

- Notes:
- Determine speed in the field based on location and conditions.
 - Re-establish the speed limit. Determine the exact speed limit in the field, dependent on location and conditions.
 - Sign R2-1aP-24 is not required when pilot car operation is used.
 - Do not use rumble strips on a non paved surface or in a pre-construction speed zone of 45 mph or less.

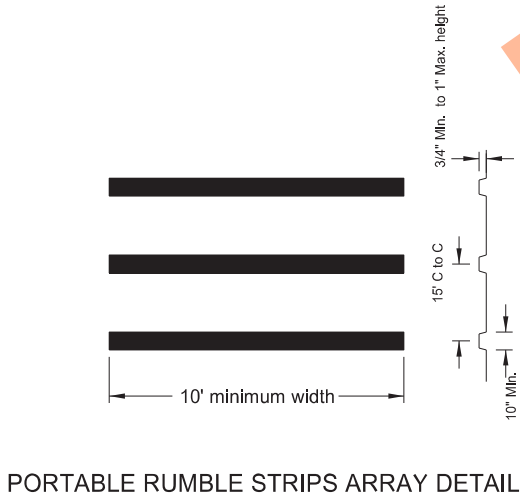


PORTABLE RUMBLE STRIPS
AT TEMPORARY ROAD CLOSURE

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
02-22-22	
REVISIONS	
DATE	CHANGE
03-07-23 06-30-25	Use changed to min 45 mph Legislative Changes



PORTABLE SIGN SUPPORT ASSEMBLY

D-704-50

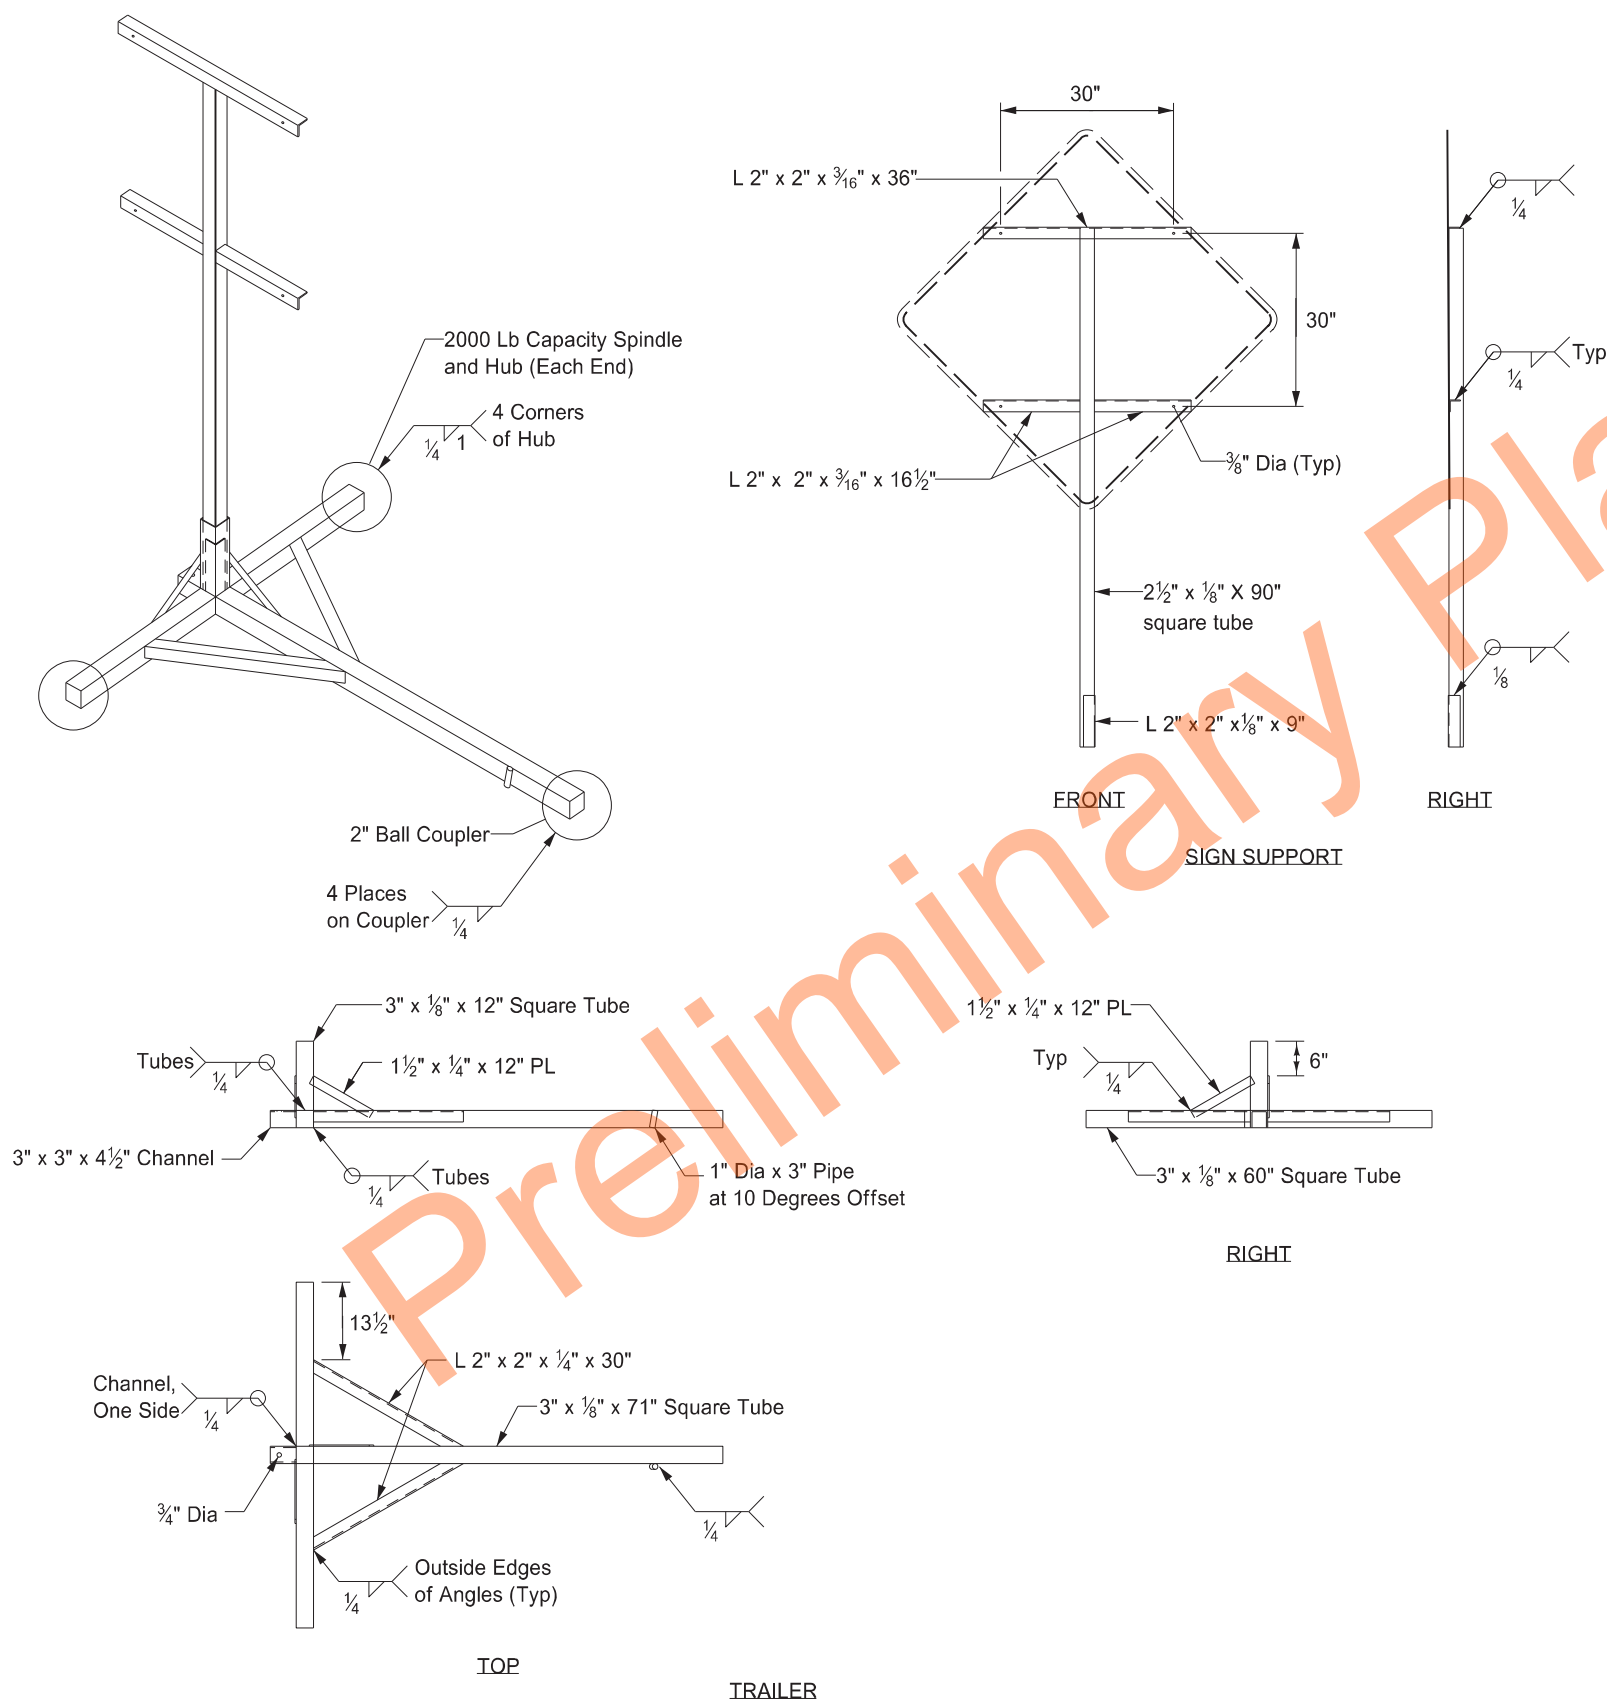


- Notes:
- 1. Maximum 250 pound weight of assembly.
 - 2. Use a 14" wheel and tire.
 - 3. Use no automotive and equipment axle assemblies for trailer-mounted sign supports.
 - 4. Other NCHRP 350 or MASH crash tested assemblies are acceptable.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-23-10	
REVISIONS	
DATE	CHANGE
12/02/2020	Updated Note to active voice.


KIRK J. HOFF
REGISTERED
PROFESSIONAL
PE-4683
ENGINEER
NORTH DAKOTA
12 02 2020

MOBILE OPERATION
Grinding Shoulder Rumble Strips

D-704-56

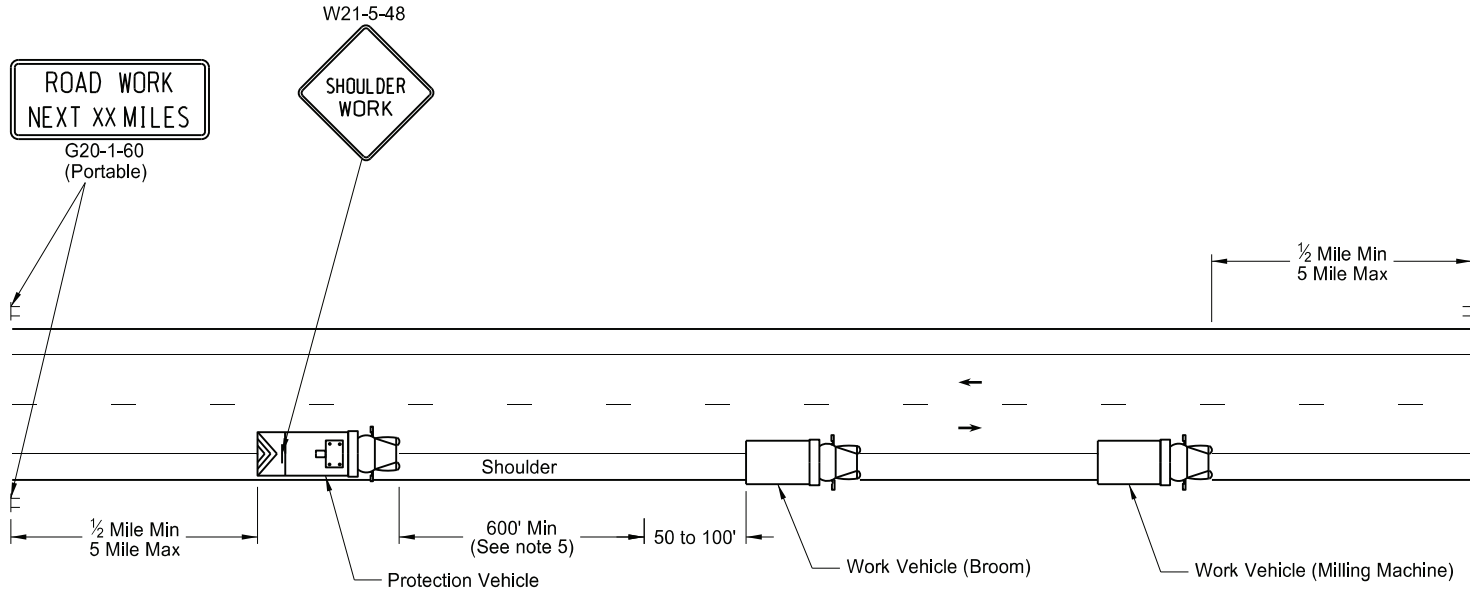


TWO LANE - TWO WAY ROADWAY

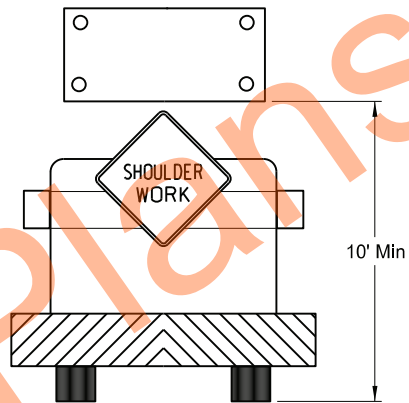


TWO LANE - TWO WAY ROADWAY

Typical Protection Vehicle with
Flashing Arrow Panel In Caution Mode

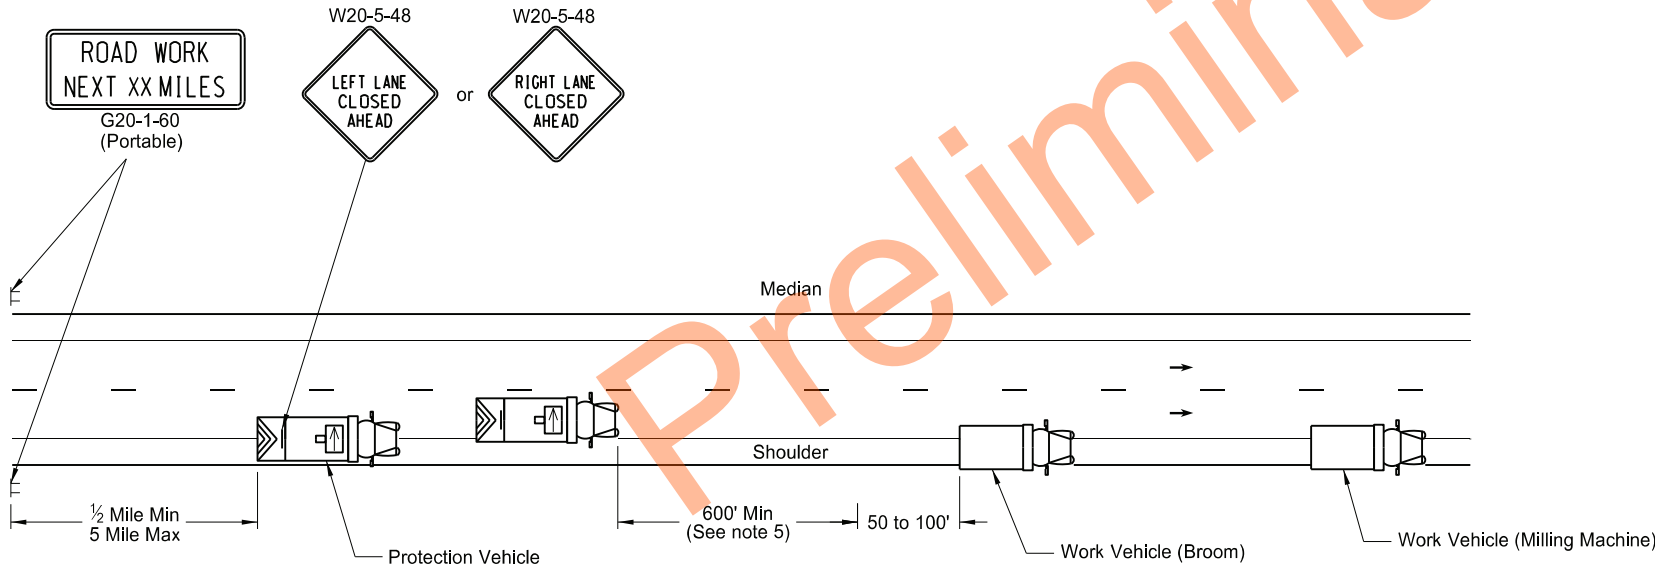


INTERSTATE & 4 LANE DIVIDED HIGHWAY

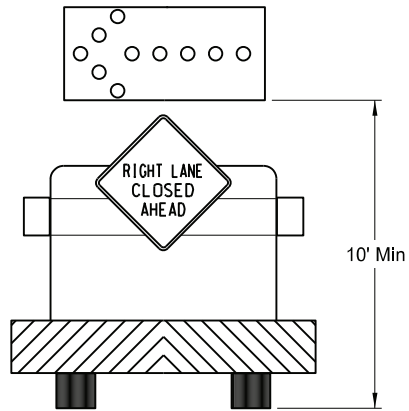

INTERSTATE & 4 LANE DIVIDED HIGHWAY

Typical Protection Vehicle with Flashing Arrow
Panel In Flashing Arrow Mode

- Notes:
1. Provide truck mounted attenuators on additional vehicles in the convoy, at no additional cost.
 2. Provide rotating, flashing, oscillating, or strobe lights on vehicles.
 3. Provide Type B or Type C flashing arrow panels that are controlled from inside the vehicle.
 4. Provide two - way electronic communication capability in each vehicle.
 5. Vary vehicle spacing between the protection vehicle and work vehicle depending on sight distance restrictions. Keep the spacing of the convoy vehicles such that motorists approaching the work convoy can see the protection vehicle in time to slow down and safely pass the work vehicles.
 6. Move advance Road Work Ahead signs as the work area moves through the construction zone.

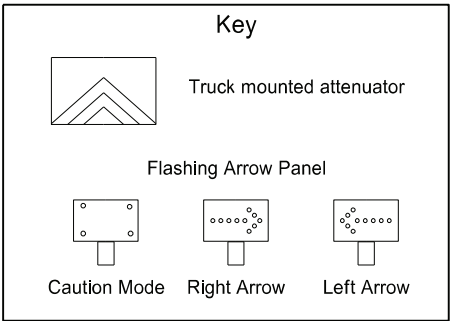


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
11-15-12	
REVISIONS	
DATE	CHANGE
8-17-17	Updated notes & signs
10-03-19	New Design Engineer PE Stamp
8-02-24	Electronic Stamp/Signature





08/02/24

D-706-1

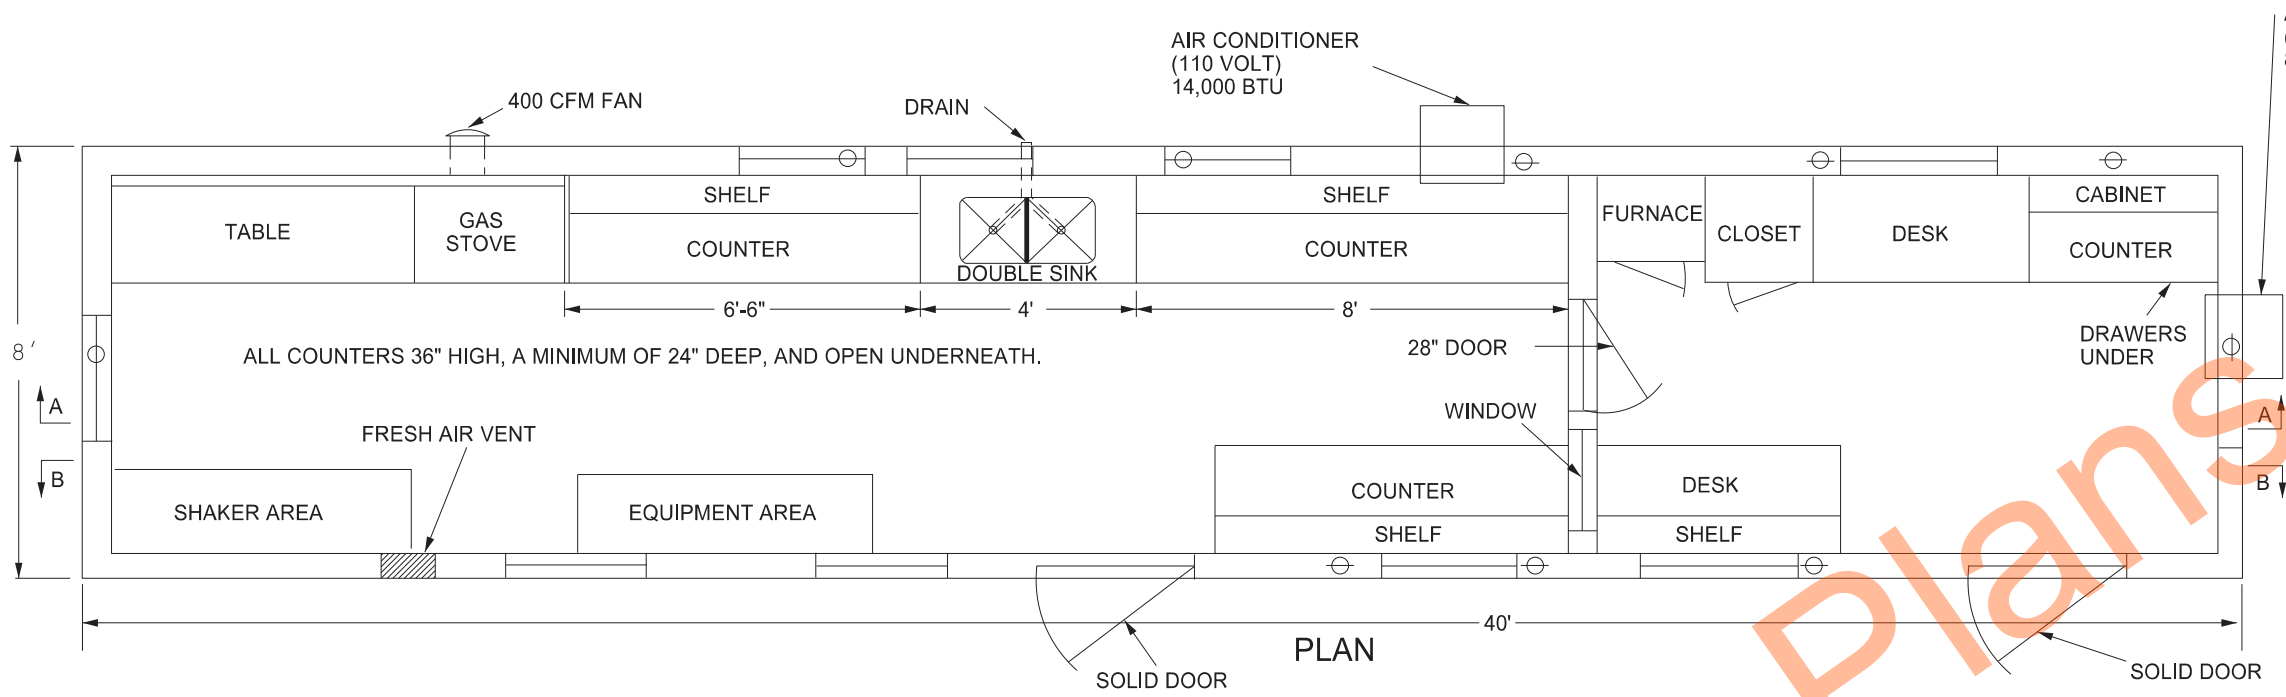


- Provide a laboratory with the following:
1. A 1'x1' shelf at 36" above the regular countertop.
 2. Double compartment stainless steel sink, with each compartment a minimum of 16"x14"x10" deep. Provide water service lines made of copper or plastic and a diameter of ½ inch.
 3. An exhaust fan capable of removing inside air at a rate of 400 CFM.
 4. Fresh air vent hinged to open or close manually.
 5. 24" x 48" table capable of holding a 200 lb masonry saw with a minimum clearance of 36" above the table.
 6. A water supply tank with a capacity of 500 gallons and a 20 gallon capacity pressure tank on the pump.
 7. Heavy duty type locks, latches, and hinges for doors made to withstand the intense use in service.
 8. A wall between the office and the work area properly insulated to prevent the transmission of heat and noise.
 9. The steel cable tie downs and ground anchors at each corner of the lab.
 10. Electrical service entrance wired for 100 amps and separate circuits for air conditioners. Space convenience outlets in counter areas a minimum of four feet apart.

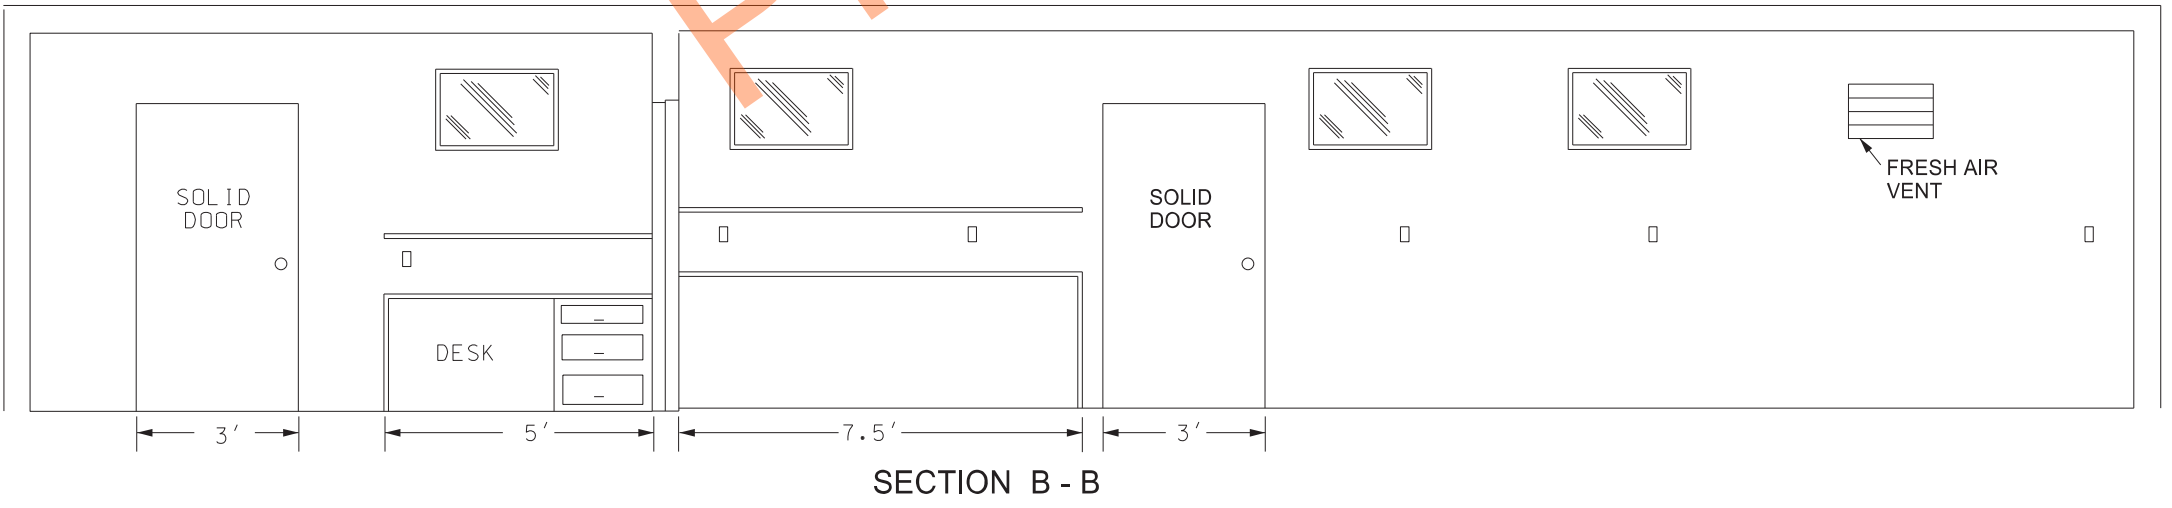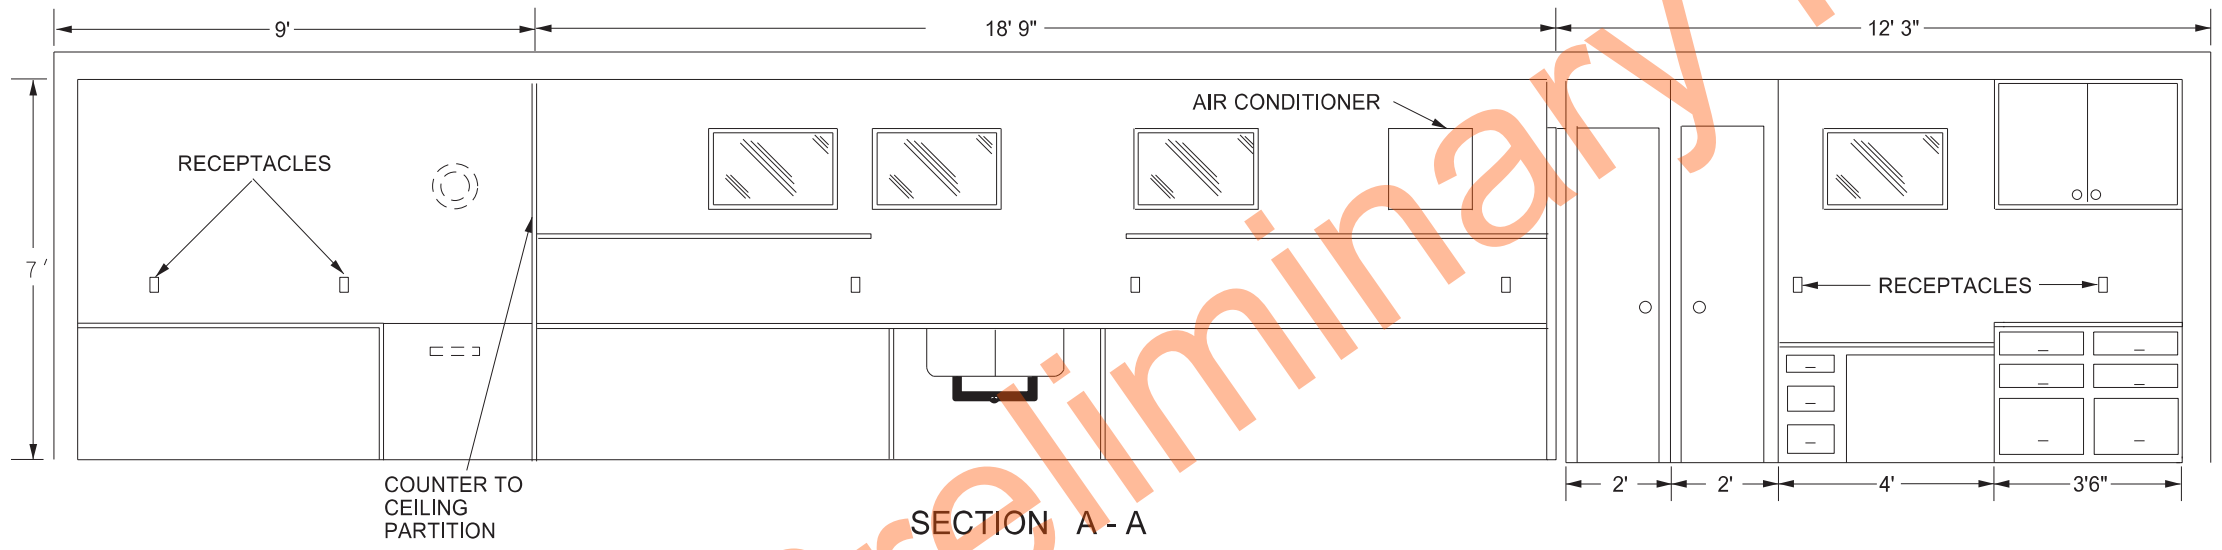


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-03-13	
REVISIONS	
DATE	CHANGE
07-30-14	Changed standard's title and revised notes.
01-11-16	Revised notes.
08-27-19	New Design Engineer PE Stamp
08-09-24	Electronic Stamp/Signature.




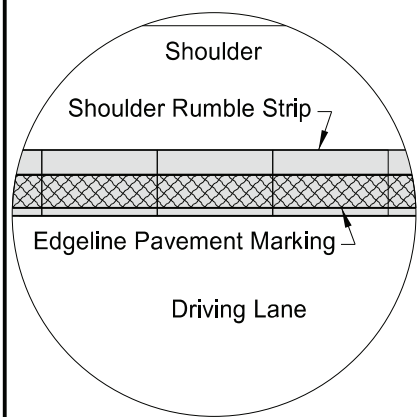


Inset A - Edgeline Rumble Strip
(Layout for opposite shoulder reversed)

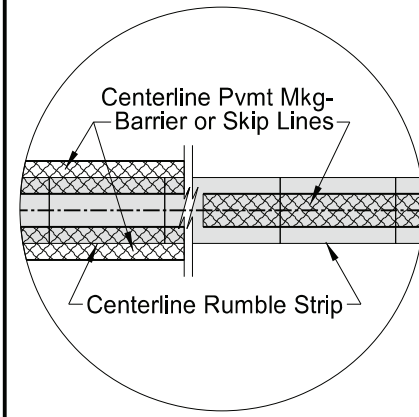

Inset B - Centerline Rumble Strip

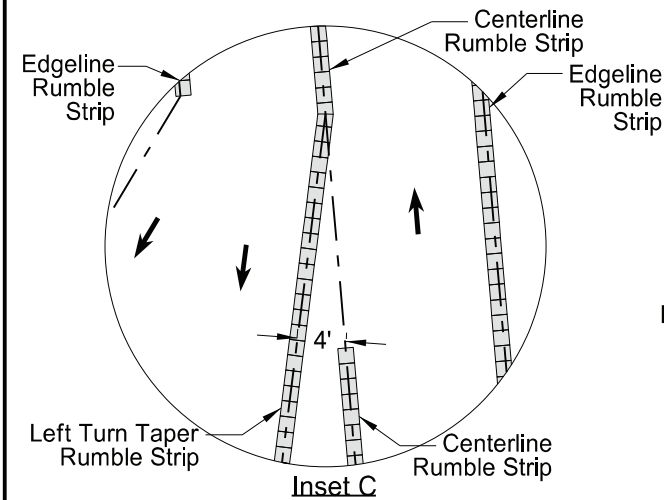

Inset C

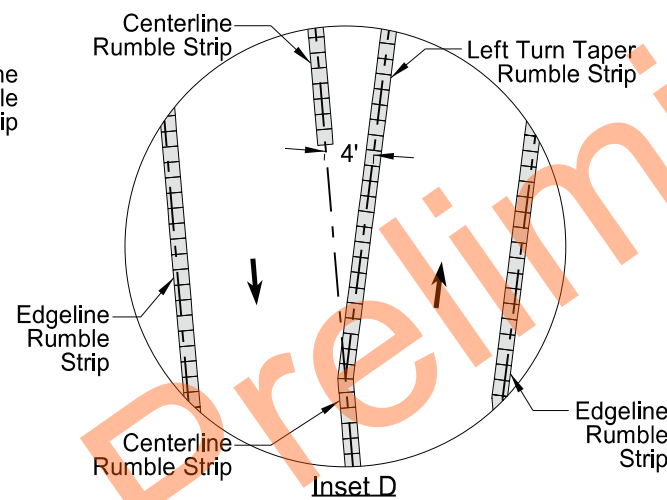


Inset D


NOTES:
1) Discontinue shoulder rumble strips through the entire length of right turn lanes and tapers, and at the radius of paved or gravel highways, section line approaches, or private drives.

2) Discontinue centerline rumble strips 100' before and after paved or gravel highways, section line approaches, or private drives. Place rumble strips at left turn lanes as shown below.


3) No additional quantity provided for centerline rumble strips on left turn tapers. Include all costs for centerline rumble strips on left turn tapers in the price bid for "Sinusoidal Rumble Strip - Asphalt Centerline" or "Sinusoidal Rumble Strip - Concrete Centerline".

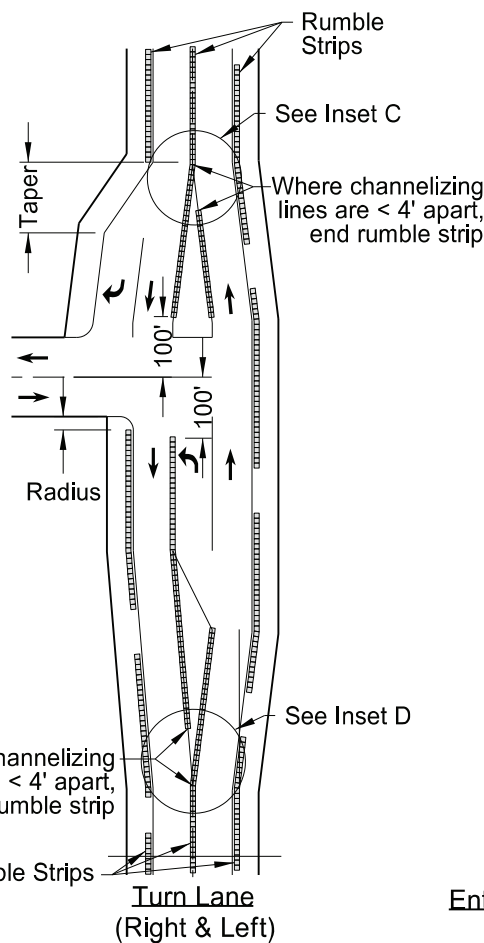


Entrance Roadways

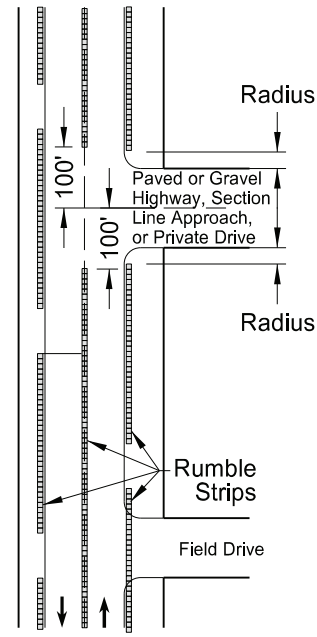


RUMBLE STRIPS UNDIVIDED HIGHWAYS (SHOULDERS LESS THAN 4')

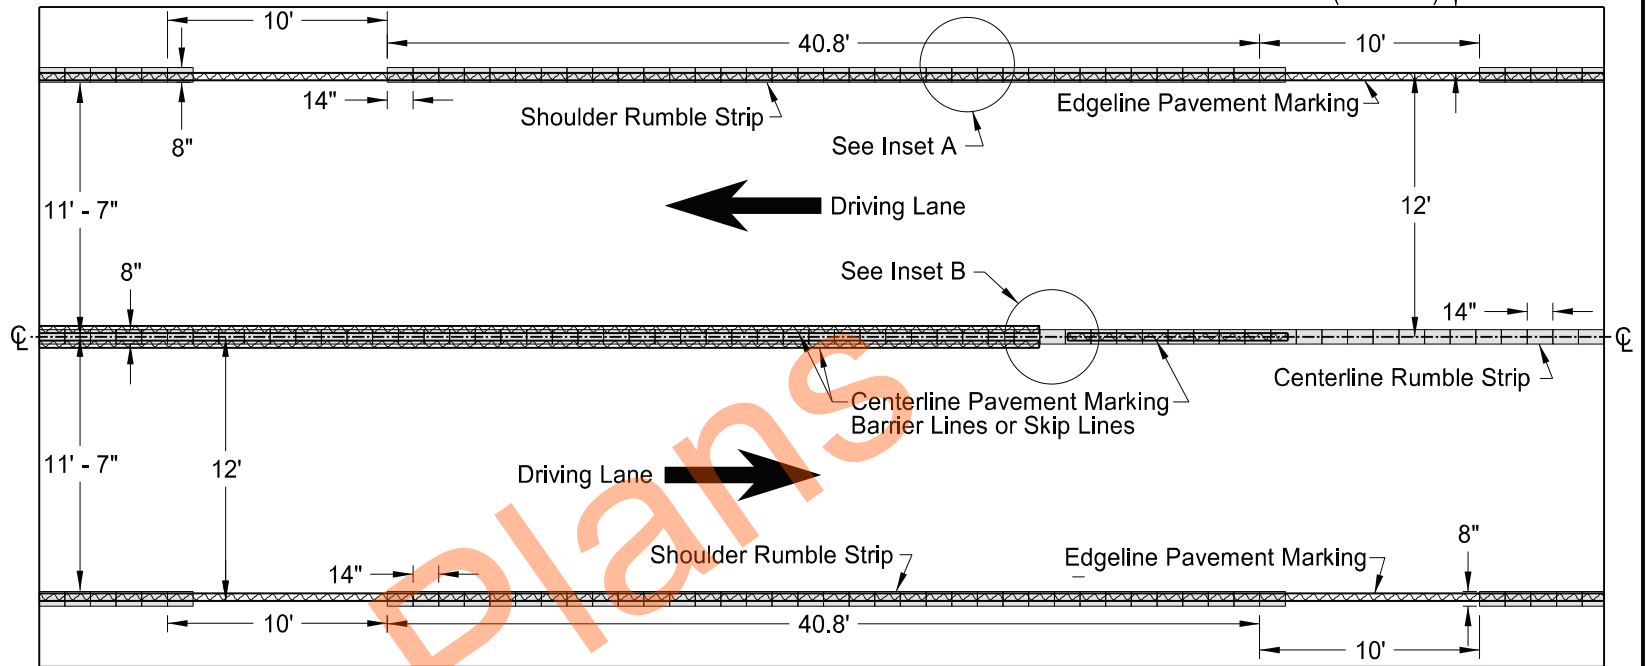


Undivided Highways (12' Driving Lanes & Shoulders 2' to < 4')

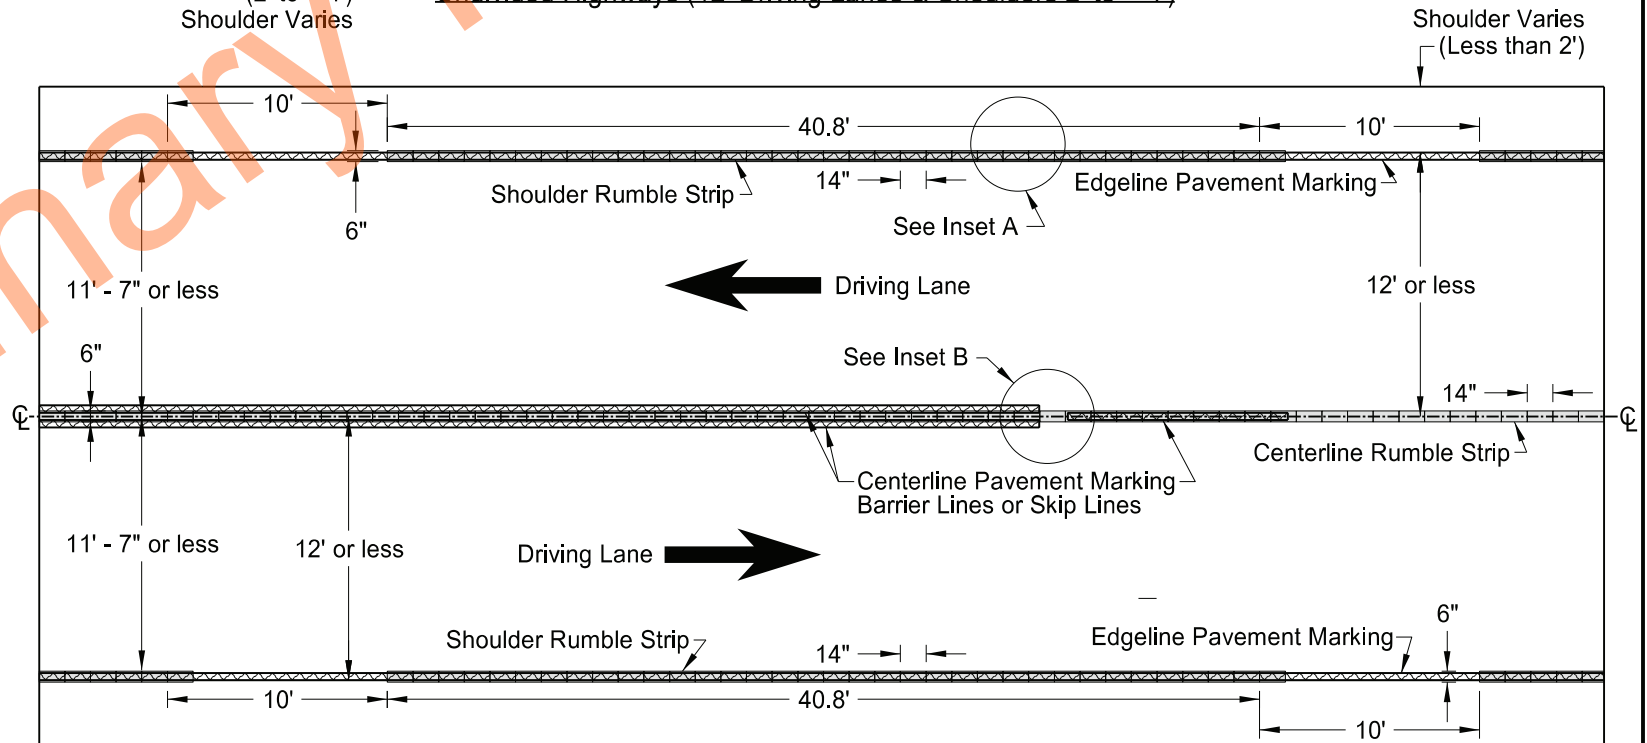

Undivided Highways (12' Driving Lanes or less & Shoulders Less than 2')

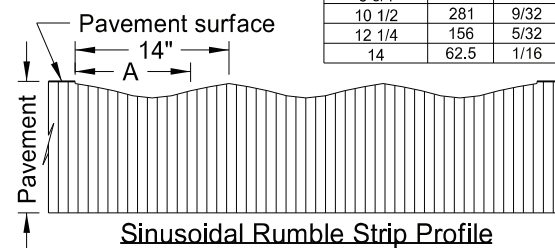

Milling Depths		
Location A (in)	MIL	Depth in
0	62.5	1/16
1 3/4	156	5/32
3 1/2	281	9/32
5 1/4	438	7/16
7	500	1/2
8 3/4	438	7/16
10 1/2	281	9/32
12 1/4	156	5/32
14	62.5	1/16

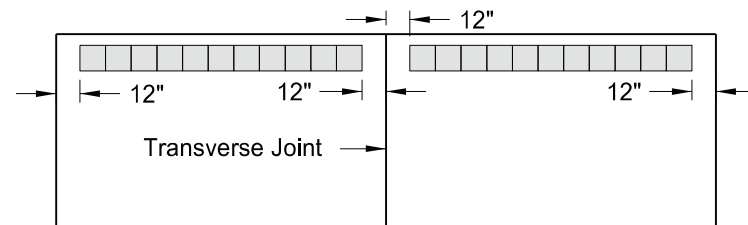

Discontinue rumble strip approx. 12" on both sides of PCC transverse joint


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-29-09	
REVISIONS	
DATE	CHANGE
2-25-10	Note 4 was added.
4-19-10	Revised Note 5, Note 6, and Turn Lane (Right & Left).
9-08-11	Revised Notes and D-760-4.
1-26-12	Revised details for rumble strip widths and dimensions.
10-25-19	Added missing dimensions.
11-16-21	Revised turn lane rumble layout.
3-07-23	Added Note 3.
5-26-23	Rumble Strips made Sinusoidal.




05/26/23

PAVEMENT MARKING


D-762-4

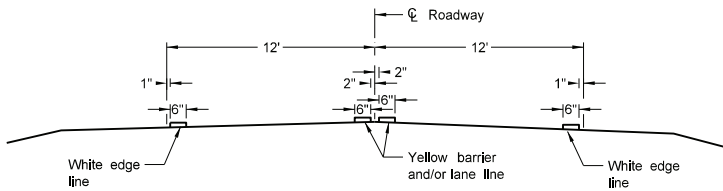


Two Lane Two Way
RURAL ROADWAY

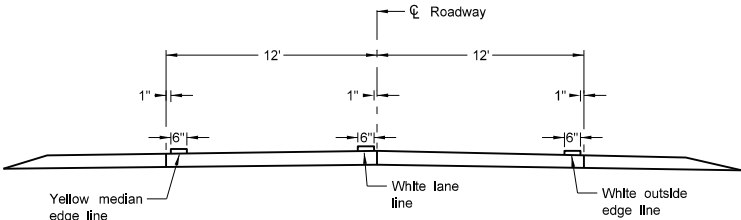


Two Lane Roadway
INTERSTATE HIGHWAY
Concrete Section

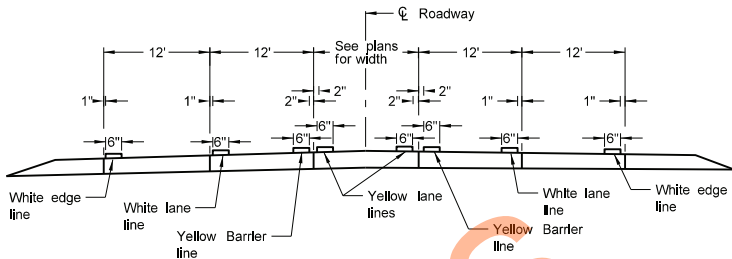


RURAL FIVE LANE ROADWAY
Concrete Section

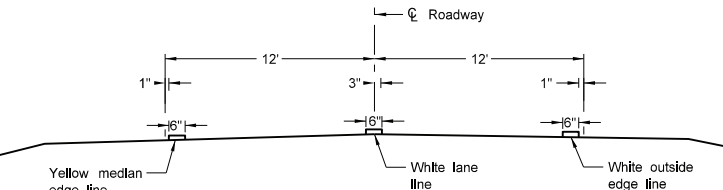


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Asphalt Section

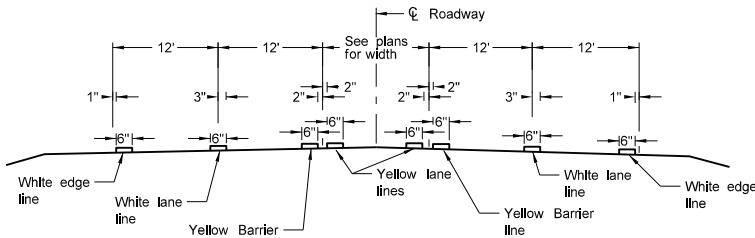


RURAL FIVE LANE ROADWAY
Asphalt Section

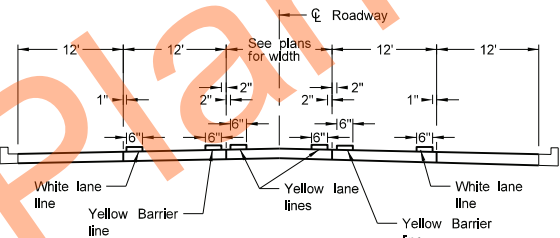


URBAN FIVE LANE SECTION
Concrete Section

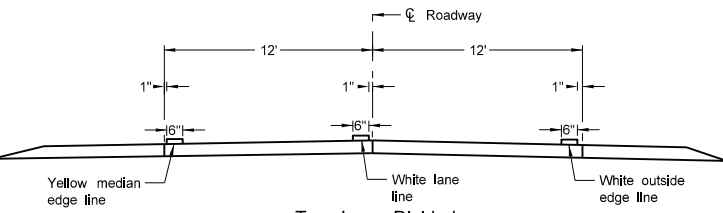


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Concrete Section

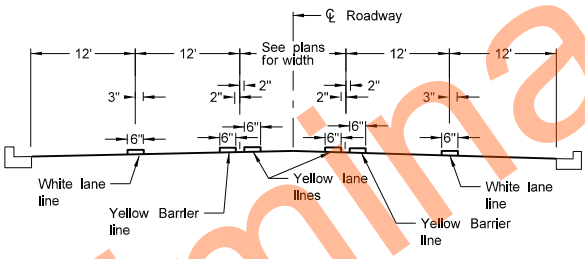


URBAN FIVE LANE SECTION
Asphalt Section

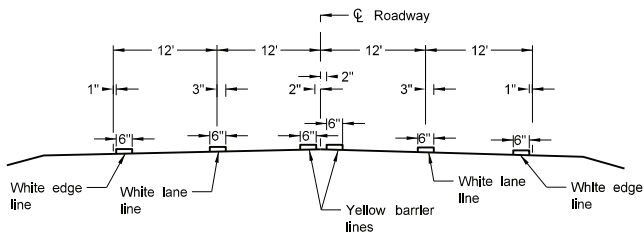


RURAL FOUR LANE ROADWAY
Asphalt Section

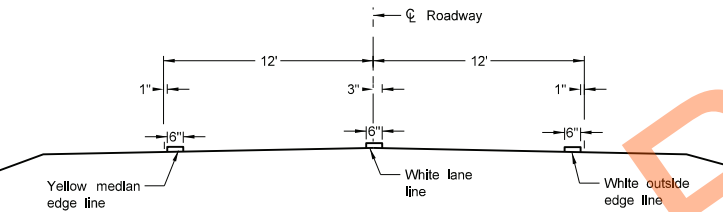


Two Lane Roadway
INTERSTATE HIGHWAY
Asphalt Section

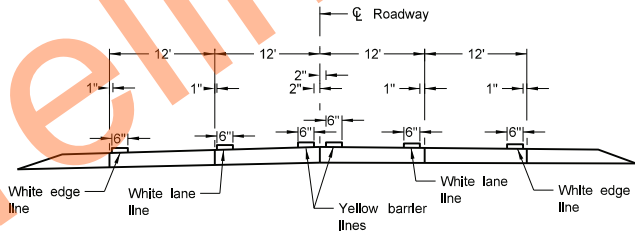


RURAL FOUR LANE ROADWAY
Concrete Section

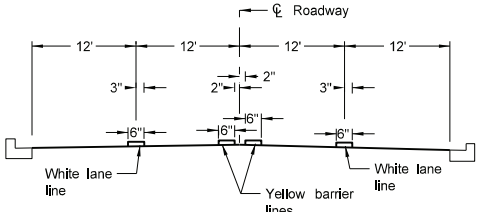

URBAN FOUR LANE SECTION
Asphalt Section

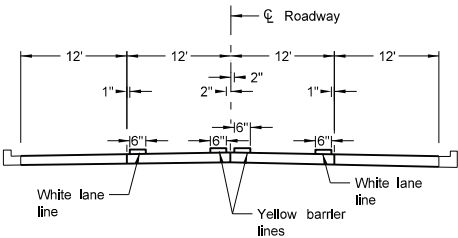

URBAN FOUR LANE SECTION
Concrete Section



CENTERLINE PAVEMENT MARKING SKIP SPACING DETAIL


- NOTES:
1. Continue edge lines through private drives and field drives. Break edge lines for intersections.
 2. For section lines, county roads, and street approaches, stripe the radii and edge lines of the paved surface within the right of way except where curb and gutter is present.
 3. Normal width line - 6 inches wide for freeways, expressways, and ramps; 6 inches for all other roadways with speed limits > 40 mph.
 3. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits < 40 mph.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
10-17-17	Updated to active voice.
08-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths.
07-09-24	Modified Note 1.




SHORT-TERM PAVEMENT MARKING


D-762-11

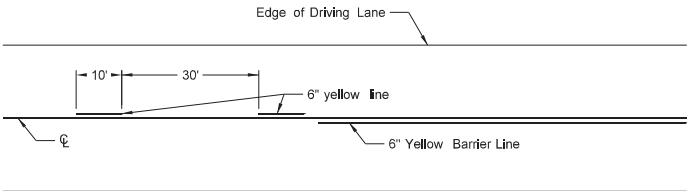


Painted or Tape Lines

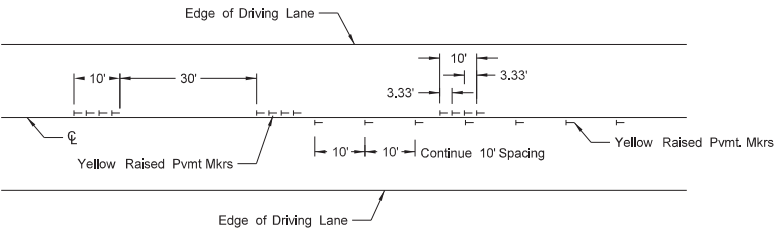


Raised Pavement Markers
TWO-LANE TWO-WAY ROADWAY

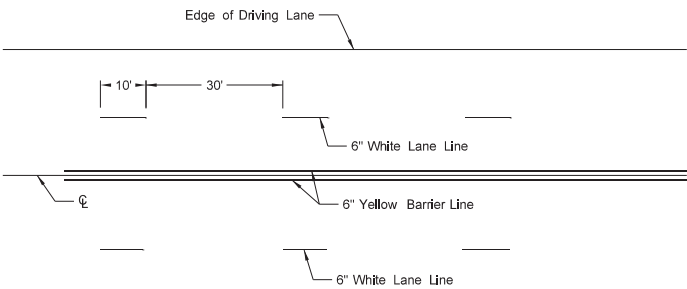


Painted or Tape Lines

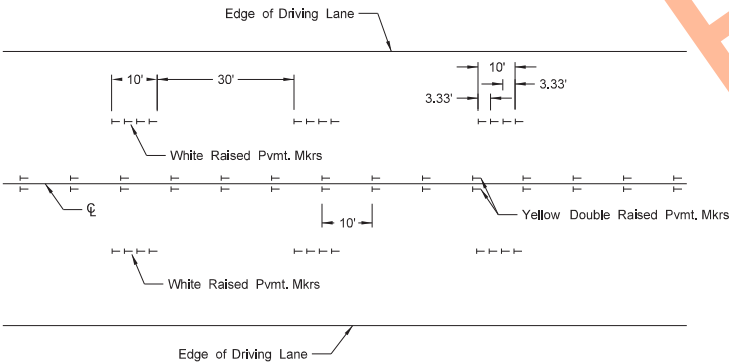


Raised Pavement Markers
FOUR LANE ROADWAY

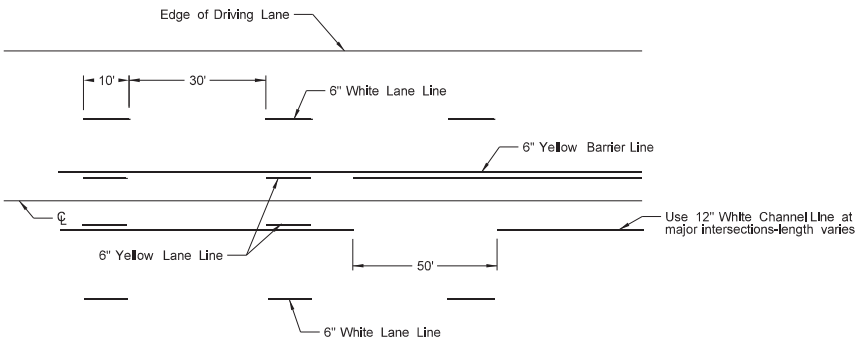


Painted or Tape Lines

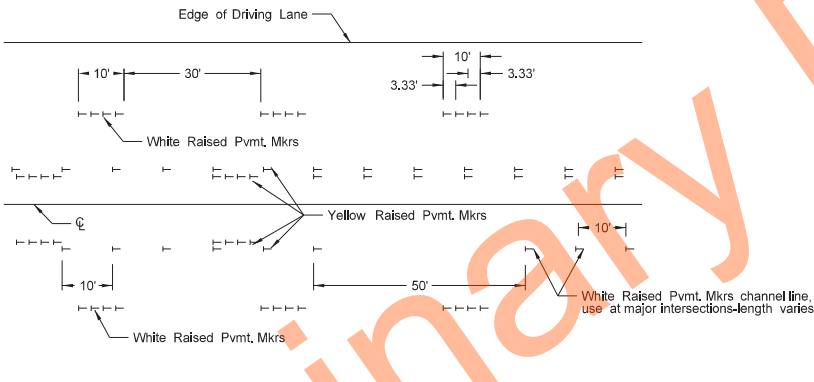

Raised Pavement Markers
FIVE LANE ROADWAY TWO WAY LEFT TURN

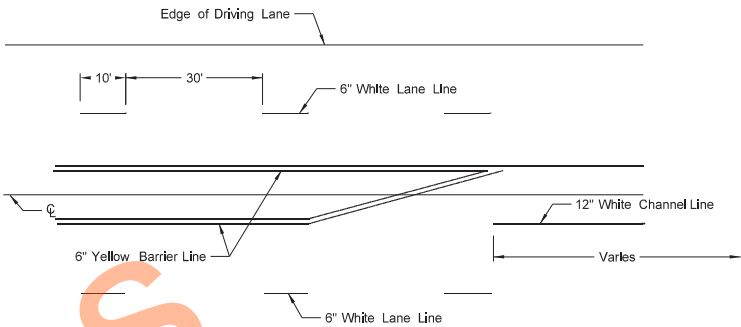

Painted or Tape Lines

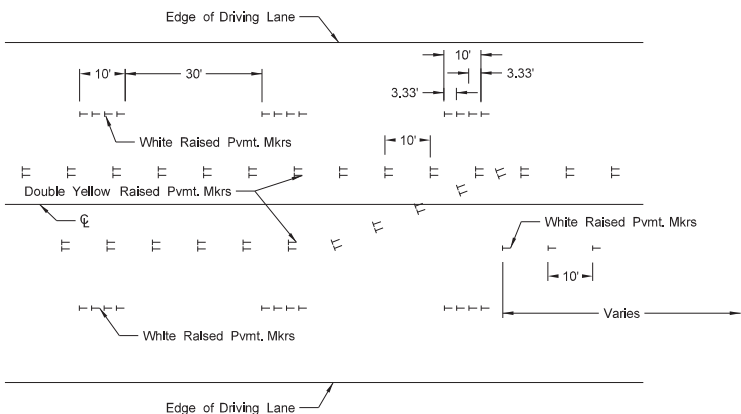

Raised Pavement Markers
FIVE LANE ROADWAY WITH MARKED ISLANDS

- NOTES:
1. Place no passing zones on two-lane two-way roadways as shown. In lieu of short term no passing zone pavement markings, place no passing zone signs. Replace no passing zone signs with short term no passing zone pavement marking within three days.
 2. Place short term center line stripe (paint) on top lift to match exact placement of permanent stripe.
 3. Remove raised markers and tape markings after permanent pavement marking is installed.
 4. Normal width line - 6 inches wide for freeways, expressways, and ramps;
6 inches for all other roadways with speed limits > 40 mph.
 5. Use 4 or 6 inch wide pavement marking for all other roadways with speed limits ≤ 40 mph.
 6. Wide lines - 8 inches wide if 4 inch normal width lines are used and
12 inches wide if 6 inch normal width lines are used.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE
3-29-16	Re-numbered to be D-762-11 (previously was D-762-6)
10-17-17	Updated to active voice.
8-27-19	New Design Engineer PE Stamp.
11-22-23	Revised pavement marking widths
1-17-24	Revised wide pvmt marking width.

