STATE	PROJECT NO.	SECTION NO.	SHEET NO.
N.D.	SS-8-018(088)064	110	1

Station / RP	Sign No.	Assembly No.	Flat Sheet For Signs IV SF	Flat Sheet For Signs XI SF	Sign Support Length 1st LF	Sign Support Length 2nd LF	Sign Support Length 3rd LF	Sign Support Length 4th LF	Vert Clear-ance FT	Support Size	Max Post Len LF	Sleeve Length 1st LF	Sleeve Length 2nd LF	Sleeve Length 3rd LF	Sleeve Length 4th LF	Sleeve Size	Anchor EA	Anchor LF	Anchor Size	Reset Sign Panel EA	Reset Sign Support EA	Break-Away EA	Comments
452+36 Rt	SN 1	35	7.5		13.6				5.0	2.5 x 2.5 10 ga	14.8						1	4	3 x 3 7 ga			1	
Sub Total			7.5	0.0		**Total**	13.6										**Total**	4		0	0	1	
Grand Total			**7.5**	**0.0**		**Total**	**13.6**										**Total**	**4**	**0**	**0**	**0**	**1**	

REGISTERED PROFESSIONAL ENGINEER
Schumaker, Doug A.
PE-5047
05/30/18
NORTH DAKOTA

Sign Summary
Perforated Tube

9 MILES NORTH OF JCT ND 46

ND 18

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SS-8-018(088)064	110	2

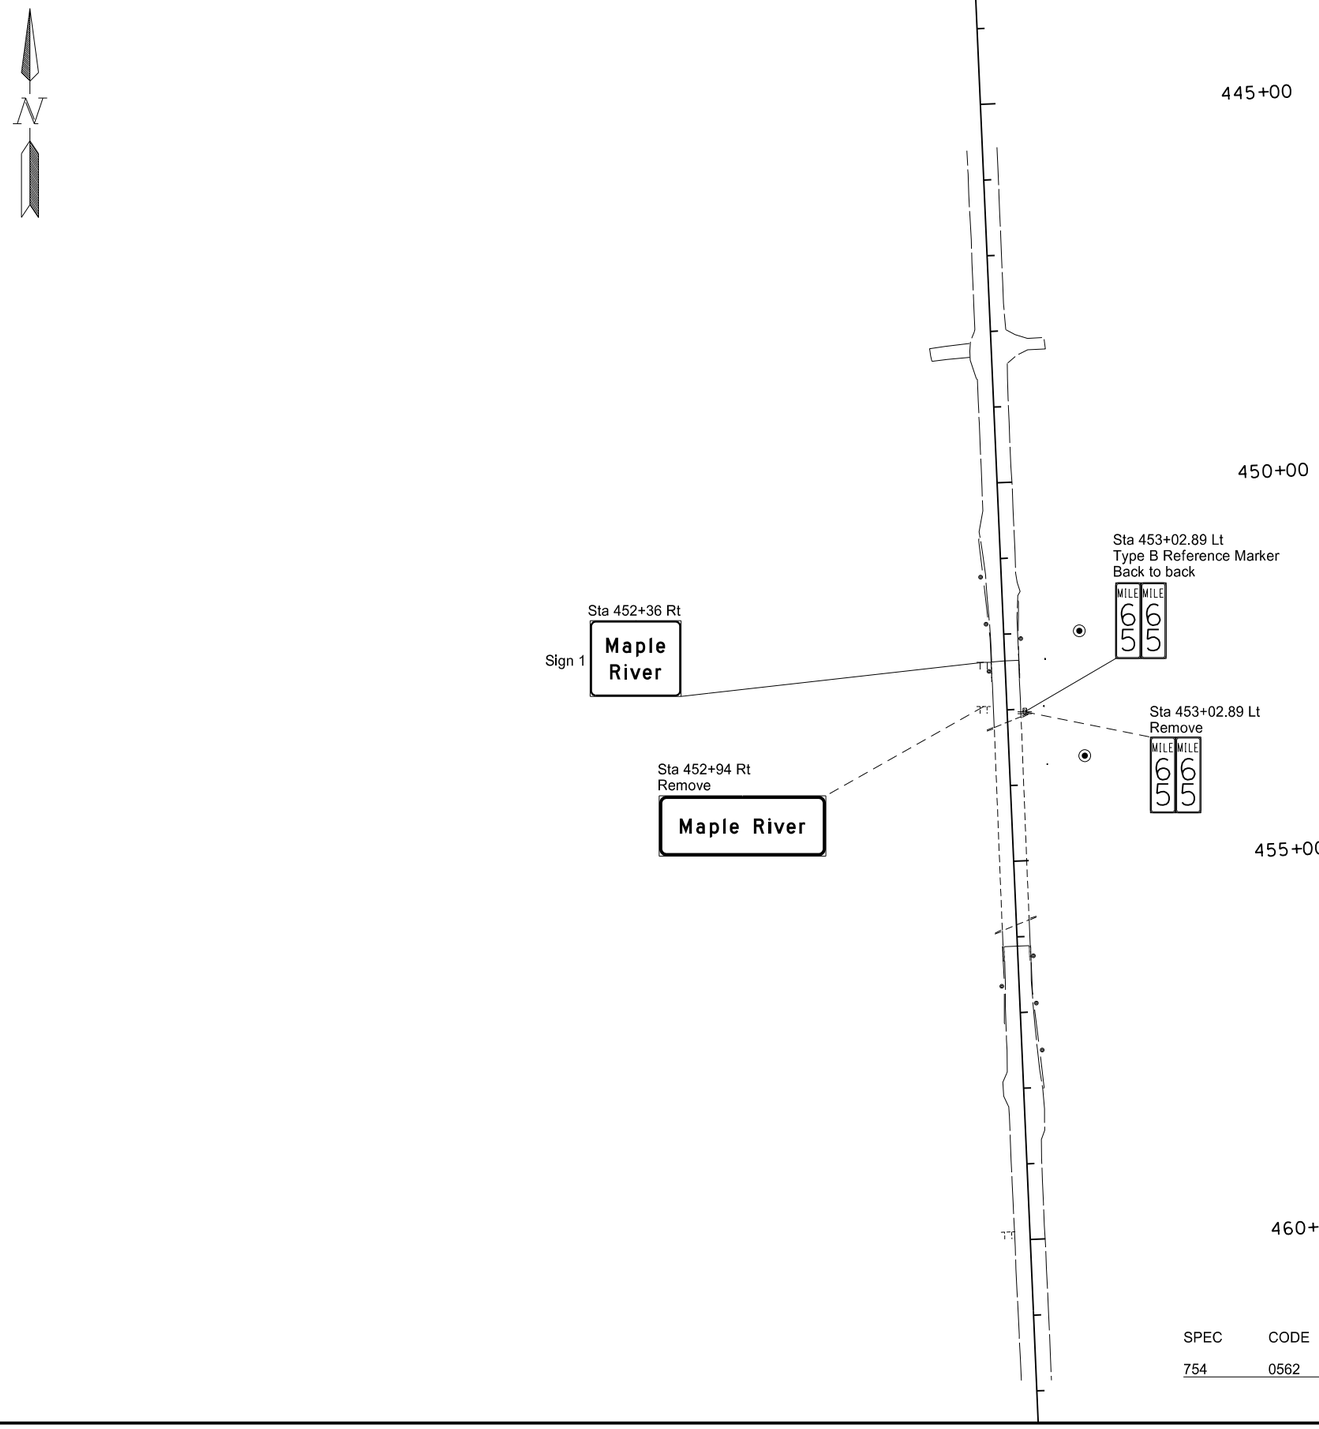

SPEC	CODE	BID ITEM	QTY	UNIT
754	0562	REFERENCE MARKER-TYPE B STA 453+02.89 LT	1	EA

REGISTERED PROFESSIONAL ENGINEER
Schumaker, Doug A.
PE-5047
05/30/18
NORTH DAKOTA

Sign Layout

9 MILES NORTH OF JCT ND 46

ND 18

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SS-8-018(088)064	110	3

SIGN NUMBER	Sign 1
WIDTH X HEIGHT	3'-0" x 2'-6"
BORDER WIDTH	0.75" (inset 0")
CORNER RADIUS	2.25"
MOUNTING	Ground
BACKGROUND	TYPE: IV Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: IV Reflective
	COLOR: White

SYMBOL	X	Y	WID	HT	ANGLE

STATION(S):
452+94 Rt

AREA: 7.5 Sq.Ft.



Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

PANEL STYLE: ND_Conv_Geographic Feature.ssl

LETTER POSITION (X)																		LENGTH	SIZE	SERIES
M	a	p	l	e														23.3	6/4.5	D 2000
6.3	12.8	18.2	23.5	26.1																
R	i	v	e	r														20.3	6/4.5	D 2000
7.9	13.5	15.7	20.8	25.9																

REGISTERED PROFESSIONAL ENGINEER
Schumaker, Doug A.
PE-5047
05/30/18
NORTH DAKOTA

Sign Details

9 MILES NORTH OF JCT ND 46

ND 18